

**(12) STANDARD PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. **AU 2009310393 B2**

(54) Title  
**Modular, reduced-pressure, wound-closure systems and methods**

(51) International Patent Classification(s)  
**A61M 1/00 (2006.01)**

(21) Application No: **2009310393** (22) Date of Filing: **2009.05.15**

(87) WIPO No: **WO10/051072**

(30) Priority Data

(31) Number	(32) Date	(33) Country
<b>61/109,410</b>	<b>2008.10.29</b>	<b>US</b>
<b>61/109,486</b>	<b>2008.10.29</b>	<b>US</b>
<b>61/109,448</b>	<b>2008.10.29</b>	<b>US</b>
<b>61/109,390</b>	<b>2008.10.29</b>	<b>US</b>

(43) Publication Date: **2010.05.06**

(44) Accepted Journal Date: **2013.02.28**

(71) Applicant(s)  
**KCI Licensing, Inc.**

(72) Inventor(s)  
**Heaton, Keith Patrick;Hardman, Ian James;Coward, Christopher Guy;Hall, Colin John**

(74) Agent / Attorney  
**Shelston IP, L 21 60 Margaret St, Sydney, NSW, 2000**

(56) Related Art  
**US 2005/085795 A1**  
**US 2002/115956 A1**  
**US 2006/079852 A1**

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 May 2010 (06.05.2010)

(10) International Publication Number  
**WO 2010/051072 A1**

(51) International Patent Classification:  
A61M 1/00 (2006.01)

Northmoor Park, Wareham, Dorset BH20 4SF (GB).  
**HALL, Colin, John** [GB/GB]; 33 Oakdale Road, Poole,  
Dorset BH15 3LD (GB).

(21) International Application Number:

PCT/US2009/044266

(74) Agents: **WELCH, Gerald T.** et al.; Sonnenschein, Nath  
& Rosenthal LLP, P.O. Box 061080, Wacker Drive Sta-  
tion, Sears Tower, Chicago, IL 60606 (US).

(22) International Filing Date:

15 May 2009 (15.05.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/109,410	29 October 2008 (29.10.2008)	US
61/109,448	29 October 2008 (29.10.2008)	US
61/109,390	29 October 2008 (29.10.2008)	US
61/109,486	29 October 2008 (29.10.2008)	US

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,  
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,  
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,  
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,  
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **KCI LI-  
CENSING, INC.** [US/US]; Legal Department - Intellec-  
tual Property, P.O. Box 659508, San Antonio, TX  
78265-9508 (US).


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,  
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),  
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,  
MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HEATON, Keith,  
Patrick** [GB/GB]; 3 Clifton Road, Penn Hill, Poole BH14  
1TY (GB). **HARDMAN, Ian, James** [GB/GB]; 74 Victo-  
ria Avenue, Bournemouth, Dorset BH9 2RP (GB). **COW-  
ARD, Christopher, Guy** [GB/GB]; 11 Norden Drive,

[Continued on next page]

(54) Title: MODULAR, REDUCED-PRESSURE, WOUND-CLOSURE SYSTEMS AND METHODS

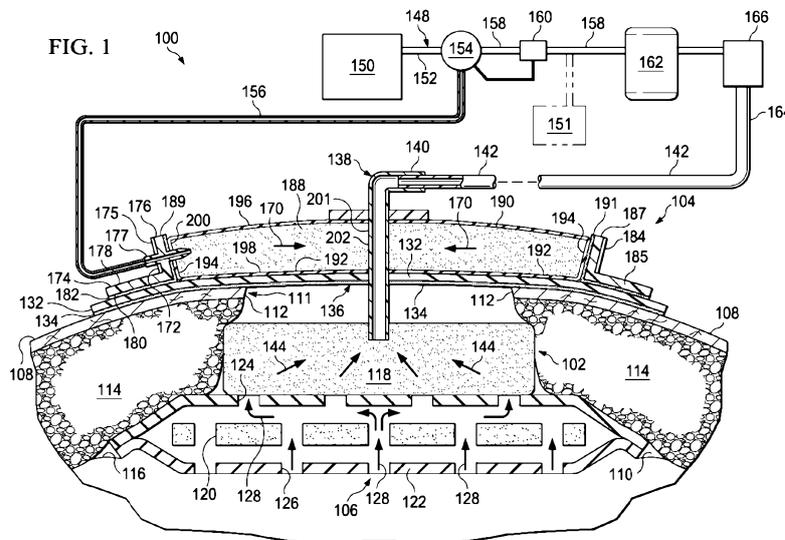

(57) Abstract: A modular, reduced-pressure, wound-closure system for generating a closing force on a surface wound on a patient includes a sealed contracting member, a plurality of attachment base members, and a plurality of connecting members. The combination of the plurality of attachment base members and plurality of connecting members forms a circumferential wall around the surface wound. The sealed contracting member is operable to be disposed within an interior space defined by the circumferential wall and coupled to at least a portion of the circumferential wall. When reduced pressure is provided to the sealed contracting member, the sealed contracting member contracts and the circumferential wall delivers a closing force. Other systems and methods are presented.

WO 2010/051072 A1

**WO 2010/051072 A1**



---

**Published:**

— *with international search report (Art. 21(3))*



the epidermis. Unless otherwise indicated, as used herein, "or" does not require mutual exclusivity.

Currently, an abdominal opening on the epidermis may be closed using sutures, staples, clips, and other mechanical devices. Such devices often cause puncture wounds  
5 or can cause other wounds. Moreover, if severe edema occurs, tremendous pressure may be placed on the closure device and the pressure may cause harm. For example, if the pressure rises due to edema, the sutures may tear out.

With respect to an overall system for allowing reentry into the abdominal cavity, a number of techniques have been developed. One approach is to place towels  
10 into the cavity and then use clips, such as hemostats, to close the skin over the towels. While simple and fast, the results are regarded as suboptimal. Another approach is the so-called "Bogota bag." With this approach, a bag is sutured into place to cover the open abdomen in order to provide a barrier. Still another approach, sometimes called a "vac pack," is to pack towels in the wound and then place a drain into the abdomen and cover  
15 the abdomen with a drape. Finally, a reduced pressure approach has been used. Such an approach is shown in U.S. Patent 7,381,859 to Hunt et al. and assigned to KCI Licensing, Inc. of San Antonio, Texas. U.S. Patent 7,381,859 is incorporated herein by reference for all purposes.

It is an object of the present invention to overcome or ameliorate at least one of  
20 the disadvantages of the prior art, or to provide a useful alternative.

### SUMMARY

According to a first aspect of the invention, there is provided a modular, reduced-pressure, wound-closure system for generating a closing force on a surface  
25 wound on a patient, the system comprising: a sealed contracting member, the sealed contracting member operable to contract when placed under reduced pressure; a plurality of attachment base members, each attachment base member having a base and a first wall, the first wall having a first end and a second end, the first end of the first wall having a first movable connection member and the second end of the first wall having a  
30 second movable connection member, each attachment base member for releasably attaching to a portion of a patient's epidermis and for coupling to the sealed contracting member; a plurality of connecting members, each connecting member having a second wall with a first end and a second end, the first end of the second wall having a third

movable connection member and the second end of the second wall having a fourth  
movable connection member, each connecting member for movably coupling to one of  
the plurality of attachment base members; a first reduced-pressure interface fluidly  
coupled to the sealed contracting member, the first reduced-pressure interface operable  
5 to deliver reduced pressure to the sealed contracting member; and wherein the plurality  
of attachment base members and the plurality of connecting members are operable to  
movably couple to form a circumferential wall defining an interior space and wherein  
the sealed contracting member is operable to be disposed and coupled within the interior  
space.

10 According to a second aspect of the invention, there is provided a method of  
manufacturing a modular, reduced-pressure, wound-closure system for generating a  
closing force on a surface wound on a patient, the method comprising the steps of:  
forming a sealed contracting member, the sealed contracting member operable to  
contract when subjected to reduced pressure; forming a plurality of attachment base  
15 members, each attachment base member having a base and a first wall, the first wall  
having a first end and a second end, the first end of the first wall having a first movable  
connection member and the second end of the first wall having a second movable  
connection member, each attachment base member for releasably attaching to a portion  
of a patient's epidermis and for coupling to the sealed contracting member; forming a  
20 plurality of connecting members, each connecting member having a second wall with a  
first end and a second end, the first end of the second wall having a third movable  
connection member and the second end of the second wall having a fourth movable  
connection member, each connecting member for movably coupling to at least two of  
the plurality of attachment base members; and wherein the plurality of attachment base  
25 members and the plurality of connecting members are operable to movably couple to  
form a circumferential wall defining an interior space.

According to a third aspect of the invention, there is provided a method for  
generating a closing force on a surface wound on a patient, the method comprising the  
steps of: providing a sealed contracting member; providing a plurality of attachment  
30 base members, each attachment base member having a base and a first wall, the first  
wall having a first end and a second end, the first end of the first wall having a first  
movable connection member and the second end having a second movable connection  
member, each attachment base member for releasably attaching to a portion of a patient's

epidermis; providing a plurality of connecting members, each connecting member having a second wall with a first end and a second end, the first end of the second wall having a third movable connection member and the second end of the second wall having a fourth movable connection member, each connecting member for movably  
5 coupling to the plurality of attachment base members; movably coupling the plurality of attachment base members and plurality of connecting members to form a circumferential wall defining an interior space; disposing the sealed contracting member within the interior space; coupling the sealed contracting member to at least a portion of the circumferential wall; and supplying reduced pressure to the sealed contracting member,  
10 whereby a force is developed that pulls the attachment base members towards an interior of the surface wound to create a closing force on the surface wound.

According to a fourth aspect of the invention, there is provided a reduced-pressure, wound-closure and treatment system for providing a closing force to a surface wound on a patient and for delivering reduced pressure to a tissue site, the system  
15 comprising: a wound-closing subsystem comprising: a sealed contracting member, the sealed contracting member operable to contract when placed under reduced pressure, a plurality of attachment base members, each attachment base member having a base and a first wall, the first wall having a first end and a second end, the first end of the first wall having a first movable connection member and the second end of the first wall having a  
20 second movable connection member, each attachment base member for releasably attaching to a portion of a patient's epidermis and for coupling to the sealed contracting member, a plurality of connecting members, each connecting member having a second wall with a first end and a second end, the first end of the second wall having a third movable connection member and the second end of the second wall having a fourth  
25 movable connection member, each connecting member for movably coupling to the plurality of attachment base members, a closing-reduced-pressure interface fluidly coupled to the sealed contracting member, the first reduced-pressure interface operable to deliver reduced pressure to the sealed contracting member, wherein the plurality of attachment base members and the plurality of connecting members are operable to  
30 movably couple to form a circumferential wall defining an interior space and wherein the sealed contracting member is operable to be disposed and coupled within the interior space, and a reduced-pressure treatment subsystem comprising: a manifold for disposing proximate the tissue site, the manifold operable to distribute reduced pressure and to

receive fluids, a sealing member for placement on the patient's epidermis and operable to form a pneumatic seal over the manifold, and a treatment-reduced-pressure interface for fluidly coupling to the manifold, the treatment-reduced-pressure interface operable to deliver a second reduced pressure to the manifold.

5           Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise", "comprising", and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

10           Other features and advantages of the illustrative embodiments will become apparent with reference to the drawings and detailed description that follow.

**BRIEF DESCRIPTION OF THE DRAWINGS**

FIGURE 1 is a schematic cross-section, with a portion presented as a block diagram, of an illustrative embodiment of a reduced-pressure, wound-closure and treatment system;

5        FIGURE 2 is a schematic, perspective view of an illustrative embodiment of a attachment base member for use as part of an illustrative embodiment of a reduced-pressure, wound-closure system;

10       FIGURE 3 is a schematic, perspective view of an illustrative embodiment of a connection member for use as part of an illustrative embodiment of a reduced-pressure, wound-closure system;

FIGURE 4 is a schematic, perspective view of an illustrative embodiment of a reduced-pressure interface member for use as part of an illustrative embodiment of a reduced-pressure, wound-closure system;

15       FIGURES 5A and 5B are schematic, plan views of an illustrative embodiment of a reduced-pressure, wound-closure system in a non-contracted position (FIG. 5A) and a contracted position (FIG. 5B); and

FIGURE 6 is schematic, perspective view of an illustrative embodiment of a reduced-pressure, wound-closure system.

## DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

In the following detailed description of the illustrative embodiments, reference is made to the accompanying drawings that form a part hereof. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is understood that other embodiments may be utilized and that logical structural, mechanical, electrical, and chemical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the embodiments described herein, the description may omit certain information known to those skilled in the art. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the illustrative embodiments are defined only by the appended claims.

Referring to FIGURES 1-2, and initially to FIGURE 1, an illustrative embodiment of a reduced-pressure, wound-closure and treatment system 100 is presented. The reduced-pressure, wound-closure and treatment system 100 may include a reduced-pressure treatment subsystem 102 and a wound-closure subsystem 104. The reduced-pressure treatment subsystem 102 may be used for treating a tissue site 106 with reduced pressure. The tissue site 106 may be the bodily tissue of any human, animal, or other organism, including bone tissue, adipose tissue, muscle tissue, dermal tissue, vascular tissue, connective tissue, cartilage, tendons, ligaments, or any other tissue. The tissue site 106 may be within a body cavity, such as an abdominal cavity 110, and may include various tissue layers including a wound in epidermis 108. Treatment with the reduced-pressure treatment subsystem 102 may include removing fluids, such as ascites or exudates, delivering reduced pressure, or providing a protective barrier.

In the illustrative embodiment, the reduced-pressure, wound-closure and treatment system 100 is presented in the context of the abdominal cavity 110 and a surface wound 111, which has wound edges 112. Other subdermal tissue 114 may also have been opened, such as fat tissue, muscles, fascia, etc. The abdominal cavity 110 is shown with abdominal contents 116, which form a surface or support.

The reduced-pressure treatment subsystem 102 of the reduced-pressure, wound-closure and treatment system 100 helps to deliver reduced pressure to the tissue site 106 and the abdominal cavity 110. The reduced-pressure treatment subsystem 102 includes a manifold 118 disposed within the abdominal cavity 110 to distribute reduced pressure within the

abdominal cavity 110 and to receive fluids. The manifold 118 may include or be associated with a manifold member 120, or second manifold, in a non-adherent envelope 122. The non-adherent envelope 122 has apertures 124 on a first side and apertures 126 on a second, inward-facing (tissue-facing) side. The apertures 124 and 126 facilitate flow of fluids as suggested by arrows 128. The apertures 124 and 126 may take any shape, such as rectangular openings, circular openings, polygons, slits (elongated slots), etc. The non-adherent envelope 122 may be formed from a flexible film, such as a polyurethane film, a drape material, or any non-adherent material.

Reduced pressure may be applied by the reduced-pressure treatment subsystem 102 to the abdominal cavity 110 and the tissue site 106 to help promote removal of exudates, ascites, or other liquids, bacteria, fibrin, dead tissue, toxins, residual blood, etc. Reduced pressure may also be used in certain situations to stimulate growth of additional tissue. In the case of a wound at the tissue site 106, the growth of granulation tissue and removal of exudates and bacteria may help to promote healing of the wound. In the situation of a non-wounded or non-defective tissue, reduced pressure may be used to promote the growth of tissue that may be harvested and transplanted to another tissue site. In other situations, fluid removal may be the main reason for applying reduced pressure.

As used herein, “reduced pressure” generally refers to a pressure less than the ambient pressure at the tissue site 106. In most cases, the reduced pressure will be less than atmospheric pressure at which the patient is located. Alternatively, the reduced pressure may be less than the hydrostatic pressure of the tissue site 106. Unless otherwise indicated, values of pressure stated herein are gauge pressures.

The manifold 118 and the manifold member 120 are disposed in the abdominal cavity 110 and may be disposed at or near the tissue site 106. Typically, the non-adherent envelope 122, which contains the manifold member 120, is disposed against the tissue site 106 and, in particular, proximate the abdominal contents 116. The manifold 118 is disposed adjacent the non-adherent envelope 122. The manifold 118 and the manifold member 120 may take many forms. The term “manifold” as used herein generally refers to a substance or structure that is provided to assist in applying reduced pressure to, delivering fluids to, or removing fluids from a tissue site, such as the tissue site 106. The manifold 118 and the manifold member 120 typically include a plurality of flow channels or pathways that are interconnected to improve distribution of fluids provided to and removed from the area proximate the manifold 118 and

the manifold member 120. The manifold 118 and the manifold member 120 may be formed from a biocompatible material that is capable of being placed in contact with tissue and that distributes reduced pressure. Examples of manifolds may include, without limitation, devices that have structural elements arranged to form flow channels, cellular foam, such as open-cell  
5 foam, porous tissue collections, and liquids, gels and foams that include or cure to include flow channels.

The manifold 118 and manifold member 120 may be porous and may be made from foam, gauze, felted mat, or any other material suited to a particular biological application. In one embodiment, the manifold 118 and manifold member 120 are made from a porous foam  
10 that includes a plurality of interconnected cells or pores that act as flow channels. The porous foam may be polyurethane, open-cell, reticulated foam, such as a GranuFoam® material manufactured by Kinetic Concepts, Incorporated of San Antonio, Texas. Other embodiments may include “closed cells” at certain locations to help direct flow. In some situations, the manifold 118, the manifold member 120, and the non-adherent envelope 122 may be used to  
15 distribute fluids, such as medications, antibacterials, growth factors, and other solutions to the tissue site 106. Other layers may be included as part of the manifold 118 or manifold member 120, such as absorptive material, wicking material, hydrophobic material, and hydrophilic material.

A sealing member 132 may be placed over the surface wound in the epidermis 108  
20 and, in particular, made to overlap the wound edges 112 to provide a pneumatic seal. Thus, the sealing member 132 provides a seal over the manifold 118 and the non-adherent envelope 122. The sealing member 132 may be a cover that is used to secure the manifold 118 and non-adherent envelope 122 at the tissue site 106. While the sealing member 132 may be impermeable or semi-permeable, the sealing member 132 is capable of maintaining a reduced  
25 pressure at the tissue site 106 after installation of the sealing member 132 over the manifold 118. The sealing member 132 may be a flexible over-drape or film formed from a silicone based compound, acrylic, hydrogel or hydrogel-forming material, or any other biocompatible material that includes the impermeability or permeability characteristics desired for the intended tissue site.

30 The sealing member 132 may further include an attachment device 136 to secure the sealing member 132 to the patient's epidermis 108. The attachment device 136 may take many forms; for example, a sealing tape might be used or an adhesive 134 may be positioned

along a perimeter of the sealing member 132 or any portion of the sealing member 132 to provide a pneumatic seal. The adhesive 134 might also be pre-applied and covered with a releasable member (not shown) that is removed at the time of application.

5 A first reduced-pressure interface 138, or treatment-reduced-pressure interface, such as a port 140, or connector, may be used to deliver reduced pressure from a first reduced-pressure delivery conduit 142 to the manifold 118. The first reduced-pressure interface 138 may also deliver any exudate, ascites, or other fluids from the manifold 118 to the first reduced-pressure delivery conduit 142. The reduced pressure in the manifold 118 pulls the fluid in the direction shown by arrows 144 and to the first reduced-pressure delivery conduit 142. The first  
10 reduced-pressure interface 138 permits the passage of fluid from the manifold 118 to the first reduced-pressure delivery conduit 142. For example, fluids collected from the tissue site 106 using the manifold member 120 and the manifold 118 may enter the first reduced-pressure delivery conduit 142 via the first reduced-pressure interface 138. In another embodiment, the reduced-pressure treatment subsystem 102 may exclude the first reduced-pressure interface  
15 138, and the first reduced-pressure delivery conduit 142 may be inserted directly into the sealing member 132 and the manifold 118. The first reduced-pressure delivery conduit 142 may be a medical conduit, multi-lumen member, tubing, or any other means for delivering a reduced pressure.

A reduced-pressure subsystem 148 may be used to supply reduced pressure that is  
20 delivered to the first reduced-pressure delivery conduit 142. The reduced-pressure subsystem 148 may include a first reduced-pressure unit, or source, 150 that delivers reduced pressure to a conduit 152, which delivers reduced pressure to a three-way valve 154. One portion of the reduced pressure may leave the three-way valve 154 through the second reduced-pressure delivery conduit 156. Another portion of the reduced pressure may leave the three-way valve  
25 154 through a reduced-pressure conduit 158. Located on the reduced-pressure conduit 158 may be any number of devices, such as a reduced-pressure feedback unit 160, which may, for example, give feedback to the three-way valve 154 concerning the regulation of the reduced pressure within the reduced-pressure conduit 158. The reduced-pressure conduit 158 delivers the reduced pressure to a canister 162, which is operable to hold any fluids delivered to the  
30 canister 162 from the tissue site 106. Reduced pressure leaving the canister 162 is delivered to the first reduced-pressure delivery conduit 142. The first reduced-pressure delivery conduit 142 may be referred to as delivering a treatment-reduced-pressure because the reduced

pressure therein has been placed, by the reduced-pressure subsystem 148, at the desired pressure and conditions for use in reduced-pressure treatment at the tissue site 106. The reduced pressure delivered to the first reduced-pressure delivery conduit 142 is typically selected to be in the range -50 mm Hg to -500 mm Hg at the tissue site and more typically  
5 between -100 mm Hg and -300 mm Hg.

A number of different devices, e.g., representative device 166, may be added to a medial portion 164 of the first reduced-pressure delivery conduit 142. The representative device 166 may be a pressure feedback device, a volume detection system, a blood detection system, an infection detection system, a flow monitoring system, a temperature monitoring  
10 system, etc. Some of these devices may be formed integrally to other parts; for example, the canister 162 may include one or more filters, e.g., a hydrophobic filter that prevents liquid from exiting.

There are many ways of developing the reduced pressure to be used with the reduced-pressure, wound-closure and treatment system 100. In the illustrative embodiment shown, the  
15 first reduced-pressure unit 150 is used for both applications, i.e., for wound closing and for reduced-pressure treatment. In an alternative embodiment, it may be desirable to use the first reduced-pressure unit 150 as the source for the second reduced-pressure delivery conduit 156 and have a second reduced-pressure unit 151 (shown in broken lines) to deliver reduced pressure to the reduced-pressure conduit 158.

As an aspect of the reduced-pressure, wound-closure and treatment system 100, it is  
20 also desirable to help provide a closing force to the surface wound 111 and in particular to apply a closing force between the wound edges 112. As shown in FIGURE 1, the wound-closure subsystem 104 may be used for this purpose. The wound-closure subsystem 104 develops a closing force represented by arrows 170. The closing force is communicated to the  
25 epidermis 108 and urges the wound edges 112 towards each other. The wound-closure subsystem 104 may be a stand alone system for closing any surface wound or used as part of a larger system, e.g., the reduced-pressure, wound-closure and treatment system 100.

The wound-closure subsystem 104 may include a plurality of attachment base members, e.g., a first attachment base member 172 and a second attachment base member 184.  
30 Each of the attachment base members movably couples with a connecting member (analogous to first connecting member 326 in FIG. 3 below) to form a circumferential wall (analogous to circumferential wall 380 in FIG. 5A below) with an interior space (analogous to interior space

381 in FIG. 5A below). A sealed contracting member 188 is disposed within the interior space and coupled to at least two of the attachment base members, e.g., the first attachment base member 172 and the second attachment base member 184. The circumferential wall is operable to flex or move as the sealed contracting member 188 contracts.

5           The first attachment base member 172 has a first base 174 and a first wall 176. The first base 174 has a first side 178 and a second, inward-facing side 180. The first base 174 and first wall 176 may be made from numerous materials, but a material is preferred that provides flexibility; for example, the first attachment base member 172 may be formed with the first base 174 and the first wall 176 made from polypropylene, or a rigid silicone, etc. A first  
10 adhesive 182 may be applied to the second, inward-facing side 180 of the first base 174 to allow the first base 174 to be releasably attached directly to a portion of the patient's epidermis 108 or indirectly if a polyurethane film or other sealing member 132 is placed on the epidermis 108 first. In addition to the first adhesive 182, staples, or sutures, or other  
15 invasive approaches might be used in some situations to attach the first base 174 to intact epidermis tissue. The first attachment base member 172 may be applied directly on top of the epidermis 108 or on top of the sealing member 132 so that closing forces applied on the first attachment base member 172 are transmitted directly, or indirectly, to the epidermis 108. References to applying the first attachment base member 172 to the epidermis 108 should be deemed to include application on the sealing member 132 as well. The first attachment base  
20 member 174 may include a movable connection member 175, which is sized and configured to mate with another movable connection member (see, e.g., third movable connection member 334 in FIG. 3), and a second reduced-pressure interface 177, or closing-reduced-pressure interface, which facilitates delivery of reduced pressure to the sealed contracting member 188.

          The second attachment base member 184 is analogous to the first attachment base  
25 member 172, except the second attachment base member 184 does not include the second reduced-pressure interface 177. The second attachment base member 184 has a base 185 and a wall 187. While the wound-closure subsystem 104 only shows two attachment base members 172, 184 other attachment members may be dispersed around the surface wound 111 in a spaced fashion with connecting members between to form the circumferential wall around the  
30 surface wound 111. The attachment base members, e.g., attachment base members 172, 184, in conjunction with the sealed contracting member 188 allow the closing force, which is represented by arrows 170, to be developed across different shapes of the surface wounds 111.

One or more of the attachment base members, e.g., attachment base member 172, has the second reduced-pressure interface 177 for receiving reduced pressure from the second reduced-pressure delivery conduit 156. The reduced pressure delivered through the second reduced-pressure interface 177 is used to develop the closing force. The reduced pressure, or closing-reduced-pressure, in the second reduced-pressure delivery conduit 156 may be selected to be in the range -100 mm Hg to -1000 mm Hg.

The wound-closure subsystem 104 includes the sealed contracting member 188 to develop the closing force. The sealed contracting member 188 may be formed from a contracting manifold material, which may be the same type of material as the manifold 118. Alternatively, it may be desirable to use a contracting manifold material that has fewer apertures or holes than the material used for the manifold 118. In addition, it may be desirable to have a material that will contract less in the vertical (for the orientation shown in FIG. 1) and more in the horizontal, or lateral, plane (for the orientation shown in FIG. 1), i.e., an anisotropic material. The sealed contracting member 188 has a first side 190 and a second, inward-facing (tissue-facing) side 192.

The sealed contracting member 188 also has a peripheral edge 194. The sealed contracting member 188 may be sealed by having a first sealing member 196 applied to the first side 190 and a second sealing member 198 applied to the second, inward-facing (tissue-facing) side 192 of the sealed contracting member 188. The peripheral edge 194 of the sealed contracting member 188 may be sealed by a peripheral sealing member 200. Alternatively or in addition, the first wall member 176 may also be used as the peripheral sealing member to seal the peripheral edge 194 or another piece of sealed material may be used. Similarly, the second, inward-facing (tissue-facing) side 192 may be sealed by placement against the sealing member 132 or the patient's epidermis 108. The sealed contracting member 188 may also be sealed by being coated with a gas-impervious material. The sealed contracting member 188 may be sealed with the first and second sealing members 196, 198, which may be formed from a polyurethane film or silicone. The first and second sealing members 196, 198 may be ultrasonically welded or RF welded at their ends to cover the peripheral edge 194. When reduced pressure is supplied to the sealed contracting member 188, the sealed contracting member 188 contracts to develop a closing force, which is represented by arrows 170. The sealed contracting member 188 may be formed with an opening 201 on a portion of the sealed contracting member 188 for receiving an extension portion 202 of the first reduced-pressure

interface 138. The extension portion 202 may extend through the sealed contracting member 188 and into the manifold 118.

In operation, the reduced-pressure wound-closure and treatment system 100 may be used in a body cavity, e.g., the abdominal cavity 110, by first applying a manifold material on the abdominal contents 116. For example, the manifold member 120 with the non-adherent envelope 122 may be placed on the abdominal contents 116 and the manifold 118 disposed proximate the non-adherent envelope 122. The wound edges 112 of the surface wound 111 may be brought together to the extent possible, and then the sealing member 132 placed onto the epidermis 108 to provide a pneumatic seal over the surface wound 111. The first attachment base member 172 may be applied using the first adhesive 182 to the patient's epidermis 108 or on the sealing member 132. Then, connection members and attachment members may be disposed around the surface wound 111. The attachment members, e.g., first and second attachment base members 172, 184, are coupled to the patient's epidermis 108 (or sealing member) and the sealed contracting member 188 is coupled to the attachment members, e.g., first and second attachment base members 172, 184. This coupling between attachment members, e.g., first and second attachment base members 172, 184, and the sealed contracting member 188 may be accomplished in a number of different ways, such as by using adhesives 189 and 191.

The first reduced-pressure interface 138, which may be the reduced-pressure port 140, may be applied such that the extended portion 202 reaches into the manifold 118. The first reduced-pressure delivery conduit 142 may be coupled to the first reduced-pressure interface 138 to provide a fluid coupling with the first reduced-pressure unit 150 (or an optional second reduced-pressure unit 151). The second reduced-pressure delivery conduit 156 may be fluidly coupled to the second reduced-pressure interface 177.

The reduced-pressure, wound-closure treatment system 100 is activated such that the first reduced-pressure unit 150 delivers reduced pressure through the three-way valve 154, which prepares the treatment-reduced-pressure that is delivered to the first reduced-pressure delivery conduit 142 and a closing-reduced-pressure that is delivered to the second reduced-pressure delivery conduit 156. The treatment-reduced-pressure is delivered through the first reduced-pressure delivery conduit 142 and realized at the manifold 118, which pulls fluids as suggested by arrows 144 and 128 and distributes reduced pressure within the abdominal cavity 110. At the same time, the closing-reduced-pressure delivered through the second reduced-

pressure delivery conduit 156 is realized by the sealed contracting member 188, which causes the sealed contracting member 188 to contract developing the closing force, which is represented by arrows 170. The closing force pulls the first and second attachment base members 172, 184 towards each other and thereby pulls the wound edges 112. The reduced-  
5 pressure, wound-closure treatment system 100 may be used solely to close a wound in some applications.

Referring now to FIGURES 2 to 5B, a portion of a modular, reduced-pressure, wound-closure system 300 will now be presented. The modular, reduced-pressure, wound-closure system 300 uses a number of modular components that may be movably coupled to  
10 accommodate various sizes and shapes of wounds and to provide a closing force directed toward a center of the wound, i.e., one that urges the wound edges together. The use of modular components allows numerous sizes and shapes of surface wounds to be accommodated without requiring a large stock of different sizes and shapes of wound dressings or devices.

Referring primarily to FIGURE 2, a plurality of attachment base members, such as a first attachment base member 302, may be used. Each attachment base member 302 has a base 304, which has a first side 306 and a second, inward-facing (tissue-facing) side 308. The second, inward-facing (tissue-facing) side 308 of the base 304 may have an adhesive (not explicitly shown) for attaching the first attachment base member 302 to a patient's epidermis  
20 (or to a sealing member on the patient's epidermis). In an alternative embodiment, mechanical devices, e.g., sutures, may also be used to secure the first attachment base member 302 to the patient's epidermis. The adhesive on the second, inward-facing side 308 may initially be covered with a releasable backing material that may be removed before application to the patient's epidermis. The first attachment base member 302 also includes a wall 310 that is  
25 coupled to the base 304, e.g., attached or formed integral with the base 304. The wall 310 has a first end 312 and a second end 314. The first end 312 may be formed with a first movable connection member 316 formed as an integral part or attached to the wall 310. The second end 314 may be formed with a second movable connection member 318 formed as an integral part or attached to the wall 310. A hook member 320, as described further below, may be used  
30 to pierce, grip, or hold a sealed contracting member 322. The hook member 320 may be formed integral to or attached to the wall 310 or the base 304.

Referring now primarily to FIGURE 3, a plurality of connecting members, such as the first connecting member 326, may be used as part of the modular, reduced-pressure, wound-closure system 300. Each connecting member 326 has a second wall 328 with a first end 330 and second end 332. The second wall 328 may be shaped to have an arcuate configuration or may be straight. The first end 330 may be formed with, or have coupled to the first end 330, a third movable connection member 334. Similarly, the second end 332 may be formed with, or have coupled to the second end 332, a fourth movable connection member 336. The movable connection members 334 and 336 are sized and configured to cooperate with the movable connection members 316 and 318 in a coordinated fashion that allows relative movement, such as pivotable movement, between each attachment base member 302 and each adjacent, coupled connecting member 326. In this illustrative embodiment, the movable connection members 334 and 336 are shown as being pin-shaped members that are sized and configured to slide into the first and second movable connection members 316 and 318, which are sockets, sized and configured to receive the pin shapes of the movable connection members 334 and 336. Of course, the pin-shaped members and sockets could be arranged vice-versa or mixed and matched.

While a reduced-pressure conduit, such as the second reduced-pressure delivery conduit 156 in FIGURE 1, may be applied directly through the wall 310, a reduced-pressure interface 342 may be used on the wall 310 of the first attachment base member 302. For example, the first attachment base member 302 may be modified to form a reduced-pressure interface member 340 as shown in FIGURE 4. The reduced-pressure interface member 340 is analogous to that of the first attachment base member 302 except that the reduced-pressure interface 342 has been added. The reduced-pressure interface 342 may be a port 344 that extends through a wall 346. Alternatively, a reduced-pressure interface may be formed with a port, e.g., port 344, placed through the connecting member 326.

The previously presented modular components, i.e., the first attachment base member 302, the first connecting member 326, and the reduced-pressure interface member 340, may be combined to form various shapes and thereby to accommodate wounds of different sizes and shapes. One example is shown in FIGURES 5A and 5B. The combined members form the modular, reduced-pressure, wound-closure system 300 over a surface wound 301. With reference particularly to FIGURE 5A, the modular, reduced-pressure, wound-closure system 300 is shown with a plurality of attachment base members: the first attachment base member

302, a second attachment base member 350, and a third attachment base member 352. A fourth attachment base member is shown but has been modified to form the reduced-pressure interface member 340 having the reduced-pressure interface 342. A reduced-pressure conduit 354 may be fluidly coupled to the reduced-pressure interface 342.

5 A plurality of connecting members is used to connect each of the plurality of attachment base members 302, 350, 352, 340 (interface). Thus, in this illustrative embodiment, the first attachment base member 302 is coupled at the first end 312 to the first connecting member 326 at the second end 332 of the first connecting member 326. Similarly, the second attachment base member 350 is coupled to a second connecting member 356. The  
10 second connecting member 356 is also coupled to the third attachment base member 352. The third attachment base member 352 is coupled to a third connecting member 358, which is also coupled to the reduced-pressure interface member 340. The reduced-pressure interface member 340 is coupled to a fourth connecting member 360. In this way the plurality of attachment base members and plurality of connecting members form a circumferential wall  
15 380 defining an interior space 381 into which a sealed contracting member 322 is disposed. The sealed contracting member 383 may be held proximate the attachment base members by hooks, e.g., hook 320 on the first attachment base member 302, or by adhesive, bonding, welding, or other attachment device. The sealed contracting member 322 may be attached to all or a portion of the circumferential wall 380.

20 It will be appreciated that the alternating members of the plurality of attachment base members and plurality of connecting members provide for connections that are capable of movement. This movement is helpful when the modular, reduced-pressure, wound-closure system 300 goes from the non-contracted position of FIGURE 5A to the contracted position shown in FIGURE 5B. It will also be appreciated that while only four connecting members  
25 and four attachment base members are shown in this illustration, any number of these components might be used to make bigger or smaller systems. For example, a modular, reduced-pressure wound-closure system 400 in FIGURE 6 shows a larger system configuration.

The modular, reduced-pressure, wound-closure system 400 in this illustrative  
30 embodiment includes a plurality of attachment base members having seven attachment base members 402 and another that has been modified to form a reduced-pressure interface 404. The modular, reduced-pressure, wound-closure system 400 also includes a plurality of

connecting members, which in this illustrative embodiment includes eight connecting members 406. The plurality of attachment base members 402 and the plurality of connecting members 406 are movably coupled to form a circumferential wall 408 that defines an interior space 410. A sealed contracting member 412 is placed within the interior space 410 and is  
5 coupled to at least the plurality of attachment base members 402. The sealed contracting member 412 may be coupled using hooks on the plurality of attachment base members 402 in a manner analogous to the hook 320 of FIGURE 2 or other attachment device. When reduced pressure is supplied through a reduced-pressure interface 414 on the reduced-pressure interface member 404, the reduced pressure causes the sealed contracting member 412 to  
10 contract and pulls each of the plurality of attachment base members 402 inward and thus provides a closing force.

Although the present invention and its advantages have been disclosed in the context of certain illustrative, non-limiting embodiments, it should be understood that various changes, substitutions, permutations, and alterations can be made without departing from the scope of  
15 the invention as defined by the appended claims.

**CLAIMS**

1. A modular, reduced-pressure, wound-closure system for generating a closing force on a surface wound on a patient, the system comprising:

- 5 a sealed contracting member, the sealed contracting member operable to contract when placed under reduced pressure;
- a plurality of attachment base members, each attachment base member having a base and a first wall, the first wall having a first end and a second end, the first end of the first wall having a first movable connection member and the
- 10 second end of the first wall having a second movable connection member, each attachment base member for releasably attaching to a portion of a patient's epidermis and for coupling to the sealed contracting member;
- a plurality of connecting members, each connecting member having a second wall with a first end and a second end, the first end of the second wall having
- 15 a third movable connection member and the second end of the second wall having a fourth movable connection member, each connecting member for movably coupling to one of the plurality of attachment base members;
- a first reduced-pressure interface fluidly coupled to the sealed contracting member, the first reduced-pressure interface operable to deliver reduced
- 20 pressure to the sealed contracting member; and
- wherein the plurality of attachment base members and the plurality of connecting members are operable to movably couple to form a circumferential wall defining an interior space and wherein the sealed contracting member is operable to be disposed and coupled within the
- 25 interior space.

Claim 2. The modular, reduced-pressure, wound-closure system of claim 1 , wherein the first movable connection member and the second movable connection member of each of the plurality of attachment base members comprise pin-shaped

30 members and wherein the third movable connection member and the fourth movable connection member of each of the plurality of connecting members comprises sockets

sized and configured to mate with the pin-shaped members of the plurality of attachment base members.

3. The modular, reduced-pressure, wound-closure system of claim 1 wherein the  
5 plurality of attachment base members are coupled to the sealed contracting member  
by a first adhesive and the plurality of connecting members are coupled to the sealed  
contracting member by a second adhesive.
4. The modular, reduced-pressure, wound-closure system of claim 1, wherein the  
10 reduced-pressure interface comprises a port formed on the circumferential wall.
5. The modular, reduced-pressure, wound-closure system of claim 1 wherein the  
plurality of attachment base members and the plurality of connecting members  
comprise a flexible material.  
15
6. The modular, reduced-pressure, wound-closure system of claim 1 further comprising  
a hook member coupled to a portion of at least one of the plurality of attachment base  
members and wherein the hook member is operable to secure at least a portion of the  
sealed contracting member.  
20
7. The modular, reduced-pressure, wound-closure system of claim 1 , further comprising  
a hook member coupled to a portion of at least one of the plurality of attachment base  
members and wherein the hook member is operable to secure at least a portion of the  
sealed contracting member; and wherein:  
25       the first movable connection member and the second movable connection  
          member of each of the plurality of attachment base members comprises a  
          pin-shaped member;  
          the third movable connection member and the fourth movable connection  
          member of each of the plurality of connecting members comprises sockets  
30       sized and configured to mate with the pin-shaped members of the plurality of  
          attachment base members; and  
          the plurality of attachment base members and the plurality of connecting  
          members comprise a flexible material.

8. A method of manufacturing a modular, reduced-pressure, wound-closure system for generating a closing force on a surface wound on a patient, the method comprising the steps of:

- 5           forming a sealed contracting member, the sealed contracting member operable to contract when subjected to reduced pressure;
- forming a plurality of attachment base members, each attachment base member having a base and a first wall, the first wall having a first end and a second end, the first end of the first wall having a first movable connection member and the second end of the first wall having a second movable connection member, each attachment base member for releasably attaching to a portion of a patient's epidermis and for coupling to the sealed contracting member;
- 10           forming a plurality of connecting members, each connecting member having a second wall with a first end and a second end, the first end of the second wall having a third movable connection member and the second end of the second wall having a fourth movable connection member, each connecting member for movably coupling to at least two of the plurality of attachment base members; and
- 15           wherein the plurality of attachment base members and the plurality of connecting members are operable to movably couple to form a
- 20           circumferential wall defining an interior space.

9. The method of manufacturing a modular, reduced-pressure, wound-closure system of claim 8, wherein the step of forming a plurality of attachment base members
- 25           comprises forming each of the plurality of attachment base members with the first movable connection member and the second movable connection member formed as pin-shaped members; and wherein the step of forming a plurality of connecting members comprises forming each of the plurality of connecting members with the third movable connection member and the fourth movable connection member
- 30           formed as sockets sized and configured to mate with the pin-shaped members of the plurality of attachment base members.

10. The method of manufacturing a modular, reduced-pressure, wound-closure system of claim 8, further comprising the steps of coupling the plurality of attachment base members to the sealed contracting member and coupling the plurality of connecting members to the sealed contracting member.
- 5
11. The method of manufacturing a modular, reduced-pressure, wound-closure system of claim 8, further comprising the step of coupling a hook member to a portion of at least one of the plurality of attachment base members.
- 10 12. The method of manufacturing a modular, reduced-pressure, wound-closure system of claim 8, further comprising the steps of:
- coupling a hook member to a portion of at least one of the plurality of attachment base members;
- wherein the step of forming a plurality of attachment base members comprises
- 15 forming each of the plurality of attachment base members with the first movable connection member and the second movable connection member formed as pin-shaped members; and
- wherein the step of forming a plurality of connecting members comprises
- forming each of the plurality of connecting members with the third movable connection member and the fourth movable connection member formed as
- 20 sockets sized and configured to mate with the pin-shaped members of the plurality of attachment base members.
13. A method for generating a closing force on a surface wound on a patient, the
- 25 method comprising the steps of:
- providing a sealed contracting member;
- providing a plurality of attachment base members, each attachment base member having a base and a first wall, the first wall having a first end and a
- second end, the first end of the first wall having a first movable connection
- 30 member and the second end having a second movable connection member, each attachment base member for releasably attaching to a portion of a patient's epidermis;

providing a plurality of connecting members, each connecting member having a second wall with a first end and a second end, the first end of the second wall having a third movable connection member and the second end of the second wall having a fourth movable connection member, each connecting member for movably coupling to the plurality of attachment base members; 5 movably coupling the plurality of attachment base members and plurality of connecting members to form a circumferential wall defining an interior space; disposing the sealed contracting member within the interior space; 10 coupling the sealed contracting member to at least a portion of the circumferential wall; and supplying reduced pressure to the sealed contracting member, whereby a force is developed that pulls the attachment base members towards an interior of the surface wound to create a closing force on the surface wound.

15

14. The method for generating a closing force on a surface wound on a patient of claim 13, wherein the step of providing a plurality of attachment base members comprises providing a plurality of attachment base members wherein the first movable connection member and the second movable connection member of each of the plurality of attachment base members comprises pin-shaped members; and 20 wherein the step of providing a plurality of connecting members comprises providing a plurality of connecting members wherein the third movable connection member and the fourth movable connection member of each of the plurality of connecting members comprises sockets sized that are sized and configured to mate with the pin-shaped members of the plurality of attachment base members. 25

15. The method for generating a closing force on a surface wound on a patient of claim 13, wherein the step of coupling the sealed contracting member to at least a portion of the circumferential wall comprises coupling the plurality of attachment base members to the sealed contracting member. 30

16. The method for generating a closing force on a surface wound on a patient of claim 13, further comprising the step of forming a reduced-pressure interface on a

portion of the circumferential wall and wherein the step of supplying reduced pressure to the sealed contracting member comprises supplying reduced pressure to the reduced-pressure interface.

- 5 17. A reduced-pressure, wound-closure and treatment system for providing a closing force to a surface wound on a patient and for delivering reduced pressure to a tissue site, the system comprising:
- 10 a wound-closing subsystem comprising:
    - a sealed contracting member, the sealed contracting member operable to contract when placed under reduced pressure,
    - 15 a plurality of attachment base members, each attachment base member having a base and a first wall, the first wall having a first end and a second end, the first end of the first wall having a first movable connection member and the second end of the first wall having a second movable connection member, each attachment base member for releasably attaching to a portion of a patient's epidermis and for coupling to the sealed contracting member,
    - 20 a plurality of connecting members, each connecting member having a second wall with a first end and a second end, the first end of the second wall having a third movable connection member and the second end of the second wall having a fourth movable connection member, each connecting member for movably coupling to the plurality of attachment base members,
    - 25 a closing-reduced-pressure interface fluidly coupled to the sealed contracting member, the first reduced-pressure interface operable to deliver reduced pressure to the sealed contracting member,
    - 30 wherein the plurality of attachment base members and the plurality of connecting members are operable to movably couple to form a circumferential wall defining an interior space and wherein the sealed contracting member is operable to be disposed and coupled within the interior space, and
  - a reduced-pressure treatment subsystem comprising:
    - a manifold for disposing proximate the tissue site, the manifold operable to distribute reduced pressure and to receive fluids,

a sealing member for placement on the patient's epidermis and operable to form a pneumatic seal over the manifold, and a treatment-reduced-pressure interface for fluidly coupling to the manifold, the treatment-reduced-pressure interface operable to deliver a second reduced pressure to the manifold.

5

18. The reduced-pressure, wound-closure and treatment system for providing a closing force to a surface wound on a patient and for delivering reduced pressure to a tissue site of claim 17, wherein the first movable connection member and the second movable connection member of each of the plurality of attachment base members comprises pin-shaped members and wherein the third movable connection member and the fourth movable connection member of each of the plurality of connecting members comprises sockets sized and configured to mate with the pin-shaped members of the plurality of attachment base members.

10  
15

19. The reduced-pressure, wound-closure and treatment system for providing a closing force to a surface wound on a patient and for delivering reduced pressure to a tissue site of claim 17, wherein the plurality of attachment base members are coupled to the sealed contracting member by an adhesive.

20

20. The reduced-pressure, wound-closure and treatment system for providing a closing force to a surface wound on a patient and for delivering reduced pressure to a tissue site of claim 17, wherein the plurality of attachment base members and the plurality of connecting members comprise a flexible material.

25

21. The reduced-pressure, wound-closure and treatment system for providing a closing force to a surface wound on a patient and for delivering reduced pressure to a tissue site of claim 17, further comprising a hook member coupled to a portion of at least one of the plurality of attachment base members and wherein the hook member is operable to secure at least a portion of the sealed contracting member.

30

22. The reduced-pressure, wound-closure and treatment system for providing a closing force to a surface wound on a patient and for delivering reduced pressure to a

tissue site of claim 17, further comprising a hook member coupled to a portion of at least one of the plurality of attachment base members and wherein the hook member is operable to secure at least a portion of the sealed contracting member; and wherein:

- 5           the first movable connection member and the second movable connection member of each of the plurality of attachment base members comprises pin-shaped members;
- the third movable connection member and the fourth movable connection member of each of the plurality of connecting member comprises sockets sized and configured to mate with the pin-shaped members of the plurality of
- 10           attachment base members; and
- the plurality of attachment base members and the plurality of connecting member comprise a flexible material.

23.       A modular, reduced-pressure, wound-closure system for generating a closing

15       force on a surface wound on a patient substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.

24.       A method of manufacturing a modular, reduced-pressure, wound-closure system

20       for generating a closing force on a surface wound on a patient substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.

25.       A method for generating a closing force on a surface wound on a patient

25       substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.

26.       A reduced-pressure, wound-closure and treatment system for providing a closing

30       force to a surface wound on a patient and for delivering reduced pressure to a tissue site substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.




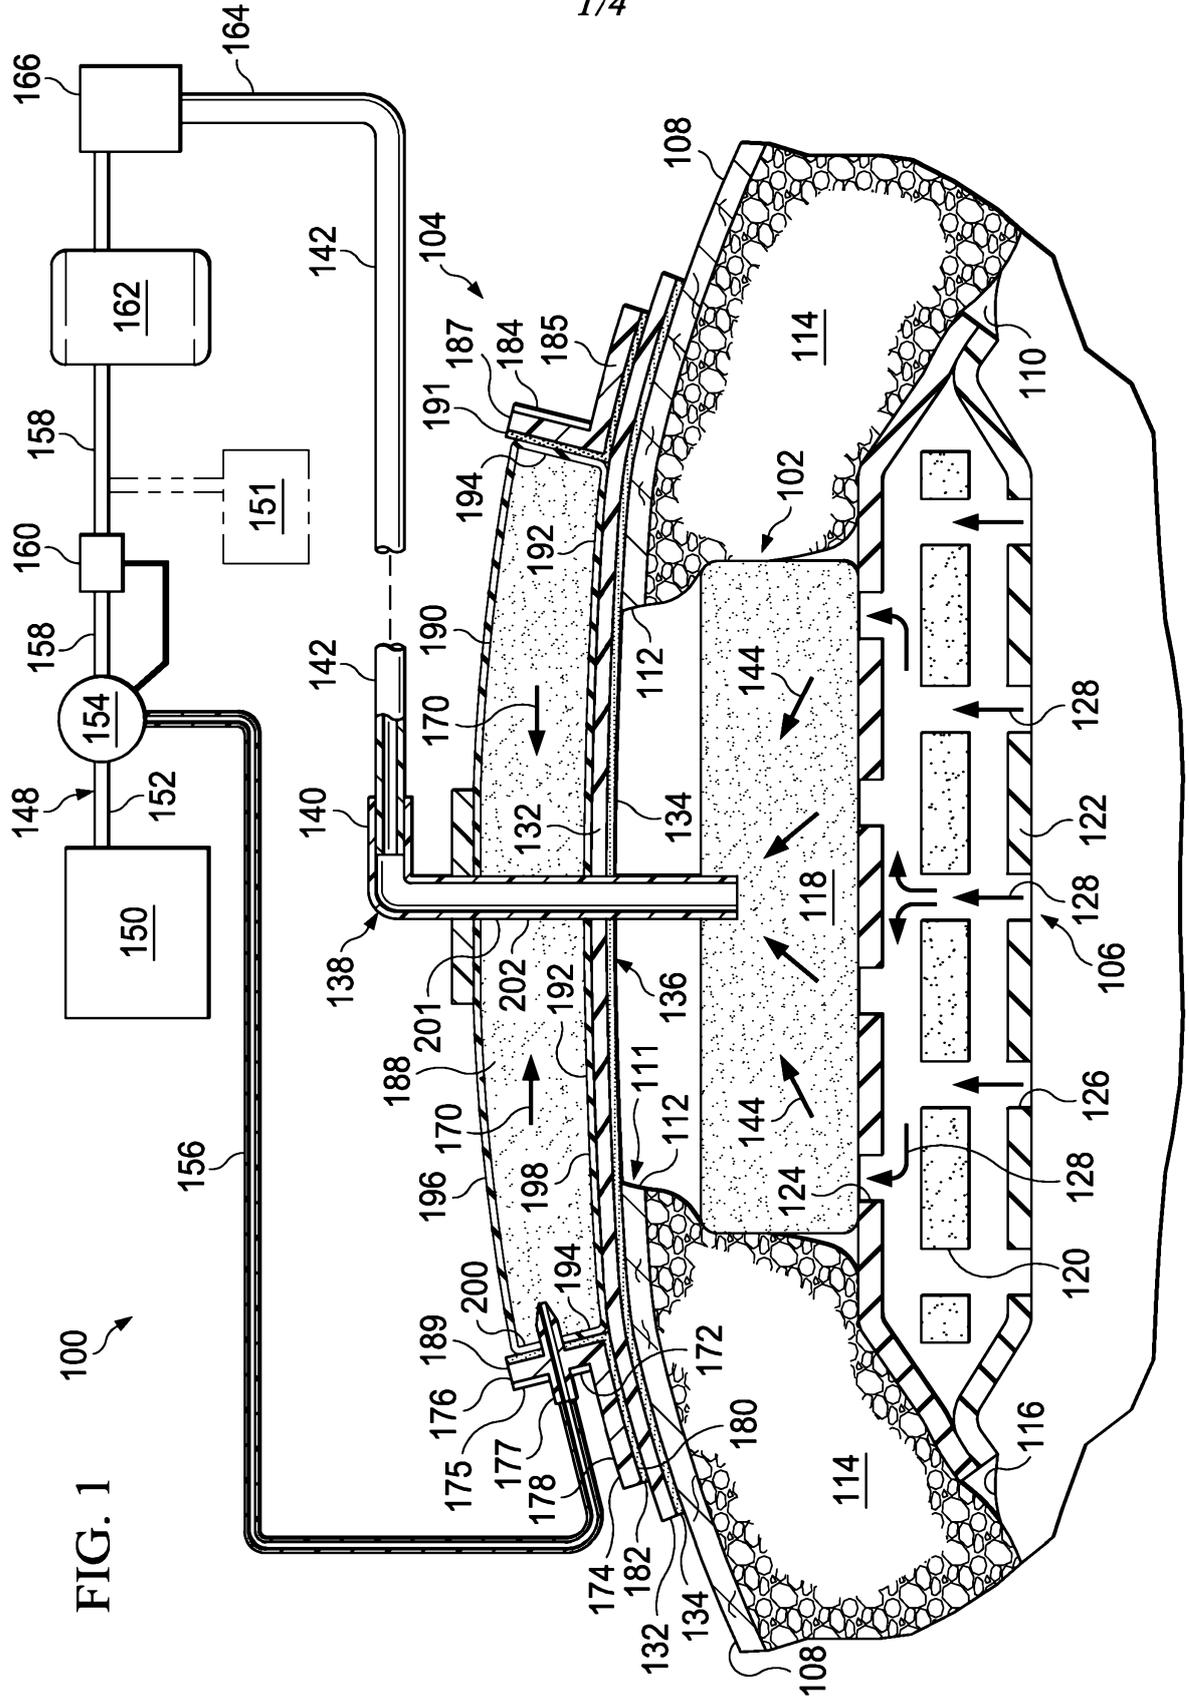


FIG. 1  
100

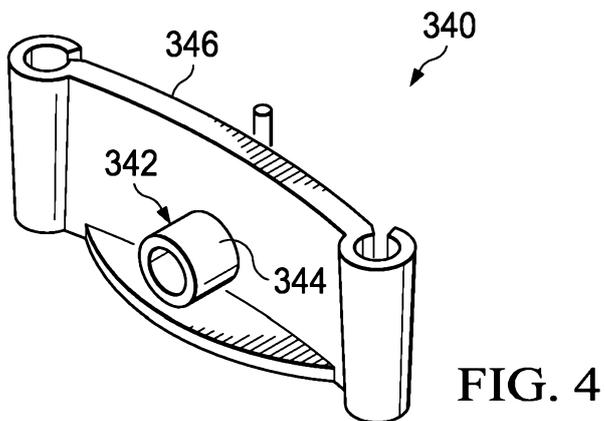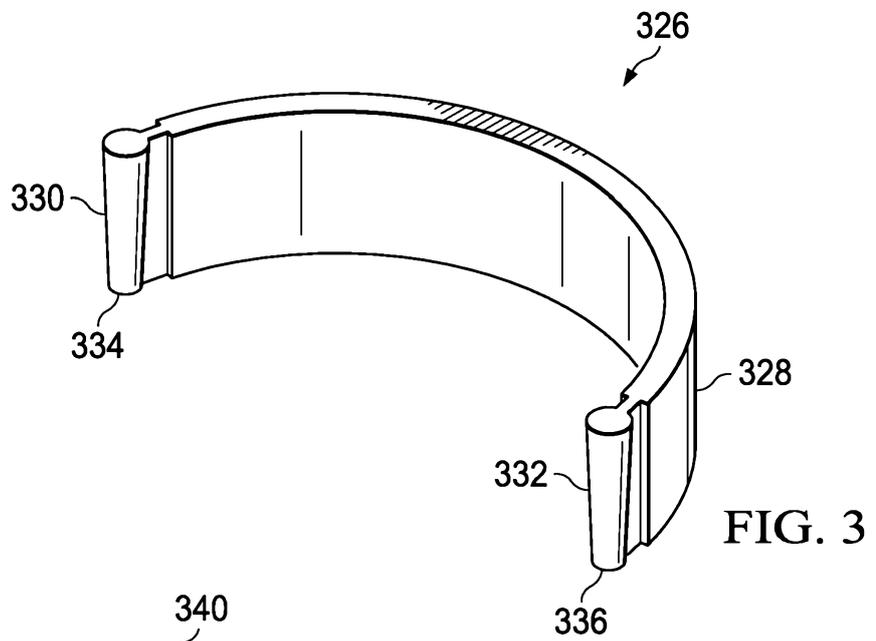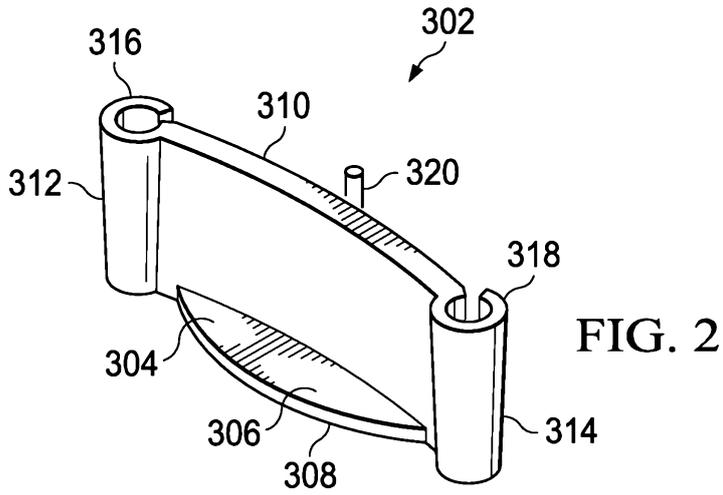

3/4

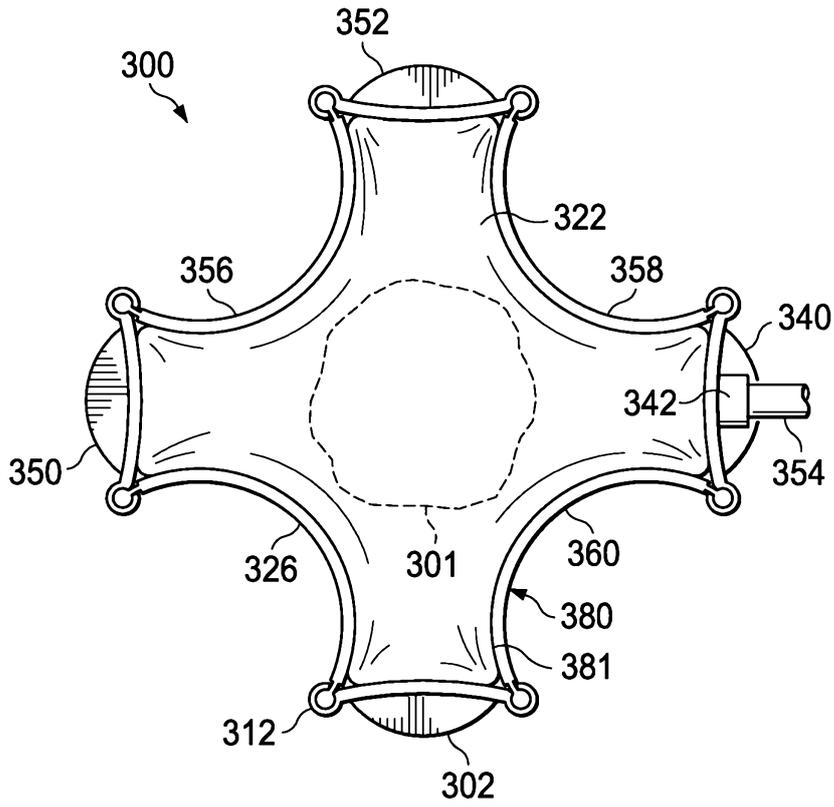


FIG. 5A

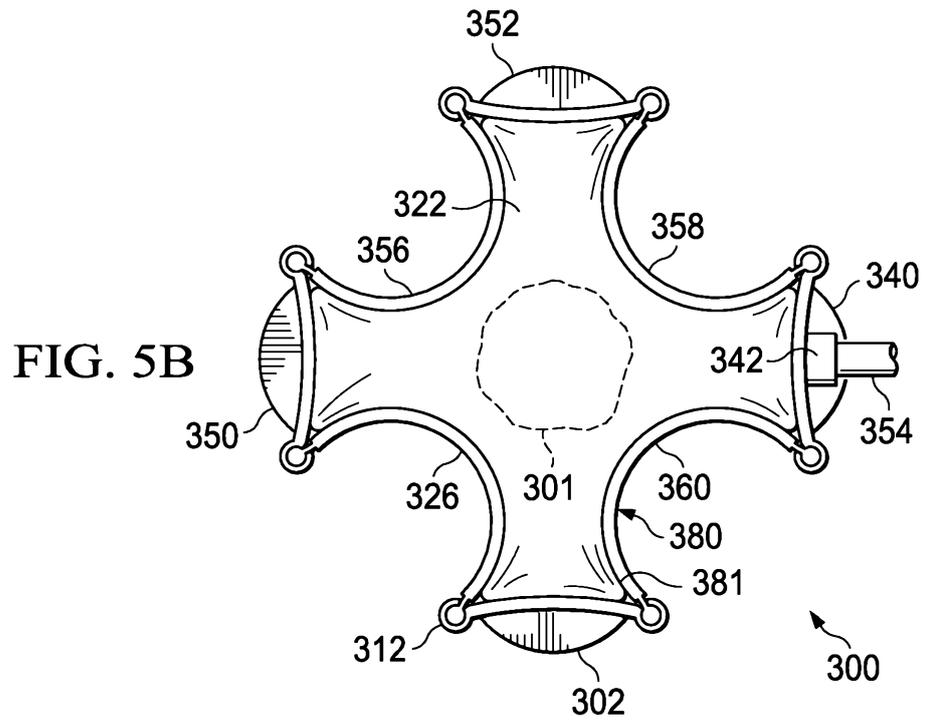


FIG. 5B

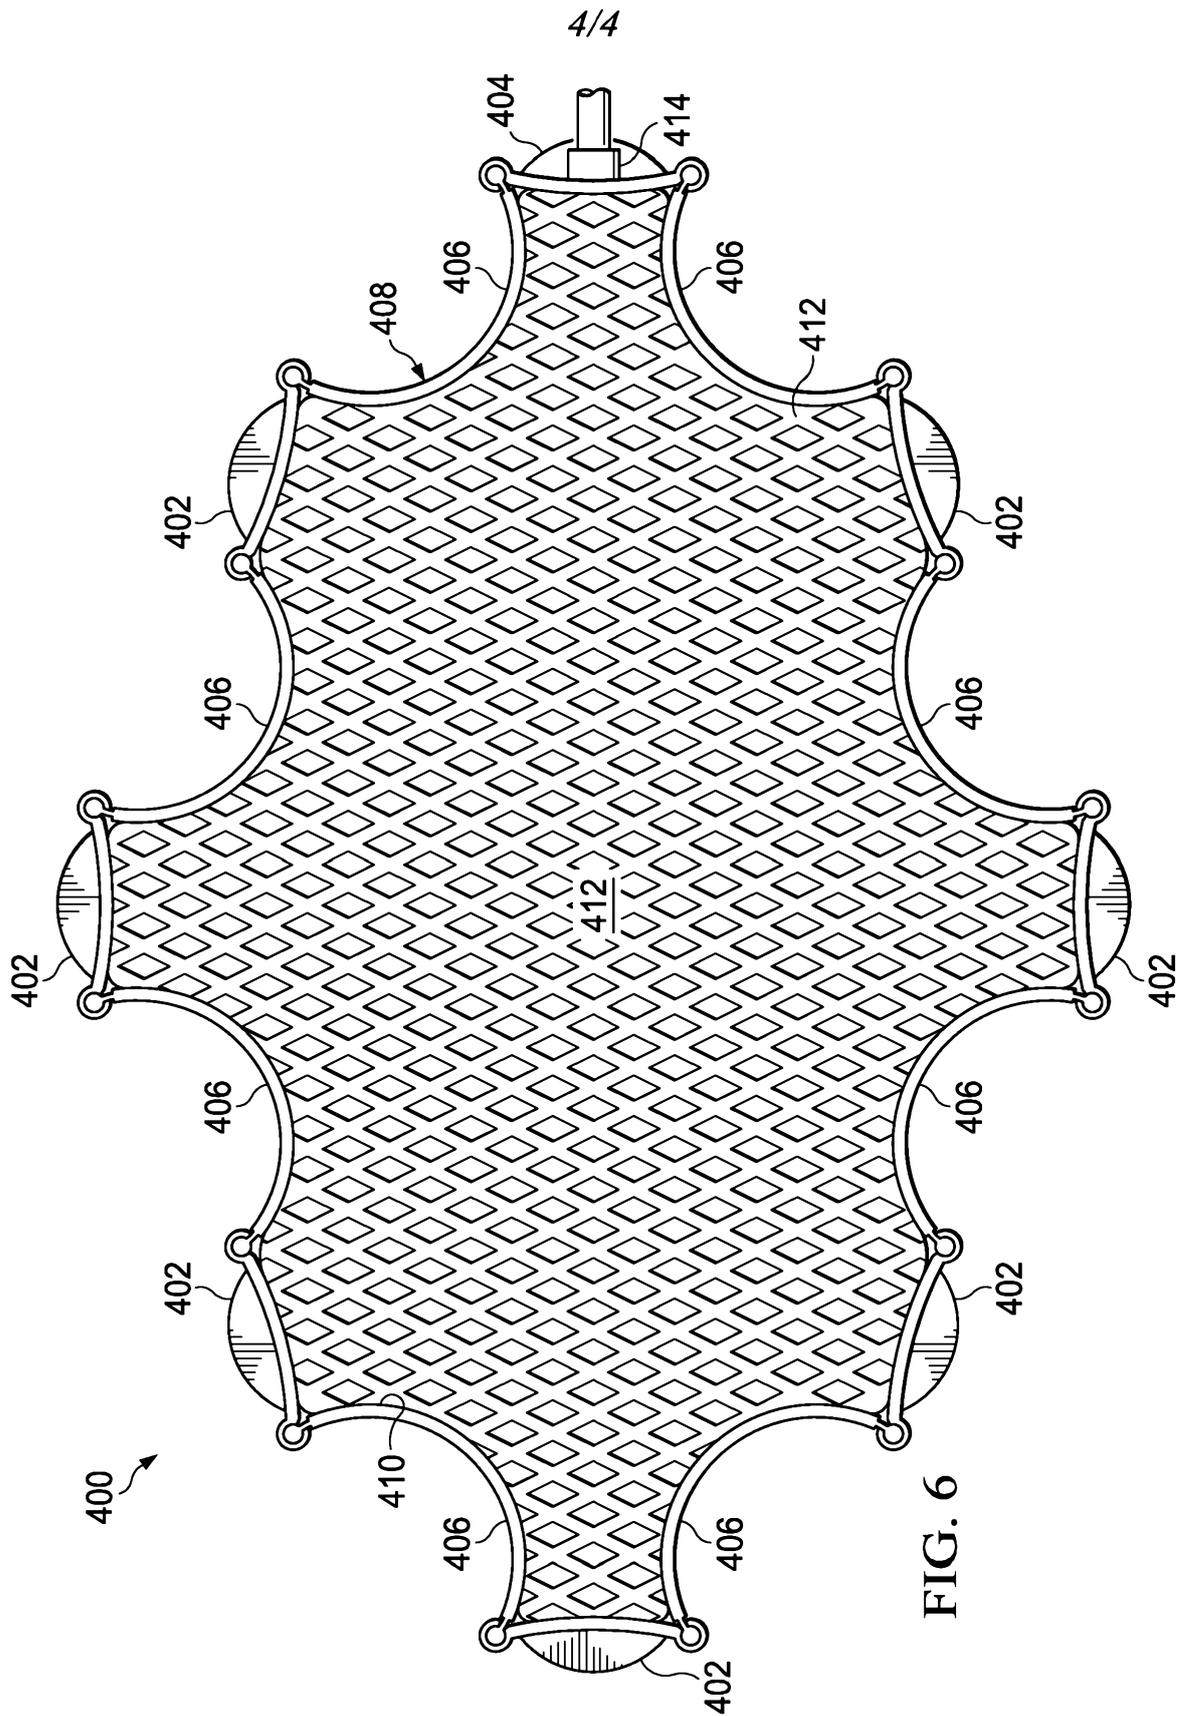


FIG. 6

4/4