



(11) **EP 1 780 737 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
07.01.2009 Bulletin 2009/02

(51) Int Cl.:
H01F 38/12 ^(2006.01) **F02P 13/00** ^(2006.01)

(21) Application number: **06270043.0**

(22) Date of filing: **04.05.2006**

(54) **Ignition Coil**

Zündspule

Bobine d'allumage

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(30) Priority: **28.10.2005 GB 0522000**

(43) Date of publication of application:
02.05.2007 Bulletin 2007/18

(73) Proprietor: **Delphi Technologies, Inc.**
Troy, MI 48007 (US)

(72) Inventor: **Moga, Corina**
Luxembourg L25-10 (LU)

(74) Representative: **Robert, Vincent**
Delphi European Headquarters
64, Avenue de la Plaine de France
Paris Nord II
BP 65059 Tremblay-en-France
95972 Roissy Charles de Gaulle Cedex (FR)

(56) References cited:
EP-A- 1 589 546 EP-A1- 1 209 705
JP-A- 9 289 122 US-A1- 2002 057 179
US-A1- 2003 080 843 US-A1- 2003 122 645

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 780 737 B1

Description

[0001] The present invention relates to ignition coils, particularly, but not exclusively, ignition coils which are directly attached to the spark plugs of internal combustion engines.

[0002] Independent ignition coils (also known as "pencil-type coils") are commonly mounted directly to the spark plugs of an internal combustion engine. Such coils typically include co-axially arranged secondary and primary coils which are wound around respective support spools. Each coil is typically attached to the support spool by way of a resin which holds them in place during assembly and operation.

[0003] Pencil-type coils are normally mounted very close to the engine combustion chambers and are therefore subjected to a continual heating/cooling cycle throughout their operational lifetime. The variation in the thermal expansion properties of the co-axially arranged materials in the ignition coil can cause stresses and strains within the coil which result in components breaking over time. This produces reliability problems.

[0004] One type of ignition coil having improved resistance to stresses and strains is described in United States Patent Publication No. 2003/0122645 A1.

[0005] According to the present invention there is provided an ignition coil comprising:

- a core member;
- a secondary support spool around the core member;
- a secondary coil around the secondary support spool; a primary support spool around the secondary coil; and
- a primary coil around the primary support spool, wherein resilient thermal expansion de-coupling means comprising a resilient sheath buffer capable of expanding and contracting in a radial direction is provided between the primary support spool and the primary coil characterised in that the resilient sheath buffer is provided with a radially outwardly extending protrusion adjacent the primary coil in order to allow resilient axial movement of the primary coil relative to the primary support spool.

[0006] Preferably, the resilient thermal expansion de-coupling means is provided between the first coil and first support spool. Optionally, the resilient thermal expansion de-coupling means is provided between the second coil and second support spool.

[0007] Preferably, the resilient thermal expansion de-coupling means comprises a resilient sheath buffer capable of expanding and contracting in a radial direction i.e. normal to the co-axis. More preferably, the resilient sheath buffer is also capable of movement in an axial direction. Preferably, said movement in the axial direction is a result of relative axial movement between the primary coil and primary support spool.

[0008] Typically, the material comprising the resilient

thermal expansion de-coupling means comprises a material having a Young's Modulus in the region of 10 to 100Mpa at approximately 170°C and typically has a wall thickness in the region of 0.1 to 0.5 mm.

[0009] Preferably, the resilient sheath buffer is provided with a radial protrusion adjacent at least one end of the resilient sheath buffer such that resilient axial movement of the primary coil relative to the primary support spool is possible.

[0010] Typically, the primary support spool comprises a tubular synthetic member around which the resilient thermal expansion de-coupling means and primary coil may be arranged.

[0011] Typically, the secondary support spool comprises a tubular synthetic member around which the secondary coil may be wound.

[0012] Preferably, a shrink tube is provided around the core member.

[0013] Embodiments of the present invention will now be described, with reference to the following figures, in which:-

Fig. 1 is a isometric partial cut-away view of an ignition coil according to the present invention;

Fig. 2 is a cross section of the co-axial layers of the apparatus of Fig. 1 taken along the view A-A;

Fig. 3 is a more detailed view of the lower portion of the ignition coil shown in Fig. 1; and

Fig. 4 is a isometric view showing a section of the co-axial layers shown in Fig. 2.

[0014] An ignition coil unit 10 comprises an ignition circuit case 12 which houses the coil circuitry (not shown), a core housing 14 and a boot 16 which allows connection to a spark plug (not shown).

[0015] Referring to Fig. 2, co-axial layers within the core housing 14 comprise a core member 18, shrink tube 37, epoxy resin layer 20, secondary support spool 22, secondary coil 24, epoxy insulation layer 26, primary support spool 28, resilient thermal expansion de-coupling buffer 30, primary coil 32 and casing 34. An outer protective sheath 36 (Fig. 3) is also provided around the mid-section of ignition coil 10.

[0016] The core member 18 is typically formed from an elongate silicon steel member.

[0017] The secondary support spool 22 is typically a tube formed from a synthetic resin and houses the core member 18 therein via a shrink tube 37 and a layer of epoxy resin 20. In addition to its securing properties, the layer of resin 20 also provides electrical insulation between the core member 18 and the outer coils 24, 32.

[0018] Secondary coil 24 is formed from a wire wound around the secondary support spool 22 thousands of times. In the present embodiment the wire has approximately 1500 turns.

[0019] The epoxy insulation layer 26 and shrink tube 37 act as electrical insulators between the primary and secondary coils.

[0020] Primary support spool 28 is positioned around the epoxy insulation layer 26 and may be held to some extent thereby. The primary support spool 28 is similar in construction to the secondary support spool 22 with appropriate dimensional modifications; however, a lip L also projects radially outward from the outer circumference of the primary support 28. This lip L allows secure abutment against a shoulder 35 of the casing 34 and provides a gap A between the shoulder 35 and the coil 32 / buffer 30 as discussed subsequently.

[0021] The resilient thermal expansion de-coupling buffer 30 comprises any material (such as silicon rubber) which is capable of withstanding the heating conditions of the surrounding environment and which is capable of expanding and contracting to accommodate the differential expansion and contraction of the components surrounding it. In this regard, the buffer may typically comprise a sleeve having a wall thickness of between 0.1mm and 0.5mm and a Young's Modulus of 10 to 100 MPa at 170°C.

[0022] A radially extending protrusion P is provided around the lower circumference of the buffer 30 as shown in Fig. 3. This sits against the upper surface of lip L and resiliently supports coil 32 as discussed subsequently.

[0023] Primary coil 32 is formed by a wire wound around the buffer 30 and primary support spool 28 many hundreds of times. In the present embodiment, the wire is provided with approximately 200 turns. Primary coil 32 typically has a lower co-efficient of thermal expansion than the rest of the components in the ignition coil 10 and the effects of this will be discussed subsequently.

[0024] In use, as the ignition coil 10 heats up from an initial cold state, each of the co-axial layers described will expand in the axial direction (Ax in Fig. 3) and radial direction (Ra in Fig. 3) according to their respective co-efficient of thermal expansion. The primary wire may be regarded as a composite material since it comprises copper wire combined with an epoxy. This results in a composite material which has a co-efficient of thermal expansion that is significantly less than that of the other layers. However, the buffer 30 is able to accommodate these differences in expansion of the layers by radially expanding or contracting as required. In addition, the protrusion P of the buffer in conjunction with the support provided by lip L allows resilient relative axial movement between the primary coil 32 and primary spool 28 to occur. Such a protrusion P may be provided at either or both of the high voltage and low voltage ends of the ignition coil 10.

[0025] The expansion and compression of the buffer 30 therefore allows stresses between the primary coil 32 and primary support 28 (which would otherwise occur during heating and cooling of the ignition coil 10) to be alleviated. This de-coupling of stresses increases the longevity and reliability of the ignition coil 10.

[0026] Modifications and improvement may be made to the foregoing, for example:-

[0027] Although, the embodiment described only has a buffer 30 between the primary coil 32 and the primary

support spool 28 it would be possible to have a buffer between the secondary coil and the secondary support if desired. In addition, it would be possible to arrange the primary coil inside of the secondary coil.

Claims

1. An ignition coil comprising:-

a core member (18);
a secondary support spool (22) around the core member (18);
a secondary coil (24) around the secondary support spool (22);
a primary support spool (28) around the secondary coil (24); and
a primary coil (32) around the primary support spool (28), wherein resilient thermal expansion de-coupling means (30) comprising a resilient sheath buffer (30) capable of expanding and contracting in a radial direction is provided between the primary support spool (28) and the primary coil (32) **characterised in that** the resilient sheath buffer (30) is provided with a radially outwardly extending protrusion (P) adjacent the primary coil (32) in order to allow resilient axial movement of the primary coil (32) relative to the primary support spool (28).

2. An ignition coil according to claim 1, wherein the resilient sheath buffer (30) is also capable of movement in an axial direction where said movement in the axial direction is a result of relative axial movement between the primary coil (32) and primary support spool (28).

3. An ignition coil according to any preceding claim, wherein the material comprising the resilient thermal expansion de-coupling means (30) comprises a material having a Young's Modulus in the region of 10 to 100Mpa at approximately 170°C.

4. An ignition coil according to claim 3, wherein the material comprising the resilient thermal expansion de-coupling means (30) further has a wall thickness in the region of 0.1 to 0.5 mm.

5. An ignition coil according to any preceding claim, wherein the primary support spool (28) comprises a tubular synthetic member around which the resilient thermal expansion de-coupling means (30) and primary coil (32) are arranged.

6. An ignition coil according to any preceding claim, wherein the secondary support spool (22) comprises a tubular synthetic member around which the secondary coil (24) is wound.

7. An ignition coil according to any preceding claim, wherein a shrink tube (37) is provided around the core member (18).

zungsspule (22) ein röhrenförmiges, synthetisches Bauteil aufweist, um welches die sekundäre Spule (24) angeordnet ist.

Patentansprüche

1. Zündspule umfassend:-

Kernstück (18);
sekundäre Unterstützungsspule (22) um das Kernstück (18);
sekundäre Spule (24) um die sekundäre Unterstützungsspule (22);
primäre Unterstützungsspule (28) um die sekundäre Unterstützungsspule (24); sowie
primäre Spule (32) um die primäre Unterstützungsspule (28), wobei zwischen der primären Unterstützungsspule (28) und der primären Spule (32) ein nachgiebiges, bei Wärme expandierendes Entkupplungsmittel (30) mit einem nachgiebigen Puffermantel (30), der in der Lage ist, sich radial auszudehnen und zu kontrahieren, bereitgestellt wird; **dadurch charakterisiert, dass** der Puffermantel (30) benachbart zur primären Spule (32) einen sich radial nach außen ausdehnenden Vorsprung (P) aufweist, um eine nachgiebige Axialbewegung der primären Spule (32) relativ zur primären Unterstützungsspule (28) zu ermöglichen.

2. Zündspule nach Anspruch 1, wobei der nachgiebige Puffermantel (30) ebenso in der Lage ist, sich axial zu bewegen, wobei besagte Axialbewegung aus der relativen Axialbewegung zwischen der primären Spule (32) und der primären Unterstützungsspule (28) resultiert.
3. Zündspule gemäß einem beliebigen der vorstehenden Ansprüche, wobei das bei Wärme expandierende Entkupplungsmittel (30) ein Material mit einem Young-Modulus im Bereich von 10 bis 100 Mpa bei ca. 170 °C umfasst.
4. Zündspule gemäß Anspruch 3, wobei das nachgiebige, bei Wärme expandierende Entkupplungsmittel (30) ein Material umfasst, welches des Weiteren eine Wandstärke im Bereich von 0,1 bis 0,5 mm aufweist.
5. Zündspule gemäß einem beliebigen der vorstehenden Ansprüche, wobei die primäre Unterstützungsspule (28) ein röhrenförmiges, synthetisches Bauteil aufweist, um welches das nachgiebige, bei Wärme expandierende Entkupplungsmittel (30) und die primäre Spule (32) angeordnet sind.
6. Zündspule gemäß einem beliebigen der vorstehenden Ansprüche, wobei die sekundäre Unterstüt-

7. Zündspule gemäß einem beliebigen der vorstehenden Ansprüche, wobei um das Kernstück (18) ein Schrumpfschlauch (37) bereitgestellt wird.

10 Revendications

1. Bobine d'allumage, comprenant :

un élément de noyau (18) ;
un bobinage de support secondaire (22) autour de l'élément de noyau (18) ;
une bobine secondaire (24) autour du bobinage de support secondaire (22) ;
un bobinage de support primaire (22) autour de la bobine secondaire (24) ; et

une bobine primaire (32) autour du bobinage de support primaire (28), dans laquelle des moyens de découplage de dilatation thermique élastique (30) comprenant un tampon en gaine élastique (30) capable de se dilater et de se contracter dans une direction radiale, sont prévus entre le bobinage de support primaire (28) et la bobine primaire (32), **caractérisée en ce que** le tampon en gaine élastique (30) est pourvu d'une projection (P) s'étendant radialement vers l'extérieur, adjacente à la bobine primaire (32) afin de permettre un mouvement axial élastique de la bobine primaire (32) par rapport au bobinage de support primaire (28).

2. Bobine d'allumage selon la revendication 1, dans laquelle le tampon en gaine élastique (30) est aussi capable de mouvement dans une direction axiale, ledit mouvement dans la direction axiale étant un résultat d'un mouvement axial relatif entre la bobine primaire (32) et le bobinage de support primaire (28).
3. Bobine d'allumage selon l'une quelconque des revendications précédentes, dans laquelle le matériau constituant les moyens de découplage élastique de dilatation thermique (30) comprend un matériau ayant un module d'élasticité dans la plage de 10 à 100 Mpa à approximativement 170 °C.
4. Bobine d'allumage selon la revendication 3, dans laquelle le matériau constituant les moyens de découplage élastique de dilatation thermique (30) présente en outre une épaisseur de paroi dans la plage de 0,1 à 0,5 mm.
5. Bobine d'allumage selon l'une quelconque des revendications précédentes, dans laquelle le bobinage

de support primaire (28) comprend un élément synthétique tubulaire autour duquel sont agencés les moyens de découplage élastique de dilatation thermique (30) et la bobine primaire (32).

5

6. Bobine d'allumage selon l'une quelconque des revendications précédentes, dans laquelle le bobinage de support secondaire (22) comprend un élément synthétique tubulaire autour duquel est enroulée la bobine secondaire (24).

10

7. Bobine d'allumage selon l'une quelconque des revendications précédentes, dans laquelle un tube rétractable (37) est prévu autour de l'élément de noyau (18).

15

20

25

30

35

40

45

50

55

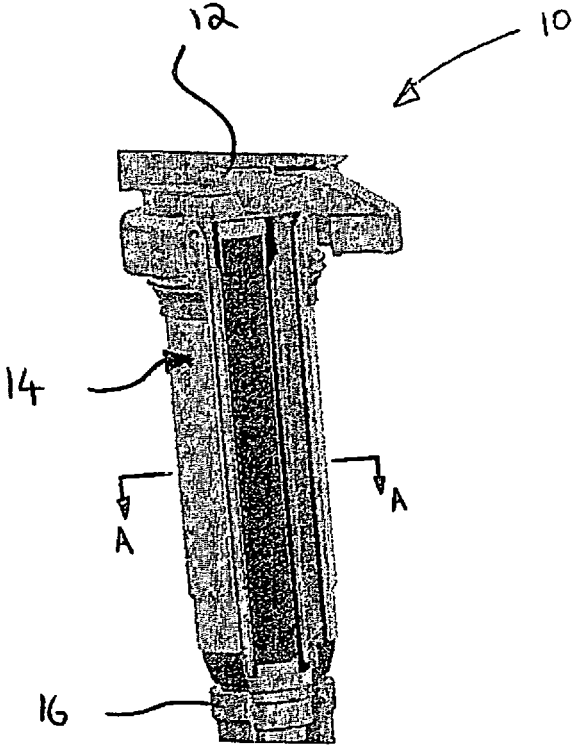


Fig. 1

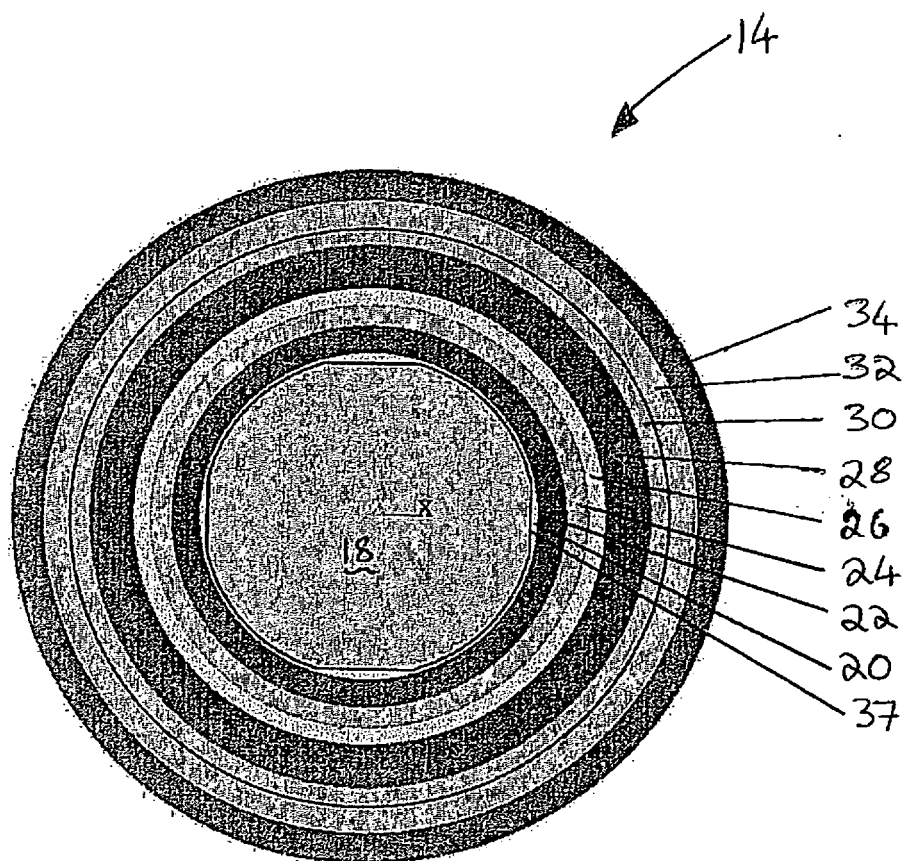


Fig. 2

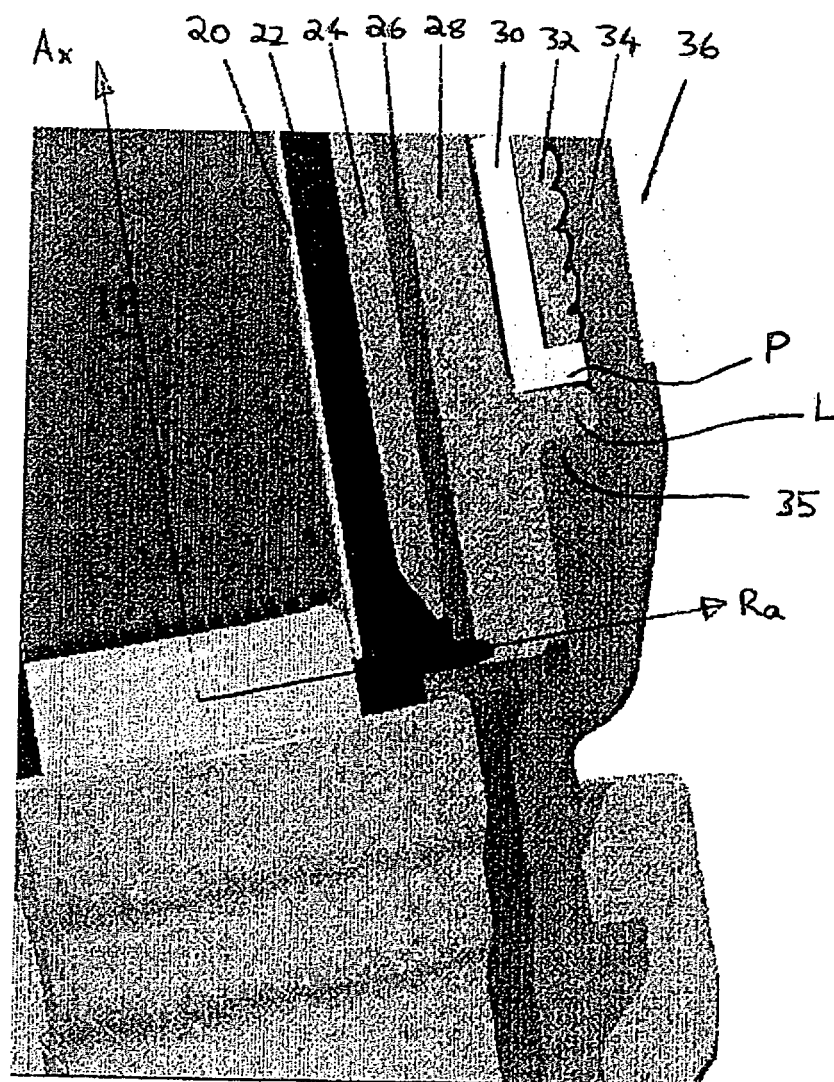


Fig. 3

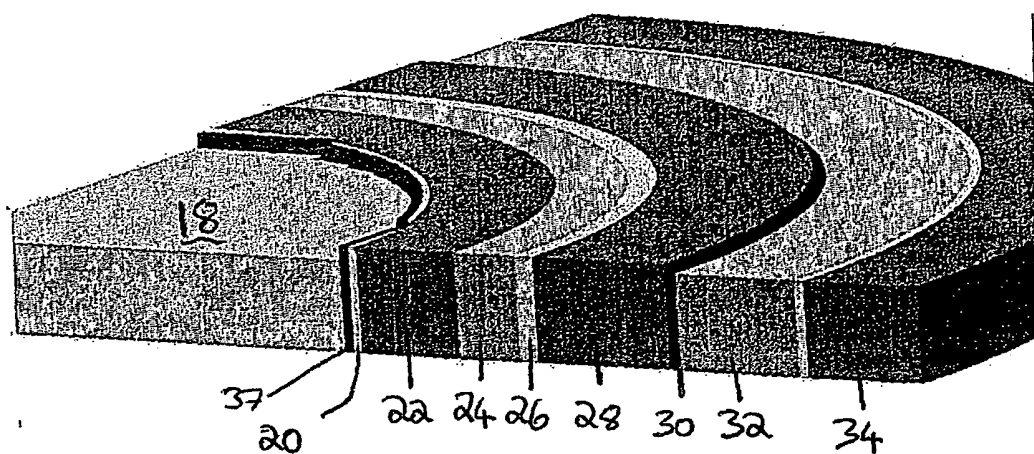


Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20030122645 A1 [0004]