



(51) International Patent Classification:

G06F 3/048 (2013.01) G06F 3/0484 (2022.01)
G06F 3/04817 (2022.01) G06F 16/242 (2019.01)

(21) International Application Number:

PCT/US2023/020787

(22) International Filing Date:

03 May 2023 (03.05.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/340,319 10 May 2022 (10.05.2022) US
17/964,767 12 October 2022 (12.10.2022) US

(71) Applicant: **APPLE INC.** [US/US]; One Apple Park Way,
Cupertino, California 95014 (US).

(72) Inventors: **BURGESS, Cameron**; c/o Apple Inc., One Apple
Park Way, Cupertino, California 95014 (US). **FREE-**
MAN, Ross A.; c/o Apple Inc., One Apple Park Way, Cu-
perertino, California 95014 (US). **JONES, James N.**; c/o Ap-
ple Inc., One Apple Park Way, Cupertino, California 95014
(US). **MOHA, Alexandre R.**; c/o Apple Inc., One Apple
Park Way, Cupertino, California 95014 (US). **MYROLD,**
Jamie L.; c/o Apple Inc., One Apple Park Way, Cupertino,

California 95014 (US). **TOUDJI, Sofiane**; c/o Apple Inc.,
One Apple Park Way, Cupertino, California 95014 (US).
WEINSTEIN, Ari R.; c/o Apple Inc., One Apple Park
Way, Cupertino, California 95014 (US). **WUNDERLICH,**
Niklas; c/o Apple Inc., One Apple Park Way, Cupertino,
California 95014 (US).

(74) Agent: **EIDE, Christopher B.**; DLA Piper LLP (US),
555 Mission Street, Suite 2400, San Francisco, California
94105-2933 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,

(54) Title: NAVIGATING AND PERFORMING DEVICE TASKS USING SEARCH INTERFACE

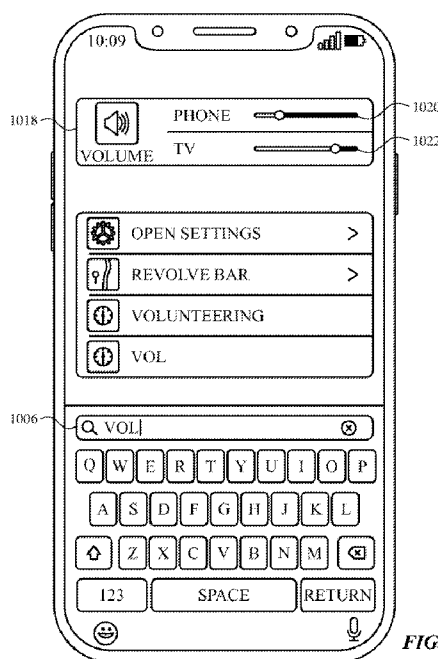


FIG. 10C

(57) Abstract: Systems and processes for navigating and performing device tasks using a search interface are provided. For example, a first user input including at least one character is received. Based on the first user input, a first task among a plurality of tasks is displayed, wherein the first task is associated with a confidence value exceeding a threshold confidence value. A second input corresponding to an activation on the first task is received. In accordance with a determination that the activated task corresponds to a predetermined task type performance of the activated task is initiated, and a respective interface corresponding to the initiated task is displayed. In accordance with a determination that the activated task does not correspond to the predetermined task type, the system causes the activated task to be performed without displaying the respective interface.

SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

NAVIGATING AND PERFORMING DEVICE TASKS USING SEARCH INTERFACE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application Serial No. 63/340,319, entitled “NAVIGATING AND PERFORMING DEVICE TASKS USING SEARCH INTERFACE,” filed May 10, 2022, and to U.S. Patent Application Serial No. 17/964,767, entitled “NAVIGATING AND PERFORMING DEVICE TASKS USING SEARCH INTERFACE,” filed October 12, 2022, the contents of each of which are hereby incorporated by reference in their entirety for all purposes.

FIELD

[0002] This application relates generally to efficiently performing device functions and, more specifically, to using a search interface to navigate and perform device tasks.

BACKGROUND

[0003] Today’s electronic devices are equipped with many useful features to assist a user with various tasks both at the electronic device and at other devices in communication with the electronic device. Users may interact with the devices to perform such tasks in many different ways, such as by navigating various menus using touch inputs, providing commands using speech inputs, or searching for applications or tasks using a search interface. However, conventional devices do not provide an efficient way for users to find and execute device functions, while minimizing the time spent and the inputs required to ultimately navigate to and perform respective tasks. For instance, in order to perform tasks on traditional devices, such as purchasing an item, recording a workout, or adjusting device settings, a user must navigate through numerous menus and interfaces. Such navigation may result in a cumbersome approach to ultimately find and perform a respective task. For certain voice-enabled devices, users may encounter speech recognition errors when attempting to perform tasks, which may result in a poor user experience. Accordingly, an improved system for navigating and performing device functions using a search interface is desired.

SUMMARY

[0004] Systems and processes for navigating and performing device task using a search interface are provided. For example, a first user input including at least one character is received. Based on the first user input, a first task among a plurality of tasks is displayed, wherein the first task is associated with a confidence value exceeding a threshold confidence value. A second input corresponding to an activation on the first task is received. In accordance with a determination that the activated task corresponds to a predetermined task type performance of the activated task is initiated, and a respective interface corresponding to the initiated task is displayed. In accordance with a determination that the activated task does not correspond to the predetermined task type, the system causes the activated task to be performed without displaying the respective interface.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a block diagram illustrating a system and environment for implementing a digital assistant, according to various examples.

[0006] FIG. 2A is a block diagram illustrating a portable multifunction device implementing the client-side portion of a digital assistant, according to various examples.

[0007] FIG. 2B is a block diagram illustrating exemplary components for event handling, according to various examples.

[0008] FIG. 3 illustrates a portable multifunction device implementing the client-side portion of a digital assistant, according to various examples.

[0009] FIG. 4 is a block diagram of an exemplary multifunction device with a display and a touch-sensitive surface, according to various examples.

[0010] FIG. 5A illustrates an exemplary user interface for a menu of applications on a portable multifunction device, according to various examples.

[0011] FIG. 5B illustrates an exemplary user interface for a multifunction device with a touch-sensitive surface that is separate from the display, according to various examples.

[0012] FIG. 6A illustrates a personal electronic device, according to various examples.

[0013] FIG. 6B is a block diagram illustrating a personal electronic device, according to various examples.

[0014] FIG. 7A is a block diagram illustrating a digital assistant system or a server portion thereof, according to various examples.

[0015] FIG. 7B illustrates the functions of the digital assistant shown in FIG. 7A, according to various examples.

[0016] FIG. 7C illustrates a portion of an ontology, according to various examples.

[0017] FIGS. 8A-8F illustrate a process for navigating and performing device tasks using a search interface, according to various examples.

[0018] FIGS. 9A-9B illustrate a process for navigating and performing device tasks using a search interface, according to various examples.

[0019] FIGS. 10A-10E illustrate a process for navigating and performing device tasks using a search interface, according to various examples.

[0020] FIGS. 11A-11B illustrate a process for navigating and performing device tasks using a search interface, according to various examples.

[0021] FIG. 12 illustrates a process for navigating and performing device tasks using a search interface, according to various examples.

DETAILED DESCRIPTION

[0022] In the following description of examples, reference is made to the accompanying drawings in which are shown by way of illustration specific examples that can be practiced. It is to be understood that other examples can be used and structural changes can be made without departing from the scope of the various examples.

[0023] Conventional techniques for navigating and performing device functions using search interfaces are generally outdated and lacking in effectiveness. In particular, traditional systems generally do not offer robust and efficient means by which to locate and perform a specific device function. For example, such devices may only offer a basic menu or traditional voice interface for performing predefined commands. Such devices do not offer

ways to search for and perform tasks that may be unique to each individual device, such as tasks frequently performed by a user, or tasks that are relevant to a current time and/or location. Additionally, these devices do not offer an effective and seamless interface for adjusting device settings, such as device modes for different wireless communication or power states, or adjusting settings on secondary devices such as home automation accessories or media playback devices. Accordingly, an improved system for navigating and performing device functions using a search interface is desired.

[0024] Although the following description uses terms “first,” “second,” etc. to describe various elements, these elements should not be limited by the terms. These terms are only used to distinguish one element from another. For example, a first input could be termed a second input, and, similarly, a second input could be termed a first input, without departing from the scope of the various described examples. The first input and the second input are both inputs and, in some cases, are separate and different inputs.

[0025] The terminology used in the description of the various described examples herein is for the purpose of describing particular examples only and is not intended to be limiting. As used in the description of the various described examples and the appended claims, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that the term “and/or” as used herein refers to and encompasses any and all possible combinations of one or more of the associated listed items. It will be further understood that the terms “includes,” “including,” “comprises,” and/or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0026] The term “if” may be construed to mean “when” or “upon” or “in response to determining” or “in response to detecting,” depending on the context. Similarly, the phrase “if it is determined” or “if [a stated condition or event] is detected” may be construed to mean “upon determining” or “in response to determining” or “upon detecting [the stated condition or event]” or “in response to detecting [the stated condition or event],” depending on the context.

1. System and Environment

[0027] FIG. 1 illustrates a block diagram of system 100 according to various examples. In some examples, system 100 implements a digital assistant. The terms “digital assistant,” “virtual assistant,” “intelligent automated assistant,” or “automatic digital assistant” refer to any information processing system that interprets natural language input in spoken and/or textual form to infer user intent, and performs actions based on the inferred user intent. For example, to act on an inferred user intent, the system performs one or more of the following: identifying a task flow with steps and parameters designed to accomplish the inferred user intent, inputting specific requirements from the inferred user intent into the task flow; executing the task flow by invoking programs, methods, services, APIs, or the like; and generating output responses to the user in an audible (e.g., speech) and/or visual form.

[0028] Specifically, a digital assistant is capable of accepting a user request at least partially in the form of a natural language command, request, statement, narrative, and/or inquiry. Typically, the user request seeks either an informational answer or performance of a task by the digital assistant. A satisfactory response to the user request includes a provision of the requested informational answer, a performance of the requested task, or a combination of the two. For example, a user asks the digital assistant a question, such as “Where am I right now?” Based on the user’s current location, the digital assistant answers, “You are in Central Park near the west gate.” The user also requests the performance of a task, for example, “Please invite my friends to my girlfriend’s birthday party next week.” In response, the digital assistant can acknowledge the request by saying “Yes, right away,” and then send a suitable calendar invite on behalf of the user to each of the user’s friends listed in the user’s electronic address book. During performance of a requested task, the digital assistant sometimes interacts with the user in a continuous dialogue involving multiple exchanges of information over an extended period of time. There are numerous other ways of interacting with a digital assistant to request information or performance of various tasks. In addition to providing verbal responses and taking programmed actions, the digital assistant also provides responses in other visual or audio forms, e.g., as text, alerts, music, videos, animations, etc.

[0029] As shown in FIG. 1, in some examples, a digital assistant is implemented according to a client-server model. The digital assistant includes client-side portion 102 (hereafter “DA client 102”) executed on user device 104 and server-side portion 106 (hereafter “DA server 106”) executed on server system 108. DA client 102 communicates with DA server 106 through one or more networks 110. DA client 102 provides client-side

functionalities such as user-facing input and output processing and communication with DA server 106. DA server 106 provides server-side functionalities for any number of DA clients 102 each residing on a respective user device 104.

[0030] In some examples, DA server 106 includes client-facing I/O interface 112, one or more processing modules 114, data and models 116, and I/O interface to external services 118. The client-facing I/O interface 112 facilitates the client-facing input and output processing for DA server 106. One or more processing modules 114 utilize data and models 116 to process speech input and determine the user's intent based on natural language input. Further, one or more processing modules 114 perform task execution based on inferred user intent. In some examples, DA server 106 communicates with external services 120 through network(s) 110 for task completion or information acquisition. I/O interface to external services 118 facilitates such communications.

[0031] User device 104 can be any suitable electronic device. In some examples, user device 104 is a portable multifunctional device (e.g., device 200, described below with reference to FIG. 2A), a multifunctional device (e.g., device 400, described below with reference to FIG. 4), or a personal electronic device (e.g., device 600, described below with reference to FIGS. 6A-6B.) A portable multifunctional device is, for example, a mobile telephone that also contains other functions, such as PDA and/or music player functions. Specific examples of portable multifunction devices include the Apple Watch®, iPhone®, iPod Touch®, and iPad® devices from Apple Inc. of Cupertino, California. Other examples of portable multifunction devices include, without limitation, earphones/headphones, speakers, and laptop or tablet computers. Further, in some examples, user device 104 is a non-portable multifunctional device. In particular, user device 104 is a desktop computer, a game console, a speaker, a television, or a television set-top box. In some examples, user device 104 includes a touch-sensitive surface (e.g., touch screen displays and/or touchpads). Further, user device 104 optionally includes one or more other physical user-interface devices, such as a physical keyboard, a mouse, and/or a joystick. Various examples of electronic devices, such as multifunctional devices, are described below in greater detail.

[0032] Examples of communication network(s) 110 include local area networks (LAN) and wide area networks (WAN), e.g., the Internet. Communication network(s) 110 is implemented using any known network protocol, including various wired or wireless protocols, such as, for example, Ethernet, Universal Serial Bus (USB), FIREWIRE, Global

System for Mobile Communications (GSM), Enhanced Data GSM Environment (EDGE), code division multiple access (CDMA), time division multiple access (TDMA), Bluetooth, Wi-Fi, voice over Internet Protocol (VoIP), Wi-MAX, or any other suitable communication protocol.

[0033] Server system 108 is implemented on one or more standalone data processing apparatus or a distributed network of computers. In some examples, server system 108 also employs various virtual devices and/or services of third-party service providers (e.g., third-party cloud service providers) to provide the underlying computing resources and/or infrastructure resources of server system 108.

[0034] In some examples, user device 104 communicates with DA server 106 via second user device 122. Second user device 122 is similar or identical to user device 104. For example, second user device 122 is similar to devices 200, 400, or 600 described below with reference to FIGS. 2A, 4, and 6A-6B. User device 104 is configured to communicatively couple to second user device 122 via a direct communication connection, such as Bluetooth, NFC, BTLE, or the like, or via a wired or wireless network, such as a local Wi-Fi network. In some examples, second user device 122 is configured to act as a proxy between user device 104 and DA server 106. For example, DA client 102 of user device 104 is configured to transmit information (e.g., a user request received at user device 104) to DA server 106 via second user device 122. DA server 106 processes the information and returns relevant data (e.g., data content responsive to the user request) to user device 104 via second user device 122.

[0035] In some examples, user device 104 is configured to communicate abbreviated requests for data to second user device 122 to reduce the amount of information transmitted from user device 104. Second user device 122 is configured to determine supplemental information to add to the abbreviated request to generate a complete request to transmit to DA server 106. This system architecture can advantageously allow user device 104 having limited communication capabilities and/or limited battery power (e.g., a watch or a similar compact electronic device) to access services provided by DA server 106 by using second user device 122, having greater communication capabilities and/or battery power (e.g., a mobile phone, laptop computer, tablet computer, or the like), as a proxy to DA server 106. While only two user devices 104 and 122 are shown in FIG. 1, it should be appreciated that

system 100, in some examples, includes any number and type of user devices configured in this proxy configuration to communicate with DA server system 106.

[0036] Although the digital assistant shown in FIG. 1 includes both a client-side portion (e.g., DA client 102) and a server-side portion (e.g., DA server 106), in some examples, the functions of a digital assistant are implemented as a standalone application installed on a user device. In addition, the divisions of functionalities between the client and server portions of the digital assistant can vary in different implementations. For instance, in some examples, the DA client is a thin-client that provides only user-facing input and output processing functions, and delegates all other functionalities of the digital assistant to a backend server.

2. Electronic Devices

[0037] Attention is now directed toward embodiments of electronic devices for implementing the client-side portion of a digital assistant. FIG. 2A is a block diagram illustrating portable multifunction device 200 with touch-sensitive display system 212 in accordance with some embodiments. Touch-sensitive display 212 is sometimes called a “touch screen” for convenience and is sometimes known as or called a “touch-sensitive display system.” Device 200 includes memory 202 (which optionally includes one or more computer-readable storage mediums), memory controller 222, one or more processing units (CPUs) 220, peripherals interface 218, RF circuitry 208, audio circuitry 210, speaker 211, microphone 213, input/output (I/O) subsystem 206, other input control devices 216, and external port 224. Device 200 optionally includes one or more optical sensors 264. Device 200 optionally includes one or more contact intensity sensors 265 for detecting intensity of contacts on device 200 (e.g., a touch-sensitive surface such as touch-sensitive display system 212 of device 200). Device 200 optionally includes one or more tactile output generators 267 for generating tactile outputs on device 200 (e.g., generating tactile outputs on a touch-sensitive surface such as touch-sensitive display system 212 of device 200 or touchpad 455 of device 400). These components optionally communicate over one or more communication buses or signal lines 203.

[0038] As used in the specification and claims, the term “intensity” of a contact on a touch-sensitive surface refers to the force or pressure (force per unit area) of a contact (e.g., a finger contact) on the touch-sensitive surface, or to a substitute (proxy) for the force or pressure of a contact on the touch-sensitive surface. The intensity of a contact has a range of

values that includes at least four distinct values and more typically includes hundreds of distinct values (e.g., at least 256). Intensity of a contact is, optionally, determined (or measured) using various approaches and various sensors or combinations of sensors. For example, one or more force sensors underneath or adjacent to the touch-sensitive surface are, optionally, used to measure force at various points on the touch-sensitive surface. In some implementations, force measurements from multiple force sensors are combined (e.g., a weighted average) to determine an estimated force of a contact. Similarly, a pressure-sensitive tip of a stylus is, optionally, used to determine a pressure of the stylus on the touch-sensitive surface. Alternatively, the size of the contact area detected on the touch-sensitive surface and/or changes thereto, the capacitance of the touch-sensitive surface proximate to the contact and/or changes thereto, and/or the resistance of the touch-sensitive surface proximate to the contact and/or changes thereto are, optionally, used as a substitute for the force or pressure of the contact on the touch-sensitive surface. In some implementations, the substitute measurements for contact force or pressure are used directly to determine whether an intensity threshold has been exceeded (e.g., the intensity threshold is described in units corresponding to the substitute measurements). In some implementations, the substitute measurements for contact force or pressure are converted to an estimated force or pressure, and the estimated force or pressure is used to determine whether an intensity threshold has been exceeded (e.g., the intensity threshold is a pressure threshold measured in units of pressure). Using the intensity of a contact as an attribute of a user input allows for user access to additional device functionality that may otherwise not be accessible by the user on a reduced-size device with limited real estate for displaying affordances (e.g., on a touch-sensitive display) and/or receiving user input (e.g., via a touch-sensitive display, a touch-sensitive surface, or a physical/mechanical control such as a knob or a button).

[0039] As used in the specification and claims, the term “tactile output” refers to physical displacement of a device relative to a previous position of the device, physical displacement of a component (e.g., a touch-sensitive surface) of a device relative to another component (e.g., housing) of the device, or displacement of the component relative to a center of mass of the device that will be detected by a user with the user’s sense of touch. For example, in situations where the device or the component of the device is in contact with a surface of a user that is sensitive to touch (e.g., a finger, palm, or other part of a user’s hand), the tactile output generated by the physical displacement will be interpreted by the user as a tactile sensation corresponding to a perceived change in physical characteristics of the device or the

component of the device. For example, movement of a touch-sensitive surface (e.g., a touch-sensitive display or trackpad) is, optionally, interpreted by the user as a “down click” or “up click” of a physical actuator button. In some cases, a user will feel a tactile sensation such as an “down click” or “up click” even when there is no movement of a physical actuator button associated with the touch-sensitive surface that is physically pressed (e.g., displaced) by the user’s movements. As another example, movement of the touch-sensitive surface is, optionally, interpreted or sensed by the user as “roughness” of the touch-sensitive surface, even when there is no change in smoothness of the touch-sensitive surface. While such interpretations of touch by a user will be subject to the individualized sensory perceptions of the user, there are many sensory perceptions of touch that are common to a large majority of users. Thus, when a tactile output is described as corresponding to a particular sensory perception of a user (e.g., an “up click,” a “down click,” “roughness”), unless otherwise stated, the generated tactile output corresponds to physical displacement of the device or a component thereof that will generate the described sensory perception for a typical (or average) user.

[0040] It should be appreciated that device 200 is only one example of a portable multifunction device, and that device 200 optionally has more or fewer components than shown, optionally combines two or more components, or optionally has a different configuration or arrangement of the components. The various components shown in FIG. 2A are implemented in hardware, software, or a combination of both hardware and software, including one or more signal processing and/or application-specific integrated circuits.

[0041] Memory 202 includes one or more computer-readable storage mediums. The computer-readable storage mediums are, for example, tangible and non-transitory. Memory 202 includes high-speed random access memory and also includes non-volatile memory, such as one or more magnetic disk storage devices, flash memory devices, or other non-volatile solid-state memory devices. Memory controller 222 controls access to memory 202 by other components of device 200.

[0042] In some examples, a non-transitory computer-readable storage medium of memory 202 is used to store instructions (e.g., for performing aspects of processes described below) for use by or in connection with an instruction execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch the instructions from the instruction execution system, apparatus, or device and execute the

instructions. In other examples, the instructions (e.g., for performing aspects of the processes described below) are stored on a non-transitory computer-readable storage medium (not shown) of the server system 108 or are divided between the non-transitory computer-readable storage medium of memory 202 and the non-transitory computer-readable storage medium of server system 108.

[0043] Peripherals interface 218 is used to couple input and output peripherals of the device to CPU 220 and memory 202. The one or more processors 220 run or execute various software programs and/or sets of instructions stored in memory 202 to perform various functions for device 200 and to process data. In some embodiments, peripherals interface 218, CPU 220, and memory controller 222 are implemented on a single chip, such as chip 204. In some other embodiments, they are implemented on separate chips.

[0044] RF (radio frequency) circuitry 208 receives and sends RF signals, also called electromagnetic signals. RF circuitry 208 converts electrical signals to/from electromagnetic signals and communicates with communications networks and other communications devices via the electromagnetic signals. RF circuitry 208 optionally includes well-known circuitry for performing these functions, including but not limited to an antenna system, an RF transceiver, one or more amplifiers, a tuner, one or more oscillators, a digital signal processor, a CODEC chipset, a subscriber identity module (SIM) card, memory, and so forth. RF circuitry 208 optionally communicates with networks, such as the Internet, also referred to as the World Wide Web (WWW), an intranet and/or a wireless network, such as a cellular telephone network, a wireless local area network (LAN) and/or a metropolitan area network (MAN), and other devices by wireless communication. The RF circuitry 208 optionally includes well-known circuitry for detecting near field communication (NFC) fields, such as by a short-range communication radio. The wireless communication optionally uses any of a plurality of communications standards, protocols, and technologies, including but not limited to Global System for Mobile Communications (GSM), Enhanced Data GSM Environment (EDGE), high-speed downlink packet access (HSDPA), high-speed uplink packet access (HSUPA), Evolution, Data-Only (EV-DO), HSPA, HSPA+, Dual-Cell HSPA (DC-HSPDA), long term evolution (LTE), near field communication (NFC), wideband code division multiple access (W-CDMA), code division multiple access (CDMA), time division multiple access (TDMA), Bluetooth, Bluetooth Low Energy (BTLE), Wireless Fidelity (Wi-Fi) (e.g., IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, and/or IEEE 802.11ac), voice

over Internet Protocol (VoIP), Wi-MAX, a protocol for e mail (e.g., Internet message access protocol (IMAP) and/or post office protocol (POP)), instant messaging (e.g., extensible messaging and presence protocol (XMPP), Session Initiation Protocol for Instant Messaging and Presence Leveraging Extensions (SIMPLE), Instant Messaging and Presence Service (IMPS)), and/or Short Message Service (SMS), or any other suitable communication protocol, including communication protocols not yet developed as of the filing date of this document.

[0045] Audio circuitry 210, speaker 211, and microphone 213 provide an audio interface between a user and device 200. Audio circuitry 210 receives audio data from peripherals interface 218, converts the audio data to an electrical signal, and transmits the electrical signal to speaker 211. Speaker 211 converts the electrical signal to human-audible sound waves. Audio circuitry 210 also receives electrical signals converted by microphone 213 from sound waves. Audio circuitry 210 converts the electrical signal to audio data and transmits the audio data to peripherals interface 218 for processing. Audio data are retrieved from and/or transmitted to memory 202 and/or RF circuitry 208 by peripherals interface 218. In some embodiments, audio circuitry 210 also includes a headset jack (e.g., 312, FIG. 3). The headset jack provides an interface between audio circuitry 210 and removable audio input/output peripherals, such as output-only headphones or a headset with both output (e.g., a headphone for one or both ears) and input (e.g., a microphone).

[0046] I/O subsystem 206 couples input/output peripherals on device 200, such as touch screen 212 and other input control devices 216, to peripherals interface 218. I/O subsystem 206 optionally includes display controller 256, optical sensor controller 258, intensity sensor controller 259, haptic feedback controller 261, and one or more input controllers 260 for other input or control devices. The one or more input controllers 260 receive/send electrical signals from/to other input control devices 216. The other input control devices 216 optionally include physical buttons (e.g., push buttons, rocker buttons, etc.), dials, slider switches, joysticks, click wheels, and so forth. In some alternate embodiments, input controller(s) 260 are, optionally, coupled to any (or none) of the following: a keyboard, an infrared port, a USB port, and a pointer device such as a mouse. The one or more buttons (e.g., 308, FIG. 3) optionally include an up/down button for volume control of speaker 211 and/or microphone 213. The one or more buttons optionally include a push button (e.g., 306, FIG. 3).

[0047] A quick press of the push button disengages a lock of touch screen 212 or begin a process that uses gestures on the touch screen to unlock the device, as described in U.S. Patent Application 11/322,549, “Unlocking a Device by Performing Gestures on an Unlock Image,” filed December 23, 2005, U.S. Pat. No. 7,657,849, which is hereby incorporated by reference in its entirety. A longer press of the push button (e.g., 306) turns power to device 200 on or off. The user is able to customize a functionality of one or more of the buttons. Touch screen 212 is used to implement virtual or soft buttons and one or more soft keyboards.

[0048] Touch-sensitive display 212 provides an input interface and an output interface between the device and a user. Display controller 256 receives and/or sends electrical signals from/to touch screen 212. Touch screen 212 displays visual output to the user. The visual output includes graphics, text, icons, video, and any combination thereof (collectively termed “graphics”). In some embodiments, some or all of the visual output correspond to user-interface objects.

[0049] Touch screen 212 has a touch-sensitive surface, sensor, or set of sensors that accepts input from the user based on haptic and/or tactile contact. Touch screen 212 and display controller 256 (along with any associated modules and/or sets of instructions in memory 202) detect contact (and any movement or breaking of the contact) on touch screen 212 and convert the detected contact into interaction with user-interface objects (e.g., one or more soft keys, icons, web pages, or images) that are displayed on touch screen 212. In an exemplary embodiment, a point of contact between touch screen 212 and the user corresponds to a finger of the user.

[0050] Touch screen 212 uses LCD (liquid crystal display) technology, LPD (light emitting polymer display) technology, or LED (light emitting diode) technology, although other display technologies may be used in other embodiments. Touch screen 212 and display controller 256 detect contact and any movement or breaking thereof using any of a plurality of touch sensing technologies now known or later developed, including but not limited to capacitive, resistive, infrared, and surface acoustic wave technologies, as well as other proximity sensor arrays or other elements for determining one or more points of contact with touch screen 212. In an exemplary embodiment, projected mutual capacitance sensing technology is used, such as that found in the iPhone® and iPod Touch® from Apple Inc. of Cupertino, California.

[0051] A touch-sensitive display in some embodiments of touch screen 212 is analogous to the multi-touch sensitive touchpads described in the following U.S. Patents: 6,323,846 (Westerman et al.), 6,570,557 (Westerman et al.), and/or 6,677,932 (Westerman), and/or U.S. Patent Publication 2002/0015024A1, each of which is hereby incorporated by reference in its entirety. However, touch screen 212 displays visual output from device 200, whereas touch-sensitive touchpads do not provide visual output.

[0052] A touch-sensitive display in some embodiments of touch screen 212 is as described in the following applications: (1) U.S. Patent Application No. 11/381,313, “Multipoint Touch Surface Controller,” filed May 2, 2006; (2) U.S. Patent Application No. 10/840,862, “Multipoint Touchscreen,” filed May 6, 2004; (3) U.S. Patent Application No. 10/903,964, “Gestures For Touch Sensitive Input Devices,” filed July 30, 2004; (4) U.S. Patent Application No. 11/048,264, “Gestures For Touch Sensitive Input Devices,” filed January 31, 2005; (5) U.S. Patent Application No. 11/038,590, “Mode-Based Graphical User Interfaces For Touch Sensitive Input Devices,” filed January 18, 2005; (6) U.S. Patent Application No. 11/228,758, “Virtual Input Device Placement On A Touch Screen User Interface,” filed September 16, 2005; (7) U.S. Patent Application No. 11/228,700, “Operation Of A Computer With A Touch Screen Interface,” filed September 16, 2005; (8) U.S. Patent Application No. 11/228,737, “Activating Virtual Keys Of A Touch-Screen Virtual Keyboard,” filed September 16, 2005; and (9) U.S. Patent Application No. 11/367,749, “Multi-Functional Hand-Held Device,” filed March 3, 2006. All of these applications are incorporated by reference herein in their entirety.

[0053] Touch screen 212 has, for example, a video resolution in excess of 100 dpi. In some embodiments, the touch screen has a video resolution of approximately 160 dpi. The user makes contact with touch screen 212 using any suitable object or appendage, such as a stylus, a finger, and so forth. In some embodiments, the user interface is designed to work primarily with finger-based contacts and gestures, which can be less precise than stylus-based input due to the larger area of contact of a finger on the touch screen. In some embodiments, the device translates the rough finger-based input into a precise pointer/cursor position or command for performing the actions desired by the user.

[0054] In some embodiments, in addition to the touch screen, device 200 includes a touchpad (not shown) for activating or deactivating particular functions. In some embodiments, the touchpad is a touch-sensitive area of the device that, unlike the touch

screen, does not display visual output. The touchpad is a touch-sensitive surface that is separate from touch screen 212 or an extension of the touch-sensitive surface formed by the touch screen.

[0055] Device 200 also includes power system 262 for powering the various components. Power system 262 includes a power management system, one or more power sources (e.g., battery, alternating current (AC)), a recharging system, a power failure detection circuit, a power converter or inverter, a power status indicator (e.g., a light-emitting diode (LED)) and any other components associated with the generation, management and distribution of power in portable devices.

[0056] Device 200 also includes one or more optical sensors 264. FIG. 2A shows an optical sensor coupled to optical sensor controller 258 in I/O subsystem 206. Optical sensor 264 includes charge-coupled device (CCD) or complementary metal-oxide semiconductor (CMOS) phototransistors. Optical sensor 264 receives light from the environment, projected through one or more lenses, and converts the light to data representing an image. In conjunction with imaging module 243 (also called a camera module), optical sensor 264 captures still images or video. In some embodiments, an optical sensor is located on the back of device 200, opposite touch screen display 212 on the front of the device so that the touch screen display is used as a viewfinder for still and/or video image acquisition. In some embodiments, an optical sensor is located on the front of the device so that the user's image is obtained for video conferencing while the user views the other video conference participants on the touch screen display. In some embodiments, the position of optical sensor 264 can be changed by the user (e.g., by rotating the lens and the sensor in the device housing) so that a single optical sensor 264 is used along with the touch screen display for both video conferencing and still and/or video image acquisition.

[0057] Device 200 optionally also includes one or more contact intensity sensors 265. FIG. 2A shows a contact intensity sensor coupled to intensity sensor controller 259 in I/O subsystem 206. Contact intensity sensor 265 optionally includes one or more piezoresistive strain gauges, capacitive force sensors, electric force sensors, piezoelectric force sensors, optical force sensors, capacitive touch-sensitive surfaces, or other intensity sensors (e.g., sensors used to measure the force (or pressure) of a contact on a touch-sensitive surface). Contact intensity sensor 265 receives contact intensity information (e.g., pressure information or a proxy for pressure information) from the environment. In some embodiments, at least

one contact intensity sensor is collocated with, or proximate to, a touch-sensitive surface (e.g., touch-sensitive display system 212). In some embodiments, at least one contact intensity sensor is located on the back of device 200, opposite touch screen display 212, which is located on the front of device 200.

[0058] Device 200 also includes one or more proximity sensors 266. FIG. 2A shows proximity sensor 266 coupled to peripherals interface 218. Alternately, proximity sensor 266 is coupled to input controller 260 in I/O subsystem 206. Proximity sensor 266 is performed as described in U.S. Patent Application Nos. 11/241,839, “Proximity Detector In Handheld Device”; 11/240,788, “Proximity Detector In Handheld Device”; 11/620,702, “Using Ambient Light Sensor To Augment Proximity Sensor Output”; 11/586,862, “Automated Response To And Sensing Of User Activity In Portable Devices”; and 11/638,251, “Methods And Systems For Automatic Configuration Of Peripherals,” which are hereby incorporated by reference in their entirety. In some embodiments, the proximity sensor turns off and disables touch screen 212 when the multifunction device is placed near the user’s ear (e.g., when the user is making a phone call).

[0059] Device 200 optionally also includes one or more tactile output generators 267. FIG. 2A shows a tactile output generator coupled to haptic feedback controller 261 in I/O subsystem 206. Tactile output generator 267 optionally includes one or more electroacoustic devices such as speakers or other audio components and/or electromechanical devices that convert energy into linear motion such as a motor, solenoid, electroactive polymer, piezoelectric actuator, electrostatic actuator, or other tactile output generating component (e.g., a component that converts electrical signals into tactile outputs on the device). Contact intensity sensor 265 receives tactile feedback generation instructions from haptic feedback module 233 and generates tactile outputs on device 200 that are capable of being sensed by a user of device 200. In some embodiments, at least one tactile output generator is collocated with, or proximate to, a touch-sensitive surface (e.g., touch-sensitive display system 212) and, optionally, generates a tactile output by moving the touch-sensitive surface vertically (e.g., in/out of a surface of device 200) or laterally (e.g., back and forth in the same plane as a surface of device 200). In some embodiments, at least one tactile output generator sensor is located on the back of device 200, opposite touch screen display 212, which is located on the front of device 200.

[0060] Device 200 also includes one or more accelerometers 268. FIG. 2A shows accelerometer 268 coupled to peripherals interface 218. Alternately, accelerometer 268 is coupled to an input controller 260 in I/O subsystem 206. Accelerometer 268 performs, for example, as described in U.S. Patent Publication No. 20050190059, “Acceleration-based Theft Detection System for Portable Electronic Devices,” and U.S. Patent Publication No. 20060017692, “Methods And Apparatuses For Operating A Portable Device Based On An Accelerometer,” both of which are incorporated by reference herein in their entirety. In some embodiments, information is displayed on the touch screen display in a portrait view or a landscape view based on an analysis of data received from the one or more accelerometers. Device 200 optionally includes, in addition to accelerometer(s) 268, a magnetometer (not shown) and a GPS (or GLONASS or other global navigation system) receiver (not shown) for obtaining information concerning the location and orientation (e.g., portrait or landscape) of device 200.

[0061] In some embodiments, the software components stored in memory 202 include operating system 226, communication module (or set of instructions) 228, contact/motion module (or set of instructions) 230, graphics module (or set of instructions) 232, text input module (or set of instructions) 234, Global Positioning System (GPS) module (or set of instructions) 235, Digital Assistant Client Module 229, and applications (or sets of instructions) 236. Further, memory 202 stores data and models, such as user data and models 231. Furthermore, in some embodiments, memory 202 (FIG. 2A) or 470 (FIG. 4) stores device/global internal state 257, as shown in FIGS. 2A and 4. Device/global internal state 257 includes one or more of: active application state, indicating which applications, if any, are currently active; display state, indicating what applications, views or other information occupy various regions of touch screen display 212; sensor state, including information obtained from the device’s various sensors and input control devices 216; and location information concerning the device’s location and/or attitude.

[0062] Operating system 226 (e.g., Darwin, RTXC, LINUX, UNIX, OS X, iOS, WINDOWS, or an embedded operating system such as VxWorks) includes various software components and/or drivers for controlling and managing general system tasks (e.g., memory management, storage device control, power management, etc.) and facilitates communication between various hardware and software components.

[0063] Communication module 228 facilitates communication with other devices over one or more external ports 224 and also includes various software components for handling data received by RF circuitry 208 and/or external port 224. External port 224 (e.g., Universal Serial Bus (USB), FIREWIRE, etc.) is adapted for coupling directly to other devices or indirectly over a network (e.g., the Internet, wireless LAN, etc.). In some embodiments, the external port is a multi-pin (e.g., 30-pin) connector that is the same as, or similar to and/or compatible with, the 30-pin connector used on iPod® (trademark of Apple Inc.) devices.

[0064] Contact/motion module 230 optionally detects contact with touch screen 212 (in conjunction with display controller 256) and other touch-sensitive devices (e.g., a touchpad or physical click wheel). Contact/motion module 230 includes various software components for performing various operations related to detection of contact, such as determining if contact has occurred (e.g., detecting a finger-down event), determining an intensity of the contact (e.g., the force or pressure of the contact or a substitute for the force or pressure of the contact), determining if there is movement of the contact and tracking the movement across the touch-sensitive surface (e.g., detecting one or more finger-dragging events), and determining if the contact has ceased (e.g., detecting a finger-up event or a break in contact). Contact/motion module 230 receives contact data from the touch-sensitive surface. Determining movement of the point of contact, which is represented by a series of contact data, optionally includes determining speed (magnitude), velocity (magnitude and direction), and/or an acceleration (a change in magnitude and/or direction) of the point of contact. These operations are, optionally, applied to single contacts (e.g., one finger contacts) or to multiple simultaneous contacts (e.g., “multitouch”/multiple finger contacts). In some embodiments, contact/motion module 230 and display controller 256 detect contact on a touchpad.

[0065] In some embodiments, contact/motion module 230 uses a set of one or more intensity thresholds to determine whether an operation has been performed by a user (e.g., to determine whether a user has “clicked” on an icon). In some embodiments, at least a subset of the intensity thresholds are determined in accordance with software parameters (e.g., the intensity thresholds are not determined by the activation thresholds of particular physical actuators and can be adjusted without changing the physical hardware of device 200). For example, a mouse “click” threshold of a trackpad or touch screen display can be set to any of a large range of predefined threshold values without changing the trackpad or touch screen display hardware. Additionally, in some implementations, a user of the device is provided

with software settings for adjusting one or more of the set of intensity thresholds (e.g., by adjusting individual intensity thresholds and/or by adjusting a plurality of intensity thresholds at once with a system-level click “intensity” parameter).

[0066] Contact/motion module 230 optionally detects a gesture input by a user. Different gestures on the touch-sensitive surface have different contact patterns (e.g., different motions, timings, and/or intensities of detected contacts). Thus, a gesture is, optionally, detected by detecting a particular contact pattern. For example, detecting a finger tap gesture includes detecting a finger-down event followed by detecting a finger-up (liftoff) event at the same position (or substantially the same position) as the finger-down event (e.g., at the position of an icon). As another example, detecting a finger swipe gesture on the touch-sensitive surface includes detecting a finger-down event followed by detecting one or more finger-dragging events, and subsequently followed by detecting a finger-up (liftoff) event.

[0067] Graphics module 232 includes various known software components for rendering and displaying graphics on touch screen 212 or other display, including components for changing the visual impact (e.g., brightness, transparency, saturation, contrast, or other visual property) of graphics that are displayed. As used herein, the term “graphics” includes any object that can be displayed to a user, including, without limitation, text, web pages, icons (such as user-interface objects including soft keys), digital images, videos, animations, and the like.

[0068] In some embodiments, graphics module 232 stores data representing graphics to be used. Each graphic is, optionally, assigned a corresponding code. Graphics module 232 receives, from applications etc., one or more codes specifying graphics to be displayed along with, if necessary, coordinate data and other graphic property data, and then generates screen image data to output to display controller 256.

[0069] Haptic feedback module 233 includes various software components for generating instructions used by tactile output generator(s) 267 to produce tactile outputs at one or more locations on device 200 in response to user interactions with device 200.

[0070] Text input module 234, which is, in some examples, a component of graphics module 232, provides soft keyboards for entering text in various applications (e.g., contacts 237, email 240, IM 241, browser 247, and any other application that needs text input).

[0071] GPS module 235 determines the location of the device and provides this information for use in various applications (e.g., to telephone 238 for use in location-based dialing; to camera 243 as picture/video metadata; and to applications that provide location-based services such as weather widgets, local yellow page widgets, and map/navigation widgets).

[0072] Digital assistant client module 229 includes various client-side digital assistant instructions to provide the client-side functionalities of the digital assistant. For example, digital assistant client module 229 is capable of accepting voice input (e.g., speech input), text input, touch input, and/or gestural input through various user interfaces (e.g., microphone 213, accelerometer(s) 268, touch-sensitive display system 212, optical sensor(s) 264, other input control devices 216, etc.) of portable multifunction device 200. Digital assistant client module 229 is also capable of providing output in audio (e.g., speech output), visual, and/or tactile forms through various output interfaces (e.g., speaker 211, touch-sensitive display system 212, tactile output generator(s) 267, etc.) of portable multifunction device 200. For example, output is provided as voice, sound, alerts, text messages, menus, graphics, videos, animations, vibrations, and/or combinations of two or more of the above. During operation, digital assistant client module 229 communicates with DA server 106 using RF circuitry 208.

[0073] User data and models 231 include various data associated with the user (e.g., user-specific vocabulary data, user preference data, user-specified name pronunciations, data from the user's electronic address book, to-do lists, shopping lists, etc.) to provide the client-side functionalities of the digital assistant. Further, user data and models 231 include various models (e.g., speech recognition models, statistical language models, natural language processing models, ontology, task flow models, service models, etc.) for processing user input and determining user intent.

[0074] In some examples, digital assistant client module 229 utilizes the various sensors, subsystems, and peripheral devices of portable multifunction device 200 to gather additional information from the surrounding environment of the portable multifunction device 200 to establish a context associated with a user, the current user interaction, and/or the current user input. In some examples, digital assistant client module 229 provides the contextual information or a subset thereof with the user input to DA server 106 to help infer the user's intent. In some examples, the digital assistant also uses the contextual information to

determine how to prepare and deliver outputs to the user. Contextual information is referred to as context data.

[0075] In some examples, the contextual information that accompanies the user input includes sensor information, e.g., lighting, ambient noise, ambient temperature, images or videos of the surrounding environment, etc. In some examples, the contextual information can also include the physical state of the device, e.g., device orientation, device location, device temperature, power level, speed, acceleration, motion patterns, cellular signals strength, etc. In some examples, information related to the software state of DA server 106, e.g., running processes, installed programs, past and present network activities, background services, error logs, resources usage, etc., and of portable multifunction device 200 is provided to DA server 106 as contextual information associated with a user input.

[0076] In some examples, the digital assistant client module 229 selectively provides information (e.g., user data 231) stored on the portable multifunction device 200 in response to requests from DA server 106. In some examples, digital assistant client module 229 also elicits additional input from the user via a natural language dialogue or other user interfaces upon request by DA server 106. Digital assistant client module 229 passes the additional input to DA server 106 to help DA server 106 in intent deduction and/or fulfillment of the user's intent expressed in the user request.

[0077] A more detailed description of a digital assistant is described below with reference to FIGS. 7A-7C. It should be recognized that digital assistant client module 229 can include any number of the sub-modules of digital assistant module 726 described below.

[0078] Applications 236 include the following modules (or sets of instructions), or a subset or superset thereof:

- Contacts module 237 (sometimes called an address book or contact list);
- Telephone module 238;
- Video conference module 239;
- E-mail client module 240;
- Instant messaging (IM) module 241;

- Workout support module 242;
- Camera module 243 for still and/or video images;
- Image management module 244;
- Video player module;
- Music player module;
- Browser module 247;
- Calendar module 248;
- Widget modules 249, which includes, in some examples, one or more of: weather widget 249-1, stocks widget 249-2, calculator widget 249-3, alarm clock widget 249-4, dictionary widget 249-5, and other widgets obtained by the user, as well as user-created widgets 249-6;
- Widget creator module 250 for making user-created widgets 249-6;
- Search module 251;
- Video and music player module 252, which merges video player module and music player module;
- Notes module 253;
- Map module 254; and/or
- Online video module 255.

[0079] Examples of other applications 236 that are stored in memory 202 include other word processing applications, other image editing applications, drawing applications, presentation applications, JAVA-enabled applications, encryption, digital rights management, voice recognition, and voice replication.

[0080] In conjunction with touch screen 212, display controller 256, contact/motion module 230, graphics module 232, and text input module 234, contacts module 237 are used

to manage an address book or contact list (e.g., stored in application internal state 292 of contacts module 237 in memory 202 or memory 470), including: adding name(s) to the address book; deleting name(s) from the address book; associating telephone number(s), e-mail address(es), physical address(es) or other information with a name; associating an image with a name; categorizing and sorting names; providing telephone numbers or e-mail addresses to initiate and/or facilitate communications by telephone 238, video conference module 239, e-mail 240, or IM 241; and so forth.

[0081] In conjunction with RF circuitry 208, audio circuitry 210, speaker 211, microphone 213, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, and text input module 234, telephone module 238 are used to enter a sequence of characters corresponding to a telephone number, access one or more telephone numbers in contacts module 237, modify a telephone number that has been entered, dial a respective telephone number, conduct a conversation, and disconnect or hang up when the conversation is completed. As noted above, the wireless communication uses any of a plurality of communications standards, protocols, and technologies.

[0082] In conjunction with RF circuitry 208, audio circuitry 210, speaker 211, microphone 213, touch screen 212, display controller 256, optical sensor 264, optical sensor controller 258, contact/motion module 230, graphics module 232, text input module 234, contacts module 237, and telephone module 238, video conference module 239 includes executable instructions to initiate, conduct, and terminate a video conference between a user and one or more other participants in accordance with user instructions.

[0083] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, and text input module 234, e-mail client module 240 includes executable instructions to create, send, receive, and manage e-mail in response to user instructions. In conjunction with image management module 244, e-mail client module 240 makes it very easy to create and send e-mails with still or video images taken with camera module 243.

[0084] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, and text input module 234, the instant messaging module 241 includes executable instructions to enter a sequence of characters corresponding to an instant message, to modify previously entered characters, to transmit a

respective instant message (for example, using a Short Message Service (SMS) or Multimedia Message Service (MMS) protocol for telephony-based instant messages or using XMPP, SIMPLE, or IMPS for Internet-based instant messages), to receive instant messages, and to view received instant messages. In some embodiments, transmitted and/or received instant messages include graphics, photos, audio files, video files and/or other attachments as are supported in an MMS and/or an Enhanced Messaging Service (EMS). As used herein, “instant messaging” refers to both telephony-based messages (e.g., messages sent using SMS or MMS) and Internet-based messages (e.g., messages sent using XMPP, SIMPLE, or IMPS).

[0085] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, text input module 234, GPS module 235, map module 254, and music player module, workout support module 242 includes executable instructions to create workouts (e.g., with time, distance, and/or calorie burning goals); communicate with workout sensors (sports devices); receive workout sensor data; calibrate sensors used to monitor a workout; select and play music for a workout; and display, store, and transmit workout data.

[0086] In conjunction with touch screen 212, display controller 256, optical sensor(s) 264, optical sensor controller 258, contact/motion module 230, graphics module 232, and image management module 244, camera module 243 includes executable instructions to capture still images or video (including a video stream) and store them into memory 202, modify characteristics of a still image or video, or delete a still image or video from memory 202.

[0087] In conjunction with touch screen 212, display controller 256, contact/motion module 230, graphics module 232, text input module 234, and camera module 243, image management module 244 includes executable instructions to arrange, modify (e.g., edit), or otherwise manipulate, label, delete, present (e.g., in a digital slide show or album), and store still and/or video images.

[0088] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, and text input module 234, browser module 247 includes executable instructions to browse the Internet in accordance with user instructions, including searching, linking to, receiving, and displaying web pages or portions thereof, as well as attachments and other files linked to web pages.

[0089] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, text input module 234, e-mail client module 240, and browser module 247, calendar module 248 includes executable instructions to create, display, modify, and store calendars and data associated with calendars (e.g., calendar entries, to-do lists, etc.) in accordance with user instructions.

[0090] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, text input module 234, and browser module 247, widget modules 249 are mini-applications that can be downloaded and used by a user (e.g., weather widget 249-1, stocks widget 249-2, calculator widget 249-3, alarm clock widget 249-4, and dictionary widget 249-5) or created by the user (e.g., user-created widget 249-6). In some embodiments, a widget includes an HTML (Hypertext Markup Language) file, a CSS (Cascading Style Sheets) file, and a JavaScript file. In some embodiments, a widget includes an XML (Extensible Markup Language) file and a JavaScript file (e.g., Yahoo! Widgets).

[0091] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, text input module 234, and browser module 247, the widget creator module 250 are used by a user to create widgets (e.g., turning a user-specified portion of a web page into a widget).

[0092] In conjunction with touch screen 212, display controller 256, contact/motion module 230, graphics module 232, and text input module 234, search module 251 includes executable instructions to search for text, music, sound, image, video, and/or other files in memory 202 that match one or more search criteria (e.g., one or more user-specified search terms) in accordance with user instructions.

[0093] In conjunction with touch screen 212, display controller 256, contact/motion module 230, graphics module 232, audio circuitry 210, speaker 211, RF circuitry 208, and browser module 247, video and music player module 252 includes executable instructions that allow the user to download and play back recorded music and other sound files stored in one or more file formats, such as MP3 or AAC files, and executable instructions to display, present, or otherwise play back videos (e.g., on touch screen 212 or on an external, connected display via external port 224). In some embodiments, device 200 optionally includes the functionality of an MP3 player, such as an iPod (trademark of Apple Inc.).

[0094] In conjunction with touch screen 212, display controller 256, contact/motion module 230, graphics module 232, and text input module 234, notes module 253 includes executable instructions to create and manage notes, to-do lists, and the like in accordance with user instructions.

[0095] In conjunction with RF circuitry 208, touch screen 212, display controller 256, contact/motion module 230, graphics module 232, text input module 234, GPS module 235, and browser module 247, map module 254 are used to receive, display, modify, and store maps and data associated with maps (e.g., driving directions, data on stores and other points of interest at or near a particular location, and other location-based data) in accordance with user instructions.

[0096] In conjunction with touch screen 212, display controller 256, contact/motion module 230, graphics module 232, audio circuitry 210, speaker 211, RF circuitry 208, text input module 234, e-mail client module 240, and browser module 247, online video module 255 includes instructions that allow the user to access, browse, receive (e.g., by streaming and/or download), play back (e.g., on the touch screen or on an external, connected display via external port 224), send an e-mail with a link to a particular online video, and otherwise manage online videos in one or more file formats, such as H.264. In some embodiments, instant messaging module 241, rather than e-mail client module 240, is used to send a link to a particular online video. Additional description of the online video application can be found in U.S. Provisional Patent Application No. 60/936,562, "Portable Multifunction Device, Method, and Graphical User Interface for Playing Online Videos," filed June 20, 2007, and U.S. Patent Application No. 11/968,067, "Portable Multifunction Device, Method, and Graphical User Interface for Playing Online Videos," filed December 31, 2007, the contents of which are hereby incorporated by reference in their entirety.

[0097] Each of the above-identified modules and applications corresponds to a set of executable instructions for performing one or more functions described above and the methods described in this application (e.g., the computer-implemented methods and other information processing methods described herein). These modules (e.g., sets of instructions) need not be implemented as separate software programs, procedures, or modules, and thus various subsets of these modules can be combined or otherwise rearranged in various embodiments. For example, video player module can be combined with music player module into a single module (e.g., video and music player module 252, FIG. 2A). In some

embodiments, memory 202 stores a subset of the modules and data structures identified above. Furthermore, memory 202 stores additional modules and data structures not described above.

[0098] In some embodiments, device 200 is a device where operation of a predefined set of functions on the device is performed exclusively through a touch screen and/or a touchpad. By using a touch screen and/or a touchpad as the primary input control device for operation of device 200, the number of physical input control devices (such as push buttons, dials, and the like) on device 200 is reduced.

[0099] The predefined set of functions that are performed exclusively through a touch screen and/or a touchpad optionally include navigation between user interfaces. In some embodiments, the touchpad, when touched by the user, navigates device 200 to a main, home, or root menu from any user interface that is displayed on device 200. In such embodiments, a “menu button” is implemented using a touchpad. In some other embodiments, the menu button is a physical push button or other physical input control device instead of a touchpad.

[0100] FIG. 2B is a block diagram illustrating exemplary components for event handling in accordance with some embodiments. In some embodiments, memory 202 (FIG. 2A) or 470 (FIG. 4) includes event sorter 270 (e.g., in operating system 226) and a respective application 236-1 (e.g., any of the aforementioned applications 237-251, 255, 480-490).

[0101] Event sorter 270 receives event information and determines the application 236-1 and application view 291 of application 236-1 to which to deliver the event information. Event sorter 270 includes event monitor 271 and event dispatcher module 274. In some embodiments, application 236-1 includes application internal state 292, which indicates the current application view(s) displayed on touch-sensitive display 212 when the application is active or executing. In some embodiments, device/global internal state 257 is used by event sorter 270 to determine which application(s) is (are) currently active, and application internal state 292 is used by event sorter 270 to determine application views 291 to which to deliver event information.

[0102] In some embodiments, application internal state 292 includes additional information, such as one or more of: resume information to be used when application 236-1 resumes execution, user interface state information that indicates information being displayed or that is ready for display by application 236-1, a state queue for enabling the user to go

back to a prior state or view of application 236-1, and a redo/undo queue of previous actions taken by the user.

[0103] Event monitor 271 receives event information from peripherals interface 218. Event information includes information about a sub-event (e.g., a user touch on touch-sensitive display 212, as part of a multi-touch gesture). Peripherals interface 218 transmits information it receives from I/O subsystem 206 or a sensor, such as proximity sensor 266, accelerometer(s) 268, and/or microphone 213 (through audio circuitry 210). Information that peripherals interface 218 receives from I/O subsystem 206 includes information from touch-sensitive display 212 or a touch-sensitive surface.

[0104] In some embodiments, event monitor 271 sends requests to the peripherals interface 218 at predetermined intervals. In response, peripherals interface 218 transmits event information. In other embodiments, peripherals interface 218 transmits event information only when there is a significant event (e.g., receiving an input above a predetermined noise threshold and/or for more than a predetermined duration).

[0105] In some embodiments, event sorter 270 also includes a hit view determination module 272 and/or an active event recognizer determination module 273.

[0106] Hit view determination module 272 provides software procedures for determining where a sub-event has taken place within one or more views when touch-sensitive display 212 displays more than one view. Views are made up of controls and other elements that a user can see on the display.

[0107] Another aspect of the user interface associated with an application is a set of views, sometimes herein called application views or user interface windows, in which information is displayed and touch-based gestures occur. The application views (of a respective application) in which a touch is detected correspond to programmatic levels within a programmatic or view hierarchy of the application. For example, the lowest level view in which a touch is detected is called the hit view, and the set of events that are recognized as proper inputs is determined based, at least in part, on the hit view of the initial touch that begins a touch-based gesture.

[0108] Hit view determination module 272 receives information related to sub events of a touch-based gesture. When an application has multiple views organized in a hierarchy, hit view determination module 272 identifies a hit view as the lowest view in the hierarchy

which should handle the sub-event. In most circumstances, the hit view is the lowest level view in which an initiating sub-event occurs (e.g., the first sub-event in the sequence of sub-events that form an event or potential event). Once the hit view is identified by the hit view determination module 272, the hit view typically receives all sub-events related to the same touch or input source for which it was identified as the hit view.

[0109] Active event recognizer determination module 273 determines which view or views within a view hierarchy should receive a particular sequence of sub-events. In some embodiments, active event recognizer determination module 273 determines that only the hit view should receive a particular sequence of sub-events. In other embodiments, active event recognizer determination module 273 determines that all views that include the physical location of a sub-event are actively involved views, and therefore determines that all actively involved views should receive a particular sequence of sub-events. In other embodiments, even if touch sub-events were entirely confined to the area associated with one particular view, views higher in the hierarchy would still remain as actively involved views.

[0110] Event dispatcher module 274 dispatches the event information to an event recognizer (e.g., event recognizer 280). In embodiments including active event recognizer determination module 273, event dispatcher module 274 delivers the event information to an event recognizer determined by active event recognizer determination module 273. In some embodiments, event dispatcher module 274 stores in an event queue the event information, which is retrieved by a respective event receiver 282.

[0111] In some embodiments, operating system 226 includes event sorter 270. Alternatively, application 236-1 includes event sorter 270. In yet other embodiments, event sorter 270 is a stand-alone module, or a part of another module stored in memory 202, such as contact/motion module 230.

[0112] In some embodiments, application 236-1 includes a plurality of event handlers 290 and one or more application views 291, each of which includes instructions for handling touch events that occur within a respective view of the application's user interface. Each application view 291 of the application 236-1 includes one or more event recognizers 280. Typically, a respective application view 291 includes a plurality of event recognizers 280. In other embodiments, one or more of event recognizers 280 are part of a separate module, such as a user interface kit (not shown) or a higher level object from which application 236-1 inherits methods and other properties. In some embodiments, a respective event handler 290

includes one or more of: data updater 276, object updater 277, GUI updater 278, and/or event data 279 received from event sorter 270. Event handler 290 utilizes or calls data updater 276, object updater 277, or GUI updater 278 to update the application internal state 292.

Alternatively, one or more of the application views 291 include one or more respective event handlers 290. Also, in some embodiments, one or more of data updater 276, object updater 277, and GUI updater 278 are included in a respective application view 291.

[0113] A respective event recognizer 280 receives event information (e.g., event data 279) from event sorter 270 and identifies an event from the event information. Event recognizer 280 includes event receiver 282 and event comparator 284. In some embodiments, event recognizer 280 also includes at least a subset of: metadata 283, and event delivery instructions 288 (which include sub-event delivery instructions).

[0114] Event receiver 282 receives event information from event sorter 270. The event information includes information about a sub-event, for example, a touch or a touch movement. Depending on the sub-event, the event information also includes additional information, such as location of the sub-event. When the sub-event concerns motion of a touch, the event information also includes speed and direction of the sub-event. In some embodiments, events include rotation of the device from one orientation to another (e.g., from a portrait orientation to a landscape orientation, or vice versa), and the event information includes corresponding information about the current orientation (also called device attitude) of the device.

[0115] Event comparator 284 compares the event information to predefined event or sub-event definitions and, based on the comparison, determines an event or sub event, or determines or updates the state of an event or sub-event. In some embodiments, event comparator 284 includes event definitions 286. Event definitions 286 contain definitions of events (e.g., predefined sequences of sub-events), for example, event 1 (287-1), event 2 (287-2), and others. In some embodiments, sub-events in an event (287) include, for example, touch begin, touch end, touch movement, touch cancellation, and multiple touching. In one example, the definition for event 1 (287-1) is a double tap on a displayed object. The double tap, for example, comprises a first touch (touch begin) on the displayed object for a predetermined phase, a first liftoff (touch end) for a predetermined phase, a second touch (touch begin) on the displayed object for a predetermined phase, and a second liftoff (touch end) for a predetermined phase. In another example, the definition for event 2 (287-2) is a dragging on a displayed object. The dragging, for example, comprises a touch (or contact) on

the displayed object for a predetermined phase, a movement of the touch across touch-sensitive display 212, and liftoff of the touch (touch end). In some embodiments, the event also includes information for one or more associated event handlers 290.

[0116] In some embodiments, event definition 287 includes a definition of an event for a respective user-interface object. In some embodiments, event comparator 284 performs a hit test to determine which user-interface object is associated with a sub-event. For example, in an application view in which three user-interface objects are displayed on touch-sensitive display 212, when a touch is detected on touch-sensitive display 212, event comparator 284 performs a hit test to determine which of the three user-interface objects is associated with the touch (sub-event). If each displayed object is associated with a respective event handler 290, the event comparator uses the result of the hit test to determine which event handler 290 should be activated. For example, event comparator 284 selects an event handler associated with the sub-event and the object triggering the hit test.

[0117] In some embodiments, the definition for a respective event (287) also includes delayed actions that delay delivery of the event information until after it has been determined whether the sequence of sub-events does or does not correspond to the event recognizer's event type.

[0118] When a respective event recognizer 280 determines that the series of sub-events do not match any of the events in event definitions 286, the respective event recognizer 280 enters an event impossible, event failed, or event ended state, after which it disregards subsequent sub-events of the touch-based gesture. In this situation, other event recognizers, if any, that remain active for the hit view continue to track and process sub-events of an ongoing touch-based gesture.

[0119] In some embodiments, a respective event recognizer 280 includes metadata 283 with configurable properties, flags, and/or lists that indicate how the event delivery system should perform sub-event delivery to actively involved event recognizers. In some embodiments, metadata 283 includes configurable properties, flags, and/or lists that indicate how event recognizers interact, or are enabled to interact, with one another. In some embodiments, metadata 283 includes configurable properties, flags, and/or lists that indicate whether sub-events are delivered to varying levels in the view or programmatic hierarchy.

[0120] In some embodiments, a respective event recognizer 280 activates event handler 290 associated with an event when one or more particular sub-events of an event are

recognized. In some embodiments, a respective event recognizer 280 delivers event information associated with the event to event handler 290. Activating an event handler 290 is distinct from sending (and deferred sending) sub-events to a respective hit view. In some embodiments, event recognizer 280 throws a flag associated with the recognized event, and event handler 290 associated with the flag catches the flag and performs a predefined process.

[0121] In some embodiments, event delivery instructions 288 include sub-event delivery instructions that deliver event information about a sub-event without activating an event handler. Instead, the sub-event delivery instructions deliver event information to event handlers associated with the series of sub-events or to actively involved views. Event handlers associated with the series of sub-events or with actively involved views receive the event information and perform a predetermined process.

[0122] In some embodiments, data updater 276 creates and updates data used in application 236-1. For example, data updater 276 updates the telephone number used in contacts module 237, or stores a video file used in video player module. In some embodiments, object updater 277 creates and updates objects used in application 236-1. For example, object updater 277 creates a new user-interface object or updates the position of a user-interface object. GUI updater 278 updates the GUI. For example, GUI updater 278 prepares display information and sends it to graphics module 232 for display on a touch-sensitive display.

[0123] In some embodiments, event handler(s) 290 includes or has access to data updater 276, object updater 277, and GUI updater 278. In some embodiments, data updater 276, object updater 277, and GUI updater 278 are included in a single module of a respective application 236-1 or application view 291. In other embodiments, they are included in two or more software modules.

[0124] It shall be understood that the foregoing discussion regarding event handling of user touches on touch-sensitive displays also applies to other forms of user inputs to operate multifunction devices 200 with input devices, not all of which are initiated on touch screens. For example, mouse movement and mouse button presses, optionally coordinated with single or multiple keyboard presses or holds; contact movements such as taps, drags, scrolls, etc. on touchpads; pen stylus inputs; movement of the device; oral instructions; detected eye movements; biometric inputs; and/or any combination thereof are optionally utilized as inputs corresponding to sub-events which define an event to be recognized.

[0125] FIG. 3 illustrates a portable multifunction device 200 having a touch screen 212 in accordance with some embodiments. The touch screen optionally displays one or more graphics within user interface (UI) 300. In this embodiment, as well as others described below, a user is enabled to select one or more of the graphics by making a gesture on the graphics, for example, with one or more fingers 302 (not drawn to scale in the figure) or one or more styluses 303 (not drawn to scale in the figure). In some embodiments, selection of one or more graphics occurs when the user breaks contact with the one or more graphics. In some embodiments, the gesture optionally includes one or more taps, one or more swipes (from left to right, right to left, upward and/or downward), and/or a rolling of a finger (from right to left, left to right, upward and/or downward) that has made contact with device 200. In some implementations or circumstances, inadvertent contact with a graphic does not select the graphic. For example, a swipe gesture that sweeps over an application icon optionally does not select the corresponding application when the gesture corresponding to selection is a tap.

[0126] Device 200 also includes one or more physical buttons, such as “home” or menu button 304. As described previously, menu button 304 is used to navigate to any application 236 in a set of applications that is executed on device 200. Alternatively, in some embodiments, the menu button is implemented as a soft key in a GUI displayed on touch screen 212.

[0127] In one embodiment, device 200 includes touch screen 212, menu button 304, push button 306 for powering the device on/off and locking the device, volume adjustment button(s) 308, subscriber identity module (SIM) card slot 310, headset jack 312, and docking/charging external port 224. Push button 306 is, optionally, used to turn the power on/off on the device by depressing the button and holding the button in the depressed state for a predefined time interval; to lock the device by depressing the button and releasing the button before the predefined time interval has elapsed; and/or to unlock the device or initiate an unlock process. In an alternative embodiment, device 200 also accepts verbal input for activation or deactivation of some functions through microphone 213. Device 200 also, optionally, includes one or more contact intensity sensors 265 for detecting intensity of contacts on touch screen 212 and/or one or more tactile output generators 267 for generating tactile outputs for a user of device 200.

[0128] FIG. 4 is a block diagram of an exemplary multifunction device with a display and a touch-sensitive surface in accordance with some embodiments. Device 400 need not be

portable. In some embodiments, device 400 is a laptop computer, a desktop computer, a tablet computer, a multimedia player device, a navigation device, an educational device (such as a child's learning toy), a gaming system, or a control device (e.g., a home or industrial controller). Device 400 typically includes one or more processing units (CPUs) 410, one or more network or other communications interfaces 460, memory 470, and one or more communication buses 420 for interconnecting these components. Communication buses 420 optionally include circuitry (sometimes called a chipset) that interconnects and controls communications between system components. Device 400 includes input/output (I/O) interface 430 comprising display 440, which is typically a touch screen display. I/O interface 430 also optionally includes a keyboard and/or mouse (or other pointing device) 450 and touchpad 455, tactile output generator 457 for generating tactile outputs on device 400 (e.g., similar to tactile output generator(s) 267 described above with reference to FIG. 2A), sensors 459 (e.g., optical, acceleration, proximity, touch-sensitive, and/or contact intensity sensors similar to contact intensity sensor(s) 265 described above with reference to FIG. 2A). Memory 470 includes high-speed random access memory, such as DRAM, SRAM, DDR RAM, or other random access solid state memory devices; and optionally includes non-volatile memory, such as one or more magnetic disk storage devices, optical disk storage devices, flash memory devices, or other non-volatile solid state storage devices. Memory 470 optionally includes one or more storage devices remotely located from CPU(s) 410. In some embodiments, memory 470 stores programs, modules, and data structures analogous to the programs, modules, and data structures stored in memory 202 of portable multifunction device 200 (FIG. 2A), or a subset thereof. Furthermore, memory 470 optionally stores additional programs, modules, and data structures not present in memory 202 of portable multifunction device 200. For example, memory 470 of device 400 optionally stores drawing module 480, presentation module 482, word processing module 484, website creation module 486, disk authoring module 488, and/or spreadsheet module 490, while memory 202 of portable multifunction device 200 (FIG. 2A) optionally does not store these modules.

[0129] Each of the above-identified elements in FIG. 4 is, in some examples, stored in one or more of the previously mentioned memory devices. Each of the above-identified modules corresponds to a set of instructions for performing a function described above. The above-identified modules or programs (e.g., sets of instructions) need not be implemented as separate software programs, procedures, or modules, and thus various subsets of these modules are combined or otherwise rearranged in various embodiments. In some

embodiments, memory 470 stores a subset of the modules and data structures identified above. Furthermore, memory 470 stores additional modules and data structures not described above.

[0130] Attention is now directed towards embodiments of user interfaces that can be implemented on, for example, portable multifunction device 200.

[0131] FIG. 5A illustrates an exemplary user interface for a menu of applications on portable multifunction device 200 in accordance with some embodiments. Similar user interfaces are implemented on device 400. In some embodiments, user interface 500 includes the following elements, or a subset or superset thereof:

[0132] Signal strength indicator(s) 502 for wireless communication(s), such as cellular and Wi-Fi signals;

- Time 504;
- Bluetooth indicator 505;
- Battery status indicator 506;
- Tray 508 with icons for frequently used applications, such as:
 - Icon 516 for telephone module 238, labeled “Phone,” which optionally includes an indicator 514 of the number of missed calls or voicemail messages;
 - Icon 518 for e-mail client module 240, labeled “Mail,” which optionally includes an indicator 510 of the number of unread e-mails;
 - Icon 520 for browser module 247, labeled “Browser;” and
 - Icon 522 for video and music player module 252, also referred to as iPod (trademark of Apple Inc.) module 252, labeled “iPod;” and
- Icons for other applications, such as:
 - Icon 524 for IM module 241, labeled “Messages;”
 - Icon 526 for calendar module 248, labeled “Calendar;”
 - Icon 528 for image management module 244, labeled “Photos;”
 - Icon 530 for camera module 243, labeled “Camera;”

- Icon 532 for online video module 255, labeled “Online Video;”
- Icon 534 for stocks widget 249-2, labeled “Stocks;”
- Icon 536 for map module 254, labeled “Maps;”
- Icon 538 for weather widget 249-1, labeled “Weather;”
- Icon 540 for alarm clock widget 249-4, labeled “Clock;”
- Icon 542 for workout support module 242, labeled “Workout Support;”
- Icon 544 for notes module 253, labeled “Notes;” and
- Icon 546 for a settings application or module, labeled “Settings,” which provides access to settings for device 200 and its various applications 236.

[0133] It should be noted that the icon labels illustrated in FIG. 5A are merely exemplary. For example, icon 522 for video and music player module 252 is optionally labeled “Music” or “Music Player.” Other labels are, optionally, used for various application icons. In some embodiments, a label for a respective application icon includes a name of an application corresponding to the respective application icon. In some embodiments, a label for a particular application icon is distinct from a name of an application corresponding to the particular application icon.

[0134] FIG. 5B illustrates an exemplary user interface on a device (e.g., device 400, FIG. 4) with a touch-sensitive surface 551 (e.g., a tablet or touchpad 455, FIG. 4) that is separate from the display 550 (e.g., touch screen display 212). Device 400 also, optionally, includes one or more contact intensity sensors (e.g., one or more of sensors 459) for detecting intensity of contacts on touch-sensitive surface 551 and/or one or more tactile output generators 457 for generating tactile outputs for a user of device 400.

[0135] Although some of the examples which follow will be given with reference to inputs on touch screen display 212 (where the touch-sensitive surface and the display are combined), in some embodiments, the device detects inputs on a touch-sensitive surface that is separate from the display, as shown in FIG. 5B. In some embodiments, the touch-sensitive surface (e.g., 551 in FIG. 5B) has a primary axis (e.g., 552 in FIG. 5B) that corresponds to a primary axis (e.g., 553 in FIG. 5B) on the display (e.g., 550). In accordance with these embodiments, the device detects contacts (e.g., 560 and 562 in FIG. 5B) with the touch-sensitive surface 551 at locations that correspond to respective locations on the display (e.g., in FIG. 5B, 560 corresponds to 568 and 562 corresponds to 570). In this way, user inputs

(e.g., contacts 560 and 562, and movements thereof) detected by the device on the touch-sensitive surface (e.g., 551 in FIG. 5B) are used by the device to manipulate the user interface on the display (e.g., 550 in FIG. 5B) of the multifunction device when the touch-sensitive surface is separate from the display. It should be understood that similar methods are, optionally, used for other user interfaces described herein.

[0136] Additionally, while the following examples are given primarily with reference to finger inputs (e.g., finger contacts, finger tap gestures, finger swipe gestures), it should be understood that, in some embodiments, one or more of the finger inputs are replaced with input from another input device (e.g., a mouse-based input or stylus input). For example, a swipe gesture is, optionally, replaced with a mouse click (e.g., instead of a contact) followed by movement of the cursor along the path of the swipe (e.g., instead of movement of the contact). As another example, a tap gesture is, optionally, replaced with a mouse click while the cursor is located over the location of the tap gesture (e.g., instead of detection of the contact followed by ceasing to detect the contact). Similarly, when multiple user inputs are simultaneously detected, it should be understood that multiple computer mice are, optionally, used simultaneously, or a mouse and finger contacts are, optionally, used simultaneously.

[0137] FIG. 6A illustrates exemplary personal electronic device 600. Device 600 includes body 602. In some embodiments, device 600 includes some or all of the features described with respect to devices 200 and 400 (e.g., FIGS. 2A-4). In some embodiments, device 600 has touch-sensitive display screen 604, hereafter touch screen 604. Alternatively, or in addition to touch screen 604, device 600 has a display and a touch-sensitive surface. As with devices 200 and 400, in some embodiments, touch screen 604 (or the touch-sensitive surface) has one or more intensity sensors for detecting intensity of contacts (e.g., touches) being applied. The one or more intensity sensors of touch screen 604 (or the touch-sensitive surface) provide output data that represents the intensity of touches. The user interface of device 600 responds to touches based on their intensity, meaning that touches of different intensities can invoke different user interface operations on device 600.

[0138] Techniques for detecting and processing touch intensity are found, for example, in related applications: International Patent Application Serial No. PCT/US2013/040061, titled “Device, Method, and Graphical User Interface for Displaying User Interface Objects Corresponding to an Application,” filed May 8, 2013, and International Patent Application Serial No. PCT/US2013/069483, titled “Device, Method, and Graphical User Interface for

Transitioning Between Touch Input to Display Output Relationships,” filed November 11, 2013, each of which is hereby incorporated by reference in their entirety.

[0139] In some embodiments, device 600 has one or more input mechanisms 606 and 608. Input mechanisms 606 and 608, if included, are physical. Examples of physical input mechanisms include push buttons and rotatable mechanisms. In some embodiments, device 600 has one or more attachment mechanisms. Such attachment mechanisms, if included, can permit attachment of device 600 with, for example, hats, eyewear, earrings, necklaces, shirts, jackets, bracelets, watch straps, chains, trousers, belts, shoes, purses, backpacks, and so forth. These attachment mechanisms permit device 600 to be worn by a user.

[0140] FIG. 6B depicts exemplary personal electronic device 600. In some embodiments, device 600 includes some or all of the components described with respect to FIGS. 2A, 2B, and 4. Device 600 has bus 612 that operatively couples I/O section 614 with one or more computer processors 616 and memory 618. I/O section 614 is connected to display 604, which can have touch-sensitive component 622 and, optionally, touch-intensity sensitive component 624. In addition, I/O section 614 is connected with communication unit 630 for receiving application and operating system data, using Wi-Fi, Bluetooth, near field communication (NFC), cellular, and/or other wireless communication techniques. Device 600 includes input mechanisms 606 and/or 608. Input mechanism 606 is a rotatable input device or a depressible and rotatable input device, for example. Input mechanism 608 is a button, in some examples.

[0141] Input mechanism 608 is a microphone, in some examples. Personal electronic device 600 includes, for example, various sensors, such as GPS sensor 632, accelerometer 634, directional sensor 640 (e.g., compass), gyroscope 636, motion sensor 638, and/or a combination thereof, all of which are operatively connected to I/O section 614.

[0142] Memory 618 of personal electronic device 600 is a non-transitory computer-readable storage medium, for storing computer-executable instructions, which, when executed by one or more computer processors 616, for example, cause the computer processors to perform the techniques and processes described below. The computer-executable instructions, for example, are also stored and/or transported within any non-transitory computer-readable storage medium for use by or in connection with an instruction execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch the instructions from the instruction

execution system, apparatus, or device and execute the instructions. Personal electronic device 600 is not limited to the components and configuration of FIG. 6B, but can include other or additional components in multiple configurations.

[0143] As used here, the term “affordance” refers to a user-interactive graphical user interface object that is, for example, displayed on the display screen of devices 200, 400, and/or 600 (FIGS. 2A, 4, and 6A-6B). For example, an image (e.g., icon), a button, and text (e.g., hyperlink) each constitutes an affordance.

[0144] As used herein, the term “focus selector” refers to an input element that indicates a current part of a user interface with which a user is interacting. In some implementations that include a cursor or other location marker, the cursor acts as a “focus selector” so that when an input (e.g., a press input) is detected on a touch-sensitive surface (e.g., touchpad 455 in FIG. 4 or touch-sensitive surface 551 in FIG. 5B) while the cursor is over a particular user interface element (e.g., a button, window, slider or other user interface element), the particular user interface element is adjusted in accordance with the detected input. In some implementations that include a touch screen display (e.g., touch-sensitive display system 212 in FIG. 2A or touch screen 212 in FIG. 5A) that enables direct interaction with user interface elements on the touch screen display, a detected contact on the touch screen acts as a “focus selector” so that when an input (e.g., a press input by the contact) is detected on the touch screen display at a location of a particular user interface element (e.g., a button, window, slider, or other user interface element), the particular user interface element is adjusted in accordance with the detected input. In some implementations, focus is moved from one region of a user interface to another region of the user interface without corresponding movement of a cursor or movement of a contact on a touch screen display (e.g., by using a tab key or arrow keys to move focus from one button to another button); in these implementations, the focus selector moves in accordance with movement of focus between different regions of the user interface. Without regard to the specific form taken by the focus selector, the focus selector is generally the user interface element (or contact on a touch screen display) that is controlled by the user so as to communicate the user’s intended interaction with the user interface (e.g., by indicating, to the device, the element of the user interface with which the user is intending to interact). For example, the location of a focus selector (e.g., a cursor, a contact, or a selection box) over a respective button while a press input is detected on the touch-sensitive surface (e.g., a touchpad or touch screen) will indicate

that the user is intending to activate the respective button (as opposed to other user interface elements shown on a display of the device).

[0145] As used in the specification and claims, the term “characteristic intensity” of a contact refers to a characteristic of the contact based on one or more intensities of the contact. In some embodiments, the characteristic intensity is based on multiple intensity samples. The characteristic intensity is, optionally, based on a predefined number of intensity samples, or a set of intensity samples collected during a predetermined time period (e.g., 0.05, 0.1, 0.2, 0.5, 1, 2, 5, 10 seconds) relative to a predefined event (e.g., after detecting the contact, prior to detecting liftoff of the contact, before or after detecting a start of movement of the contact, prior to detecting an end of the contact, before or after detecting an increase in intensity of the contact, and/or before or after detecting a decrease in intensity of the contact). A characteristic intensity of a contact is, optionally based on one or more of: a maximum value of the intensities of the contact, a mean value of the intensities of the contact, an average value of the intensities of the contact, a top 10 percentile value of the intensities of the contact, a value at the half maximum of the intensities of the contact, a value at the 90 percent maximum of the intensities of the contact, or the like. In some embodiments, the duration of the contact is used in determining the characteristic intensity (e.g., when the characteristic intensity is an average of the intensity of the contact over time). In some embodiments, the characteristic intensity is compared to a set of one or more intensity thresholds to determine whether an operation has been performed by a user. For example, the set of one or more intensity thresholds includes a first intensity threshold and a second intensity threshold. In this example, a contact with a characteristic intensity that does not exceed the first threshold results in a first operation, a contact with a characteristic intensity that exceeds the first intensity threshold and does not exceed the second intensity threshold results in a second operation, and a contact with a characteristic intensity that exceeds the second threshold results in a third operation. In some embodiments, a comparison between the characteristic intensity and one or more thresholds is used to determine whether or not to perform one or more operations (e.g., whether to perform a respective operation or forgo performing the respective operation) rather than being used to determine whether to perform a first operation or a second operation.

[0146] In some embodiments, a portion of a gesture is identified for purposes of determining a characteristic intensity. For example, a touch-sensitive surface receives a continuous swipe contact transitioning from a start location and reaching an end location, at

which point the intensity of the contact increases. In this example, the characteristic intensity of the contact at the end location is based on only a portion of the continuous swipe contact, and not the entire swipe contact (e.g., only the portion of the swipe contact at the end location). In some embodiments, a smoothing algorithm is applied to the intensities of the swipe contact prior to determining the characteristic intensity of the contact. For example, the smoothing algorithm optionally includes one or more of: an unweighted sliding-average smoothing algorithm, a triangular smoothing algorithm, a median filter smoothing algorithm, and/or an exponential smoothing algorithm. In some circumstances, these smoothing algorithms eliminate narrow spikes or dips in the intensities of the swipe contact for purposes of determining a characteristic intensity.

[0147] The intensity of a contact on the touch-sensitive surface is characterized relative to one or more intensity thresholds, such as a contact-detection intensity threshold, a light press intensity threshold, a deep press intensity threshold, and/or one or more other intensity thresholds. In some embodiments, the light press intensity threshold corresponds to an intensity at which the device will perform operations typically associated with clicking a button of a physical mouse or a trackpad. In some embodiments, the deep press intensity threshold corresponds to an intensity at which the device will perform operations that are different from operations typically associated with clicking a button of a physical mouse or a trackpad. In some embodiments, when a contact is detected with a characteristic intensity below the light press intensity threshold (e.g., and above a nominal contact-detection intensity threshold below which the contact is no longer detected), the device will move a focus selector in accordance with movement of the contact on the touch-sensitive surface without performing an operation associated with the light press intensity threshold or the deep press intensity threshold. Generally, unless otherwise stated, these intensity thresholds are consistent between different sets of user interface figures.

[0148] An increase of characteristic intensity of the contact from an intensity below the light press intensity threshold to an intensity between the light press intensity threshold and the deep press intensity threshold is sometimes referred to as a “light press” input. An increase of characteristic intensity of the contact from an intensity below the deep press intensity threshold to an intensity above the deep press intensity threshold is sometimes referred to as a “deep press” input. An increase of characteristic intensity of the contact from an intensity below the contact-detection intensity threshold to an intensity between the contact-detection intensity threshold and the light press intensity threshold is sometimes

referred to as detecting the contact on the touch-surface. A decrease of characteristic intensity of the contact from an intensity above the contact-detection intensity threshold to an intensity below the contact-detection intensity threshold is sometimes referred to as detecting liftoff of the contact from the touch-surface. In some embodiments, the contact-detection intensity threshold is zero. In some embodiments, the contact-detection intensity threshold is greater than zero.

[0149] In some embodiments described herein, one or more operations are performed in response to detecting a gesture that includes a respective press input or in response to detecting the respective press input performed with a respective contact (or a plurality of contacts), where the respective press input is detected based at least in part on detecting an increase in intensity of the contact (or plurality of contacts) above a press-input intensity threshold. In some embodiments, the respective operation is performed in response to detecting the increase in intensity of the respective contact above the press-input intensity threshold (e.g., a “down stroke” of the respective press input). In some embodiments, the press input includes an increase in intensity of the respective contact above the press-input intensity threshold and a subsequent decrease in intensity of the contact below the press-input intensity threshold, and the respective operation is performed in response to detecting the subsequent decrease in intensity of the respective contact below the press-input threshold (e.g., an “up stroke” of the respective press input).

[0150] In some embodiments, the device employs intensity hysteresis to avoid accidental inputs sometimes termed “jitter,” where the device defines or selects a hysteresis intensity threshold with a predefined relationship to the press-input intensity threshold (e.g., the hysteresis intensity threshold is X intensity units lower than the press-input intensity threshold or the hysteresis intensity threshold is 75%, 90%, or some reasonable proportion of the press-input intensity threshold). Thus, in some embodiments, the press input includes an increase in intensity of the respective contact above the press-input intensity threshold and a subsequent decrease in intensity of the contact below the hysteresis intensity threshold that corresponds to the press-input intensity threshold, and the respective operation is performed in response to detecting the subsequent decrease in intensity of the respective contact below the hysteresis intensity threshold (e.g., an “up stroke” of the respective press input). Similarly, in some embodiments, the press input is detected only when the device detects an increase in intensity of the contact from an intensity at or below the hysteresis intensity threshold to an intensity at or above the press-input intensity threshold and, optionally, a

subsequent decrease in intensity of the contact to an intensity at or below the hysteresis intensity, and the respective operation is performed in response to detecting the press input (e.g., the increase in intensity of the contact or the decrease in intensity of the contact, depending on the circumstances).

[0151] For ease of explanation, the descriptions of operations performed in response to a press input associated with a press-input intensity threshold or in response to a gesture including the press input are, optionally, triggered in response to detecting either: an increase in intensity of a contact above the press-input intensity threshold, an increase in intensity of a contact from an intensity below the hysteresis intensity threshold to an intensity above the press-input intensity threshold, a decrease in intensity of the contact below the press-input intensity threshold, and/or a decrease in intensity of the contact below the hysteresis intensity threshold corresponding to the press-input intensity threshold. Additionally, in examples where an operation is described as being performed in response to detecting a decrease in intensity of a contact below the press-input intensity threshold, the operation is, optionally, performed in response to detecting a decrease in intensity of the contact below a hysteresis intensity threshold corresponding to, and lower than, the press-input intensity threshold.

3. Digital Assistant System

[0152] FIG. 7A illustrates a block diagram of digital assistant system 700 in accordance with various examples. In some examples, digital assistant system 700 is implemented on a standalone computer system. In some examples, digital assistant system 700 is distributed across multiple computers. In some examples, some of the modules and functions of the digital assistant are divided into a server portion and a client portion, where the client portion resides on one or more user devices (e.g., devices 104, 122, 200, 400, or 600) and communicates with the server portion (e.g., server system 108) through one or more networks, e.g., as shown in FIG. 1. In some examples, digital assistant system 700 is an implementation of server system 108 (and/or DA server 106) shown in FIG. 1. It should be noted that digital assistant system 700 is only one example of a digital assistant system, and that digital assistant system 700 can have more or fewer components than shown, can combine two or more components, or can have a different configuration or arrangement of the components. The various components shown in FIG. 7A are implemented in hardware, software instructions for execution by one or more processors, firmware, including one or

more signal processing and/or application specific integrated circuits, or a combination thereof.

[0153] Digital assistant system 700 includes memory 702, one or more processors 704, input/output (I/O) interface 706, and network communications interface 708. These components can communicate with one another over one or more communication buses or signal lines 710.

[0154] In some examples, memory 702 includes a non-transitory computer-readable medium, such as high-speed random access memory and/or a non-volatile computer-readable storage medium (e.g., one or more magnetic disk storage devices, flash memory devices, or other non-volatile solid-state memory devices).

[0155] In some examples, I/O interface 706 couples input/output devices 716 of digital assistant system 700, such as displays, keyboards, touch screens, and microphones, to user interface module 722. I/O interface 706, in conjunction with user interface module 722, receives user inputs (e.g., voice input, keyboard inputs, touch inputs, etc.) and processes them accordingly. In some examples, e.g., when the digital assistant is implemented on a standalone user device, digital assistant system 700 includes any of the components and I/O communication interfaces described with respect to devices 200, 400, or 600 in FIGS. 2A, 4, 6A-6B, respectively. In some examples, digital assistant system 700 represents the server portion of a digital assistant implementation, and can interact with the user through a client-side portion residing on a user device (e.g., devices 104, 200, 400, or 600).

[0156] In some examples, the network communications interface 708 includes wired communication port(s) 712 and/or wireless transmission and reception circuitry 714. The wired communication port(s) receives and send communication signals via one or more wired interfaces, e.g., Ethernet, Universal Serial Bus (USB), FIREWIRE, etc. The wireless circuitry 714 receives and sends RF signals and/or optical signals from/to communications networks and other communications devices. The wireless communications use any of a plurality of communications standards, protocols, and technologies, such as GSM, EDGE, CDMA, TDMA, Bluetooth, Wi-Fi, VoIP, Wi-MAX, or any other suitable communication protocol. Network communications interface 708 enables communication between digital assistant system 700 with networks, such as the Internet, an intranet, and/or a wireless network, such as a cellular telephone network, a wireless local area network (LAN), and/or a metropolitan area network (MAN), and other devices.

[0157] In some examples, memory 702, or the computer-readable storage media of memory 702, stores programs, modules, instructions, and data structures including all or a subset of: operating system 718, communications module 720, user interface module 722, one or more applications 724, and digital assistant module 726. In particular, memory 702, or the computer-readable storage media of memory 702, stores instructions for performing the processes described below. One or more processors 704 execute these programs, modules, and instructions, and reads/writes from/to the data structures.

[0158] Operating system 718 (e.g., Darwin, RTXC, LINUX, UNIX, iOS, OS X, WINDOWS, or an embedded operating system such as VxWorks) includes various software components and/or drivers for controlling and managing general system tasks (e.g., memory management, storage device control, power management, etc.) and facilitates communications between various hardware, firmware, and software components.

[0159] Communications module 720 facilitates communications between digital assistant system 700 with other devices over network communications interface 708. For example, communications module 720 communicates with RF circuitry 208 of electronic devices such as devices 200, 400, and 600 shown in FIGS. 2A, 4, 6A-6B, respectively. Communications module 720 also includes various components for handling data received by wireless circuitry 714 and/or wired communications port 712.

[0160] User interface module 722 receives commands and/or inputs from a user via I/O interface 706 (e.g., from a keyboard, touch screen, pointing device, controller, and/or microphone), and generate user interface objects on a display. User interface module 722 also prepares and delivers outputs (e.g., speech, sound, animation, text, icons, vibrations, haptic feedback, light, etc.) to the user via the I/O interface 706 (e.g., through displays, audio channels, speakers, touch-pads, etc.).

[0161] Applications 724 include programs and/or modules that are configured to be executed by one or more processors 704. For example, if the digital assistant system is implemented on a standalone user device, applications 724 include user applications, such as games, a calendar application, a navigation application, or an email application. If digital assistant system 700 is implemented on a server, applications 724 include resource management applications, diagnostic applications, or scheduling applications, for example.

[0162] Memory 702 also stores digital assistant module 726 (or the server portion of a digital assistant). In some examples, digital assistant module 726 includes the following sub-

modules, or a subset or superset thereof: input/output processing module 728, speech-to-text (STT) processing module 730, natural language processing module 732, dialogue flow processing module 734, task flow processing module 736, service processing module 738, and speech synthesis processing module 740. Each of these modules has access to one or more of the following systems or data and models of the digital assistant module 726, or a subset or superset thereof: ontology 760, vocabulary index 744, user data 748, task flow models 754, service models 756, and ASR systems 758.

[0163] In some examples, using the processing modules, data, and models implemented in digital assistant module 726, the digital assistant can perform at least some of the following: converting speech input into text; identifying a user's intent expressed in a natural language input received from the user; actively eliciting and obtaining information needed to fully infer the user's intent (e.g., by disambiguating words, phrases, intentions, etc.); determining the task flow for fulfilling the inferred intent; and executing the task flow to fulfill the inferred intent.

[0164] In some examples, as shown in FIG. 7B, I/O processing module 728 interacts with the user through I/O devices 716 in FIG. 7A or with a user device (e.g., devices 104, 200, 400, or 600) through network communications interface 708 in FIG. 7A to obtain user input (e.g., a speech input) and to provide responses (e.g., as speech outputs) to the user input. I/O processing module 728 optionally obtains contextual information associated with the user input from the user device, along with or shortly after the receipt of the user input. The contextual information includes user-specific data, vocabulary, and/or preferences relevant to the user input. In some examples, the contextual information also includes software and hardware states of the user device at the time the user request is received, and/or information related to the surrounding environment of the user at the time that the user request was received. In some examples, I/O processing module 728 also sends follow-up questions to, and receive answers from, the user regarding the user request. When a user request is received by I/O processing module 728 and the user request includes speech input, I/O processing module 728 forwards the speech input to STT processing module 730 (or speech recognizer) for speech-to-text conversions.

[0165] STT processing module 730 includes one or more ASR systems 758. The one or more ASR systems 758 can process the speech input that is received through I/O processing module 728 to produce a recognition result. Each ASR system 758 includes a front-end speech pre-processor. The front-end speech pre-processor extracts representative features

from the speech input. For example, the front-end speech pre-processor performs a Fourier transform on the speech input to extract spectral features that characterize the speech input as a sequence of representative multi-dimensional vectors. Further, each ASR system 758 includes one or more speech recognition models (e.g., acoustic models and/or language models) and implements one or more speech recognition engines. Examples of speech recognition models include Hidden Markov Models, Gaussian-Mixture Models, Deep Neural Network Models, n-gram language models, and other statistical models. Examples of speech recognition engines include the dynamic time warping based engines and weighted finite-state transducers (WFST) based engines. The one or more speech recognition models and the one or more speech recognition engines are used to process the extracted representative features of the front-end speech pre-processor to produce intermediate recognitions results (e.g., phonemes, phonemic strings, and sub-words), and ultimately, text recognition results (e.g., words, word strings, or sequence of tokens). In some examples, the speech input is processed at least partially by a third-party service or on the user's device (e.g., device 104, 200, 400, or 600) to produce the recognition result. Once STT processing module 730 produces recognition results containing a text string (e.g., words, or sequence of words, or sequence of tokens), the recognition result is passed to natural language processing module 732 for intent deduction. In some examples, STT processing module 730 produces multiple candidate text representations of the speech input. Each candidate text representation is a sequence of words or tokens corresponding to the speech input. In some examples, each candidate text representation is associated with a speech recognition confidence score. Based on the speech recognition confidence scores, STT processing module 730 ranks the candidate text representations and provides the n-best (e.g., n highest ranked) candidate text representation(s) to natural language processing module 732 for intent deduction, where n is a predetermined integer greater than zero. For example, in one example, only the highest ranked (n=1) candidate text representation is passed to natural language processing module 732 for intent deduction. In another example, the five highest ranked (n=5) candidate text representations are passed to natural language processing module 732 for intent deduction.

[0166] More details on the speech-to-text processing are described in U.S. Utility Application Serial No. 13/236,942 for "Consolidating Speech Recognition Results," filed on September 20, 2011, the entire disclosure of which is incorporated herein by reference.

[0167] In some examples, STT processing module 730 includes and/or accesses a vocabulary of recognizable words via phonetic alphabet conversion module 731. Each

vocabulary word is associated with one or more candidate pronunciations of the word represented in a speech recognition phonetic alphabet. In particular, the vocabulary of recognizable words includes a word that is associated with a plurality of candidate pronunciations. For example, the vocabulary includes the word “tomato” that is associated with the candidate pronunciations of /tə'meɪrou/ and /tə'matou/. Further, vocabulary words are associated with custom candidate pronunciations that are based on previous speech inputs from the user. Such custom candidate pronunciations are stored in STT processing module 730 and are associated with a particular user via the user's profile on the device. In some examples, the candidate pronunciations for words are determined based on the spelling of the word and one or more linguistic and/or phonetic rules. In some examples, the candidate pronunciations are manually generated, e.g., based on known canonical pronunciations.

[0168] In some examples, the candidate pronunciations are ranked based on the commonness of the candidate pronunciation. For example, the candidate pronunciation /tə'meɪrou/ is ranked higher than /tə'matou/, because the former is a more commonly used pronunciation (e.g., among all users, for users in a particular geographical region, or for any other appropriate subset of users). In some examples, candidate pronunciations are ranked based on whether the candidate pronunciation is a custom candidate pronunciation associated with the user. For example, custom candidate pronunciations are ranked higher than canonical candidate pronunciations. This can be useful for recognizing proper nouns having a unique pronunciation that deviates from canonical pronunciation. In some examples, candidate pronunciations are associated with one or more speech characteristics, such as geographic origin, nationality, or ethnicity. For example, the candidate pronunciation /tə'meɪrou/ is associated with the United States, whereas the candidate pronunciation /tə'matou/ is associated with Great Britain. Further, the rank of the candidate pronunciation is based on one or more characteristics (e.g., geographic origin, nationality, ethnicity, etc.) of the user stored in the user's profile on the device. For example, it can be determined from the user's profile that the user is associated with the United States. Based on the user being associated with the United States, the candidate pronunciation /tə'meɪrou/ (associated with the United States) is ranked higher than the candidate pronunciation /tə'matou/ (associated with Great Britain). In some examples, one of the ranked candidate pronunciations is selected as a predicted pronunciation (e.g., the most likely pronunciation).

[0169] When a speech input is received, STT processing module 730 is used to determine the phonemes corresponding to the speech input (e.g., using an acoustic model), and then

attempt to determine words that match the phonemes (e.g., using a language model). For example, if STT processing module 730 first identifies the sequence of phonemes /tə'meɪrou/ corresponding to a portion of the speech input, it can then determine, based on vocabulary index 744, that this sequence corresponds to the word “tomato.”

[0170] In some examples, STT processing module 730 uses approximate matching techniques to determine words in an utterance. Thus, for example, the STT processing module 730 determines that the sequence of phonemes /tə'meɪrou/ corresponds to the word “tomato,” even if that particular sequence of phonemes is not one of the candidate sequence of phonemes for that word.

[0171] Natural language processing module 732 (“natural language processor”) of the digital assistant takes the n-best candidate text representation(s) (“word sequence(s)” or “token sequence(s)”) generated by STT processing module 730, and attempts to associate each of the candidate text representations with one or more “actionable intents” recognized by the digital assistant. An “actionable intent” (or “user intent”) represents a task that can be performed by the digital assistant, and can have an associated task flow implemented in task flow models 754. The associated task flow is a series of programmed actions and steps that the digital assistant takes in order to perform the task. The scope of a digital assistant’s capabilities is dependent on the number and variety of task flows that have been implemented and stored in task flow models 754, or in other words, on the number and variety of “actionable intents” that the digital assistant recognizes. The effectiveness of the digital assistant, however, also depends on the assistant’s ability to infer the correct “actionable intent(s)” from the user request expressed in natural language.

[0172] In some examples, in addition to the sequence of words or tokens obtained from STT processing module 730, natural language processing module 732 also receives contextual information associated with the user request, e.g., from I/O processing module 728. The natural language processing module 732 optionally uses the contextual information to clarify, supplement, and/or further define the information contained in the candidate text representations received from STT processing module 730. The contextual information includes, for example, user preferences, hardware, and/or software states of the user device, sensor information collected before, during, or shortly after the user request, prior interactions (e.g., dialogue) between the digital assistant and the user, and the like. As described herein, contextual information is, in some examples, dynamic, and changes with time, location, content of the dialogue, and other factors.

[0173] In some examples, the natural language processing is based on, e.g., ontology 760. Ontology 760 is a hierarchical structure containing many nodes, each node representing either an “actionable intent” or a “property” relevant to one or more of the “actionable intents” or other “properties.” As noted above, an “actionable intent” represents a task that the digital assistant is capable of performing, i.e., it is “actionable” or can be acted on. A “property” represents a parameter associated with an actionable intent or a sub-aspect of another property. A linkage between an actionable intent node and a property node in ontology 760 defines how a parameter represented by the property node pertains to the task represented by the actionable intent node.

[0174] In some examples, ontology 760 is made up of actionable intent nodes and property nodes. Within ontology 760, each actionable intent node is linked to one or more property nodes either directly or through one or more intermediate property nodes. Similarly, each property node is linked to one or more actionable intent nodes either directly or through one or more intermediate property nodes. For example, as shown in FIG. 7C, ontology 760 includes a “restaurant reservation” node (i.e., an actionable intent node). Property nodes “restaurant,” “date/time” (for the reservation), and “party size” are each directly linked to the actionable intent node (i.e., the “restaurant reservation” node).

[0175] In addition, property nodes “cuisine,” “price range,” “phone number,” and “location” are sub-nodes of the property node “restaurant,” and are each linked to the “restaurant reservation” node (i.e., the actionable intent node) through the intermediate property node “restaurant.” For another example, as shown in FIG. 7C, ontology 760 also includes a “set reminder” node (i.e., another actionable intent node). Property nodes “date/time” (for setting the reminder) and “subject” (for the reminder) are each linked to the “set reminder” node. Since the property “date/time” is relevant to both the task of making a restaurant reservation and the task of setting a reminder, the property node “date/time” is linked to both the “restaurant reservation” node and the “set reminder” node in ontology 760.

[0176] An actionable intent node, along with its linked property nodes, is described as a “domain.” In the present discussion, each domain is associated with a respective actionable intent, and refers to the group of nodes (and the relationships there between) associated with the particular actionable intent. For example, ontology 760 shown in FIG. 7C includes an example of restaurant reservation domain 762 and an example of reminder domain 764 within ontology 760. The restaurant reservation domain includes the actionable intent node “restaurant reservation,” property nodes “restaurant,” “date/time,” and “party size,” and sub-

property nodes “cuisine,” “price range,” “phone number,” and “location.” Reminder domain 764 includes the actionable intent node “set reminder,” and property nodes “subject” and “date/time.” In some examples, ontology 760 is made up of many domains. Each domain shares one or more property nodes with one or more other domains. For example, the “date/time” property node is associated with many different domains (e.g., a scheduling domain, a travel reservation domain, a movie ticket domain, etc.), in addition to restaurant reservation domain 762 and reminder domain 764.

[0177] While FIG. 7C illustrates two example domains within ontology 760, other domains include, for example, “find a movie,” “initiate a phone call,” “find directions,” “schedule a meeting,” “send a message,” and “provide an answer to a question,” “read a list,” “providing navigation instructions,” “provide instructions for a task” and so on. A “send a message” domain is associated with a “send a message” actionable intent node, and further includes property nodes such as “recipient(s),” “message type,” and “message body.” The property node “recipient” is further defined, for example, by the sub-property nodes such as “recipient name” and “message address.”

[0178] In some examples, ontology 760 includes all the domains (and hence actionable intents) that the digital assistant is capable of understanding and acting upon. In some examples, ontology 760 is modified, such as by adding or removing entire domains or nodes, or by modifying relationships between the nodes within the ontology 760.

[0179] In some examples, nodes associated with multiple related actionable intents are clustered under a “super domain” in ontology 760. For example, a “travel” super-domain includes a cluster of property nodes and actionable intent nodes related to travel. The actionable intent nodes related to travel includes “airline reservation,” “hotel reservation,” “car rental,” “get directions,” “find points of interest,” and so on. The actionable intent nodes under the same super domain (e.g., the “travel” super domain) have many property nodes in common. For example, the actionable intent nodes for “airline reservation,” “hotel reservation,” “car rental,” “get directions,” and “find points of interest” share one or more of the property nodes “start location,” “destination,” “departure date/time,” “arrival date/time,” and “party size.”

[0180] In some examples, each node in ontology 760 is associated with a set of words and/or phrases that are relevant to the property or actionable intent represented by the node. The respective set of words and/or phrases associated with each node are the so-called

“vocabulary” associated with the node. The respective set of words and/or phrases associated with each node are stored in vocabulary index 744 in association with the property or actionable intent represented by the node. For example, returning to FIG. 7B, the vocabulary associated with the node for the property of “restaurant” includes words such as “food,” “drinks,” “cuisine,” “hungry,” “eat,” “pizza,” “fast food,” “meal,” and so on. For another example, the vocabulary associated with the node for the actionable intent of “initiate a phone call” includes words and phrases such as “call,” “phone,” “dial,” “ring,” “call this number,” “make a call to,” and so on. The vocabulary index 744 optionally includes words and phrases in different languages.

[0181] Natural language processing module 732 receives the candidate text representations (e.g., text string(s) or token sequence(s)) from STT processing module 730, and for each candidate representation, determines what nodes are implicated by the words in the candidate text representation. In some examples, if a word or phrase in the candidate text representation is found to be associated with one or more nodes in ontology 760 (via vocabulary index 744), the word or phrase “triggers” or “activates” those nodes. Based on the quantity and/or relative importance of the activated nodes, natural language processing module 732 selects one of the actionable intents as the task that the user intended the digital assistant to perform. In some examples, the domain that has the most “triggered” nodes is selected. In some examples, the domain having the highest confidence value (e.g., based on the relative importance of its various triggered nodes) is selected. In some examples, the domain is selected based on a combination of the number and the importance of the triggered nodes. In some examples, additional factors are considered in selecting the node as well, such as whether the digital assistant has previously correctly interpreted a similar request from a user.

[0182] User data 748 includes user-specific information, such as user-specific vocabulary, user preferences, user address, user’s default and secondary languages, user’s contact list, and other short-term or long-term information for each user. In some examples, natural language processing module 732 uses the user-specific information to supplement the information contained in the user input to further define the user intent. For example, for a user request “invite my friends to my birthday party,” natural language processing module 732 is able to access user data 748 to determine who the “friends” are and when and where the “birthday party” would be held, rather than requiring the user to provide such information explicitly in his/her request.

[0183] It should be recognized that in some examples, natural language processing module 732 is implemented using one or more machine learning mechanisms (e.g., neural networks). In particular, the one or more machine learning mechanisms are configured to receive a candidate text representation and contextual information associated with the candidate text representation. Based on the candidate text representation and the associated contextual information, the one or more machine learning mechanisms are configured to determine intent confidence scores over a set of candidate actionable intents. Natural language processing module 732 can select one or more candidate actionable intents from the set of candidate actionable intents based on the determined intent confidence scores. In some examples, an ontology (e.g., ontology 760) is also used to select the one or more candidate actionable intents from the set of candidate actionable intents.

[0184] Other details of searching an ontology based on a token string are described in U.S. Utility Application Serial No. 12/341,743 for “Method and Apparatus for Searching Using An Active Ontology,” filed December 22, 2008, the entire disclosure of which is incorporated herein by reference.

[0185] In some examples, once natural language processing module 732 identifies an actionable intent (or domain) based on the user request, natural language processing module 732 generates a structured query to represent the identified actionable intent. In some examples, the structured query includes parameters for one or more nodes within the domain for the actionable intent, and at least some of the parameters are populated with the specific information and requirements specified in the user request. For example, the user says “Make me a dinner reservation at a sushi place at 7.” In this case, natural language processing module 732 is able to correctly identify the actionable intent to be “restaurant reservation” based on the user input. According to the ontology, a structured query for a “restaurant reservation” domain includes parameters such as {Cuisine}, {Time}, {Date}, {Party Size}, and the like. In some examples, based on the speech input and the text derived from the speech input using STT processing module 730, natural language processing module 732 generates a partial structured query for the restaurant reservation domain, where the partial structured query includes the parameters {Cuisine = “Sushi”} and {Time = “7pm”}. However, in this example, the user’s utterance contains insufficient information to complete the structured query associated with the domain. Therefore, other necessary parameters such as {Party Size} and {Date} are not specified in the structured query based on the information currently available. In some examples, natural language processing module 732 populates

some parameters of the structured query with received contextual information. For example, in some examples, if the user requested a sushi restaurant “near me,” natural language processing module 732 populates a {location} parameter in the structured query with GPS coordinates from the user device.

[0186] In some examples, natural language processing module 732 identifies multiple candidate actionable intents for each candidate text representation received from STT processing module 730. Further, in some examples, a respective structured query (partial or complete) is generated for each identified candidate actionable intent. Natural language processing module 732 determines an intent confidence score for each candidate actionable intent and ranks the candidate actionable intents based on the intent confidence scores. In some examples, natural language processing module 732 passes the generated structured query (or queries), including any completed parameters, to task flow processing module 736 (“task flow processor”). In some examples, the structured query (or queries) for the m-best (e.g., m highest ranked) candidate actionable intents are provided to task flow processing module 736, where m is a predetermined integer greater than zero. In some examples, the structured query (or queries) for the m-best candidate actionable intents are provided to task flow processing module 736 with the corresponding candidate text representation(s).

[0187] Other details of inferring a user intent based on multiple candidate actionable intents determined from multiple candidate text representations of a speech input are described in U.S. Utility Application Serial No. 14/298,725 for “System and Method for Inferring User Intent From Speech Inputs,” filed June 6, 2014, the entire disclosure of which is incorporated herein by reference.

[0188] Task flow processing module 736 is configured to receive the structured query (or queries) from natural language processing module 732, complete the structured query, if necessary, and perform the actions required to “complete” the user’s ultimate request. In some examples, the various procedures necessary to complete these tasks are provided in task flow models 754. In some examples, task flow models 754 include procedures for obtaining additional information from the user and task flows for performing actions associated with the actionable intent.

[0189] As described above, in order to complete a structured query, task flow processing module 736 needs to initiate additional dialogue with the user in order to obtain additional information, and/or disambiguate potentially ambiguous utterances. When such interactions

are necessary, task flow processing module 736 invokes dialogue flow processing module 734 to engage in a dialogue with the user. In some examples, dialogue flow processing module 734 determines how (and/or when) to ask the user for the additional information and receives and processes the user responses. The questions are provided to and answers are received from the users through I/O processing module 728. In some examples, dialogue flow processing module 734 presents dialogue output to the user via audio and/or visual output, and receives input from the user via spoken or physical (e.g., clicking) responses. Continuing with the example above, when task flow processing module 736 invokes dialogue flow processing module 734 to determine the “party size” and “date” information for the structured query associated with the domain “restaurant reservation,” dialogue flow processing module 734 generates questions such as “For how many people?” and “On which day?” to pass to the user. Once answers are received from the user, dialogue flow processing module 734 then populates the structured query with the missing information, or pass the information to task flow processing module 736 to complete the missing information from the structured query.

[0190] Once task flow processing module 736 has completed the structured query for an actionable intent, task flow processing module 736 proceeds to perform the ultimate task associated with the actionable intent. Accordingly, task flow processing module 736 executes the steps and instructions in the task flow model according to the specific parameters contained in the structured query. For example, the task flow model for the actionable intent of “restaurant reservation” includes steps and instructions for contacting a restaurant and actually requesting a reservation for a particular party size at a particular time. For example, using a structured query such as: {restaurant reservation, restaurant = ABC Café, date = 3/12/2012, time = 7pm, party size = 5}, task flow processing module 736 performs the steps of: (1) logging onto a server of the ABC Café or a restaurant reservation system such as OPENTABLE®, (2) entering the date, time, and party size information in a form on the website, (3) submitting the form, and (4) making a calendar entry for the reservation in the user’s calendar.

[0191] In some examples, task flow processing module 736 employs the assistance of service processing module 738 (“service processing module”) to complete a task requested in the user input or to provide an informational answer requested in the user input. For example, service processing module 738 acts on behalf of task flow processing module 736 to make a phone call, set a calendar entry, invoke a map search, invoke or interact with other

user applications installed on the user device, and invoke or interact with third-party services (e.g., a restaurant reservation portal, a social networking website, a banking portal, etc.). In some examples, the protocols and application programming interfaces (API) required by each service are specified by a respective service model among service models 756. Service processing module 738 accesses the appropriate service model for a service and generates requests for the service in accordance with the protocols and APIs required by the service according to the service model.

[0192] For example, if a restaurant has enabled an online reservation service, the restaurant submits a service model specifying the necessary parameters for making a reservation and the APIs for communicating the values of the necessary parameter to the online reservation service. When requested by task flow processing module 736, service processing module 738 establishes a network connection with the online reservation service using the web address stored in the service model, and sends the necessary parameters of the reservation (e.g., time, date, party size) to the online reservation interface in a format according to the API of the online reservation service.

[0193] In some examples, natural language processing module 732, dialogue flow processing module 734, and task flow processing module 736 are used collectively and iteratively to infer and define the user's intent, obtain information to further clarify and refine the user intent, and finally generate a response (i.e., an output to the user, or the completion of a task) to fulfill the user's intent. The generated response is a dialogue response to the speech input that at least partially fulfills the user's intent. Further, in some examples, the generated response is output as a speech output. In these examples, the generated response is sent to speech synthesis processing module 740 (e.g., speech synthesizer) where it can be processed to synthesize the dialogue response in speech form. In yet other examples, the generated response is data content relevant to satisfying a user request in the speech input.

[0194] In examples where task flow processing module 736 receives multiple structured queries from natural language processing module 732, task flow processing module 736 initially processes the first structured query of the received structured queries to attempt to complete the first structured query and/or execute one or more tasks or actions represented by the first structured query. In some examples, the first structured query corresponds to the highest ranked actionable intent. In other examples, the first structured query is selected from the received structured queries based on a combination of the corresponding speech recognition confidence scores and the corresponding intent confidence scores. In some

examples, if task flow processing module 736 encounters an error during processing of the first structured query (e.g., due to an inability to determine a necessary parameter), the task flow processing module 736 can proceed to select and process a second structured query of the received structured queries that corresponds to a lower ranked actionable intent. The second structured query is selected, for example, based on the speech recognition confidence score of the corresponding candidate text representation, the intent confidence score of the corresponding candidate actionable intent, a missing necessary parameter in the first structured query, or any combination thereof.

[0195] Speech synthesis processing module 740 is configured to synthesize speech outputs for presentation to the user. Speech synthesis processing module 740 synthesizes speech outputs based on text provided by the digital assistant. For example, the generated dialogue response is in the form of a text string. Speech synthesis processing module 740 converts the text string to an audible speech output. Speech synthesis processing module 740 uses any appropriate speech synthesis technique in order to generate speech outputs from text, including, but not limited, to concatenative synthesis, unit selection synthesis, diphone synthesis, domain-specific synthesis, formant synthesis, articulatory synthesis, hidden Markov model (HMM) based synthesis, and sinewave synthesis. In some examples, speech synthesis processing module 740 is configured to synthesize individual words based on phonemic strings corresponding to the words. For example, a phonemic string is associated with a word in the generated dialogue response. The phonemic string is stored in metadata associated with the word. Speech synthesis processing module 740 is configured to directly process the phonemic string in the metadata to synthesize the word in speech form.

[0196] In some examples, instead of (or in addition to) using speech synthesis processing module 740, speech synthesis is performed on a remote device (e.g., the server system 108), and the synthesized speech is sent to the user device for output to the user. For example, this can occur in some implementations where outputs for a digital assistant are generated at a server system. And because server systems generally have more processing power or resources than a user device, it is possible to obtain higher quality speech outputs than would be practical with client-side synthesis.

[0197] Additional details on digital assistants can be found in the U.S. Utility Application No. 12/987,982, entitled “Intelligent Automated Assistant,” filed January 10, 2011, and U.S. Utility Application No. 13/251,088, entitled “Generating and Processing Task Items That

Represent Tasks to Perform,” filed September 30, 2011, the entire disclosures of which are incorporated herein by reference.

4. Navigating and Performing Device Tasks Using Search Interface

[0198] FIGS. 8A-8F, 9A-9B, and 10A-10E illustrate systems and processes for navigating and performing device tasks using a search interface, according to various examples. For example, electronic device 802 may include any device described herein, including but not limited to devices 104, 200, 400, and 600 (FIGS. 1, 2A, 4, and 6A-6B). Thus, it will be appreciated that the electronic devices associated with FIGS. 8A-8F, 9A-9B, and 10A-10E may correspond to a user device of any type, such as a phone, laptop computer, tablet, wearable device (e.g., smart watch or head-mounted display), and the like. Furthermore, the processes described herein may be performed by a server with information delivered to and from the device, performed on the device, or a combination thereof.

[0199] In general, with reference to FIG. 8A, a system for navigating and performing device tasks using a search interface is depicted. A user of device 802 may navigate to a search interface, such as search interface 804. Search interface 804 may be activated and displayed in one or more ways, such as in response to the user performing a predefined gesture. For instance, the user may perform a “swipe” gesture on a home screen of electronic device 802 (e.g., swiping down while a main menu is displayed). In some embodiments, the home screen may be displayed and a predetermined time may pass while no interaction with the device occurs (e.g., several seconds passes with no touch or speech inputs received). In response, a search field may be displayed at a predetermined location, such that the user may activate the search field (e.g., via a tap on the search field) to activate search interface 804.

[0200] Search interface 804 may include a search field 806 used for a broad set of search functions, such as searches for device functions, device information, internet searches, and the like. For instance, the user may enter one or more characters into search field 806, such as “c.” Characters may be entered using a displayed virtual keyboard and/or using speech based on speech-to-text (STT) processing. Based on the entry, corresponding information may be populated into the search interface, such as various results 808 such as applications matching the search entry, including “Camera,” “Calendar,” “Calculator,” and “Café.” Various results 810 may also be displayed, including device tasks or other information matching the search entry. For instance, an affordance labeled “Reorder Café” is displayed, which corresponds to a task to initiate an online order with a local business. Results 810 may

also include an affordance labeled “John Carter” corresponding to a stored contact identifier, an affordance “Camera Settings” corresponding to a menu for adjusting or viewing settings for device image sensors, and an affordance labeled “c,” which may correspond to a function to search for text that is currently entered in search field 806.

[0201] With reference to FIG. 8B, the items included within results 808 and results 810 may correspond to tasks, applications, and other information associated with a respective confidence value exceeding a threshold confidence value. For example, the user may continue to enter text in search field 806, including the characters “caf.” Based on the text entry “caf,” a result 812 may be displayed, including an application “Café” and affordances for one or more associated tasks, such as “Reorder Café Deluxe Burger” and “Show Scan & Pay.” In particular, the application “Café” may be associated with a confidence value (e.g., 90%), which may exceed a threshold confidence value (e.g., 80%). The confidence value may be based on variety of factors, such as an interaction frequency with a specific task or application, and specifically an interaction frequency based on a current time and/or a current device location. For instance, the user may typically interact with the “Café” application in the morning on weekdays when at a specific location near a business associated with the “Café” application (e.g., a franchise associated with the “Café” application). Similarly, the user may have previously initiated a specific order using the café application, such as ordering a “Deluxe Burger” item. Accordingly, the task for initiating the order for the “Deluxe Burger” item may be displayed as a selectable affordance within result 812. The user may also utilize near-field communication (NFC) payments while visiting the physical location of the café, such that a task for “Show Scan & Pay” is shown, as a selectable affordance to initiate an NFC payment task, within result 812. In some embodiments, the NFC payment task may be utilized less frequently than the “Deluxe Burger” reorder task, such that the NFC payment task is associated with a lower confidence level than the reorder task. Accordingly, based on the lower confidence level, the NFC payment task may be displayed below the reorder task.

[0202] In some embodiments, instead of or in addition to the confidence level exceeding the threshold, the items included within results 808 and results 810 may correspond to tasks, applications, and other information that is associated with a highest confidence value among other corresponding tasks, applications, and other information. The displayed information may be arranged in a specific order, such as descending based on confidence level. For example, the user may frequently utilize the café application at the current time and at the

current device location. The user may also generally interact with a specific contact stored on the electronic device, such as “Julie Cafferty,” although may not interact with this specific contact frequently at the current time and at the current location. Accordingly, the confidence level associated with the result corresponding to the stored contact “Julie Cafferty,” may exceed the threshold confidence value, but the confidence level may be lower than the confidence value associated with the café application and associated tasks displayed in the top result 812. Accordingly, the search results 810 may include a contact identifier for “Julie Cafferty” as a selectable affordance. The user may select the contact identifier to perform a plurality of tasks such as initiating a call, composing a message, and the like.

[0203] Referring to FIG. 8C, a user may activate a displayed task, application, or other affordance provided in the search results. In some cases, additional interfaces may be displayed to gather additional information from the user, indicate task progress, and generally inform the user of information corresponding to the initiated task. For instance, the user may activate the affordance for “Reorder Café Deluxe Burger” depicted in FIG. 8B. A confirmation interface 814 may then be displayed (depicted in FIG. 8C) providing details regarding the initiated task, such as delivery address, order details, price information, and user specific details (e.g., name, phone number, payment information, etc.). In some embodiments, the confirmation interface may include one or more selectable affordances for canceling and/or confirming the task. As an example, the user may first activate an initial affordance (e.g., by activating the affordance for “Reorder Café Deluxe Burger” depicted on FIG. 8B), and after activating the affordance, the user may activate and confirm the task by selecting a confirmation affordance, such as affordance 816. Prior to the task being activated, other tasks may be performed such as the user entering additional information to complete the task (e.g., adding additional items to an order, adding or modifying a delivery address, updating or adding payment information, and the like).

[0204] In general, updates regarding the activated task may be provided to the user using one or more additional interfaces, indicators, and the like. For example, the search results provided to the user (e.g., as depicted in FIGS 8A-8B) may correspond to various predetermined task types. A predetermined task type may generally correspond to tasks involving varying degrees of interaction and follow-up with a user. For instance, a first predetermined task type may correspond to a task that involves periodic or frequent updates to the user, as well as required inputs from the user at specific points of task progress (e.g., a task for a delivery employee to complete a delivery order). A second predetermined task type

may correspond to a task which involves providing the user with periodic updates regarding task status (e.g., a request to route to a specific location in a maps application). A third predetermined task type may correspond to a task that can be performed immediately or within a short period of time (e.g., 100ms, 500ms, one second, etc.) such that little or no feedback is required to be provided to the user (e.g., turning on a silent mode on the device). In particular, as explained in more details with respect to FIGS. 10A-10E, the first task may include displaying one or more switches, slider bars, radial buttons, or other interface elements in order to modify one or more parameters associated with the electronic device (e.g., device operating modes, device volume, device brightness, device communication modes (e.g., turning WiFi, cellular, or Bluetooth on/off), etc.).

[0205] Referring to FIG. 8D, in general, one or more respective interfaces may be displayed in response to receiving a user input corresponding to activation of a task. In general, to the extent the user activates an application displayed within the initial search results (e.g., a “Café” application as depicted in FIG. 8B), the application may be displayed which replaces the search interface. In some embodiments, in response to receiving a user input corresponding to activation of a task, a determination is made whether an activated task corresponds to a predetermined task type. In accordance with a determination that the activated task corresponds to a predetermined task type that involves providing the user with periodic updates regarding task status and/or inputs required from the user at specific points of task progress, performance of the task is initiated and a respective interface corresponding to the task is displayed, such as interface 818. In general, interface 818 may include one or more indicators for providing status updates to the user regarding the activated task, such as a name (e.g., delivery driver name), timing information (e.g., estimated time of arrival for an order), and/or one or more icons (e.g., an icon corresponding to the application associated with the task). Interface 818 may also include one or more affordances to allow a user to provide additional input for a task or view additional information regarding the task. For instance, interface 818 may include an option to initiate a call (e.g., a call to a delivery service) or compose a message (e.g., a message to a customer service representative). Once the task has been activated and prior to the task being completed, updated information associated with the task may be received (e.g., from a remote source such as a server) and provided in the respective interface, or in a new interface.

[0206] In some embodiments, a device type corresponding to the electronic device is determined, which may influence how the respective interfaces are displayed. A first device

type may correspond to a device including one or more sensors located at a specific portion near a device display (e.g., a top portion or a bottom portion). For instance, once a user activates a task, in accordance with a determination that the device type corresponds to the first device type, the respective interface is displayed below a plurality of device status indicators and below the device sensors. Specifically, the respective interface may be displayed as shown in FIG. 8D, with interface 818 being displayed below various status indicators for time, signal strength, and battery level.

[0207] With reference to FIG. 8E, a second device type may correspond to a device with the ability to display content around one or more sensors included at the specific portion on the display. In general, such devices may include one or more sensors within or around the specific portion of the display (e.g., the top of the display), such that various interface objects can be displayed around the sensors (e.g., below the sensors, above the sensors, to the left or right of the sensors, etc.). As a result, various portions of the display may be openings which house the sensors. The openings and/or corresponding sensors may be circularly shaped, such as in the shape of circles, ovals, ovals with parallel sides (a two-dimensional “capsule”), and the like. Such openings and corresponding sensors may be located at specific regions of the display (not depicted), such as to the left or right of interface 820, or within interface 820 (e.g., in the middle of interface 820).

[0208] In accordance with a determination that the device type corresponds to the second device type, the respective interface may be displayed as aligned with the plurality of device status indicators. For example, the respective interface may be displayed as shown in FIG. 8E, with interface 820 being displayed as aligned with the various status indicators for time, signal strength, and battery level. In general, interface 820 may be relatively smaller than interface 818 (as displayed in FIG. 8D), and may include a smaller number of parameters than displayed in interface 818. For instance, interface 820 may display an abbreviation for the corresponding task or application (e.g., “C”) and may display a parameter for an estimated time of arrival. In some embodiments, interface 820 may include a symbol, icon, or other representation corresponding to a particular application being used to execute the respective task.

[0209] With reference to FIG. 8F, in general, the user may interact with the respective interface in order to change the size and/or location of the respective interface on the display. For instance, the user may tap on or otherwise select the respective interface (e.g., interface 818 as depicted in FIG. 8D, or interface 820 as depicted in FIG. 8F). In response, the size of

the respective interface may be increased by displaying an expansion of the respective interface towards a center of the display. Specifically, once expanded, interface 822 may be displayed showing various information corresponding to the initiated task. For instance, interface 822 may display additional information including a map (e.g., showing a delivery status) and task details (e.g., details regarding an in-progress order). Each respective interface may periodically and continually provide updates to the user as information is received (e.g., from a remote source such as a server). For example, the map displayed via interface 822 may be periodically updated as a location of the delivery changes.

[0210] Generally, the confidence values associated with the various device tasks and applications may be influenced based on usage frequency of the respective tasks and applications. In particular, the confidence level for a respective application or task may increase proportionately with the frequency level with which a user interacts with a given application or task. The proportionate increase may apply when the usage occurs at a specific location, such that the confidence level only increases (or increases a greater amount) if the device is located in the location with which the usage typically occurs. Similarly, the proportionate increase may apply when the usage occurs within a specific time range, such that the confidence level only increases (or increases a greater amount) if the current time is within the current time range. In some embodiments, the proportionate increase occurs regardless of the device location and/or regardless of the current time.

[0211] For example, with reference to FIG. 9A, the user of device 902 may type “Ru” into the search field 904 displayed on search interface. A first search result of the search may correspond to an interface with an application labeled “Run” displayed adjacent to a first task to initiate an outdoor run and a second task to open a profile associated with the “Run” application. The user may activate the “Outdoor Run” task, which causes the “Run” application to initiate a task for recording information for an outdoor running activity (e.g., initiate a run log including time, distance, elevation, route, etc.). With reference to FIG. 9B, a respective interface 906 corresponding to the “Outdoor Run” task may be displayed to inform the user that the task has begun. In this example, the user may typically utilize the “Outdoor Run” task while at a specific location, such as a specific park. The user may also typically utilize the “Outdoor Run” task at a specific time of day, such as between the hours of 6AM-8AM. Accordingly, if the user searches for terms having a relation to the running application or task (e.g., “r,” “run,” “workout,” etc.), the confidence level used for determining whether to display the running application or task within the search results may be increased if the

device is location near the specific park and/or if the current time is near or within 6AM-8AM.

[0212] With reference to FIG. 10A, device 1002 may display search interface 1004. The user may enter a search including one or more characters into search field 1006, such as “Low Power M.” Based on the search, search results are provided including one or more affordances each having respective user interface elements. In particular, based on the search query, a function for “Low Power Mode” (e.g., a mode in which the device turns off functions or otherwise reduces resource usage of various functions) may be determined as having a high confidence exceeding a threshold confidence value. Accordingly, an affordance 1008 corresponding to “Low Power Mode” is displayed, along with a user interface element 1010 corresponding to a “switch.” In some embodiments, the user interface element is displayed consistent with the current state of the corresponding settings. For example, the mode corresponding to “Low Power Mode” may currently be in an “off” state, such that switch 1010 is displayed in the “off” state. User interface element 1010 may be used in order to modify one or more parameters corresponding to the respective setting, such as enabling or disabling the corresponding function “Low Power Mode.”

[0213] Generally, actions associated with device settings, or settings for secondary devices, may correspond to tasks having a third predetermined task type. Specifically, these tasks may be capable of being performed immediately or within a short period of time (e.g., 100ms, 500ms, one second, etc.) such that little or no feedback is required to be provided to the user (e.g., turning the device to silent mode). For instance, the user may activate switch 1010 in order to enable “Low Power Mode,” and in accordance with a determination that enabling “Low Power Mode” does not correspond to a specific predetermined task type (e.g., a first or second predetermined task type), the task of enabling “Low Power Mode” is performed without displaying a respective interface (such as interface 818 or interface 820 of FIGS 8D-8E). In this example, in response to the user activating switch 1010, switch 1010 may change appearance to indicate that the “Low Power Mode” function is now in the “on” state. Search interface 1004 may also remain displayed in response to the user activating switch 1010. In some embodiments, additional feedback may be provided to the user, such as haptic feedback or audible feedback (e.g., speech from a digital assistant such as “Low Power Mode is on.”).

[0214] With reference to FIG. 10B, multiple device settings corresponding to multiple user interface elements may be displayed in response to a user search in search field 1006.

For instance, the user may search for “Set,” with an application for “Settings” being determined as a top search result based on a high confidence value. In addition, tasks for enabling or disabling the device WiFi and enabling or disabling the device cellular connection may be determined as top search results based on high confidence values. For instance, the user may frequently use these functions at the current location regardless of a current time. Accordingly, an affordance 1020 corresponding to “Settings” may be displayed, corresponding to a device “Settings” application, including user interface elements having a switch control 1014 for the device WiFi setting and including a switch control 1016 corresponding to the device cellular setting. In response to a user selection of switch control 1014, one or more parameters associated with the device WiFi setting may be adjusted, such that the state of the WiFi communication mode is changed from “off” to “on” or from “on” to “off.” Similarly, in response to a user selection of switch control 1016, one or more parameters associated with the device cellular setting may be adjusted, such that the state of the cellular communication mode is changed from “off” to “on” or from “on” to “off.”

[0215] With reference to FIG. 10C, the user may search for “vol,” with a task for “volume” being determined as a top search result based on a high confidence value. As a result, an application 1018 to generally modify device settings such as volume may be displayed to the user. Similarly, a first task corresponding to a task for adjusting phone volume may be displayed above a second task for adjusting a smart television volume. The first task may include a user interface element 1020 corresponding to a slider bar for adjusting an output volume of the electronic device, which may correspond to a smart phone. In response to a user activation of interface element 1020, such as the user moving the slider bar from a first position to a second position, a volume parameter may be adjusted (e.g., the volume may be adjusted from a low level to a high level). Similarly, the second task may include a user interface element 1022 corresponding to a slider bar for adjusting an output volume of a secondary device, such as a smart television. In particular, the electronic device may be communicatively coupled to the secondary device via one or more wireless (or wired) connections. Accordingly, in response to a user activation of interface element 1022, such as the user moving the slider bar from a first position to a second position, electronic device may cause a volume parameter of the secondary device to be adjusted (e.g., electronic device may send a command to the smart television to adjust the volume from a low level to a high level).

[0216] Other parameters may also be adjusted using the slider bar, such as parameters for device brightness, haptic sensitivity, media playback speed, media playback position, and the like. Parameters at other secondary devices may also be adjusted, such as a home speaker, wired or wireless headphones or earbuds, home automation devices (e.g., lights, locks, thermostats, appliances, and the like). For example, movement of the slider bar from a first position to a second position may cause a smart thermostat device to adjust a temperature setting from a first temperature to a second temperature. In some embodiments, the user may select application 1018 associated with the first and second task. Selection of application 1018 may open the application associated with the first and second task (e.g., a settings application, a volume control application, a thermostat control application, and the like).

[0217] With reference to FIG. 10D, the user may search for “Bluetooth,” with a task for “Bluetooth” being determined as a top search result based on a high confidence value. As a result, an application 1024 to generally modify Bluetooth wireless communication settings may be displayed to the user. Application 1024 may be displayed within an interface 1026, wherein interface 1026 includes a plurality of radial buttons corresponding to various tasks related to Bluetooth wireless communications settings. In particular, the first task may include a first user interface element corresponding to a first radial button for wirelessly connecting (e.g., via 802.11 or similar wireless standard) to a first device, such as a home speaker. The second task may include a second user interface element corresponding to a second radial button for wirelessly connecting to a second device, such as in-ear headphones or “earbuds.” The third task may include a third user interface element corresponding to a third radial button for wirelessly connecting to a third device, such as headphones. In some embodiments, only one radial button of the plurality of radial buttons can be selected at a time. In response to a user activation of a respective user interface element, such as the user selecting the first radial button, the device may initiate a wireless connection with the respective device associated with the radial button. Other functions may be achieved using radial button, such as connecting to various wireless networks, setting predefined volume or brightness levels, applying notification settings, user statuses, and the like. The radial buttons may also adjust settings at one or more secondary devices, such as adjusting lock modes, silence modes, and home automation settings.

[0218] With reference to FIG. 10E, in some embodiments, a textual description of the state of a setting may be displayed instead of a switch. In particular, the user may enter a full or partial search into search field 1006, such as “Wif.” Based on the search, a top search

result 1028 labeled “Turn on WiFi” may be identified. Specifically, search result 1028 may correspond to a function to enable a WiFi setting on the device. The state of the corresponding device setting may also be obtained and conveyed to the user within the search result. For instance, the label within result 1028 may explicitly or implicitly indicate the state of the setting. The label “Turn on WiFi” may indicate to the user that the WiFi setting is currently off, although the user can enable the WiFi setting by activating result 1028 (e.g., tapping on result 1028). As another example, if the WiFi setting is currently enabled and the user enters the same search “Wif,” the top result may include label “Turn off WiFi,” such that the user can disable the WiFi setting by activating the top result. Various other settings may be searched and enabled/disabled in the same or similar manner, such as settings for wireless connections (e.g., cellular, Bluetooth, etc.), low power modes, do not disturb settings (e.g., silence mode, haptic-only mode, etc.), user statuses, alarms, reminders, notifications, message settings, and the like.

[0219] FIGS. 11A-11B illustrate process 1100 for continuous dialog with a digital assistant according to various examples. Process 1100 is performed, for example, using one or more electronic devices implementing a digital assistant. In some examples, process 1100 is performed using a client-server system (e.g., system 100), and the blocks of process 1100 are divided up in any manner between the server (e.g., DA server 106) and a client device. In other examples, the blocks of process 1100 are divided up between the server and multiple client devices (e.g., a mobile phone and a smart watch). Thus, while portions of process 1100 are described herein as being performed by particular devices of a client-server system, it will be appreciated that process 1100 is not so limited. In other examples, process 1100 is performed using only a client device (e.g., user device 104) or only multiple client devices. In process 1100, some blocks are, optionally, combined, the order of some blocks is, optionally, changed, and some blocks are, optionally, omitted. In some examples, additional steps may be performed in combination with the process 1100.

[0220] With reference to FIG. 11A, at block 1102, a first user input including at least one character is received. At block 1104, based on the first user input, a first task among a plurality of tasks is displayed (e.g., 812), wherein the first task is associated with a confidence value exceeding a threshold confidence value. In some embodiments, in response to receiving the first user input, an application identified from the plurality of applications (e.g., 808) is displayed based on the first user input. In some embodiments, the identified application is associated with a confidence value exceeding a threshold confidence value, and

the first task is associated with the identified application. In some embodiments, the identified application is displayed adjacent to the first task. In some embodiments, in response to receiving the first user input, a second task among the plurality of tasks is displayed. In some embodiments, the second task (e.g., 810) is associated with a second confidence value which is lower than the first confidence value, wherein the second task is associated with the identified application. In some embodiments, the first task is identified based on at least one of a time of day, a location of the electronic device, and a device interaction history.

[0221] By identifying tasks based on time, location, and/or device interaction history, the system enhances device functionality by providing custom tasks to a user that are highly relevant to a given scenario. Providing relevant tasks for a user makes the device more efficient by decreasing the need for the user to continue to navigate the device for a desired task. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0222] At block 1106, a second user input corresponding to an activation of the first task is received. In some embodiments, prior to receiving the second user input corresponding to the activation of the first task, a confirmation interface (e.g., 814) including additional information corresponding to the first task is displayed, wherein the confirmation interface includes a selectable affordance. In some embodiments, a user selection of the selectable affordance is received as the second user input. In some embodiments, a switch is displayed (e.g., 1010) as the first task among the plurality of tasks. In some embodiments, a user selection of the switch is received as the second user input, and in response to the user selection of the switch, at least one parameter corresponding to the electronic device is modified.

[0223] By providing confirmation interfaces for a respective task, the system enhances device functionality by providing feedback indicating task specifics to the user, and providing the user with an opportunity to continue with task performance. Providing feedback to the user makes the device more efficient by reducing the chances that an incorrect task will be initiated by the device. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0224] With reference to FIG. 11B, at block 1108, a determination is made whether the activated task corresponds to a predetermined task type. In some embodiments, in

accordance with a determination that the first task among the plurality of tasks corresponds to displaying a switch, determination is made that the activated task does not correspond to the predetermined task type. At block 1110, in accordance with a determination that the activated task corresponds to a predetermined task type, performance of the activated task is initiated. In some embodiments, in response to receiving a fifth user input corresponding to the activation of one of the first task or a displayed application associated with the first task, a first confidence value associated with the first task is increased, and a second confidence value associated with the displayed application is increased. In some embodiments, updated information associated with a respective task among the plurality of tasks is received from a remote source, and in response to receiving the updated information associated with the respective task, a confidence value associated with the respective task is increased.

[0225] By selectively displaying the task interface based on a task type, the system enhances device functionality by ensuring that tasks are efficiently performed without providing unnecessary information. Performing certain device functions without follow-up interfaces makes the device more efficient by allowing the user to continue using the device without unnecessary interruptions. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0226] At block 1112, a respective interface (e.g., 818, 820, 822, and/or 906) corresponding to the initiated task is displayed. In some embodiments, a search interface (e.g., 804) is displayed while receiving the first user input. In some embodiments, the respective interface (e.g., 818, 820, 822, and/or 906) corresponding to the initiated task corresponds to an application interface which replaces the search interface (e.g., 804) as the displayed interface in response to receiving the second user input. In some embodiments, a third input including one of a contact motion in a first direction or a tap on a search field is received, wherein the search field is displayed after a predetermined amount of time while a home screen is displayed without any user interaction. In some embodiments, in response to receiving the third user input, the search interface is displayed. In some embodiments, a device type corresponding to the electronic device is determined. In some embodiments, in accordance with a determination that the device type corresponds to a first device type, the respective interface (e.g., 818, 820, 822, and/or 906) is displayed below a plurality of device status indicators. In some embodiments, in accordance with a determination that the device type corresponds to a second device type, the respective interface (e.g., 818, 820, 822, and/or 906) is displayed as aligned with the plurality of device status indicators, wherein the

plurality of device status indicators include at least one of a current time, a signal strength, and a battery level. In some embodiments, in accordance with a determination that the device type corresponds to a first device type, the respective interface (e.g., 818, 820, 822, and/or 906) is displayed as having a first size. In some embodiments, in accordance with a determination that the device type corresponds to a second device type, the respective interface (e.g., 818, 820, 822, and/or 906) is displayed as having a second size smaller than the first size.

[0227] By displaying the task interface at a specific location based on a device type the system enhances device functionality by optimizing the feedback layout for each respective device. Optimizing feedback layout makes the device more efficient by allowing the user to view updates regarding task status while also maintaining display of additional content that may be of interest to the user, thus enhancing device operability. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0228] At block 1114, in accordance with a determination that the activated task does not correspond to the predetermined task type, the system causes the activated task to be performed without displaying the respective interface (e.g., 818, 820, 822, and/or 906). In some embodiments, a search interface is displayed while receiving the first user input including at least one character. In some embodiments, an affordance corresponding to a setting of the electronic device (e.g., 1008, 1012, 1018, and/or 1024) is displayed as the first task among the plurality of tasks, wherein receiving a second user input corresponding to activation of the first task includes a user interaction with the affordance. In some embodiments, display of the search interface (e.g., 804) is maintained in response to the user interaction with the affordance. In some embodiments, a fourth user input on the respective interface (e.g., 818, 820, 822, and/or 906) corresponding to the initiated task is received, and in response to receiving the fourth user input, a size of the respective interface is increased by displaying an expansion of the respective interface towards a center of a display of the electronic device. In some embodiments, prior to receiving the fourth user input on the respective interface (e.g., 818, 820, 822, and/or 906) corresponding to the initiated task, at least a first number of parameters corresponding to the initiated task within the respective interface are displayed. In some embodiments, after displaying an expansion of the respective interface towards a center of a display of the electronic device, a second number of parameters corresponding to the initiated task are displayed within the respective interface

(e.g., 822), wherein the second number is greater than the first number. In some embodiments, updated information corresponding to progress of the initiated task is received, and the updated information is provided within the respective interface (e.g., 818, 820, 822, and/or 906).

[0229] By selectively displaying the task interface based on a task type, the system enhances device functionality by ensuring that tasks are efficiently performed without providing unnecessary information. Performing certain device functions without follow-up interfaces makes the device more efficient by allowing the user to continue using the device without unnecessary interruptions. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0230] The operations described above with reference to FIGS. 11A-11B are optionally implemented by components depicted in FIGS. 1-4, 6A-6B, and 7A-7C. For example, the operations of process 1100 may be implemented by one or more of operating system 718, applications module 724, I/O processing module 728, STT processing module 730, natural language processing module 732, vocabulary index 744, task flow processing module 736, service processing module 738, media service(s) 120-1, or processor(s) 220, 410, and 704. It would be clear to a person having ordinary skill in the art how other processes are implemented based on the components depicted in FIGS. 1-4, 6A-6B, and 7A-7C.

[0231] FIG. 12 illustrates process 1200 for continuous dialog with a digital assistant according to various examples. Process 1200 is performed, for example, using one or more electronic devices implementing a digital assistant. In some examples, process 1200 is performed using a client-server system (e.g., system 100), and the blocks of process 1200 are divided up in any manner between the server (e.g., DA server 106) and a client device. In other examples, the blocks of process 1200 are divided up between the server and multiple client devices (e.g., a mobile phone and a smart watch). Thus, while portions of process 1200 are described herein as being performed by particular devices of a client-server system, it will be appreciated that process 1200 is not so limited. In other examples, process 1200 is performed using only a client device (e.g., user device 104) or only multiple client devices. In process 1200, some blocks are, optionally, combined, the order of some blocks is, optionally, changed, and some blocks are, optionally, omitted. In some examples, additional steps may be performed in combination with the process 1200.

[0232] With reference to FIG. 12, at block 1202, a first user input including at least one character is received within a search field (e.g., 1006). In some embodiments, based on the first user input including at least one character, a plurality of affordances is displayed (e.g., 1008, 1012, 1018, and/or 1024), each affordance corresponding to a respective setting of the electronic device, wherein each affordance includes a respective user interface element to modify a parameter corresponding to the respective setting.

[0233] By providing user interface elements for device settings from a search interface, the system enhances device functionality by reducing the need for the user to navigate various settings menus to adjust the settings. Reducing unnecessary inputs makes the device more efficient by allowing the user to maximize device usage without unnecessary navigation. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0234] At block 1204, based on the first user input, an affordance corresponding to a setting of the first electronic device is displayed (e.g., 1008, 1012, 1018, and/or 1024), wherein the affordance includes a user interface element. In some embodiments, a state of the setting corresponding to the affordance is identified based on the first user input, wherein the displayed user interface element includes the identified state of the setting. In some embodiments, modifying a parameter corresponding to the setting includes at least modifying the state of the setting from a first state to a second state. In some embodiments, the user interface element includes a switch (e.g., 1010, 1014, and/or 1016) to adjust the setting between an on state and an off state, and modifying a parameter corresponding to the setting includes one of adjusting the device from the on state to the off state, or adjusting the setting from the off state to the on state. In some embodiments, the user interface element corresponds to one of a low power mode, a WiFi mode, a flashlight mode, a silence mode, or a wireless communication mode.

[0235] Displaying switch settings based on a keyword search enhances device functionality by reducing the need for the user to navigate various settings menus in order to modify device settings. Reducing unnecessary inputs makes the device more efficient by allowing the user to maximize device usage without unnecessary navigation. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0236] At block 1206, a second user input including an activation of the user interface element is received. In some embodiments, based on the first user input including at least one character, a second affordance corresponding to a setting of a secondary device is displayed, wherein the second affordance includes a second user interface element. In some embodiments, in response to receiving a fifth user input including activation of the second user interface element, the system causes the parameter corresponding to the setting of the secondary device to be adjusted. In some embodiments, an output indicative of the modified parameter corresponding to the setting of the secondary device is provided at the first electronic device. In some embodiments, the system causes a second output to be provided at the secondary device, wherein the second output is indicative of the modified parameter corresponding to the setting of the secondary device. In some embodiments, the second user interface element corresponds to one of an interface element to adjust a lock mode at the secondary device, adjust a silence mode at the secondary device, or adjust a wireless communication mode at the secondary device.

[0237] Providing an interface to adjust settings on an additional device, based on a keyword search, enhances device functionality by reducing the need for the user to navigate settings menus on either device in order to accomplish the settings adjustment. Reducing unnecessary inputs makes the device more efficient by allowing the user to maximize device usage without unnecessary navigation. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0238] At block 1208, in response to receiving the second user input, a parameter corresponding to the setting is modified. In some embodiments, an affordance corresponding to a third setting is displayed based on the first user input, wherein the affordance includes a third user interface element, the third user interface element including a slider switch (e.g., 1020 and/or 1022) to adjust the third setting to a specific state among at least three states. In some embodiments, a sixth input including an activation of the third user interface element is received, wherein the sixth user input includes movement of the slider switch (e.g., 1020 and/or 1022) from a first position to a second position. In some embodiments, in response to receiving the sixth user input including an activation of the third user interface element, a parameter corresponding to the third setting is modified by modifying a state of the third setting from a first state to a second state. In some embodiments, in response to receiving the sixth user input including an activation of the third user interface element, a modification of a state of the third setting is caused to occur at a secondary electronic device, wherein the

modification of the state occurs from a first state to a second state. In some embodiments, in response to receiving the sixth user input including an activation of the third user interface element, a state of the third setting is modified at the first electronic device. In some embodiments, the third setting corresponds to one of a volume corresponding to the first electronic device, a volume corresponding to a secondary electronic device, a brightness corresponding to the first electronic device, a brightness corresponding to a secondary electronic device, a haptic intensity corresponding to the first electronic device, and a temperature parameter corresponding to a secondary electronic device.

[0239] Providing slider bar elements based on a keyword search enhances device functionality by reducing the need for the user to navigate various settings menus in order to modify device settings. Reducing unnecessary inputs makes the device more efficient by allowing the user to maximize device usage without unnecessary navigation. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0240] At block 1210, an output indicative of the modified parameter corresponding to the setting is provided. In some embodiments, a third user input including a selection of the displayed affordance is received. In some embodiments, in response to receiving the third user input, a settings interface corresponding to the setting of the first electronic device is displayed, wherein the settings interface includes at least one of information associated with the setting and at least one additional user interface element corresponding to a same domain as the setting. In some embodiments, a fourth user input is received including an activation of the at least one additional user interface element, wherein the at least one additional user interface element corresponds to an additional setting. In some embodiments, in response to receiving the fourth user input including an activation of the at least one additional user interface element, a parameter corresponding to the additional setting is modified, and an output indicative of the modified parameter corresponding to the additional setting is provided. In some embodiments, an affordance corresponding to a fourth setting is displayed based on the first user input, wherein the affordance corresponding to the fourth setting includes a plurality of radial buttons associated with a same domain. In some embodiments, a user input including a selection of a respective radial button (e.g., 1026) is received, and in response to user input including a selection of a respective radial button, a parameter corresponding to a setting associated with the respective radial button is modified. In some embodiments, only one radial button of the plurality of radial buttons (e.g., 1026) can be

selected at a time. In some embodiments, the plurality of radial buttons (e.g., 1026) correspond to one of a plurality of secondary devices, a plurality of wireless networks, a plurality of volume levels, a plurality of brightness levels, a plurality of user statuses, and a plurality of notification settings.

[0241] Providing radial button elements based on a keyword search enhances device functionality by reducing the need for the user to navigate various settings menus in order to modify device settings. Reducing unnecessary inputs makes the device more efficient by allowing the user to maximize device usage without unnecessary navigation. Thus, these features reduce power usage and improve battery life of the device by enabling the user to use the device more quickly and efficiently.

[0242] The operations described above with reference to FIG. 12 are optionally implemented by components depicted in FIGS. 1-4, 6A-6B, and 7A-7C. For example, the operations of process 1100 may be implemented by one or more of operating system 718, applications module 724, I/O processing module 728, STT processing module 730, natural language processing module 732, vocabulary index 744, task flow processing module 736, service processing module 738, media service(s) 120-1, or processor(s) 220, 410, and 704. It would be clear to a person having ordinary skill in the art how other processes are implemented based on the components depicted in FIGS. 1-4, 6A-6B, and 7A-7C.

[0243] In accordance with some implementations, a computer-readable storage medium (e.g., a non-transitory computer readable storage medium) is provided, the computer-readable storage medium storing one or more programs for execution by one or more processors of an electronic device, the one or more programs including instructions for performing any of the methods or processes described herein.

[0244] In accordance with some implementations, an electronic device (e.g., a portable electronic device) is provided that comprises means for performing any of the methods or processes described herein.

[0245] In accordance with some implementations, an electronic device (e.g., a portable electronic device) is provided that comprises a processing unit configured to perform any of the methods or processes described herein.

[0246] In accordance with some implementations, an electronic device (e.g., a portable electronic device) is provided that comprises one or more processors and memory storing one

or more programs for execution by the one or more processors, the one or more programs including instructions for performing any of the methods or processes described herein.

[0247] The foregoing description, for purpose of explanation, has been described with reference to specific embodiments. However, the illustrative discussions above are not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in view of the above teachings. The embodiments were chosen and described in order to best explain the principles of the techniques and their practical applications. Others skilled in the art are thereby enabled to best utilize the techniques and various embodiments with various modifications as are suited to the particular use contemplated.

[0248] Although the disclosure and examples have been fully described with reference to the accompanying drawings, it is to be noted that various changes and modifications will become apparent to those skilled in the art. Such changes and modifications are to be understood as being included within the scope of the disclosure and examples as defined by the claims.

[0249] As described above, one aspect of the present technology is the gathering and use of data available from various sources to improve navigating and performing tasks from a search interface. The present disclosure contemplates that in some instances, this gathered data may include personal information data that uniquely identifies or can be used to contact or locate a specific person. Such personal information data can include demographic data, location-based data, telephone numbers, email addresses, twitter IDs, home addresses, data or records relating to a user's health or level of fitness (e.g., vital signs measurements, medication information, exercise information), date of birth, or any other identifying or personal information.

[0250] The present disclosure recognizes that the use of such personal information data, in the present technology, can be used to the benefit of users. For example, personal information such as purchase history or media preferences can be used to optimize search interface navigation. Further, other uses for personal information data that benefit the user are also contemplated by the present disclosure. For instance, health and fitness data may be used to provide insights into a user's general wellness, or may be used as positive feedback to individuals using technology to pursue wellness goals.

[0251] The present disclosure contemplates that the entities responsible for the collection, analysis, disclosure, transfer, storage, or other use of such personal information data will comply with well-established privacy policies and/or privacy practices. In particular, such entities should implement and consistently use privacy policies and practices that are generally recognized as meeting or exceeding industry or governmental requirements for maintaining personal information data private and secure. Such policies should be easily accessible by users, and should be updated as the collection and/or use of data changes. Personal information from users should be collected for legitimate and reasonable uses of the entity and not shared or sold outside of those legitimate uses. Further, such collection/sharing should occur after receiving the informed consent of the users. Additionally, such entities should consider taking any needed steps for safeguarding and securing access to such personal information data and ensuring that others with access to the personal information data adhere to their privacy policies and procedures. Further, such entities can subject themselves to evaluation by third parties to certify their adherence to widely accepted privacy policies and practices. In addition, policies and practices should be adapted for the particular types of personal information data being collected and/or accessed and adapted to applicable laws and standards, including jurisdiction-specific considerations. For instance, in the US, collection of or access to certain health data may be governed by federal and/or state laws, such as the Health Insurance Portability and Accountability Act (HIPAA); whereas health data in other countries may be subject to other regulations and policies and should be handled accordingly. Hence different privacy practices should be maintained for different personal data types in each country.

[0252] Despite the foregoing, the present disclosure also contemplates embodiments in which users selectively block the use of, or access to, personal information data. That is, the present disclosure contemplates that hardware and/or software elements can be provided to prevent or block access to such personal information data. For example, the present technology can be configured to allow users to select to “opt in” or “opt out” of participation in the collection of personal information data during registration for services or anytime thereafter. In another example, users can select not to provide personal data such as purchase history, media preferences, or location information. In yet another example, users can select to limit detail provided with respect to personal preferences. In addition to providing “opt in” and “opt out” options, the present disclosure contemplates providing notifications relating to the access or use of personal information. For instance, a user may be notified upon

downloading an app that their personal information data will be accessed and then reminded again just before personal information data is accessed by the app.

[0253] Moreover, it is the intent of the present disclosure that personal information data should be managed and handled in a way to minimize risks of unintentional or unauthorized access or use. Risk can be minimized by limiting the collection of data and deleting data once it is no longer needed. In addition, and when applicable, including in certain health related applications, data de-identification can be used to protect a user's privacy. De-identification may be facilitated, when appropriate, by removing specific identifiers (e.g., date of birth, etc.), controlling the amount or specificity of data stored (e.g., collecting location data at a city level rather than at an address level), controlling how data is stored (e.g., aggregating data across users), and/or other methods.

[0254] Therefore, although the present disclosure broadly covers use of personal information data to implement one or more various disclosed embodiments, the present disclosure also contemplates that the various embodiments can also be implemented without the need for accessing such personal information data. That is, the various embodiments of the present technology are not rendered inoperable due to the lack of all or a portion of such personal information data. For example, providing improved navigation task performance may be accomplished on non-personal information data or a bare minimum amount of personal information, such as anonymized order history data, other non-personal information available to the natural language processing system, or publicly available information.

CLAIMS

What is claimed is:

1. A computer-implemented method, comprising:
at an electronic device with one or more processors and memory:
receiving a first user input including at least one character;
displaying, based on the first user input, a first task among a plurality of tasks,
wherein the first task is associated with a confidence value exceeding a threshold confidence value;
receiving a second user input corresponding to an activation of the first task;
in accordance with a determination that the activated task corresponds to a predetermined task type:
initiating performance of the activated task;
displaying a respective interface corresponding to the initiated task; and
in accordance with a determination that the activated task does not correspond to the predetermined task type, causing the activated task to be performed without displaying the respective interface.
2. The method of claim 1, comprising:
in response to receiving the first user input, displaying, based on the first user input, an application identified from a plurality of applications, wherein
the identified application is associated with a confidence value exceeding a threshold confidence value, and
the first task is associated with the identified application.
3. The method of claim 2, wherein the identified application is displayed adjacent to the first task.

4. The method of claim 2, comprising:
in response to receiving the first user input:

displaying a second task among the plurality of tasks, wherein the second task is associated with a second confidence value which is lower than the first confidence value, wherein the second task is associated with the identified application.
5. The method of any one of claims 1-4, comprising:

in response to receiving the first user input, identifying the first task based on at least one of a time of day, a location of the electronic device, and a device interaction history.
6. The method of any one of claims 1-5, comprising:

prior to receiving the second user input corresponding to the activation of the first task, displaying a confirmation interface including additional information corresponding to the first task, wherein the confirmation interface includes a selectable affordance; and

receiving, as the second user input, a user selection of the selectable affordance.
7. The method of any one of claims 1-6, comprising:

displaying a search interface while receiving the first user input, wherein the respective interface corresponding to the initiated task corresponds to an application interface which replaces the search interface as the displayed interface in response to receiving the second user input.
8. The method of claim 7, comprising:

receiving a third user input including one of a contact motion in a first direction or a tap on a search field, wherein the search field is displayed after a predetermined amount of time while a home screen is displayed without any user interaction; and

in response to receiving the third user input, displaying the search interface.

9. The method of any one of claims 1-8, comprising:
- determining a device type corresponding to the electronic device;
 - in accordance with a determination that the device type corresponds to a first device type, displaying the respective interface below a plurality of device status indicators; and
 - in accordance with a determination that the device type corresponds to a second device type, displaying the respective interface aligned with the plurality of device status indicators, wherein the plurality of device status indicators include at least one of a current time, a signal strength, and a battery level.
10. The method of any one of claims 1-9, comprising:
- determining a device type corresponding to the electronic device;
 - in accordance with a determination that the device type corresponds to a first device type, displaying the respective interface having a first size; and
 - in accordance with a determination that the device type corresponds to a second device type, displaying the respective interface having a second size smaller than the first size.
11. The method of any one of claims 1-10, comprising:
- receiving a fourth user input on the respective interface corresponding to the initiated task; and
 - in response to receiving to the fourth user input, increasing a size of the respective interface by displaying an expansion of the respective interface towards a center of a display of the electronic device.
12. The method of claim 11, comprising:
- prior to receiving the fourth user input on the respective interface corresponding to the initiated task, displaying at least a first number of parameters corresponding to the initiated task within the respective interface; and

after displaying an expansion of the respective interface towards a center of a display of the electronic device, displaying a second number of parameters corresponding to the initiated task within the respective interface, wherein the second number is greater than the first number.

13. The method of any one of claims 1-12, comprising:
receiving updated information corresponding to progress of the initiated task; and
providing the updated information within the respective interface.
14. The method of any one of claims 1-13, comprising:
in response to receiving a fifth user input corresponding to the activation of one of the first task or a displayed application associated with the first task:
increasing a first confidence value associated with the first task; and
increasing a second confidence value associated with the displayed application.
15. The method of any one of claims 1-14, comprising:
receiving, from a remote source, updated information associated with a respective task among the plurality of tasks; and
in response to receiving the updated information associated with the respective task, increasing a confidence value associated with the respective task.
16. The method of any one of claims 1-15, comprising:
displaying a switch as the first task among the plurality of tasks;
receiving, as the second user input, a user selection of the switch; and
in response to the user selection of the switch, modifying at least one parameter corresponding to the electronic device.

17. The method of any one of claims 1-16, comprising:

in accordance with a determination that the first task among the plurality of tasks corresponds to displaying a switch, determining that the activated task does not correspond to the predetermined task type.

18. The method of any one of claims 1-17, comprising:

displaying a search interface while receiving the first user input including at least one character;

displaying, as the first task among a plurality of tasks, an affordance corresponding to a setting of the electronic device, wherein receiving a second user input corresponding to activation of the first task includes a user interaction with the affordance; and

maintaining display of the search interface in response to the user interaction with the affordance.

19. An electronic device, comprising:

one or more processors;

a memory; and

one or more programs, wherein the one or more programs are stored in the memory and configured to be executed by the one or more processors, the one or more programs including instructions for:

receiving a first user input including at least one character;

displaying, based on the first user input, a first task among a plurality of tasks, wherein the first task is associated with a confidence value exceeding a threshold confidence value;

receiving a second user input corresponding to an activation of the first task;

in accordance with a determination that the activated task corresponds to a predetermined task type:

initiating performance of the activated task;

displaying a respective interface corresponding to the initiated task; and

in accordance with a determination that the activated task does not correspond to the predetermined task type, causing the activated task to be performed without displaying the respective interface.

20. A non-transitory computer-readable storage medium storing one or more programs, the one or more programs comprising instructions, which when executed by one or more processors of a first electronic device, cause the first electronic device to:

receive a first user input including at least one character;

display, based on the first user input, a first task among a plurality of tasks, wherein the first task is associated with a confidence value exceeding a threshold confidence value;

receive a second user input corresponding to an activation of the first task;

in accordance with a determination that the activated task corresponds to a predetermined task type:

initiate performance of the activated task;

display a respective interface corresponding to the initiated task; and

in accordance with a determination that the activated task does not correspond to the predetermined task type, cause the activated task to be performed without displaying the respective interface.

21. An electronic device, comprising:

means for receiving a first user input including at least one character;

means for displaying, based on the first user input, a first task among a plurality of tasks, wherein the first task is associated with a confidence value exceeding a threshold confidence value;

means for receiving a second user input corresponding to an activation of the first task;

in accordance with a determination that the activated task corresponds to a predetermined task type:

means for initiating performance of the activated task;

means for displaying a respective interface corresponding to the initiated task;
and

in accordance with a determination that the activated task does not correspond to the predetermined task type, means for causing the activated task to be performed without displaying the respective interface.

22. An electronic device, comprising:

one or more processors;

a memory; and

one or more programs, wherein the one or more programs are stored in the memory and configured to be executed by the one or more processors, the one or more programs including instructions for performing the methods of any one of claims 1-18.

23. A non-transitory computer-readable storage medium storing one or more programs, the one or more programs comprising instructions, which when executed by one or more processors of an electronic device, cause the electronic device to perform the methods of any one of claims 1-18.

24. An electronic device, comprising:

means for performing the methods of any one of claims 1-18.

25. A computer-implemented method, comprising:

at a first electronic device with one or more processors and memory:

receiving, within a search field, a first user input including at least one character;

displaying, based on the first user input, an affordance corresponding to a setting of the first electronic device, wherein the affordance includes a user interface element;

receiving a second user input including an activation of the user interface element;

in response to receiving the second user input, modifying a parameter corresponding to the setting; and

providing an output indicative of the modified parameter corresponding to the setting.

26. The method of claim 25, comprising:

identifying, based on the first user input, a state of the setting corresponding to the affordance, wherein the displayed user interface element includes the identified state of the setting.

27. The method of claim 26, wherein modifying a parameter corresponding to the setting includes at least modifying the state of the setting from a first state to a second state.

28. The method of any one of claims 25-27, comprising:

receiving a third user input including a selection of the displayed affordance;

in response to receiving the third user input, displaying a settings interface corresponding to the setting of the first electronic device, wherein the settings interface includes at least one of information associated with the setting and at least one additional user interface element corresponding to a same domain as the setting.

29. The method of claim 28, comprising:

receiving a fourth user input including an activation of the at least one additional user interface element, wherein the at least one additional user interface element corresponds to an additional setting;

in response to receiving the fourth user input including an activation of the at least one additional user interface element, modifying a parameter corresponding to the additional setting; and

providing an output indicative of the modified parameter corresponding to the additional setting.

30. The method of any one of claims 25-29, comprising:

displaying, based on the first user input including at least one character, a plurality of affordances, each affordance corresponding to a respective setting of the electronic device, wherein each affordance includes a respective user interface element to modify a parameter corresponding to the respective setting.

31. The method of any one of claims 25-30, wherein

the user interface element includes a switch to adjust the setting between an on state and an off state, and

modifying a parameter corresponding to the setting includes one of:

adjusting the device from the on state to the off state, or

adjusting the setting from the off state to the on state.

32. The method of claim 31, wherein the user interface element corresponds to one of a low power mode, a WiFi mode, a flashlight mode, a silence mode, or a wireless communication mode.

33. The method of any one of claims 25-32, comprising:

displaying, based on the first user input including at least one character, a second affordance corresponding to a setting of a secondary device, wherein the second affordance includes a second user interface element;

in response to receiving a fifth user input including activation of the second user interface element, causing the parameter corresponding to the setting of the secondary device to be adjusted;

providing, at the first electronic device, an output indicative of the modified parameter corresponding to the setting of the secondary device; and

causing a second output to be provided at the secondary device, wherein the second output is indicative of the modified parameter corresponding to the setting of the secondary device.

34. The method of claim 33, wherein the second user interface element corresponds to one of an interface element to adjust a lock mode at the secondary device, adjust a silence mode at the secondary device, or adjust a wireless communication mode at the secondary device.

35. The method of any one of claims 25-34, comprising:

displaying, based on the first user input, an affordance corresponding to a third setting, wherein the affordance includes a third user interface element, the third user interface element including a slider switch to adjust the third setting to a specific state among at least three states; and

receiving a sixth user input including an activation of the third user interface element, wherein the sixth user input includes movement of the slider switch from a first position to a second position.

36. The method of claim 35, comprising:

in response to receiving the sixth user input including an activation of the third user interface element, modifying a parameter corresponding to the third setting by modifying a state of the third setting from a first state to a second state.

37. The method of claim 35, comprising:

in response to receiving the sixth user input including an activation of the third user interface element, causing a modification of a state of the third setting to occur at a secondary electronic device, wherein the modification of the state occurs from a first state to a second state.

38. The method of claim 35, comprising:

in response to receiving the sixth user input including an activation of the third user interface element, modifying a state of the third setting at the first electronic device.

39. The method of claim 35, wherein the third setting corresponds to one of a volume corresponding to the first electronic device, a volume corresponding to a secondary electronic device, a brightness corresponding to the first electronic device, a brightness corresponding to a secondary electronic device, a haptic intensity corresponding to the first electronic device, and a temperature parameter corresponding to a secondary electronic device.

40. The method of any one of claims 25-39, comprising:

displaying, based on the first user input, an affordance corresponding to a fourth setting, wherein the affordance corresponding to the fourth setting includes a plurality of radial buttons associated with a same domain;

receiving a user input including a selection of a respective radial button; and

in response to user input including a selection of a respective radial button, modifying a parameter corresponding to a setting associated with the respective radial button.

41. The method of claim 40, wherein only one radial button of the plurality of radial buttons can be selected at a time.

42. The method of claim 40, wherein the plurality of radial buttons correspond to one of a plurality of secondary devices, a plurality of wireless networks, a plurality of volume levels, a plurality of brightness levels, a plurality of user statuses, and a plurality of notification settings.

43. A first electronic device, comprising:

one or more processors;

a memory; and

one or more programs, wherein the one or more programs are stored in the memory and configured to be executed by the one or more processors, the one or more programs including instructions for:

receiving, within a search field, a first user input including at least one character;

displaying, based on the first user input, an affordance corresponding to a setting of the first electronic device, wherein the affordance includes a user interface element;

receiving a second user input including an activation of the user interface element;

in response to receiving the second user input, modifying a parameter corresponding to the setting; and

providing an output indicative of the modified parameter corresponding to the setting.

44. A non-transitory computer-readable storage medium storing one or more programs, the one or more programs comprising instructions, which when executed by one or more processors of a first electronic device, cause the first electronic device to:

receive, within a search field, a first user input including at least one character;

display, based on the first user input, an affordance corresponding to a setting of the first electronic device, wherein the affordance includes a user interface element;

receive a second user input including an activation of the user interface element;

in response to receiving the second user input, modify a parameter corresponding to the setting; and

provide an output indicative of the modified parameter corresponding to the setting.

45. An electronic device, comprising:

means for receiving, within a search field, a first user input including at least one character;

means for displaying, based on the first user input, an affordance corresponding to a setting of the first electronic device, wherein the affordance includes a user interface element;

means for receiving a second user input including an activation of the user interface element;

means for, in response to receiving the second user input, modifying a parameter corresponding to the setting; and

means for providing an output indicative of the modified parameter corresponding to the setting.

46. An electronic device, comprising:

one or more processors;

a memory; and

one or more programs, wherein the one or more programs are stored in the memory and configured to be executed by the one or more processors, the one or more programs including instructions for performing the methods of any one of claims 25-42.

47. A non-transitory computer-readable storage medium storing one or more programs, the one or more programs comprising instructions, which when executed by one or more processors of an electronic device, cause the electronic device to perform the methods of any one of claims 25-42.

48. An electronic device, comprising:

means for performing the methods of any one of claims 25-42.

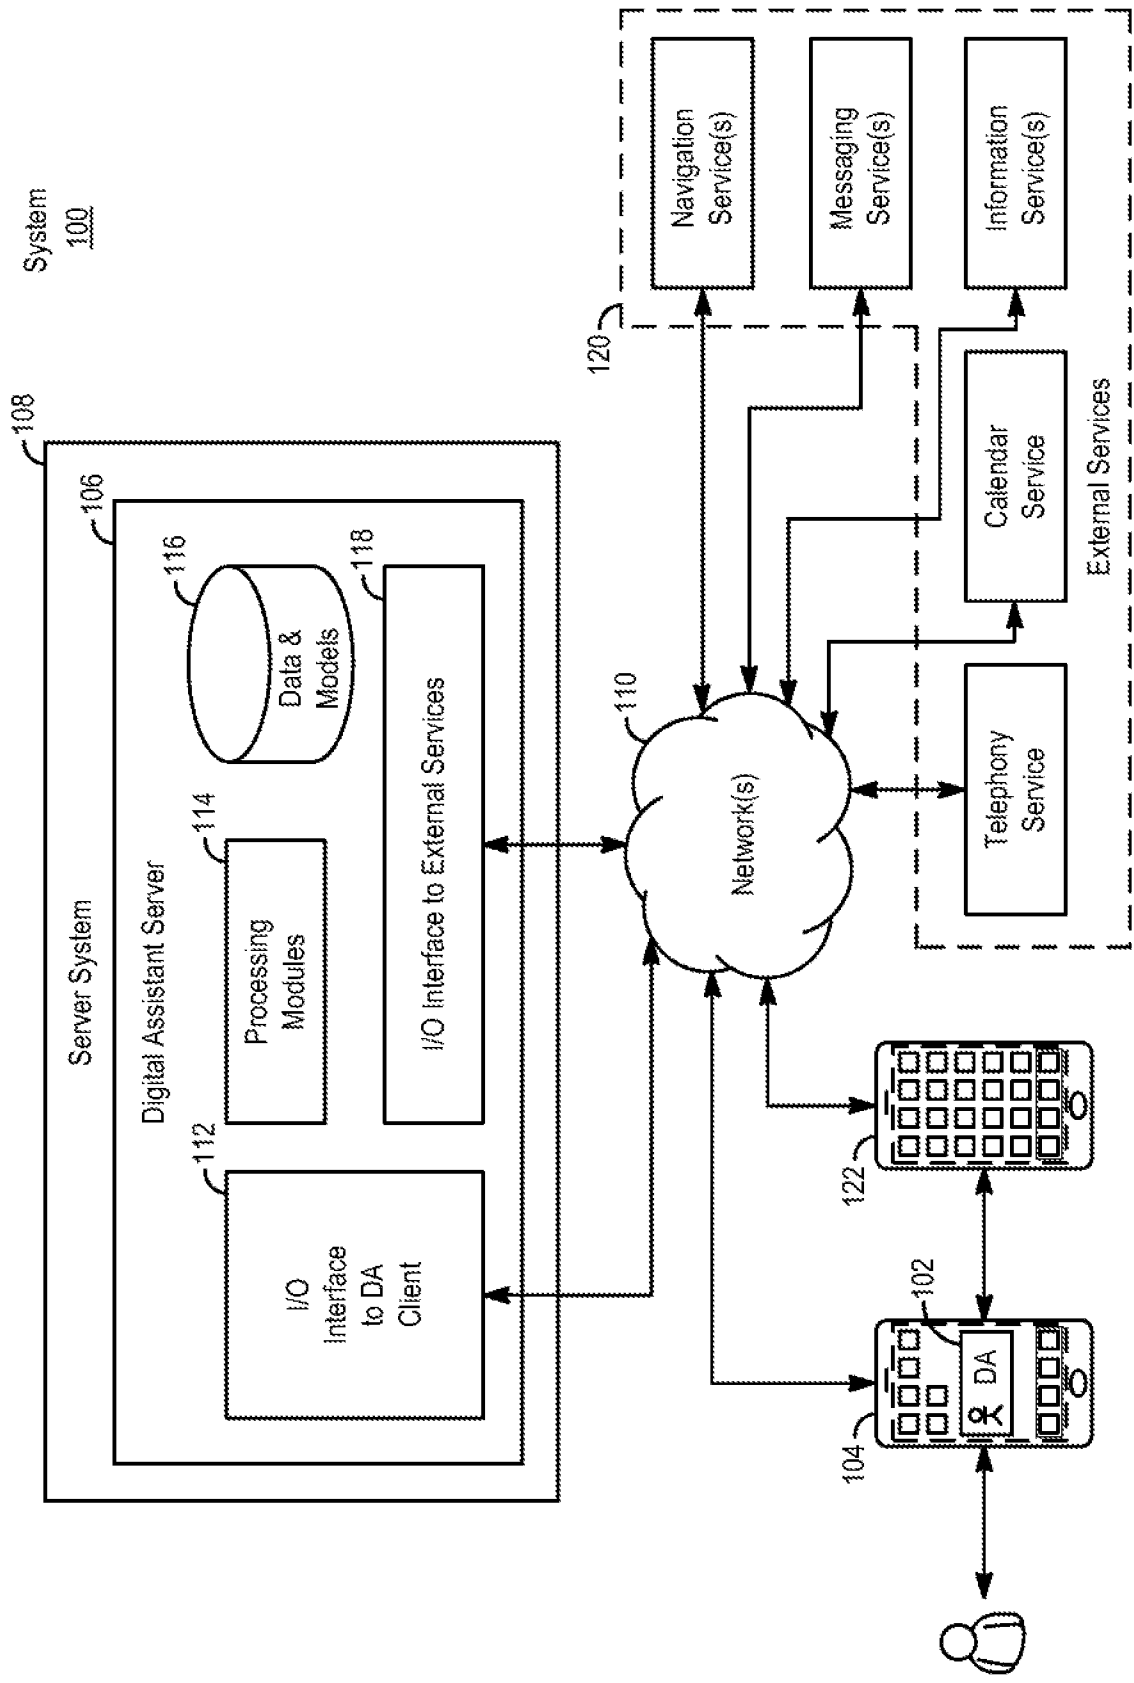


FIG. 1

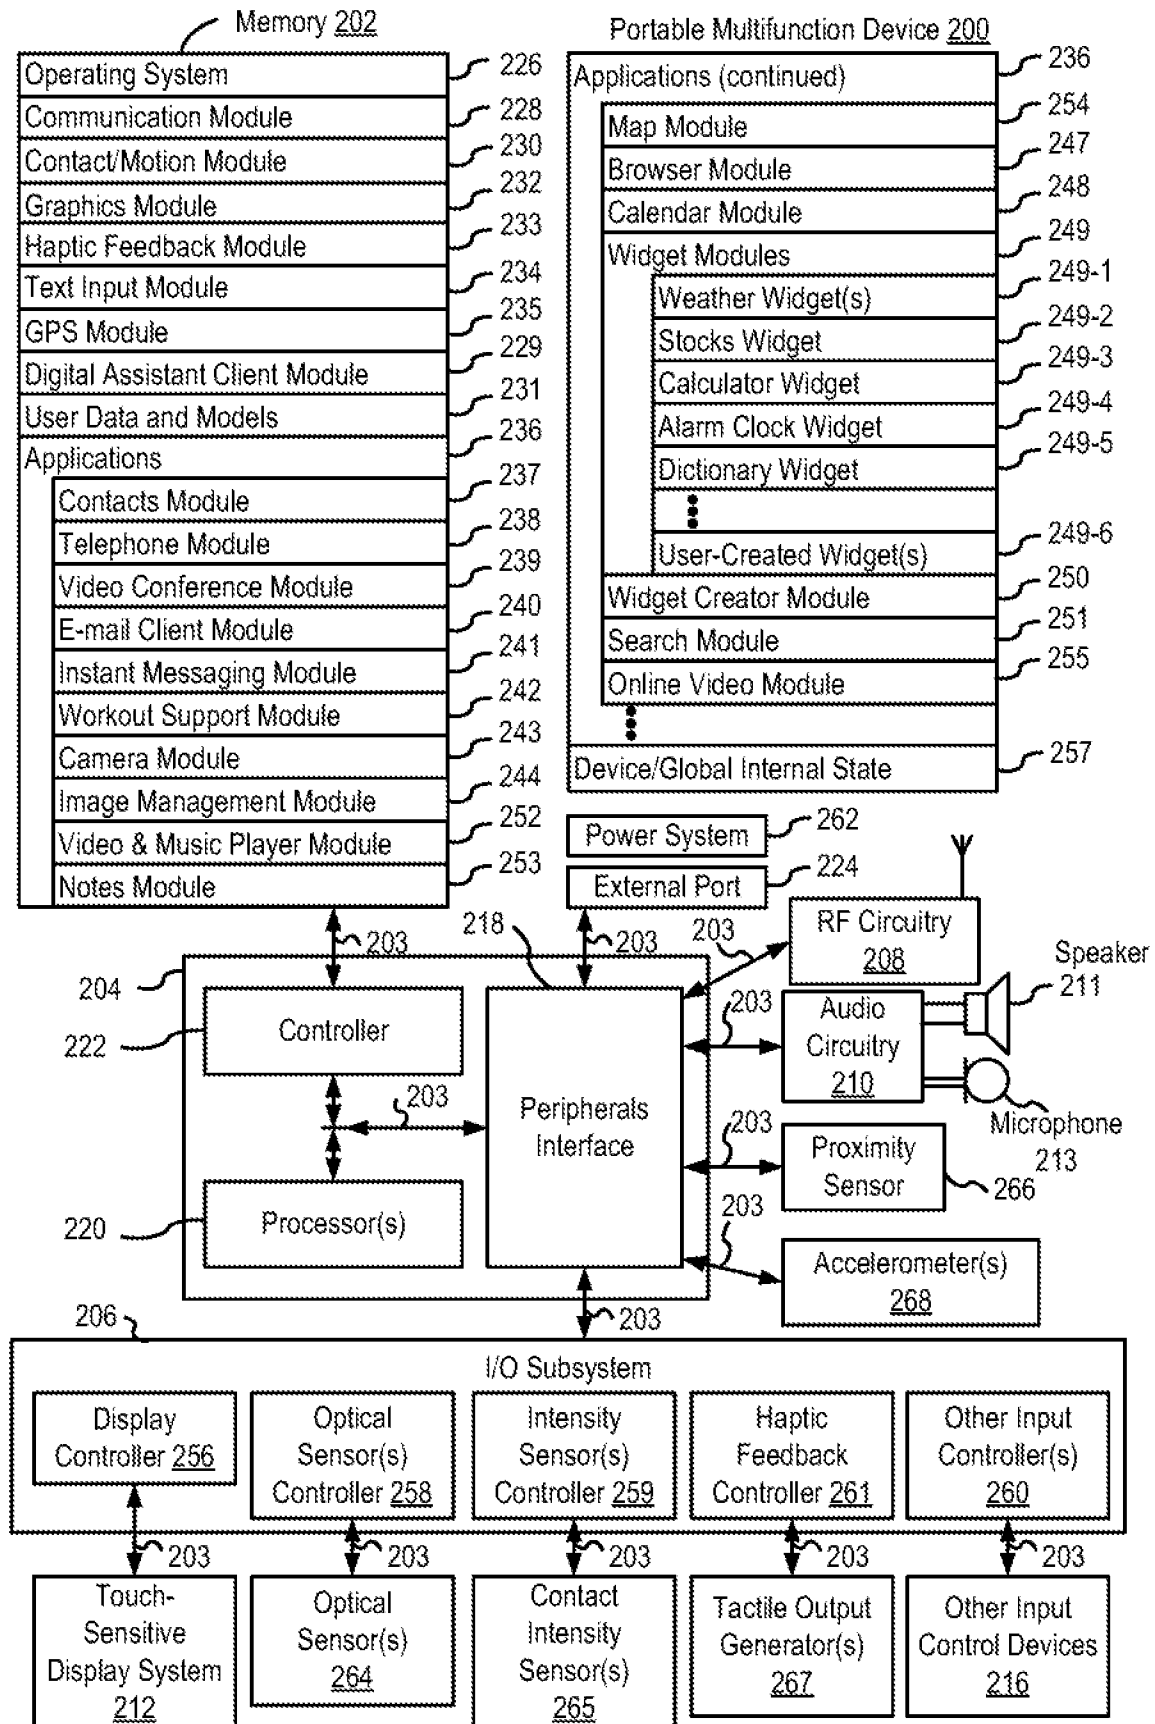


FIG. 2A

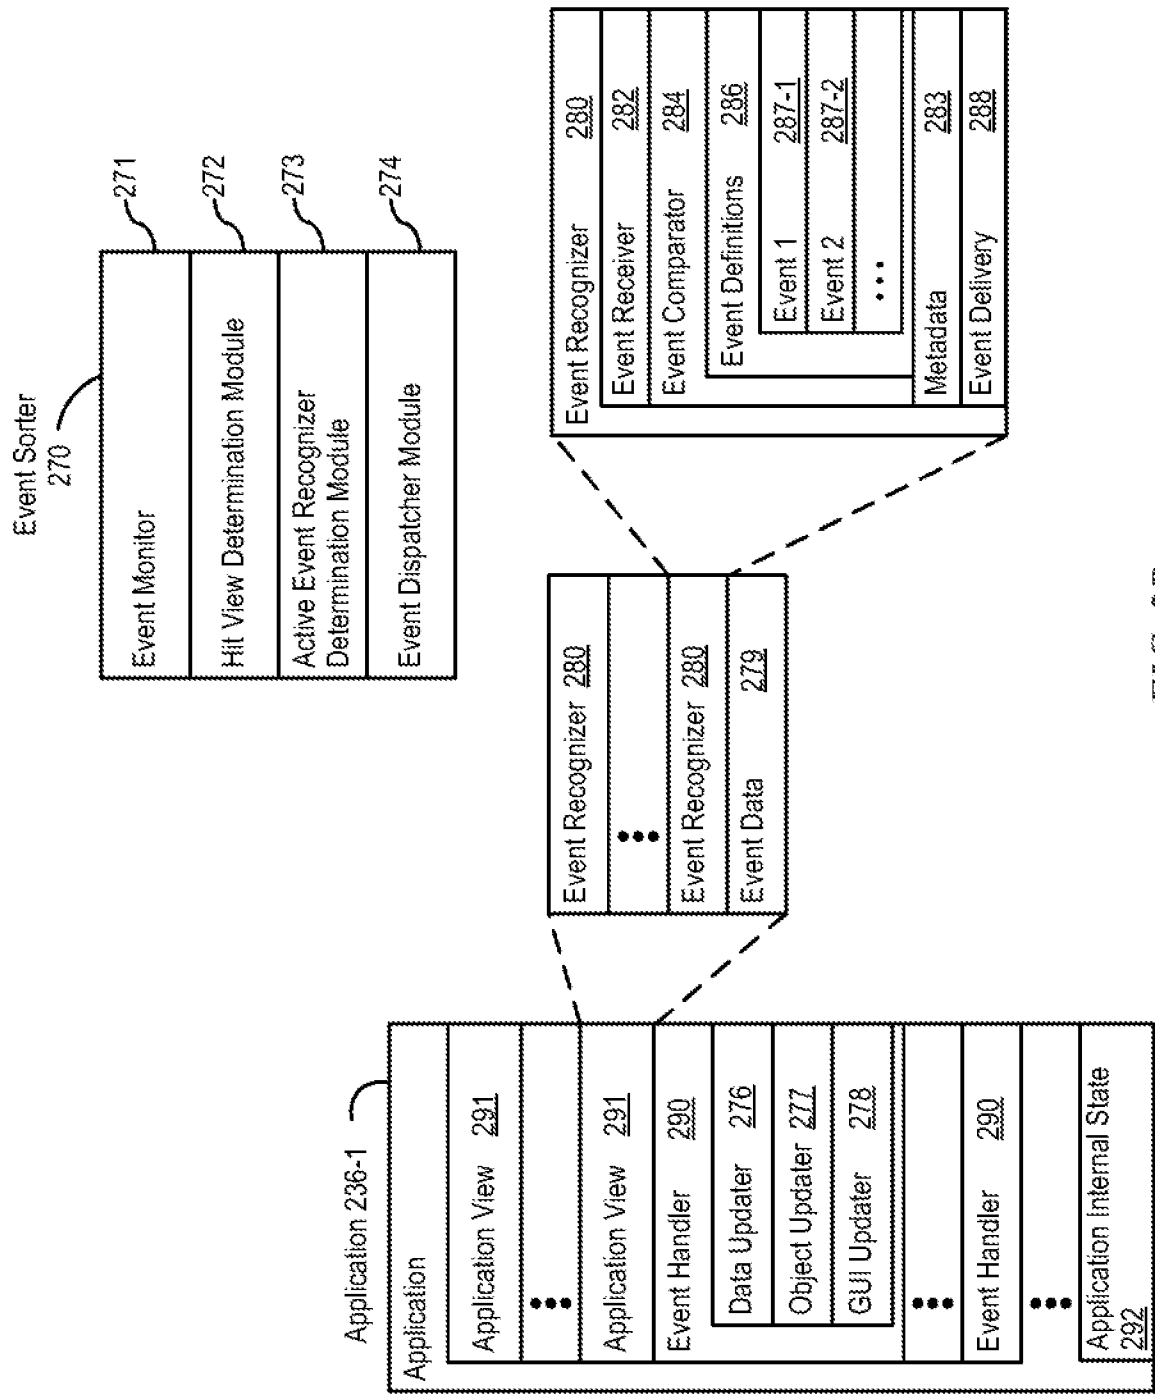


FIG. 2B

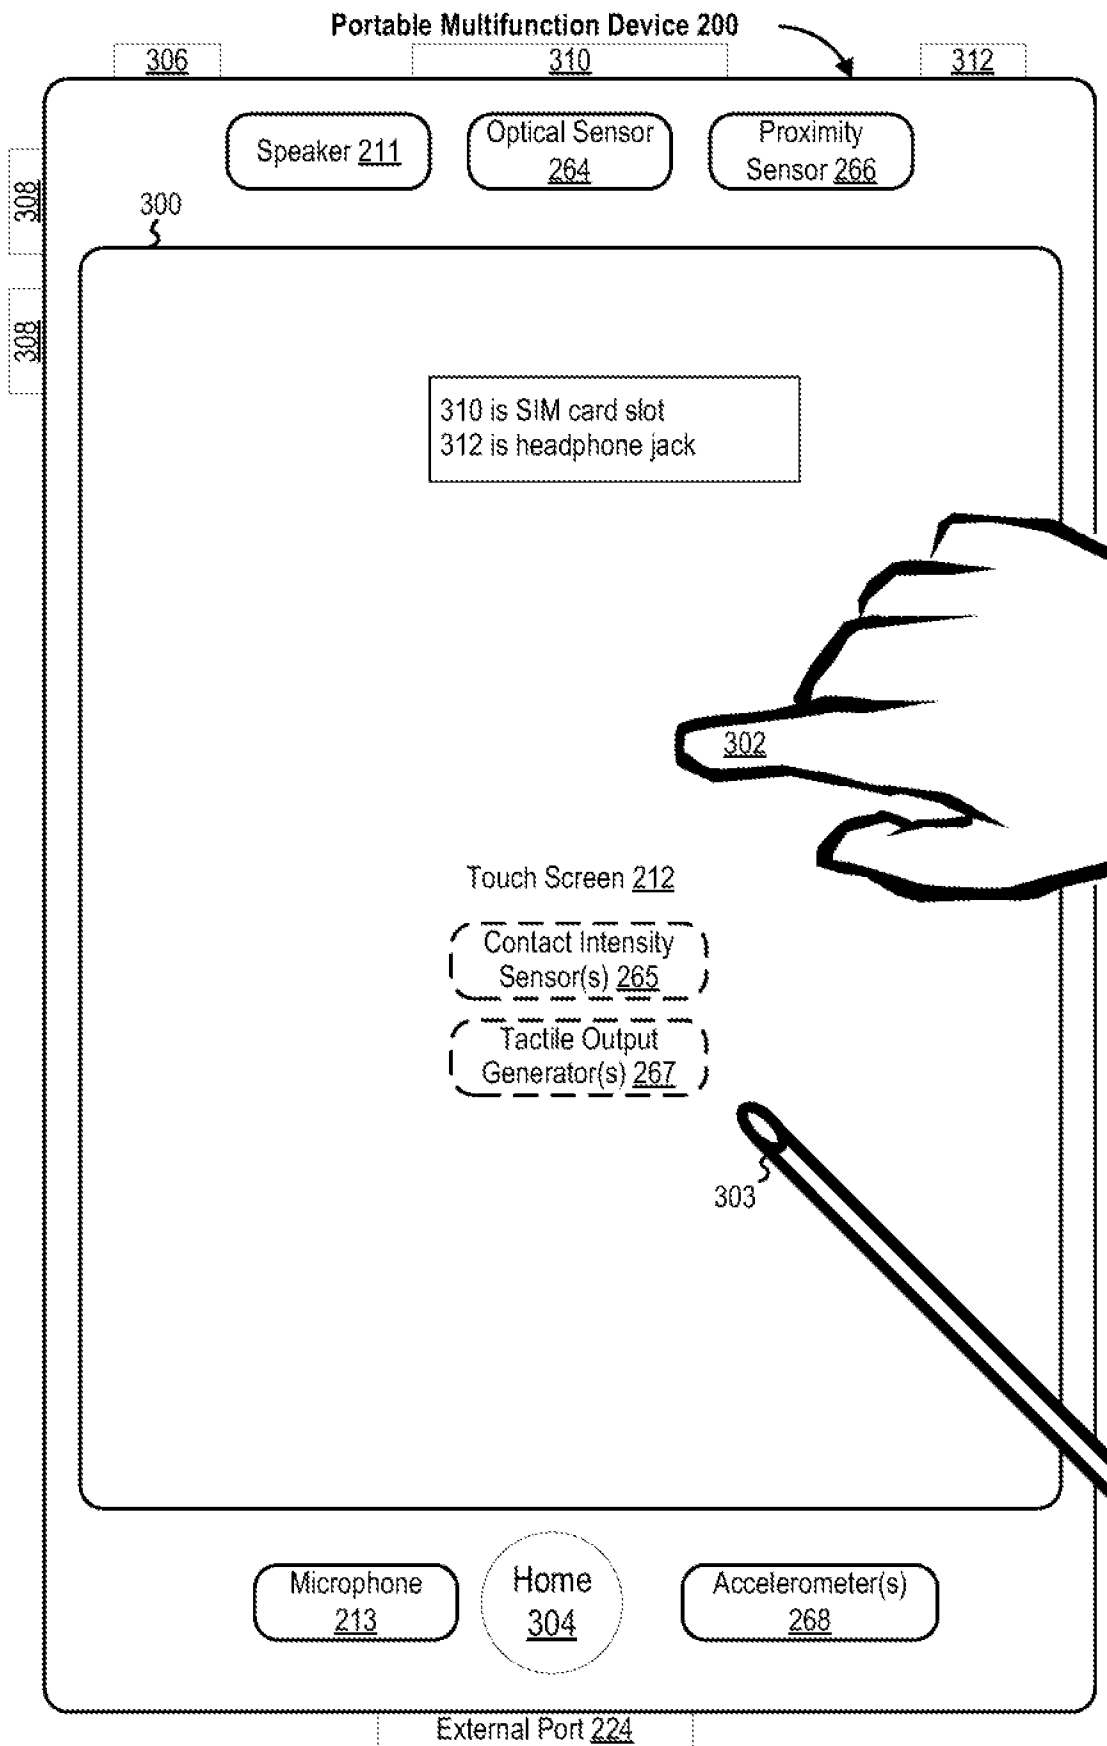


FIG. 3

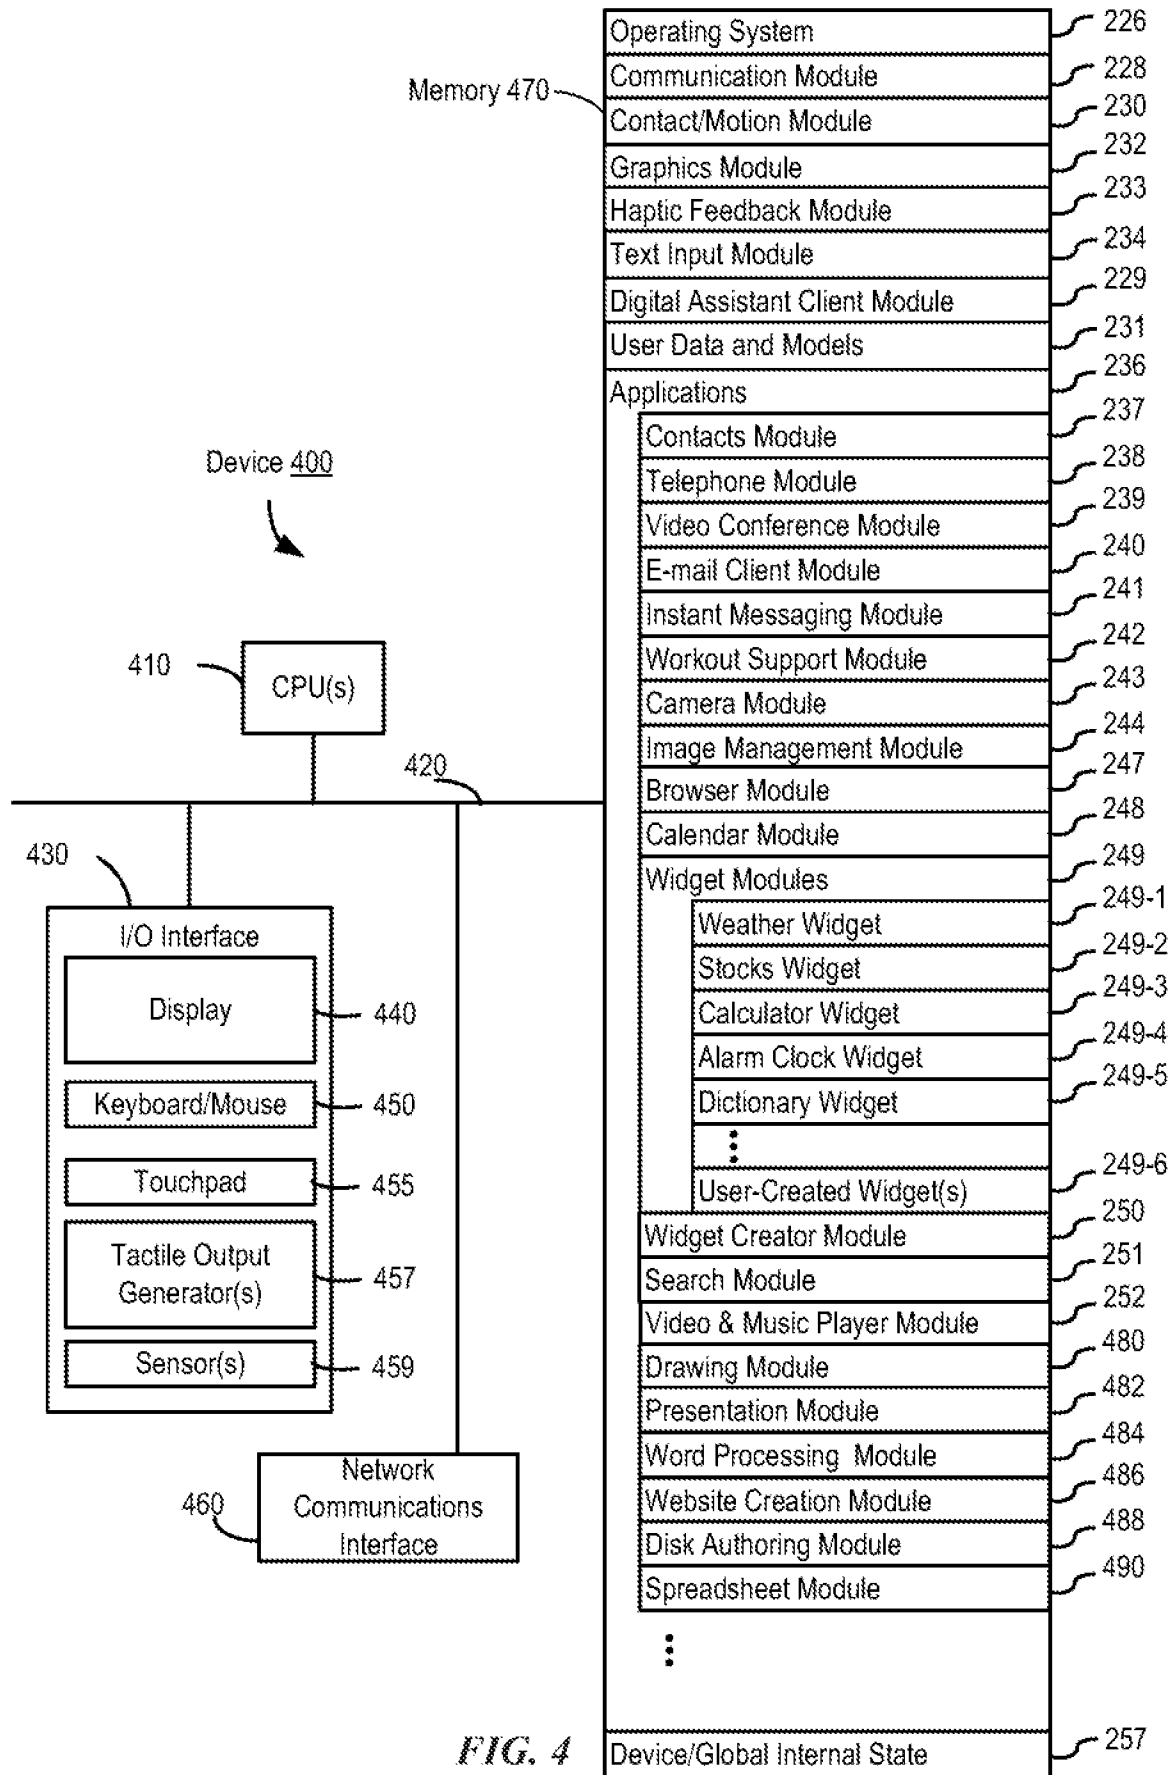


FIG. 4

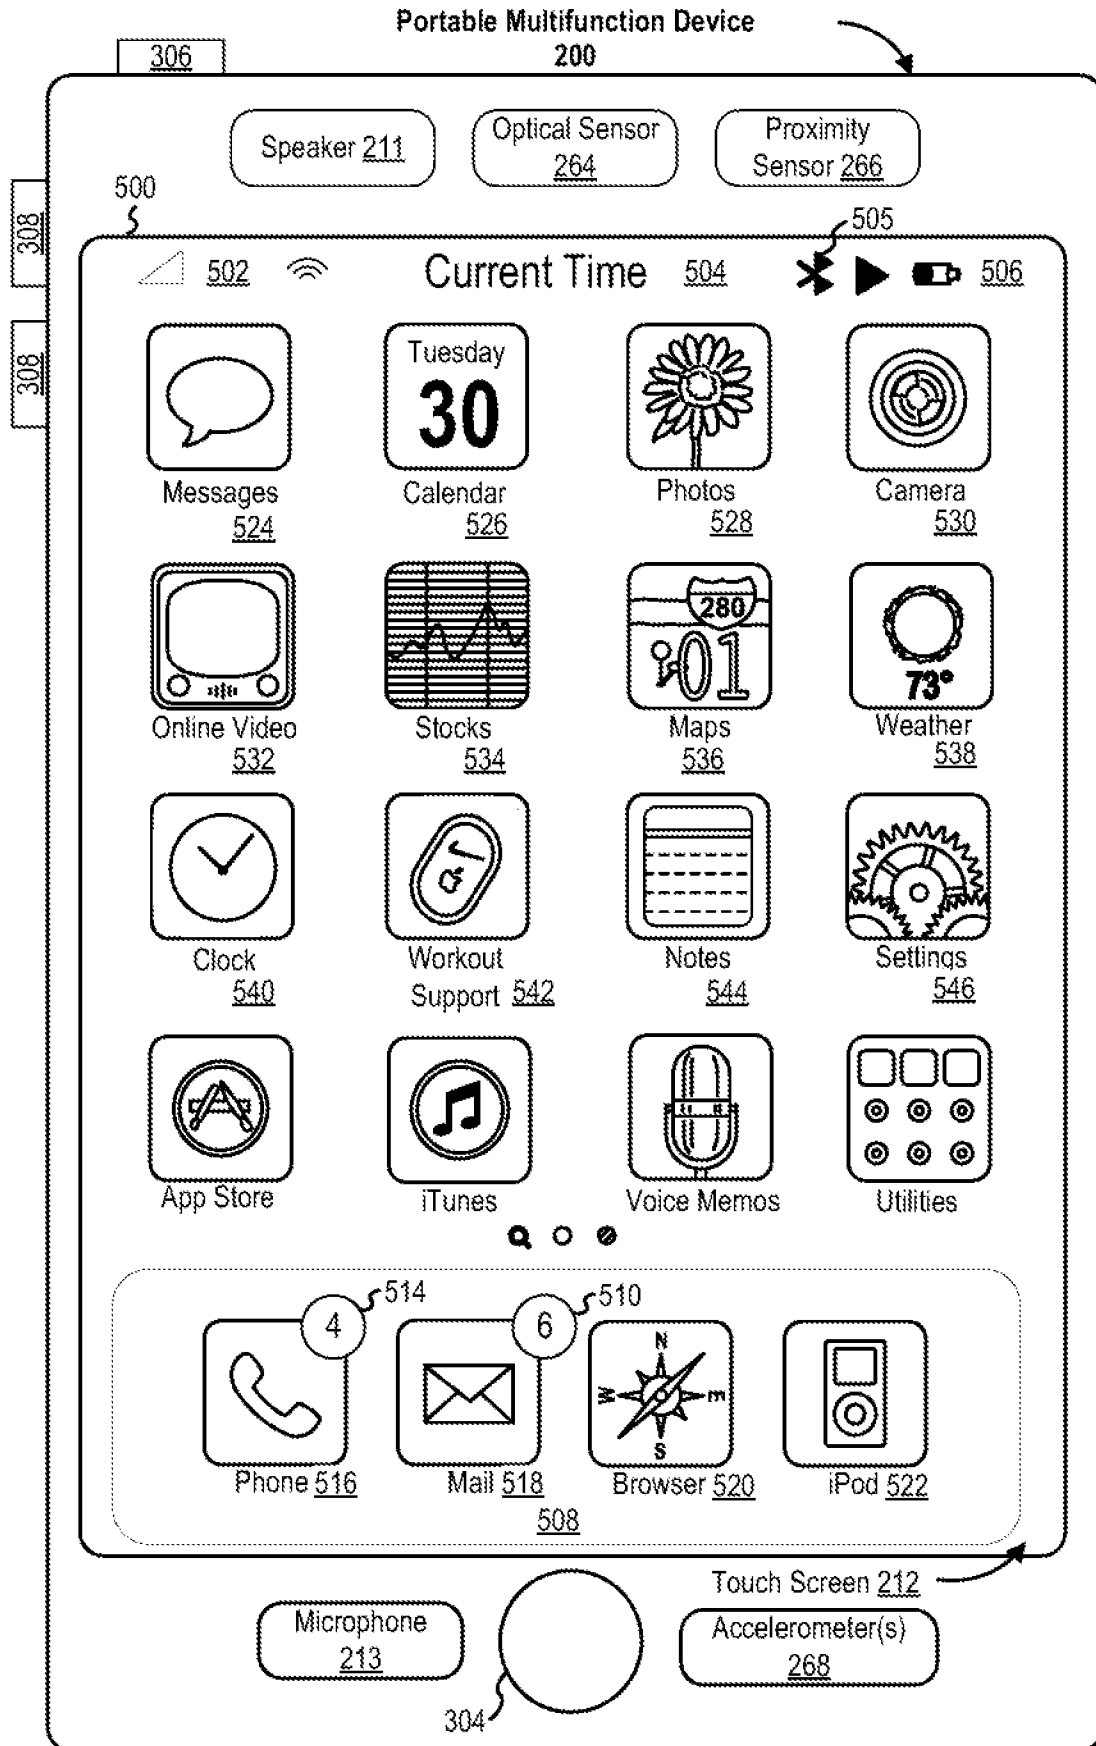


FIG. 5A

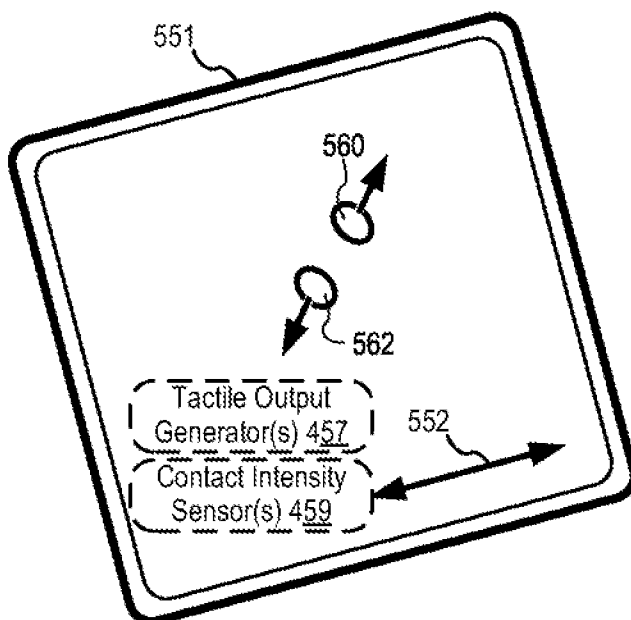
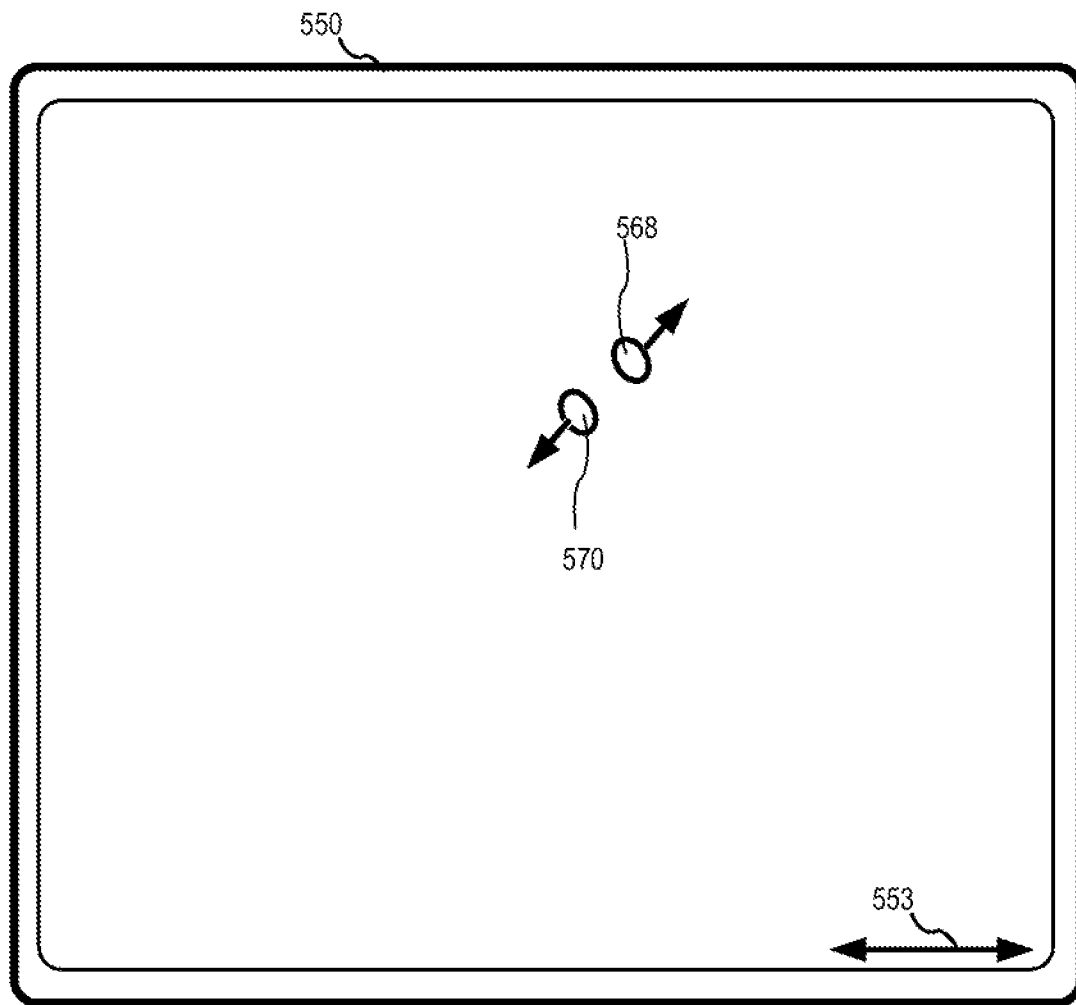
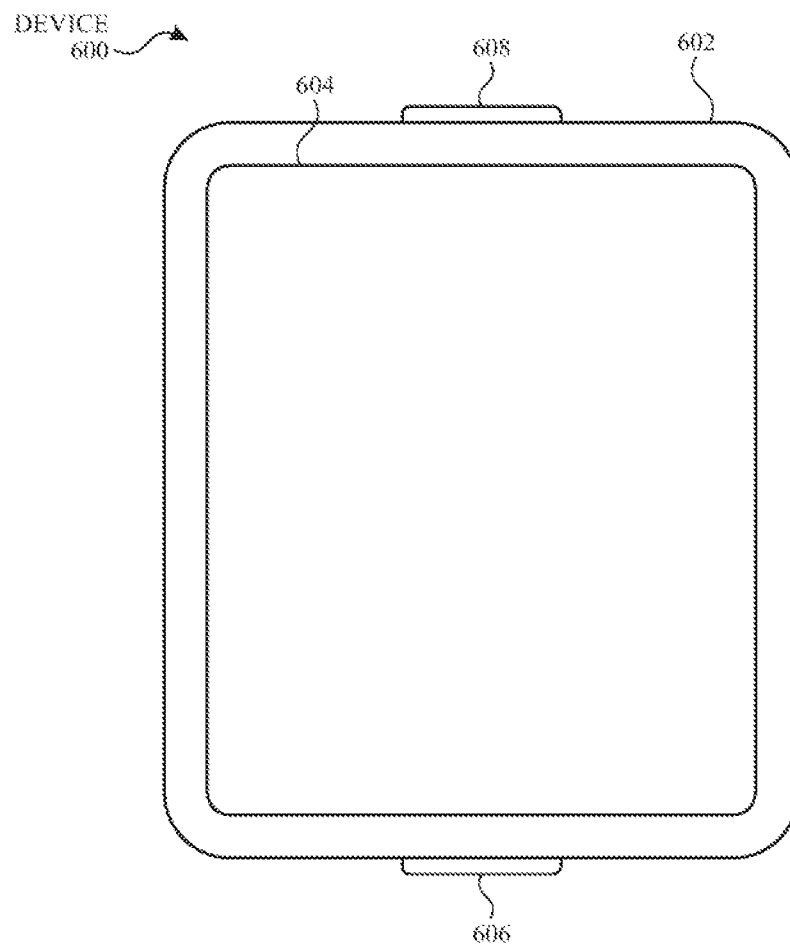


FIG. 5B

*FIG. 6A*

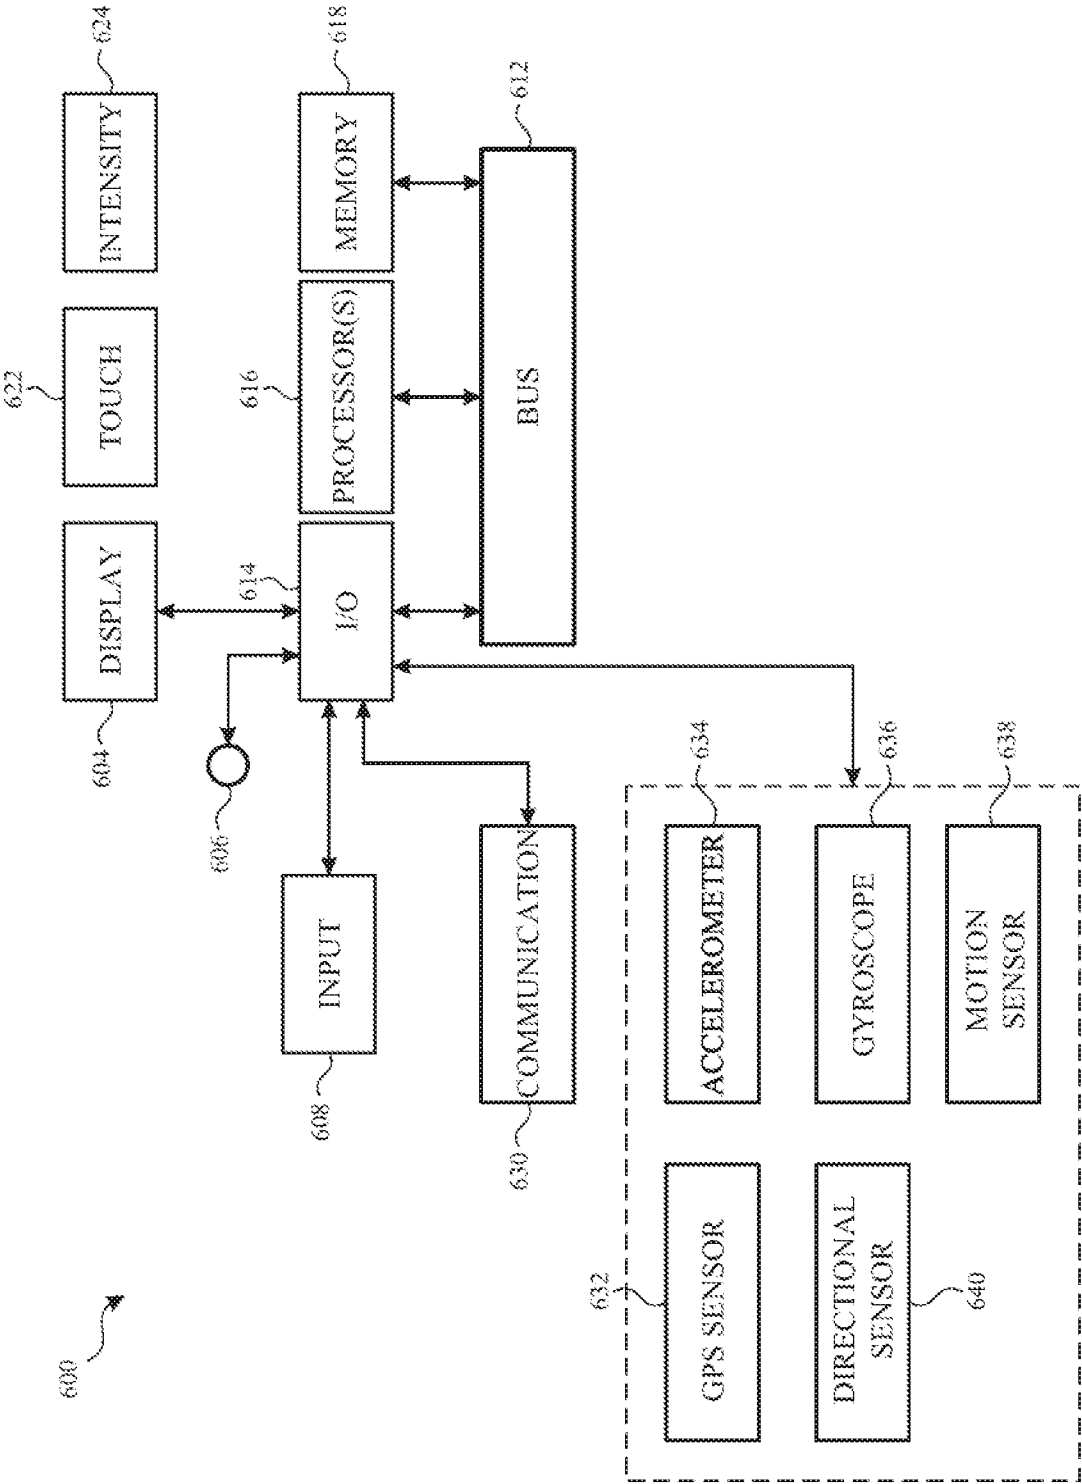


FIG. 6B

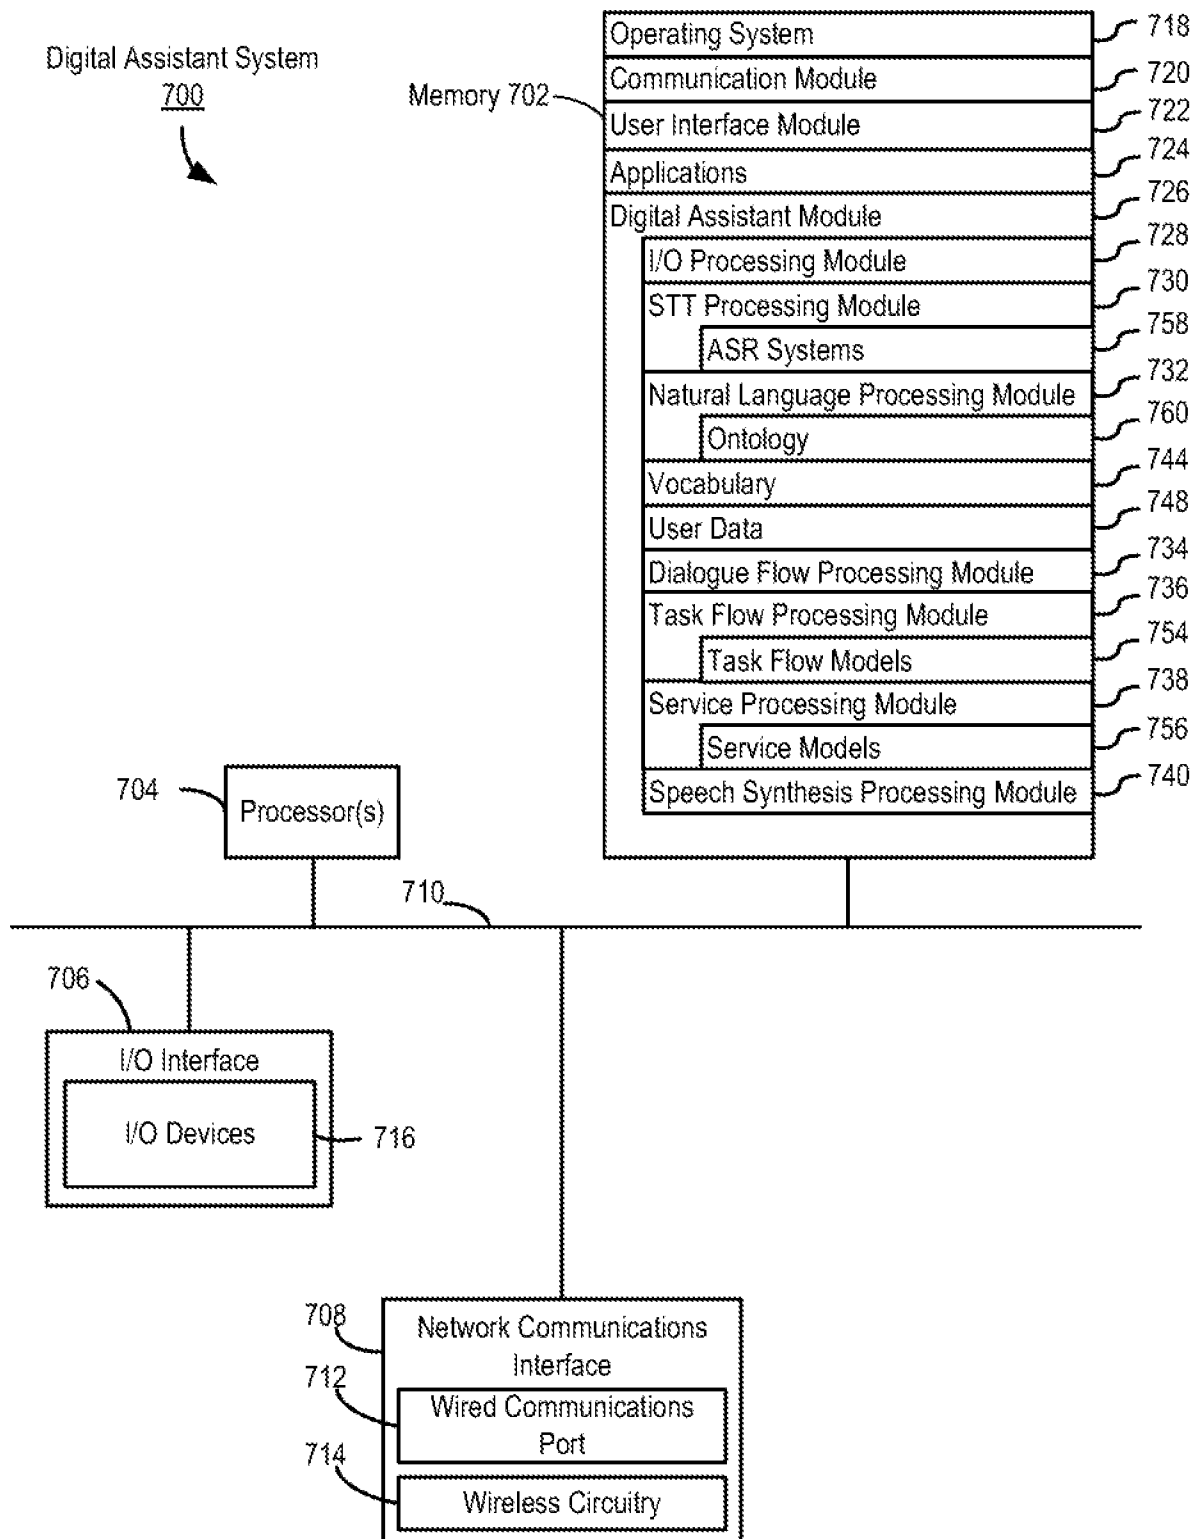


FIG. 7A

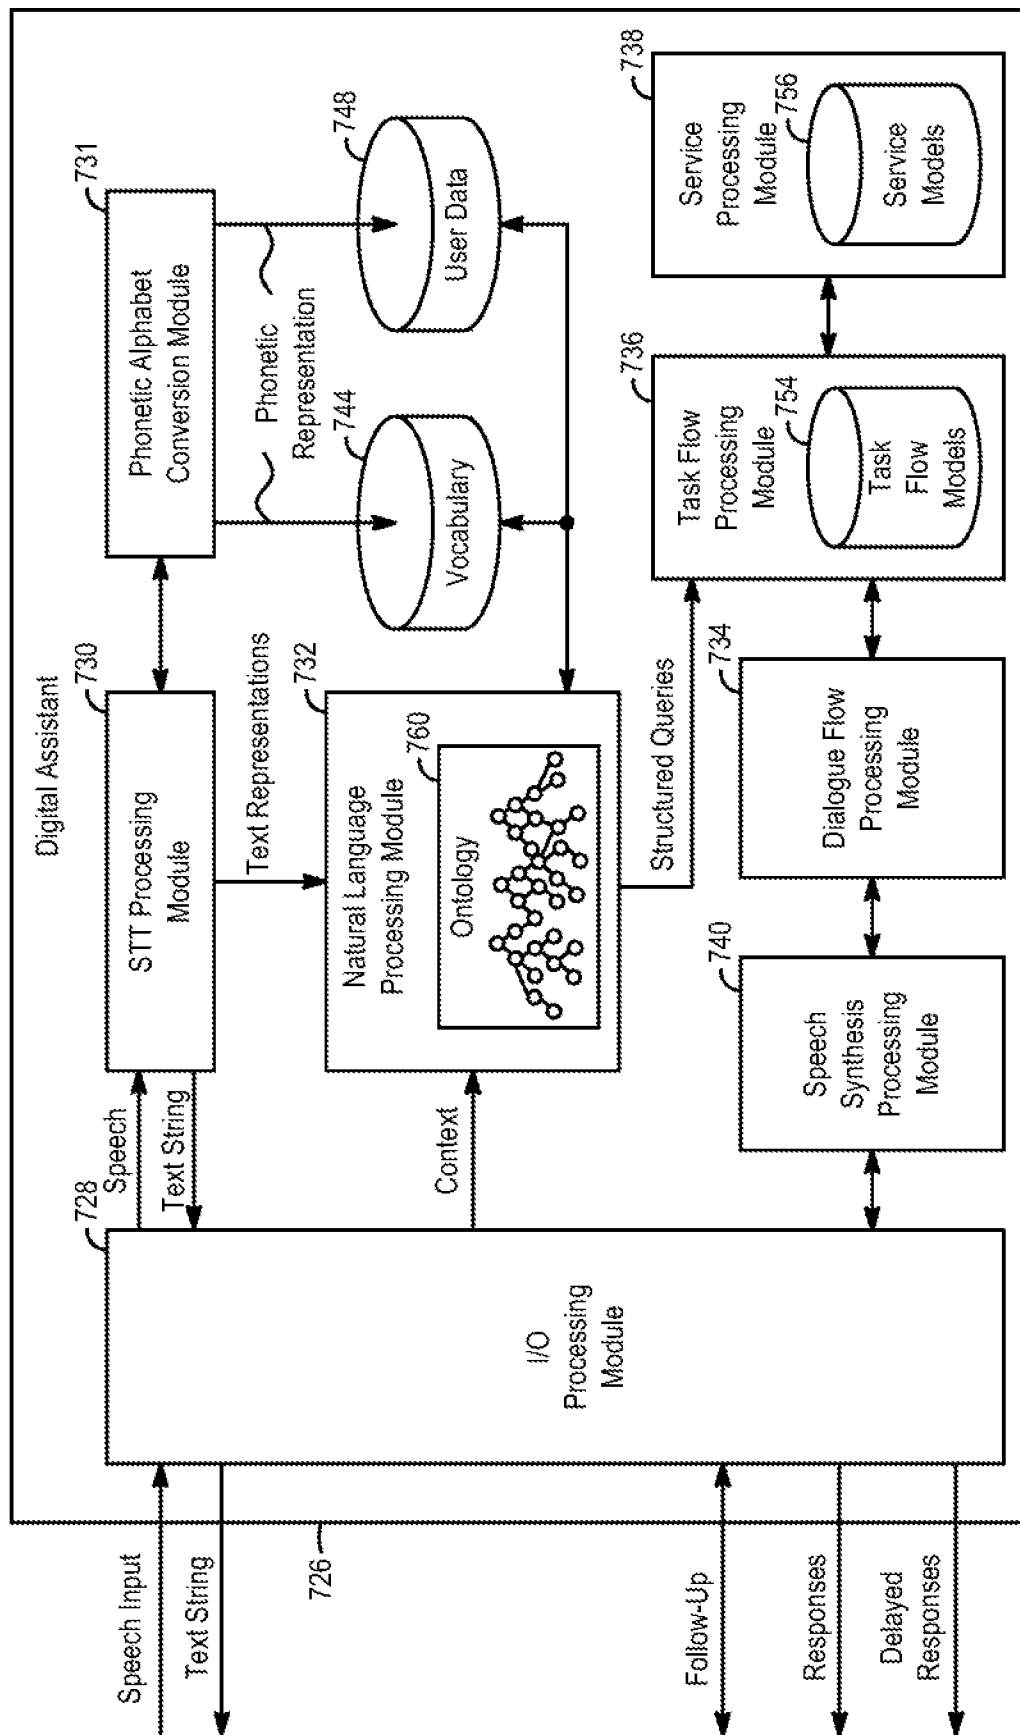


FIG. 7B

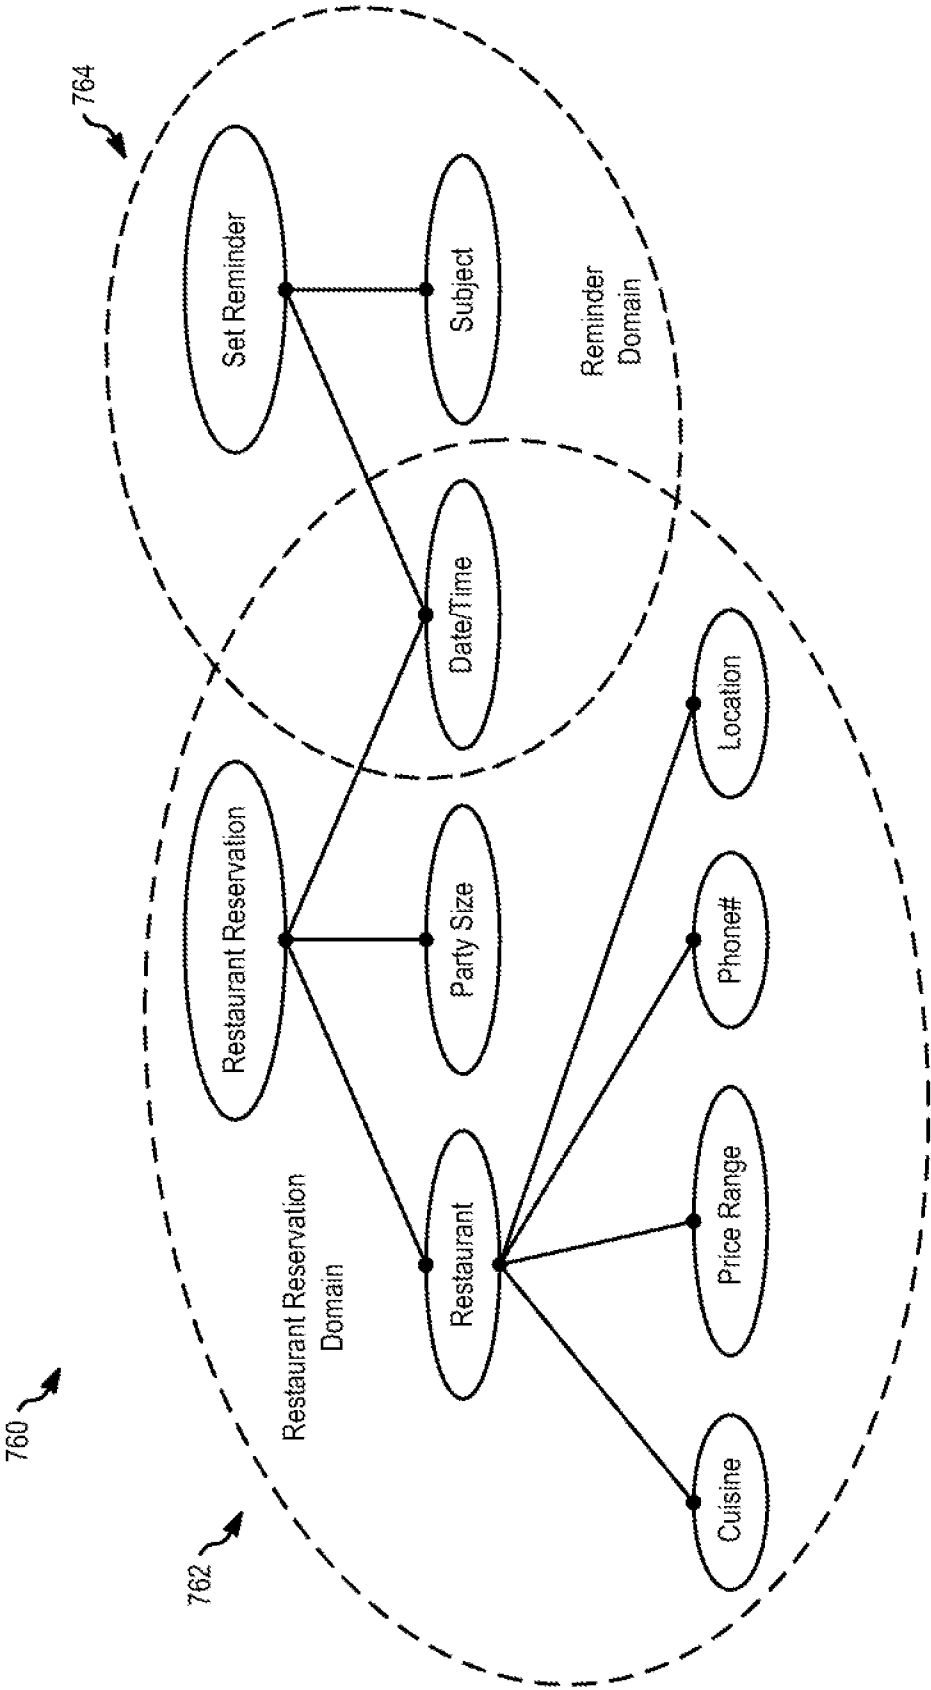


FIG. 7C

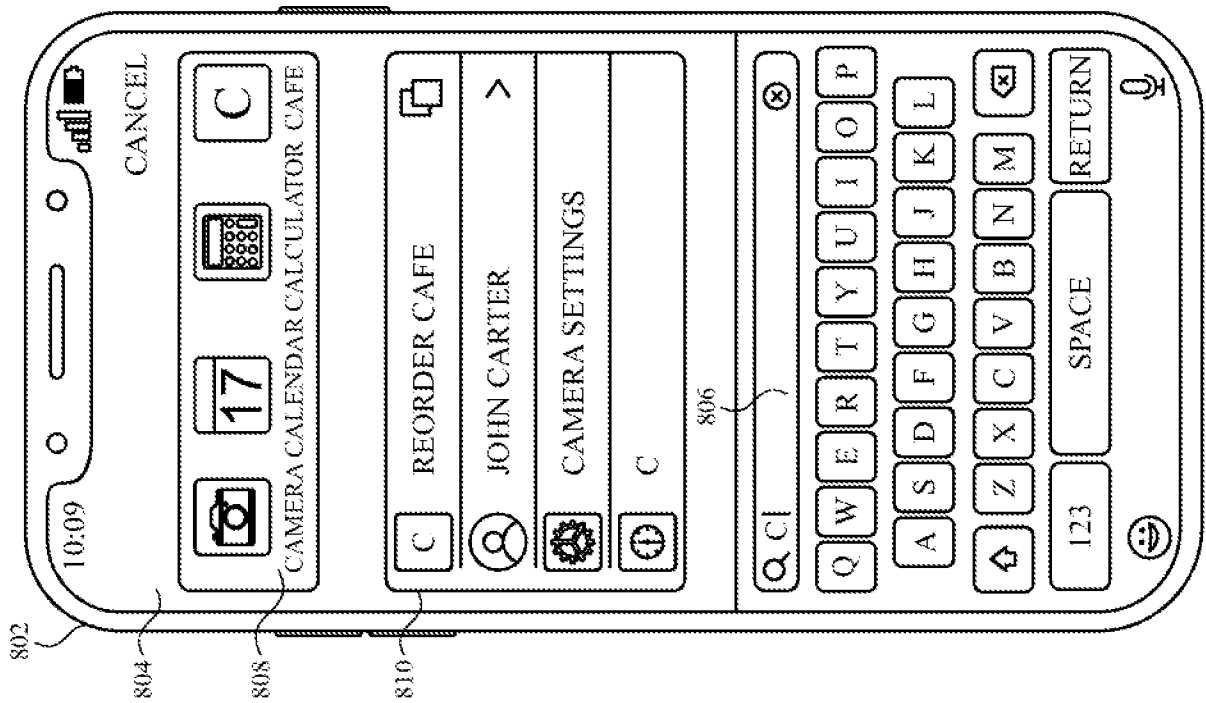


FIG. 8A

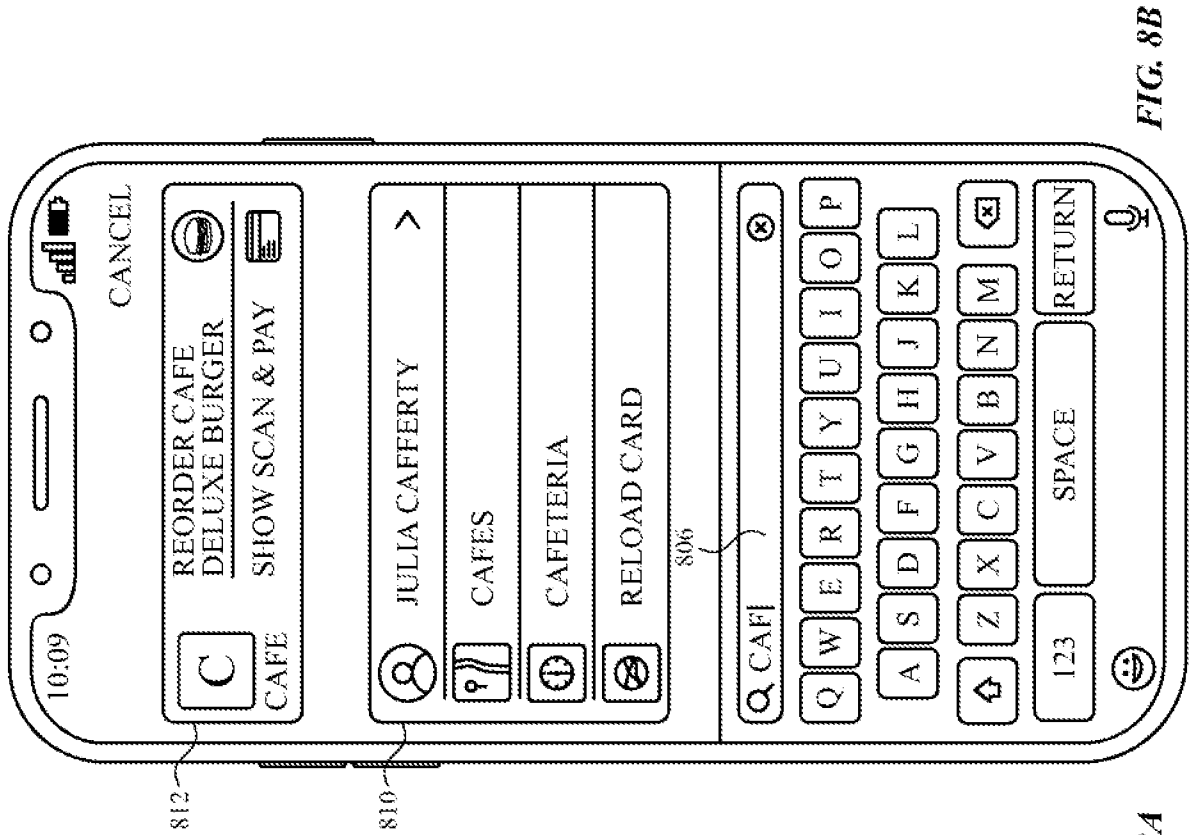
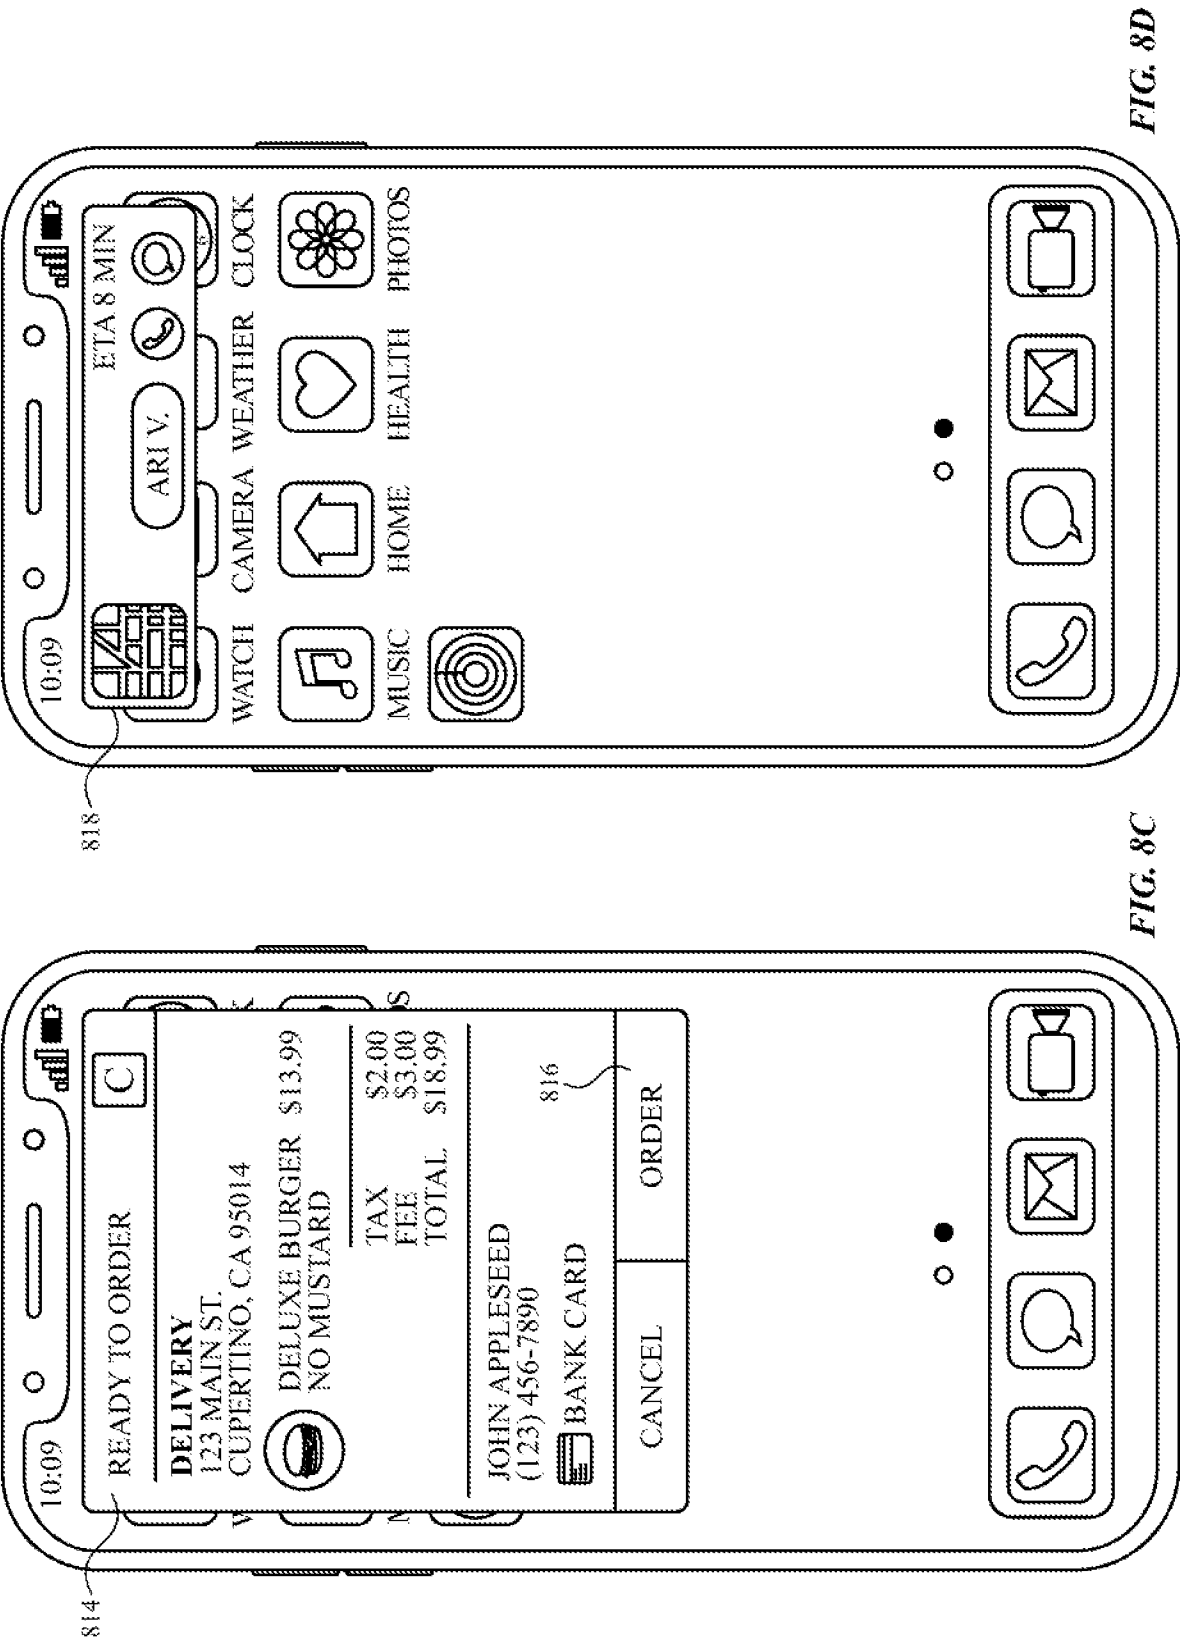


FIG. 8B



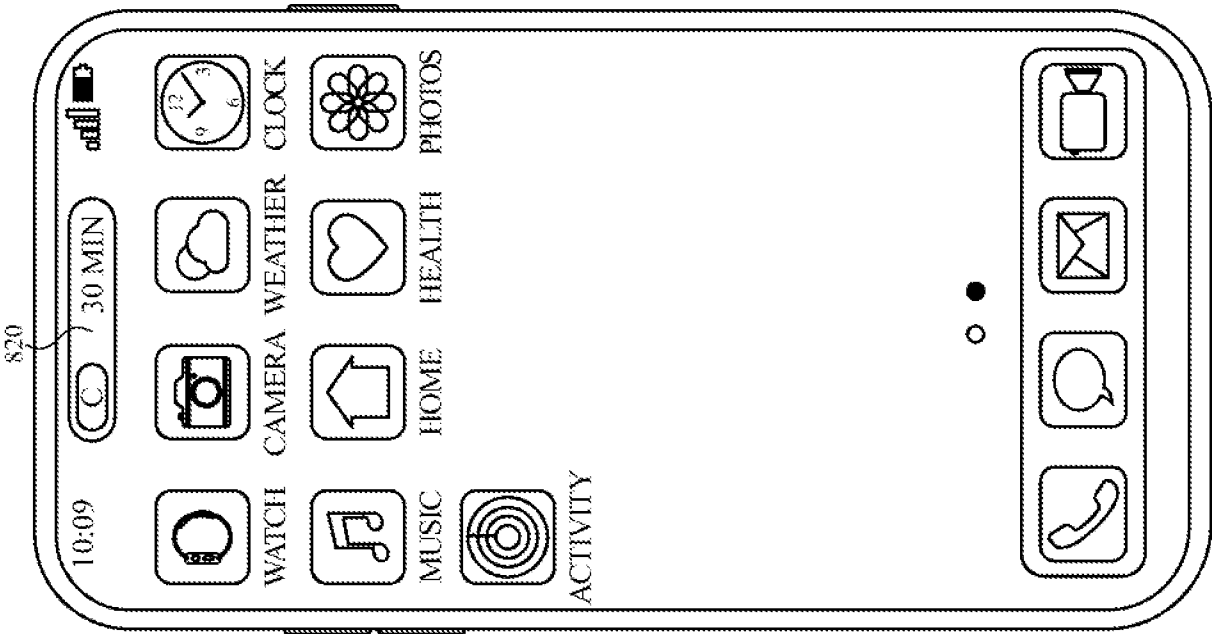


FIG. 8E

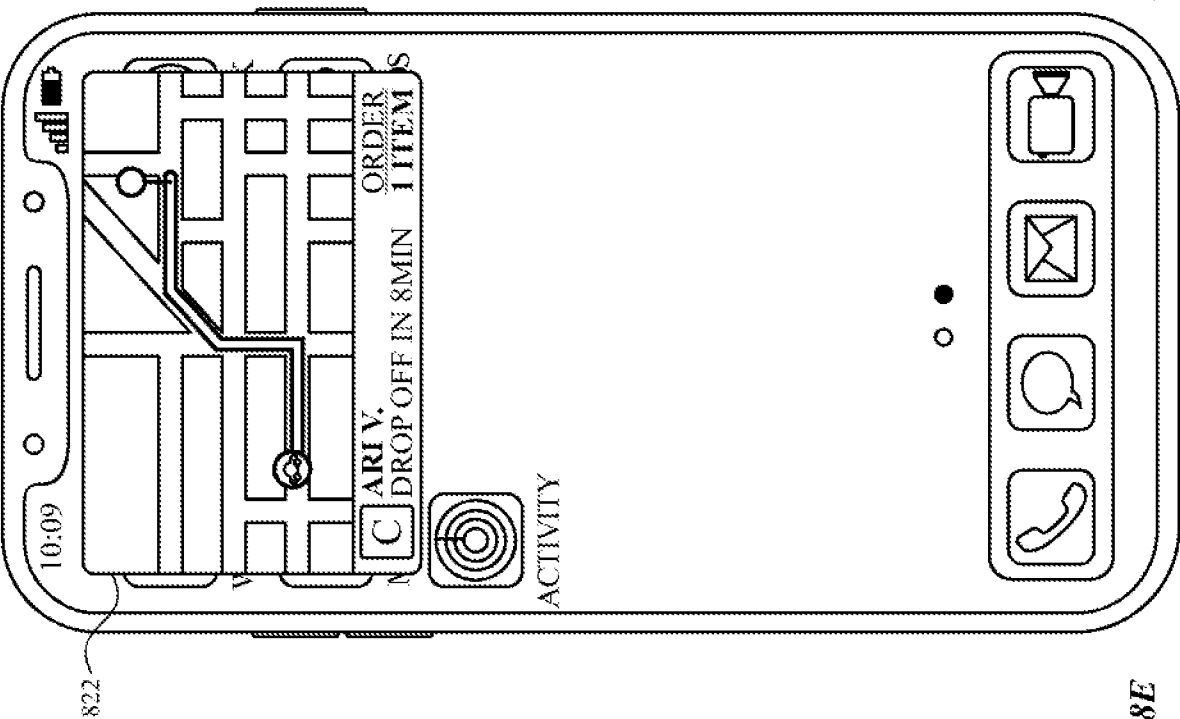
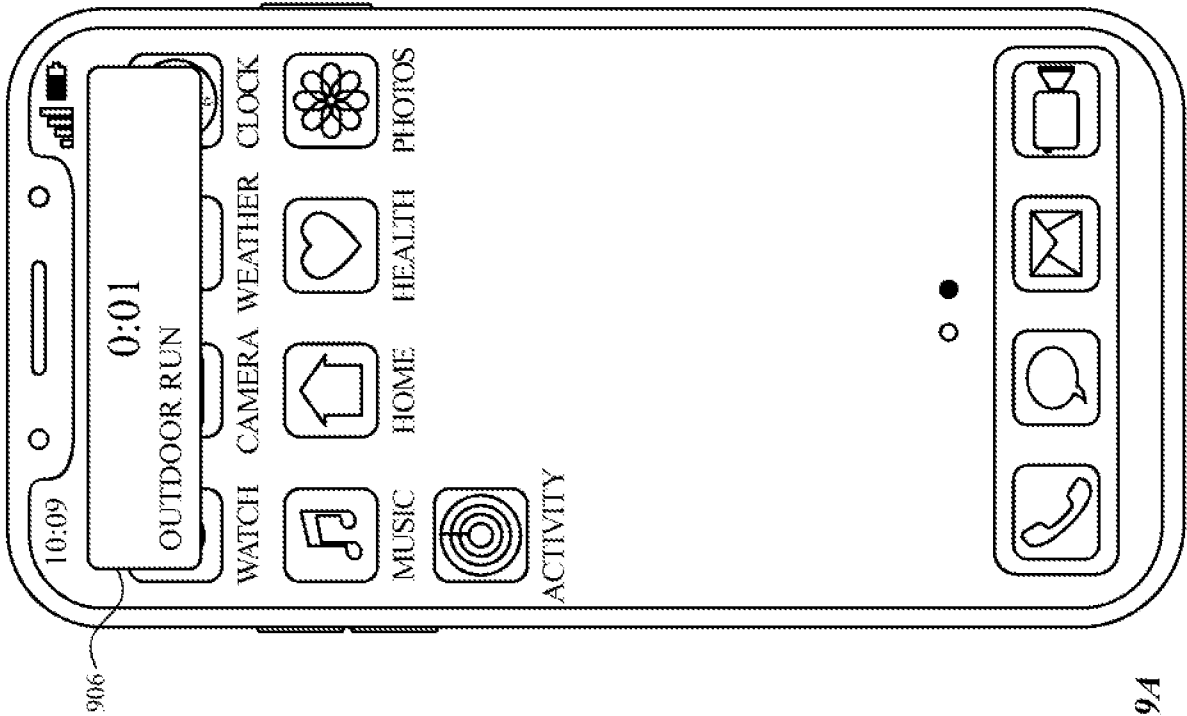
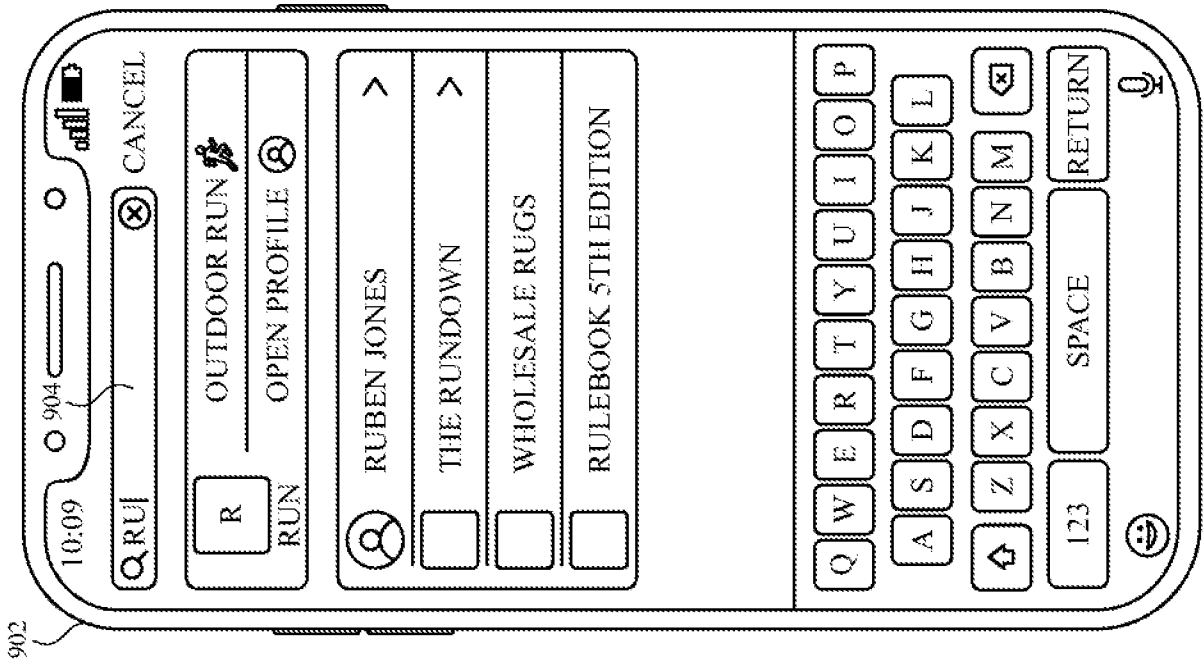
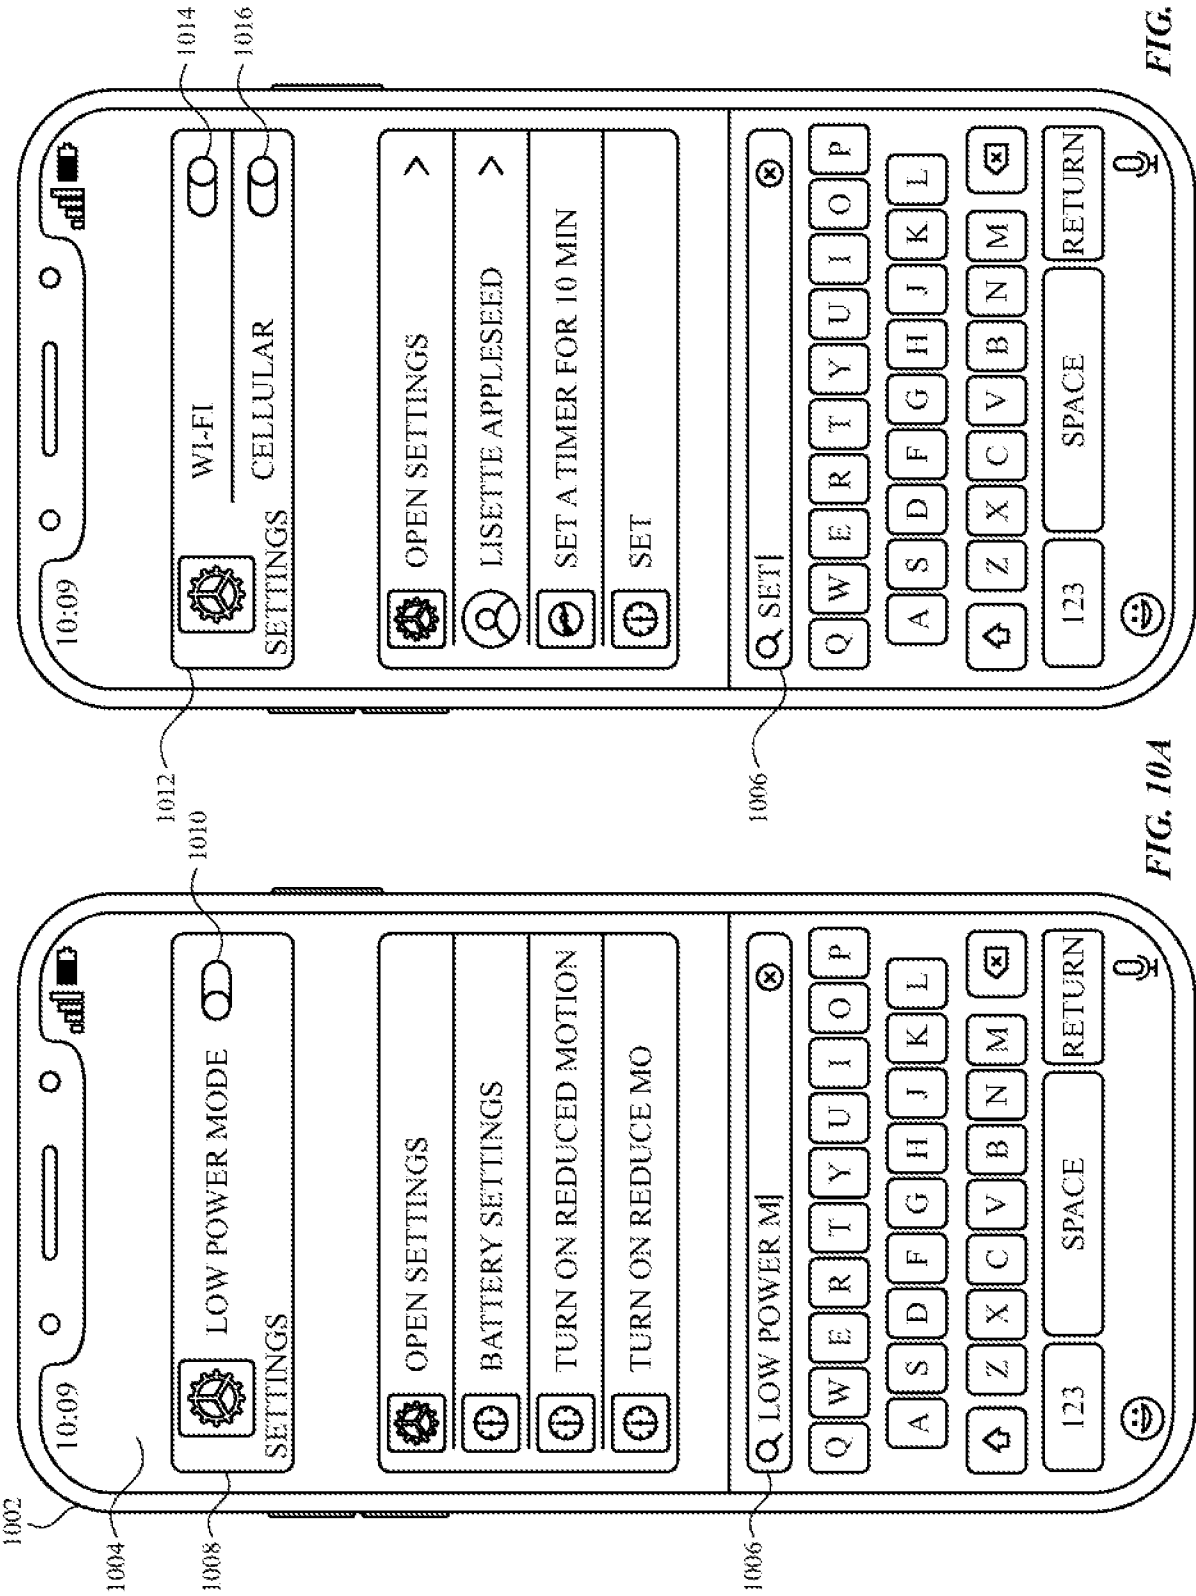
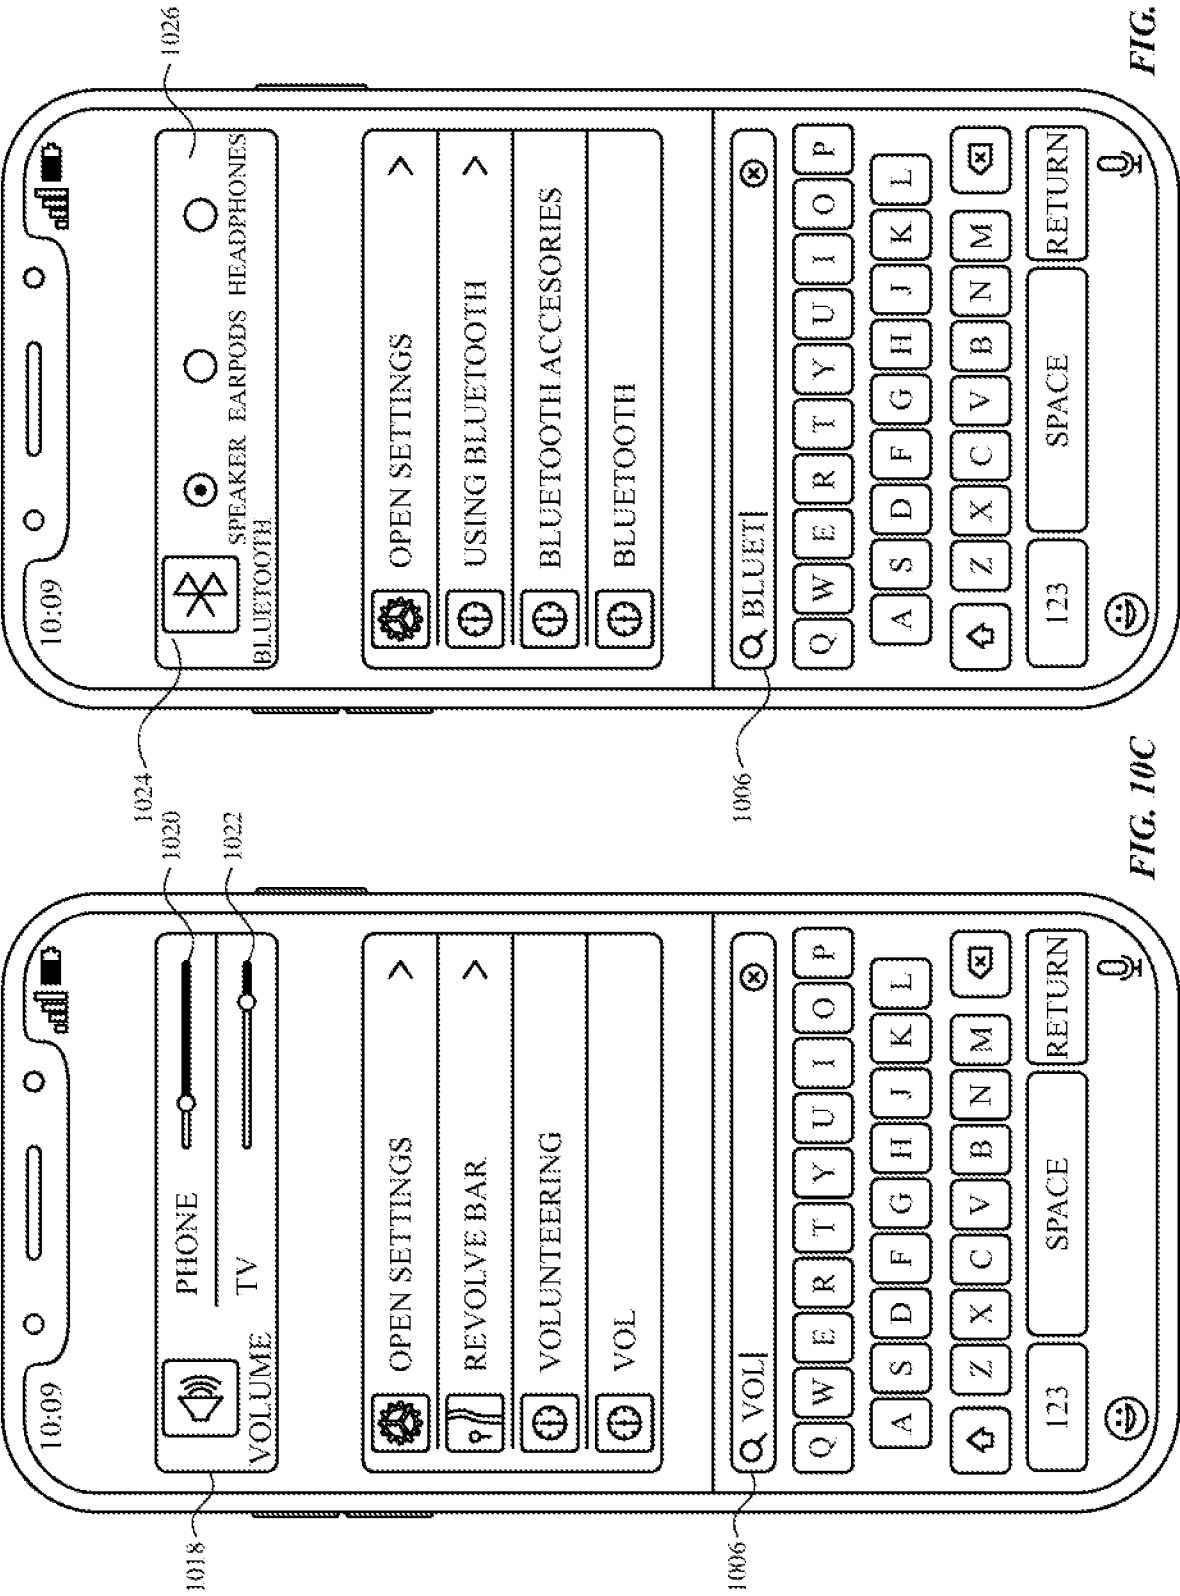


FIG. 8F







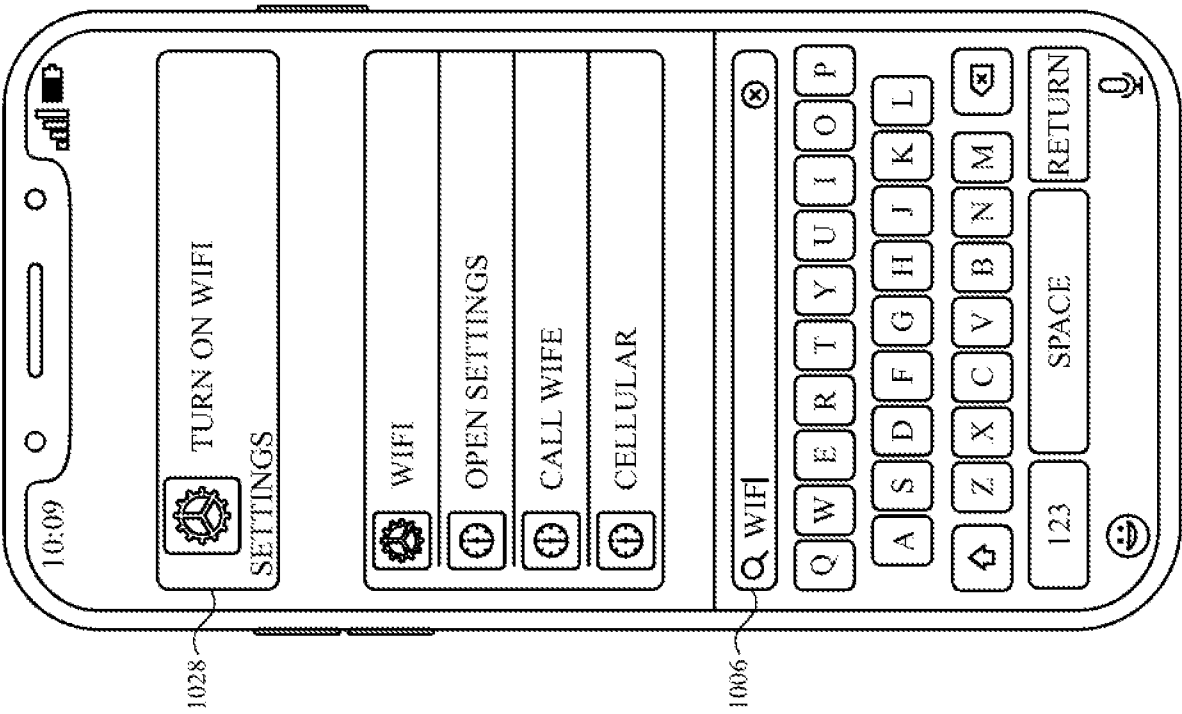
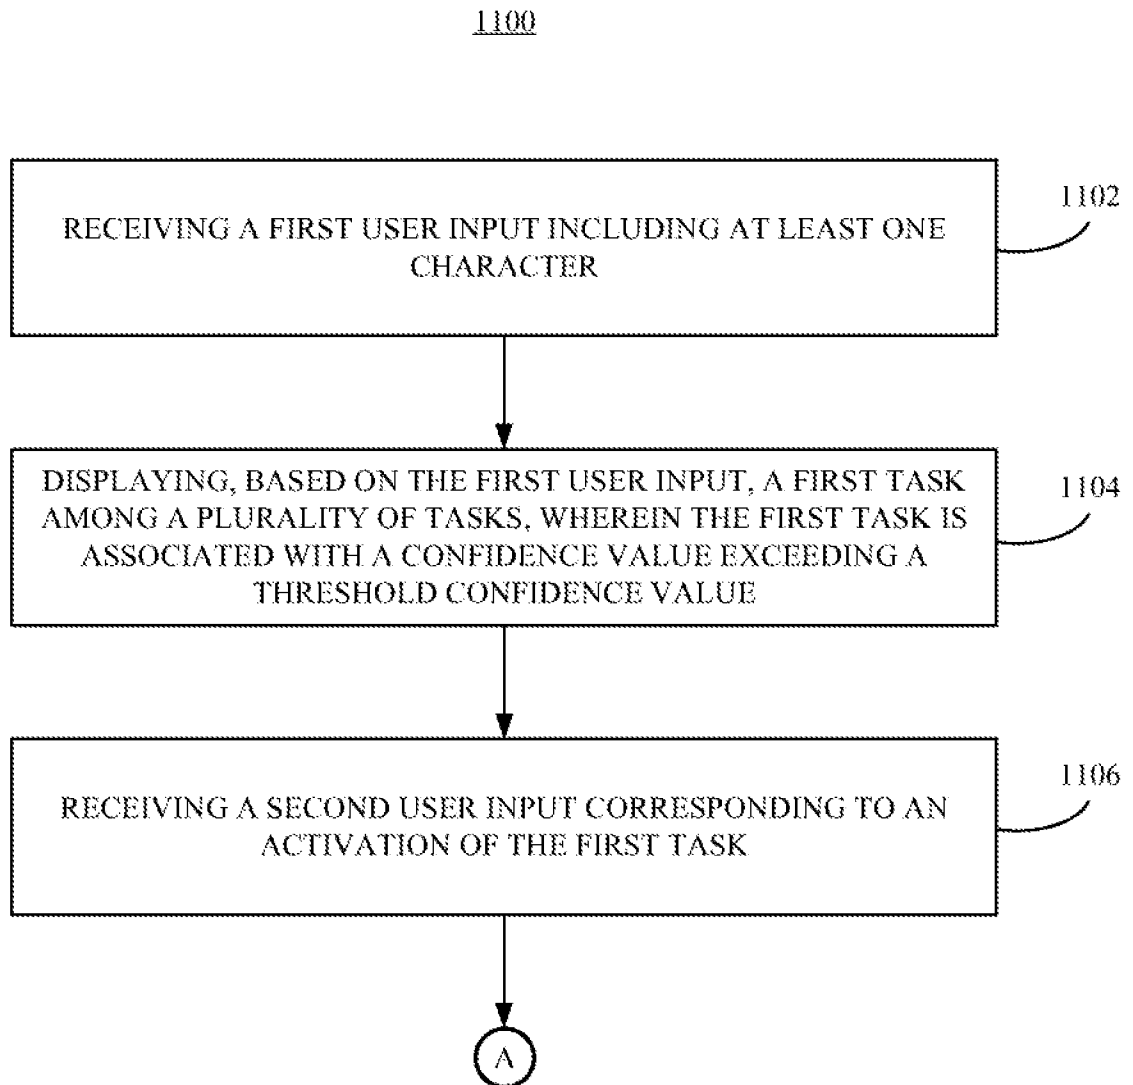
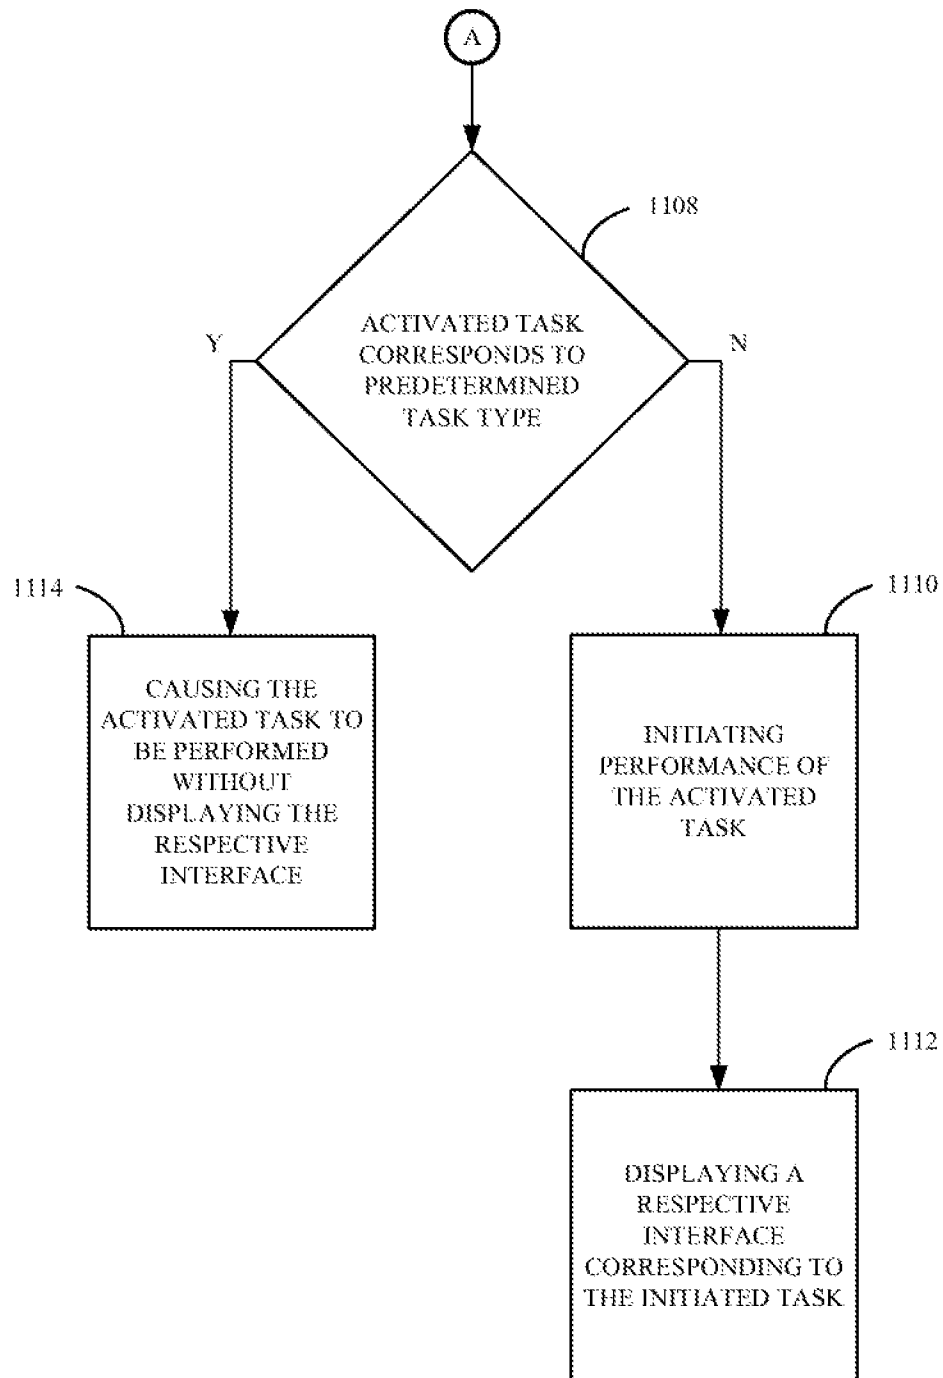
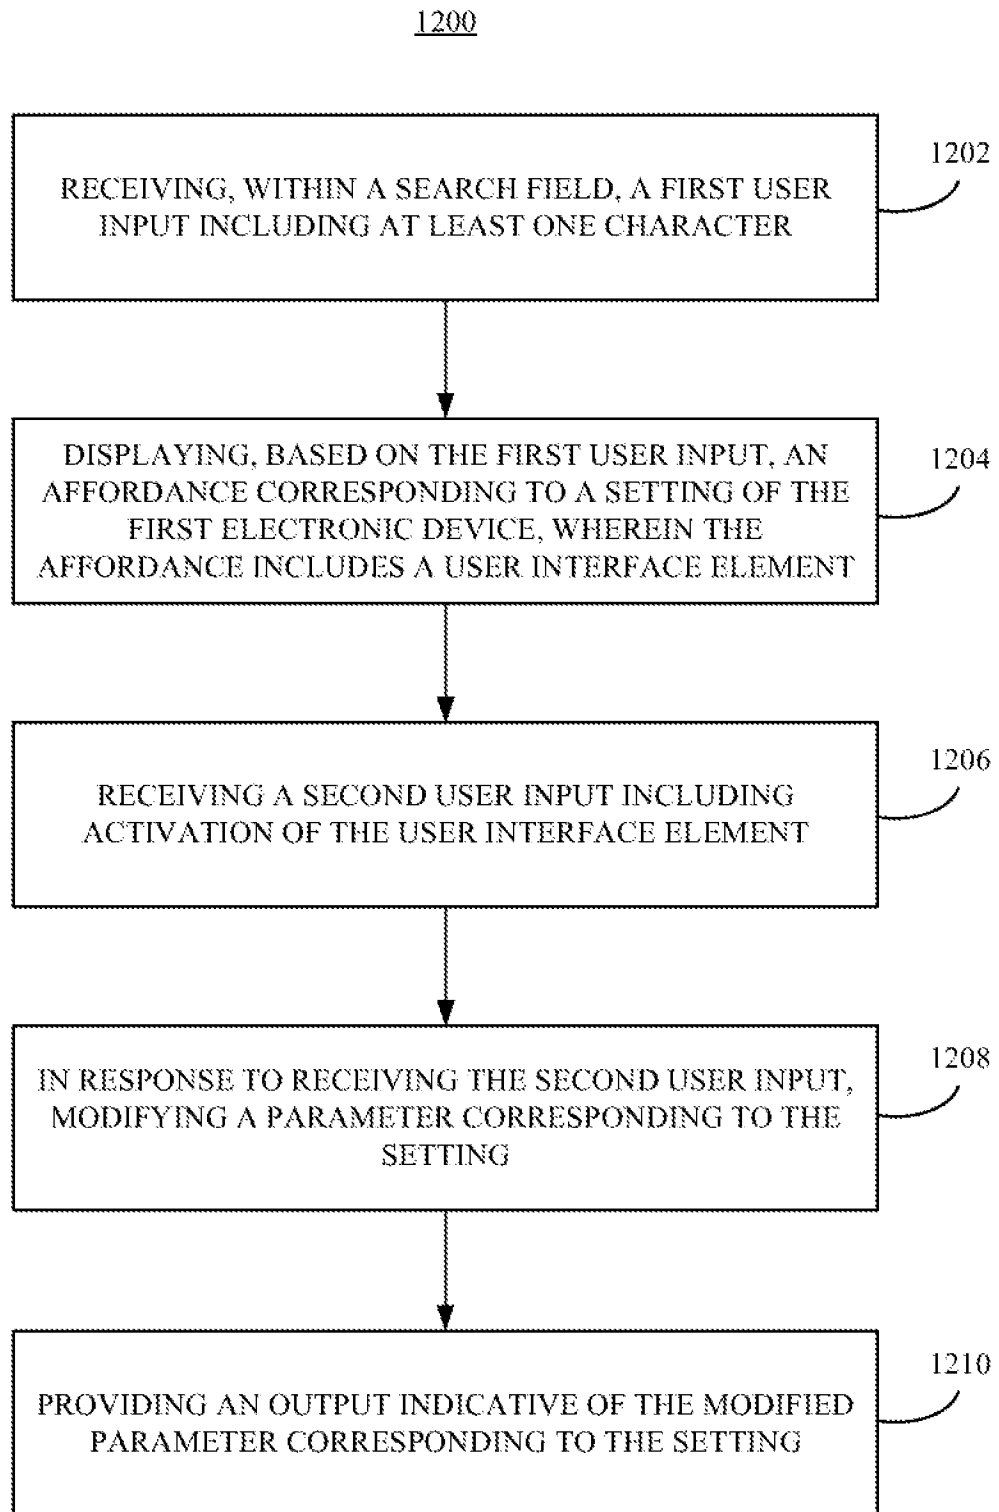


FIG. 10E

*FIG. 11A*

**FIG. 11B**

*FIG. 12*

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2023/020787

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F3/048 G06F3/04817 G06F3/0484 G06F16/242

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2015/183547 A1 (APPLE INC [US]) 3 December 2015 (2015-12-03)	1-4, 6-15, 17, 19-24
Y	abstract; figures 1A, 5A-5E, 7D, 7E paragraphs [0107], [0137], [0138], [0142], [0143], [0144], [0186] -----	5, 16, 18
Y	US 2015/300832 A1 (MOORE BRADFORD A [US] ET AL) 22 October 2015 (2015-10-22)	5
A	abstract; figure 11 paragraphs [0117] - [0122] -----	1-4, 6-24
Y	EP 2 416 564 A2 (LG ELECTRONICS INC [KR]) 8 February 2012 (2012-02-08)	16, 18
A	abstract; figure 39 paragraph [0264] ----- -/-	1-15, 17, 19-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 August 2023

Date of mailing of the international search report

25/10/2023

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2

NL - 2280 HV Rijswijk

Tel. (+31-70) 340-2040,

Fax: (+31-70) 340-3016

Authorized officer

Pfaffelhuber, Thomas

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2023/020787

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 584 481 A2 (SAMSUNG ELECTRONICS CO LTD [KR]) 24 April 2013 (2013-04-24) abstract; figures 3-5 paragraphs [0048], [0049] -----	1-24

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2023/020787

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims;; it is covered by claims Nos.:

1-24

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-24

Navigating and activating device tasks, wherein an interface is displayed which corresponds to the task type.

2. claims: 25-48

Modifying internal device settings (eg. power mode, WiFi on/off, speaker volume, etc.)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2023/020787

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015183547 A1	03-12-2015	EP 3103034 A1	14-12-2016
		EP 3876113 A1	08-09-2021
		US 2015347532 A1	03-12-2015
		US 2018189362 A1	05-07-2018
		US 2021109924 A1	15-04-2021
		WO 2015183547 A1	03-12-2015

US 2015300832 A1	22-10-2015	US 2015300832 A1	22-10-2015
		US 2017205243 A1	20-07-2017
		US 2019025070 A1	24-01-2019
		US 2019063940 A1	28-02-2019
		US 2020278213 A1	03-09-2020
		US 2021270623 A1	02-09-2021

EP 2416564 A2	08-02-2012	CN 102346630 A	08-02-2012
		EP 2416564 A2	08-02-2012
		US 2012026400 A1	02-02-2012
		US 2013268967 A1	10-10-2013

EP 2584481 A2	24-04-2013	CN 103049166 A	17-04-2013
		EP 2584481 A2	24-04-2013
		EP 3388961 A1	17-10-2018
		EP 3933555 A1	05-01-2022
		KR 20130041505 A	25-04-2013
		US 2013097549 A1	18-04-2013
		US 2018011844 A1	11-01-2018
		US 2020089654 A1	19-03-2020
		US 2021209062 A1	08-07-2021
		US 2023027759 A1	26-01-2023
		WO 2013058539 A1	25-04-2013
