



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :

H04N 7/16, H04Q 7/00

A1

(11) International Publication Number:

WO 00/56071

(43) International Publication Date: 21 September 2000 (21.09.00)

(21) International Application Number: PCT/US00/06029

(22) International Filing Date: 8 March 2000 (08.03.00)

(30) Priority Data:

09/271,599

17 March 1999 (17.03.99)

US

(71) Applicant: MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(72) Inventors: BURKE, Timothy, M.; 1811 Waverly Lane, Algonquin, IL 60102 (US). FULLER, Gregory, W.; 401 Prides Run, Lake in the Hills, IL 60102 (US).


(74) Agents: BOSE, Romi, N. et al.; Motorola Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: TELEPHONE ADAPTER AND TELEPHONE SYSTEM PROVIDING MULTIPLE TELEPHONE LINES

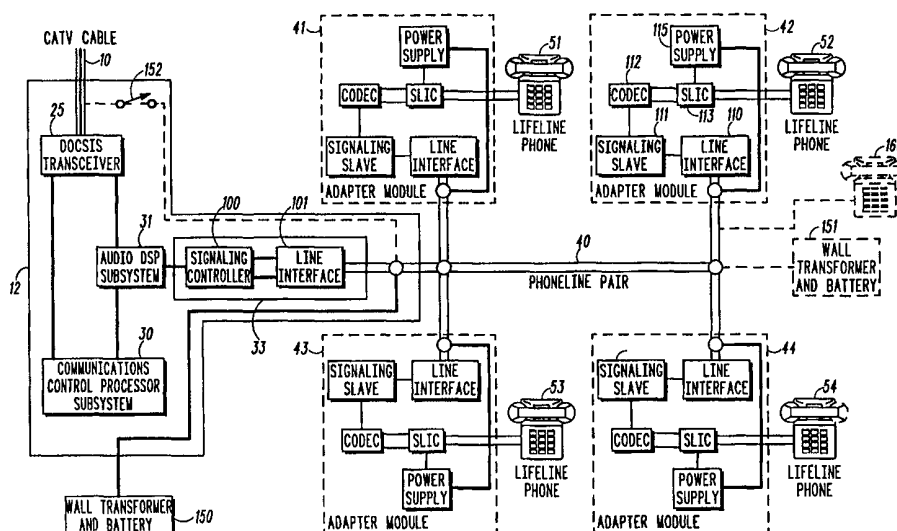

(57) Abstract

An adapter (42) for connecting a telephone (52) to a telephone wire (40) has a subscriber line interface circuit (SLIC 113) with a jack for connecting a telephone to the SLIC, a line interface (110) for coupling to a telephone line, a signaling circuit (111) coupled to the line interface for receiving and providing subscriber line signaling on the telephone line, a codec (112) coupled to the SLIC, performing a voice coding/decoding function; and a timing circuit (202) for time multiplexing and demultiplexing of digitized voice signals between the SLIC and the line interface.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Telephone Adapter and Telephone System Providing Multiple Telephone Lines

Field of the Invention

5 This invention relates to a telephone system for providing multiple telephone lines in a residence, a small office or similar environment and it relates to a telephone adapter for coupling a telephone to a telephone line.

Background of the Invention

10 In a typical residence, a single telephone line is distributed around a home with multiple telephone jacks in different rooms, so that one or more telephones can be connected to the telephone line. The telephone line is hard-wired to a line entering the premises. If further telephone lines are
15 distributed to various wall connection points or jacks around the house or building.

 Cable operators have identified an opportunity to provide telephones to the home over a co-axial or hybrid fiber cable. Such cables are relatively broad-band and can deliver more than one telephone line to the home. It
20 remains necessary, however, to hard-wire each telephone line from the point of entry to the various outlets in the home or premises. This need to hard-wire additional lines is a disincentive for customers to subscribe to additional services. The addition of new lines to a home or other premises could involve expensive feeding of cables, installation of jacks and even
25 redecorating after installation. In a small office environment there is further disincentive of disruption caused by these works. Alternatively, inconvenient, unsightly and hazardous wires are laid out across carpets and along walls in an unsatisfactory manner.

Radio solutions provide the ability to convey signals from a point of entry to a building to multiple point points throughout the building without the need for laying of additional cables, but radio solutions have drawbacks such as limited availability of radio spectrum, privacy and cross-talk issues, room-
5 to-room penetration issues and expense.

There is a need for an improved manner of delivering telephone services to telephones or other telephony terminals in a residence, small office, building or similar environment.

10 **Brief Description of the Drawings**

FIG. 1 is a diagram illustrating a telephone system in accordance with the present invention;

FIG. 2 is a further system diagram illustrating elements of the system of FIG. 1 in greater detail;

15 FIG. 3 is a block diagram illustrating elements of an adapter module of FIG. 2 in greater detail;

FIG. 4 is an illustration of an adapter module for a wireless interface;

FIG. 5 is an illustration of an adapter module for a telephone and data terminal;

20 FIG. 6 is an illustration of an adapter module for a data terminal.

Detailed Description of a Preferred Embodiment

Referring to FIG. 1, a telephone and cable system is illustrated comprising a co-axial cable 10 entering a building 11, such as a home, small
25 office or similar premises, and connected, at a first point of connection, to a cable phone connector box 12. In the illustration, the cable phone connector box 12 is located inside the premises 11, but it should be understood that the box 12 can equally be mounted on an external wall of the premises 11. The

cable 10 emerges from the cable phone connector box 12 in the form of an indoor co-axial cable 15 and serves a television 16 and other video boxes in the home in a manner well known in the art. A switch 17 selectively connects the outdoor cable to the indoor cable 15. A coupler 20 is coupled
5 to the cable 10 for the purposes of coupling telephone signals between the cable 10 and the DOCSIS (Data Over Cable System Interface Specification, also known as MCNS, Multimedia Cable Network System) transceiver 25. The DOCSIS transceiver 25 provides a broadband medium 26 for delivery of telephone services to the home. The broadband medium 26 is capable of
10 delivering four, six or more separate telephone lines. It should be understood that other broadband media can deliver these telephone lines to the home in the place of the co-axial cable or a DOCSIS transceiver. Examples include ISDN, broadband wireless and satellite delivery systems.

The broadband medium 26 is connected to a communications control
15 processor subsystem 30, which in turn is connected to an audio digital signal processor (DSP) sub-system 31 and a data/PC interface 32. A telephony interface 33 is connected between the audio DSP 31 and the data /PC interface 32. The data/PC interface 32 is connected to a regular copper (or other electrical conductor) telephone line 40 extending throughout the
20 premises.

The telephone line 40 is typically a pair of parallel copper wires encased in a plastic sheath. Such a typical telephone line suffers from high noise and is therefore relatively narrowband (relative to the broadband medium 26 or the co-axial cable 10). Such a telephone line is capable of
25 conveying analog audio telephone signals in the 300 Hz to 3 kHz range (baseband) and in addition is capable of carrying some digital signals in a super-audio band above approximately 3 kHz. These band ranges are not necessarily exact, neither are they critical. A human ear maybe of capable

of hearing signals above 3 kHz and the term "super-audio" is not necessarily intended to mean strictly ultrasonic, but it is a useful feature of the arrangement that the super-audio digital signals can, if desired, co-exist with baseband analog signals. Thus, user of the baseband analog signal may be
5 unaware of the super-audio signal being conveyed on the same line. The super-audio signal, if heard, will sound like high-pitched white noise.

Connected to the telephone line 40 are multiple telephone adapters 41 to 44 and multiple data input/output adapters 45, 46 and 47. Telephones (telephone terminals) 51 to 54 are connected to the adapters 41-44
10 respectively. Data terminals, personal computers or similar equipment 55 and 56 are connected to the data by I/O adapters 45 and 46. A data terminal 57, such as a printer, is connected to the data I/O adapter 47. The data I/O adapter 47 is preferably a HPNA (Home Phoneline Network Alliance) compatible data interface, either integrated with the data terminal
15 57 or external thereto.

In FIG. 1, the data/PC interface is illustrated as being connected to the telephone line 40, and the telephony interface 33 is illustrated as being connected to the data/PC interface 32, however, this arrangement is not critical. The telephony interface 33 and data/PC interface 32 can both be
20 connected to the telephone line 40 or it can be the telephony interface 33 that is connected to the telephone line 40. Indeed it is not necessary to have both the data/PC interface 32 and the telephony interface 33.

In greater detail, FIG. 2 shows the cable phone box 12 and the adapter modules 41-44. In FIG. 2, just the telephony interface 33 is shown
25 within the cable phone box 12 for the purposes of illustration. The telephony interface 33 comprises a signaling controller 100 and a line interface 101.

Each of the adapter modules, for example module 42, comprises a line interface 110 coupled to the telephone line 40, a signaling slave circuit

111 coupled to the line interface 110, a codec 112 (i.e. a coding/decoding circuit or DSP) coupled to the signaling slave 111, a subscriber line interface card (SLIC) 113 coupled to the codec 112 and a power supply 115 coupled to the telephone line 40 and coupled to the SLIC 113. The associated
5 telephone (e.g. telephone 52) is coupled to the SLIC 113. The SLIC 113 is a standard element that need not be described in detail. The signaling slave 111 is preferably a digital European cordless telephone (DECT) signaling integrated circuit.

Fig. 2 shows a wall transformer and battery 150 associated with the
10 cable phone box 12 supplying DC power to the telephone line 40. As an alternative to the wall transformer and battery 150, a wall transformer and battery 151 can be introduced within the premises. As a further alternative, a switch 152 with appropriate cabling connects the co-axial cable 10 to the telephone line 40 to provide power to the telephone line 40 from the co-axial
15 cable 10.

The operation of the system is now described. In operation, with no incoming or outgoing calls, all the telephone adapters 41-44 are powered by DC power from the telephone line 40, ready to receive an incoming call or to make an outgoing call.

20 At least two discrete telephone channels and preferably four (or six) discrete telephone channels are provided from a network (not shown) to the co-axial cable 10. Each telephone line has a discrete telephone number associated therewith.

In the case of an incoming call on one of the telephone lines, the
25 communications control processor subsystem 30 responds to the incoming call and causes the audio DSP subsystem 31 to enter an active mode ready for digitization and coding of incoming voice. At the same time the communications control processor subsystem 30 informs the signaling

controller 100 of the existence of the incoming call and the identity of the telephone line on which the call is being received (identified according to the telephone number dialed by the calling party, which determines the line or channel over which the call arrives at the premises). Signaling controller 100
5 generates a data packet modulated as a Gaussian filtered non-return-to-zero modulated signal, modulated in the super-audio band in the form of a time division multiplex packet with a packet header. The packet header identifies a start of an incoming call and identifies the telephone line or channel over which the call is received (e.g. line 1, line 2 etc. or telephone number 847-
10 576 1234, 847-576 1235 etc.).

One or more of the adapter modules 41-44 is programmed to identify the telephone number (or simply line number, e.g. line 1, 2, 3, or 4) that is identified in the packet header. The case will be considered where adapters 42 and 44 are programmed to respond to this telephone line. The signaling
15 slave 111 in adapter 42 and the corresponding signaling slave in adapter 44 identifies the packet header and delivers a signal to the SLIC 113 (via the codec 112). The SLIC 113 provides a ringing signal to the telephone 32 in a manner well known in the art. Simultaneously, the corresponding adapter 44 causes telephone 54 to ring.

20 When a user lifts the receiver of telephone 52 and puts that telephone in an off-hook condition, the SLIC delivers an off-hook signal to the signaling slave 111, which generates a packet identifying the off-hook condition. This packet is delivered by the line interface 110 to the line interface 101 of the cable phone connector box 12. The signaling controller 100 identifies the
25 off-hook condition and therefore the completed connection and informs the network accordingly. The audio DSP subsystem 31 now encodes audio from the cable 10 and the signaling controller 100 delivers this in TDM fashion to the signaling slave 111. The signaling slave 111 delivers the encoded audio

to the codec 112 which converts it to analog form and delivers it to telephone 52 via the SLIC 113.

Referring to Fig. 3, details of the interface 42 are shown. The SLIC 113 is coupled via an analog-to-digital (A/D) converter 220 to a coding function 200 in the codec, which is coupled to a packet header handling circuit 210 in the signaling slave 111. The packet header handling circuit 210 is coupled to a decoding function 201 in the codec 112, which in turn is coupled to the SLIC 113 via a digital-to-analog (D/A) circuit 221. The signaling slave has a TDM/TDD timing control circuit 202 coupled to the packet header handling circuit 210 and has a modulator/demodulator (modem) circuit 212 coupled between the TDM/TDD timing control circuit 202 and the line interface 110.

A telephone jack socket 240 or other connector is connected to the SLIC for receiving a telephone jack plug or other connector. A telephone jack plug 230 or other connector is connected to the line interface 110 for plugging into a wall-mounted or similar telephone jack socket or other connector.

The coding function 200 and the decoding function 201 need not be described in detail. Suitable coding includes PCM or ADPCM coding. The modem function 212 need not be described in detail. Suitable modulation includes Gaussian filtered non-return-to-zero modulation or Gaussian minimum shift keying modulation or QPSK or the like.

In operation, audio signals from the telephone 54 are digitized by the A/D converter 220 and coded by the coding function 200 to provide reduced bandwidth encoded voice signals. These are packetized and a packet header is added in packet header handling circuit 210. The timing of transmission of the resultant packets is controlled by TDM/TDD timing circuit 202 and the signals are modulated by modem circuit 212 and sent out over

the telephone line 40 via line interface 110. In reverse, packets of encoded audio signals are received via the line interface 110 at times determined by TDM/TDD timing circuit 202 and demodulated by modem circuit 212. Packet headers are removed by packet header handling function 210, from which
5 signaling slave 111 is able to determine if the signals are intended for this adapter module or another adapter module. If the signals are indeed intended for this adapter module, the packet payloads are delivered to decoding function 201, decoded to digitized audio, converted to analog form in D/A converter 221 and delivered to the telephone 54 via SLIC 113.

10 It will be understood by one of ordinary skill in the art that elements and functions of FIG. 3 can be provided in different forms and arrangements. For example, the codec 112 and signaling slave 111 can be integrated in a single DSP or dedicated ASIC, or functions of the signaling slave (e.g. the packet header function and/or the TDM/TDD function) can be transferred
15 into the codec 112. The SLIC 113 can be integrated with the codec 112. The line interface 110 may have an amplifier or driver circuit, but any such function can be integrated with the signaling slave and the line interface 110 can amount to no more than a connector.

Referring now to FIG. 4 an adapter module 400 similar to adapter
20 module 42 is shown, where the SLIC is replaced by a cordless base RF transceiver 401. The cordless base RF transceiver 401, which is an element well known in the art, can communicate with cordless handsets 402 and 403.

Referring to FIG. 5, an adapter module similar to that adapter module 42 of FIG. 2 is illustrated, but in addition to the line interface 110, a HPNA
25 line interface 500 is connected to the telephone jack 502 and a 10baseT or universal serial bus controller 501 is connected to the HPNA line 500. A computer or other data terminal 55 is connected to the controller 501.

Referring to FIG. 6, an alternative adapter module is shown having an HPNA line interface 600 and a parallel port controller 601 coupled to the HPNA line interface. A dedicated data device 57 is connected to the parallel port controller 601. If any one of these devices of FIGs. 4-6 is connected to the telephone line 40, it is readily able to communicate with the cable phone connector box 12 or with other devices connected to the telephone line using the TDM protocol on the telephone line.

Certain other features of the system are now described with reference again to FIG. 1. Using software protocols contained within the communications control processor subsystem 30 or a microcontroller contained within the signaling controller 100, an advance set of PBX-like (private branch exchange) features are provided without the addition of other components. For example, since multiple lines of service (or phone numbers) are provided over a common interface, any telephone connected to an adapter module 41 can connect to any other telephone on another adapter module 42-44 by using the DTMF (dual tone multi-frequency) keypad on the phone. If a phone is assigned to line number 1 and the user wishes to connect (on a temporary or permanent basis) to line number 2, a simple key entry, such as # 2, can be entered. A DTMF detector resident in the signaling slave 111 converts the DTMF signal into an appropriate digital control signal which is sent back to the controller 100 which realigns time slots within the TDM frame to "bridge" line 2 with line 1. Thus, ordinary telephones may be used for dynamic line assignment rather than dedicated key or PBX telephones.

Another PBX-like feature is received-call hunting. If a call is received for line 1 and line 1 is currently in progress on another call, the incoming call can be automatically routed to another line. Thus, the control processor 20 can "hunt" for a vacant line among all of the lines provisioned and terminate

the call (ring) on a vacant one. Intelligent control and dynamic time slot assignment contained within the cable phone enables this type of operation.

- Other features include an intercom and conferencing. With the intercom feature, users can signal from one adapter module to another
- 5 without consuming network resources. In conferencing, an adapter module take on the characteristics of an "extension" phone by simple time slot assignments. Thus, in a building where multiple extensions of the same line are required, adapter modules are programmed to logically connect to the same line (or telephone number) eliminating the need for additional wiring.

10

Claims

1. An adapter for connecting a telephone to a telephone wire,
comprising:
 - 5 a subscriber line interface circuit (SLIC) with a connector for
connecting a telephone to the SLIC;
 - a line interface for coupling to a telephone line;
 - a signaling circuit coupled to the line interface for receiving and
providing subscriber line signaling on the telephone line;
 - 10 a codec coupled to the SLIC, performing a voice coding/decoding
function; and
 - a timing circuit for time multiplexing and demultiplexing of digitized
voice signals between the SLIC and the line interface.
- 15 2. The adapter of claim 1 further comprising a power circuit coupled to
the line interface for drawing power from the telephone line and coupled to
the SLIC, the signaling circuit, the codec and the timing circuit for powering
the SLIC, the signaling circuit, the codec and the timing circuit.
- 20 3. The adapter of claim 1 further comprising a mains power circuit for
drawing power from a mains power supply and coupled to the SLIC, the
signaling circuit, the codec and the timing circuit for powering the SLIC, the
signaling circuit, the codec and the timing circuit.
- 25 4. The adapter of claim 1, wherein the timing circuit time multiplexes and
demultiplexes the digitized voice signals between the SLIC and the line
interface using a time division duplex protocol.

5. The adapter of claim 1, wherein the codec has a signaling slave circuit coupled thereto for performing the time multiplexing and demultiplexing.

6. The adapter of claim 1, wherein digitized voice signals to and from the
5 telephone line are modulated and demodulated using Gaussian filtered non-return-to-zero modulation.

7. The adapter of claim 1, wherein digitized voice signals to and from the
telephone line are modulated and demodulated using Gaussian minimum
10 shift keying modulation.

8. The adapter of claim 1, further comprising means for receiving a dual
tone multi-frequency signal from a telephone and converting the dual tone
multi-frequency signal to a digital signal on the telephone line.

15

9. A telephone system comprising:

a broadband medium interface unit for coupling to a relatively
broadband medium capable of conveying multiple telephone channels to the
broadband medium access unit from a telephone network;

20 a relatively narrowband telephone line coupling the broadband
medium access unit to a plurality of telephone adapters, each having means
for coupling a telephone thereto;

wherein the broadband medium interface unit comprises:

25 a digital signal processor for processing signals from the
broadband medium and delivering them to the telephone line as
digitized voice carried by super-audio time divided digital signals, and
for processing super-audio time divided digital signals from the

telephone line and delivering them to the broadband medium as broadband medium telephone signals;

signaling circuitry for processing subscriber line signaling from the broadband medium and converting same to packetized signaling associated with the super-audio time divided digital signals on the relatively narrowband telephone line; and

wherein each telephone adapter comprises:

a subscriber line interface circuit (SLIC) connectable to a telephone;

a line interface coupled to the telephone line;

a codec coupled to the SLIC, performing a voice coding/decoding function; and

a timing circuit for time multiplexing and demultiplexing of digitized voice signals between the SLIC and the line interface.

10. The system of claim 9 wherein each adapter comprises a power circuit coupled to the SLIC, the signaling circuit, the codec and the timing circuit for powering the SLIC, the signaling circuit, the codec and the timing circuit.

11. The system of claim 9, further comprising an analog telephone coupled to the SLIC, the signaling circuit, the codec and the timing circuit for powering the SLIC, the signaling circuit, the codec and the timing circuit.

12. The system of claim 11 wherein each adapter comprises an independent power source for supplying power to the SLIC, the signaling circuit and the codec of that adapter, independent of power from the telephone line.

13. The system of claim 12 wherein the independent power source is a mains power circuit for drawing power from a mains power supply.


5 14. The system of claim 9, wherein the super-audio time divided digital signals are conveyed between the broadband medium interface unit and the telephone adapters using a time division duplex protocol.

10 15. The system of claim 9, wherein digitized voice signals between the broadband medium interface unit and the telephone adapters are modulated and demodulated by the codec using Gaussian filtered non-return-to-zero modulation.

15 16. The system of claim 9, further comprising means at the signaling circuitry for bridging a logical communication channel to a first telephone line adapter with a logical communication channel to a second telephone line adapter to provide a time division multiplex connection between first and second telephones connected to the first and second telephone line adapters.

20

17. The system of claim 16, wherein each telephone adapter comprises means for receiving a dual tone multi-frequency signal from a telephone and converting the dual tone multi-frequency signal to a digital signal on the telephone line.

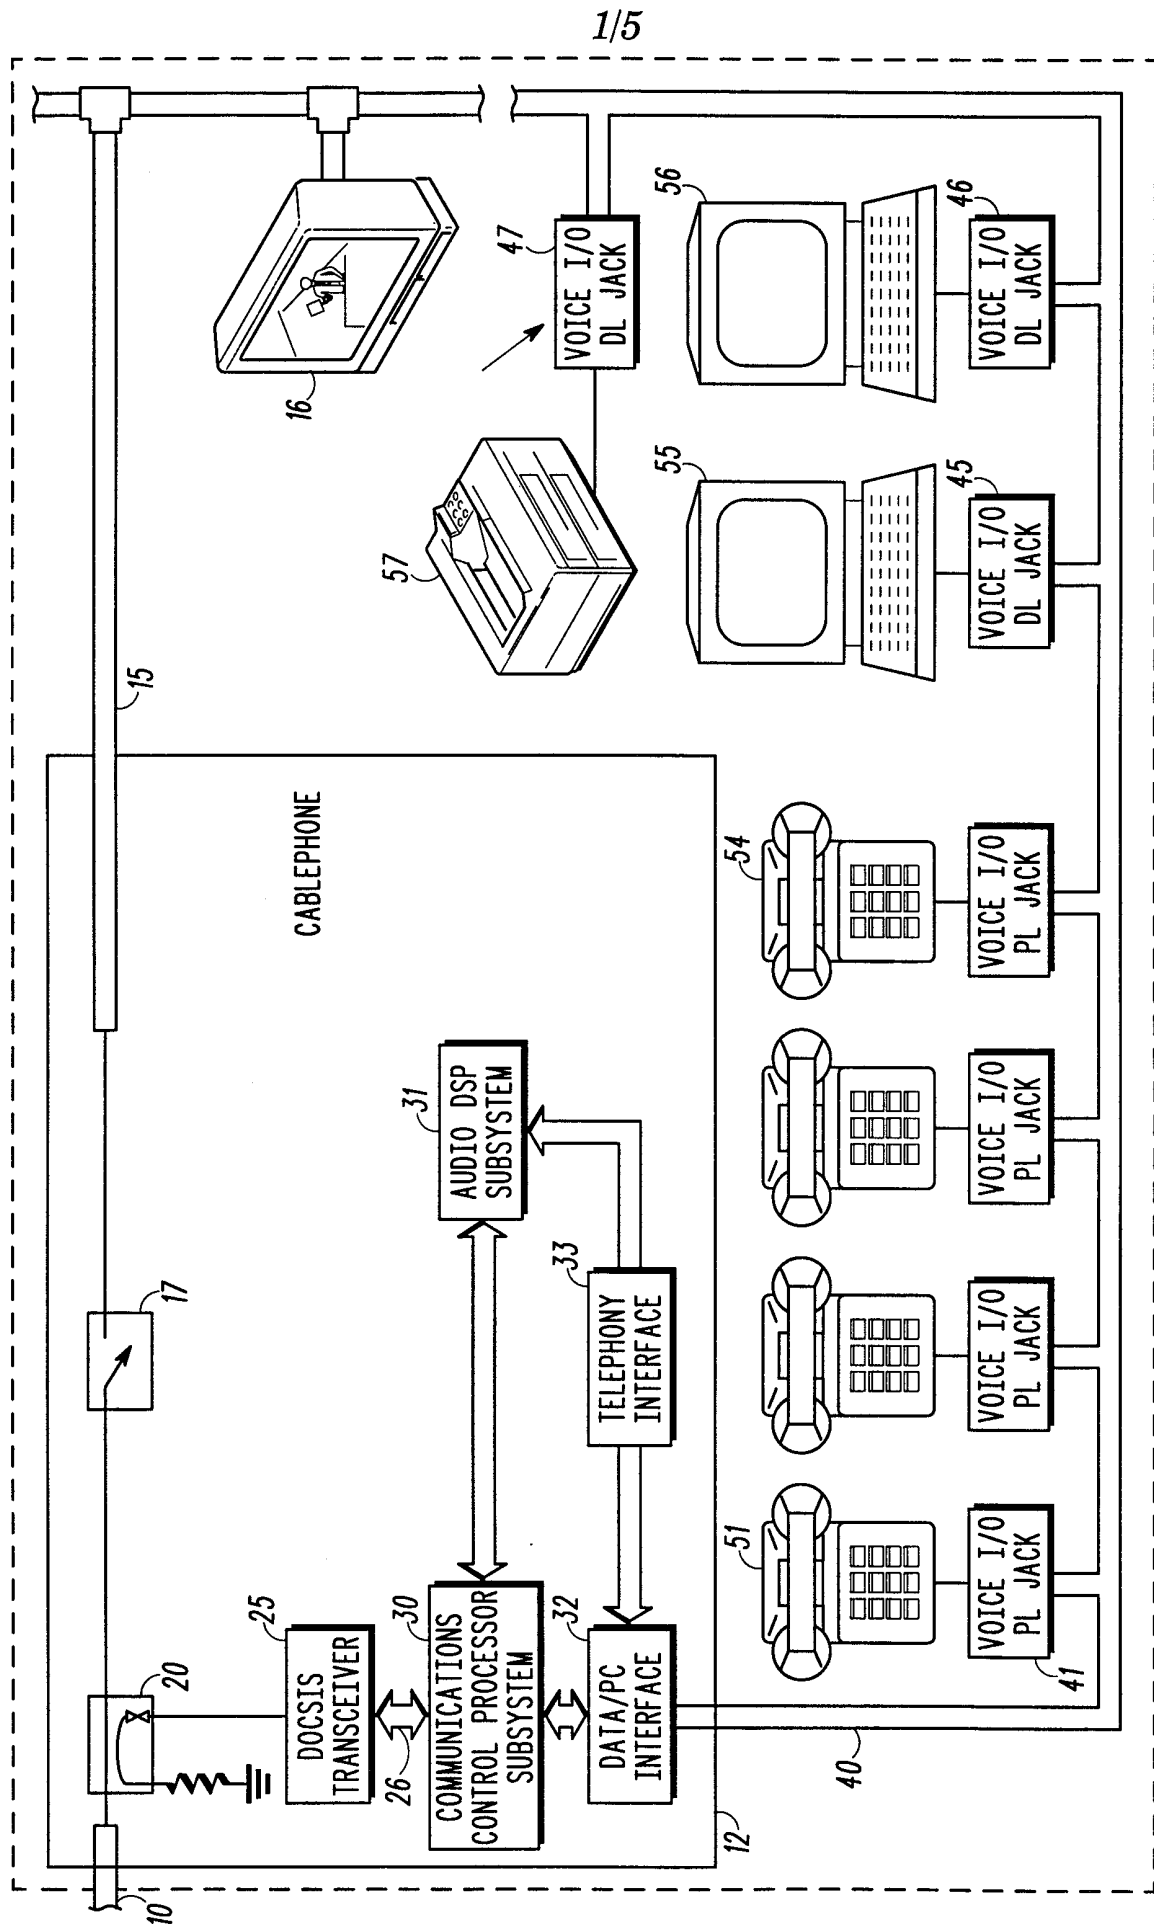

2/5

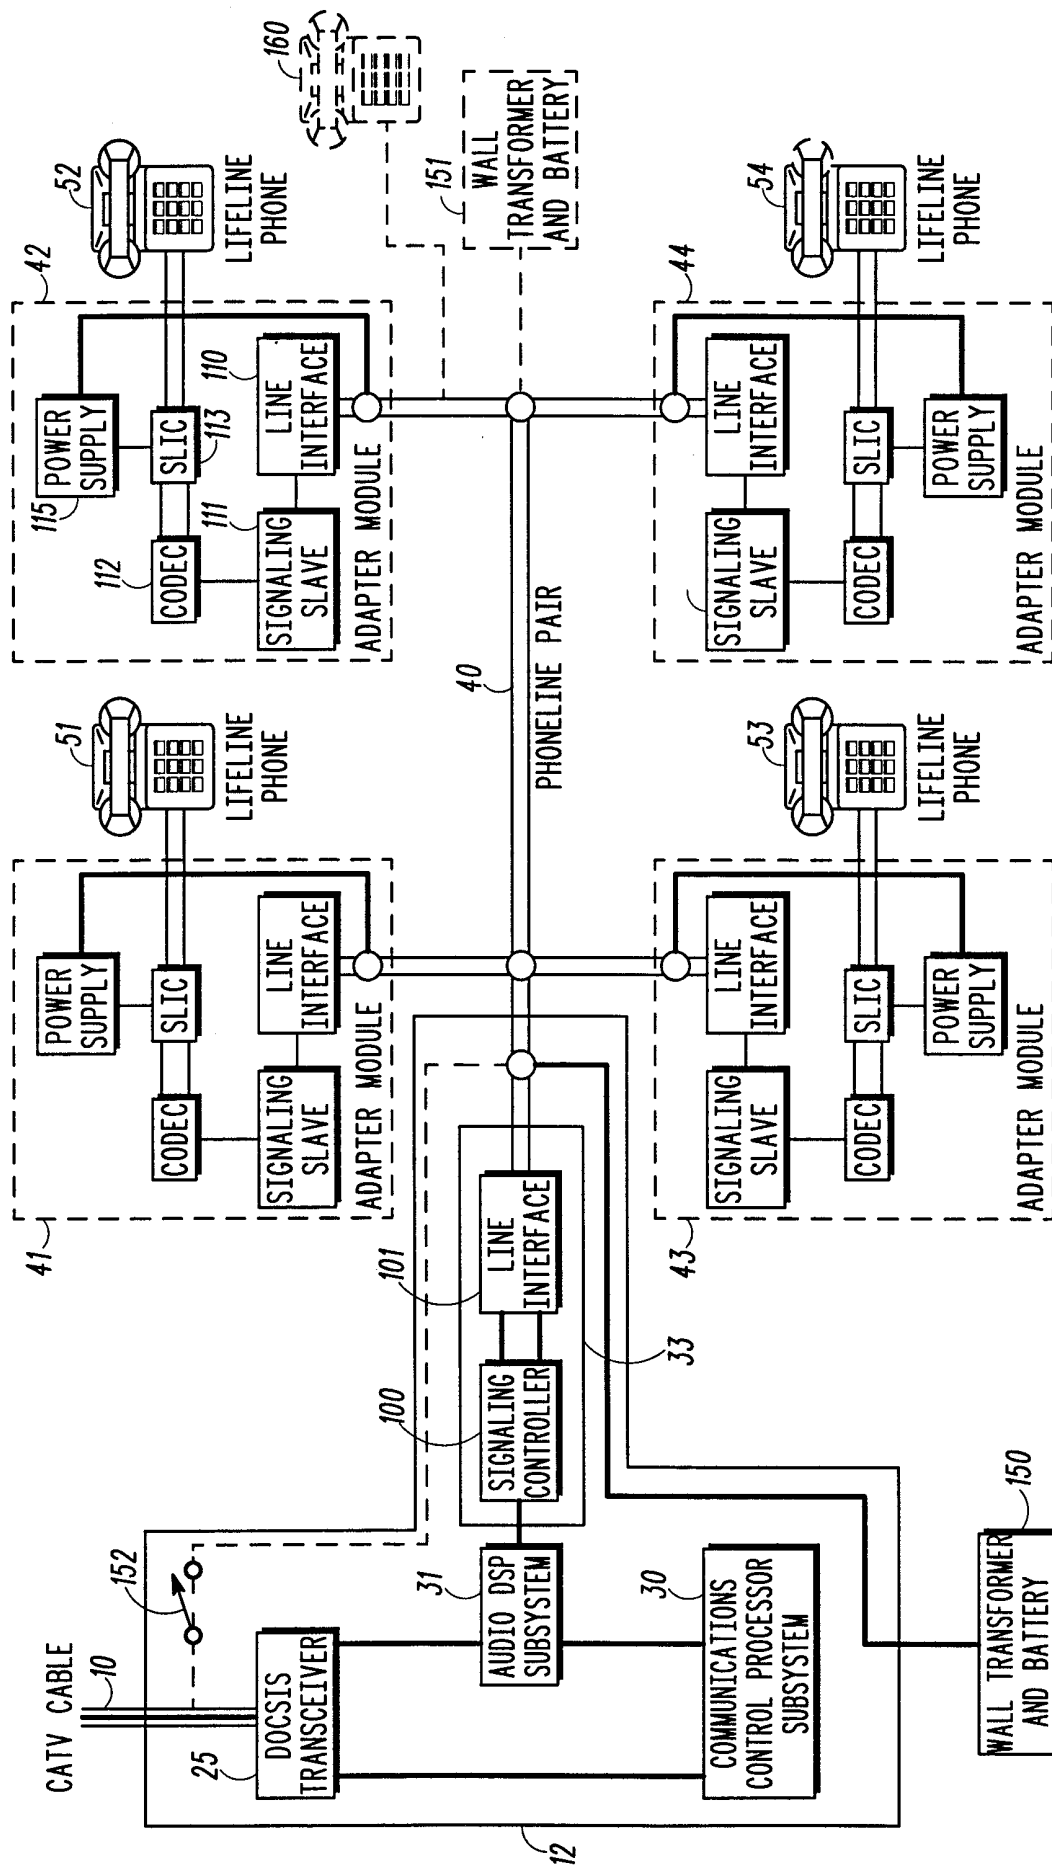
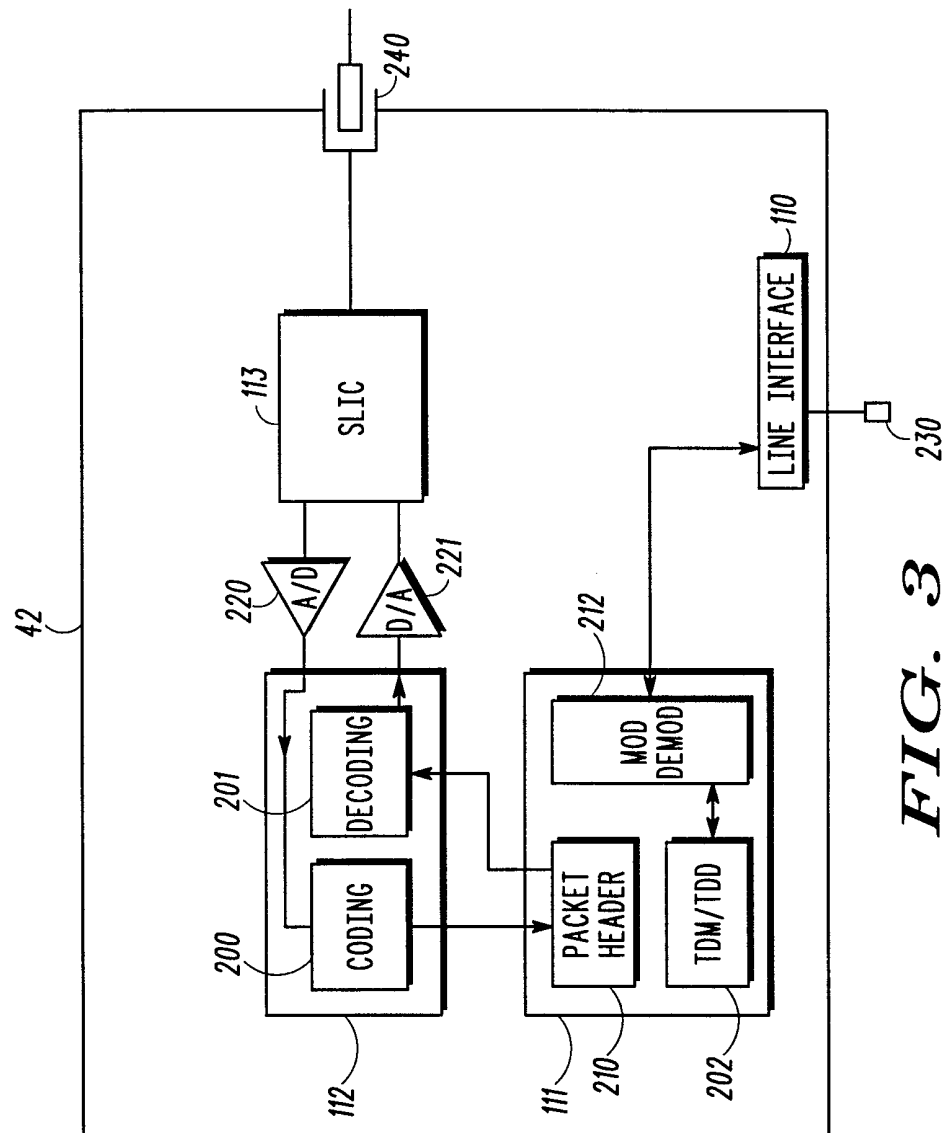


FIG. 2



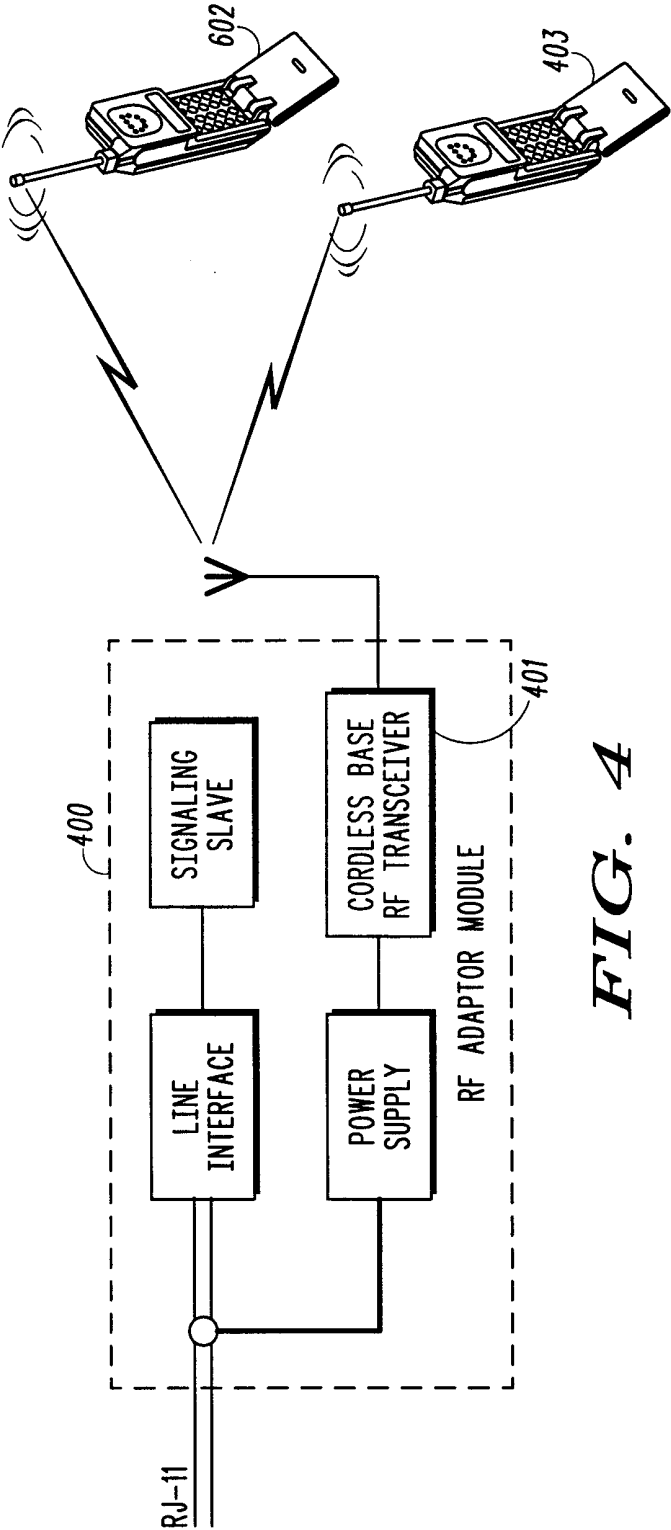


FIG. 4

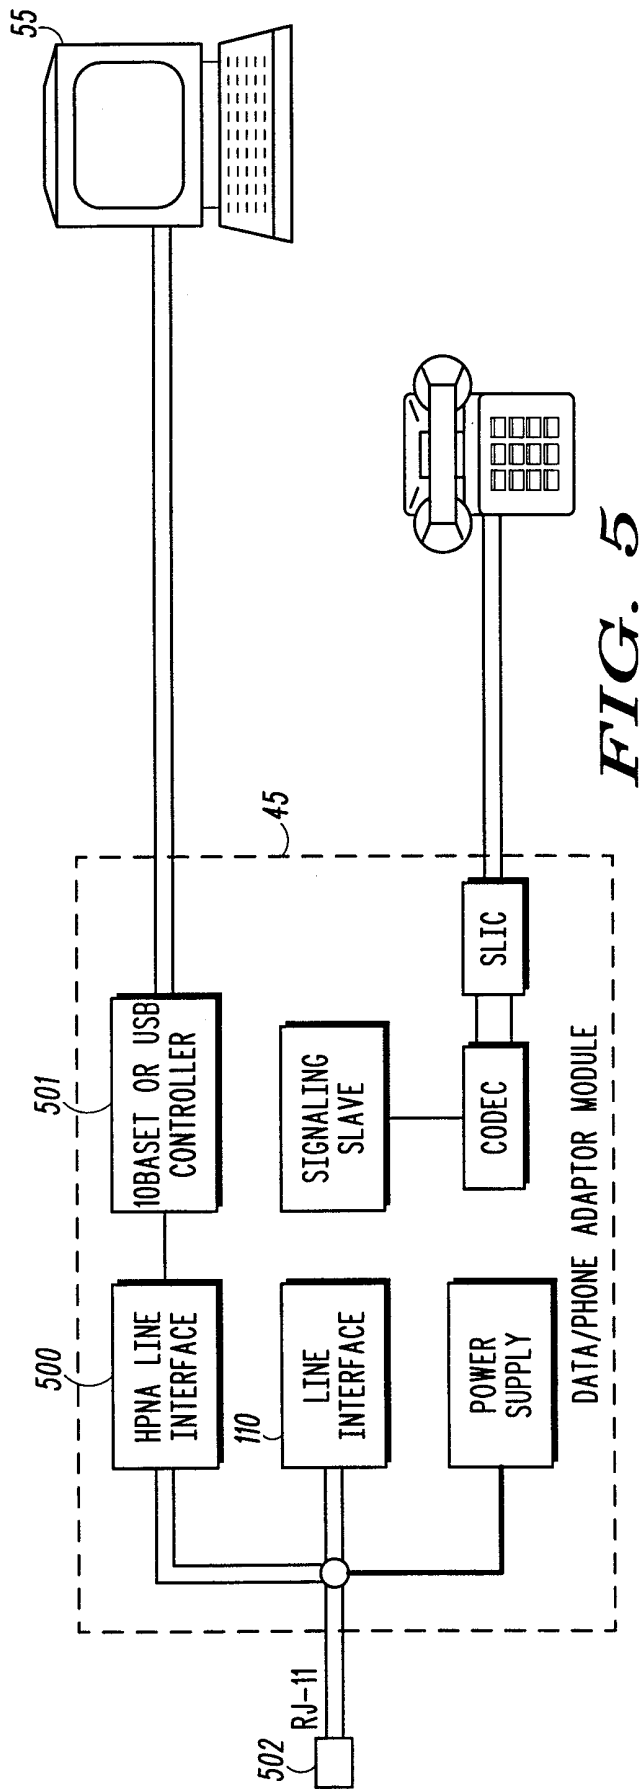


FIG. 5

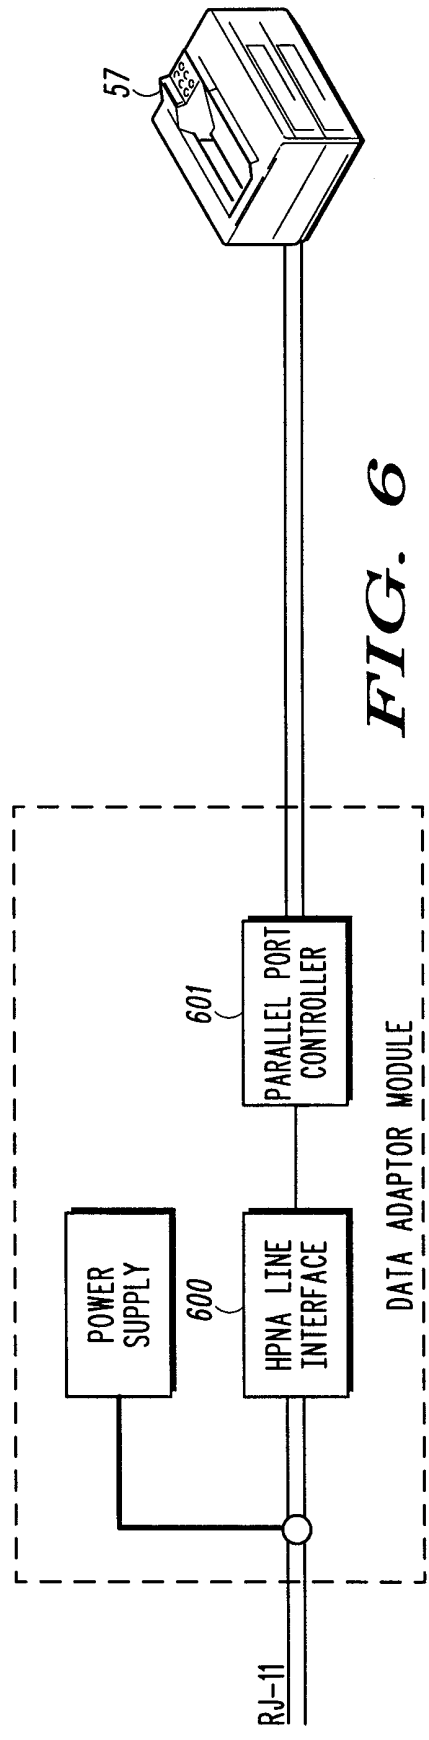


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/06029

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04N 7/16; H04Q 7/00

US CL : 379/372; 455/4.2

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 379/372; 455/4.2, 5.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST U.S. Patents Database

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X — Y	US 4,581,733 A (SARSON et al.) 08 April 1986, col. 2, lines 26-66; col. 3, lines 3-7, abstract.	1-2, 4-5, 8-11, 14, 16-17 ----- 6, 7, 15
X,P	US 5,917,814 A (BALATONI) 29 June 1999, col. 5, lines 48-57; col. 6, lines 49-61; col. 1, lines 44-64.	3, 12, 13
Y	²⁵ 5,748,680 A (MOBIN) 05 May 1998, col. 3, lines 10-34.	6, 7, 15
A,P	US 5,966,636 A (CORRIGAN et al.) 12 October 1999	1-17
A	US 5,862,451 A (GRAU et al.) 19 January 1999	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance		
"E" earlier document published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed	"G"	document member of the same patent family

Date of the actual completion of the international search

28 APRIL 2000

Date of mailing of the international search report

13 JUN 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231
Facsimile No. (703) 305-3230

Authorized officer

CLARK S. CHENEY

Telephone No. (703) 305-3900

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US00/06029

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,818,825 A (CORRIGAN et al.) 06 October 1998	1-17
A	US 5,719,872 A (DUBBERLY et al.) 17 February 1998	1-17