


(51) Cl.Int./Int.Cl. *B42D 15/10* (2006.01)

(72) **Inventeurs/Inventors:**
BEYER-MEKLENBURG, GUENTHER, DE;
KNEBEL, MICHAEL, DE;
KLEPSCH, DETLEF, DE

(73) **Propriétaire/Owner:**
BUNDESDRUCKEREI GMBH, DE

(74) **Agent:** SMART & BIGGAR

(54) Titre : DOCUMENT PERSONNEL SE PRESENTANT SOUS LA FORME D'UN LIVRET
(54) Title: PERSONAL DOCUMENT IN BOOK FORM

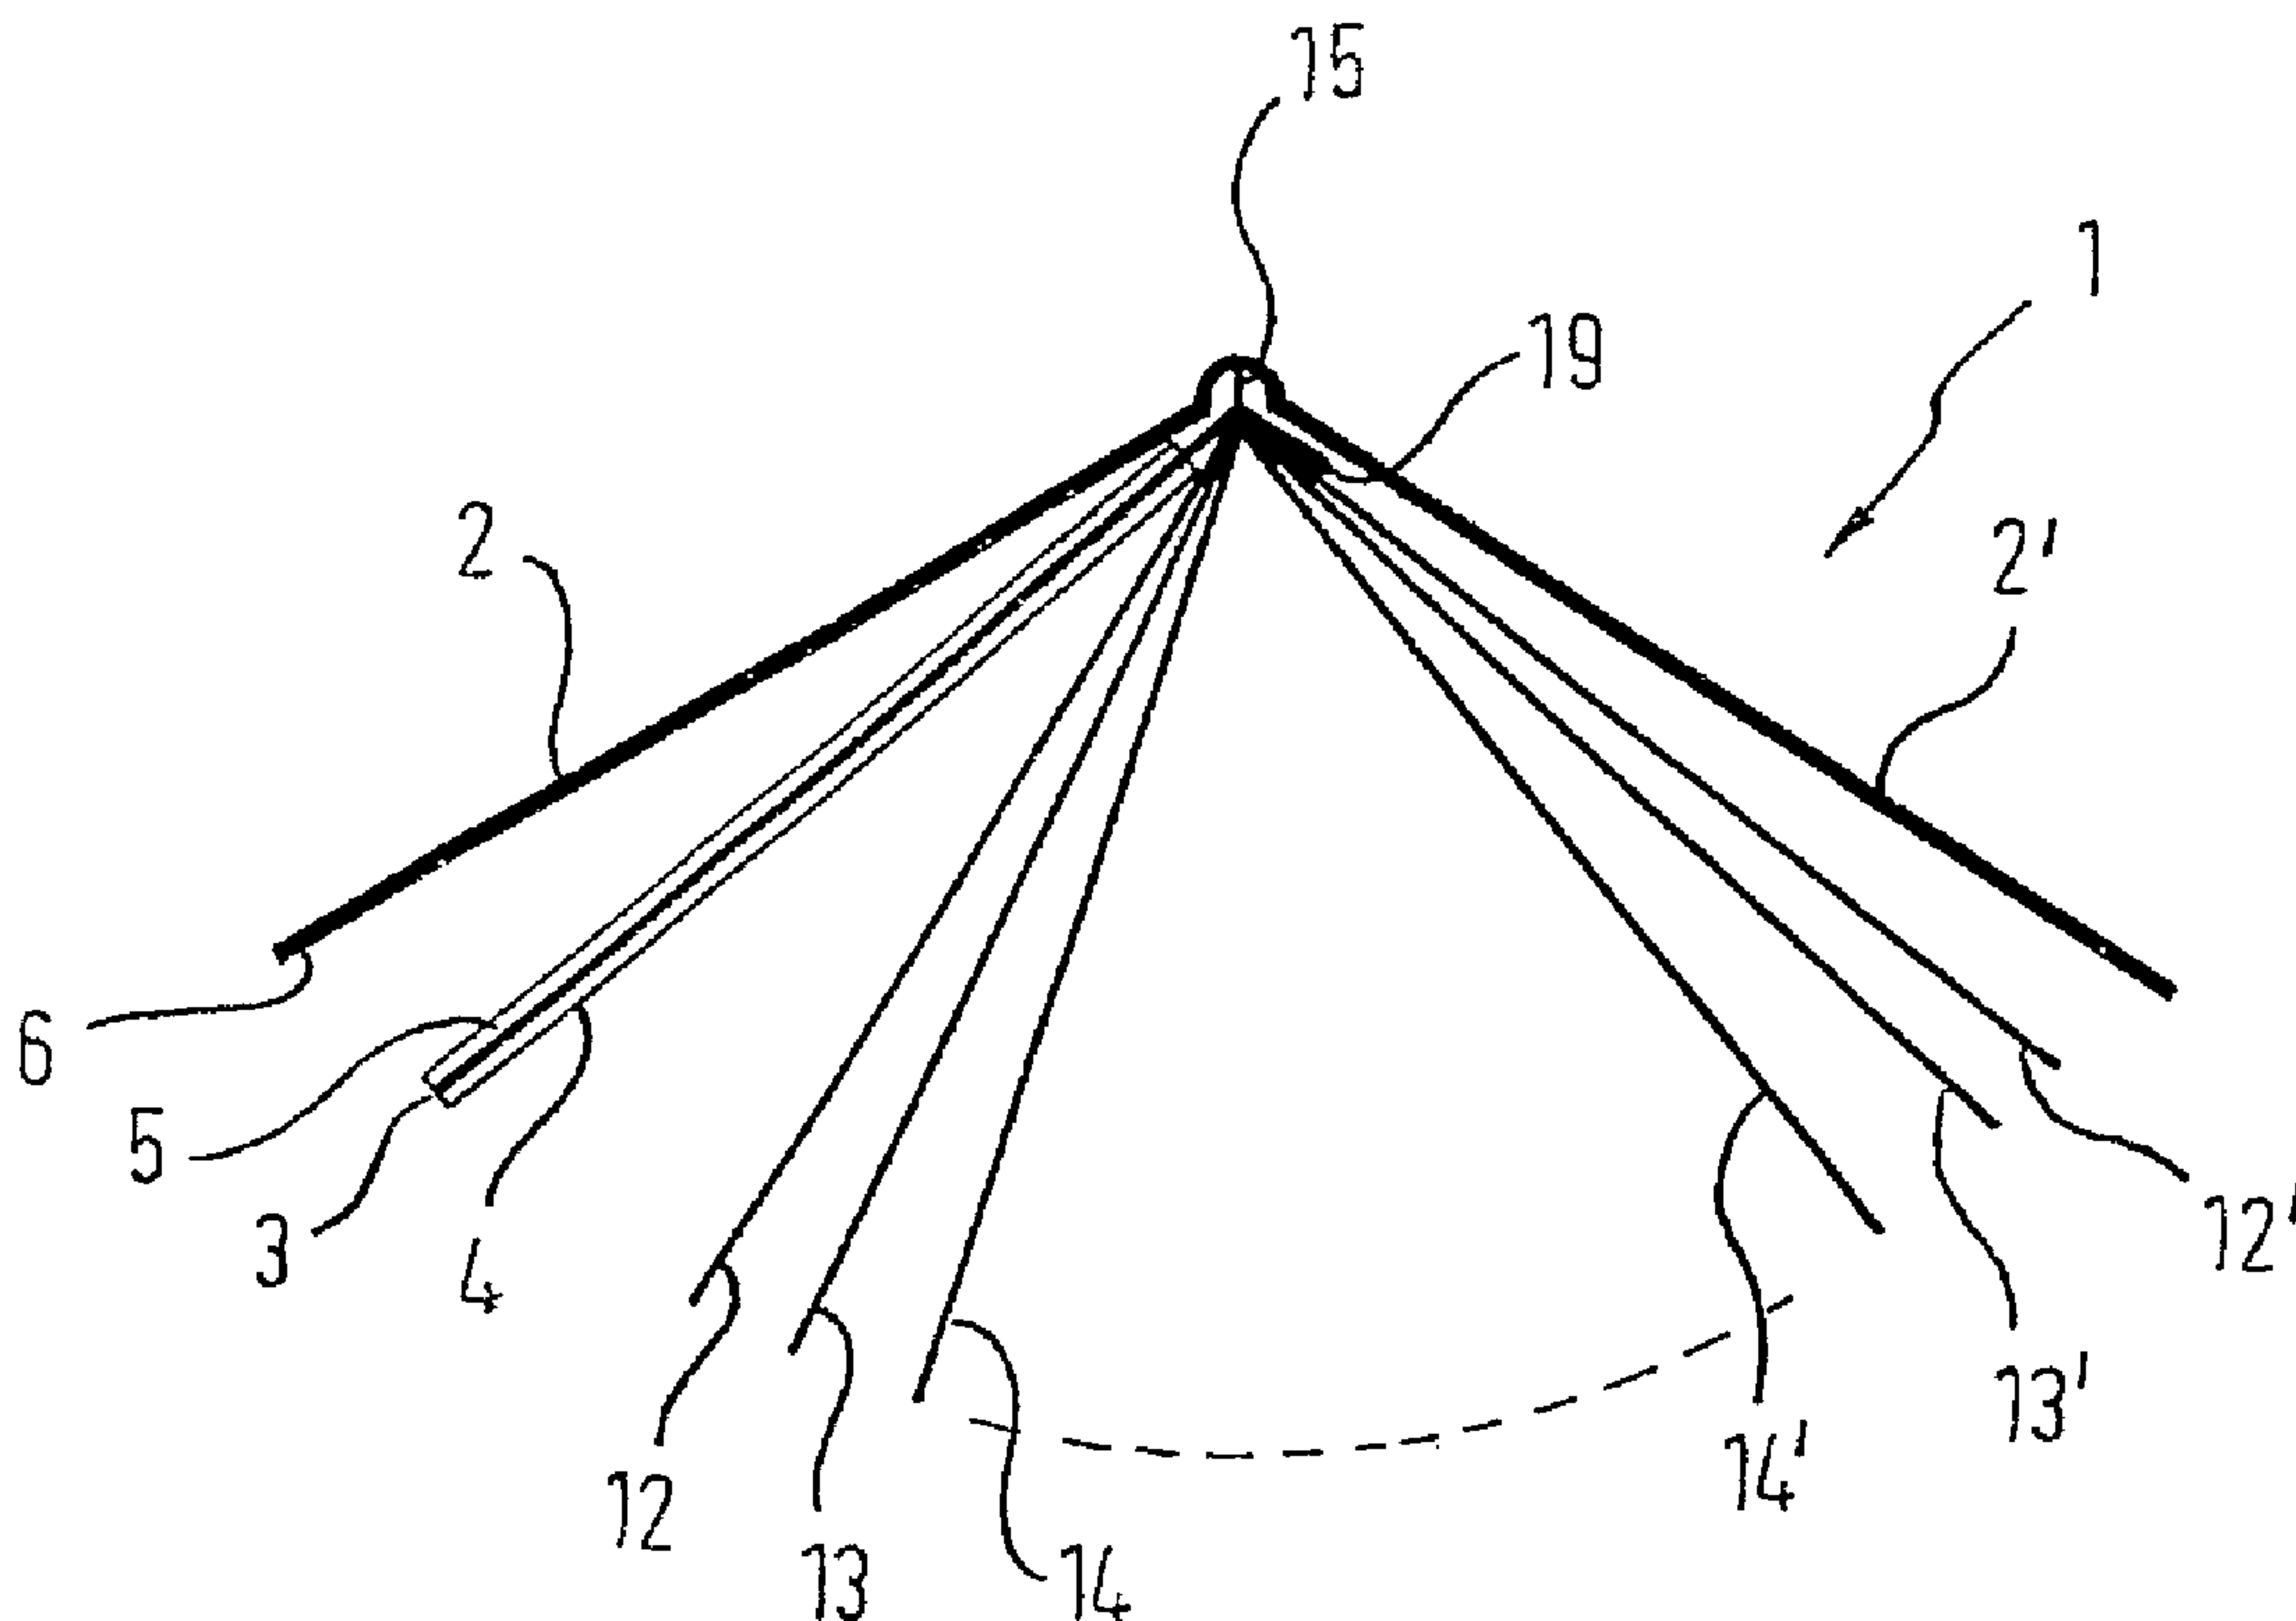

The invention relates to a personal document in the form of a book, comprising a book cover (2), a multi-layered personalised side (3, 4, 5) which contains personalised data (8), in addition to inner pages. The personalised side (3, 4, 5) and the inner pages are secured to the book cover (2) by means of a seam (15). The multi-layered personalising side (3, 4, 5) is provided with a central area (3) which is made of a textile layer which is joined on both sides to a thermoplastic layer which covers the central area until the projecting end (19). A RFID element comprising an IC element is integrated into the central area (3) for the contactless transfer of biometric data of the personal document owner. The personalised side is sewn by means of a seam (15) in the region of the projecting end.

Abstract

The invention relates to a personal document in the form of a book, comprising a book cover, a multi-layered personalised side which contains personalised data, in addition to inner pages. The personalised side and the inner pages are secured by means of a seam to the book cover. The multi-layered personalizing side is provided with a central area which is made of a textile layer which is joined on both sides to a thermoplastic layer which covers the central area until the projecting end. A RFID element comprising an IC element is integrated into the central area for the contactless transfer of biometric data of the personal document owner. The personalised side is sewn by means of a seam in the region of the projecting end.

PERSONAL DOCUMENT IN BOOK FORM

The subject-matter of the invention is a personal document in book form, for instance a passport having a personalized page that together with the other pages of the personal document is bound by means of a seam and attached in a book cover.

The personalized page of a personal document normally comprises a plurality of strata. In particular, when integrating an RFID element for complying with ISO 9303 standards for machine-readable travel documents and for inscribing personal data and the passport photo, sandwich-type layer structures that have long service lives, are temperature stable, and are protected against falsification are required. Such thermoplastic films and film combinations in general do not provide good articulation properties in the area of the seam. When using polycarbonate (PC) films or polyethylene terephthalate (PET) films, the reverse bending strength is generally limited. In particular integrating an RFID element into the personalized page requires very thick sandwich-like structures. When using transparent laser-capable polycarbonate (PC) films or transparent laser-capable PET/PE-HD films, the graphic and electronic personalization can be performed in a finished passport document. Existing passport solutions have the problem that they open poorly and do not stay closed well because the stiffness of the personalized page causes the passport not to remain closed or open without the exertion of force.

DE 198 14 420 A1 cites an identification document, such as a passport or the like, that comprises a plurality of sheets that are bound on a seam to make a book. At least one of the sheets forms a data sheet that is provided with information and comprises at least two layers, whereby at least one of the layers is transparent. The format of the layers is selected such that they project beyond the area of the seam and thus in the area of the seam connect the data sheet to the other sheets of the identification document. In the area of the information the layers are joined to an inseparable laminate; in the area of the seam however they do not adhere to one another.

77619-37

2

Thus the number of bending cycles is intended to be increased and the stiffness of the laminate page is intended to be sharply reduced by the more flexible individual films in the area of the seam. Moreover, in the area of the data sheet the passport pops open less than with passports that include a data sheet that is laminated across its entire surface. Plastic films made of PC, PETG, or HDT-PETG are preferably used for the films.

EP 1 008 459 B1 refers to a method for producing a booklet, such as for instance an ID. A band is attached in the same manner as the other sheets of the booklet, and the band is attached to a plate in a special manner, whereby the plate is produced at least partially from a plastic material and has a front side and a reverse side, each side including one page. The aforesaid band is selected for instance from a synthetic material that is suitable for being sewn in and for frequent bending and is preferably made of polypropylene.

EP 0 936 976 B1 discloses a passport with an information page that contains information about and an image of the passport holder, whereby the information page comprises a thermosetting plastic material such as e.g. polycarbonate and is personalized with laser inscriptions, and whereby this page has a plurality of layers that are laminated to one another using heat and pressure. In the bending area the output page has a separating layer between the outside layers so that these layers are not laminated and in this manner a bendable, long-lived bending location is provided on the information page in the passport.

EP 1 245 407 A2 describes a multi-layer personalized page in a passport that has a plastic layer into which data can be inscribed with the laser. This laser-capable layer made of polycarbonate is laminated by means of PE foam to a flexible backing made of HDPE and is sewn in the area of an excess length of the backing.

The goal of some embodiments of the present invention is to provide an improved personal document in book form that has a longer service life and is less susceptible to falsification.

77619-37

2a

According to the present invention, there is provided a personal document in book form having a book cover, a multi-layer personalized page that contains personal data, and interior pages, said personalized page and said interior pages being attached in said book cover by means of a seam, wherein

5 said multi-layer personalized page has a core stratum comprising a textile layer; an RFID element with an IC element for contactless transmission of biometric data about the holder of said personal document is integrated in said core stratum; said core stratum is joined on both sides to a thermoplastic layer, which cover the core stratum up to a section of excess length; said personalized page is sewn by

10 means of said seam in the area of said excess length; and said textile layer is a fleece or a fabric comprising one or both of a polyester fabric and polyester satin fabric, or one or both of a cotton fabric and a cotton blend fabric, or a microfiber fabric made of thermoplastic fibers.

Accordingly, the personal document possesses a book cover, a multi-

77619-37

layer personalized page that contains personal data, and interior pages, whereby the personalized page and the interior pages are attached in the book cover by means of a seam. The multi-layer personalized page has a core stratum comprising a textile layer and is joined on both sides to at least one thermoplastic layer, which cover the core stratum up to a section of excess length. An RFID element with an IC element for contactless transmission of biometric data from the personalized document is integrated in the core stratum. The personalized page is sewn by means of the seam to the other pages and the book cover in the area of the excess length.

The textile layer of the personal document is preferably a fabric, in particular a polyester fabric and/or a polyester satin fabric. This results in a particularly bendable, long-lived articulation in the area of the seam in the personal document.

Another advantageous embodiment results when the textile layer is a cotton fabric and/or a cotton blend fabric or a microfiber fabric made of thermoplastic fibers. However, it is also possible for the textile layer to be a non-woven fabric.

Particular advantages result in that the textile layer can contain machine-readable security elements, which enhances protection against falsification. Such security elements include added security pigments and/or security prints that are used during authentication of the personal document.

The textile layer in accordance with some embodiments of the invention is provided on at least one page with a bonding agent layer that can be applied for instance in the form of a film, in particular a perforated film, in the form of a random fabric, a coating, or print.

The bonding agent layer in some embodiments, comprises a thermoplastic adhesive, in particular a hotmelt, that joins the textile layer to the plastic layer covering the core stratum in a manner that cannot be released without visibly damaging the layers. It is particularly advantageous when a reactive resin or a partially reactive resin mixture is used with which the textile layer and the plastic layer

77619-37

4

covering the core stratum are joined permanently. In some embodiments, the plastic layers on the front side and on the back side of the personalized page are joined to one another by lamination.

5 In some embodiments, the core stratum has recesses through which the plastic layers of the front side and the back side can join one another in a fused compound. Thus it is practically impossible for a forger to subsequently separate the layers.

10 In accordance with some embodiments of the invention, the plastic layers covering the core stratum include a first opaque thermoplastic film, for instance a white thermoplastic film, and at least one transparent laser-capable film into which the personalized data, in particular the passport photo, are inscribed with laser irradiation. These layers may comprise polycarbonate (PC) and/or polyethylene terephthalate (PET) and/or high-density polyethylene (HDPE) or a blend of these materials. The transparent laser-capable film is covered with a protective layer that is laminated
15 thereto in the same manner and cannot be removed without being destroyed.

The personal document in accordance with some embodiments of the invention has a coil integrated into the personalized page, in particular into its core stratum, for contactless reading of biometric data for the holder of the personal document.

20 Advantageously, diffractive elements can also be laminated in between the layers of the multi-layer personalized page. Moreover, a photopolymer layer can be arranged there, into which layer a "shadow image" of the photo of the holder of the personal document is inscribed. In addition, as an additional security measure during the laser processing of the personalized page, lasered perforation numbering can be added and thus the protection against falsification is further enhanced.

25 Examples of embodiments of the present invention will now be described with reference to the drawings, in which:

Figure 1 is a schematic representation of an inventive personal document, partially opened;

Figure 2 is the top view of the personalized page;

Figure 3 is a section through the personalized page with an RFID element in the textile layer.

Figure 1 is a schematic representation of an inventive personal document 1, partially opened.

The passport binder 2, 2' is bound by means of the seam 15, with the personalized page 3, 4, 5, 19 and the interior strata 12, 12', 13, 13', 14, 14' into a book so that a sort of articulation 15 is formed. The number of interior strata can be selected according to the design desired. In this case, only six interior strata are shown for the sake of simplicity.

The personalized page comprises a laminate with a core stratum 3 between plastic layers on the front side 4 and the back side 5. The excess length 19 of the personalized page 3, 4, 5 in the area of the seam 19 comprises only the core stratum 3, which is embodied bendable and made of a textile material such that a personal document produced in this manner can be opened and closed easily without there being a high restoring force and in that a high bending number is possible.

On the front, the passport cover 2, 2' has a projection 6 and can be used with a bound design or in a design that is punched on three sides.

Figure 2 is a top view of the personalized page 3, 4, 5. In accordance with the invention, the core stratum 3 extends across the entire personalized page, including the excess length 19. However, the plastic layers of the front side 4 of the personalized page and the back side 5 of the personalized page do not extend across the full width of the core stratum 3, but rather end at the edge 20 and are exteriorly edged with a common contour 29. Thus, only the flexible core 3 is to be sewn at the seam or bending site 15, while the rest of the personalized page has substantially higher stiffness due to the laminated polycarbonate layers. The exterior contour 29 is preferably obtained by punching the bound passport 1.

An RFID element 16 with an IC element 17 and a coil 18 is integrated into the personalized page 3, 4, 5; the position shown is arbitrary. The RFID element 16 can also be designed either smaller or even larger with respect to the desired specifications.

The IC element 17 is preferably positioned in the vicinity of the seam 15 because this location can be expected to be subjected to lower mechanical loads.

The personalized data such as the ICAO line 7, personalized data 8, and photo 9 are produced in the finished passport 1 by means of laser irradiation, whereby the IC element 17 is also electronically programmed with the corresponding personal data or biometric data in the same working step.

Frequently a diffractive security element 10 is required for increasing protection against falsification. In the present example it is integrated into the strata 24, 25. Since this diffractive element 10 is largely transparent, it can be arranged such that it covers the photo 9 in places.

Since the personalized page 3, 4, 5 is constructed by means of laser irradiation, the passport number can also be burned into the area of the numbering 11 in the form of a microperforation and/or the photo can be added as a so-called "shadow image" by means of microperforations in addition to or adjacent to the actual photo 9.

Figure 3 depicts a section through the personalized page 3, 4, 5 with an RFID element 16 in the core stratum 3. The layers 24 and 26 are embodied as opaque white polycarbonate layers. Both the front side and the back side of these is inseparably joined to a laser-capable polycarbonate layer 25, 27.

In this sectional depiction, the core stratum 3 is formed from three strata, whereby in special cases additional strata or layers might be reasonable and even necessary. The textile layer 21 comprises a polyester fabric and/or a polyester satin fabric and/or a cotton fabric and/or a cotton blend fabric and/or a microfiber fabric and/or a non-woven fabric made of thermoplastic fibers. The thickness of the fabric 21 is 50 to 300 μm , preferably 100 to 200 μm . The fabric has security threads woven therein or is woven from security yarns or can be printed. Preferably machine-readable marking substances are used. In particular marking substances that can be activated in the near infrared range can be added that can be read through layers arranged

thereover, since for instance conventional printing inks and opaque thermoplastic films are penetrated by NIR radiation in the metrologically interesting range of 800 to 1100 nm.

Excitation is performed using LED or laser radiation sources with appropriate optics and the data are preferably also read out in the NIR range, whereby the conventional silicon photo diodes can be used since they have high sensitivity up to about 1000 nm and slightly more. The responding signal can be evaluated or verified in terms of frequency and/or time, that is in a time-resolved manner. In particular so-called up-conversion pigments are suitable, such as a fine-grain inorganic gadolinium oxysulfide and the like. Preferably response signals in the NIR range are evaluated when such machine-readable markings are integrated in the interior of the laminate structure 21, 22, 23.

The fabric 21 is provided with one or two bonding agent layers 22, 23. These layers can be thermoplastic in nature and in this case must have a corresponding heat resistance or can be designed partially reactive or reactive. In each case a bond is attained that makes it impossible to separate the layers 21, 22, 23, 24, 25, 26, and 27 without visibly damaging or destroying them.

In terms of production engineering, the bonding agent layers 22, 23 can cover the entire surface of the fabric 21, that is, the excess length 19, as well. Depending on the type and thickness of the fabric, however, the excess length 19 can be kept free of one or both bonding agent layers 22, 23.

In one variant, the use of the fabric 21 in the production of the articulation 15 in the area of the seam of the personalized page 3, 4, 5 can occur in that the fabric 21 in roll form is provided with one or both bonding agent layers 22, 23 and are then laminated together, in a single image, in strip form, or in multiple images, with the other layers 24, 25, 26, 27 to make a personalized page 3, 4, 5. The lamination is normally performed in a hot and cold transfer press. Lamination temperatures ranging from about 150 °C to more than 200 °C are used and in particular temperatures ranging from 190 °C to about 205 °C are used for high security laminate bonds based on polycarbonate. The surface pressures in the hot press are generally 200 to 400 N/cm², and the surface pressures in the cold press are generally 400 to 600 N/cm². Using vacuum support for the lamination process can prevent interfering air inclusions.

Depending on the type of IC element 17 and the possible type of contacting, the RFID coil 18 can be produced using etching in copper or aluminum or by means of silver through plating or by means of copper wire winding or laying technique.

As stated in the foregoing, the personalized page 3, 4, 5 is produced in single images, in strip form, or in multiple images. The contour 29 is produced using a punch tool or cutting tool. It can be advantageous that the films 24, 25, 26, 27 and any additional films are embodied such that they designed are in a size large enough to include the excess length 19, but in the area of the excess length 19 to the bonding agent side 22, 23 are provided with a separating coating, for instance by means of screen printing. The contour punches can then punch the entire contour 29 and at the same time produce the personalized page edge 20 such that only the films 24, 25, 26, 27 are punched on the edge and the core strata 21, 22, 23 are not punched.

In all of the punch technologies the punch edge 29 is quite essential since a fabric 21 is integrated as core layer and this fabric 21 must be edged with no fringe.

In this depiction the transparent films 25, 27 are conducted over the edge of the opaque plastic layers 24, 26, but terminate prior to the excess length 19 in which the seam 15 is provided. In addition, in this embodiment it is even possible to use a relatively thick RFID element 16, which however makes possible a personalized page 3, 4, 5 that is thinner overall than would otherwise be required for relatively thick RFID elements 16.

In addition, in this depiction a recess 28 in the core stratum 3 is shown. A fused bond between the layers surrounding the core stratum 3 is possible with one or a plurality of such recesses 28 in the core strata 21, 22, 23. The holes 28 can be lasered or punched. They have a pre-determined circular, oval, or rectangular shape and can also themselves be used as an additional security feature during authentication.

Legend

- 1 Personal document
- 2 Book cover
- 2' Book cover printed side
- 3 Core stratum
- 4 Plastic layer of front side of personalized page
- 5 Plastic layer of back side of personalized page
- 6 Book cover inside page (projection front)
- 7 ICAO line
- 8 Personalized data
- 9 Passport photo
- 10 Diffractive structure
- 11 Number punched
- 12 Inside page; 12' inside page back side
- 13 Inside page; 13' inside page back side
- 14 Inside page; 14' inside page back side
- 15 Seam (personal document articulation)
- 16 RFID element
- 17 IC element (chip module, interposer)
- 18 Coil
- 19 Excess length of personalized page
- 20 Edge of personalized page
- 21 Textile layer
- 22 Bonding agent for personalized page front side
- 23 Bonding agent for personalized page back side
- 24 Opaque personalized page front side
- 25 Transparent laser-capable personalized page front side
- 26 Opaque personalized page back side
- 27 Transparent laser-capable personalized page back side
- 28 Recess in core stratum
- 29 Contour/punched edge

77619-37

10

CLAIMS:

1. A personal document in book form having a book cover, a multi-layer personalized page that contains personal data, and interior pages, said personalized page and said interior pages being attached in said book cover by
5 means of a seam, wherein

- said multi-layer personalized page has a core stratum comprising a textile layer;

- an RFID element with an IC element for contactless transmission of biometric data about the holder of said personal document is integrated in said
10 core stratum;

- said core stratum is joined on both sides to a thermoplastic layer, which cover the core stratum up to a section of excess length;

- said personalized page is sewn by means of said seam in the area of said excess length;

15 - and said textile layer is a fleece or a fabric comprising one or both of a polyester fabric and polyester satin fabric, or one or both of a cotton fabric and a cotton blend fabric, or a microfiber fabric made of thermoplastic fibers.

2. The personal document according to claim 1 wherein said textile layer is provided on at least one page with a bonding agent layer.

20 3. The personal document according to claim 2, wherein said bonding agent layer is applied in the form of a film.

4. The personal document according to claim 3, wherein the film is a perforated film.

5. The personal document according to claim 2, wherein said bonding
25 agent layer is applied in the form of a random fabric.

6. The personal document according to claim 2, wherein said bonding agent layer is applied in the form of a coating or print.

77619-37

11

7. The personal document according to any one of claims 2 to 6, wherein said bonding agent layer comprises a thermoplastic layer that joins said textile layer and said plastic layer covering said core stratum in a manner that cannot be released without visibly damaging said layers.
- 5 8. The personal document according to any one of claims 2 to 6, wherein said bonding agent layer has a reactive resin or a partially reactive resin mixture that permanently joins said textile layer and said plastic layer covering said core stratum.
9. The personal document according to any one of claims 1 to 8,
10 wherein said textile layer contains at least one machine-readable security element which comprises one or both of security pigments and a security print.
10. The personal document according to any one of claims 1 to 9, wherein said core stratum is joined to said plastic layers on said front side and on said back side by means of lamination.
- 15 11. The personal document according to any one of claims 1 to 10, wherein said core stratum has at least one recess through which said plastic layers of said front side and said back side join one another in a fused compound.
12. The personal document according to any one of claims 1 to 11,
20 wherein said plastic layers covering said core stratum have at least a first opaque thermoplastic film and at least one transparent laser-capable film.
13. The personal document according to any one of claims 1 to 12, wherein said plastic layers covering said core stratum comprise any one or more of polycarbonate, polyethylene terephthalate, and high-density polyethylene, or a blend of these materials.
- 25 14. The personal document according to claim 12 or 13, wherein said laser-capable film contains personal data and the photo of the holder of said personal document.
15. The personal document according to any one of claims 12 to 14, wherein said transparent laser-capable film is covered with a protective layer.

77619-37

12

16. The personal document according to any one of claims 1 to 15, wherein a coil is integrated into said personalized page for contactless transfer of biometric data for the holder of said personal document.

17. The personal document according to claim 16, wherein the coil is
5 integrated into the core stratum of said personalized page.

18. The personal document according to any one of claims 1 to 17, wherein a diffractive element is laminated between said layers of said multi-layer personalized page.

19. The personal document according to any one of claims 1 to 18,
10 wherein arranged between said layers of said multi-layer personalized page is a photopolymer layer into which a "shadow image" of the photo of the holder of the personal document is inscribed.

20. The personal document according to any one of claims 1 to 19, wherein the personalized page has lasered perforation numbering.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

Fig. 1

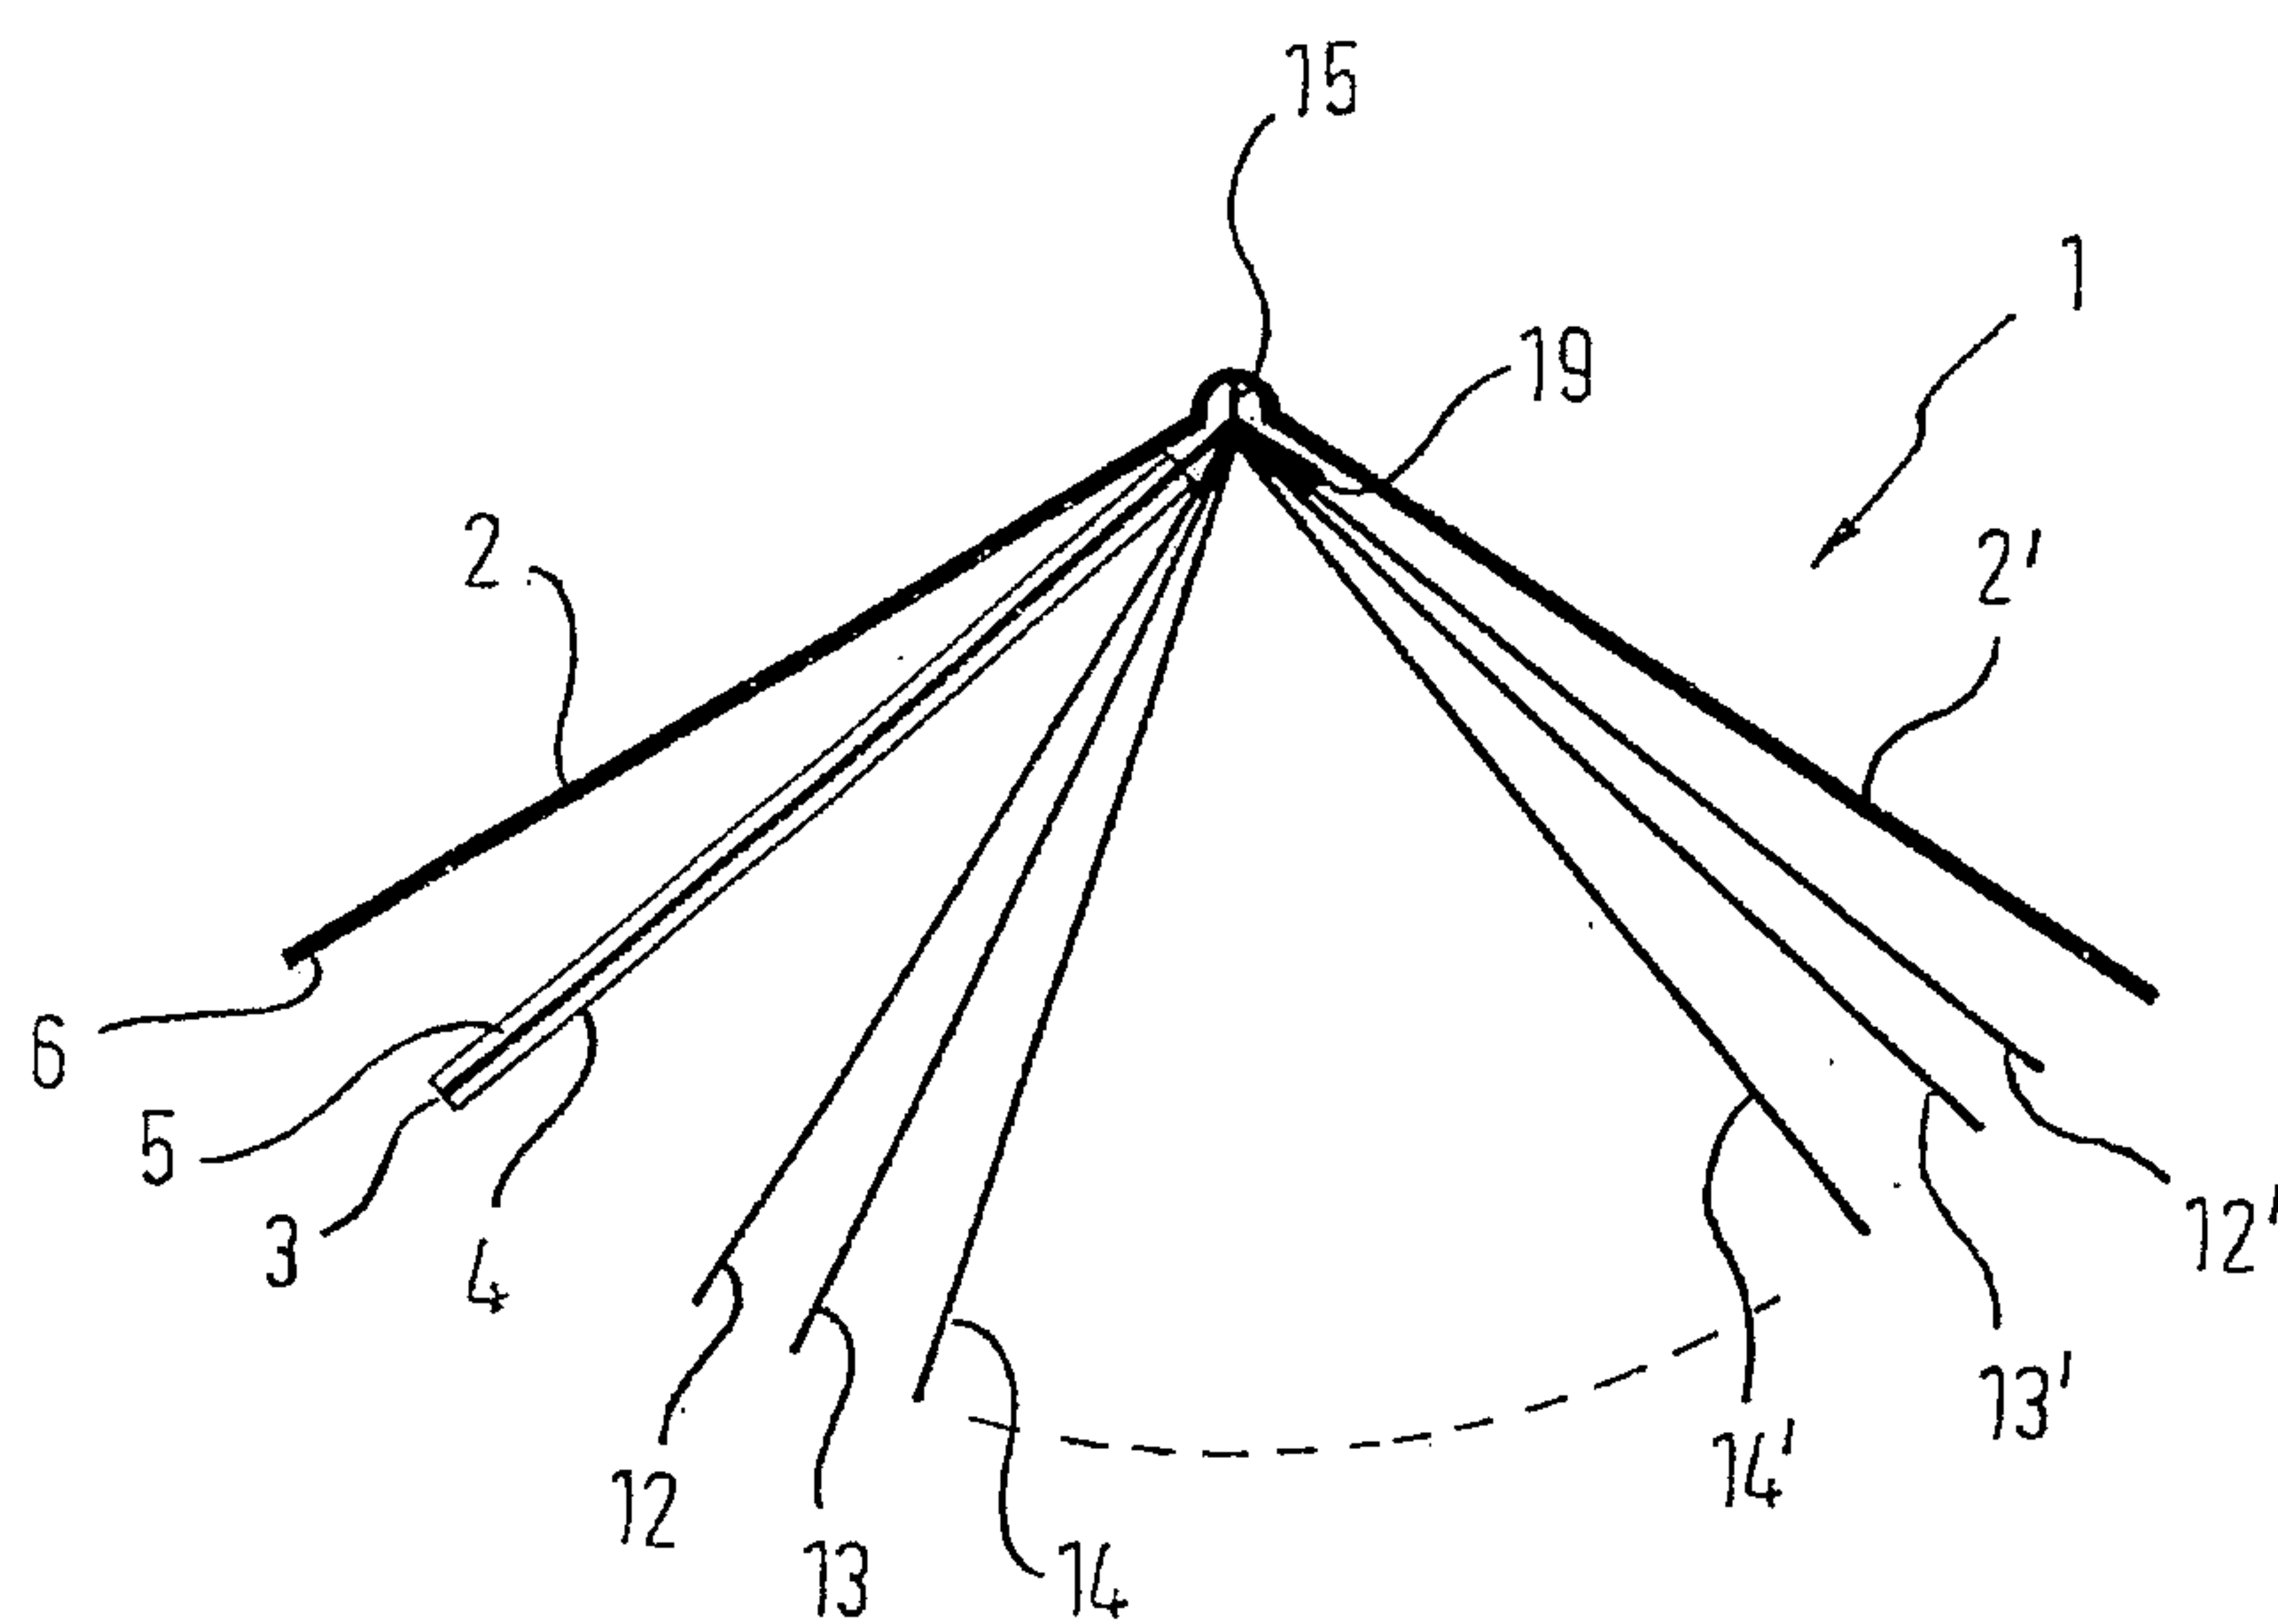


Fig. 2

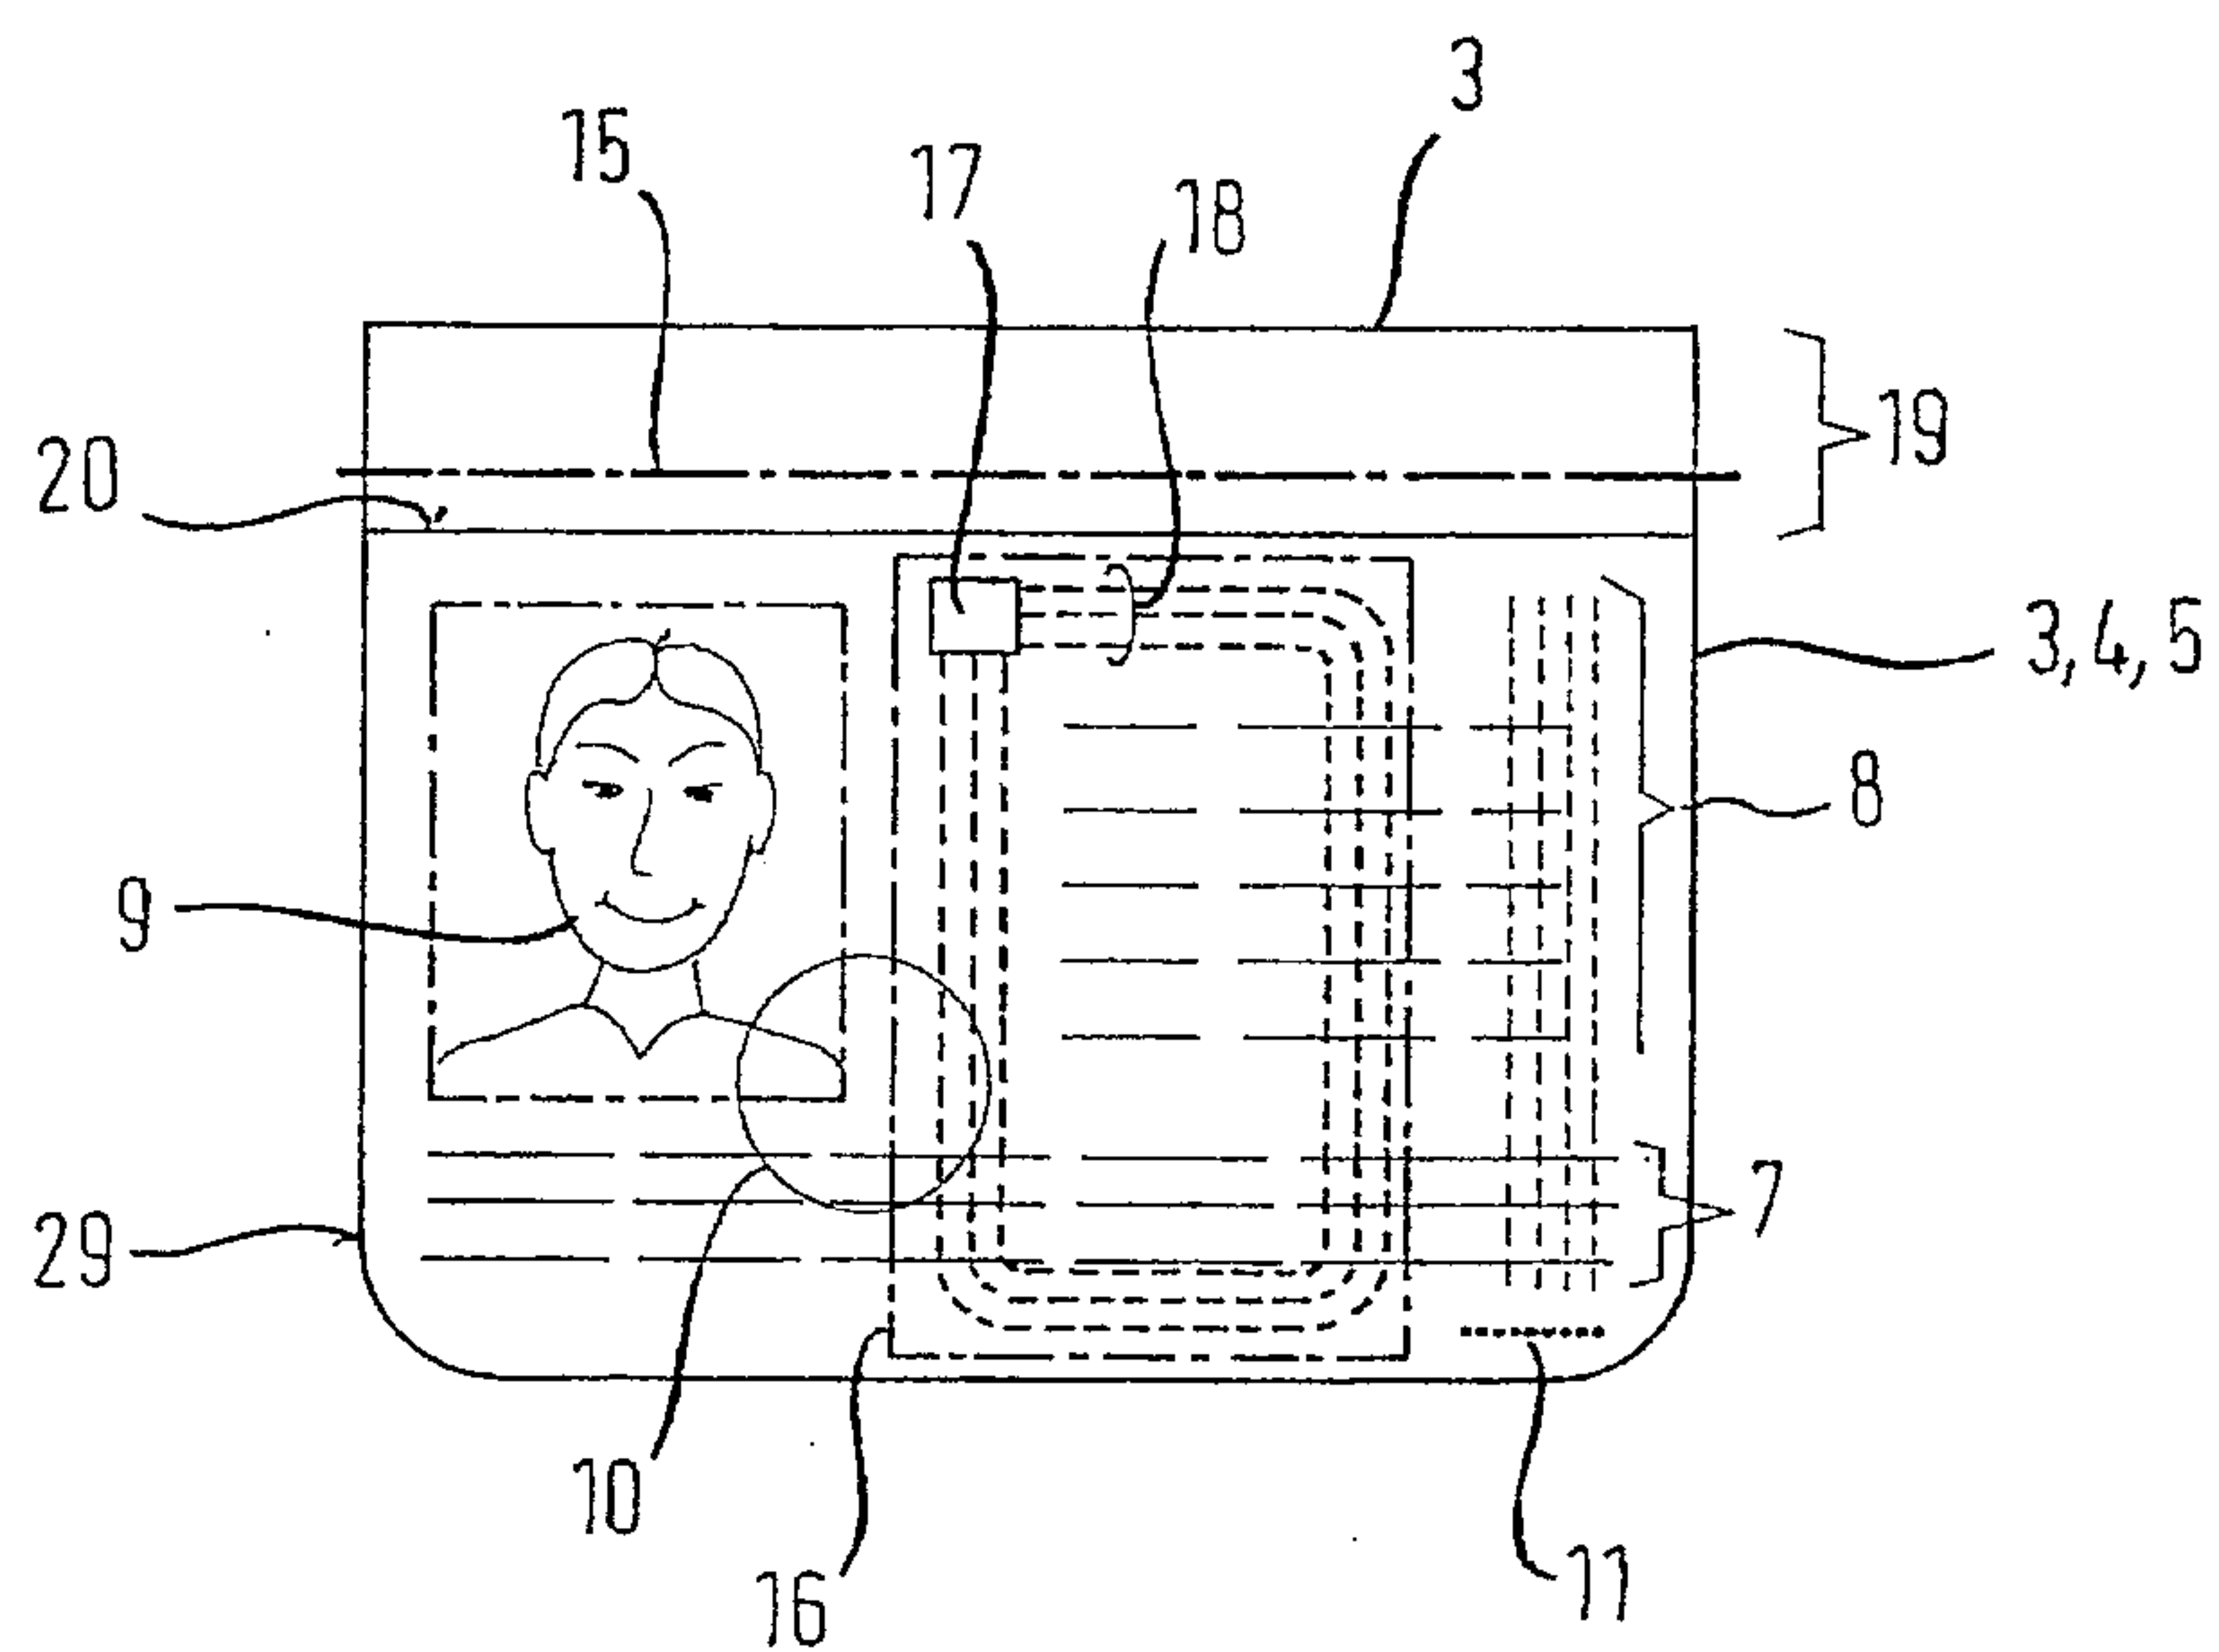


Fig. 3

