

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015331 A1

(51) International Patent Classification⁷: **F21V 19/00**

(21) International Application Number:
PCT/IB2003/003272

(22) International Filing Date: 18 July 2003 (18.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02078263.7 7 August 2002 (07.08.2002) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LINSSEN, Petrus, J., A.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **THEELEN, Antonius, N.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **PET, Robert, J.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,

[Continued on next page]

(54) Title: DEVICE FOR PLACING A LAMP IN A REFLECTOR

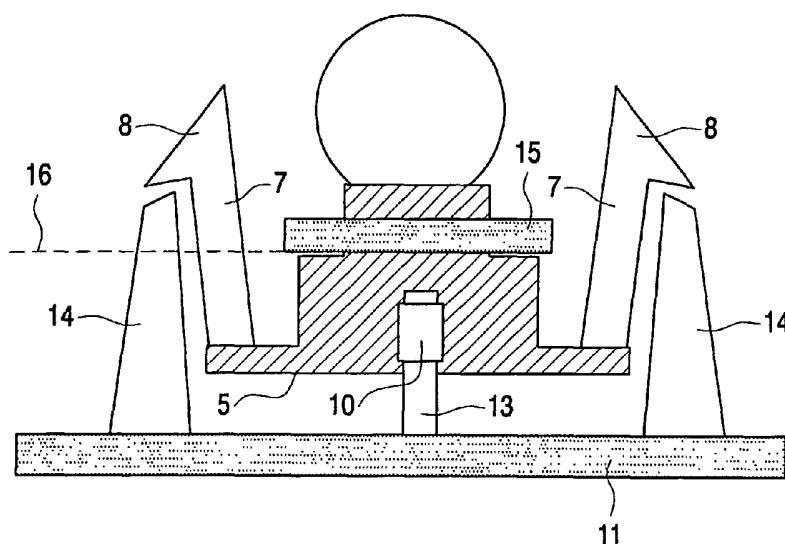

(57) Abstract: In a device for placing a lamp in a reflector, a socket (1) for holding a lamp is provided with a main body part (2), with a reference plane (16) to be brought into contact with the a reflector surface, with means (3) for holding the lamp at one side of the reference plane, with a resilient annular spring (5) secured to the main body part at the opposite side of the reference plane, and with two upright arms (7) provided with clicks (8), while a back plate (11) is provided with pressure points (14). When securing the back plate to the reflector, the reference plane (16) is brought into contact with said reflector surface, and the pressure points (14), when in contact with the clicks (8) of the socket, displace the clicks (8) in the direction of the reflector over a distance Δx so as to put the annular spring (5) under tension, said distance Δx being such that the annular spring (5) presses the reference plane towards the said reflector surface with a force of at least 5N, preferably with a force of at least 10 N.

WO 2004/015331 A1



MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Device for placing a lamp in a reflector

The invention relates to a device for placing a lamp in a reflector, said device comprising: a socket for holding a lamp and a back plate to be secured to the reflector.

DE- A1-197 52 979 describes the insertion of a lamp into a reflector at the rear of the reflector. Although this device is used in automobiles, it has the disadvantage, for
5 example, that the socket holding the lamp is not pressed with a sufficiently, strong force against the reflector to withstand strong vibrations and shocks, so that the lamp cannot always be safely located in the correct position.

The invention solves this problem and further provides a device of a different construction principle that makes use of a back plate for holding a socket safely pressed
10 against a reflector, preferably a reflector of an automobile.

According to the invention, there is provided a device for placing a lamp in a reflector, said device comprising:

- a socket for holding a lamp and
 - a back plate to be secured to the reflector,
- 15 characterized in that

said socket is provided with a main body part, with a reference plane brought into contact with the a reflector surface, with means for holding the lamp at one side of the reference plane, with a resilient annular spring secured to the main body part at the opposite side of the reference plane, and with two upright arms provided with clicks,

20 said back plate being provided with pressure points,

wherein, when securing the back plate to the reflector, the reference plane is brought into contact with said reflector surface, and the pressure points, when in contact with the clicks of the socket, displace the clicks in the direction of the reflector over a distance Δx so as to put the annular spring under tension, said distance Δx being such that the annular
25 spring presses the reference plane towards said reflector surface with a force of at least 5N, preferably with a force of at least 10 N.

According to a preferred embodiment, the clicks are displaced by the pressure points over a distance ranging from 0.5 mm to 2 mm, preferably 0.8 mm to 1.3 mm. This ensures a desired safe positioning of the lamp in the reflector.

Advantageously, the main body part is provided with two electrically conducting female terminals and the back plate is provided with two mating electrically conducting male terminals such that, when the back plate is moved towards the socket, the male terminal is inserted with friction into the female terminal, to hold the back plate and socket together and to adjust the pressure points with respect to the clicks.

According to a further preferred embodiment, the socket is formed as an integral part from a synthetic resin, preferably polyamide. This socket has good resilience and can withstand the relatively high temperatures generated by the lamp.

Preferably, the back plate is made of an electrically insulating material and is provided with one or more printed circuit(s) connected to the male terminals.

According to a further preferred embodiment, the back plate comprises more than one set of pressure points to bring an equal number of sockets into contact with a reflector unit provided with a number of reflectors. For example, a back light, a brake light, and a direction indicator light may thus be placed easily and safely in the reflector unit.

The invention further relates to a socket for use in said device and to a back plate for use in the device.

A non-limiting but preferred embodiment of the invention will now be described with reference to the drawing, in which:

Fig. 1 is a socket to be secured to a reflector,

Fig. 2 shows a back plate with socket according to the invention,

Fig. 3 is a very schematic view of the combination of back plate and socket, and

Figs. 4a - 4d show several steps in the process of securing the socket to a reflector.

Fig. 1 is a schematic perspective view of a lamp mounting socket or cap 1 for a light source, especially a halogen lamp, for example for use as a tail lamp in an automobile. The socket or cap 1 has a main body part 2. This main body part 2 is provided with upright resilient tongues 3 with small conical protuberances or catches 4 to securely hold a light source. At the lowerside of the main body part 2, an annular spring 5 is secured in two diametrically opposed locations indicated with the reference numeral 6 (only one is shown).

The annular spring 5 is provided with upright arms 7 at two diametrically opposed sides. These upright arms 7 are substantially 90° offset with respect to the securing locations 6 of the annular spring 5. The arms 7 provided with catches or clicks 8 are at their ends.

5 The socket or cap 1 is formed as one single part from a thermoplastic resin, preferably polyamide. This material has a sufficient resilience and can withstand the relatively high temperatures that are generated by the lamp in use.

A socket or cap 1 of this kind is intended to be used in a reflector of an automobile, for example as a socket for a tail light, a braking light, or a direction indicator light. After a lamp (not shown in this Figure), for example a recently developed high-
10 performance halogen lamp of small dimension but with a high light intensity, has been inserted into the socket or cap 1 such that the catches 4 securely hold the lamp, the cap is to be mounted on a reflector. For this purpose the reflector is provided with a mounting opening into which the circular main body part 2 of the cap 1 can be inserted. The reflector may normally further be provided with associated wall parts, for example each with an opening.
15 Each socket click 8 can be clicked into such an opening by pressing the resilient annular spring 5 upwards. The resilience of the spring activates a pressure force that withstands vibrations and shocks and safely retains the cap 1 in the reflector. A retention of this kind is known to those skilled in the art.

To seal the cap in the reflector against humidity or dust, the main body part 2
20 may be provided at its circumference with an annular groove (not shown) into which a sealing ring can be inserted.

Sockets of this kind normally have electrical contacts in the hollow inner part of the main body 2 for connection to a plug or connector, to provide the electrical energy for the lamp. At the rear of an automobile, the reflector may have a lamp for the backing light, a
25 lamp for the brake light, and a lamp for the direction indicator, so that for each lamp a socket or cap 1 has to be clicked into the relevant part of the reflector and the plug or connector has to be inserted into the socket. The electrical wires of the connector normally lead to a printed circuit board provided with the required electrical circuit(s).

A large number of set makers prefer the mounting of the sockets or caps 1 in a
30 reflector with the use of a "back plate", instead of caps clicking with their clicks 8 into relevant click openings of the reflector. This may further advantageously prevent the use of said plug or connector and makes it unnecessary to secure the electrical leads of the plug(s) to, for example, a separately positioned circuit board.

Fig 2 schematically illustrates an example of the possibility of mounting the cap 1 with the help of a schematically shown back plate 11. The solution according to the invention is such that the construction of the cap can essentially be equivalent to that of the cap according to Fig. 1, only the electrical connections need a minor change.

5 In Fig. 2, the cap 1 is shown with the main body part 2, the tongues 3 provided with the small conical catches 4 to hold a lamp tightly, the resilient annular spring 5, and the upright arms 7 with catches or clicks 8. In the embodiment shown, the electrical connection to an electrical power supply is formed by electrically conducting hollow terminals 10 of rectangular cross section (only one is shown). These terminals or female contacts 10 are
10 secured to the elements to connect the annular spring 5 to the main body part 2, for example as indicated by the reference numeral 6 in Fig. 1. The electrical connection of the hollow terminals to the lamp to be placed in the cap 1 may be of any suitable kind within the knowledge of those skilled in the art and is not relevant to the present invention.

Fig. 2 schematically shows a back plate 11 (or mounting panel with printed
15 circuit). The back plate 11 consists of an electrically non-conducting material and is provided with a printed circuit of which only leads 12 are diagrammatically shown in this Figure. The back plate 11 is provided with electrically conducting upright back plate terminals or male contacts 13. These male contacts 13 of the back plate 11 can be inserted into the female contacts 10 of the cap 1 when the back plate 11 is brought into contact with the cap 1.
20 Frictional contact between the terminals 13 and the hollow terminals 10 ensures that the back plate 11 and cap 1 are held together before this combination is secured to the reflector of, for example a rear light of an automobile while at the same time providing the necessary electrical contact.

According to the invention, the back plate 11 is provided with pressure points
25 14 that, when the back plate 11 and the cap 1 are moved together, are brought into contact with the clicks 8 of the upright arms 7 of the cap 1.

Fig. 3 is a very schematic view in which only the parts of Figs. 1 and 2 essential to the invention are shown, to disclose the principle of the invention. A cap 1 as shown in Figs. 1 and 2 will not be clicked with the clicks 8 into openings of associated parts
30 of a reflector, as mentioned with reference to Fig. 1, but according to the invention use is made of a back plate 11 with pressure points that can come into contact with the clicks 8 of the arms 7. When securing the back plate 11 to the reflector, as will be described with reference to Fig. 4, the pressure points 14 displace the clicks over a small distance and thus exercise a force on the annular spring 5, due to which the cap 1 will be brought into the correct

position in the reflector and can further withstand vibrations and shocks so that it will be securely be held in place. (Only a part 15 of the reflector is shown, said part being provided with an opening 18 (see Fig. 4c) into which the upper portion of the main body part 2 is inserted; a lower portion of the main body part 2 is in contact with the reflector 15 at the position of a reference plane 16).

Figs. 4 a - d show the principle of how the combination of cap 1 and back plate 11 is used to secure the cap 1 safely in the reflector 17.

In Fig. 4a, the cap 1 and back plate are shown in the still separated position in which the cap 1 is placed above the back plate 11. Back plate 11 and cap 1 are brought into the mutually correct positions in that the male terminals 13 are inserted into the female terminals 10.

Fig. 4b shows the position in which the cap and back plate are held together due to the friction between the male terminal 13 that is inserted in the female terminal. The pressure points 14 are in contact with the clicks 8 but do not exercise a force on the clicks. The annular spring 5 is thus free of tension.

In Fig. 4c, the reflector 17 is schematically shown. The reflector has an opening 18 into which the upper part of the cap can be inserted (as described with reference to Fig. 3).

Fig. 4d shows how the combination of cap and back plate is mounted on the reflector 17 (see also Fig. 3). First the reference plane 16 comes into contact with the reflector. Then the back plate will be secured to the reflector. This may take place, for example, by securing the back plate to the reflector with the aid of screws (not shown) or in any other suitable way. The reference plane 16 is brought into contact with the reflector surface, and the pressure points 14, when in contact with the clicks 8, displace the clicks in the direction of the reflector over a distance Δx so as to put the annular spring 5 under tension. The distance of displacement of the clicks 8 with respect to the main body part 2 of the socket is such that the annular spring presses the reference plane 16 against said reflector surface. This compression force is at least 5 N and preferably at least 10N. In this way the socket is safely held to the reflector and can withstand vibrations and shocks while the lamp is placed in the desired position. Preferably the distance Δx ranges from 0.5 mm to 2 mm, more preferably from 0.8 mm to 1.3 mm.

The back plate may have more than one set of pressure points (14) to bring an equal number of sockets into contact with a reflector unit provided with a number of

reflectors. This may be chosen when, for example, a back light, a braking light and/or a direction indicator light has to be placed in the reflector unit in the rear part of an automobile.

It will be understood that the description and drawing are merely a non-limiting example of the present invention and that changes and modifications may be included within the scope of the appended claims.

CLAIMS:

1. Device for placing a lamp in a reflector, said device comprising:

- a socket for holding a lamp and
- a back plate to be secured to the reflector,

characterized in that

5 said socket (1) is provided with a main body part (2), with a reference plane (16) to be brought into contact with the a reflector surface, with means (3) for holding the lamp at one side of the reference plane, with a resilient annular spring (5) secured to the main body part at the opposite side of the reference plane, and with two upright arms (7) provided with clicks (8),

10 said back plate (11) being provided with pressure points (14), wherein, when securing the back plate to the reflector, the reference plane (16) is brought into contact with said reflector surface, and the pressure points (14), when in contact with the clicks (8) of the socket, displace the clicks (8) in the direction of the reflector over a distance Δx so as to put the annular spring (5) under tension, said distance Δx being such that the
15 annular spring (5) presses the reference plane towards said reflector surface with a force of at least 5N, preferably with a force of at least 10 N.

2. Device according to claim 1, characterized in that the clicks (8) are displaced by the pressure points (14) over a distance ranging from 0.5 mm up to 2 mm, preferably 0.8
20 mm to 1.3 mm.

3. Device according to claim 1 or 2, characterized in that the main body part (2) is provided with two electrically conducting female terminals (10), and the back plate (11) is provided with two mating electrically conducting male terminals (13) such that, when the
25 back plate is moved towards the socket, the male terminal (13) is inserted with friction into the female terminal (10) so as to hold the back plate and socket together and to position the pressure points (14) with respect to the clicks (8).

4. Device according to any one of the preceding claims, characterized in that the socket (1) is formed as an integral part from a synthetic resin, preferably polyamide.
5. Device according to any one of the preceding claims, characterized in that the back plate (11) is made from an electrically insulating material and is provided with one or more printed circuit(s) connected to the male terminals (13).
6. Device according to any one of the preceding claims, characterized in that the back plate comprises more than one set of pressure points (14) to bring an equal number of sockets into contact with a reflector unit provided with a number of reflectors.
7. Socket for use in a device as claimed in any one of the claims 1 to 6.
8. Back plate for use in a device as claimed in any one of the claims 1 to 6.

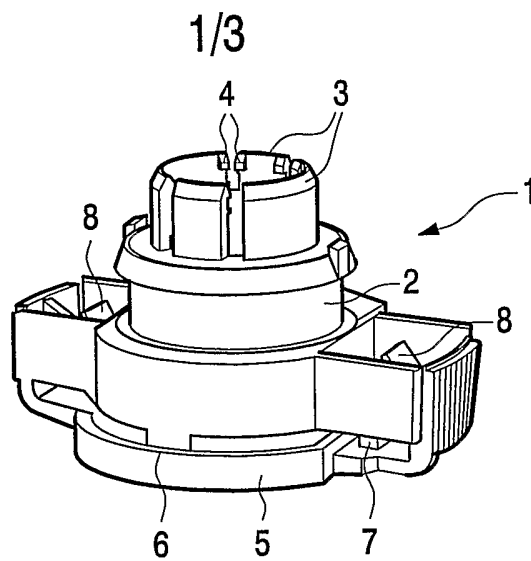


Fig.1

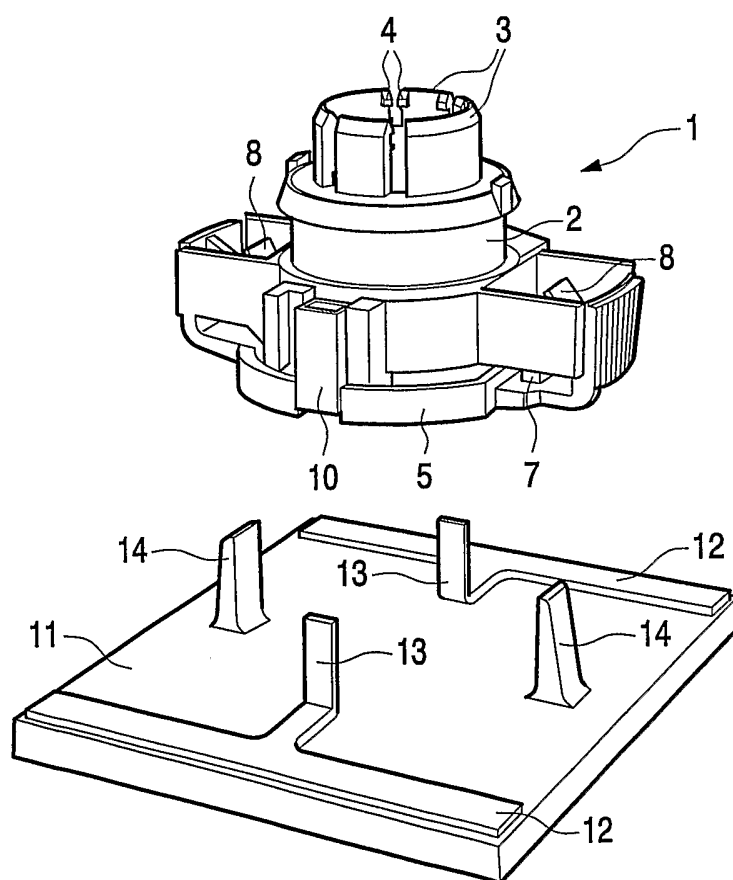


Fig.2

2/3

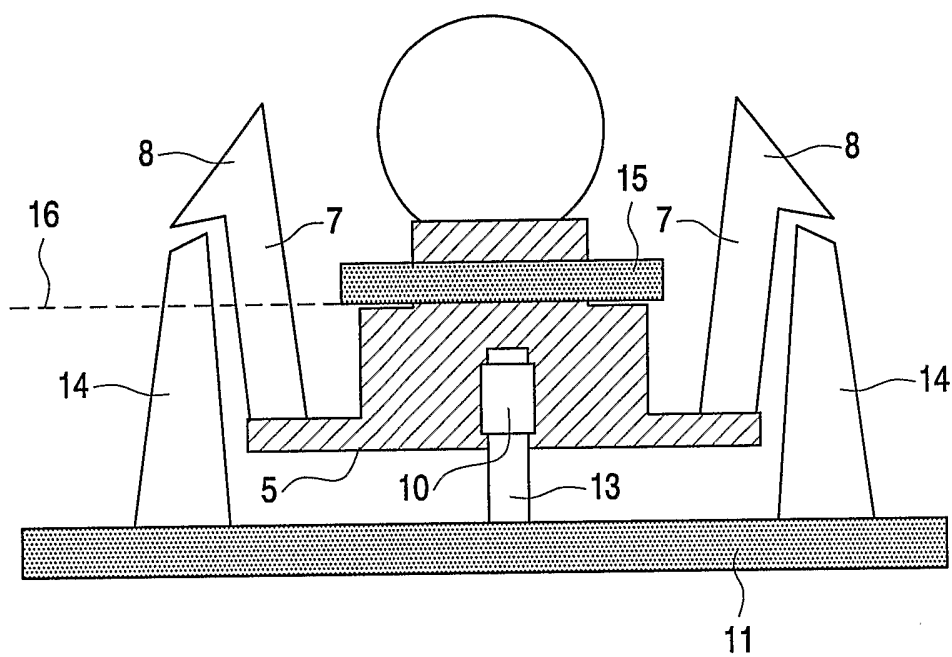


Fig.3

3/3

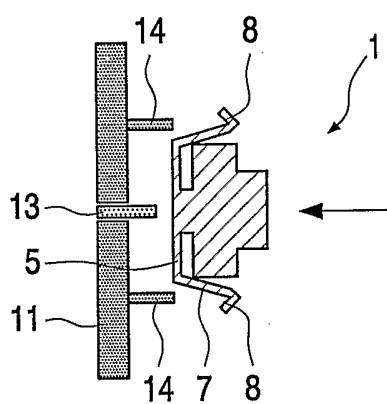


Fig. 4A

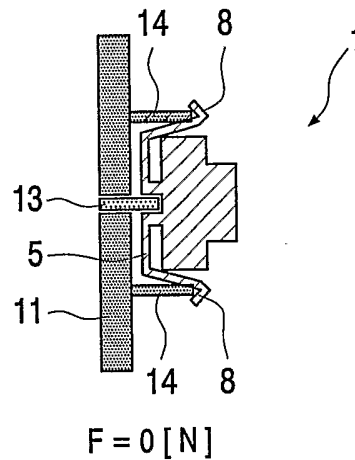


Fig. 4B

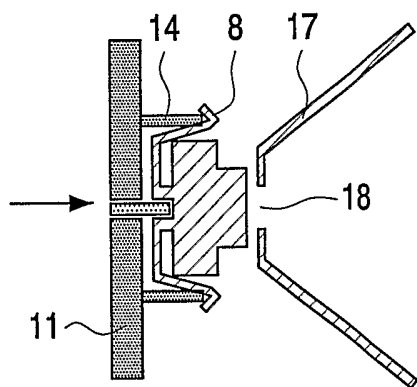


Fig. 4C

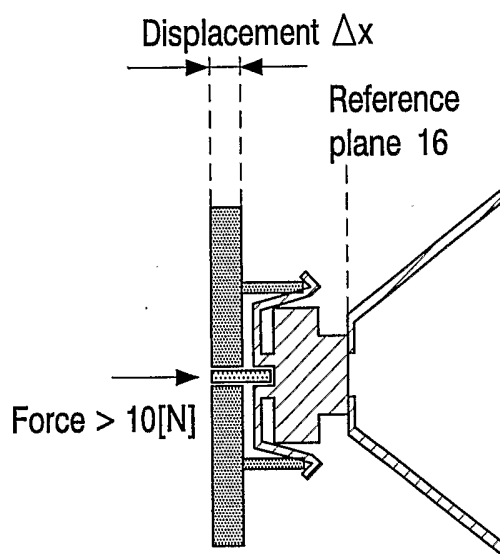


Fig. 4D

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB 03/03272

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F21V19/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F21V H01J H01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 197 52 979 A (PATRA PATENT TREUHAND) 2 June 1999 (1999-06-02) cited in the application abstract column 3, line 11 - line 47 column 3, line 56 - column 4, line 15 figures 1-4,7 ---	1,7,8
A	WO 99 52128 A (KONINKL PHILIPS ELECTRONICS NV ; PHILIPS SVENSKA AB (SE)) 14 October 1999 (1999-10-14) claim 1 figures 1A,1B,2,3 ---	1,7,8
A	FR 2 790 063 A (VALEO VISION) 25 August 2000 (2000-08-25) page 6, line 5 - page 8, line 8 figures 1-3 ---	1,7,8
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

11 November 2003

Date of mailing of the international search report

25/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Prévot, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 03/03272

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 139 334 A (MOLINARO MARK CHRISTOPHER ET AL) 31 October 2000 (2000-10-31) column 4, line 13 - line 31 figures 1-4 -----	1,7,8

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No
PCT/IB 03/03272

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19752979	A	02-06-1999	DE 19752979 A1	02-06-1999
			AT 214202 T	15-03-2002
			BR 9815046 A	03-10-2000
			WO 9928949 A1	10-06-1999
			DE 59803306 D1	11-04-2002
			EP 1034560 A1	13-09-2000
			JP 2001525592 T	11-12-2001
			US 6276812 B1	21-08-2001
WO 9952128	A	14-10-1999	CN 1263635 T	16-08-2000
			EP 0986824 A1	22-03-2000
			WO 9952128 A1	14-10-1999
			JP 2002503388 T	29-01-2002
			US 6210020 B1	03-04-2001
FR 2790063	A	25-08-2000	FR 2790063 A1	25-08-2000
			DE 10008047 A1	24-08-2000
			ES 2177383 A1	01-12-2002
US 6139334	A	31-10-2000	NONE	