




(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2020/09/11
 (87) Date publication PCT/PCT Publication Date: 2021/03/18
 (85) Entrée phase nationale/National Entry: 2022/03/10
 (86) N° demande PCT/PCT Application No.: EP 2020/075575
 (87) N° publication PCT/PCT Publication No.: 2021/048425
 (30) Priorité/Priority: 2019/09/11 (GB1913116.8)

(51) Cl.Int./Int.Cl. *B05B 1/18* (2006.01),
B05B 1/20 (2006.01), *B05B 1/26* (2006.01)
 (71) Demandeur/Applicant:
GJOSA SA, CH
 (72) Inventeurs/Inventors:
GABELLA, THOMAS, CH;
GANSHOF VAN DER MEERSCH, NICOLAS, CH
 (74) Agent: AIRD & MCBURNEY LP

(54) Titre : INSERT DE POMME DE DOUCHE
 (54) Title: A SHOWER HEAD INSERT

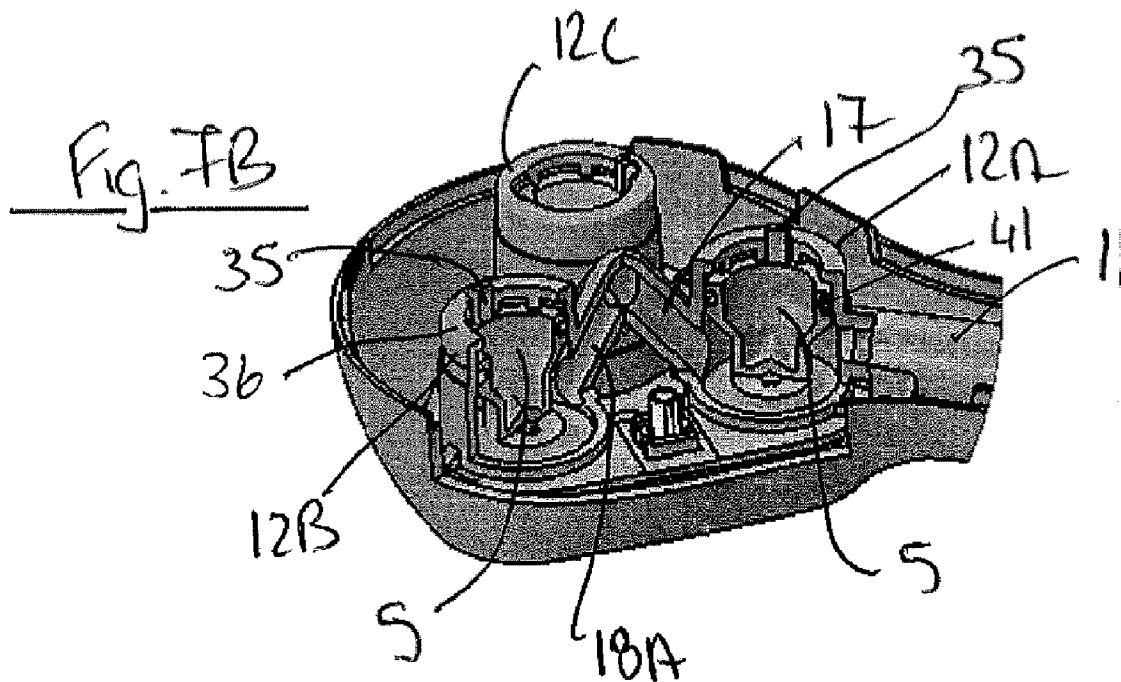

(57) **Abrégé/Abstract:**

A shower head insert (1) comprises at least two water nozzle cartridges (5), each having at least two nozzles (30) configured to produce water jets that impact to atomise the liquid producing droplets of water, and an injection moulded water distribution system (4) to supply liquid to the at least two water nozzle cartridges. The water distribution system comprises at least two sockets (12A, 12B, 12C) for receiving the water nozzle cartridges (5), a central water inlet conduit (11) in liquid communication with the first socket (12A), and a narrow bore conduit (14) providing high pressure liquid communication between the first and second sockets. The narrow bore conduit is configured to allow removal of conduit inner mould needles from the conduit after injection moulding through an open end of the sockets and in one embodiment comprises an upwardly depending section (17) and downwardly depending sections (18A, 18B). A shower head or shower head assembly comprising the shower head insert, and a water nozzle cartridge for the shower head insert, are also provided.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
18 March 2021 (18.03.2021)



(10) International Publication Number
WO 2021/048425 A1

(51) International Patent Classification:

B05B 1/18 (2006.01) *B05B 1/20* (2006.01)
B05B 1/26 (2006.01)

(21) International Application Number:

PCT/EP2020/075575

(22) International Filing Date:

11 September 2020 (11.09.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1913116.8 11 September 2019 (11.09.2019) GB

(71) Applicant: **GJOSA SA** [CH/CH]; La Haute-Route 78,
2502 Biel/Bienne (CH).

(72) Inventors: **GABELLA, Thomas**; Place du Nord 3, 1005
Lausanne (CH). **GANSHOF VAN DER MEERSCH,
Nicolas**; c/o SICT SA, Avenue de Riond-Bosson 3, 1110
Morges (CH).

(74) Agent: **PURDY, Hugh, Barry**; PurdyLucey Intellectual
Property, 6-7 Harcourt Terrace, Dublin 2, D02 FH73 (IE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,


DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A SHOWER HEAD INSERT

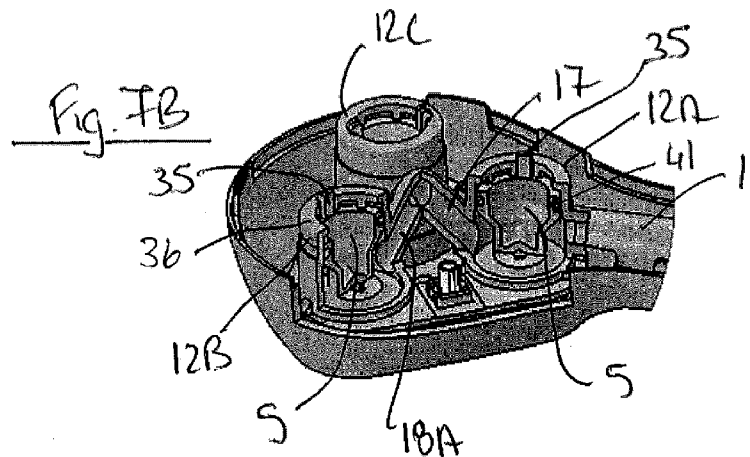

(57) Abstract: A shower head insert (1) comprises at least two water nozzle cartridges (5), each having at least two nozzles (30) configured to produce water jets that impact to atomise the liquid producing droplets of water, and an injection moulded water distribution system (4) to supply liquid to the at least two water nozzle cartridges. The water distribution system comprises at least two sockets (12A, 12B, 12C) for receiving the water nozzle cartridges (5), a central water inlet conduit (11) in liquid communication with the first socket (12A), and a narrow bore conduit (14) providing high pressure liquid communication between the first and second sockets. The narrow bore conduit is configured to allow removal of conduit inner mould needles from the conduit after injection moulding through an open end of the sockets and in one embodiment comprises an upwardly depending section (17) and downwardly depending sections (18A, 18B). A shower head or shower head assembly comprising the shower head insert, and a water nozzle cartridge for the shower head insert, are also provided.



WO 2021/048425 A1

TITLE

A shower head insert

5

Field of the Invention

The present invention relates to a shower head insert for a shower head of the type that produces atomised droplets of water from impinging jets of high-pressure water

10

Background to the Invention

Water-saving shower heads that employ lower volumes of water at higher pressures are described in EP2204508. The shower heads employ at least one nozzle body having at least two nozzles configured to produce water jets that impact to atomise the liquid producing atomised droplets of water. The shower heads are reported to use 2l/min of water as opposed to up to 11l/min with a convention shower head. Nozzle bodies are illustrated in Figs 13 and 14 of EP2204508 and in WO2011/054120. Shower heads including more than one nozzle body are produced by the company Gjosa SA. In this design, a shower insert is provided having three nozzle bodies (cartridges) and a water distribution system including three cartridge-receiving sockets configured for distributing water to the cartridges at about 3 Bar. The water distribution system has a central water inlet conduit in fluid communication with a first cartridge-receiving socket, and second and third cartridge-receiving sockets in fluid communication with the first cartridge-receiving socket via narrow bore conduits. The three cartridge-receiving sockets are disposed around a central part of the water distribution system, and the narrow bore conduits curve around the central section. The fact that the narrow bore conduits are curved means that the water distribution system cannot be injection moulded in one piece, as this would prevent removal of the inner mould. The central section includes means for fixing the system to the shower head body, and once is it fixed to the shower head body, a sealing closure is applied over the central section to fluidically seal the narrow bore conduits supplying high pressure water from the first socket to the second and third conduits. Each of the sockets has a closed top and open bottom parts, and the cartridges are configured to be inserted into the sockets from the bottom and screwed into position in the socket. High pressure water enters each socket at a top headspace and two small holes at the top of each nozzle body.

The water distribution system therefore has six parts, the main body that is injection moulded, a sealing closure of the central section, a sealing O-ring, and three screws, and needs to be assembled prior to insertion of the cartridges. It would be preferable to provide
5 the water distribution system as a one-part injection moulded part. In addition, the cartridges are designed to receive pressurised water through nozzles at the top of the cartridge, which results in a downward pressure being exerted in the cartridge in the socket, with the associated risk that the cartridge is forced out of the socket into contact with a user.

10

Shower head inserts are described in US4415123, GB2033251, US2008223957 and US5397064.

It is an object of the invention to overcome at least one of the above-referenced problems.

15

Summary of the Invention

The present invention provides an insert for a shower head of the above-referenced type,
20 that addresses the problems of the prior art by having, in one embodiment, a water distribution system that can be injection moulded in one piece. This is achieved by re-designing of the water distribution system so that the narrow conduit between the first and second sockets is configured to allow removal of inner mould inserts (needles) from the conduit through an open end of the sockets after injection moulding. In the embodiments
25 shown the conduit is angled and comprises a straight upwardly depending section and downwardly depending sections that allows the inner mould inserts (needles) to be removed from each end of the conduit through the open part of the sockets. This is illustrated in Fig. 6B which shows the upwardly depending section of the conduit disposed at an angle to allow a first inner mould needle (not shown) be removed from the conduit
30 after injection moulding through the open bottom end of the first socket. The same can be done for the second and third inner mould needles which are used to injection mould the downwardly second and third conduits.

In a first aspect, the invention provides a shower head insert of the type comprising:

35

at least two water nozzle cartridges, each of the type having at least two nozzles configured to produce water jets that impact to atomise the liquid producing droplets of water; and

5 an injection moulded water distribution system to supply high pressure liquid to the at least two water nozzle cartridges,

the water distribution system comprising:

10 at least two sockets for receiving the water nozzle cartridges and having at least one open end,
a central water inlet conduit in liquid communication with the first socket,
and a narrow bore conduit providing high pressure liquid communication between
the first and second sockets,

15 wherein the narrow bore conduit is configured to allow removal of conduit inner mould needles from the conduit through the at least one open end of the sockets after injection moulding.

20 In another aspect, the invention provides a water distribution system for a shower head insert of the type comprising at least two water nozzle cartridges, each having at least two nozzles configured to produce water jets that impact to atomise the liquid producing droplets of water,

the water distribution system comprising:

25 at least two sockets for receiving the water nozzle cartridges,
a central water inlet conduit in liquid communication with the first socket,
and a narrow bore conduit providing high pressure liquid communication between
the first and second sockets,

30 wherein the narrow bore conduit is configured to allow removal of conduit inner mould needles from the conduit through the at least one open end of the sockets after injection moulding.

In one embodiment, the narrow bore conduit is angled and typically has a first section (i.e. proximal section) in fluid communication with the first socket and at least one second section (i.e. distal section) in fluid communication with at least the second socket that are not co-axial.

5

In one embodiment, the first section is upwardly depending and the or each second section(s) is downwardly depending. This is illustrated in Figs 8A and 8B, showing upwardly depending section 17 and two downwardly depending sections 18. In this embodiment, the inner mould needles are removed through the open bottom end of the sockets.

10

In another embodiment, the first section is downwardly depending and the second sections are upwardly depending. In this embodiment, inner mould needles may be removed through an open top of the sockets.

15

In one embodiment, the sockets are open at both ends.

In one embodiment, the water distribution system comprises at least three sockets for receipt of water nozzle cartridges, wherein the narrow bore conduit comprises an upwardly depending section and at least two downwardly depending sections. The conduit may be generally tripod shaped, as shown in Fig. 6A.

20

The shower head insert may comprise three, four or more cartridges, and a water distribution system comprising sockets for receipt of the three, four or more conduits. In most embodiments, the narrow bore conduit is branched to provide pressurised liquid from the first socket to the other sockets. However, an insert having a water distribution system that includes more narrow bore conduits is within the scope of the invention.

25

In one embodiment, the water distribution system comprises at least three sockets for receipt of water nozzle cartridges, wherein the narrow bore conduit comprises a proximal upwardly depending section and at least two distal downwardly depending sections.

30

In one embodiment, each water nozzle cartridge is configured to fit within the socket in a fluidically tight manner and comprises a waist section that defines a channel for water around the water nozzle cartridge when the cartridge is fitted in the socket, whereby the

35

central water inlet conduit and the proximal section of the narrow bore conduit are in fluid communication with the channel. This provides for the supply of pressurised water into the socket at a middle section of the socket, exerting equal upward and downward forces on the cartridge in the socket which in practice cancel each other out and thereby stabilise the cartridge in the socket. This is an advantage over the prior art, where the cartridge and socket are designed to provide a headspace above the cartridge for receipt of pressurised water, which in practice exerts a downward force on the cartridge, with the resultant risk of ejection of the cartridge from the shower head resulting injury to the user.

5

10 In one embodiment, the upper and lower (skirt) sections of the cartridge comprise sealing means to fluidically seal the channel around the cartridge. In one embodiment, the sealing means comprise one or resiliently deformable sealing rings. In one embodiment, the upper and lower sections comprise sealings rings, and optionally annular sockets to seat the annular sealings rings. In one embodiment, the upper section comprises one annular
15 sealing ring and the lower section comprises two or more annular sealing rings. In one embodiment, the annular sealing rings in the lower section of the cartridge are of different diameter, with the diameter of the sealing rings increasing towards a bottom of the lower section.

15

20 In one embodiment, the inlets for each of the two nozzles of each water nozzle cartridge are disposed in the waist section of the water nozzle cartridge, typically on opposite sides of the waist section. In one embodiment, the lower section of the cartridge is hollow and the nozzle outlets are configured to produce water jets that impinge within the hollow lower section.

25

In one embodiment, the water nozzle cartridge is configured to snap-fit into the socket.

In one embodiment, the water nozzle cartridge comprises upwardly depending arms configured to engage a top of the socket.

30

In one embodiment, the insert comprises a base fitting configured to attach to a shower head body and clip to the water distribution system.

In one embodiment, the water nozzle cartridges are injection moulded.

35

In another aspect, the invention provides a shower head comprising a shower head insert according to the invention disposed within a shower head body, wherein the shower head body typically comprises an upper part and a lower part that clip together to enclose the shower head insert. Typically, one of the upper or lower parts (generally the lower part) is configured for coupling to the base fitting, typically by means of a snap-fit arrangement. In one embodiment, the shower head body is overmoulded around the shower head insert.

In another aspect, the invention provides a water nozzle cartridge having a body configured to fit in a socket of the shower head in a fluidically tight manner and comprising at least two nozzles configured to produce water jets that impact to atomise the liquid producing droplets of water, the body having an upper section, a lower section and a waist section that defines a channel for liquid around the water nozzle cartridge when the cartridge is fitted in the socket. Inlets for the nozzles are disposed on an outer surface of the waist section. The lower section may be hollow to provide a skirt section, and nozzle outlets may be configured to direct the water jets into the skirt section to impinge in the skirt section. This produces a homogenous jet of liquid having a homogenous droplet size. Generally, the skirt extends below the point where the jets of liquid impinge. In one embodiment, the upper and lower sections of the cartridge comprise sealing means to fluidically seal the channel around the cartridge. In one embodiment, the sealing means comprise one or resiliently deformable sealing rings. In one embodiment, the upper and lower sections comprise annular sockets to seat annular sealings rings. In one embodiment, the upper section comprises one annular sealing ring and the lower section comprises two or more annular sealing rings. In one embodiment, the annular sealing rings in the lower section of the cartridge are of different diameter, with the diameter of the sealing rings increasing towards a bottom of the lower section.

In one embodiment, the water nozzle cartridge is configured to snap-fit into the socket.

In one embodiment, the water nozzle cartridge comprises upwardly depending arms configured to engage a top of the socket.

In another aspect, the invention provides a shower head insert of the type comprising:

at least two water nozzle cartridges, each of the type having at least two nozzles configured to produce water jets that impact to atomise the liquid producing droplets of water; and

5 an injection moulded water distribution system to supply pressurised liquid to the at least two water nozzle cartridges comprising at least two sockets for receiving the water nozzle cartridges,
a central water inlet conduit in liquid communication with the first socket,
and a narrow bore conduit providing high pressure liquid communication between
10 the first and second sockets,

wherein each water nozzle cartridge is configured to fit within the socket in a fluidically tight manner and comprises a body having an upper section, a hollow lower section and a waist section that defines a channel for liquid around the water nozzle cartridge when the
15 cartridge is fitted in the socket, wherein each nozzle comprises a nozzle inlet (31) disposed on an outer surface of the waist section, and a nozzle outlet (32) configured to direct the water jet into the hollow lower section.

In one embodiment, the upper and lower sections of the cartridge comprise sealing means
20 to fluidically seal the channel around the cartridge. In one embodiment, the sealing means comprise one or more resiliently deformable sealing rings. In one embodiment, the upper and lower sections comprise annular sockets to seat annular sealings rings. In one embodiment, the upper section comprises one annular sealing ring and the lower section comprises two or more annular sealing rings. In one embodiment, the annular sealing rings
25 in the lower section of the cartridge are of different diameter, with the diameter of the sealing rings increasing towards a bottom of the lower section.

In one embodiment, the lower section of the cartridge is hollow and outlets for the nozzles are configured to produce jets of water that impinge in the hollow lower section to atomise
30 the droplets.

In another aspect, the invention provides a method of forming a shower head of the invention comprising the steps of injection moulding the water distribution system, removing the inner mould needles for the narrow bore conduit from the injected moulded

water distribution system through an open end of the sockets, and assembling the components to forms the shower head.

Other aspects and preferred embodiments of the invention are defined and described in
5 the other claims set out below.

Brief Description of the Figures

10 **Figure 1** is a perspective view of a shower head according to the invention, shown from above;

Figure 2 is a perspective view of a shower head according to the invention, shown from below, and showing the three water nozzle cartridges;

15 **Figure 3** is a detailed view of a part of Figure 2 showing one of the water nozzle cartridges;

Figure 4A and **4B** (comparative) are views of a water nozzle cartridge of the prior art;

20 **Figure 5A** and **5B** are views of a water nozzle cartridge of the invention and forming part of the insert of the invention;

Figure 6 is an exploded view of the shower head of Figure 1 showing the two-part shower head body, the water distribution system, three water nozzle cartridges, and the base fitting;

25

Figure 7A is a perspective view from above of the shower head insert of the invention clipped into place in the bottom part of the shower head body;

30 **Figure 7B** is a perspective view with a cutaway of the water distribution system with a cutaway showing the inside of two of the sockets and part of the narrow bore conduit;

Figure 8A is a perspective view from above of the water distribution system of the invention;

35 **Figure 8B** is a sectional view taken along the lines I-I of Figure 8A; and

Figure 8C is a top plan view of a section of the water distribution system taken at a mid-height of the system.

5

Detailed Description of the Invention

All publications, patents, patent applications and other references mentioned herein are hereby incorporated by reference in their entireties for all purposes as if each individual
10 publication, patent or patent application were specifically and individually indicated to be incorporated by reference and the content thereof recited in full.

Definitions and general preferences

15 Where used herein and unless specifically indicated otherwise, the following terms are intended to have the following meanings in addition to any broader (or narrower) meanings the terms might enjoy in the art:

Unless otherwise required by context, the use herein of the singular is to be read to include
20 the plural and *vice versa*. The term "a" or "an" used in relation to an entity is to be read to refer to one or more of that entity. As such, the terms "a" (or "an"), "one or more," and "at least one" are used interchangeably herein.

As used herein, the term "comprise," or variations thereof such as "comprises" or
25 "comprising," are to be read to indicate the inclusion of any recited integer (e.g. a feature, element, characteristic, property, method/process step or limitation) or group of integers (e.g. features, element, characteristics, properties, method/process steps or limitations) but not the exclusion of any other integer or group of integers. Thus, as used herein the term "comprising" is inclusive or open-ended and does not exclude additional, unrecited integers
30 or method/process steps.

It will be appreciated that the water nozzle cartridge and water distribution system of the present invention may be used with liquids other than water, for example aqueous and non-aqueous solutions such as detergent, cosmetic and dermatology compositions.

35

Exemplification

The invention will now be described with reference to specific Examples. These are merely
5 exemplary and for illustrative purposes only: they are not intended to be limiting in any way
to the scope of the monopoly claimed or to the invention described. These examples
constitute the best mode currently contemplated for practicing the invention.

Referring to Fig. 6, there is illustrated a shower head according to the invention indicated
10 generally by the reference numeral 1 and comprising a shower body with an upper part 2
and a lower part 3, an injection moulded water distribution system 4, three water nozzle
cartridges 5, a base fitting 6, and clamp ring 7.

Referring also to Figs 7 and 8, the water distribution system comprises a central water inlet
15 11 that feeds into a first socket 12A through a first inlet 13A. A narrow bore conduit 14
provides fluid communication from the first socket 12A via an outlet 15 to the second and
third sockets 12B and 12C. The narrow bore conduit 14 is comprises a proximal upwardly
depending section 17 that bifurcates into two distal downwardly depending sections 18A
and 18B that feed into the second and third sockets 12B, 12C, respectively. As indicated in
20 Figure 8B, the proximal upwardly depending section 17 is angled to allow an inner mould
needle (not shown) be retracted from the conduit section 17 through an open base 20 of
the first socket 12A, after injection moulding. Similarly, the distal downwardly depending
sections 18A and 18B are angled to allow an inner mould needle (not shown) be retracted
from the conduit section 17 through an open base 21 of the second and third sockets 12B,
25 12C, after injection moulding. Although not illustrated, it would be possible to design the
system such that the inner mould needles could be removed through an open top of the
sockets, which would involve providing the narrow bore conduit in an inverted form.

Referring to Figs 5A and 5B, a water nozzle cartridge 5 of the invention is illustrated in
30 more details. The cartridge 5 comprises a body with a hollow upper section 25, hollow
lower section 26, and waist section 27 disposed between the upper and lower sections.
The purpose of the waist section is to provide an annular water channel around the
cartridge when the cartridge is fitted into the socket. Annular seats 40 (Fig. 5B) are
provided on the upper and lower sections of the cartridge for receipt of rubber sealing rings
35 41 (Fig. 5A), that in use fluidically seal the cartridge in the socket and fluidically seal with

waist section 27 ensuring that no water escapes from the socket above or below the waist section thereby maintaining operational water pressure. The waist section 27 includes two angled nozzles 30 (shown in broken lines) with inlets 31 disposed on an outer face of the waist section and outlets 32 disposed to project the water jets into the lower section 26
5 where they impinge inside the hollow lower section and atomise, producing droplets. Locking clips 35 are provided at the top of the cartridge, and in use engage clip on to a top lip 36 of the socket. In comparison, and referring to comparative figures 4A and 4B, the cartridges are squatter and have water inlets at the top A where the pressurised water is supplied, which causes a downward pressure on the cartridge, necessitating that the
10 cartridges have threads B to allow them threadingly engage with the sockets.

As illustrated in Figures 1-3, the lower part 3 of the shower head body comprises a triangular cut-out 40 into which the base fitting 6 (which is attached to the water distribution system) fits. Figure 2 and 3 show the underside of the shower head, where the lower end
15 of the cartridges 5 and water outlets 32 visible.

All of the parts are made by injection moulding. In the embodiment shown, and with reference to Figure 6, the shower head comprises eight parts, one of which is the water distribution system which can be injection moulded in one piece. The shower head is
20 assembled by first removing the inner mould needles from the conduits (three needles in this embodiment), and then inserting the three cartridges into their respective sockets via the open lower end of the sockets. The base fitting is then attached to the water distribution system, and then both are attached to the lower part of the shower head body. Finally, the upper part of the shower head fitting is clipped to the lower part, and the sealing ring fitted.

25
In use, the central water inlet conduit is fitted to a water supply, and the water turned on. High pressure water travels through the inlet conduit and into the annular conduit defined by the waist section of the cartridge and the socket, where high pressure water enters the two nozzles producing two impinging jets of high-pressure water inside the hollow section
30 of the lower section of the cartridge. High pressure water in the annular conduit also enters the narrow bore conduit and travels to the second and third sockets where it enters corresponding annular conduits and enters the nozzles of the second and third conduits, producing two impinging jets of high-pressure water per cartridge. Thus, the shower head produces three pairs of impinging water jets which atomise to produce a shower of
35 atomised water droplets.

Equivalents

- 5 The foregoing description details presently preferred embodiments of the present invention. Numerous modifications and variations in practice thereof are expected to occur to those skilled in the art upon consideration of these descriptions. Those modifications and variations are intended to be encompassed within the claims appended hereto.

CLAIMS:

1. A shower head insert (1) of the type comprising:

5 at least two water nozzle cartridges (5), each having at least two nozzles (30)
 configured to produce water jets that impact to atomise the liquid producing droplets
 of water; and
 an injection moulded one-piece water distribution system (4) to supply liquid to the
 at least two water nozzle cartridges,

10

the water distribution system comprising:

 at least two sockets (12A, 12B, 12C) for receiving the water nozzle cartridges (5),
 a central water inlet conduit (11) in liquid communication with the first socket (12A),
15 and a narrow bore conduit (14) providing high pressure liquid communication
 between the first and second sockets,

20

wherein the narrow bore conduit is angled to allow removal of conduit inner mould needles
from the conduit through the at least one open end of the sockets after injection moulding.

2. A shower head insert according to Claim 1, in which the narrow bore conduit is angled
and comprises an upwardly depending section (17) and a downwardly section (18).

25 3. A shower head insert according to Claim 2, in which the narrow bore conduit comprises
 a proximal upwardly depending section (17) and one or more distal downwardly depending
 sections (18).

30 4. A shower head insert according to Claim 3, in which the water distribution system (14)
 comprises at least three sockets (12A, 12B, 12C) for receipt of water nozzle cartridges (5),
 wherein the narrow bore conduit (14) comprises a proximal upwardly depending section
 (17) and at least two distal downwardly depending sections (18A, 18B).

5. A shower head insert according to any preceding Claim, in which each water nozzle
cartridge (5) is configured to fit within the socket in a fluidically tight manner and comprises

a waist section (27) that defines a channel for water around the water nozzle cartridge when the cartridge is fitted in the socket.

5 6. A shower head insert according to Claim 5, in which the inlets (31) for each of the two nozzles (30) of each water nozzle cartridge are disposed in the waist section (27) of the water nozzle cartridge.

10 7. A shower head insert according to Claim 5 or 6, in which the cartridge comprises sealing means to fluidically seal the channel when the cartridge is fitted in the socket.

8. A shower head insert according to Claim 7, in which the sealing means comprise one or resiliently deformable annular sealing rings (41) and corresponding annular sockets (40) to seat the one or more annular sealings rings.

15 9. A shower head insert according to any preceding Claim in which the water nozzle cartridge (5) is configured to snap-fit into the socket.

20 10. A shower head insert according to Claim 9 in which the water nozzle cartridge (5) comprises upwardly depending arms (35) configured to engage a top (36) of the socket.

11. A shower head insert according to any proceeding Claim, in which the water nozzle cartridges are injection moulded.

25 12. A shower head comprising a shower head insert (1) according to any preceding Claim disposed within a shower head body.

30 13. A shower head according to Claim 12, wherein the shower head body comprises an upper part (2) and a lower part (3) that clip together to enclose the shower head insert.

14. A shower head according to Claim 12, wherein the shower head body is overmoulded around the shower head insert.

15. A shower head according to any proceeding Claim, including a base fitting (6) configured to lock the shower head inert, shower head body and water distribution system together.

5 16. A kit for assembling a shower head insert according to any of Claims 1 to 11 or a shower head according to Claim 12.

10 17. A water nozzle cartridge for use in a shower head and having a body configured to fit in a socket of the shower head in a fluidically tight manner and comprising at least two nozzles (30) configured to produce water jets that impact to atomise the liquid producing droplets of water, the body having an upper section (25) with an open top, a hollow lower section (26) with an open bottom, a waist section (27) disposed between the upper and hollow lower sections that in use defines a channel for water around the water nozzle cartridge when the cartridge is fitted in a socket of the shower head, wherein each nozzle
15 comprises an inlet (31) disposed on an outer surface of the waist section, and an outlet (32) configured to direct the water jet into the hollow lower section such that the water jets impact within the hollow lower section.

20 18. A water nozzle cartridge according to Claim 17, in which the upper and skirt sections of the cartridge comprise sealing means to fluidically seal the channel when the cartridge is fitted in the socket.

25 19. A water nozzle cartridge according to Claim 18, in which the sealing means comprise one or resiliently deformable annular sealing rings (41) and corresponding annular sockets (40) to seat the one or more annular sealings rings.

20. A water nozzle cartridge according to Claim 19, in which the lower section of the cartridge comprises two or more sealing rings (1) of different diameter.

30 21. A water nozzle cartridge according to any of Claims 17 to 20, in which the water nozzle cartridge is configured to snap-fit into the socket.

22. A water nozzle cartridge according to Claim 21, in which the water nozzle cartridge comprises upwardly depending arms (35) configured to engage a top of the socket.

23. A shower head insert (1) of the type comprising:

at least two water nozzle cartridges (5), each having at least two nozzles (30) configured to produce water jets that impact to atomise the liquid producing droplets of water; and

an injection moulded water distribution system (4) to supply liquid to the at least two water nozzle cartridges and comprising at least two sockets (12A, 12B, 12C) for receiving the water nozzle cartridges (5) in a fluidically tight manner, a central water inlet conduit (11) in liquid communication with the first socket (12A), and a narrow bore conduit (14) providing high pressure liquid communication between the first and second sockets,

wherein the narrow bore conduit is angled to allow removal of conduit inner mould needles from the conduit through the at least one open end of the sockets after injection moulding,

wherein each water nozzle cartridge comprises a body having an upper section (25) with an open top, a hollow lower section (26) with an open bottom, and a waist section (27) disposed between the upper and hollow lower sections that in use defines a channel for water around the water nozzle cartridge when the cartridge is fitted in a socket of the shower head, wherein each nozzle comprises an inlet (31) disposed on an outer surface of the waist section, and an outlet (32) configured to direct the water jet into the hollow lower section such that the water jets impact within the hollow lower section.

24. A shower head insert (1) comprising three water nozzle cartridges (5), wherein the water distribution system (4) comprises three sockets (12A, 12B, 12C) for receiving the water nozzle cartridges (5) in a fluidically tight manner.

25. A shower head insert (1) according to Claim 23 or 24, in which the upper and hollow lower sections of the cartridge comprise sealing means to fluidically seal the channel when the cartridge is fitted in the socket.

26. A shower head insert (1) according to Claim 25, in which the sealing means comprise one or resiliently deformable annular sealing rings (41) and corresponding annular sockets (40) to seat the one or more annular sealings rings.

27. A shower head comprising a shower head insert (1) of any of Claims 23 to 26 disposed within a shower head body.

Fig. 1

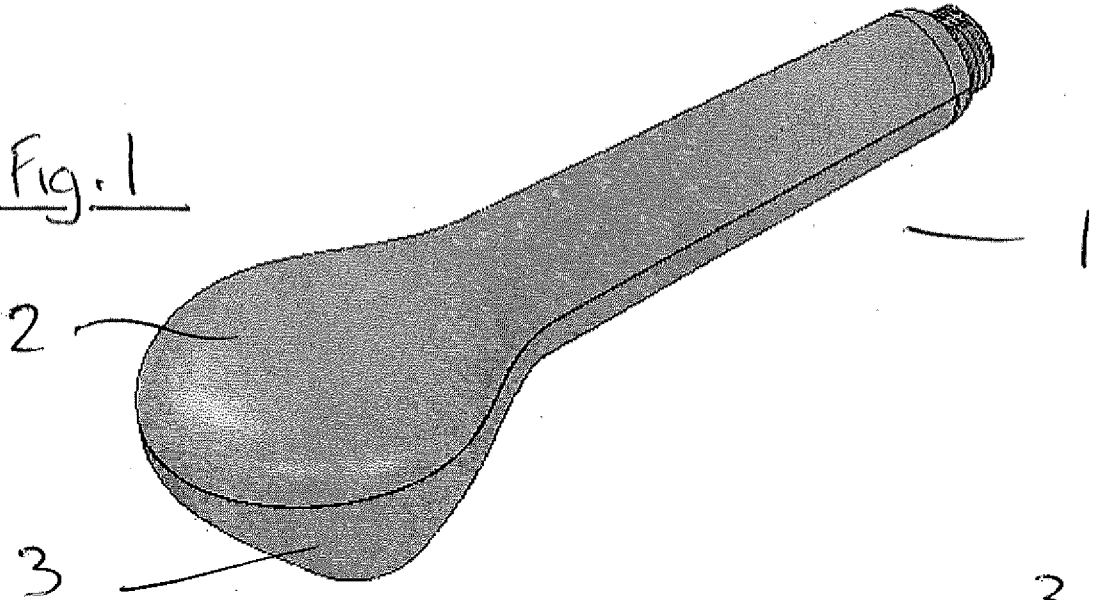


Fig. 2

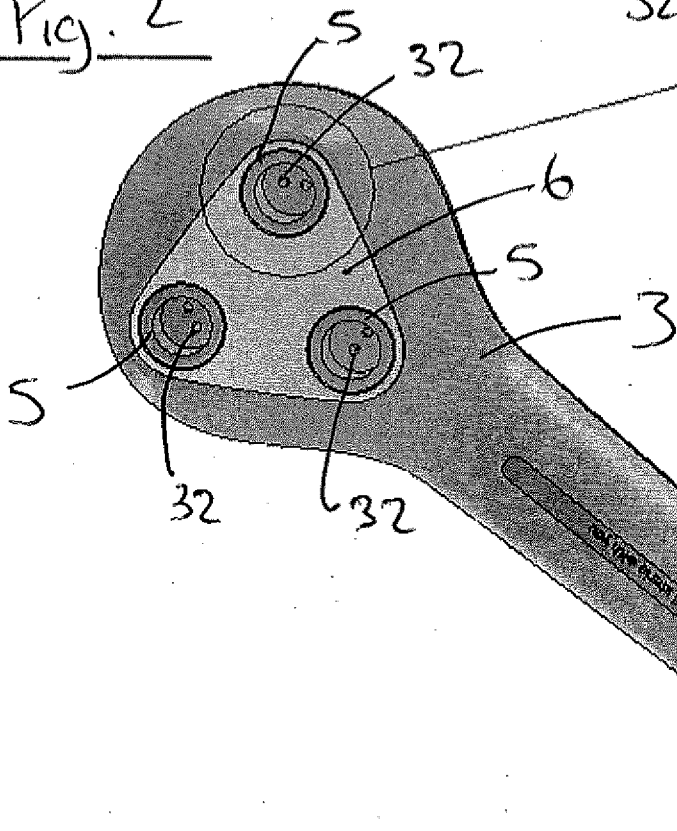


Fig. 3

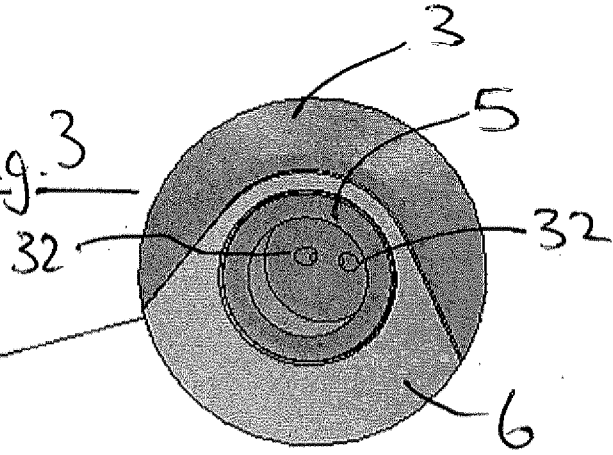


Fig. 4A (COMPARATIVE)

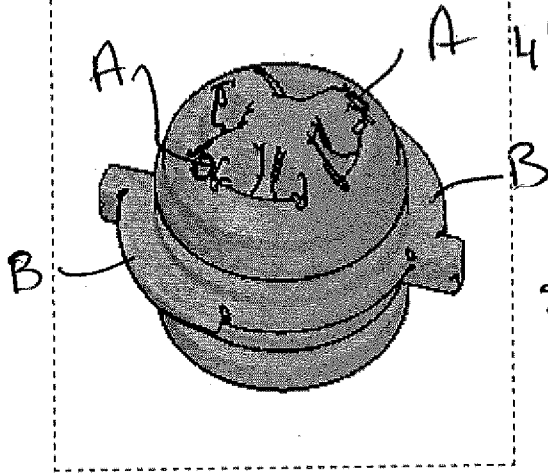


Fig. 5A:

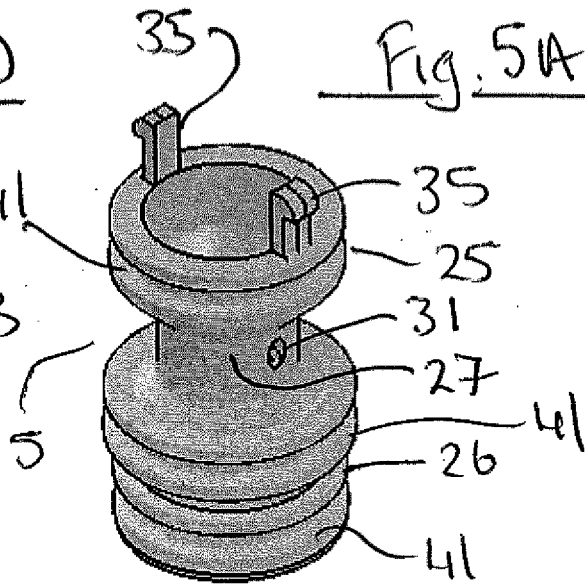


Fig. 4B (COMPARATIVE)

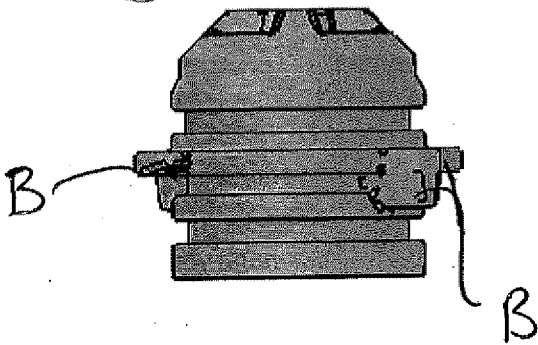
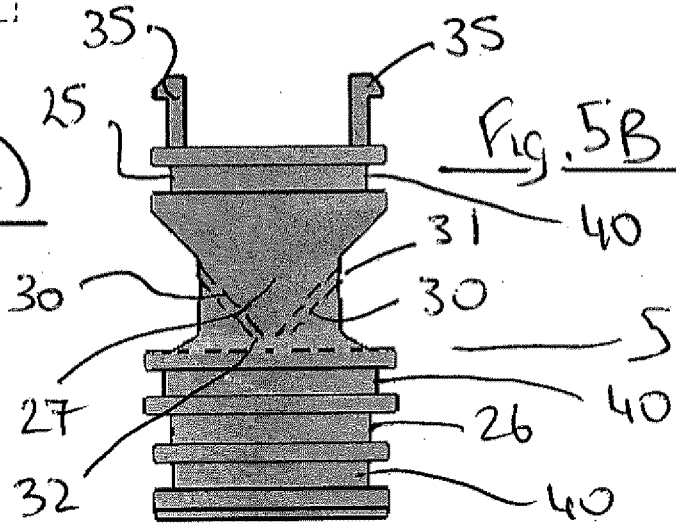


Fig. 5B



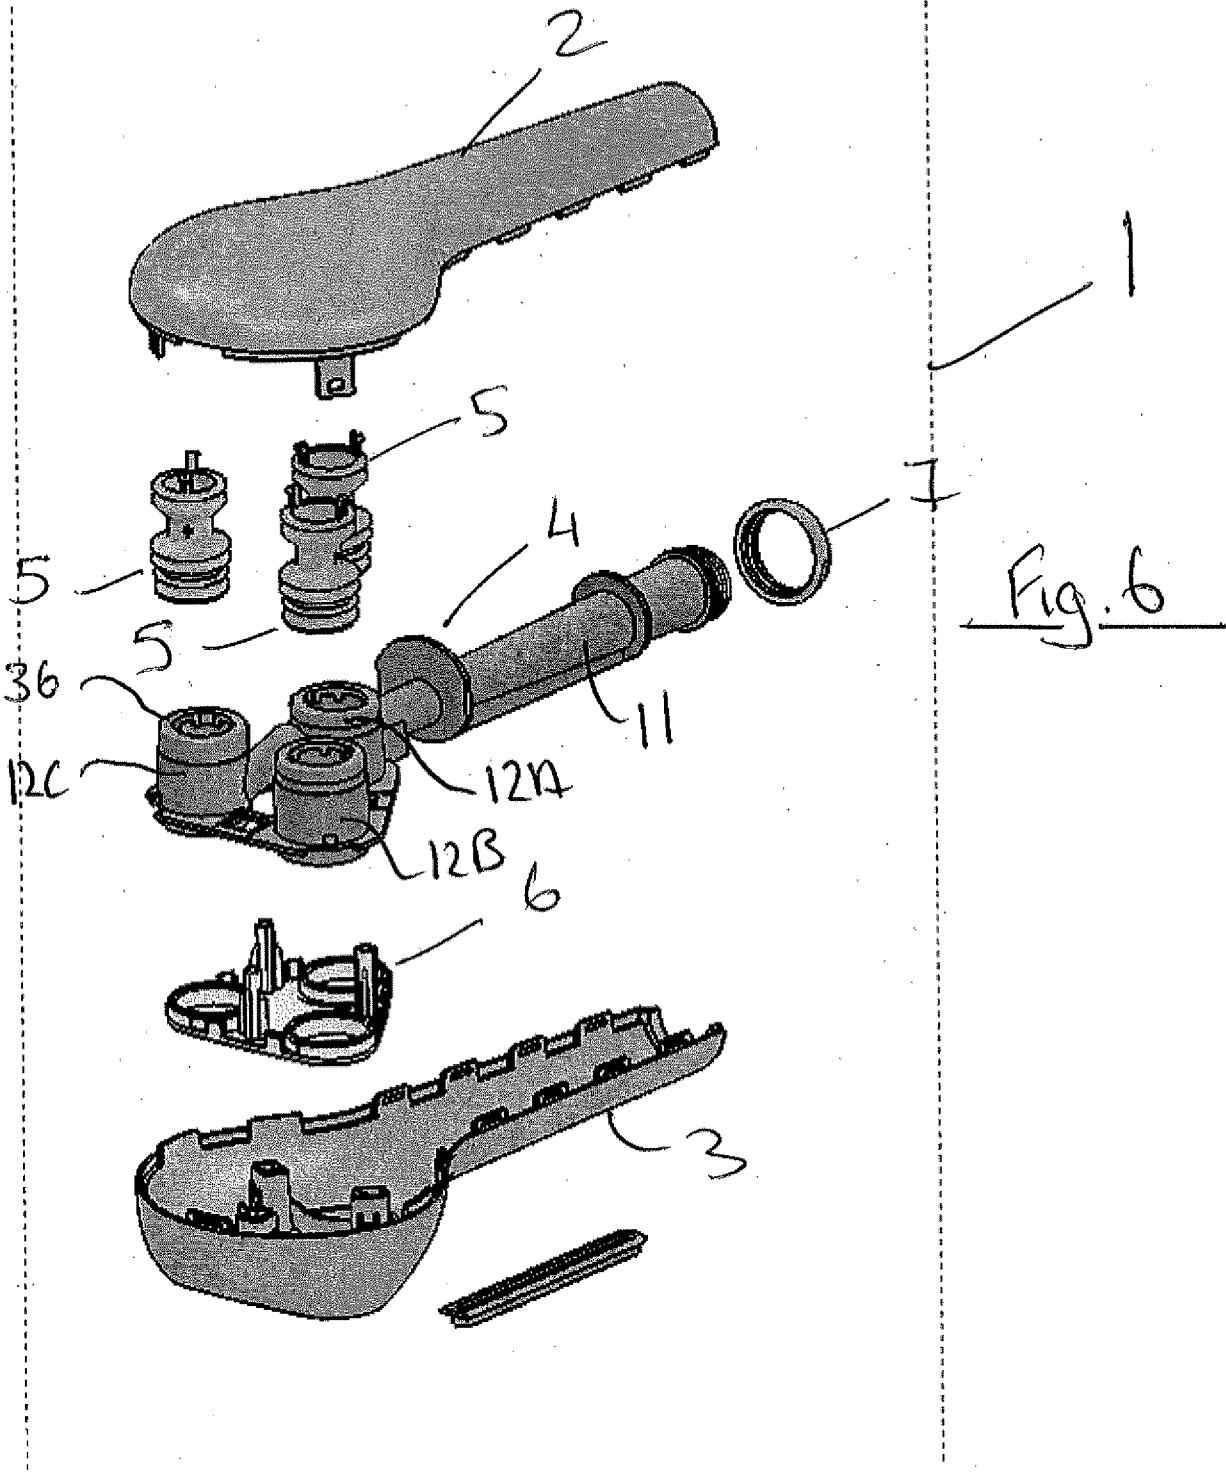
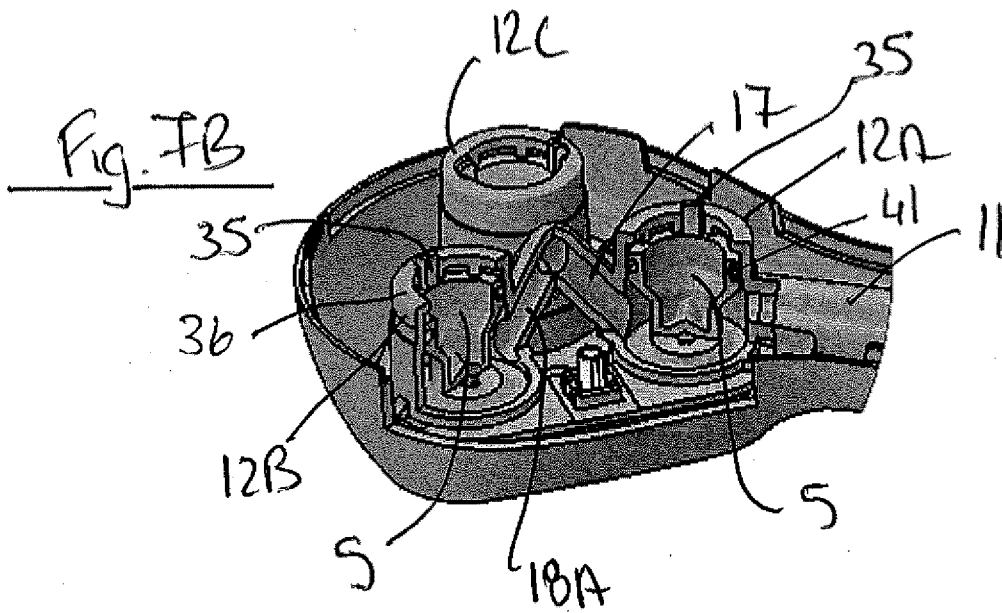
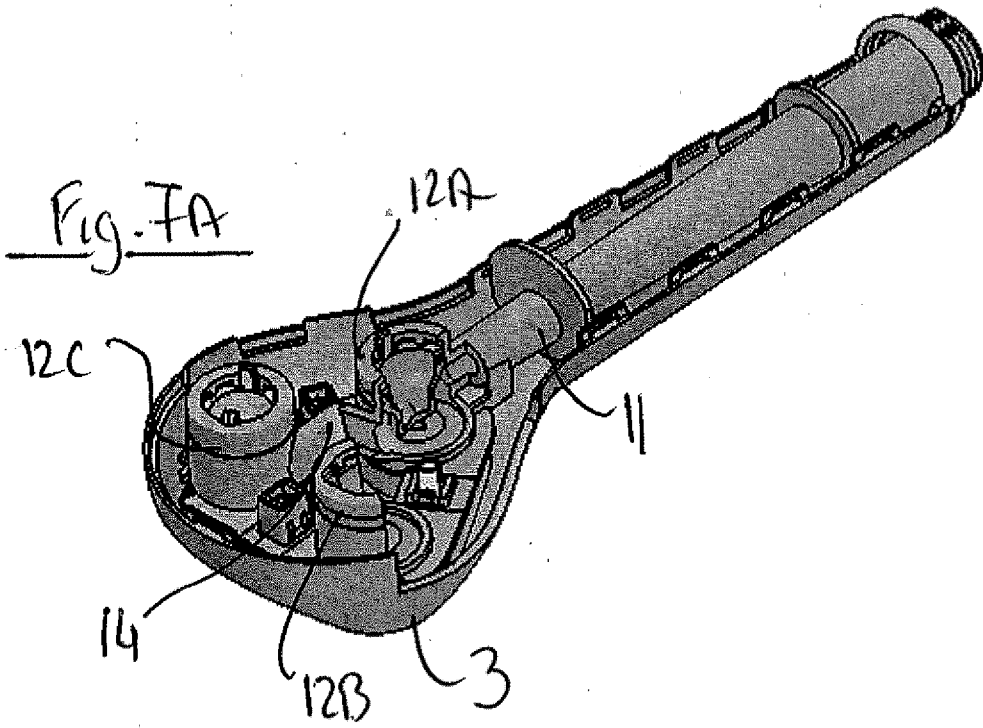


Fig. 6





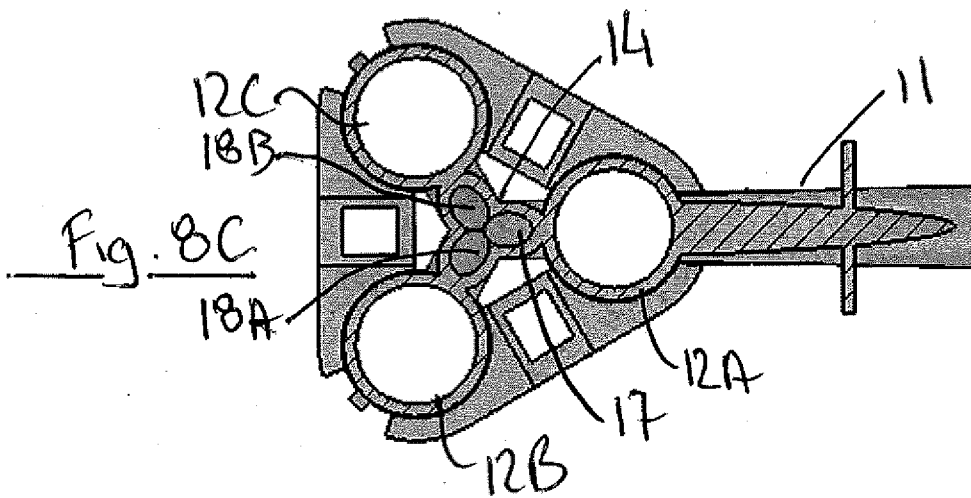


Fig. 7B

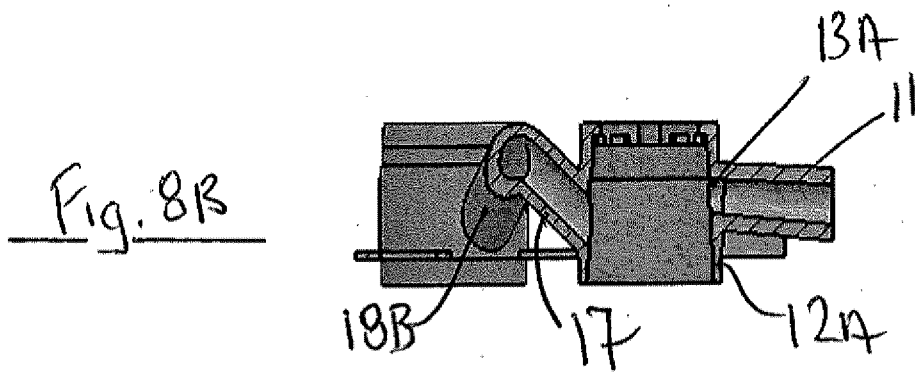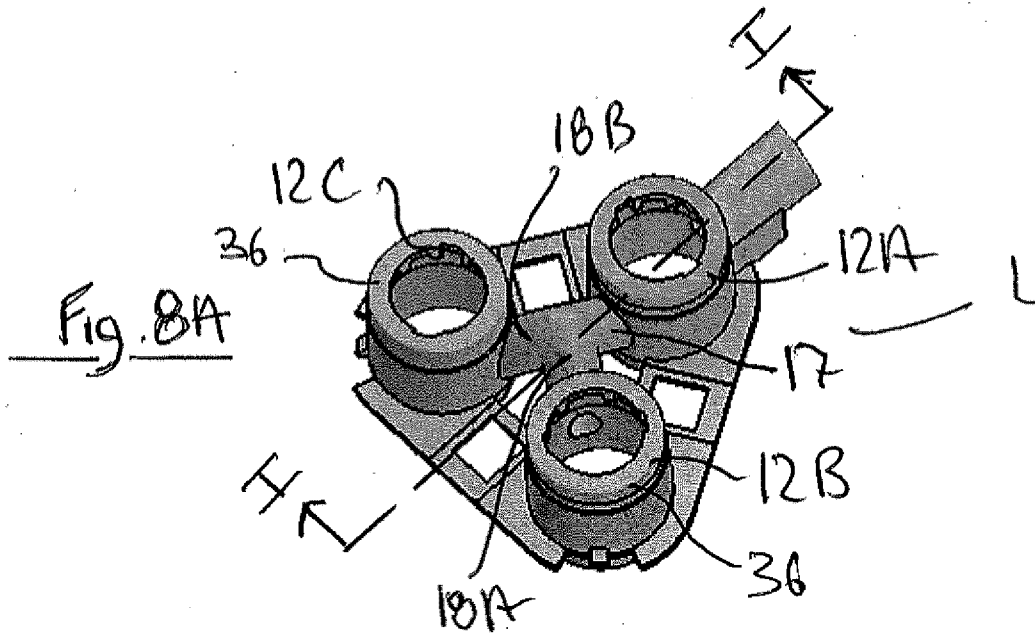