United States Patent [19]

Kemper et al.

[11] **4,144,771**

[45] **Mar. 20, 1979**

[54] **VARIABLE STROKE PISTON TYPE ENGINE**

[75] Inventors: **Yves J. Kemper**, Birmingham; **Harvey N. Pouliot**, Troy, both of Mich.

[73] Assignee: **Vadetec Corporation**, Troy, Mich.

[21] Appl. No.: **785,662**

[22] Filed: **Apr. 7, 1977**

[51] **Int. Cl.**[2] **F16H 23/00**

[52] **U.S. Cl.** ..... **74/60**; 123/78 E

[58] **Field of Search** 74/60; 123/78

[56] **References Cited**

U.S. PATENT DOCUMENTS

2,577,675	12/1951	Burkland	74/60
2,947,182	8/1960	Wahlmark	74/60
2,957,462	10/1960	Clark	74/60
3,911,791	10/1975	Clark	74/60

Primary Examiner—Benjamin W. Wyche
Assistant Examiner—Wesley S. Ratliff, Jr.
Attorney, Agent, or Firm—Lane, Aitken & Ziems

[57] **ABSTRACT**

A piston type energy conversion machine in which the thrust of one or more reciprocating pistons is transmitted to a nutating tubular member having longitudinally spaced journal surfaces of revolution about a nutating axis adjustably inclined with respect to a primary engine axis. The journal surfaces on the nutating member are engaged by a crank member rotatable on the primary engine axis and carrying adjustably eccentric bearings to engage the journal surfaces of the nutating member. Angular adjustment of the axis of nutation effects a variable piston stroke distance as a result of a connection of the pistons to the nutating members at points spaced radially from the nutating axis. Compression ratio is adjusted independently by shifting the point of piston connection with the nutating member along the nutating axis. The nutating member is tubular to establish interior traction surfaces engagable with oppositely converging cone-like surfaces carried by an output shaft so that speed ratio of the output shaft may be varied simultaneously with changes in the angle of nutation and piston stroke length.

17 Claims, 5 Drawing Figures

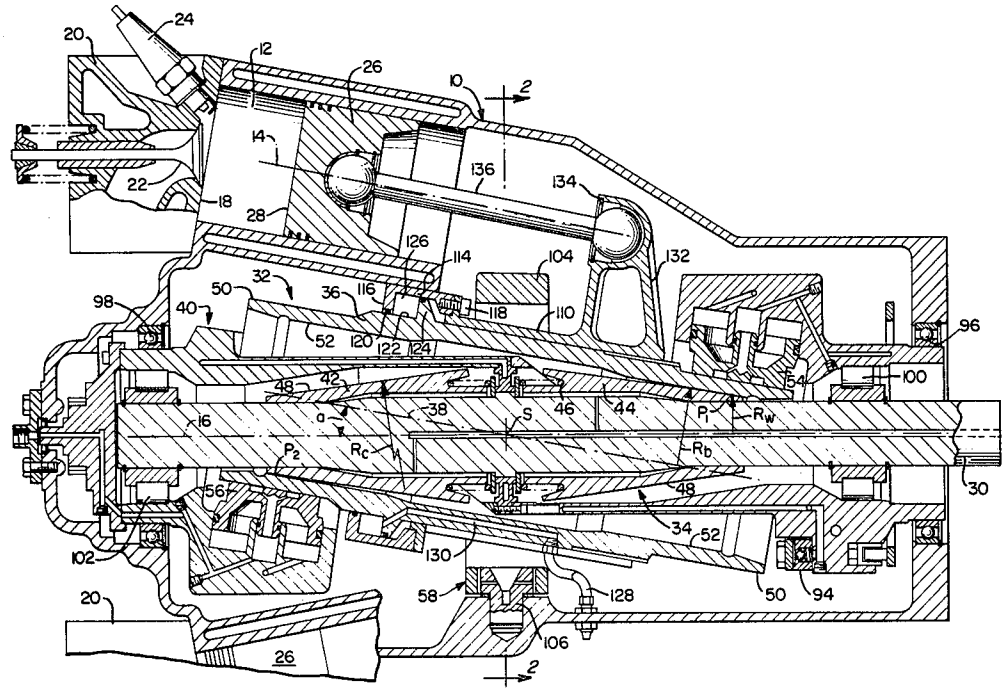


FIG. 1.

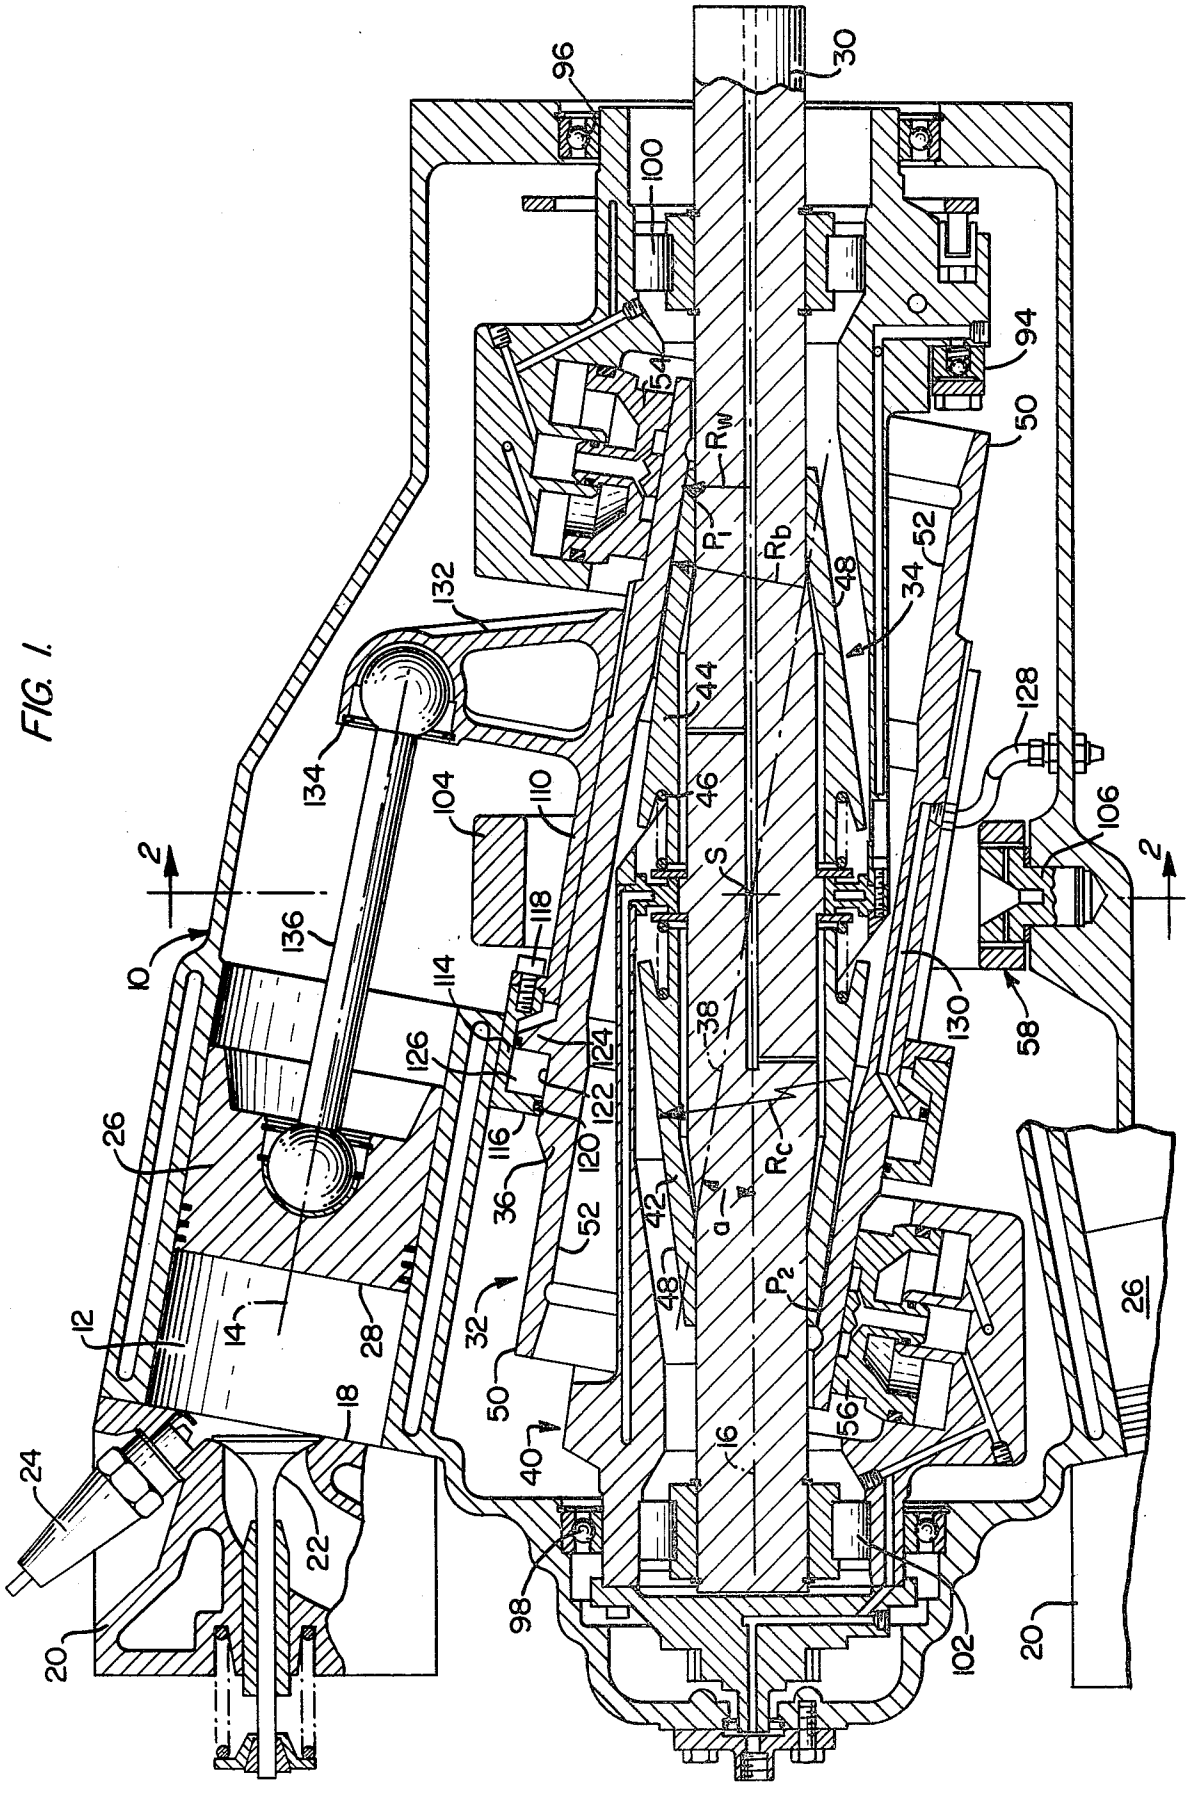

96
30
100
94
50
52
34
48
132
44
128
134
104
110
46
106
2
S
2
10
136
118
114
130
58
38
126
124
122
116
120
26
36
52
42
Rc
a
48
P2
32
28
12
14
18
50
56
40
16
24
22
98
102
20
20
26
Rw
P1
Rb
54

FIG. 2.

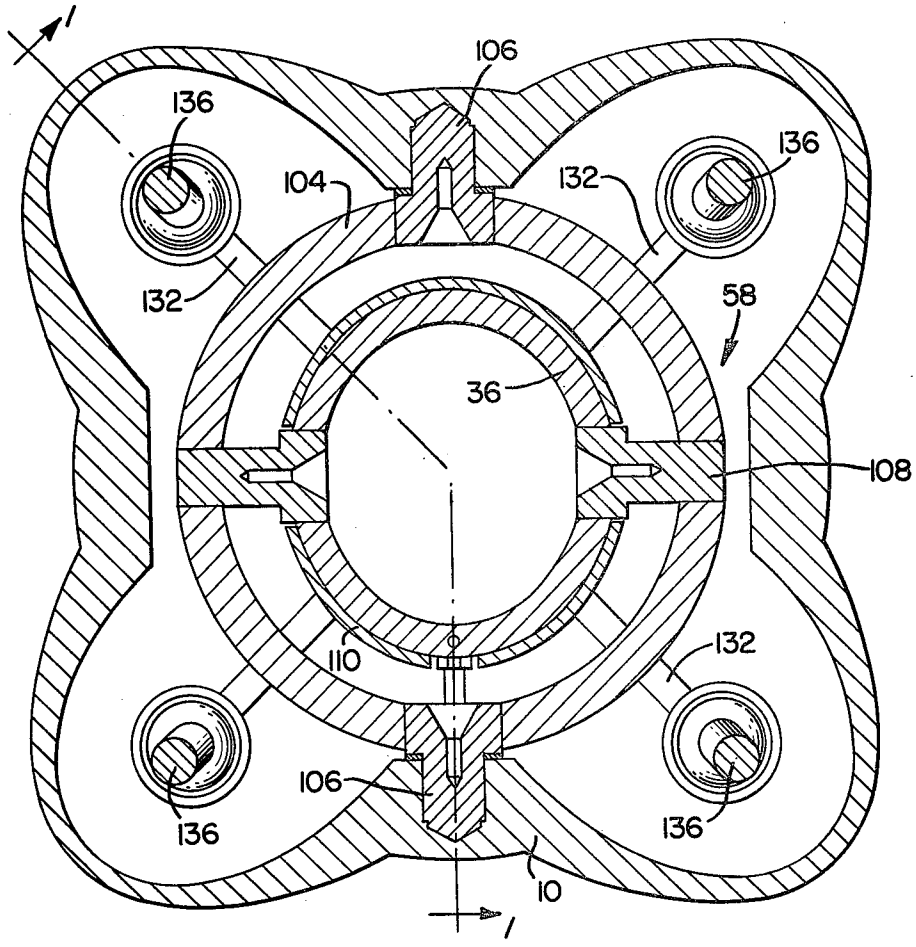
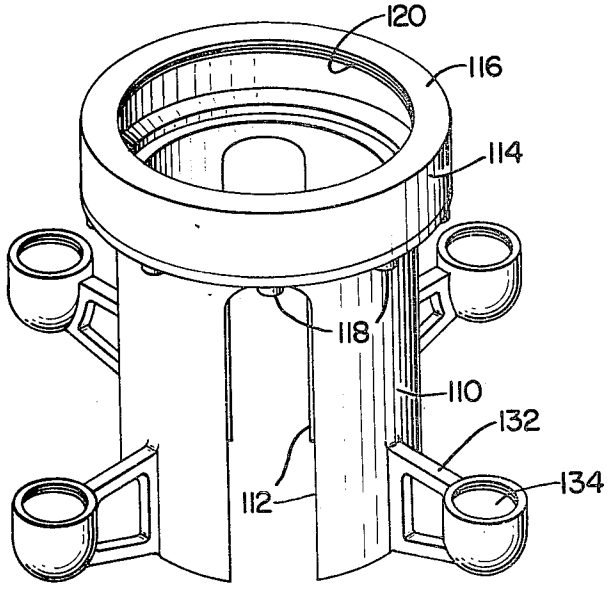

1
106
136
104
132
136
132
58
36
108
110
132
106
136
136
10
1

FIG. 3.


120
116
114
118
110
132
112
134

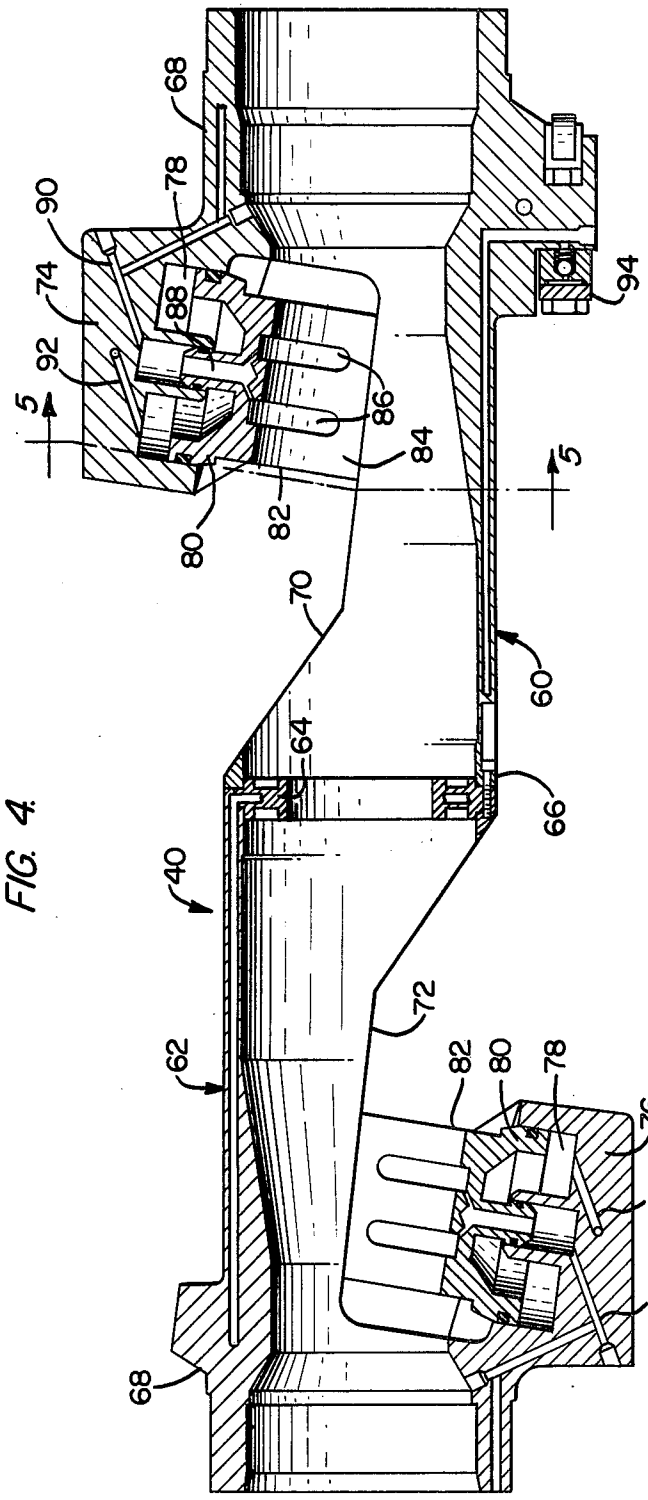

68
78
90
74
88
92
5
86
84
80
82
70
60
64
66
40
72
62
82
80
78
76
92
90
68
94

FIG. 4.

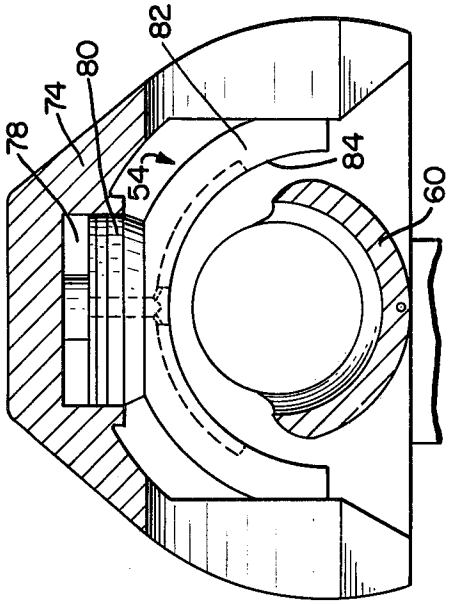

82
80
74
78
54
84
60

FIG. 5.

VARIABLE STROKE PISTON TYPE ENGINE

BACKGROUND OF THE INVENTION

This invention relates to expansible chamber energy conversion machinery and more particularly, it concerns such machinery in which the stroke length of one or more reciprocating pistons is adjustable simultaneously with regulation of the locus of piston reciprocation so that the volumetric ratio of each working chamber may be regulated.

In a commonly assigned co-pending application for U.S. patent application Ser. No. 706,291, filed July 19, 1976 by Yves Jean Kemper, there is disclosed an embodiment of a variable speed transmission or torque variator in which mechanical power developed in one or more reciprocating pistons is transmitted as torque in a rotary output at speeds independent of piston reciprocation frequencies. The thrust of synchronized piston reciprocation in one exemplary embodiment is transmitted to a gimbal or cardan supported nutating member having a pair of rolling surfaces of revolution. An output shaft is coupled with a pair of cone-like members in rolling friction contact with the rolling surfaces on the nutating member. The points of rolling contact are shiftable along the axes of the cone-like members so that output speed is variable in accordance with the ratio of surface radii on the nutating member with those on the cone-like members, the ratio being variable as a result of the different effective radii of the cone-like members. Because of the direct connection of pistons with the nutating member and constant angular relationship between the axis of the nutating member and the axis of the cone-like members, the stroke length of piston reciprocation is also constant in the machines disclosed in this co-pending application.

In a co-pending U.S. patent application, Ser. No. 743,600, filed Nov. 22, 1976 now U.S. Pat. No. 4,100,815 by Yves Jean Kemper and also commonly assigned with the present invention, a variable stroke piston engine is disclosed in which output speed is again variable independently of piston frequency or engine speed by a similar type of torque variator or transmission device. In this instance, the ratio of rolling surface radii or R_b/R_w is varied by adjusting the angle of intersection between the axis of the nutating member, to which the pistons are connected by linkage, and the axis of the cone-like members which, in this instance, are axially slidable toward and away from one another and have rolling surfaces defined by curved generatrices. The nutating member is carried by an external crank-like support rotatable on the axis of the cone-like members, thus necessitating a connection of the pistons with one or both ends of the nutating member. The locus of piston reciprocation is shifted concurrently with piston stroke length in a manner to achieve a constant or near constant compression ratio for all piston stroke lengths.

In a recently filed and commonly assigned co-pending U.S. patent application, Ser. No. 783,776, filed Apr. 1, 1977 now U.S. Pat. No. 4,112,780 by Yves Jean Kemper and Lucien Bigot, a variable speed transmission or torque variator is disclosed in which similar principles of speed ratio variation are used but where an eccentric torque coupling with a tube-like nutating member is effected by a sleeve-like element extending within the nutating member. A gimbal-like system of U-joints is used to restrain the nutating member against rotation on the nutating axis and a pair of adjustable eccentric end journals facilitate regulation of the angle between the nutational axis and the axis of the cone-like members. A rotary torque input resulting in nutation of the tube-like nutating member is transmitted as a variable speed output by adjusting the angle of the nutational axis so that the points of rolling friction contact by nutating member carried surfaces with the surfaces of rotatable cone-like members is adjusted again to vary the ratio R_b/R_w.

SUMMARY OF THE PRESENT INVENTION

In accordance with the present invention, an extremely compact, variable stroke, piston engine is provided in which one or more pistons reciprocable in frame carried combustion chambers located symmetrically about a primary or first engine axis are connected to a nutatable tube-like member in a manner to develop a rotary or torque output. Preferably, the nutating member has interior rolling surfaces engaged with exterior rolling surfaces of variable radii provided by cone-like members keyed for rotation with a shaft on the first axis. The nutating member is journalled in eccentric bearings carried on a support rotatable about the first axis and extending inside of the nutating tube. Piston connection with the nutating member is through an exterior sleeve slidable along the axis of the nutating member and carrying radial arms to which the pistons are connected by appropriate piston rods. Control means is provided for adjusting the axial position of the exterior sleeve on the nutating member so that the compression ratio of the pistons may be regulated to accomodate different piston stroke lengths resulting from changes in the angle of the nutating member axis with respect to the primary axis of the engine.

Among the objects of the invention are therefore: the provision of an improved piston-type, expansible chamber, energy conversion machine; the provision of such a machine in which piston stroke length and compression ratio may be simultaneously adjusted; the provision of such a machine in which stroke length and compression ratio may be simultaneously adjusted by independent control means; the provision of such a machine particularly adapted for use as an internal combustion engine; the provision of such an engine in which output speed may be adjusted independently of frequency of piston reciprocation; and the provision of such an engine which is extremely compact.

Other objects and further scope of applicability of the present will be apparent from the detailed description to follow taken in conjunction with the accompanying drawings in which like parts are designated by like reference numerals.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a fragmentary longitudinal cross-section through an engine in accordance with the invention (See line 1—1 of FIG. 2);

FIG. 2 is a fragmentary cross-section on line 2—2 of FIG. 1;

FIG. 3 is a perspective view illustrating a component of the engine illustrated in FIG. 1;

FIG. 4 is a longitudinal cross-section illustrating an additional component incorporated in the engine of FIG. 1; and

FIG. 5 is a fragmentary cross-section on line 5—5 of FIG. 4.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In FIG. 1 of the drawings, an internal combustion engine is shown to include a frame **10** defining a plurality of cylinders **12** on axes **14** and positioned in symmetrical fashion about a central engine axis **16**. The axes **14** of the cylinders **12** are therefore spaced equidistantly from each other and in the disclosed embodiment, are inclined with respect to the axis **16**. Although the angle of inclination of the axes **14** and **16** is related to other components of the overall engine to be described in more detail below, it is possible for the cylinder axes **14** to be parallel with the axis **16** or disposed at angles of an inclination other than that shown in the drawings.

Each of the cylinders **12** terminates in an end face **18** defined by a cylinder head **20** in which conventional intake and exhaust valves **22**, for example, may be operated between seated or closed and unseated or open conditions by synchronously rotated cams (not shown). Other auxiliary engine components such as a spark plug **24** may be mounted in the cylinder head **20** in accordance with conventional Otto cycle engine operation. Positioned in each cylinder **12** for reciprocation along the respective axes **14** is a piston **26** having an end face **28** defining with the cylinder end face **18** an expansible chamber of a volume which will vary in accordance with the reciprocable stroke distance of piston movement along the axis **14**.

The power developed by the expansion of gases in the cylinders **12** and resulting in reciprocation of the pistons **26** is transmitted as torque in a rotary output shaft **30** by way of a torque variator generally designated in FIG. **1** by the reference numeral **32**. Although the structural components of the torque variator enabling the transmission of power from the pistons **26** to the output shaft **30** will be described in more detail below, an understanding of this basic function may be gained by noting that the torque variator **32** is comprised of three assemblies which are movable as units or elements; namely, a first rotational element **34** which includes the shaft **30** and which is concentric with the first axis **16**, a second nutatable element **36** symmetrically disposed about a second axis **38** inclined with respect to the first axis **16** by an angle a and intersecting the first axis at a point of axes intersection S, and a third element **40** and rotatable on the first axis **16**. The third element **40** functions in the manner of an adjustable crank by which the angular disposition of the second axis **38** relative to the first axis **16** is maintained.

As may be observed in FIG. **1**, the first element **34** of the torque variator **32** is established additionally by a pair of cone-like members **42** and **44**, splined for direct rotation with the shaft **30** and slidable axially thereon in symmetry toward and away from the point S. The members **42** and **44** are biased away from each other in the disclosed embodiment by compression springs **46** though other suitable means such as a hydraulic system or a system of opposed helical splines may be employed to this end. Each of the cone-like members **42** and **44** is identically shaped to define an outer rolling traction surface **48** having a variable radius R_w with respect to the first axis **16**. Also, it will be noted that the generatrix of each of the surfaces **48** is a curve having a long radius R_c which is related to minimum ($\downarrow$) and maximum ($\uparrow$) values of the radius R_w and the angle a under the equation:

$$R_c = (R_w\uparrow - R_w\downarrow / \text{Cos a}\downarrow - \text{Cos a}\uparrow)$$

The second or nutating element **36** of the torque variator is a tube-like structure having concentric journal and rolling or traction surfaces of revolution about the second axis **38**, such surfaces being designated respectively by the reference numerals **50** and **52** in FIG. **1**. These surfaces are duplicated on opposite sides of the point of axes intersection S. Also it is to be noted that the rolling or traction surfaces of revolution **52** are of the same radius R_b with respect to the axis **38** and that the surfaces **52** engage the surfaces **48** on the cone-like members **42** and **44** at two points of contact P1 and P2 spaced equally and oppositely from the point S.

The journal surfaces **50** on the second element **36** are rotatably engaged by hydrostatic bearing shoes **54** and **56** carried as a unit with the third or support element **40** in a manner which will be described below. Also, a U-joint or gimbal, generally designated by the reference numeral **58**, extends from the frame **10** to the second element **36** to restrain the latter against rotation on the second axis **38** without inhibiting nutation of the member **36** in a manner such that the second axis **38** may travel in a biconical orbit or path about the first axis **16** in symmetry with the point of axes intersection S.

As shown most clearly in FIGS. **4** and **5**, the third element **40** is constituted by a pair of generally similar, longitudinal half-sections **60** and **62** secured in an end-for-end relationship against opposite faces of a connecting ring or collar **64** by a series of axial screw bolts **66** or other equivalent means. Each of the sections extends from the collar **64** as a sleeve-like structure to end bosses **68**. An intermediate portion of each section **60** and **62** is cut away to provide diametrically opposite openings **70** and **72** in the assembled element. It will be appreciated that the openings **70** and **72** expose the cone-like members **42** and **44** so that the rolling traction surfaces **48** thereon are presented through the member **40**.

The end bosses **68** are shaped to establish inwardly cantilevered shroud portions **74** and **76** which define hydraulic cylinders **78** facing the openings **70** and **72**. Movably supported within each of the cylinders **78** is a piston **80** formed integrally with a hydrostatic bearing body **82** having a semi-cylindrical bearing surface **84** to engage the journal surfaces **50** on the nutating second element **36**. The surfaces **84** are provided with oil slots **86** to which lubricating oil is fed by way of a nipple **88** in fluid communication with porting **90** provided in the shrouds **74**. Additional porting **92** is also formed in each of the shrouds **74** and **76** to supply hydraulic fluid or oil to the cylinder **78** under the control of a pump **94** carried by the element **40**. The operation of the pump **94** is described in the afore-mentioned co-pending application, Ser. No. 783,776 filed Apr. 1, 1977 and further discussion thereof is deemed unnecessary herein except to note that the fluid may be introduced into or withdrawn from the cylinders **78** in each of the shrouds **74** and **76** simultaneously to adjust the eccentricity of the bearing bodies **82** and correspondingly the angle a between the axis **38** of the second or nutating member **36** and the first or primary axis **16** of the engine.

As shown in FIG. **1**, the third element **40** of the torque variator **32** is supported from the frame **10** for rotation on the axis **16** by bearings **96** and **98**. The shaft **30**, in turn, is rotatably supported on the same axis from the third element **40** by bearings **100** and **102**.

As mentioned above, the tube-like second element **36** of the torque variator **32** is prevented from rotation about the axis **38** by the gimbal-like assembly **58**. The assembly **58**, as shown most clearly in FIG. **2**, includes a ring **104** pivoted by trunnions **106** in the frame **10** on one transverse axis. The tubular member **36** is supported by trunnions **108** from the ring **104** for pivotal movement on another transverse axis perpendicular to the pivotal axis of the trunnions **106**. The pivotal axes of the trunnions **106** and **108** intersect the point of axes intersection S. Thus, the member **36** is capable of nutating movement in a manner such that the axis **38** will travel circumferentially about the axis **16** in a generally biconical path.

Slidably supported on the exterior of the second element **36** of the torque variator **32** is a sleeve member **110** having slots **112** to accomodate the trunnions **108**. At one end of the member **110**, an enlarged ring **114** having an inwardly projecting flange **116** is suitably secured such as by screwbolts **118**. A fluid seal **120** is formed on the inner edge of the flange **116** to engage a cylindrical surface **122** delimited by an outwardly projecting annular flange **124** on the member **36**. As shown most clearly in FIG. **1**, the ring **114** defines with the flange **124** and surfaces **122** an annular chamber **126** to which oil may be supplied by a flexible hose **128** and porting **130** in the tubular member **36**. In light of this organization, it will be appreciated that the axial position of the sleeve member **110** relative to the tubular nutating member **36** may be adjusted by the introduction and withdrawal of fluid to and from the annular chamber **126**.

The sleeve-like member **110**, as shown most clearly in FIGS. **1–3**, is formed with radiating arm-like members **132** supporting semi-spherical sockets **134** at their ends. In the disclosed embodiment, four such arms **132** are provided on the assumption that the disclosed engine will include four cylinders **12**. The sockets **134** each engage one end of a piston rod **136** extending to one of the four pistons **26**.

In the operation of the engine, the several pistons **26** are sequentially driven through a power stroke by an appropriately timed ignition system including spark plugs **124**, for example. The sleeve **110** and nutating member **36** are thus driven to cause the axis **38** to travel in a biconical path about the axis **16**. As a result of such nutating movement, the third or crank element **40** will be rotated on the axis **16** at a velocity $\mathring{\alpha}$ which corresponds directly to the frequency of piston reciprocation or engine speed. As a result of frictional contact between the rolling surfaces **52** on the nutating tubular member **36** and the surfaces **48** on the cone-like members **42** and **44**, the first element **34** of the torue variator **32** and thus the output shaft **30** will be driven at a velocity $\mathring{\omega}$ in accordance with the equation $\mathring{\omega} = \mathring{\alpha}\ (1 - R_b/R_w)$. If it is assumed that the ratio R_b/R_w varies from between 1 and 2, it will be seen that the speed of the shaft **30** may be made to vary from zero to one or from a neutral condition to a condition in which the shaft **30** is driven in unison with the speed of the engine.

Because the function R_b/R_w varies directly with the angle a and also because of the direct connection of the pistons **26** with the nutating tube member **36** through the sleeve member **110**, the length of piston stroke will also vary directly with changes in the angle a. Such changes in the piston stroke length are accomodated either with or without change in the compression ratio of the engine by shifting the locus of piston reciprocation relative to the cylinder head end faces **18**. This shifting of the locus of piston reciprocation is accomplished by the controlled introduction of fluid to or the withdrawal of fluid from the annular chamber **126** defined by the annular sleeve **110** and the nutating tube-like member **36**.

The angle at which the cylinder axes are inclined with respect to the axis **16** is preferably equal to the maximum angle a ↑ contemplated in the design of the engine. In this way, space requirements of the engine are minimized. It will be noted also that the preferred operation of the engine involves the use of the shaft **30** as a source of output torque. It will be appreciated, however, that in situations where the output speed of the engine is correlated directly with the frequency of piston reciprocation, a coupling may be made directly to the third or crank element **40** of the torque variator. In addition, it is contemplated that engine output may be a combination of torque transmitted by the member **40** and through the torque variatior **32** to the shaft **30**.

Thus it will be seen that by this invention there is provided an improved expansible chamber energy conversion machine by which the above-mentioned objectives are completely fulfilled. It is also contemplated that various modifications may be made in the embodiment disclosed herein without departure from the inventive concept manifested thereby. Accordingly, it is expressly intended that the foregoing description is illustrative of a preferred embodiment, not limiting, and that the true spirit and scope of the present invention will be determined by reference to the appended claims.

We claim:

1. A piston engine comprising:

a frame;

a first element rotatable on a first axis fixed with respect to said frame;

a tubular second element having concentric rolling and journal surfaces of revolution about a second axis inclined with respect to and intersecting said first axis at a point of axes intersection;

a third element and extending within and throughout the length of said second element, said third element being rotatable on said first axis and having diametrically eccentric bearing members spaced along said second axis on opposite sides of said point of axes intersection, said bearing members engaging said journal surfaces in a plane containing said first and second axes;

at least one fluid working chamber defined by said frame, a piston reciprocable in said working chamber on a third axis spaced from said first axis; and

means coupling said piston to said second element, said last mentioned means defining a thrust receiving point of engagement with said piston, said thrust receiving point being spaced from said point of axes intersection.

2. The apparatus recited in claim **1** including means to adjust simultaneously the eccentricity of said bearing members to change the angle of said first and second axes intersection, thereby to change the stroke distance of reciprocation of said piston.

3. The apparatus recited in claim **2** including means to shift said thrust receiving point in a direction parallel to said second axis thereby to change the volumetric ratio of said working chamber upon reciprocation of said piston.

4. The apparatus recited in claim **3** including an arm to establish said thrust receiving point and a sleeve-like

member slidable axially on said second member to support said arm.

5. The apparatus recited in claim 4 including means defining an expansible fluid chamber between said second element and said sleeve-like member to control the relative axial positioning of said sleeve-like member and said second element.

6. The apparatus recited in claim 2 wherein said third axis is inclined with respect to said first axis.

7. The apparatus recited in claim 6 wherein the angle of inclination between said first and third axes is equal to the maximum angle of said first and second axes intersection.

8. The apparatus recited in claim 1 including cone-like rolling surfaces on said first element engageable by said rolling surfaces on said second element.

9. The apparatus recited in claim 8 including means to vary the angle of first and second axis intersection to vary the effective radii of said cone-like rolling surfaces at points thereon engaged by the rolling surfaces of said second element.

10. An internal combustion engine comprising:

a frame having a first axis and defining a plurality of combustion chambers located symmetrically about said first axis;

a piston reciprocable in each of said working chambers through a stroke distance determining the compression ratio of each of said chambers respectively;

a tubular nutatable member having a pair of journal surfaces of revolution about a second axis inclined with respect to and intersecting said first axis at a point of axes intersection, said journal surfaces being spaced along said second axis on opposite sides of said point of axes intersection and symmetrical therewith;

a crank element extending throughout the length of said tubular nutatable member and rotatable on said first axis, said crank element having diametrically opposed eccentric bearing members spaced along said second axis on opposite sides of said point of axes intersection and engaging said journal surfaces in a plane containing said first and second axes;

sleeve means slidably mounted on the exterior of said nutatable member and adjustable axially thereof along said second axis; said sleeve means defining thrust receiving points of engagement by said pistons spaced radially from said second axis.

11. The apparatus recited in claim 10 including means to adjust simultaneously the eccentricity of said bearing members to change the angle of said first and second axes intersection to vary the stroke distance of reciprocation of each of said pistons.

12. The apparatus recited in claim 11 wherein said piston is reciprocable on an axis inclined with respect to said first axis by the angle equal to the maximum angle of said first and second axes intersection.

13. The apparatus recited in claim 10 including means to define an expansible fluid chamber between said nutatable member and said sleeve means to control the relative axial positioning of said sleeve means and said nutating member.

14. The apparatus recited in claim 10 including arm members projecting from said sleeve means and piston rods extending between said pistons and said arm members.

15. The apparatus recited in claim 10 including output shaft means rotatable on said first axis and means coupling said output shaft with said nutatable member to enable rotation of said output shaft at speeds independent of the frequency of piston reciprocation.

16. The apparatus recited in claim 10 including means to prevent rotation of said nutating member on said second axis.

17. The apparatus recited in claim 16 wherein said rotation preventing means comprises a ring pivoted from said frame on one transverse axis and means pivotally connecting said ring and said nutating member on another transverse axis, said transverse axes being mutually perpendicular and intersecting said point of axes intersection.

* * * * *