



(22) Date de dépôt/Filing Date: 2005/12/29

(41) Mise à la disp. pub./Open to Public Insp.: 2006/06/30

(30) Priorité/Priority: 2004/12/31 (ES200500028)

(51) Cl.Int./Int.Cl. *F16J 15/32* (2006.01),
B64C 1/00 (2006.01), *B64C 9/02* (2006.01),
F16J 15/56 (2006.01)


(71) Demandeur/Applicant:
AIRBUS ESPANA, S.L., ES

(72) Inventeur/Inventor:
ZAMORA GOMEZ, IGNACIO, ES

(74) Agent: MARKS & CLERK


(54) Titre : DISPOSITIF D'ETANCHEITE POUR RAIL DE VOLET DANS UN CARENAGE VENTRAL D'AERONEF POUR
UN ARBRE DE VERIN DE VOLET

(54) Title: SEALING DEVICE FOR A FLAP TRACK IN A BELLY FAIRING OF AN AIRCRAFT FOR A FLAP-ACTUATING
SHAFT

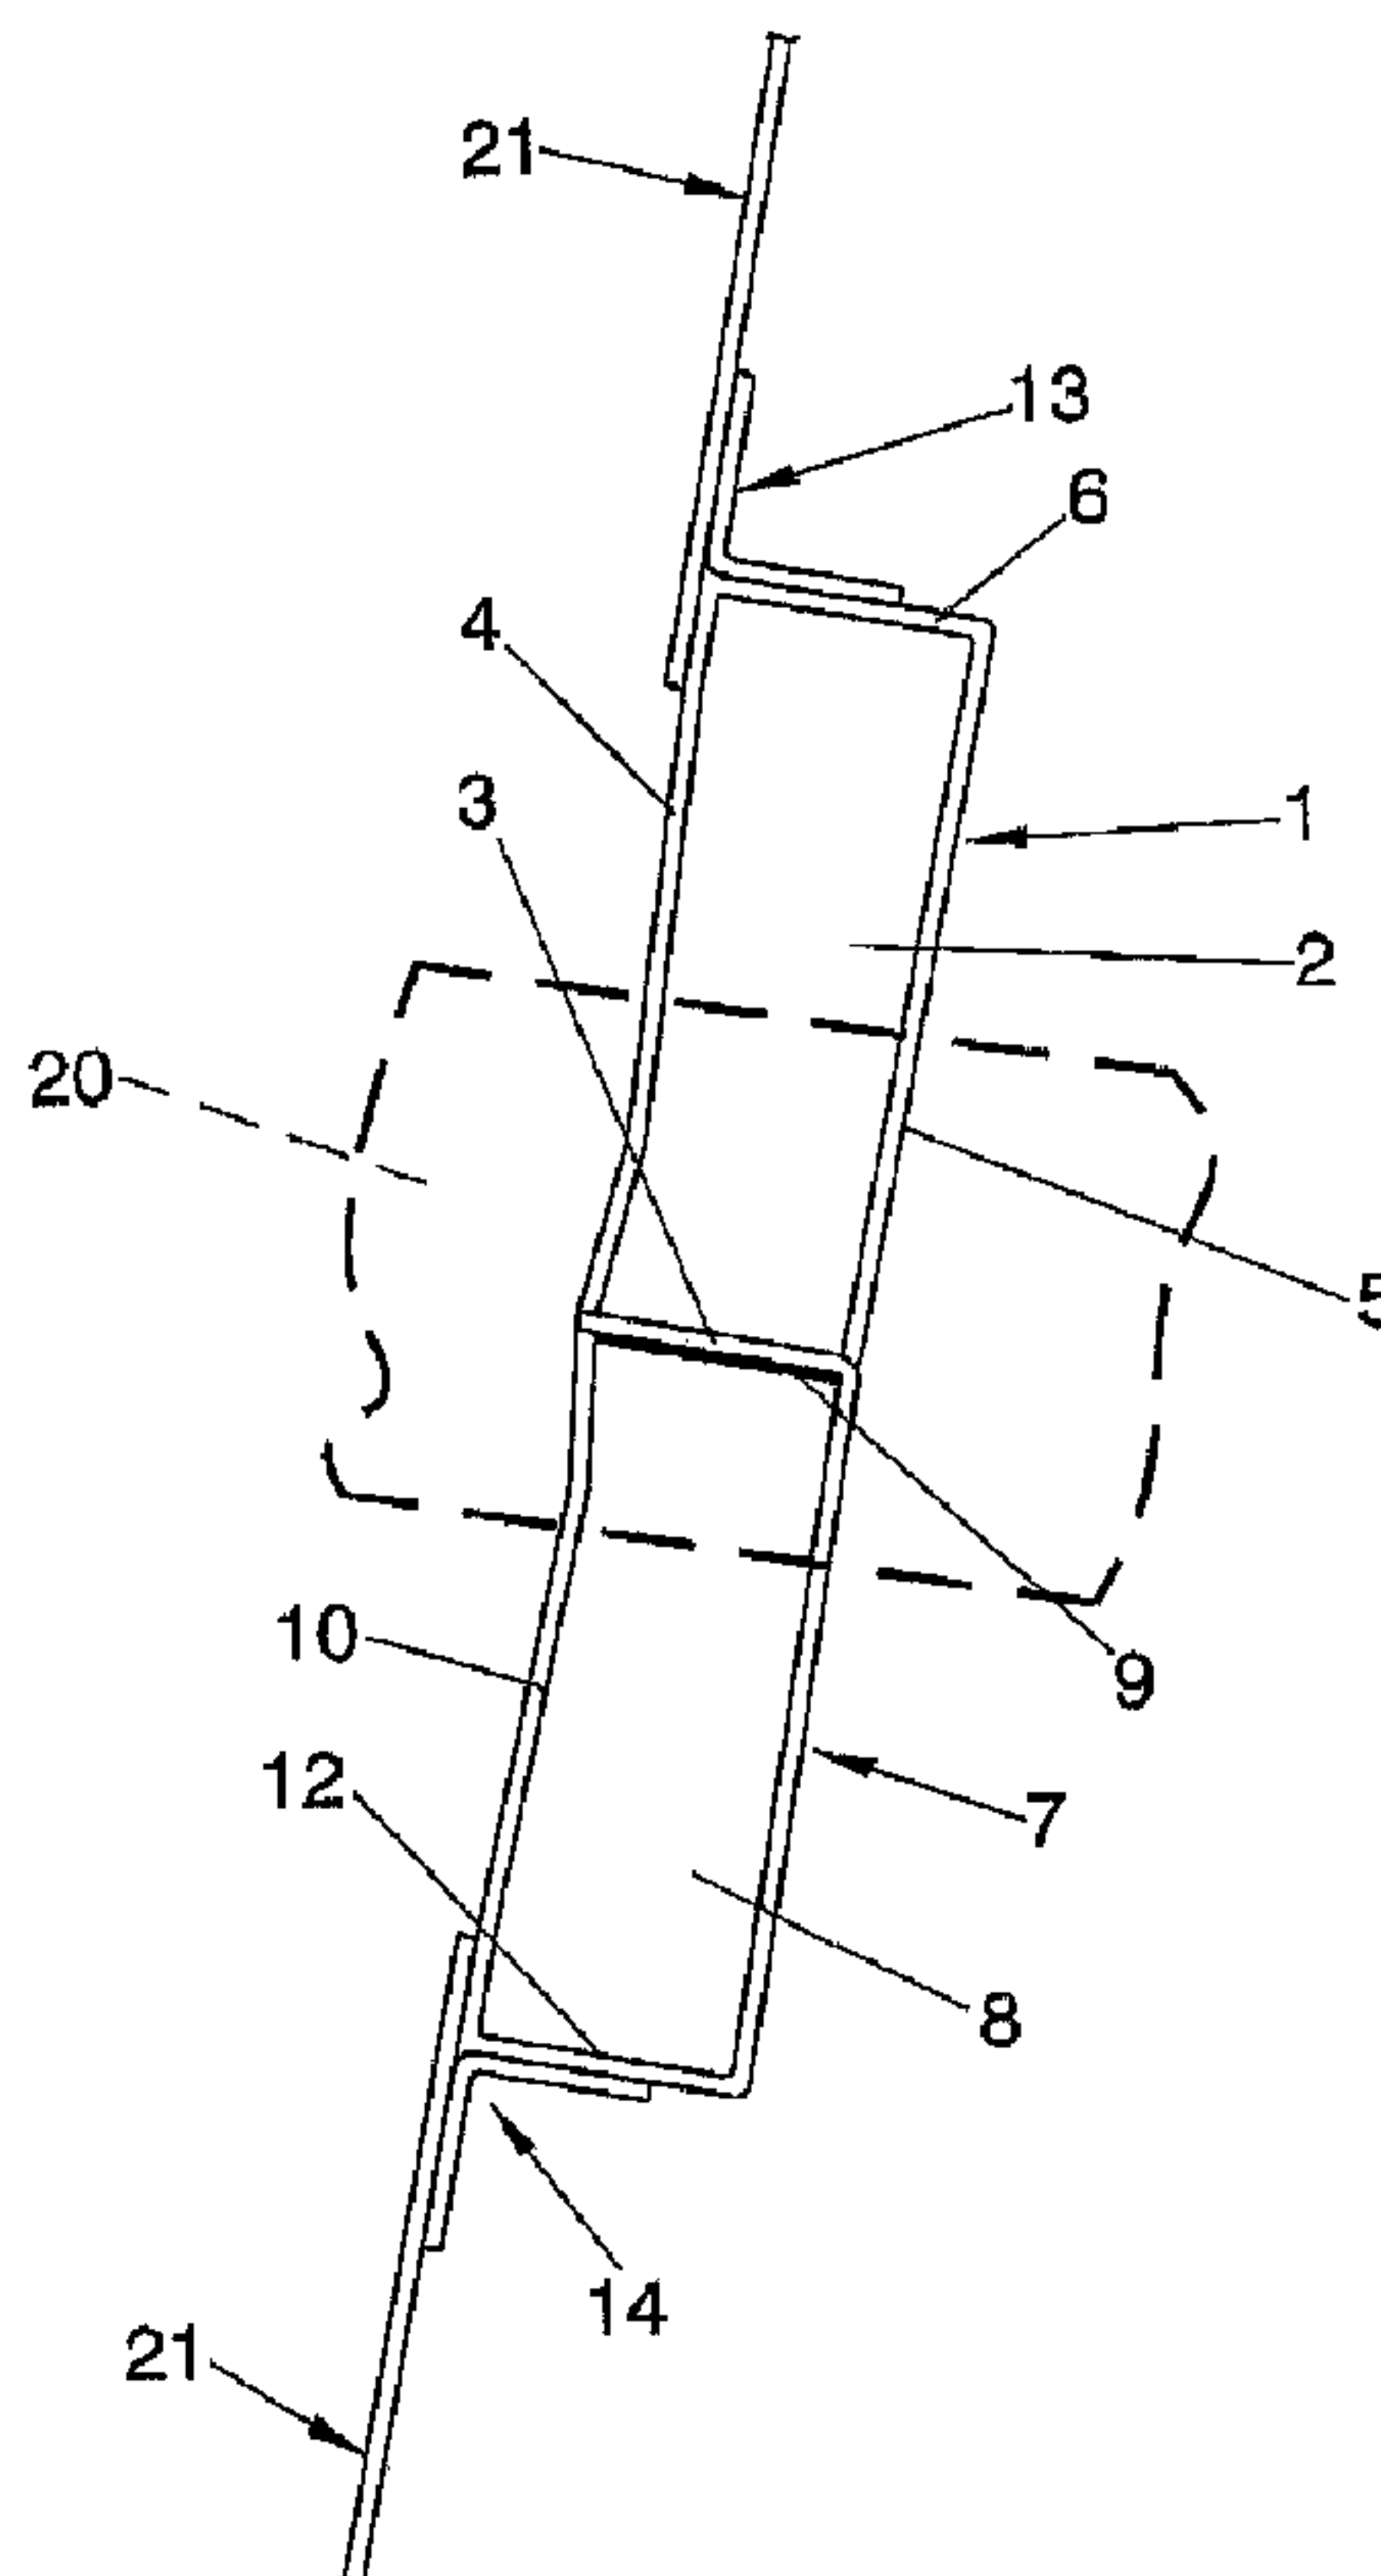

(57) Abrégé/Abstract:

Sealing device for the flap track for the flap-actuating shaft, in the belly fairing of an aircraft, with a top hollow body 1 and a bottom hollow body 7 which are flexibly compressible, each comprising at least one interior chamber 2, 8 with open sides 2a, 2b, a wall 3, 9

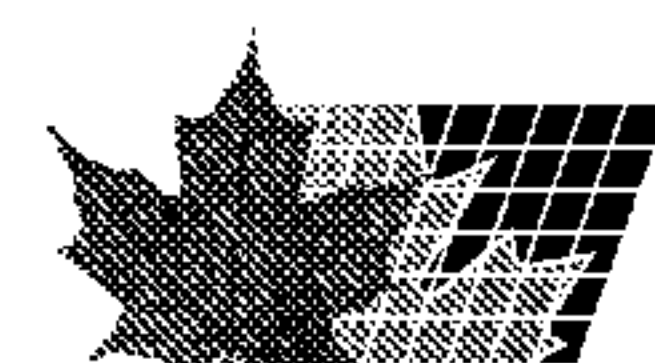

(57) **Abrégé(suite)/Abstract(continued):**

with respective external contact surfaces 3a which are in flexible contact with each other, the outer surfaces 4a, 10a of the front walls 4, 10 of the hollow bodies 1, 7 jointly forming an outer sealing surface 11 which covers the flap track 19, said hollow bodies 1,7 having jointly a vertical compression flexibility such that the contact surfaces 3a, 9a retract around the actuating shaft 20, the interior chambers 2, 8 extending between the front walls 4, 10 and rear walls 5, 11 of the hollow bodies 2, 7.

ABSTRACT

5

Sealing device for the flap track for the flap-actuating shaft, in the belly fairing of an aircraft, with a top hollow body 1 and a bottom hollow body 7 which are flexibly compressible, each comprising at least one interior chamber 2, 8 with open
10 sides 2a, 2b, a wall 3, 9 with respective external contact surfaces 3a which are in flexible contact with each other, the outer surfaces 4a, 10a of the front walls 4, 10 of the hollow bodies 1, 7 jointly forming an outer sealing surface 11 which covers the flap track 19, said hollow bodies 1,7 having jointly
15 a vertical compression flexibility such that the contact surfaces 3a, 9a retract around the actuating shaft 20, the interior chambers 2, 8 extending between the front walls 4, 10 and rear walls 5, 11 of the hollow bodies 2, 7.

SEALING DEVICE FOR A FLAP TRACK IN A BELLY FAIRING OF AN
AIRCRAFT FOR A FLAP-ACTUATING SHAFT

TECHNICAL FIELD OF THE INVENTION

5 The present invention is encompassed within the technical field of devices for sealing shafts of mechanisms when passing through surfaces in aircraft, particularly within the sector of devices for sealing the flap track for the flap-actuating shaft which is located in the belly fairing of an aircraft.

STATE OF THE ART PRIOR TO THE INVENTION

10 In many types of airplanes, the flaps, in other words, the fin-shaped moving parts located on the rear edge of the wings of the airplane are connected, by means of actuating shafts which perpendicularly protrude beyond the belly fairing of the airplane, to actuating mechanisms which are located in the interior of the fuselage. The shaft actuating each flap emerges from the belly fairing of the aircraft through a flap track, the configuration of which, generally elongated and curved downward, adapts to the path which the actuating shaft has to follow for moving the flap from a substantially horizontal position, corresponding to the position of the flap in cruising flight, to a position in which the rear edge of the flap is shifted downward, corresponding to the position of the flap in descent maneuvers. Apart from the above, the configuration of the flap track also adapts to the outer, generally curved shape of the belly fairing of the aircraft.

25 The need of providing the flap tracks of the type described hereinabove entails that when the flaps are in the positions corresponding to cruising flight, a large area of the flap tracks is left uncovered, allowing air to flow into the inside of the belly fairing of the aircraft, which causes losses in the aerodynamic efficiency and the corresponding increase in fuel consumption, as well as bothersome annoyances due to the noise caused by the flow of air which is diverted towards the inside of the chamber of the belly fairing of the aircraft.

35 Although it has been attempted to provide a solution to

these drawbacks, for example, by means of stiff ramps actuated by the movement of the actuating shaft itself, which slide over rails installed over the panels of the dynamic surface to be sealed, none of the known systems is a truly satisfactory solution. It was therefore a desirable goal to find a sealing system which would fulfill the requirements of:

- Maintaining a suitable quality of the aerodynamic surface in cruising flight and which would resist the pressure differentials generated while the aircraft is in operation.
- Providing a sealing device which would resist the extremely high compression ratio due to the large dimensions and the complex geometry (double curve) of the flap track to be sealed and the diameter of the shaft passing through it, which would be flexible enough allow operation of the flap without putting resistance to movement thereof as well as stiff enough so as to resist the on-flight pressure loads being attached to the panels solely at one of its ends thereof, the other being left cantilevered.
- Preventing the high compression ratio to cause the appearance of crackings in the sealing elements which would damage the durability of the sealing.
- Prevent the accidental blocking of the forward movement of the flap, as the stability of the aircraft would be adversely affected in that case.

DESCRIPTION OF THE INVENTION

The present invention has the purpose of overcoming the drawbacks of the state of the art and achieving the aforementioned goal by means of a sealing device for the flap track in the belly fairing of an aircraft for the flap-actuating shaft, the actuating shaft being capable of shifting its position from a first end to a second end of the flap track, the device comprising sealing means covering the flap track, with a flexibly compressible top hollow body comprising

at least one inner chamber with open sides delimited at the bottom by a bottom wall with an outer bottom contact surface,

5 a front wall with an outer surface which covers at least a first part of the flap track ;

a rear wall,

a top wall ; and

10 a flexibly compressible bottom hollow body which comprises at least one inner chamber with open sides and delimited at its top by a top wall with an outer top contact surface; with

a front wall with an outer surface which covers at least a second part of the flap track ;

a rear wall,

15 a bottom wall; and

said contact surfaces being in flexible contact with each other ;

20 the outer surfaces of the front walls of the hollow bodies having extensions such that they jointly form an outer sealing surface capable of covering the flap track ;

said hollow bodies jointly having a flexibility under vertical compression such that the contact surfaces retract around the actuating shaft; and

25 the inner chambers extending between said front and rear walls.

30 The hollow bodies may be of plastic materials, such as rubber, silicone rubber, eventually treated, etc. which combine flexibility with a sufficient degree of stiffness and which are resistant to the temperature changes which take place while the aircraft is on flight.

According to the invention, the top hollow body may have top attaching means which can be mounted at a top area of a panel crossed by the flap track, whilst the bottom hollow body can be provided with bottom attaching means, which can be
35 mounted at a bottom area of the panel crossed by the flap track.

These attaching means provided respectively at each of the hollow bodies may be metal profiles, for example "L"-shaped profiles joined, for example, by means of riveting or screwing, respectively to the top wall of the top hollow body and to the
5 bottom wall of the bottom hollow body. When the profile is an "L"-shaped profile, the surface of the branch of the "L" profile which is not joined to any of the walls of the hollow bodies forms a continuation of the outer sealing surface. The attaching means may also be flanges formed as a continuation of the outer
10 surface of each hollow body, or a perimetral rib which laterally emerges from each body. By means of these flanges or ribs, which may eventually be provided with reinforcements, the top body and the bottom body may be secured in a manner known *per se* on the panel by means of screwing, riveting and/or stapling.

15 Preferably, the height of the upper assembly of the top and bottom parts of the device is larger than the vertical extension of the flap track, given in this manner a larger compression volume is available.

In a preferred embodiment of the invention, at least one of
20 the hollow bodies has a plurality of chambers formed by means of partitions which extend between the front wall and the rear wall of the top and bottom hollow body. In this way, a longitudinal reinforcement, and a flexible folding in the form of a bellows which is more uniform around the actuating shaft, are achieved
25 in addition to that breakings of crackings in the top or bottom wall leading to ripping of the entire top or bottom body is avoided. Instead of or in addition to the partitions, longitudinal ribs emerging from inside of the front and rear walls may be provided.

30 BRIEF DESCRIPTION OF THE FIGURES

A description is provided in following of aspects and embodiments of the invention in relation to some drawings which are an integral part of the present description. In these drawings,

35 Figure 1 is a schematic cross-sectional view of the

location of the flap track on the belly fairing of an aircraft.

Figure 2 is a schematic cross-sectional side view of one part of the belly fairing of an aircraft showing the mounted position of the sealing device.

5 Figure 3 is a schematic cross-sectional view of a first embodiment of the sealing device of the present invention.

Figure 4 is a schematic front elevation view of the device shown in figure 3.

10 Figure 5 is a schematic cross-sectional view of a second embodiment of the sealing device of the present invention.

Figure 6 is a schematic cross-sectional view of a third embodiment of the sealing device of the present invention.

These figures include numerical references identifying the following elements:

- 15 1. top hollow body
- 2, 2' inner chamber of the top hollow body
- 2a, 2b open sides of chamber 2
- 3 bottom wall of the top hollow part
- 3a contact surface of the top wall
- 20 4 front wall of the top hollow part
- 4a outer surface of the front wall
- 5 rear wall
- 6 top wall
- 7 bottom hollow body
- 25 8, 8' inner chamber of the bottom hollow body
- 8a, 8b open sides of chamber 8
- 9 top wall of hollow body 7
- 10 front wall of the bottom hollow body
- 10a outer surface of the front wall
- 30 11 rear wall of the bottom hollow body
- 12 bottom wall of the bottom hollow body
- 13 top attaching means
- 14 bottom attaching means
- 15 partitions inside the top body
- 35 16 partitions inside the bottom body

- 17 ribs inside the top body
- 18 ribs inside the bottom body
- 19 flap track
- 19a first end of the flap track
- 5 19b second end of the flap track
- 20 actuating shaft
- 21 belly fairing panel
- 22 flap
- 22a back edge of the flap

10

EMBODIMENTS OF THE INVENTION

Figure 1 shows a flap track 19 for the actuating shaft 20 for a flap 22 in a panel 21 of the belly fairing of an aircraft. For actuating the flap 21, the actuating shaft 20 moves from a
 15 first end 19a to a second end 19b of the flap track 19. The actuation of the shaft 20 makes the back edge 22a of the flap 22 raise.

Figs 2 to 4 show a device comprising a compressible top hollow body 1 comprising a top inner chamber 2 with open sides
 20 2a, 2b delimited at the bottom by a bottom wall 3 with a lower outer contact surface 3a. Likewise, the top body 1 has a front wall 4 with an upper outer surface 4a which covers at least a first part of the flap track 19, a rear wall 5 and a top wall 6. At its top, the top hollow body 1 comprises top attaching means
 25 13, which can be mounted in a top area of the panel 21 which is crossed by the flap track 19. These top attaching means 13 comprise an "L"-shaped metal profile joined to the top wall 6 of the top hollow body 1 by one of its branches, whilst its other branch forms a continuation of the top outer surface 4a.

30 The device also comprises a bottom hollow body 7, which is also flexibly compressible, of a configuration analogous to that of the top hollow body. Thus, the bottom hollow body comprises a bottom inner chamber 8 with open sides 8a, 8b and delimited at the top by a top wall 9 with an outer contact surface 9a.
 35 Likewise, the top hollow body has a front wall 10 with a bottom

outer surface 10 a which covers at least a second part of the flap track 19, a rear wall 11 and a bottom wall 12. The bottom hollow body 7 comprises bottom attaching means 14, which can be mounted on a bottom area of the panel 21 which is crossed by the
5 flap track 19. These bottom attaching means 14 comprise a bottom "L"-shaped metal profile joined to the bottom wall 12 of the bottom hollow body 1 by one of its branches, whilst the front surface of its other branch forms a continuation of the top outer surface 10a.

10 The inner chambers 2, 8 extend between the front walls 4, 10 and rear walls 5, 11 and the outer surfaces 4a, 10a of the front walls 4, 10 of the hollow bodies 1,7 have extensions such that they jointly form a outer sealing surface 11 which covers the flap track 19.

15 The hollow bodies 1,7 jointly have a vertical compression flexibility such that the contact surfaces 3a, 9a retract around the actuating shaft 20, whilst, on the extension on which the actuating shaft 20 is not located, the contact surfaces 3a, 9a are in flexible contact with each other. Hence, on movement
20 between the ends 22a, 22b of the flap track 22, in other words, between the left and right positions (shown in dotted lines) of the actuating shaft 20 which are shown in figure 4, the actuating shaft 20 progressively separates the contact surfaces 3a, 9a which recover contact with each other in the position in
25 which the actuating shaft 20 is not located, which means that the flap track 19 is kept closed.

Figure 5 shows a second embodiment of the device of the present invention in which the top body 1 comprises a plurality of horizontally superimposed upper chambers 2, 2', formed by
30 means of partitions 1 which extend between the front wall 4 and the rear wall 5 of the top hollow body 1. In turn, the top body 7 comprises a plurality of horizontally superimposed lower chambers 8, 8' formed by means of partitions 16 which extend between the front wall 10 and the rear wall 11 of the bottom
35 hollow body 7. By means of this embodiment, a longitudinal

reinforcement and a flexible, bellows-type folding is achieved which is more uniform around the actuating shaft 20, in addition to avoiding that a break or crack in the top wall 3 or bottom wall 9 from may lead to ripping of the entire top body 2 or
5 bottom body 7.

Figure 6 shows a third embodiment of the device of the present invention according to which the top body 1 comprises a plurality of longitudinal ribs 17 parallel to each other which emerge towards the inside of the upper chamber 2 from the front
10 wall 4 and the rear wall 5 of the top hollow body 1. Likewise, the bottom body 7 comprises a plurality of longitudinal ribs 17 being parallel to each other, which emerge towards the inside of the lower chamber 8 from the front wall 10 and the rear wall 11 of the bottom hollow body 7. The longitudinal ribs contribute to
15 reinforcing the longitudinal stiffness of the device without interfering in its flexible compressibility.

CLAIMS

1. Sealing device for a flap track in a belly fairing for a
actuating shaft of a flap of an aircraft the actuating shaft,
the actuating shaft being capable of moving from a first end to
5 a second end (of the flap track, the device comprising
a flexibly compressible top body comprising
at least one upper inner chamber with open sides
and delimited at the bottom by a bottom wall with an
lower outer contact surface,
10 a front wall with an upper outer surface which
covers at least a first part of the flap track;
a rear wall,
a top wall; and
a flexibly compressible bottom body comprising
15 at least one lower inner chamber with open sides
and delimited at the top by a top wall with an upper
outer contact surface;
a front wall with a lower outer surface which
covers at least a second part of the flap track;
20 a rear wall;
a bottom wall;
said contact surfaces being in flexible contact with each
other;
the outer surfaces of the front walls of the hollow bodies
25 having extensions such that they jointly form an outer sealing
surface which can cover the flap track;
said hollow bodies jointly having a vertical compression
flexibility such that the contact surfaces retract around the
actuating shaft; and
30 the inner chambers extending between said front walls and
rear walls.
2. Sealing device according to claim 1, wherein the top hollow
body comprises top attaching means which mountable on a top area
35 of a panel crossed by the flap track, and wherein the bottom

hollow body comprises bottom attaching means which are mountable at a bottom area of the panel crossed by the flap track.

3. Sealing device according to claim 2, wherein the top
5 attaching means comprise a top "L"-shaped profile joined to the top wall of the top hollow body by one of its branches.

4. Sealing device according to claim 3, wherein the top metal
10 profile is arranged such that the branch not joined to the top wall forms with its front surface a continuation of the upper outer surface.

5. Sealing device according to claim 2, wherein the bottom
15 attaching means comprise a bottom "L"-shaped profile joined to the bottom wall of the bottom hollow body by one of its branches.

6. Sealing device according to claim 5, wherein the top metal
20 profile is arranged such that the branch which is not joined to the bottom wall forms with its front surface a continuation of the upper outer surface.

7. Sealing device according to claim 1, wherein the top body
25 comprises a plurality of horizontally superimposed upper chambers formed by means of partitions which extend between the front wall and the rear wall of the top hollow body.

8. Sealing device according to claim 1, wherein the bottom
30 body comprises a plurality of horizontally superimposed lower chambers formed by means of partitions which extend between the front wall and the rear wall of the bottom hollow body.

9. Sealing device according to claim 1, wherein the top body
35 comprises a plurality of longitudinal ribs being parallel to each other, which emerge towards the inside of the upper chamber

from at least one of the front wall and the rear wall of the top hollow body.

10. Sealing device according to claim 1, wherein the bottom
5 body comprises a plurality of longitudinal ribs being parallel to each other, which emerge towards the inside of the lower chamber from at least one of the front wall and the rear wall of the bottom hollow body.

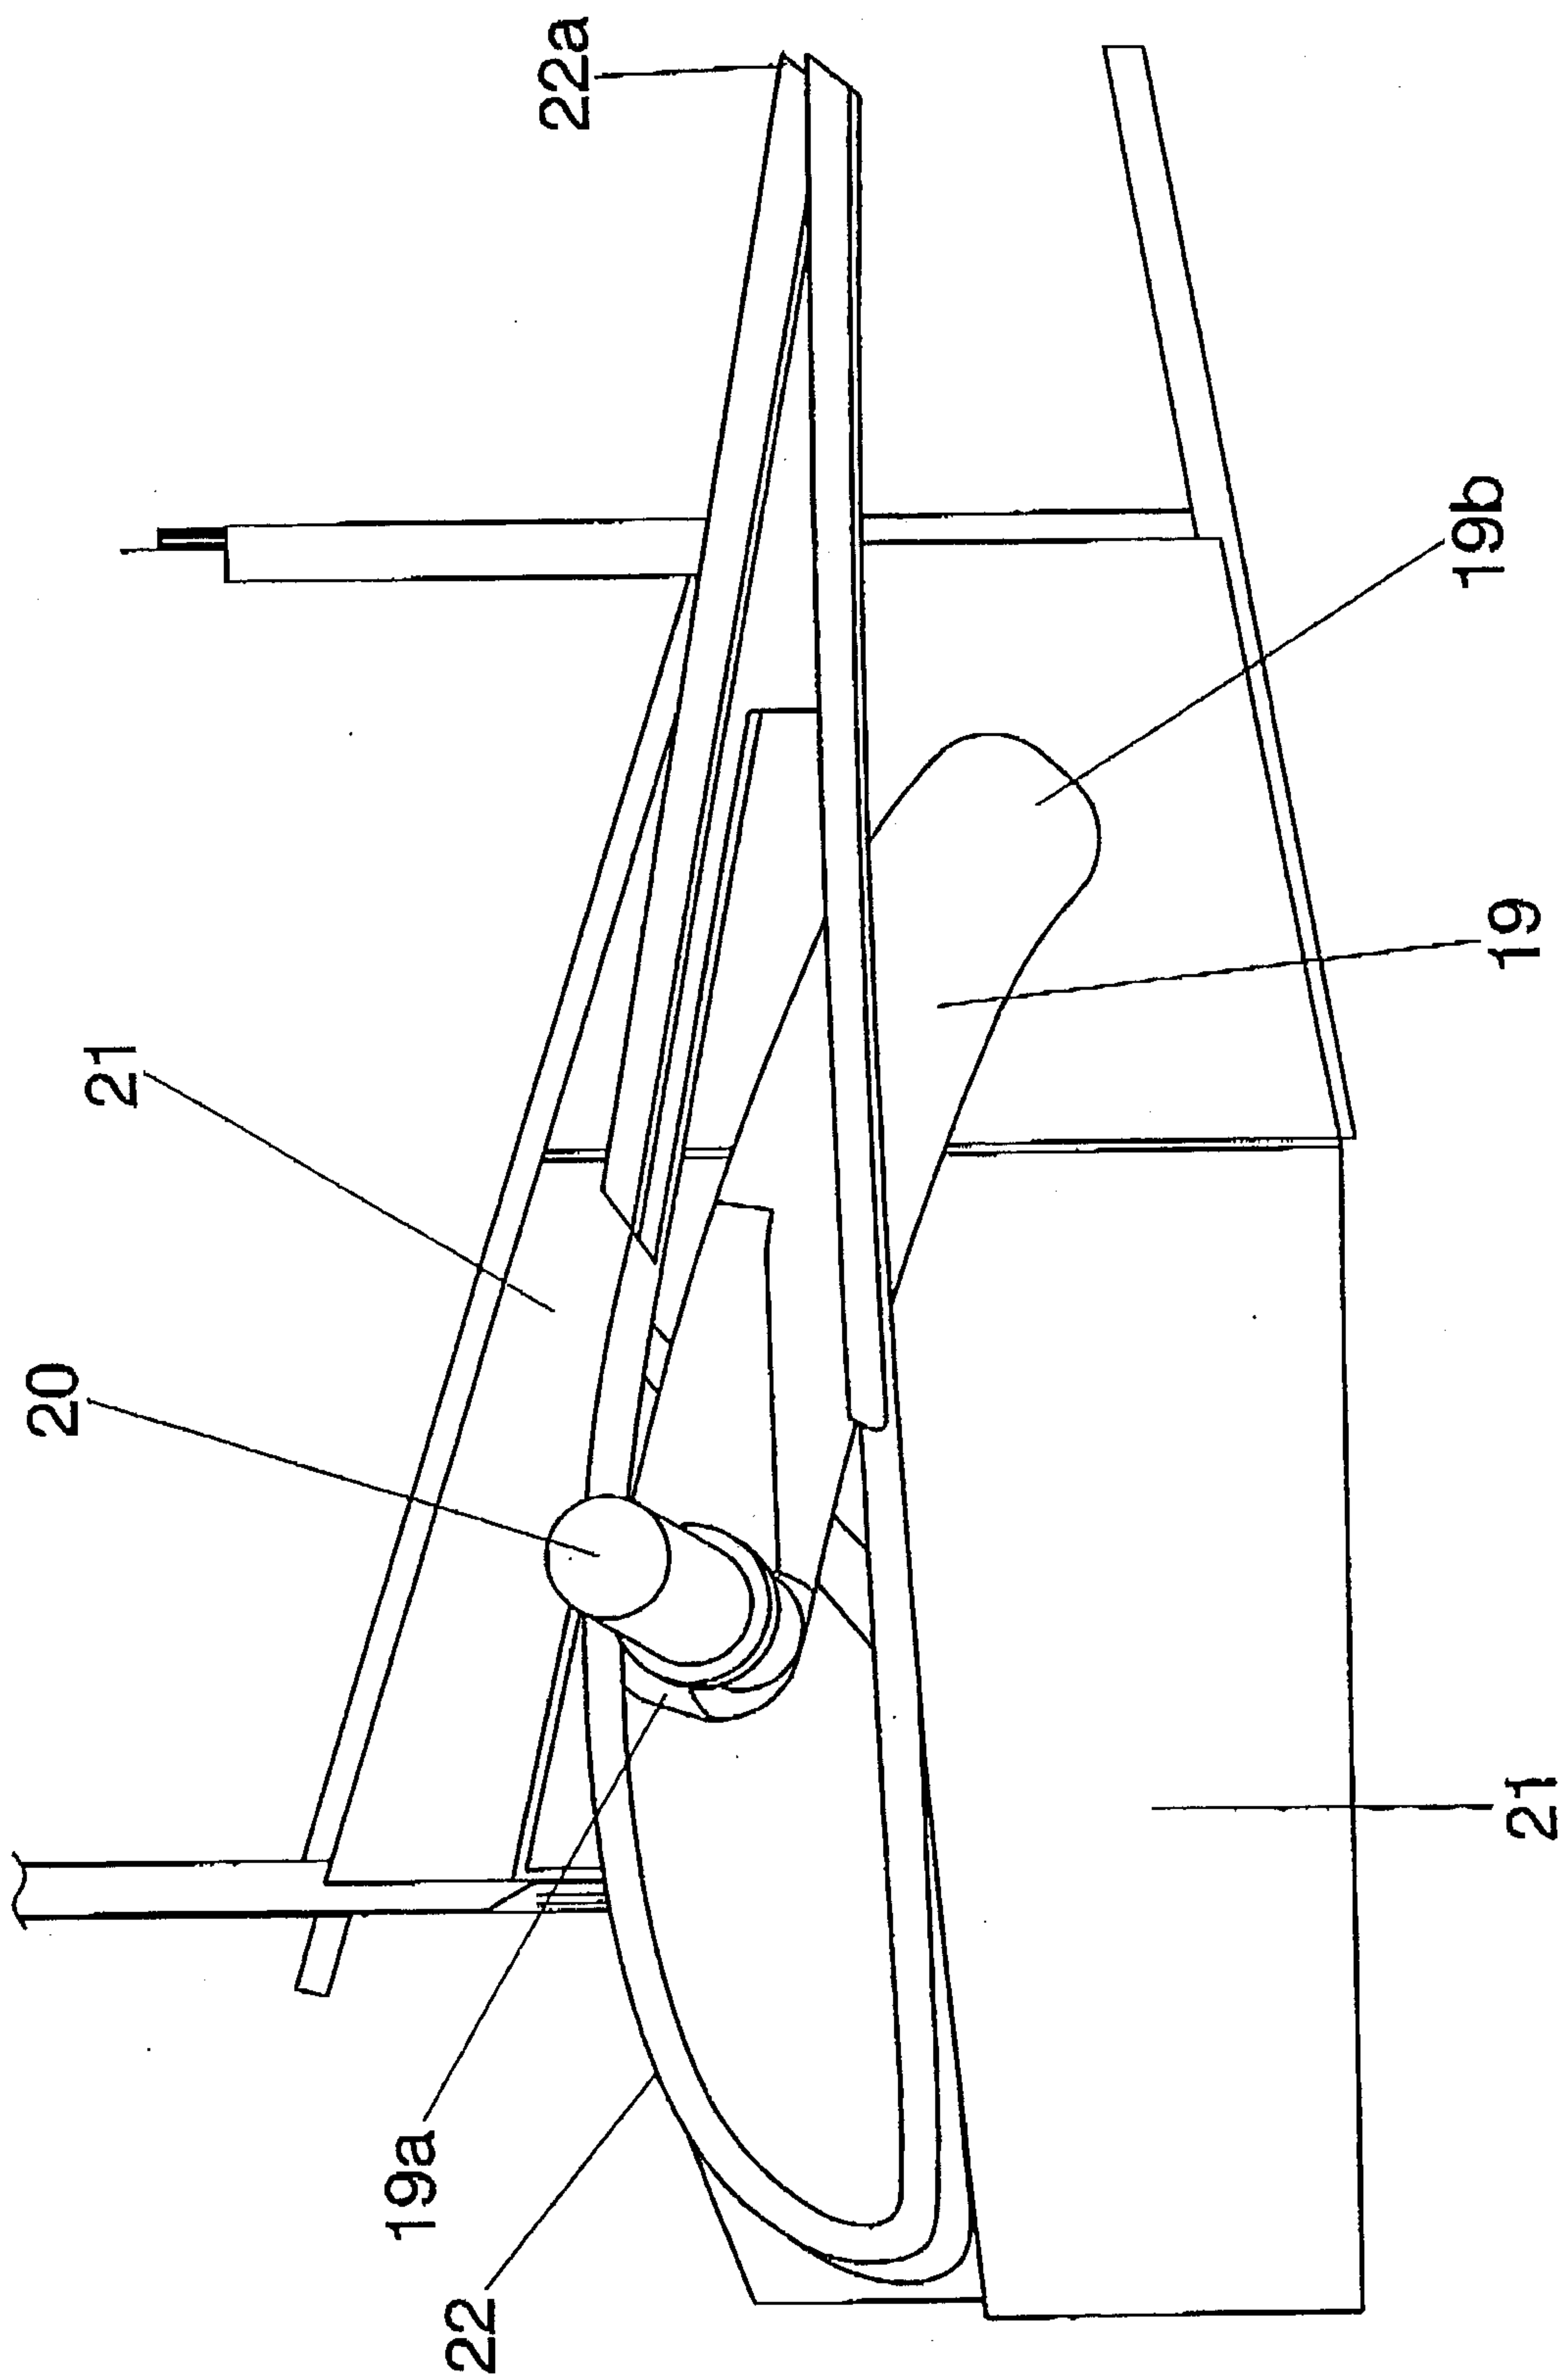


FIG. 1

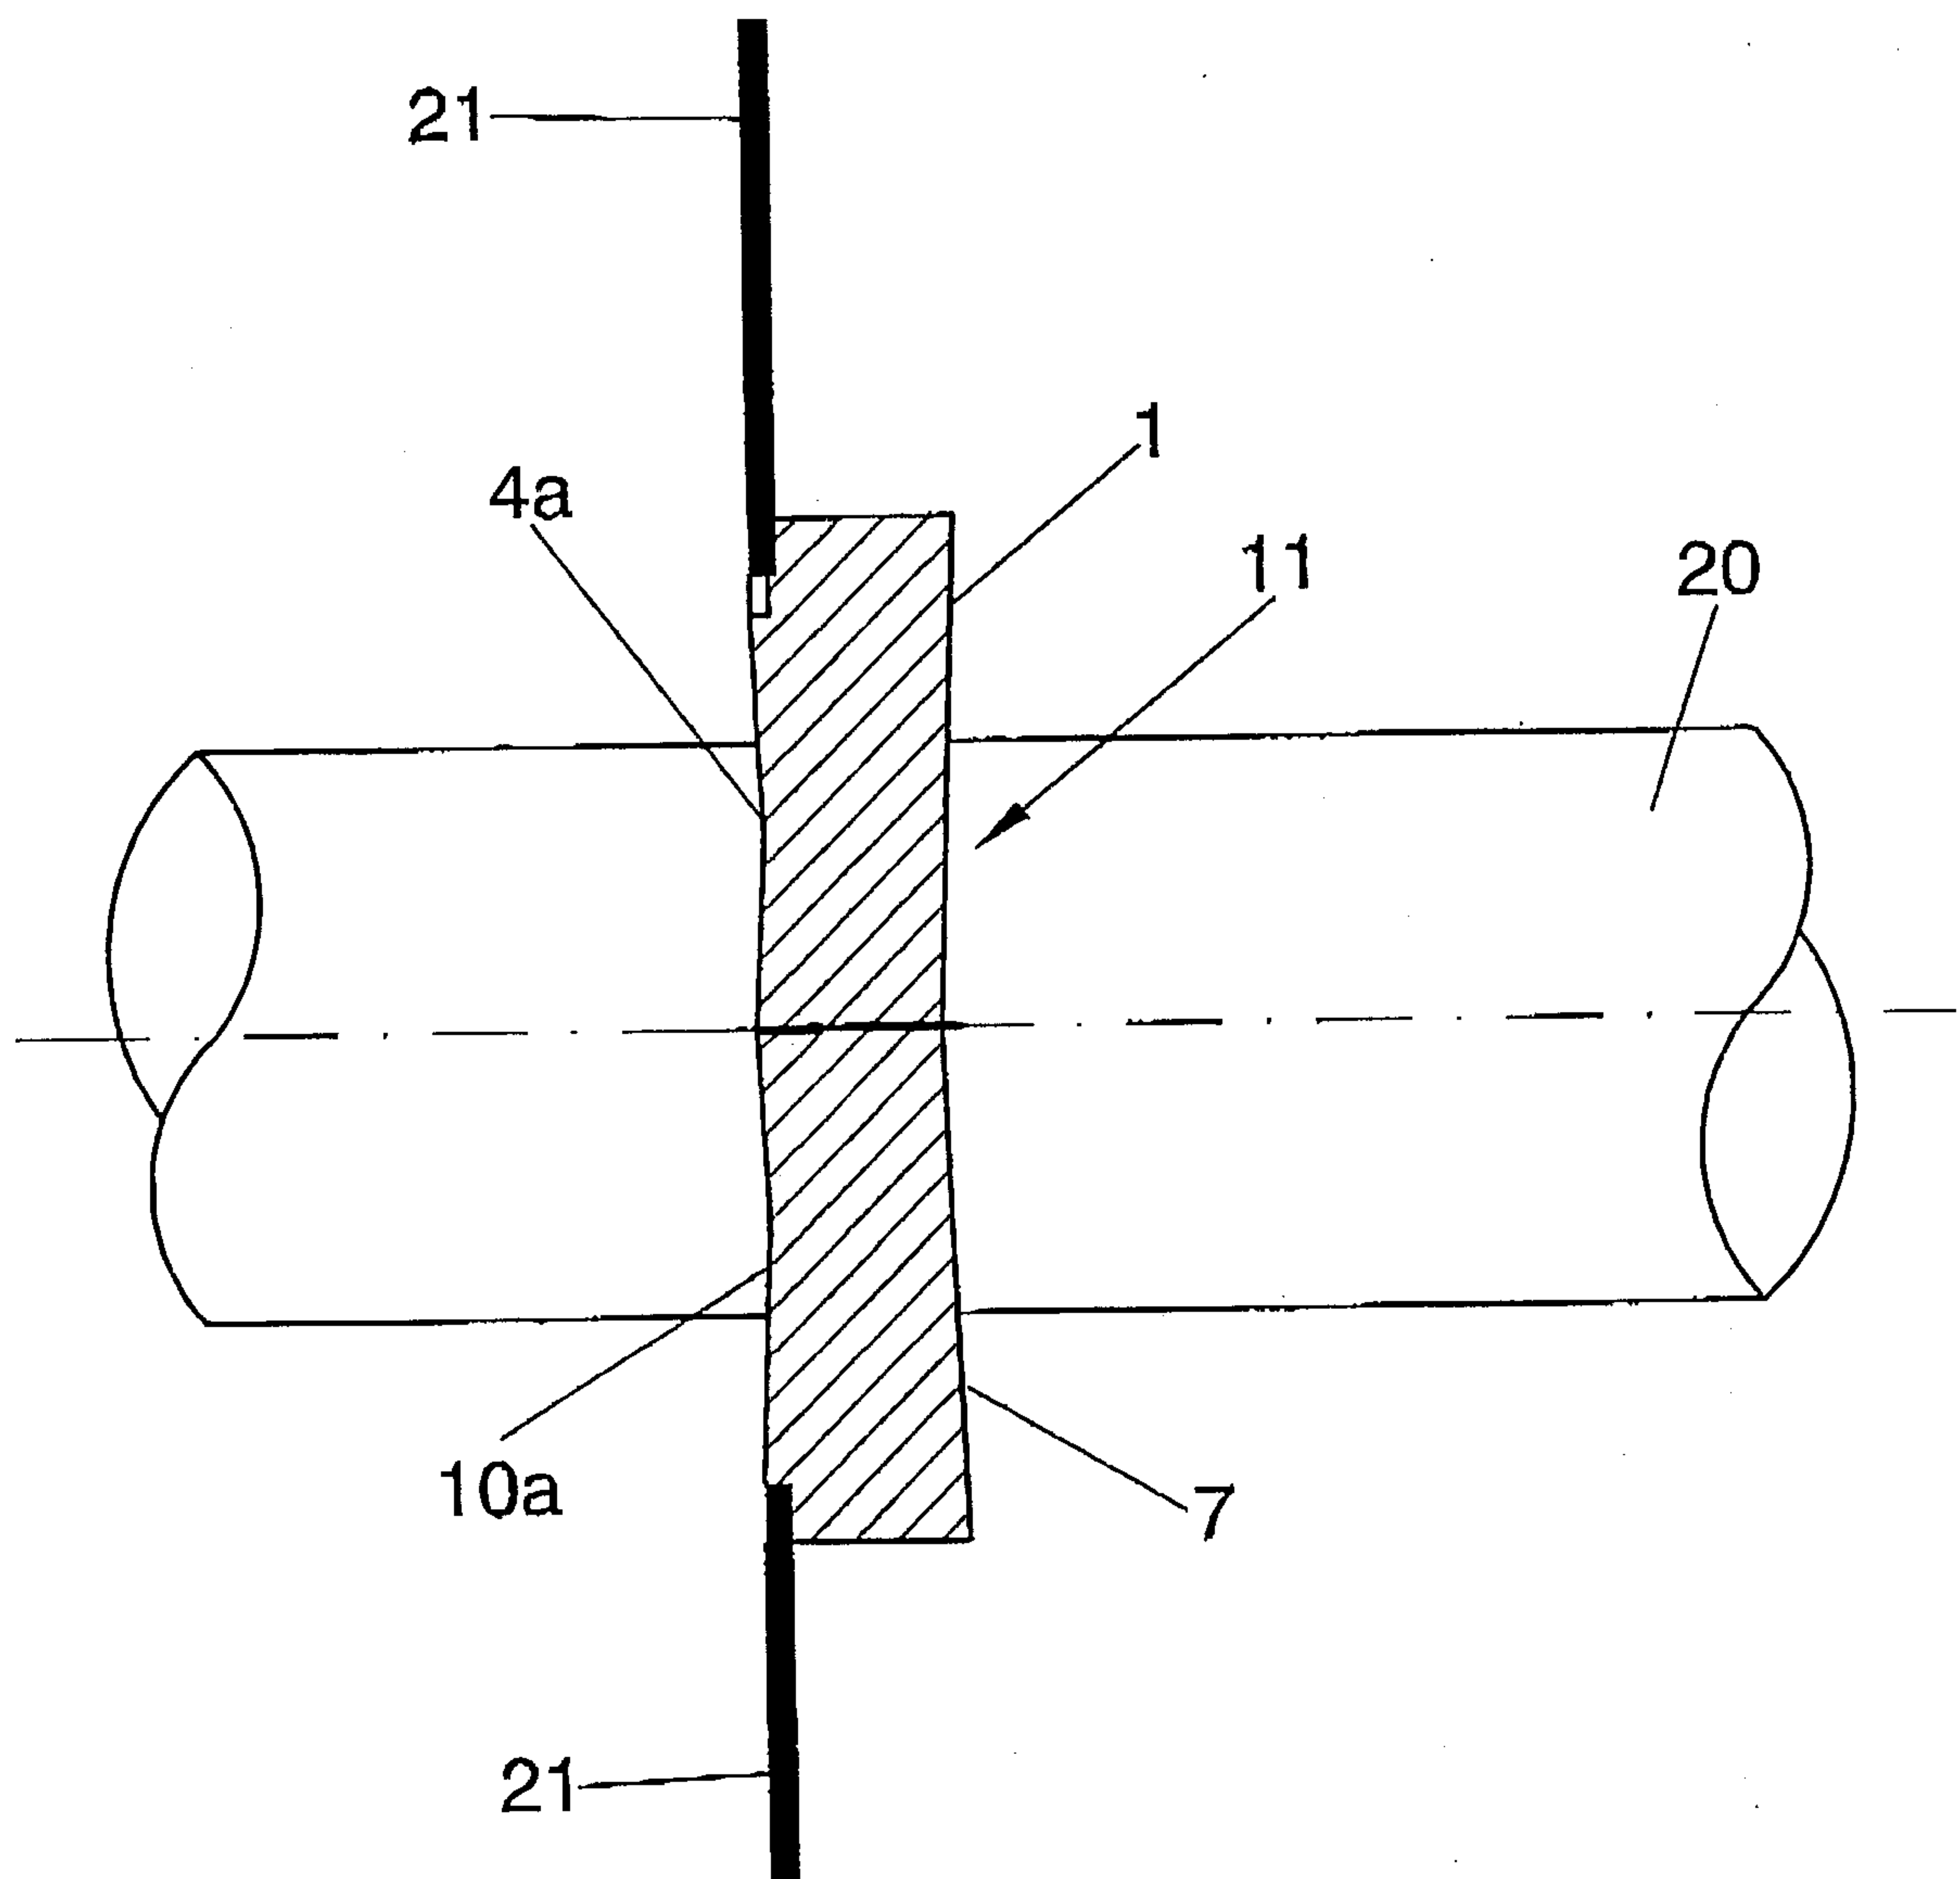


FIG. 2

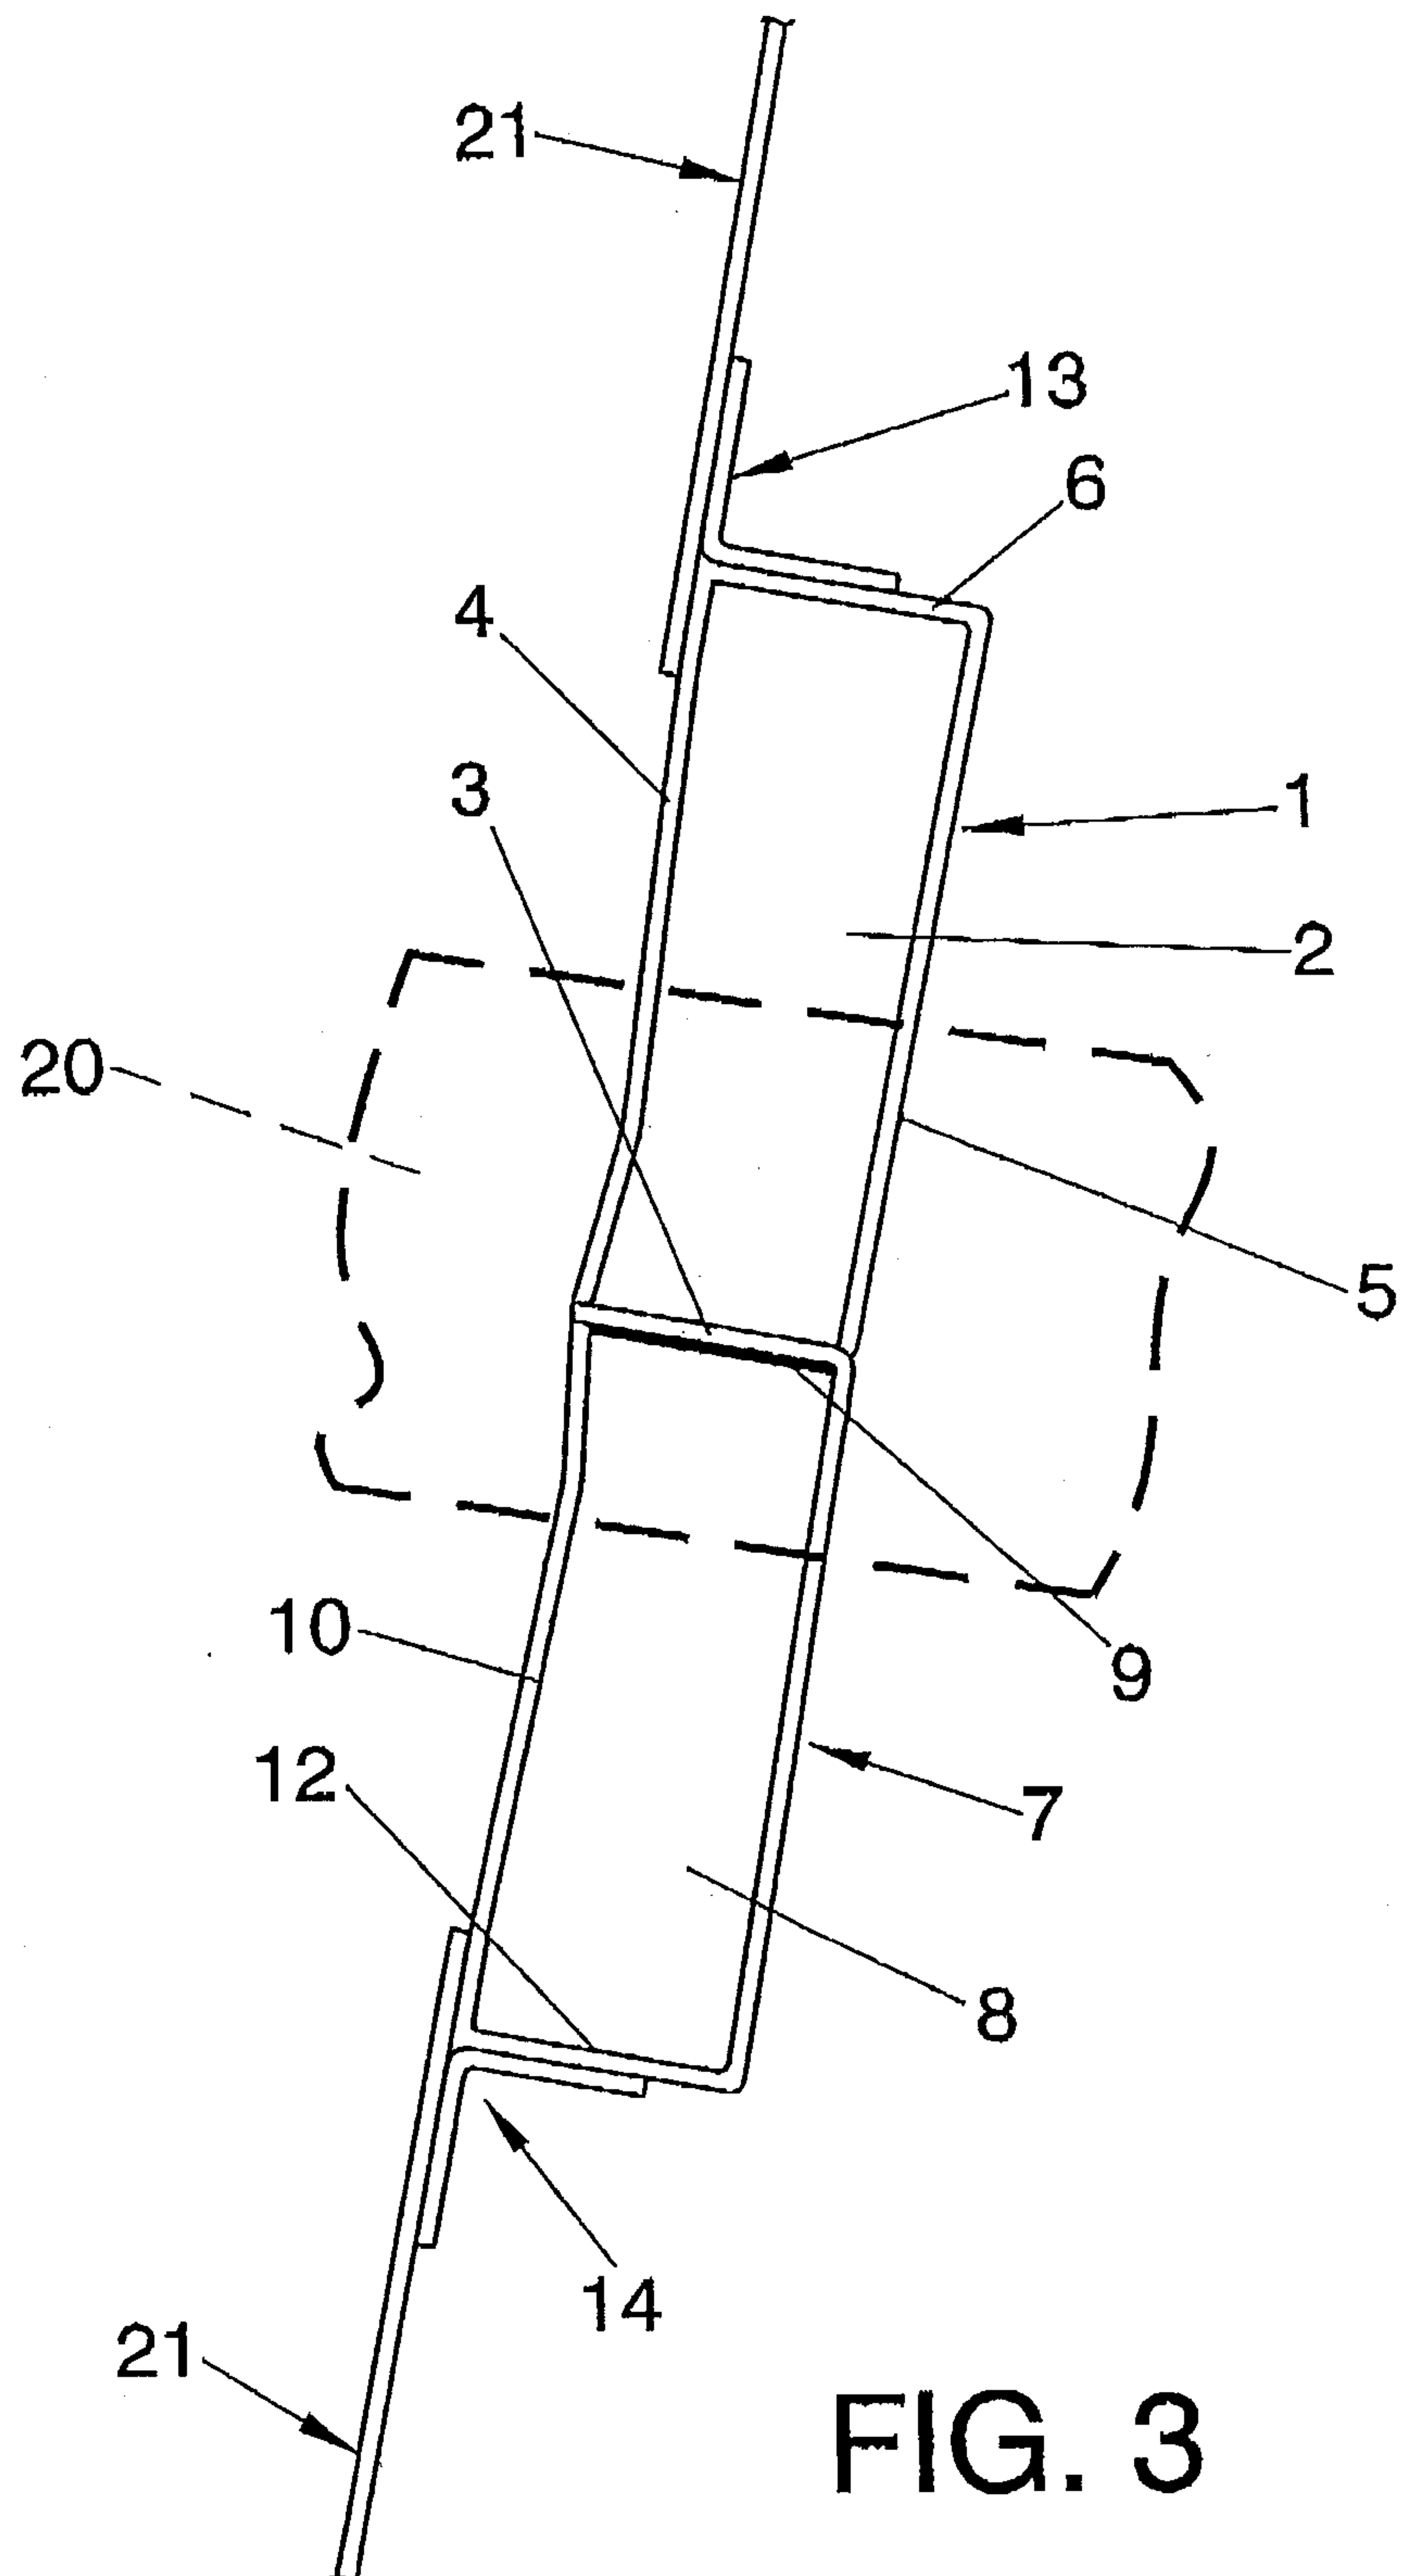
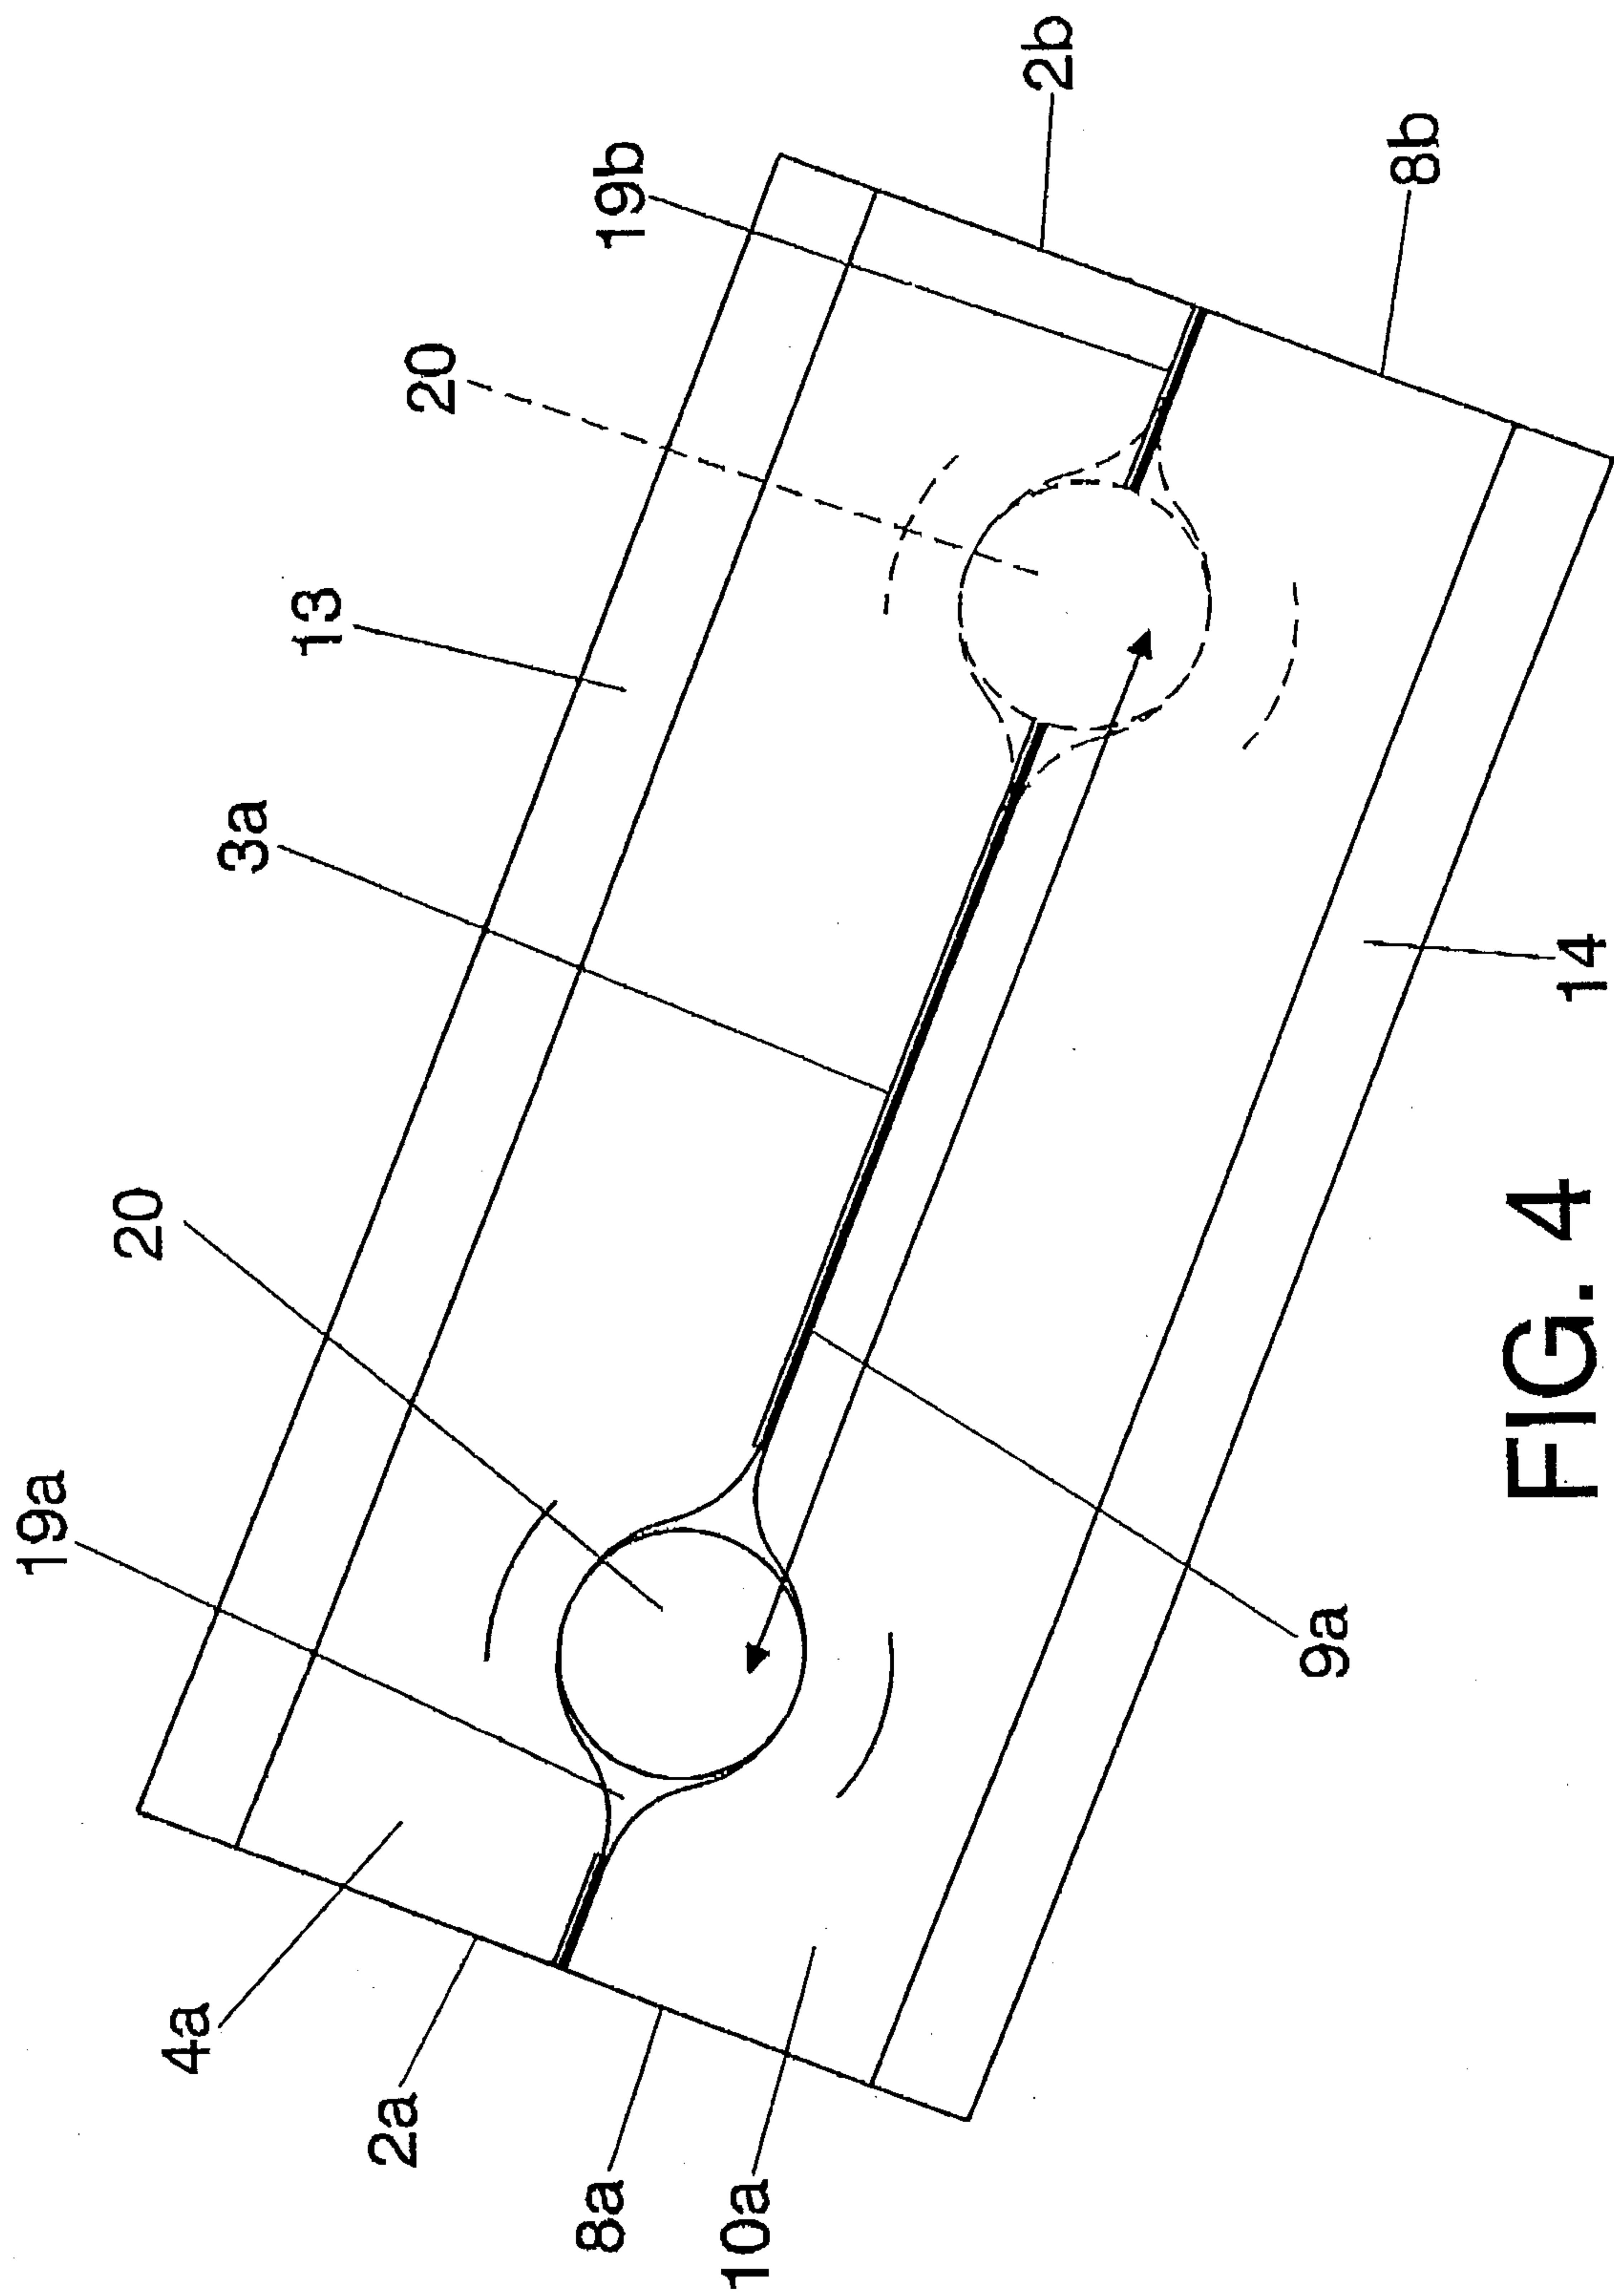


FIG. 3



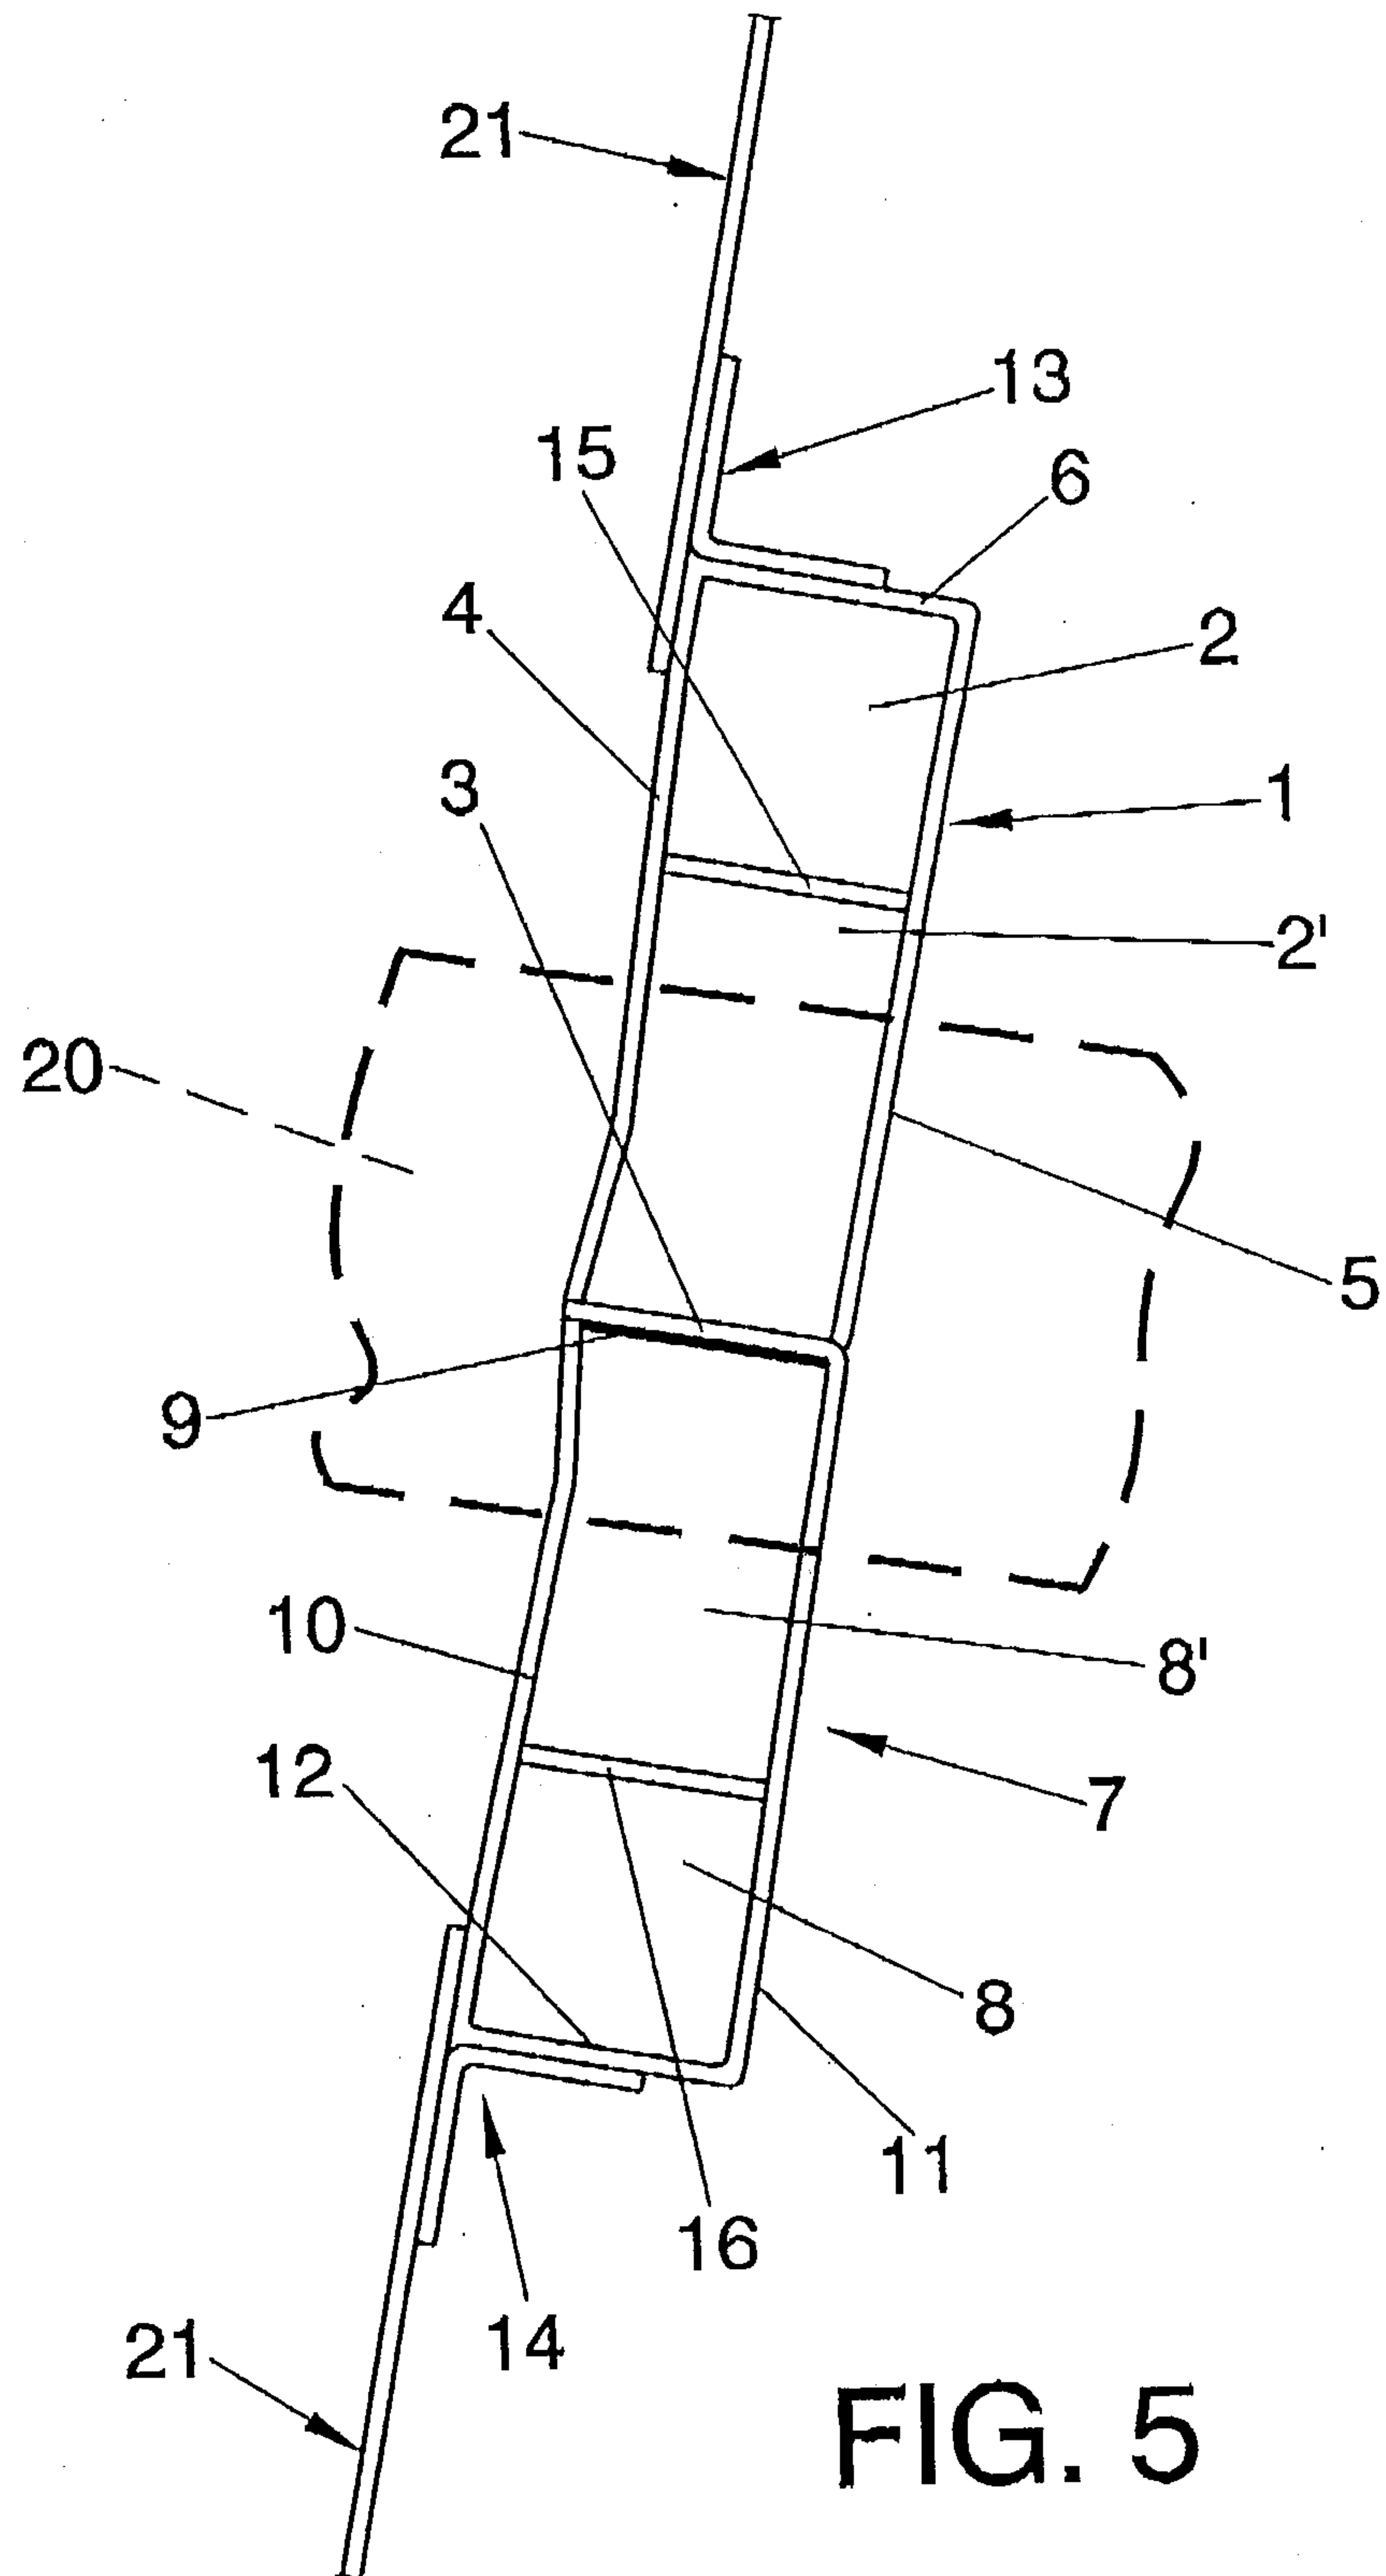


FIG. 5

