

(12) **United States Patent**  
**Shin et al.**

(10) **Patent No.:** **US 11,467,414 B2**  
(45) **Date of Patent:** **Oct. 11, 2022**

(54) **SEE-THROUGH DISPLAY DEVICE**

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**, Suwon-si (KR)

(72) Inventors: **Bongsu Shin**, Seoul (KR); **Changkun Lee**, Seoul (KR); **Sunil Kim**, Seoul (KR); **Wontaek Seo**, Yongin-si (KR); **Geeyoung Sung**, Daegu (KR)

(73) Assignee: **SAMSUNG ELECTRONICS CO., LTD.**, Suwon-si (KR)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/336,840**

(22) Filed: **Jun. 2, 2021**

(65) **Prior Publication Data**  
US 2021/0286186 A1 Sep. 16, 2021

**Related U.S. Application Data**

(62) Division of application No. 16/364,333, filed on Mar. 26, 2019, now Pat. No. 11,054,657.

(30) **Foreign Application Priority Data**  
Oct. 22, 2018 (KR) ..... 10-2018-0126314

(51) **Int. Cl.**  
**G02B 27/10** (2006.01)  
**G06F 3/01** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **G02B 27/0179** (2013.01); **G02B 27/0176** (2013.01); **G06T 19/006** (2013.01);  
(Continued)

(58) **Field of Classification Search**

CPC ..... G02B 27/0185; G02B 27/0176; G02B 27/0163; G02B 27/0179; G02B 27/0172; G02B 2006/1215; G02B 27/017; G02B 2027/0134; G02B 2027/0132; G02B 2027/013; G02B 2027/0136; G02B 27/0101; G02B 27/01; G02B 27/00;  
(Continued)

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

5,729,077 A \* 3/1998 Newnham ..... H02N 2/043 310/369  
6,465,936 B1 \* 10/2002 Knowles ..... H02N 2/043 310/328

(Continued)

**FOREIGN PATENT DOCUMENTS**

EP 3767371 A2 \* 1/2021 ..... G02B 27/0101  
EP 3816702 A1 \* 5/2021 ..... F03G 7/005  
(Continued)


*Primary Examiner* — Julie Anne Watko

(74) *Attorney, Agent, or Firm* — Sughrue Mion, PLLC

(57) **ABSTRACT**

A see-through display device includes an image generation unit configured to emit a virtual image light, a light combining unit configured to combine the virtual image light with an actual image light, and a driving unit including a deformation unit and a bridge unit disposed between the deformation unit and the image generation unit, and configured to control a distance between the image generation unit and the light combining unit through the deformation unit and the bridge unit.

**7 Claims, 12 Drawing Sheets**

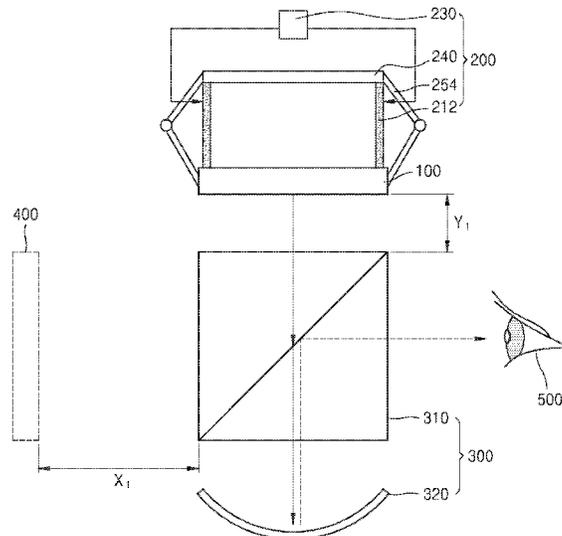

- (51) **Int. Cl.**  
*G02B 27/01* (2006.01)  
*G06T 19/00* (2011.01)  
*G06F 1/16* (2006.01)  
*G06F 3/0487* (2013.01)  
*G02B 6/12* (2006.01)
- (52) **U.S. Cl.**  
 CPC .. *G02B 27/0172* (2013.01); *G02B 2006/1215*  
 (2013.01); *G02B 2027/0163* (2013.01); *G02B*  
*2027/0185* (2013.01); *G06F 1/163* (2013.01);  
*G06F 3/011* (2013.01); *G06F 3/0487*  
 (2013.01); *G06F 2203/04804* (2013.01)

- (58) **Field of Classification Search**  
 CPC ..... *G02B 2006/12133*; *G02B 6/12*; *G02B*  
*6/0001*; *G02B 6/00*; *G06T 19/006*; *G06T*  
*19/00*; *G06F 1/163*; *G06F 3/011*; *G06F*  
*3/0487*; *G06F 2203/04804*; *G06F 1/1613*;  
*G06F 1/16*; *G06F 1/00*; *G06F 3/01*; *G06F*  
*3/00*; *G06F 3/048*; *G06F 3/03*; *G06F*  
*3/002*; *G06F 3/005*; *G06F 2203/048*;  
*G06F 2203/00*

See application file for complete search history.

- (56) **References Cited**  
 U.S. PATENT DOCUMENTS
- |                  |         |                 |                       |
|------------------|---------|-----------------|-----------------------|
| 9,769,465 B2     | 9/2017  | Seo et al.      |                       |
| 9,864,201 B2     | 1/2018  | Kim et al.      |                       |
| 2009/0115292 A1* | 5/2009  | Ueda .....      | H02N 2/043<br>310/338 |
| 2009/0160736 A1* | 6/2009  | Shikita .....   | G02B 27/0101<br>345/7 |
| 2009/0303839 A1* | 12/2009 | Narayanan ..... | H04R 17/00<br>367/164 |
| 2013/0088413 A1  | 4/2013  | Raffle et al.   |                       |
| 2016/0313558 A1  | 10/2016 | Gutierrez       |                       |
| 2017/0299945 A1  | 10/2017 | Suzuki et al.   |                       |
| 2017/0357088 A1* | 12/2017 | Matsuzaki ..... | G02B 6/3516           |
| 2018/0015876 A1* | 1/2018  | Yamagata .....  | G03B 21/28            |
| 2019/0025580 A1* | 1/2019  | Nagano .....    | B60K 35/00            |
| 2020/0096816 A1  | 3/2020  | Lee et al.      |                       |
| 2020/0326541 A1* | 10/2020 | Schoch .....    | G02B 27/0101          |

- FOREIGN PATENT DOCUMENTS
- |    |                   |        |
|----|-------------------|--------|
| JP | 6-115381          | 4/1994 |
| JP | 2005-48658 A *    | 2/2005 |
| KR | 10-0351805 B1     | 9/2002 |
| KR | 10-2003-0073884 A | 9/2003 |
| KR | 10-2015-0093054 A | 8/2015 |
| KR | 10-2016-0068060 A | 6/2016 |

\* cited by examiner

FIG. 1

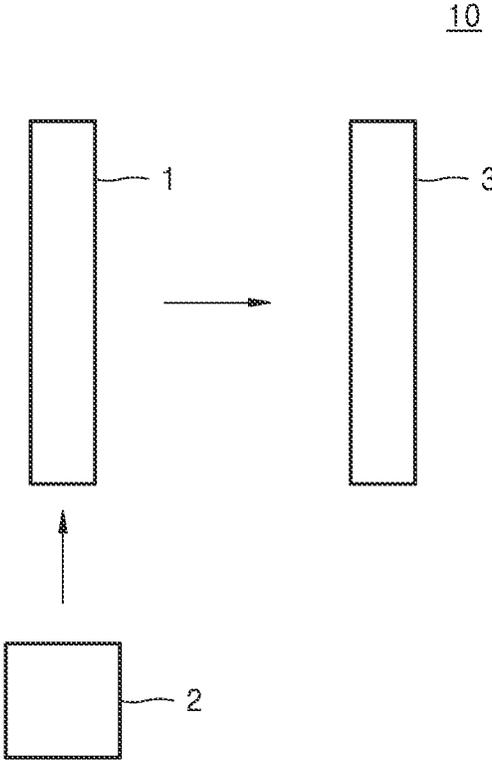


FIG. 2

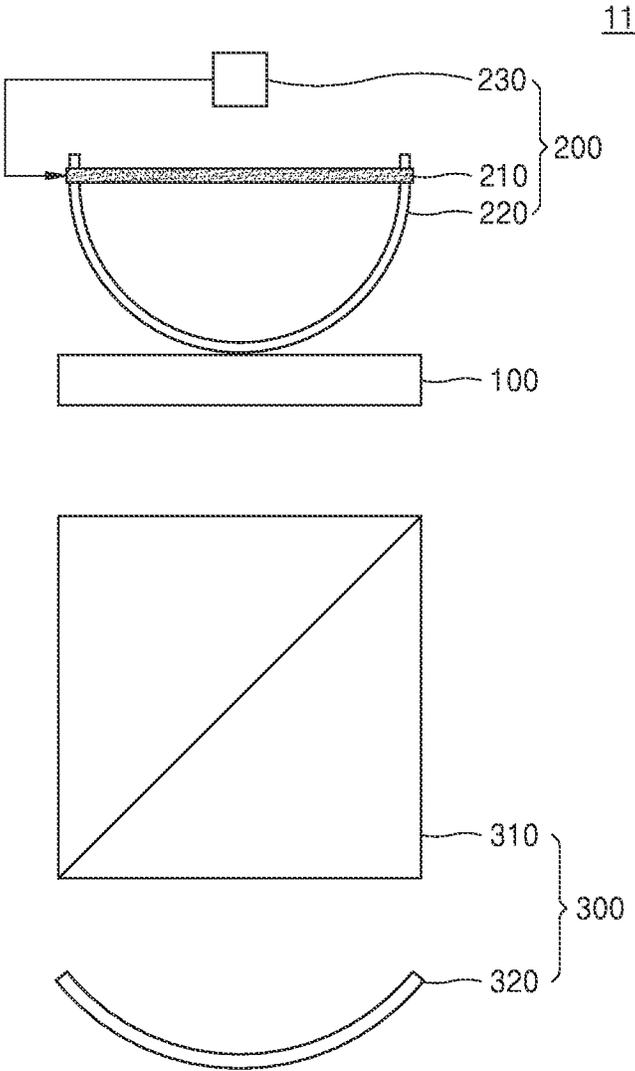


FIG. 3

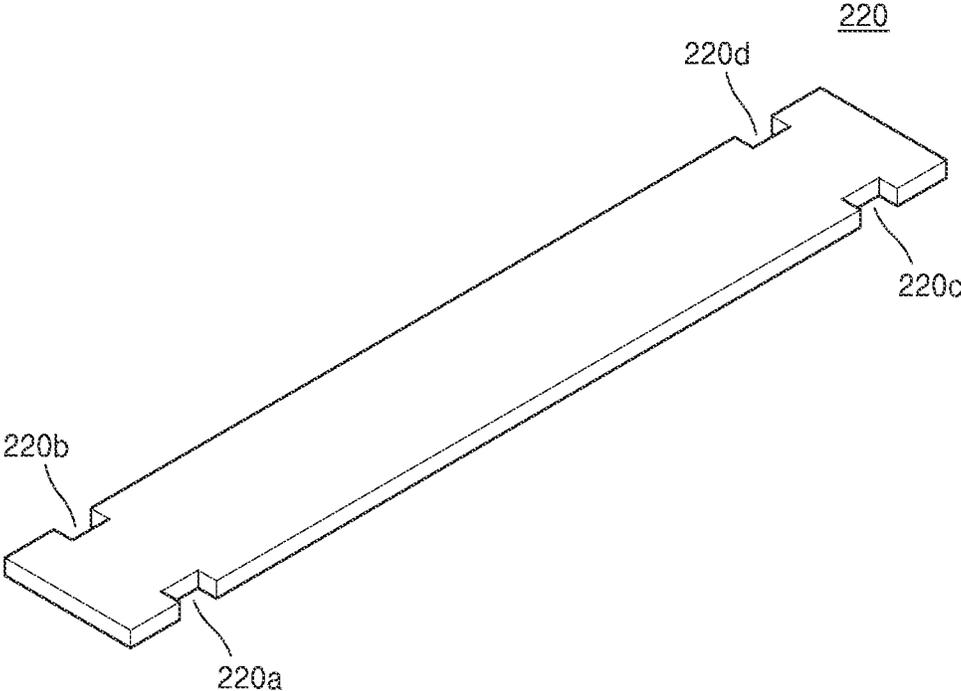


FIG. 4

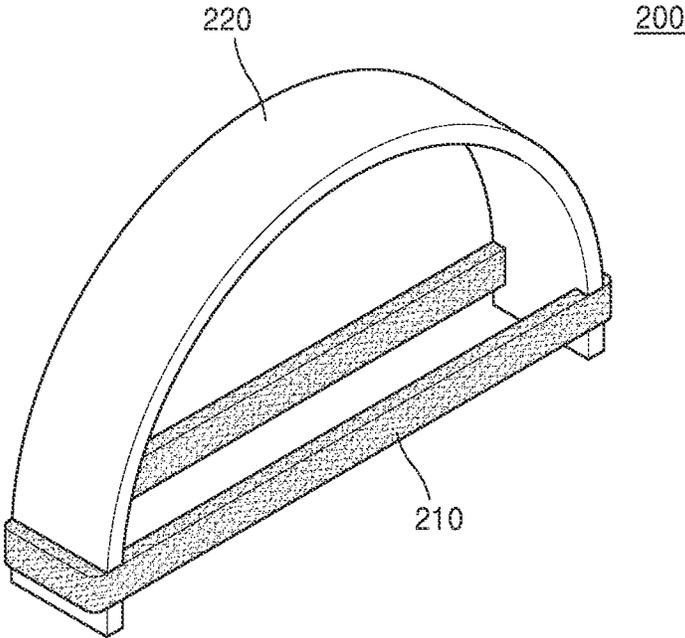


FIG. 5

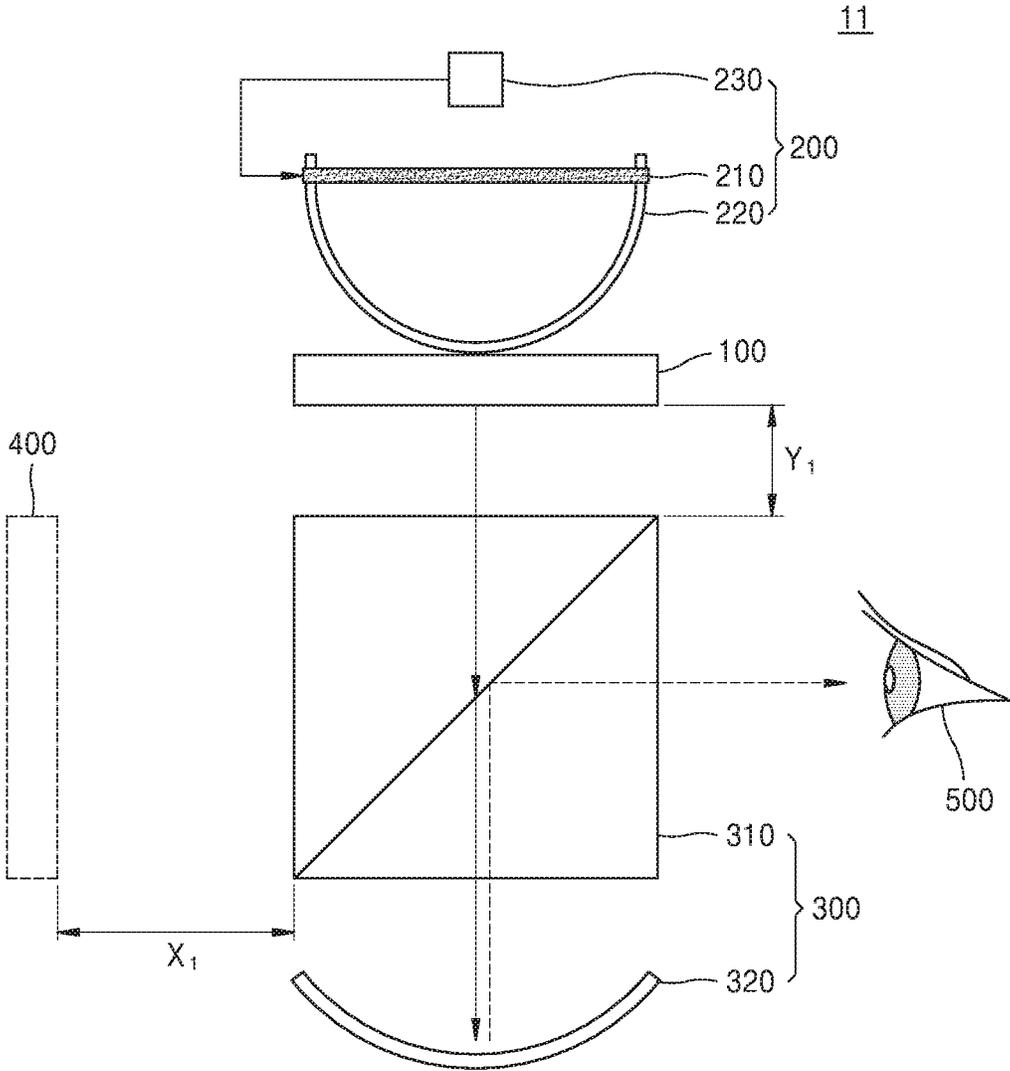


FIG. 6

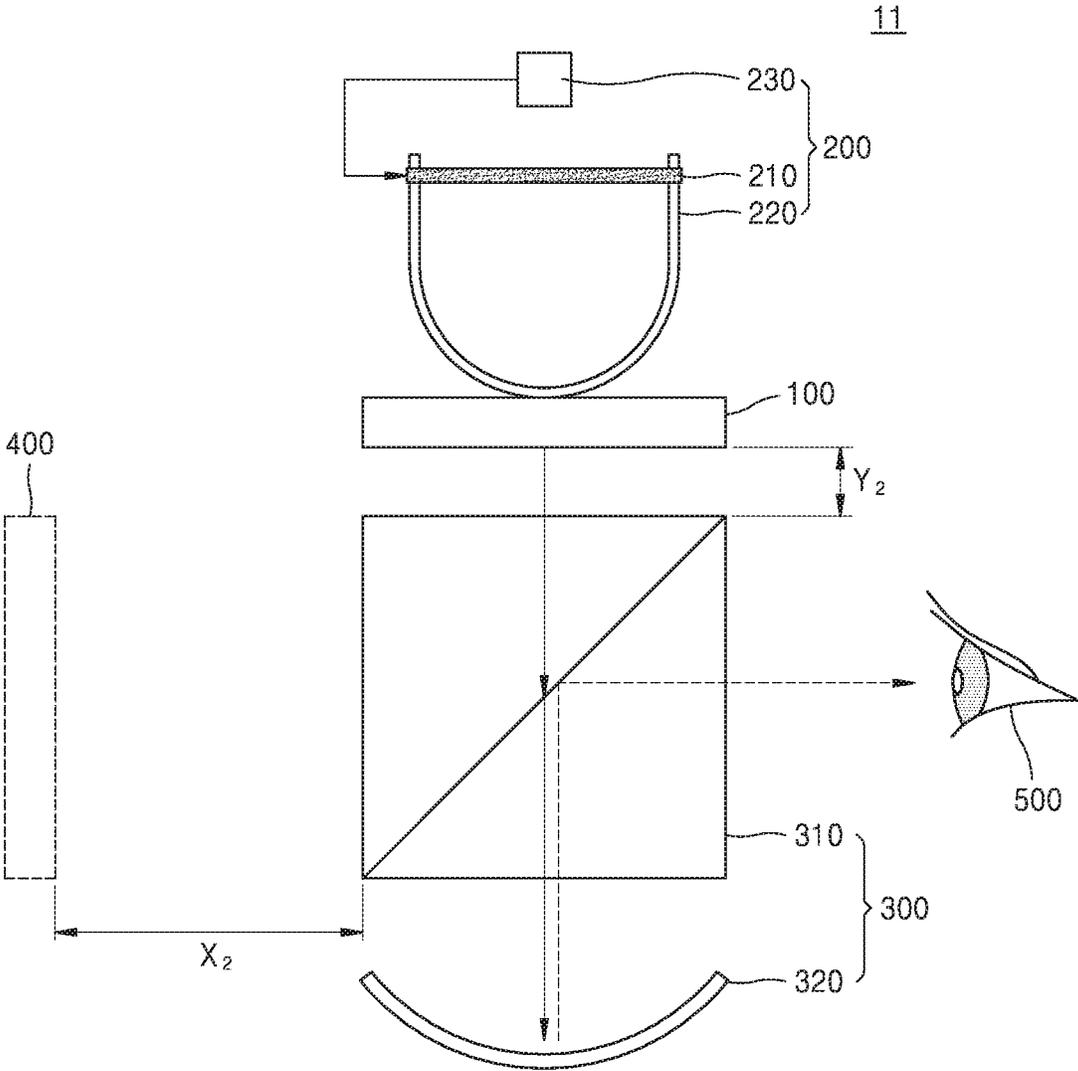


FIG. 7

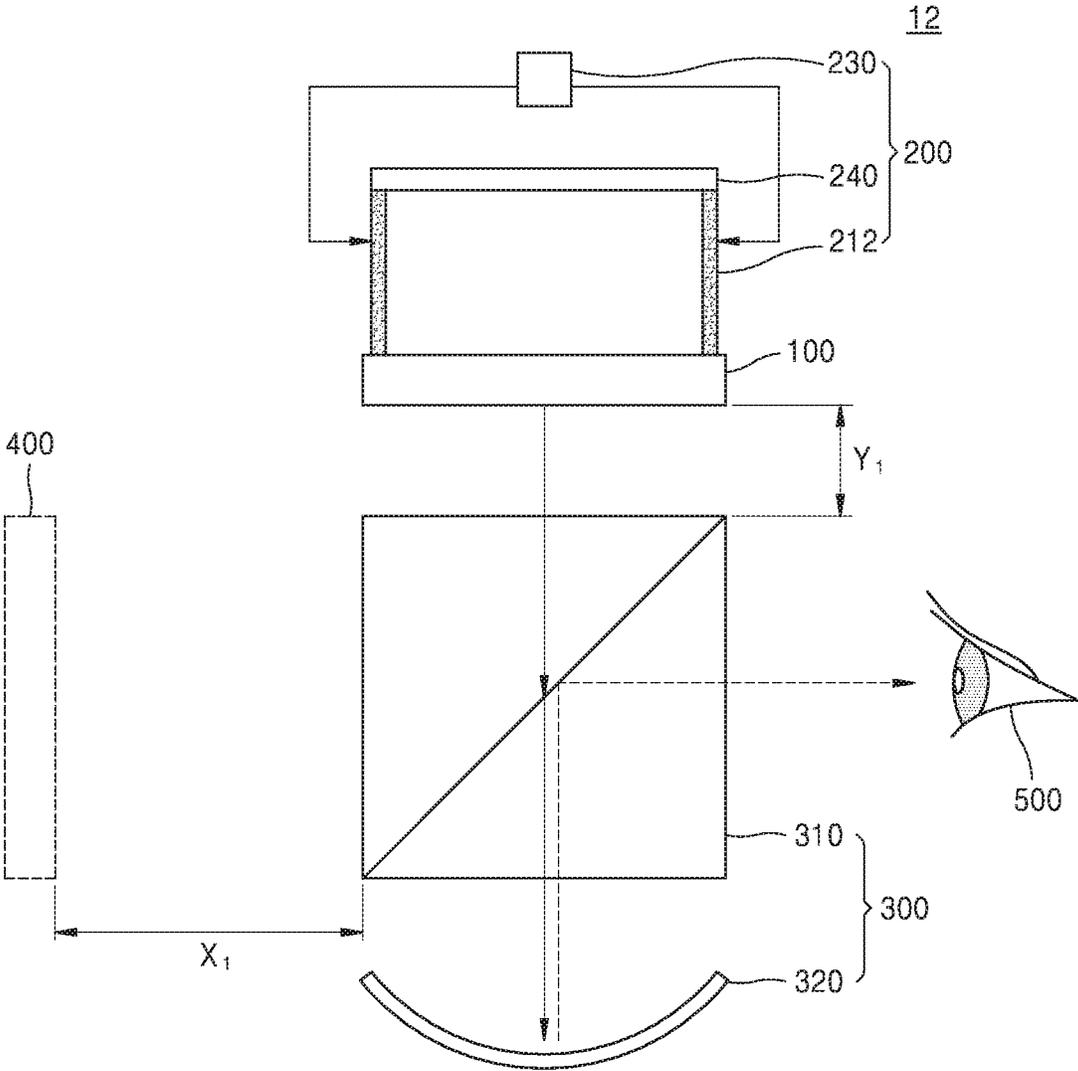


FIG. 8

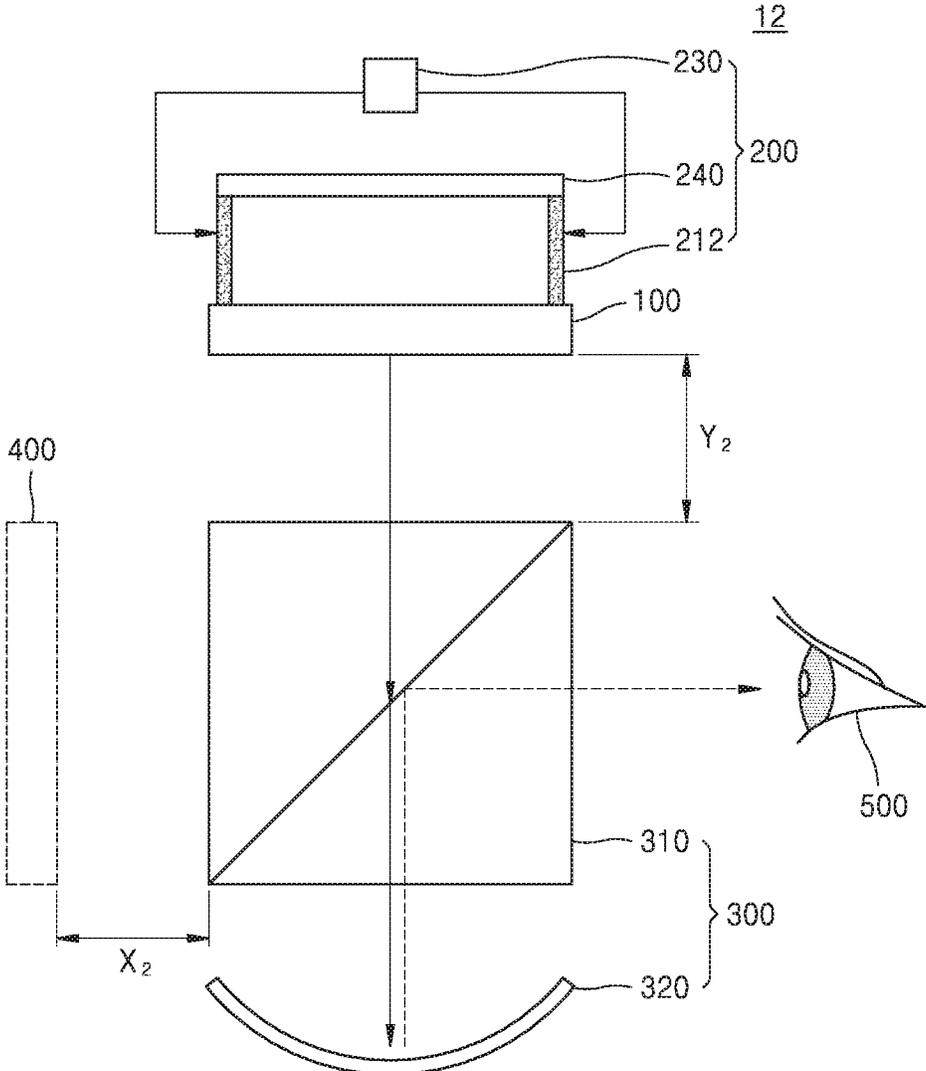


FIG. 9

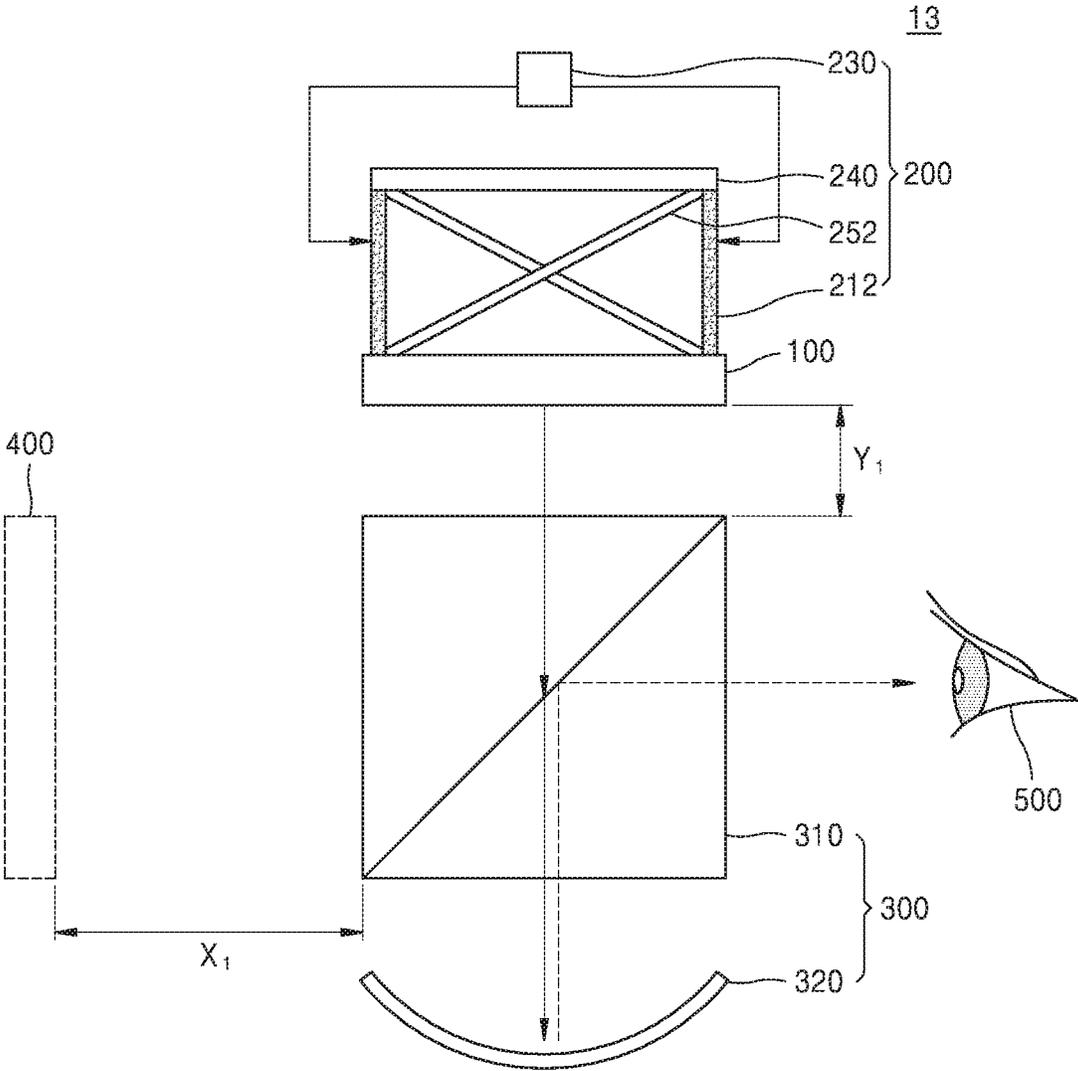


FIG. 10

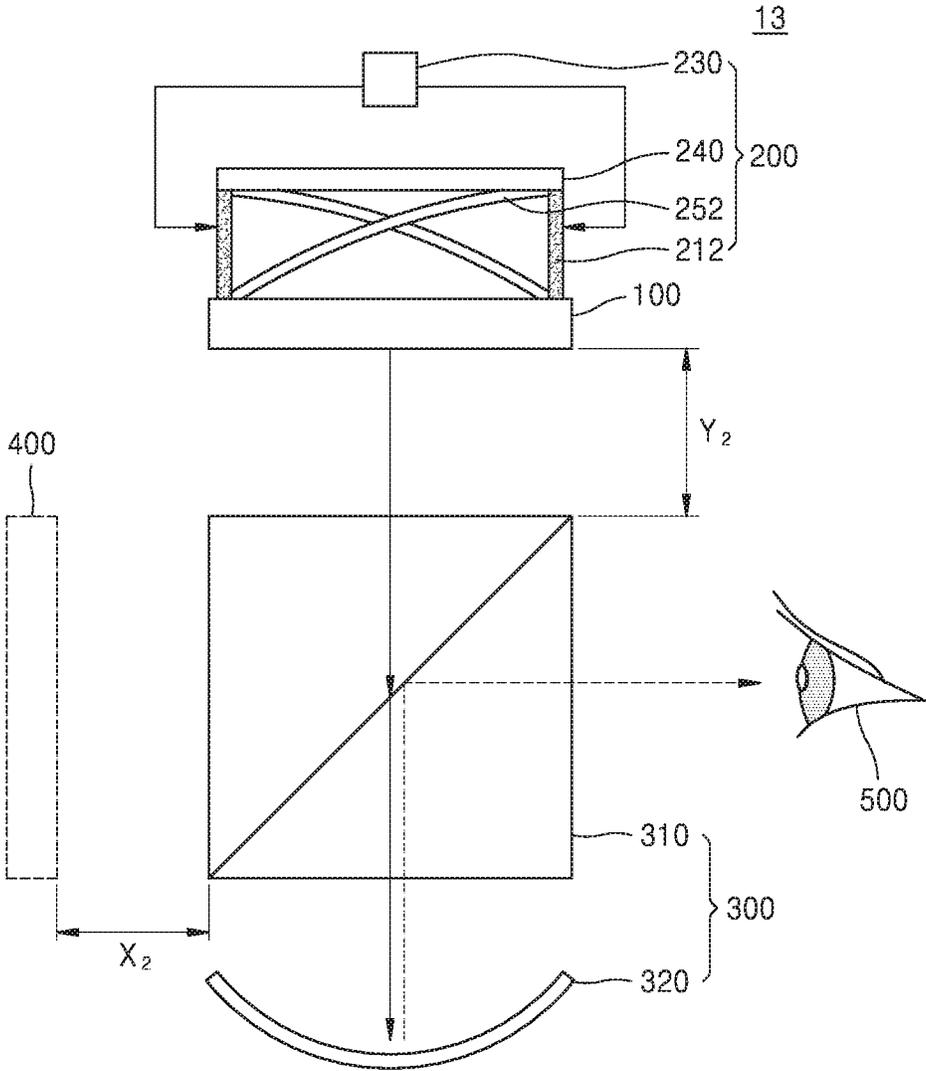


FIG. 11

14


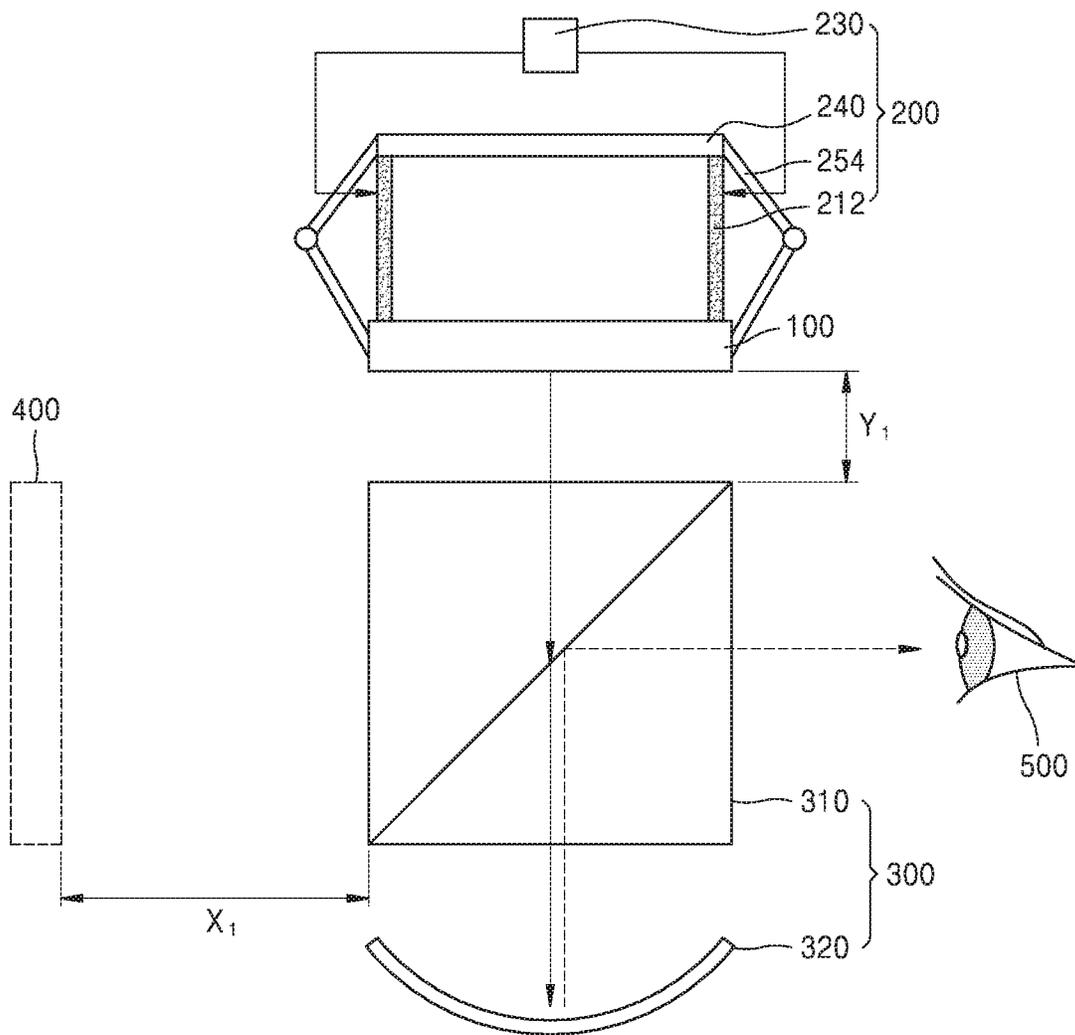


FIG. 12

14

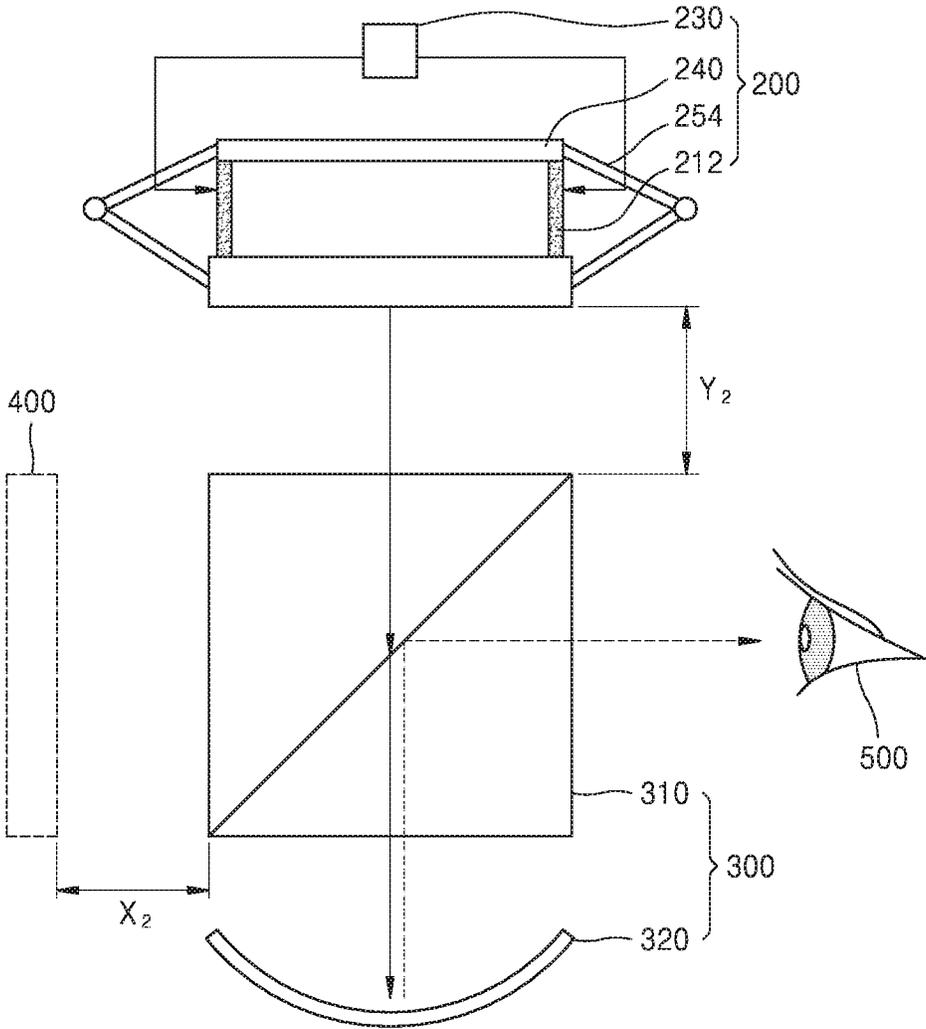

**SEE-THROUGH DISPLAY DEVICE**CROSS-REFERENCE TO RELATED  
APPLICATIONS

This is a divisional of U.S. application Ser. No. 16/364, 333, filed Mar. 26, 2019, which claims priority from Korean Patent Application No. 10-2018-0126314, filed on Oct. 22, 2018 in the Korean Intellectual Property Office, the disclosures of which are incorporated herein by reference in their entireties.

## BACKGROUND

## 1. Field

Apparatuses and methods consistent with exemplary embodiments relate to see-through display devices.

## 2. Description of the Related Art

Recently, as the development of electronic and display devices that may realize virtual reality (VR), interests with respect to VR have increased. As a next step of VR, technologies (methods) that may realize augmented reality (AR) and mixed reality (MR) have been studied.

Unlike VR that premises a complete virtual world, AR is a display technique that further increases an effect of reality by overlapping (combining) imaginal objects or information on an environment of the real world. Considering that VR is limitedly applicable to a field, such as games or virtual experiences, AR may be applicable to various real environments. In particular, AR draws attention as a next generation display technique suitable for a ubiquitous environment or an internet of things (IoT) environment. AR may be an example of MR in that AR mixes the real world and additional information (virtual world).

## SUMMARY

One or more exemplary embodiments provide miniaturized and lightweight see-through display devices.

One or more exemplary embodiments provide see-through display devices configured to continuously change a focal distance thereof.

According to an aspect of an example embodiment, there is provided a see-through display device including: an image generation unit configured to emit virtual image light; a light combining unit configured to combine the virtual image light and actual image light; and a driving unit including a deformation unit and a bridge unit disposed between the deformation unit and the image generation unit, and configured to control a distance between the image generation unit and the light combining unit through the deformation unit and the bridge unit.

A length of the deformation unit may change according to a temperature of the deformation unit.

The driving unit may further include a driving control unit that controls the deformation unit, and the driving control unit may control the temperature of the deformation unit by applying an electrical signal.

As the length of the deformation unit decreases, the bridge unit may move the image generation unit closer to the light combining unit to decrease the distance between the image generation unit and the light combining unit.

The deformation unit may include a shape memory alloy (SMA).

The deformation unit may be wound around both edges of the bridge unit so that the bridge unit has an arch shape.

The bridge unit may have elasticity.

The both edges of the bridge unit may include recess regions, and the deformation unit may be wound around the recess regions.

According to an aspect of another example embodiment, there is provided a see-through display device including: an image generation unit configured to emit a virtual image light; a light combining unit configured to combine the virtual image light and an actual image light; and a driving unit including: a supporting unit; and a deformation unit disposed between the supporting unit and the image generation unit and configured to move the image generation unit closer to the light combining unit as a length of the deformation unit increases, wherein the driving unit may be configured to control a distance between the image generation unit and the light combining unit through the deformation unit and the supporting unit.

The driving unit may further include a driving control unit configured to control the deformation unit, and the driving control unit may control the length of the deformation unit by applying an electrical signal to the deformation unit.

The length of the deformation unit may be changed according to a temperature of the deformation unit, and the temperature of the deformation unit may be controlled by the electrical signal.

The see-through display device may further include a restoration unit provided between the supporting unit and the image generation unit, and the restoration unit may have a characteristic of returning to an initial state when the restoration unit is deformed.

The restoration unit may include a bar having elasticity, and both edges of the bar respectively may contact the supporting unit and the image generation unit.

The bar may be provided a pair of torsion springs, and the pair of bars may extend in a direction crossing each other.

The restoration unit may include a torsion spring, and both edges of the torsion spring respectively may contact the supporting unit and the image generation unit.

The torsion spring may be provided a pair, and the pair of torsion springs may face each other with the supporting unit and the image generation unit therebetween.

According to an aspect of another example embodiment, there is provided a see-through display device including: an image generation unit configured to emit virtual image light; a light combining unit configured to form a virtual image based on the virtual image light; a deformation unit configured to control a distance between the virtual image and the light combining unit; and a driving control unit configured to control a length of the deformation unit to adjust the distance between the virtual image and the light combining unit.

The driving control unit may increase the distance between the virtual image and the light combining unit by reducing the length of the deformation unit.

The see-through display device may further include a bridge unit disposed between the deformation unit and the image generation unit, wherein as the length of the deformation unit decreases, the bridge unit moves the image generation unit closer to the light combining unit, and as the image generation unit is disposed closer to the light combining unit, the distance between the virtual image and the light combining unit **300** is increased.

The driving control unit may increase the distance between the virtual image and the light combining unit by increasing the length of the deformation unit.

The see-through display device may further include: a supporting unit spaced apart from the image generation unit with the deformation unit that is disposed between the supporting unit and the image generation unit; and a restoration unit arranged between the supporting unit and the image generation unit, wherein as the length of the deformation unit increases, the image generation unit is disposed closer to the light combining unit, and as the image generation unit is disposed closer to the light combining unit, the distance between the virtual image and the light combining unit is increased.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above and/or other aspects will be more apparent by describing certain example embodiments, with reference to the accompanying drawings in which:

FIG. 1 is a block diagram of a see-through display device according to an example embodiment;

FIG. 2 is a conceptual drawing of a see-through display device according to an example embodiment;

FIG. 3 is a perspective view of a bridge unit of FIG. 2;

FIG. 4 is a perspective view of a driving unit of FIG. 2;

FIGS. 5 and 6 are conceptual drawings for explaining an operation of the see-through display device of FIG. 2;

FIGS. 7 and 8 are conceptual drawings for explaining an operation of a see-through display device according to another example embodiment;

FIGS. 9 and 10 are conceptual drawings for explaining an operation of a see-through display device according to another example embodiment; and

FIGS. 11 and 12 are conceptual drawings for explaining an operation of a see-through display device according to another example embodiment.

#### DETAILED DESCRIPTION

Example embodiments are described in greater detail below with reference to the accompanying drawings.

In the following description, like drawing reference numerals are used for like elements, even in different drawings. The matters defined in the description, such as detailed construction and elements, are provided to assist in a comprehensive understanding of the example embodiments. However, it is apparent that the example embodiments can be practiced without those specifically defined matters. Also, well-known functions or constructions are not described in detail since they would obscure the description with unnecessary detail.

It will also be understood that when an element is referred to as being “on” or “above” another element, the element may be in direct contact with the other element or other intervening elements may be present.

In the following embodiments, the singular forms include the plural forms unless the context clearly indicates otherwise. It should be understood that, when a part “comprises” or “includes” an element in the specification, unless otherwise defined, other elements are not excluded from the part and the part may further include other elements.

Also, in the specification, the term “units” or “. . . modules” denote units or modules that process at least one function or operation, and may be realized by hardware, software, or a combination of hardware and software.

Expressions such as “at least one of,” when preceding a list of elements, modify the entire list of elements and do not modify the individual elements of the list. For example, the expression, “at least one of a, b, and c,” should be under-

stood as including only a, only b, only c, both a and b, both a and c, both b and c, all of a, b, and c, or any variations of the aforementioned examples.

FIG. 1 is a block diagram of a see-through display device 10 according to an example embodiment.

Referring to FIG. 1, the see-through display device 10 including an image generation unit 1, a driving unit 2, and a light combining unit 3 may be provided. The term “see-through display device” may be also referred to as “transparent display device.” The see-through display device 10 may be a device that combines actual image light with virtual image light and provides the combined light to a user. The actual image light may be light that is emitted from an actual object and includes image information with respect to the actual object. The virtual image light may be light that is emitted from, for example, a display device, such as a spatial light modulator (SLM) and includes required virtual image information.

The image generation unit 1 may emit virtual image light. For example, the image generation unit 1 may include a liquid crystal on silicon (LCoS). The driving unit 2 may control a location of the image generation unit 1. For example, the driving unit 2 may adjust a location of the image generation unit 1 so that the image generation unit 1 may be placed close to the light combining unit 3 or away from the light combining unit 3. The light combining unit 3 may combine a virtual image with an actual image. For example, the light combining unit 3 may include a beam splitter.

FIG. 2 is a conceptual drawing of a see-through display device 11 according to an example embodiment. FIG. 3 is a perspective view of a bridge unit 220 of FIG. 2. FIG. 4 is a perspective view of a driving unit 200 of FIG. 2.

Referring to FIGS. 2 through 4, the see-through display device 11 including an image generation unit 100, the driving unit 200, and a light combining unit 300 may be provided.

The image generation unit 100 may emit virtual image light. For example, the image generation unit 100 may include an LCoS and a light source. The image generation unit 100 may provide virtual image light to the light combining unit 300.

The driving unit 200 may control a location of the image generation unit 100. The driving unit 200 may include a first deformation unit 210, a bridge unit 220, and a driving control unit 230. The first deformation unit 210 may be of a wire type. A length of the first deformation unit 210 may vary according to a temperature of the first deformation unit 210 and an electric field formed in the first deformation unit 210. For example, the first deformation unit 210 may include a shape memory alloy (SMA), an electro-active polymer (EAP), and a combination of these materials. When the first deformation unit 210 includes an SMA, the first deformation unit 210 may have a relatively small length at a relatively high temperature and may have a relatively large length at a relatively low temperature. For example, the length of the first deformation unit 210 may increase as the temperature of the first deformation unit 210 decreases, and the length of the first deformation unit 210 may decrease as the temperature of the first deformation unit 210 increases. When the first deformation unit 210 includes an EAP, a length of the first deformation unit 210 may extend in a direction vertical to an electric field when the electric field is applied to the first deformation unit 210. For convenience of explanation, hereinafter, the deformation of the first deformation unit 210 by temperature will be described.

The temperature of the first deformation unit **210** may be controlled by an electrical signal applied to the first deformation unit **210**. The electrical signal may be applied by the driving control unit **230**. The driving control unit **230** may include a voltage supply, a current supply, or a power supply to generate the electrical signal. The electrical signal may be a voltage signal or a current signal. For example, the temperature of the first deformation unit **210** may change according to a value of the voltage signal or the current signal that is applied to the first deformation unit **210**. In an example embodiment, the temperature of the first deformation unit **210** may be increased by applying a voltage to the first deformation unit **210** by the driving control unit **230**. When a voltage is not applied to the first deformation unit **210**, the temperature of the first deformation unit **210** may be reduced. As such, the driving unit **200** may apply heat to the first deformation unit **210** by using an electrical signal, so that the temperature of the first deformation unit **210** may change as a result of the supply of heat.

The bridge unit **220** may be arranged between the first deformation unit **210** and the image generation unit **100**. As depicted in FIGS. **3** and **4**, the bridge unit **220** may include a plate type member extending in a direction. The bridge unit **220** may include recess regions **220a**, **220b**, **220c**, and **220d** facing each other on both edges in an extending direction. The recess regions **220a**, **220b**, **220c**, and **220d** may be used to fixate the first deformation unit **210** at the edges of the bridge unit **220**, and may be also referred to as the term “depressions” or “grooves.”

The bridge unit **220** may have elasticity. The bridge unit **220** may be of an arch type by bending by the first deformation unit **210**. Edge units of the bridge unit **220** may be wound by the first deformation unit **210**. The first deformation unit **210** may be wound around the recess regions **220a**, **220b**, **220c**, and **220d** of the edge units of the bridge unit **220**. The recess regions **220a**, **220b**, **220c**, and **220d** may fix the first deformation unit **210** to the bridge unit **220**. Accordingly, locations of the first deformation unit **210** and the bridge unit **220** may be arranged. The degree of bending of the bridge unit **220** may vary according to the length change of the first deformation unit **210**. The term “degree of bending” may be also referred to as “degree of curve” or “degree of curvature.” When the length of the first deformation unit **210** is reduced, the degree of bending of the bridge unit **220** may be increased. Accordingly, a distance between the image generation unit **100** and the light combining unit **300** may be reduced. When the length of the first deformation unit **210** is increased, the degree of bending of the bridge unit **220** may be reduced. Accordingly, the distance between the image generation unit **100** and the light combining unit **300** may be increased.

The light combining unit **300** may combine a virtual image with an actual image. The light combining unit **300** may include a light combining element **310** and a light focusing element **320**. The light focusing element **320** may reflect and focus virtual image light incident to the light focusing element **320**. For example, the light focusing element **320** may include a concave mirror, a convex lens, or a combination of the concave mirror and the convex lens. When the light focusing element **320** includes a convex lens, the light focusing element **320** may be disposed between the light combining element **310** and the image generation unit **100**. For convenience of explanation, hereinafter, a case that the light focusing element **320** includes a concave lens will be described.

The image generation unit **100** may be arranged between the light focusing element **320** and a focal point of the light

focusing element **320**. Accordingly, a virtual image with respect to an image generated by the image generation unit **100** may be formed.

The light combining element **310** may reflect a portion of light incident to the light combining element **310** and may transmit the other portion thereof. For example, the light combining element **310** may include a cube beam splitter or a plate beam splitter. For convenience of explanation, it is depicted as that the light combining element **310** includes a cube beam splitter.

Various optical elements may further be disposed between the image generation unit **100** and the light combining unit **300**. For example, optical elements for controlling a length of a light path may be disposed between the image generation unit **100** and the light combining unit **300**.

FIGS. **5** and **6** are conceptual drawings for explaining an operation of a see-through display device **11** of FIG. **2**. For convenience of explanation, descriptions substantially identical to the descriptions made with reference to FIGS. **2** through **4** may be omitted.

In FIG. **5**, the driving control unit **230** may not apply a voltage or a current to the first deformation unit **210**, whereas the driving control unit **230** in FIG. **6** may apply a voltage or current to the first deformation unit **210**.

With reference to FIG. **5**, the image generation unit **100** may be spaced apart from the light combining element **310** as much as a distance  $Y_1$ . The image generation unit **100** may emit virtual image light. The virtual image light may transmit through the light combining element **310**. A portion of the virtual image light may be reflected by the light combining element **310**. The virtual image light that is transmitted through the light combining element **310** may reach the light focusing element **320**.

The light focusing element **320** may generate reflected light by reflecting the virtual image light. The reflected light may be virtual image light reflected by the light focusing element **320**. The reflected light may be reflected by the light combining element **310** and may be focused on the eyes of a user **500** of the see-through display device **11**. Accordingly, the user **500** may observe a virtual image generated by the image generation unit **100**. Although not shown, a portion of the reflected light may transmit through the light combining element **310**.

The image generation unit **100** may be arranged between the light focusing element **320** and a focal point of the light focusing element **320**. Accordingly, the light combining unit **300** may form a virtual image **400**. The virtual image **400** may be spaced apart from the light combining element **310** as much as a distance  $X_1$ .

Referring to FIG. **6**, a temperature of the first deformation unit **210** may be increased by applying a voltage to the first deformation unit **210**. The voltage may be applied by the driving control unit **230**. Accordingly, a length of the first deformation unit **210** may be reduced. The degree of length change of the first deformation unit **210** may be controlled by controlling the temperature of the first deformation unit **210**.

The degree of bending of the bridge unit **220** may be increased. The bridge unit **220** may dispose the image generation unit **100** closer to the light combining unit **300** by pushing the image generation unit **100** toward the light combining element **310**. The image generation unit **100** and the light combining element **310** may be spaced apart as much as a distance  $Y_2$ , which is less than the distance  $Y_1$ .

The virtual image **400** may move away from the light combining unit **300**. The virtual image **400** may be spaced apart from the light combining element **310** as much as a

distance  $X_2$ , which is greater than the distance  $X_1$ . In other words, the virtual image **400** in FIG. **6** may be projected at a position further far away from the light combining element **310**, compared to the virtual image **400** in FIG. **5**.

Once the driving control unit **230** stops applying a voltage to the first deformation unit **210**, the temperature of the first deformation unit **210** may be reduced. The length of the first deformation unit **210** may be re-increased to the length as shown in FIG. **5**. The degree of bending of the bridge unit **220** may be reduced. The image generation unit **100** may be moved away from the light combining unit **300**. For example, the image generation unit **100** may move towards the light combining element **310** by a distance  $Y_1$  from the light combining element **310**. The virtual image **400** may be closer to the light combining unit **300**. For example, the virtual image **400** and the light combining element **310** may be closer to each other by the distance  $X_1$ .

The present disclosure may provide the see-through display device **11** configured to control a location of the virtual image **400**. The location of the virtual image **400** may be continuously changed.

The present disclosure may provide the see-through display device **11** in which the driving unit **200** that moves the location of the image generation unit **100** is miniaturized and lightweight

FIGS. **7** and **8** are conceptual drawings for explaining operations of a see-through display device **12** according to another example embodiment. For convenience of explanation, descriptions substantially identical to the descriptions made with reference to FIG. **2** will be omitted.

Referring to FIG. **7**, the see-through display device **12** including an image generation unit **100**, a driving unit **200**, and a light combining unit **300** may be provided. The image generation unit **100** and the light combining unit **300** may be substantially identical to the image generation unit **100** and the light combining unit **300** described with reference to FIG. **2**.

The driving unit **200** may control of a location of the image generation unit **100**. The driving unit **200** may include second deformation units **212**, a supporting unit **240**, and a driving control unit **230**. Each of the second deformation units **212** may be substantially the same as the first deformation unit **210** described with reference to FIG. **2** except for locations and a shape of the second deformation units **212**.

The second deformation units **212** may be arranged between the supporting unit **240** and the image generation unit **100**. Edge units of each of the second deformation units **212** may contact the supporting unit **240** and the image generation unit **100**, respectively. A pair of the second deformation units **212** are depicted in FIG. **7**, but it is an example. In some other embodiments, a single deformation unit **212** or more than three second deformation units **212** may be provided.

The driving control unit **230** is electrically connected to the second deformation units **212** and may apply an electrical signal to the second deformation units **212**. For example, the driving control unit **230** may apply a voltage or a current to the second deformation units **212**.

The driving control unit **230** of FIG. **7** may not apply an electrical signal to the second deformation units **212**. The image generation unit **100** may be spaced apart from the light combining element **310** as much as a distance  $Y_1$ . The image generation unit **100** may emit virtual image light. As described with reference to FIGS. **5** and **6**, the light combining unit **300** may form a virtual image **400**. The virtual

image **400** may be spaced apart from the light combining element **310** as much as a distance  $X_1$ .

Referring to FIG. **8**, a temperature of the second deformation units **212** may be increased by applying an electrical signal to the second deformation units **212**. For example, the electrical signal may be a voltage signal or a current signal. The voltage signal may be applied by the driving control unit **230**. A length of each of the second deformation units **212** may be reduced. The image generation unit **100** may move away from the light combining element **310**. The image generation unit **100** and the light combining element **310** may be spaced apart as much as a distance  $Y_2$ , which is greater than the distance  $Y_1$ . The degree of length change of each of the second deformation units **212** may be controlled by controlling the temperature of the second deformation units **212**.

The virtual image **400** may move closer to the light combining unit **300**. The virtual image **400** and the light combining element **310** may be spaced apart from each other as much as a distance  $X_2$ , which is less than the distance  $X_1$ .

Once the driving control unit **230** stops applying a voltage or current signal to the second deformation units **212**, the temperature of the second deformation units **212** may be reduced, and the shape of second deformation units **212** and the location of the image generation unit **100** in FIG. **8** may return to the shape and the location as shown in FIG. **7**. Specifically, a length of the second deformation units **212** may be re-increased. The image generation unit **100** may move closer to the light combining unit **300**. For example, the image generation unit **100** may move from the light combining element **310** as much as the distance  $Y_1$ . The virtual image **400** may move away from the light combining unit **300**. For example, the virtual image **400** and the light combining element **310** may be spaced apart from each other by the distance  $X_1$ .

The present disclosure may provide the see-through display device **12** configured to control a location of the virtual image **400**. The location of the virtual image **400** may be continuously changed.

The present disclosure may provide the see-through display device **12** in which the driving unit **200** that moves the location of the image generation unit **100** is miniaturized and lightweight.

FIGS. **9** and **10** are conceptual drawings for explaining an operation of a see-through display device **13** according to another example embodiment. For convenience of explanation, descriptions substantially identical to the descriptions made with reference to FIGS. **7** and **8** will be omitted.

Referring to FIG. **9**, the see-through display device **13** including an image generation unit **100**, a driving unit **200**, and a light combining unit **300** may be provided. The image generation unit **100** and the light combining unit **300** may be substantially the same as the image generation unit **100** and the light combining unit **300** described with reference to FIGS. **7** and **8**.

The driving unit **200** may control a location of the image generation unit **100**. The driving unit **200** may include second deformation units **212**, a supporting unit **240**, and first restoration units **252**, and a driving control unit **230**. The second deformation units **212**, the supporting unit **240**, and the driving control unit **230** may be substantially the same as the second deformation units **212**, the supporting unit **240**, and the driving control unit **230** described with reference to FIGS. **7** and **8**.

The first restoration units **252** may be provided between the supporting unit **240** and the image generation unit **100**. The first restoration units **252** may extend towards the image

generation unit **100** from the supporting unit **240**. The first restoration units **252** may extend to cross each other. Edge units of each of the first restoration units **252** respectively may contact the supporting unit **240** and the image generation unit **100**. The first restoration units **252** may have elasticity. For example, each of the first restoration units **252** may include a bar including carbon. When the first restoration units **252** are bent, the first restoration units **252** may have restoration force to be restored to a state before bending.

The driving control unit **230** of FIG. 9 may not apply an electrical signal to the second deformation units **212**. The image generation unit **100** may be spaced apart from the light combining element **310** as much as the distance  $Y_1$ . A virtual image **400** may be spaced apart from the light combining element **310** as much as the distance  $X_1$ .

Referring to FIG. 10, a temperature of the second deformation units **212** may be increased by applying an electrical signal to the second deformation units **212**. For example, the electrical signal may be a voltage signal. The voltage signal may be applied by the driving control unit **230**. A length of each of the second deformation units **212** may be reduced. The image generation unit **100** may move away from the light combining element **310**. The image generation unit **100** and the light combining element **310** may be spaced apart from each other as much as a distance  $Y_2$ , which is greater than the distance  $Y_1$ . The degree of length change of each of the second deformation units **212** may be controlled by controlling the temperature of the second deformation units **212**.

The virtual image **400** may be closer to the light combining unit **300**. The virtual image **400** and the light combining element **310** may be spaced apart from each other as much as a distance  $X_2$ , which is less than the distance  $X_1$ .

The first restoration units **252** may be bent by the image generation unit **100** and the supporting unit **240**. Accordingly, the first restoration units **252** may have a restoration force. The restoration force may act in a direction of increasing a distance between the image generation unit **100** and the supporting unit **240**.

Once the driving control unit **230** stops applying a voltage or current signal to the second deformation units **212**, the temperature of the second deformation units **212** is reduced and the length of the second deformation units **212** may be re-increased to return back to the state as shown in FIG. 9. Accordingly, the image generation unit **100** may be located closer to the light combining unit **300**. For example, the image generation unit **100** may move towards the light combining element **310** by a distance  $Y_1$  from the light combining element **310**. The virtual image **400** may move away from the light combining unit **300**. For example, the distance from the virtual image **400** to the light combining element **310** may be increased to the distance  $X_1$ .

The present disclosure may provide the see-through display device **13** configured to control a location of the virtual image **400**. The location of the virtual image **400** may be continuously changed.

The present disclosure may provide the see-through display device **13** in which the driving unit **200** that moves the location of the image generation unit **100** is miniaturized and lightweight.

FIGS. 11 and 12 are conceptual drawings for explaining an operation of a see-through display device **14** according to example embodiments. For convenience of explanation, descriptions substantially identical to the descriptions made with reference to FIGS. 7 and 8 will be omitted.

Referring to FIG. 11, the see-through display device **14** including an image generation unit **100**, a driving unit **200**, and a light combining unit **300** may be provided. The image generation unit **100** and the light combining unit **300** are substantially the same as the image generation unit **100** and the light combining unit **300** described with reference to FIGS. 7 and 8.

The driving unit **200** may control a location of the image generation unit **100**. The driving unit **200** may include second deformation units **212**, a supporting unit **240**, second restoration units **254**, and a driving control unit **230**. The second deformation units **212**, the supporting unit **240**, and the driving control unit **230** are substantially the same as the second deformation units **212**, the supporting unit **240**, and the driving control unit **230** described with reference to FIGS. 7 and 8.

The second restoration units **254** may be arranged between the supporting unit **240** and the image generation unit **100**. The second restoration units **254** may include torsion springs. When the second restoration units **254** are distorted, the second restoration units **254** may have restoration force to be restored to a state before distortion. Edge units of each of the second restoration units **254** may contact the supporting unit **240** and the image generation unit **100**, respectively.

The driving control unit **230** of FIG. 11 may not apply an electrical signal to the second deformation units **212**. The image generation unit **100** may be spaced apart from the light combining element **310** as much as the distance  $Y_1$ . The virtual image **400** may be spaced apart from each other as much as the distance  $X_1$ .

Referring to FIG. 12, a temperature of the second deformation units **212** may be increased by applying an electrical signal to the second deformation units **212**. For example, the electrical signal may be a voltage signal. The voltage signal may be applied by the driving control unit **230**. A length of each of the second deformation units **212** may be reduced. The image generation unit **100** may move away from the light combining element **310**. The image generation unit **100** and the light combining element **310** may be spaced apart as much as a distance  $Y_2$  which is greater than the distance  $Y_1$ . The degree of length change of each of the second deformation units **212** may be controlled by controlling the temperature of the second deformation units **212**.

The virtual image **400** may move closer to the light combining unit **300**. The virtual image **400** and the light combining element **310** may be spaced apart from each other as much as a distance  $X_2$ , which is less than the distance  $X_1$ .

When the image generation unit **100** and the supporting unit **240** are closer to each other, the second restoration units **254** may be twisted. Accordingly, the second restoration units **254** may have a restoration force to be returned to an initial state. The restoration force may act in a direction of increasing the distance between the image generation unit **100** and the supporting unit **240**.

Once the driving control unit **230** stops applying a voltage/current to the second deformation units **212**, the temperature of the second deformation units **212** is reduced and the length of the second deformation units **212** may be increased to return back to the state as shown in FIG. 11. The image generation unit **100** and the light combining unit **300** may be closer to each other. For example, the image generation unit **100** may move towards the light combining element **310** by a distance  $Y_1$  from the light combining element **310**. The virtual image **400** may be spaced apart from the light combining unit **300**. For example, the virtual

11

image 400 may be spaced apart from the light combining element 310 by a distance  $X_1$ .

The present disclosure may provide the see-through display device 14 configured to control a location of the virtual image 400. The location of the virtual image 400 may be continuously changed.

The present disclosure may provide the see-through display device 14 in which the driving unit 200 that moves the location of the image generation unit 100 is miniaturized and lightweight.

The present disclosure provides a miniaturized and lightweight see-through display device.

The present disclosure provides a see-through display device configured to continuously change a focal distance.

The foregoing exemplary embodiments are merely exemplary and are not to be construed as limiting. The present teaching can be readily applied to other types of apparatuses. Also, the description of the exemplary embodiments is intended to be illustrative, and not to limit the scope of the claims, and many alternatives, modifications, and variations will be apparent to those skilled in the art.

What is claimed is:

- 1. A see-through display device comprising:
  - an image generation unit that comprises a light source and is configured to emit a virtual image light;
  - a light combining unit that comprises a mirror and a beam splitter and is configured to combine the virtual image light with an actual image light; and
  - a driver comprising:
    - a supporting unit; and
    - a deformation unit disposed between the supporting unit and the image generation unit and configured to

12

move the image generation unit closer to the light combining unit as a length of the deformation unit increases.

wherein the driver is configured to control a distance between the image generation unit and the light combining unit through the deformation unit and the supporting unit.

2. The see-through display device of claim 1, wherein the driver further comprises a driving controller configured to control the deformation unit, and the driving controller controls the length of the deformation unit by applying an electrical signal to the deformation unit.

3. The see-through display device of claim 2, wherein the length of the deformation unit is changed according to a temperature of the deformation unit, and the temperature of the deformation unit is controlled by the electrical signal.

4. The see-through display device of claim 1, further comprising a restoration unit provided between the supporting unit and the image generation unit, and the restoration unit has a characteristic of returning to an initial state when the restoration unit is deformed.

5. The see-through display device of claim 4, wherein the restoration unit comprises a bar having elasticity, and both edges of the bar respectively contact the supporting unit and the image generation unit.

6. The see-through display device of claim 4, wherein the restoration unit comprises a torsion spring, and both edges of the torsion spring respectively contact the supporting unit and the image generation unit.

7. The see-through display device of claim 6, wherein the torsion spring is provided as a pair of torsion springs, and the pair of torsion springs face each other with the supporting unit and the image generation unit therebetween.

\* \* \* \* \*