

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 March 2006 (16.03.2006)

PCT

(10) International Publication Number
WO 2006/029174 A2

(51) International Patent Classification:
C25D 3/00 (2006.01)

(21) International Application Number:
PCT/US2005/031767

(22) International Filing Date:
8 September 2005 (08.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/608,395 8 September 2004 (08.09.2004) US

(71) Applicant (for all designated States except US): **UNIVERSITY OF WASHINGTON** [US/US]; 4311 11th Avenue NE, Suite 500, Seattle, WA 98105-4608 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TAYA, Minoru** [US/US]; 6825 93rd Avenue SE, Mercer Island, WA 98040 (US). **URUSHIYAMA, Yuta** [JP/JP]; 3-34-23 Minori Utunomiya, Tochigi, Tochigi (JP). **ZHAO, Ying** [CN/US]; 4142 12th Avenue NE #306, Seattle, WA 98105 (US).

(74) Agent: **KING, Michael**; Law Offices of Ronald M. Anderson, 600 108th Avenue NE, Suite 507, Bellevue, WA 98004 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ENERGY ABSORBENT MATERIAL

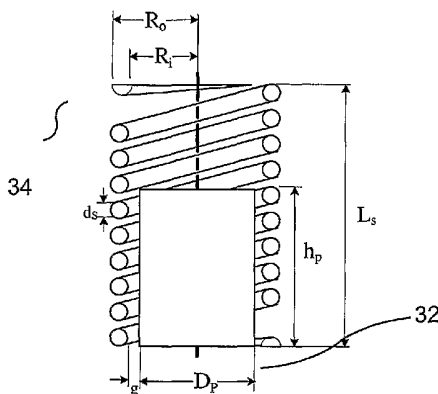

(57) Abstract: A method for making a ductile and porous shape memory alloy (SMA) using spark plasma sintering, and an energy absorbing structure including a ductile and porous SMA are disclosed. In an exemplary structure, an SMA spring encompasses a generally cylindrical energy absorbing material. The function of the SMA spring is to resist the bulging of the cylinder under large compressive loading, thereby increasing a buckling load that the cylindrical energy absorbing material can accommodate. The SMA spring also contributes to the resistance of the energy absorbing structure to an initial compressive loading. Preferably, the cylinder is formed of ductile, porous and super elastic SMA. A working prototype includes a NiTi spring, and a porous NiTi cylinder or rod.

ENERGY ABSORBENT MATERIAL

Background

Over the last two decades, shape memory alloys (SMA) have attracted great interest as materials that could be beneficially employed in a wide variety of applications, including aerospace applications, naval applications, automotive applications, and medical applications. NiTi alloy is one of the more frequently used SMAs, due to its large flow stress and shape memory effect strain. Recently, porous NiTi has been considered for incorporation into medical implants, and as a high energy absorption structural material. While the properties of porous NiTi are intriguing, fabrication of porous NiTi is challenging. One prior art technique for fabricating porous NiTi is based on a combustion synthesis. However, studies have indicated porous NiTi synthesized by this method is brittle. Another fabrication method that has been investigated involves powder sintering; however, studies have indicated that porous NiTi fabricated using powder sintering is also brittle, and lacks a stress plateau in the stress-strain curve. A self-propagating high temperature synthesis (SHS) is a further technique that can be used to produce porous NiTi; yet again, the porous NiTi fabricated using SHS is undesirably brittle. Still another technique disclosed in the prior art employs a hot isostatic press (HIP), which also yields a brittle porous NiTi.

It would be desirable to provide techniques for fabricating porous NiTi that exhibits a higher ductility, i.e., which is not brittle. It would further be desirable to provide a new energy absorbing structure based on the properties of porous SMA, such as NiTi.

Summary

In order to achieve a porous SMA exhibiting a higher ductility than available using prior art methods, a spark plasma sintering (SPS) method is disclosed herein. NiTi raw powders (preferably of super-elastic grade) are loaded into a graphite die and pressed to a desired pressure. A current is then induced through the die and stacked powder particles. The current activates the powder particles to a high energy

state, and neck formation easily occurs at relatively low temperatures, in a relatively short period of time, as compared with conventional sintering techniques (such as hot press, HIP or SHS techniques). Moreover, the spark discharge purifies the surface of the powder particles, which enhances neck formation, and the generation of high
5 quality sintered materials. Empirical studies have indicated that the SPS technique can achieve a porous NiTi exhibiting greater ductility than achievable using other methods disclosed in the prior art.

In at least one embodiment, the raw NiTi powder comprises 50.9 % nickel and 49.1 % titanium. While empirical studies have focused on using the SPS
10 technique with NiTi powders, it should be understood that the SPS technique disclosed herein can also be used to achieve high quality SMA alloys made from other materials.

The disclosure provided herein is further directed to an energy absorbing structure including a porous and ductile SMA. The energy absorbing structure
15 includes a super elastic grade SMA component, and a porous and ductile SMA portion. In at least one embodiment the porous and ductile SMA is NiTi. Significantly, the porosity of the porous and ductile SMA portion enables a relatively lightweight structure to be achieved, while the energy absorbing properties of the porous and ductile SMA portion enhance the energy absorbing capability of the
20 structure.

Such an energy absorbing structure can be achieved by combining a (preferably super elastic) NiTi spring with a porous and ductile NiTi bar or rod, such that the spring and bar are coaxial, with the spring encompassing the bar. The spring acts as a constraint to increase the bar's ability to accommodate a buckling load. This
25 arrangement enables the energy absorbing structure to exhibit a desirable force displacement relationship. During a modest initial loading, a majority of the load is carried by the spring, and the force displacement curve is generally linear. As the load increases, the load is shared by the spring and the bar, and the force displacement curve changes. During this portion of the loading, plastic deformation of the NiTi
30 takes place, and the force displacement curve is reversible. As a greater load is applied, the force displacement curve becomes irreversible. Thus, the energy absorbing structure can be reused after the application of relatively modest loads, but must be replaced after the application of greater loads.

Other embodiments of the energy absorbing structure include additional SMA
35 springs and additional porous SMA bars. The energy absorbing structure as disclosed

herein can be beneficially incorporated, for example, into airborne vehicles, ground vehicles, and seagoing vehicles, to reduce impact loading under a variety of circumstances. An additional application involves using energy absorbing structures generally consistent with those described above for ballistic protection for military vehicles, military personnel, and law enforcement personnel.

In one embodiment of an energy absorbing structure, as an SMA spring is compressed, a porous SMA element is exposed to a load, and as the porous SMA element is loaded, the porous SMA contacts the SMA spring. This configuration is substantially like a pillar with a side constraint. The function of the side constraint is to increase the buckling load that the porous SMA element can withstand. A plurality of such pillars can be used together to achieve a dampening mechanism for implementation in vehicles, for example, in energy absorbing automotive bumpers. The energy absorbing properties of such a structure can also be beneficially used in medical devices and in many other applications.

This Summary has been provided to introduce a few concepts in a simplified form that are further described in detail below in the Description. However, this Summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

Drawings

Various aspects and attendant advantages of one or more exemplary embodiments and modifications thereto will become more readily appreciated as the same becomes better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIGURE 1 schematically illustrates an SPS system;

FIGURE 2 is a flow chart showing exemplary steps to form a porous SMA using SPS;

FIGURE 3A is an image of the microstructure of a NiTi specimen exhibiting a 25% porosity;

FIGURE 3B is an image of the microstructure of a NiTi specimen exhibiting a 13% porosity;

FIGURE 3C is an image of a porous NiTi disk formed using SPS;

FIGURE 3D is an enlarged image of a portion of the porous NiTi disk of FIGURE 3C;

FIGURE 3E is an image of the porous NiTi disk of FIGURE 3C processed into desirable shapes using electro discharge machining (EDM);

FIGURE 4A graphically illustrates the compressive stress-strain curves of a dense NiTi specimen, the 25% NiTi specimen of FIGURE 3A, and the 13% NiTi specimen of FIGURE 3B, when tested at room temperature;

FIGURE 4B graphically illustrates the compressive stress-strain curves of a dense NiTi specimen and the 13% NiTi specimen of FIGURE 3B tested at temperatures greater than their austenite finish temperatures;

FIGURES 5A-5C are optical micrographs of samples of the 13% porosity NiTi specimen;

FIGURE 6A graphically illustrates an idealized compressive stress-strain curve, including a super elastic loop, for both dense NiTi and porous NiTi;

FIGURE 6B graphically illustrates a linearized compressive stress-strain curve (based on FIGURE 6A), including three distinct stages, for both dense NiTi and porous NiTi;

FIGURE 6C graphically compares the stress and strain curves for the dense NiTi and the 13% porous NiTi, and a stress and strain curve predicted using a model based on FIGURE 6B;

FIGURE 7A is an image of an energy absorbing structure that includes a porous NiTi rod, and a NiTi spring;

FIGURE 7B schematically illustrates an energy absorbing structure including a porous NiTi rod and a NiTi spring;

FIGURES 7C and 7D schematically illustrate dimensions for exemplary energy absorbing structures including a porous NiTi rod and a NiTi spring;

FIGURES 8A-8C schematically illustrate an energy absorbing structure in accord with those described herein under various loading conditions;

FIGURE 9A graphically illustrates a force displacement curve of a single porous NiTi rod;

FIGURE 9B graphically illustrates a force displacement curve of the exemplary energy absorbing structure of FIGURES 7A and 7B;

FIGURE 10A schematically illustrates an energy absorbing structure including a plurality of porous NiTi rods and NiTi springs; and

FIGURES 10B and 10C schematically illustrate an energy absorbing structure including a single porous NiTi rods and a plurality of NiTi springs.

Description

Figures and Disclosed Embodiments Are Not Limiting

Exemplary embodiments are illustrated in referenced Figures of the drawings. It is intended that the embodiments and Figures disclosed herein are to be considered illustrative rather than restrictive.

Overview

The disclosure provided herein encompasses a method for producing a ductile porous SMA using SPS, a model developed to predict the properties of a porous SMA, and an energy absorbing structure that includes a generally nonporous SMA portion and a porous SMA portion, to achieve a lightweight energy absorbing structure having desirable properties.

Production of a Ductile and Porous SMA Using SPS

One advantage of using SPS to generate a porous SMA is that strong bonding among super elastic grade SMA powders can be achieved relatively quickly (i.e., within about five minutes) using a relatively low sintering temperature, thereby minimizing the production of undesirable reaction products, which often are generated using conventional sintering techniques.

SPS uses a combination of heat, pressure, and pulses of electric current, and generally operates at lower temperatures than the conventional sintering techniques discussed above. The SPS method comprises three main mechanisms: (1) the application of uni-axial pressure; (2) the application of a pulsed voltage; and (3) the heating of the pressure die (generally a graphite die) and the sample. FIGURE 1 schematically illustrates an exemplary SPS system 10, including an upper electrode 12a, an upper punch 22a, a carbon die 14, a sample chamber 18, a thermocouple 16, a lower electrode 12b, a lower punch 22b, a vacuum chamber 20, and a power supply 24. SPS equipment is commercially available from several sources, such as Sumitomo Coal Mining Co. Ltd., Japan (the Dr. Sinter SPS-515S™, and the Dr. Sinter 2050™) and FCT System GmbH, Germany (the FCT – HP D 25/1™).

Significantly, the SPS technique has a short cycle time (e.g., cycle times of a few minutes are common), since the tool and components are directly heated by DC current pulses. The DC pulses also lead to an additional increase of the sintering activity with many materials, resulting from processes that occur on the points of contact of the powder particles (i.e., Joule heating, generation of plasma, electro

migration, etc.). Therefore, significantly lower temperatures, as well as significantly lower mold pressures, are required, compared to conventional sintering techniques.

FIGURE 2 is a flowchart 50 showing exemplary steps that can be carried out to produce a porous SMA component using SPS. In a step 52, a powdered SMA is loaded into the SPS system of FIGURE 1. In a step 54, the SPS system is used to sinter the powder employing a combination of pressure, electrical current, and heat (the heat is generally provided by the electrical current, but other heat sources can be used, as long as the thermal effects of the current are accounted for), generating a porous SMA disk. Exemplary processing conditions for NiTi powders are provided below in Table 1. While sintering dies often generate disks, it should be recognized that sintering dies (and the pressure die in the SPS system) can be configured to produce other shapes, thus, the present invention is not limited to the production of a single shape.

In a step 56, the porous SMA disk is processed into more desirable shapes. As described in greater detail below, SMA cylinders can be beneficially employed to produce an energy absorbing structure. Thus, step 56 indicates that the porous SMA disk is processed to generate a plurality of cylinders. Further, step 56 indicates that the processing is performed using EDM. However, it should be recognized that other shapes, and other processing techniques, can be used to produce a desired shape. In a step 58, the porous SMA cylinders are heat treated to ensure that the SMA cylinders are super elastic. An exemplary heat treatment for porous NiTi is to heat the components at about 300°C-320°C for about 30 minutes, followed by an ice water quench.

The method steps described in connection with FIGURE 2 are exemplary, and it should be understood that they can be modified as desired. For example, if the SPS die is configured to achieve the component shape desired, step 56 can be eliminated. Further, if super elastic grade components are not required, the heat treatment of step 58 can be eliminated.

Empirical Processing of NiTi Specimens Using SPS

Several different studies have been performed to validate the ability of SPS to achieve a ductile and porous SMA. In one study, an ingot of NiTi alloy (Ni (50.9 at. wt. %) and Ti (49.1 at. wt. %); provided by Sumitomo Metals, Osaka, Japan) was processed into powder form using plasma rotating electrode processing (PREP). The average diameter of the NiTi powders processed by PREP is about 150 μm . As noted above, one advantage of the SPS technique is to provide strong bonding among

super elastic grade powders (such as NiTi) while a relatively low sintering temperature is maintained for a relatively short time (such as 5 minutes), thus avoiding any undesired reaction products that would be produced by a conventional sintering method.

- 5 A summary of three types of specimens processed is provided in Table 1. Each specimen was subjected to the same heat treatment (320°C, 30 min, water quench) to convert them to super elastic grade. Their transformation temperatures were measured using a differential scanning calorimeter chart (Perkin-Elmer, DSC6™ model): A_s (austenite start), A_f (austenite finish), M_s (martensite start) and M_f (martensite finish).

Table 1. NiTi Specimens Processed by Spark Plasma Sintering

Sample	Porosity by volume	SPS Conditions	Transformation Temp. (°C)
Dense NiTi	0	850°C under 50 MPa, 5 min	$A_s = 23.88$, $A_f = 43.12$ $M_s = 36.05$, $M_f = 23.09$
13% porous NiTi	13%	800°C under 25 MPa, 5 min	$A_s = 19.3$, $A_f = 38.82$ $M_s = 20.65$, $M_f = 5.39$
25% porous NiTi	25%	750°C under 5 MPa, 5 min	$A_s = 14.59$, $A_f = 33.29$ $M_s = 23.24$, $M_f = 2.55$

- The porosity of the specimens was measured using the formula, $f_p = 1 - m/(\rho V)$, where V and m are respectively the volume and mass of the porous specimen. The density ρ is the density of NiTi (i.e., 6.4 g/cm³) as measured by the mass-density relationship $\rho = m_D/V_D$. The unit of ρ is g/cm³, and V_D and m_D are respectively the volume and mass of the dense NiTi specimen. The porous specimens exhibited a functionally graded microstructure, in that NiTi powders of smaller size are purposely distributed near the top and bottom surfaces while the larger sized NiTi powders are located in mid-thickness region, as indicated in FIGURE 3A (an image of the 25% porosity NiTi), and FIGURE 3B (an image of the 13% porosity NiTi). The 13% porosity NiTi specimen exhibited continuous NiTi phase throughout its thickness, with porosity centered at mid-plane (as indicated by an area 28), while in the 25% porosity specimen, porosity is distributed throughout the thickness, with less porosity towards the top and bottom surfaces ("top" and "bottom" being relative to the specimen as shown).

FIGURE 3C is an image of a porous NiTi disk fabricated using SPS, while FIGURE 3D is an enlarged image of a portion of the NiTi disk. FIGURE 3E shows how the disk was processed using EMD to form porous NiTi/SMA cylinders. The NiTi cylinders were tested as described below.

5 Two types of compressive tests were conducted (using an Instron tensile frame; model 8521™) to obtain the stress-strain curves of both the dense and the porous (25% and 13%) NiTi. Two different testing temperatures were used: (1) room temperature (22°C); and (2) a temperature 15–25°C higher than the austenite finish temperature (A_f) of the specimen. The porous specimens, with
10 porosities of 13% and 25%, and the dense specimen were each tested under a static compressive load (loading rate 10^{-5} s^{-1}). The results are graphically illustrated in FIGURE 4A. The 25% porosity NiTi specimen exhibits the lowest flow stress level and the least super elastic loop behavior, while both the 13% porosity NiTi specimen and the dense NiTi specimen clearly exhibit larger super elastic loops, and greater
15 ductility. The main reason for the better super elastic behavior of the 13% porosity NiTi specimen processed by SPS technique described above is the rather continuous connectivity between adjacent NiTi powders of super elastic grade in the high porosity region (mid-section). In the case of the 25% porosity NiTi specimen, such connectivity is not established in the mid-section(i.e., there is non-uniform
20 connectivity). In addition, the 25% porosity NiTi specimen appears to include clusters of NiTi powder particles, which at least in part have converted to undesirable brittle inter-metallics. Such conversion can occur due to hot spots in the NiTi powder during the SPS process. When stress is sufficiently large, the collapse of imperfect necking structures among large NiTi particles in the 25% porosity specimen leads to
25 the specimen exhibiting a relatively low strength, rather than the desired super elasticity. Based on the results of the compression testing, the 13% porosity specimen was selected for further testing.

FIGURES 5A-5C are optical micrographs of samples of the 13% porosity NiTi specimen. FIGURE 5A is an optical micrograph of a sample of the 13%
30 porosity NiTi specimen before the compression test. FIGURE 5B is an optical micrograph of a sample of the 13% porosity NiTi specimen after being loaded to

achieve a 5% compression, and subsequent unloading. FIGURE 5C is an optical micrograph of a sample of the 13% porosity NiTi specimen after being loaded to achieve a 7% compression, and subsequent unloading. FIGURE 5B indicates that the 13% porosity NiTi remains super elastic when compressed to about 5%, because after
5 unloading, the material returns to the uncompressed configuration shown in FIGURE 5A. In contrast, FIGURE 5C indicates that the 13% porosity NiTi undergoes plastic deformation when compressed to about 7%. This behavior is due to the material being in the martensitic phase.

FIGURES 5A and 5B support the conclusion that the 13% porosity NiTi
10 specimen processed as described above (SPS followed by heat treatment) deforms super elastically, contributing to its high ductility. On the other hand, the microstructure of the 25% porosity sample exhibits a markedly different microstructure, which appears to explain why the compressive stress-strain curve of the 25% porosity NiTi exhibits a much lower flow stress.

15 As noted above, compression testing was performed both at room temperature, and at a temperature greater than the austenite finish temperature of the material. FIGURE 4B graphically illustrates the compressive stress-strain curves of the 13% porosity NiTi specimen and the dense NiTi specimen. The compressive stress-strain curves tested at $T > A_f$ more clearly exhibit a super elastic loop at higher
20 flow stress level when compared to the compressive stress-strain curves tested at room temperature (FIGURE 4A). This result is due to the fact that NiTi exhibits super elastic behavior at higher flow stress levels, at higher temperatures.

Modeling of the Compressive Stress-Strain Curves of Porous NiTi

In order to optimally design the microstructure and properties of porous
25 SMAs, it is important to develop a simple, yet accurate model to describe the microstructure and mechanical behavior relationships of porous SMAs. If a porous NiTi is treated as a special case of a particle-reinforced composite, a micromechanical model can be applied that is based on Eshelby's method with the Mori-Tanaka mean-field (MT) theory and the self-consistent method. Both methods have been used to
30 model macroscopic behavior of composites with SMA fibers. Young's modulus of a porous material was modeled by using the Eshelby's method with MT theory.

Eshelby's equivalent inclusion method combined with the Mori-Tanaka mean-field theory can thus be used to predict the stress-strain curve of a porous NiTi under compression, while accounting for the super elastic deformation corresponding to the second stage of the stress-strain curve. The predicted stress-strain curve can be compared with the experimental data of the porous NiTi specimen processed by SPS.

The model assumes a piecewise linear stress-strain curve of super elastic NiTi. FIGURE 6A graphically illustrates an idealized compressive stress-strain curve, including a super elastic loop, for both dense NiTi and porous NiTi. FIGURE 6B graphically illustrates a linearized compressive stress-strain curve (based on FIGURE 6A), including three distinct stages, for both dense NiTi and porous NiTi. FIGURE 6C graphically illustrates stress and strain curves for the dense NiTi and the porous NiTi, and a stress and strain curve predicted using the model described in detail below.

Referring to the idealized stress-strain curve of FIGURE 6B, a first linear part, A_iB_i , corresponds to the elastic loading of the 100% austenite phase. A second linear part, B_iD_i , corresponds to the stress-induced martensite transformation plateau. D_id_i corresponds to the unloading of the 100% martensite phase, and d_ib_i corresponds to the reverse transformation lower plateau. A final linear part is b_iA_i , which corresponds to the elastic unloading of the 100% austenite phase. The subscript "i" in FIGURE 6B denotes both dense ($i = D$) and porous NiTi ($i = P$), since the idealized curve applies to both cases.

The stress-strain curve of FIGURE 6A includes both a loading curve and an unloading curve, which collectively generate the characteristic super elastic loop. Models for the loading curve and unloading curve are discussed below.

With respect to a model for the loading curve, the compressive stress-strain curve of the 13% porosity specimen of FIGURE 4B exhibits three stages (as indicated in FIGURE 6B and as discussed above): first stage A_iB_i (the 100% austenite phase); second stage B_iD_i (the upper plateau, corresponding to the stress-induced martensite phase); and third stage D_id_i (the 100% martensite phase). Although the compressive stress-strain curves for these three stages shown in FIGURE 4B do not completely correspond to the linear stages shown in FIGURE 6B, for the purposes of modeling the loading curve for the 13% porosity specimen of NiTi, it can be assumed that each stage is linear. Using that assumption, a simple model of the three piecewise linear stages can be based on Eshelby's effective medium model and the Mori-Tanaka mean-field theory. The slopes of the linearized

first, second, and third stages of the 13% porous NiTi specimen are respectively defined as E_{M_s} , E_T , and E_{M_f} , where the subscripts M_s , T , and M_f respectively denote the first stage with the martensite phase start (equivalent to the 100% austenite phase), the second stage linearized slopes with tangent modulus, and the third stage with the martensite finish (i.e., the 100% martensite phase). The stresses at the transition between the first and second stages and between the second and third stages are denoted by $\sigma_{M_s}^P$ and $\sigma_{M_f}^P$, respectively, where the superscript 'P' denotes the porous NiTi. Therefore, the calculation of the moduli E_{M_s} , E_T , and E_{M_f} , as well as the martensitic transformation start stress, $\sigma_{M_s}^P$, and the martensitic transformation finish stress, $\sigma_{M_f}^P$, are the keys to this model.

Note that with respect to the model for the unloading portion of the stress-strain curve discussed below, no uniform strain and stress in the matrix NiTi is assumed. With respect to determining critical stresses, note that the start and finish martensitic transformation stresses $\sigma_{M_s}^P$ and $\sigma_{M_f}^P$ can be obtained using the relationships in Eq. (1a) and Eq. (1b), which follow:

$$\sigma_{M_s}^P = (1 - f_p) \sigma_{M_s}^D, \quad (1a)$$

$$\sigma_{M_f}^P = (1 - f_p) \sigma_{M_f}^D, \quad (1b)$$

where $\sigma_{M_s}^D$ and $\sigma_{M_f}^D$ are respectively, the start and finish martensitic transformation stresses that are averaged in the matrix domain.

To determine the stiffness of the first and third stages, a formula based on Eshelby's model and the Mori-Tanaka mean-field theory can be used to calculate the Young's modulus of a porous material, as follows:

$$\frac{E^P}{E^D} = \frac{1}{1 + \eta f_p}, \quad (2)$$

where for spherical pores, η is given by

$$\eta = \frac{15}{7(1 - f_p)}, \quad (3)$$

A brief derivation of Eqs. (2) and (3) is provided in Appendix A.

Determination of the stiffness of the second stage can be obtained as follows. The Young's modulus (E) of a NiTi with transformation ε_T is estimated by:

$$E(\varepsilon_T) = E_A + \frac{\varepsilon_T}{\bar{\varepsilon}} (E_M - E_A), \quad (4)$$

where E_A and E_M are respectively the Young's modulus of the 100% austenite and the 100% martensite phase, and $\bar{\varepsilon}$ is the maximum transformation strain, which can be obtained using the following relationship:

$$\bar{\varepsilon} = \varepsilon_{M_f} - \frac{\sigma_{M_f}}{E_M}, \quad (5)$$

Eq. (4) is valid for both the dense and the porous NiTi (13%); thus, Eqs. (4) and (5) can be rewritten as follows:

$$E^i = E_A^i - \frac{E_A^i - E_M^i}{\varepsilon_{M_f}^i - \sigma_{M_f}^i / E_M^i} \varepsilon_T, \quad (6)$$

where the superscript 'i' denotes i = D (dense) or P (porous). In order to obtain the slope of the linearized second stage of the compressive stress-strain curve of a porous NiTi, the equivalency of the strain energy density must be considered. However, in the case of the second stage, the macroscopic strain energy density of porous NiTi should be evaluated from the trapezoidal area of FIGURE 6B, i.e., the trapezoid $B_i C_i F_i H_i$, where i = P for an arbitrary transformation strain ε_T^P . Therefore, the macroscopic strain energy density of porous NiTi with ε_T^P calculated graphically from FIGURE 6C is given by:

$$W = \frac{1}{2} \left(\sigma_{M_s}^P + \sigma_0^P \right) \left(\varepsilon_T^P + \frac{\sigma_0^P}{E_{AM}} - \frac{\sigma_{M_s}^P}{E_{M_s}} \right), \quad (7)$$

where $\sigma_{M_s}^P$ is the start martensitic transformation stress of the porous NiTi material, σ_0^P is an applied stress, and ε_T^P is the strain corresponding to σ_0^P (see FIGURE 6B). Since there is no transformation strain in pores, the transformation strain for porous NiTi, ε_T^P , is the uniform transformation strain in the dense NiTi, ε_T^D . Thus,

$$\varepsilon_T^P = \varepsilon_T^D \equiv \varepsilon_T, \quad (8)$$

The macroscopic strain energy density determined above is set equal to the microscopic strain energy density, which is calculated using Eshelby's inhomogeneous inclusion method, such that:

$$W = \frac{1}{2} C_{ijkl}^{m-1} \sigma_{ij}^0 \sigma_{kl}^0 + \frac{1}{2} f_P \sigma_{ij}^0 \varepsilon_{kl}^*, \quad (9)$$

5 where the corresponding Eshelby's problem provides the solution for ε_{ij}^* as:

$$\varepsilon_{kl}^* = \varepsilon_{kl}^T - \frac{1}{1-f_P} (S_{klmn} - I)^{-1} C_{ijkl}^{m-1} \sigma_{ij}^0, \quad (10)$$

Substituting Eq. (10) into Eq. (9), the microscopic strain energy density, W , is given by:

$$W = \frac{1}{2} \sigma_{ij}^0 \varepsilon_{ij}^0 + \frac{1}{2} f_P \sigma_{ij}^0 \left[2\varepsilon_{ij}^T - \frac{1}{1-f_P} (S_{ijkl} - I)^{-1} \varepsilon_{kl}^0 \right], \quad (11)$$

10 Since the porous NiTi is subjected to uni-axial load (i.e., $\sigma_{ij}^0 = \{0, 0, \sigma_0^P, 0, 0, 0\}^T$, and $\varepsilon_{ij}^T = \{v\varepsilon_T, v\varepsilon_T - \varepsilon_T, 0, 0, 0\}^T$), and the pores are assumed to be spherical, Eq. (11) can be reduced to:

$$W = \frac{1}{2} \sigma_0^P \varepsilon_0 + \frac{1}{2} f_P \sigma_0^P \left[2\varepsilon_T + \frac{15}{7(1-f_P)} \varepsilon_0 \right], \quad (12)$$

15 where ε_0 is the macroscopic strain of the porous NiTi, and it is related to applied stress σ_0^P as:

$$\varepsilon_0 = \frac{\sigma_0^P}{E_{AM}}, \quad (13)$$

Substituting Eq. (13) into Eq. (12), the microscopic strain energy density W of the porous NiTi is finally reduced to:

$$W = \frac{1}{2} \frac{(\sigma_0^P)^2}{E_{AM}} + \frac{1}{2} f_P \sigma_0^P \left[2\varepsilon_T^P - \frac{15}{7(1-f_P)} \frac{\sigma_0^P}{E_{AM}} \right], \quad (14)$$

20 where E_{AM} is the Young's modulus of dense (matrix) NiTi with ε_T .

By equating the macroscopic strain energy density of Eq. (7) to the microscopic strain energy density of Eq. (14), and using Eq. (6) with $i = P$, an algebraic equation of second-order in terms of ε_T is obtained, as follows:

$$A(\varepsilon_T)^2 + B\varepsilon_T + C = 0, \quad (15)$$

where

$$A = \frac{(\gamma\sigma_0^P + \sigma_{M_s}^P)(1-\beta)}{\varepsilon_{M_s}},$$

$$B = \gamma\sigma_0^P + \sigma_{M_s}^P + \frac{\sigma_{M_s}^P(1-\beta)(\sigma_{M_s}^P + \sigma_0^P)}{E_{M_s}\varepsilon_{M_f}},$$

$$C = \frac{(1-\alpha)(\sigma_0^P)^2 - (\sigma_{M_s}^P)^2}{E_{M_s}} \quad (16)$$

and

$$\alpha = 1 - \frac{f_p}{1-f_p}(S_{3333}-1)^{-1}, \beta = \frac{E_{M_f}}{E_{M_s}}, \gamma = 1 - 2f_p,$$

Solving for ε_T^P , which corresponds to the second kink point, D_P of FIGURE 6B (i.e., see D_i), the following is obtained:

$$\varepsilon_T = \frac{-B + \sqrt{B^2 - 4AC}}{2A}, \quad (17)$$

The tangent modulus of the porous NiTi is the slope of the second portion of the stress-strain curve shown in FIGURE 6B, thus, E_T can be expressed in terms of transformation strain and the stresses:

$$E_T = \frac{\sigma_0^P - \sigma_{M_s}^P}{\varepsilon_T}, \quad (18)$$

Referring now to the unloading curve portion of the idealized stress-strain curve of FIGURE 6B, note that during unloading, the porous NiTi material undergoes transformation (from the martensite phase to the austenite phase).

Before the applied stress reaches the critical value $\sigma_{A_s}^P$, the matrix of the NiTi remains in a 100% martensite phase (the first stage of the unloading stress-strain curve in the modeling curve).

When the applied stress is decreased to $\sigma_{A_s}^P$, reverse transformation begins. The reverse transformation finishes when the stress reaches another critical value, $\sigma_{A_f}^P$, thereafter the porous NiTi material remains 100% austenite.

Therefore, the slopes of the first and third stages of the unloading curve are the Young's moduli of the 100% martensite and the 100% austenite phase, respectively. The slope of the second stage is the same as that of the loading curve. Therefore, the Young's moduli of the unloading curve are related to those of the loading curve as:

$$E_{A_s} = E_{M_f}, \quad (18a)$$

$$E_T^u = E_T, \quad (18b)$$

$$E_{A_f} = E_{M_s}, \quad (18c)$$

where ε_T^u is the slope of the second stage of the unloading curve. The superscript 'u' denotes unloading, and the components without superscripts are the slopes of loading curve.

The start and finish austenite transformation stresses of porous NiTi, $\sigma_{A_s}^P$ and $\sigma_{A_f}^P$ are related to the corresponding stresses of the dense NiTi:

$$\sigma_{A_s}^P = (1 - f_P) \sigma_{A_s}^D, \quad (19a)$$

$$\sigma_{A_f}^P = (1 - f_P) \sigma_{A_f}^D, \quad (19b)$$

where $\sigma_{A_s}^D$ and $\sigma_{A_f}^D$ are respectively the start and finish austenite transformation stresses of the dense NiTi. First, it is assumed that the dense NiTi matrix is isotropic, with a Poisson's ratio $\nu^A = \nu^M = 0.33$. Input data measured from the idealized compressive stress-strain curve of FIGURE 4B are shown in Table 2.

Table 2. Input Data

$\sigma_{M_s}^D$ (MPa)	$\sigma_{M_f}^D$ (MPa)	$\sigma_{A_f}^D$ (MPa)	E_A (GPa)	E_M	ε_{M_s}	ε_{M_f}
400	720	300	75	31	0.004	0.032

In the empirical testing of the porous and solid NiTi specimens discussed above, SPS was used to generate porous NiTi exhibiting two different porosities, 13%

and 25%. The 13% porosity NiTi appears to possess a desirable microstructure with a high ductility, while the 25% porosity NiTi specimens exhibits a much lower stress flow than that of the 13% porosity. The piecewise linear stress-strain curve model of the compressive stress-strain curve of the 13% porosity NiTi discussed above predicts the flow stress level of the experimental stress-strain curve reasonably well.

An Energy Absorbing Structure Incorporating Porous NiTi

Having successfully fabricated a porous SMA having good ductility using SPS (the 13% porosity NiTi discussed in detail above), an energy absorbing structure incorporating a porous, ductile and super elastic SMA was designed. The energy absorbing structure includes an SMA member and a porous SMA member.

FIGURE 7A is an image of an exemplary energy absorbing structure, including a porous NiTi cylinder 32 and a NiTi spring 34. FIGURE 7B schematically illustrates an exemplary configuration, while FIGURES 7C and 7D provide details of exemplary dimensions (although it should be understood that such dimensions are not intended to be limiting). While NiTi represents an exemplary SMA for the spring element, and porous NiTi represents an exemplary porous SMA for the rod/cylinder element, it should also be apparent that the implementation of NiTi for either element is not intended to be limiting. Furthermore, while the spring/cylinder (or spring/rod) configuration is desirable, in that the spring provides a side constraint to increase the buckling load that can be applied to the rod/cylinder, other configurations in which a first SMA element provides a side constraint to a second SMA element can also be implemented. Thus, the SMA element providing a side constraint can be implemented in structural configurations not limited to spring 34, and the second SMA element (the element benefiting from the side constraint) can be implemented using structures other than a rod/cylinder.

The concept of the SMA composite structure of FIGURES 7A-7D is to provide a structure that behaves super-elastically for modest to intermediate impact loading (and is thus reusable for future impact loadings), and which also can adsorb larger loads, particularly after the porous cylinder swells horizontally, thus touching the outer spring. FIGURES 8A-8C schematically illustrate the exemplary energy absorbing structure under loading. In FIGURE 8A, an initial load is received by NiTi spring 34. In FIGURE 8B, the load has caused spring 34 to compress, and part of the load is now applied to cylinder 32 as well. In FIGURE 8C, additional loading causes cylinder 32 to deform, such that the walls of the cylinder touch the spring (which

provides a side constraint to the cylinder, increasing the buckling load that can be absorbed by the cylinder).

FIGURE 9A graphically illustrates a force displacement curve of a single porous NiTi rod, while FIGURE 9B graphically illustrates a force displacement curve of the exemplary energy absorbing structure of FIGURES 7A and 7B. Obviously, the energy absorbing structure of FIGURES 7A and 7B is able to support a larger force and displacement. For the porous NiTi rod, the spring plays a role as a constraint, and the porous NiTi rod and surrounding spring (i.e., the exemplary energy absorbing structure) exhibits a higher super elastic force, a higher fracture point and larger displacement than does the porous NiTi rod without the spring. On the other hand, the porous NiTi rod acts as a yoke for the spring, preventing it from asymmetric deformation (i.e., premature buckling) when subjected to large force.

The following discussion of FIGURES 9A and 9B relates to the energy absorbing (EA) capacity under reversible loading (i.e., super elastic loading) and irreversible loading (loading all the way to a fracture point) of selected specimens. For reversible loading, EA is defined as the area encompassed by the super elastic loop, while for irreversible loading, EA is defined as the area under the force-displacement curve up, to the fracture point marked in each Figure by an X. The two values of EA are divided by the mass of each specimen to calculate a specific EA. Key mechanical data (including specific EAs) are listed in Tables 3 and 4. The data (and FIGURES 3A and 3B) demonstrate the advantage of using the composite structure (i.e., the exemplary energy absorbing structure of FIGURES 7A and 7B) rather than employing a porous NiTi rod without a constraint, to cope with a wide range of compressive loads.

FIGURE 10A schematically illustrates an energy absorbing structure including a plurality of substructures 42, each substructure including a porous NiTi rod and a plurality of NiTi springs. FIGURES 10B and 10C provide details of the configuration of substructures 42.

**Table 3. Comparison of Experimental Data for
a Single Porous NiTi Rod and the Exemplary Energy Absorbing Structure**

	<i>Maximum Reversible Displacement</i>	<i>Maximum Reversible Force</i>	<i>Fracture Displacement</i>	<i>Fracture Force</i>	<i>Specific Energy Absorption</i>
Single Porous NiTi Rod	1.29mm	40.74KN	2.03mm	65.15KN	12.2MJ/Mg
Exemplary Structure	7.01mm	68.76KN	7.71mm	97.21KN	15.3MJ/Mg

Table 4. Comparison of the Specific EA of Various Materials

<i>Materials</i>	<i>AlCu₄ Foam</i>	<i>Al w/Si added</i>	<i>Al</i>	<i>13% porosity NiTi rod</i>	<i>Composite structure</i>
NRG Absorption (MJ/m ³)	5.2	4.2	20	68.3	141.5

In summary, the exemplary energy absorbing structure has a dual use as an efficient energy absorber, for both reversible low impact loadings and irreversible high impact loadings. It is noted also that the higher strain-rate impact loading, the higher the flow stress of NiTi becomes, which may be considered an additional advantage of using NiTi as a key energy absorbing material.

In yet another embodiment, the spring is made from conventional materials, and only the inner rod/cylinder is a SMA. The energy absorbing capability of such an embodiment has yet to be investigated.

Although the present invention has been described in connection with the preferred form of practicing it and modifications thereto, those of ordinary skill in the art will understand that many other modifications can be made to the present invention within the scope of the claims that follow. Accordingly, it is not intended that the scope of the invention in any way be limited by the above description, but instead be determined entirely by reference to the claims that follow.

Appendix A

The Eshelby's inhomogeneous inclusion problem with the Mori-Tanaka mean-field theory provides the total stress field is given by:

$$\begin{aligned}
 \sigma_{ij}^0 + \alpha_j &= C_{ijkl}^m [\varepsilon_{kl}^0 + \bar{\varepsilon}_{kl} + \varepsilon_{kl} - (\varepsilon_{kl}^* - \varepsilon_{kl}^T)] \\
 &= C_{ijkl}^m (\varepsilon_{kl}^0 + \bar{\varepsilon}_{kl} + \varepsilon_{kl} - \varepsilon_{kl}^{**}) \\
 &= C_{ijkl}^P (\varepsilon_{kl}^0 + \bar{\varepsilon}_{kl} + \varepsilon_{kl})
 \end{aligned} \tag{A1}$$

where C_{ijkl}^m and C_{ijkl}^P are respectively the elastic stiffness tensor of matrix and pores; σ_{ij} and ε_{kl} are respectively the stress disturbance and the strain disturbance due to the existence of pores; $\bar{\varepsilon}_{kl}$ is the average strain disturbance in the matrix due to the pores; and ε_{ij}^* is a fictitious eigen strain which has non-vanishing components. To facilitate solving Eshelby's formula, ε_{kl}^{**} , defined below in Eq. (A2), is introduced.

$$\varepsilon_{kl}^{**} = \varepsilon_{kl}^* - \varepsilon_{kl}^T, \tag{A2}$$

For the entire composite domain, the following relationship always holds:

$$\sigma_{ij}^0 = C_{ijkl}^m \varepsilon_{kl}^0, \tag{A3}$$

From Eshelby's equation, the strain disturbance is related to ε_{mn}^{**} as:

$$\varepsilon_{kl} = S_{klmn} \varepsilon_{mn}^{**}, \tag{A4}$$

The requirement that the integration of the stress disturbance over the entire body vanishes leads to:

$$\bar{\varepsilon}_{kl} = -f_p (S_{klmn} \varepsilon_{mn}^{**} - \varepsilon_{kl}^{**}). \tag{A5}$$

S_{klmn} is the Eshelby's tensor for pores derived in Appendix B (below). A substitution of Eqs. (A3), (A4), and (A5) into Eq. (A1), and use of $C_{ijkl}^P = 0$ (due to the pores) provides the following solution for ε_{kl}^{**} ,

$$\varepsilon_{kl}^{**} = -\frac{1}{1-f_p} (S_{klmn} - I)^{-1} C_{ijkl}^{-1} \sigma_{ij}^0. \tag{A6}$$

The equivalency of the strain energy density of the porous NiTi leads to:

$$\frac{\sigma_0^2}{2E^P} = \frac{\sigma_0^2}{2E^D} + \frac{f_p}{2} \sigma_0 \varepsilon_{33}^{**}, \quad (\text{A7})$$

where the applied stress σ_0 is assumed to be along x_3 -axis.

Appendix BEshelby's Tensor for Sphere Inclusion

$$S_{1111} = S_{2222} = S_{3333} = \frac{7-5\nu}{15(1-\nu)},$$

5

$$S_{1122} = S_{2233} = S_{3311} = S_{2211} = S_{3322} = \frac{5\nu-1}{15(1-\nu)},$$

$$S_{1212} = S_{2323} = S_{3131} = \frac{4-5\nu}{15(1-\nu)},$$

The invention in which an exclusive right is claimed is defined by the following:

1. A method for making a ductile, porous, and super elastic shape memory alloy (SMA), comprising the steps of:

- (a) providing an SMA in a powder form;
- (b) sintering the SMA in the powder form using a combination of heat, pressure, and electric current to obtain a ductile and porous SMA; and
- (c) heat treating the ductile and porous SMA to achieve the ductile, porous, and super elastic SMA.

2. The method of Claim 1, wherein the SMA includes nickel and titanium.

3. The method of Claim 1, wherein the step of sintering the SMA in the powder form using a combination of heat, pressure, and electric current comprises the step of using a spark plasma sintering device.

4. The method of Claim 1, wherein the step of sintering the SMA in the powder form using a combination of heat, pressure, and electric current employs the electric current for heating the SMA in the powder form.

5. The method of Claim 1, wherein the step of sintering the SMA in the powder form using a combination of heat, pressure, and electric current comprises the step of using values of the heat, pressure, and electric current selected to achieve a ductile and porous SMA having a porosity in the range from about 10% to about 20%.

6. The method of Claim 1, wherein the step of sintering the SMA in the powder form using a combination of heat, pressure, and electric current comprises the step of using values of the heat, pressure, and electric current selected to achieve a ductile and porous SMA having a porosity of about 13%.

7. The method of Claim 6, wherein the step of using the values of the heat, pressure, and electric current selected to achieve a ductile and porous SMA having a porosity of about 13% comprises the step of heating SMA in the powder form that comprises nickel and titanium at about 800°C for about 5 minutes under a pressure of about 5 MPa.

8. The method of Claim 2, wherein the step of heat treating the ductile and porous SMA to achieve the ductile, porous, and super elastic SMA comprises the step of:

- (a) heating the ductile and porous SMA to about 300-320°C for about 30 minutes; and
- (b) quenching the ductile and porous SMA with cold water.

9. An energy absorbing structure comprising a first shape memory alloy (SMA) member and a second SMA member, wherein the first SMA member is configured to constrain the second SMA member so as to increase a buckling load that the second SMA member can accommodate.

10. The energy absorbing structure of Claim 9, wherein the first SMA member and the second SMA member are coaxially aligned.

11. The energy absorbing structure of Claim 9, further comprising a plurality of first SMA members, each disposed to constrain the second SMA member.

12. The energy absorbing structure of Claim 9, wherein the first SMA member comprises a spring.

13. The energy absorbing structure of Claim 9, wherein the first SMA member comprises a helical spring having a plurality of coils, and wherein the second SMA member is encompassed by the coils of the helical spring.

14. The energy absorbing structure of Claim 13, wherein a gap between the second SMA member and the coils of the helical spring is selected such that when a load is applied to the second SMA member, deformation of the second SMA member causes the second SMA member to contact the coils of the helical spring.

15. The energy absorbing structure of Claim 9, wherein an initial load applied to the energy absorbing structure is borne by the first SMA member.

16. The energy absorbing structure of Claim 9, wherein deformation of the first SMA member under a load exposes the second SMA member to the load.

17. The energy absorbing structure of Claim 9, wherein deformation of the second SMA member under a load causes the second SMA member to contact the first SMA member.

18. The energy absorbing structure of Claim 9, wherein the first SMA member is configured to elastically deform under relatively smaller loads, and to constrain the second SMA member only under relatively larger loads.

19. The energy absorbing structure of Claim 9, wherein the second SMA member is ductile and porous.

20. The energy absorbing structure of Claim 9, wherein the first and second SMA members are super elastic.



21. The energy absorbing structure of Claim 9, wherein the first and second SMA members comprise an alloy that includes nickel and titanium.






22. An energy absorbing structure comprising a first member and a second member, wherein the first member is configured to constrain the second member, to increase a buckling load that the second member can accommodate, and wherein the second member comprises a ductile and porous shape memory alloy (SMA).

23. The energy absorbing structure of Claim 22, wherein the second member comprises a super elastic alloy that includes nickel and titanium.

24. An energy absorbing structure comprising:
(a) a non porous shape memory alloy (SMA) member; and
(b) a porous SMA member.

25. The energy absorbing structure of Claim 24, wherein the non porous SMA member is configured to elastically deform under relatively smaller loads, and to constrain the porous SMA member under relatively larger loads, so as to increase a buckling load that the porous SMA member can accommodate.

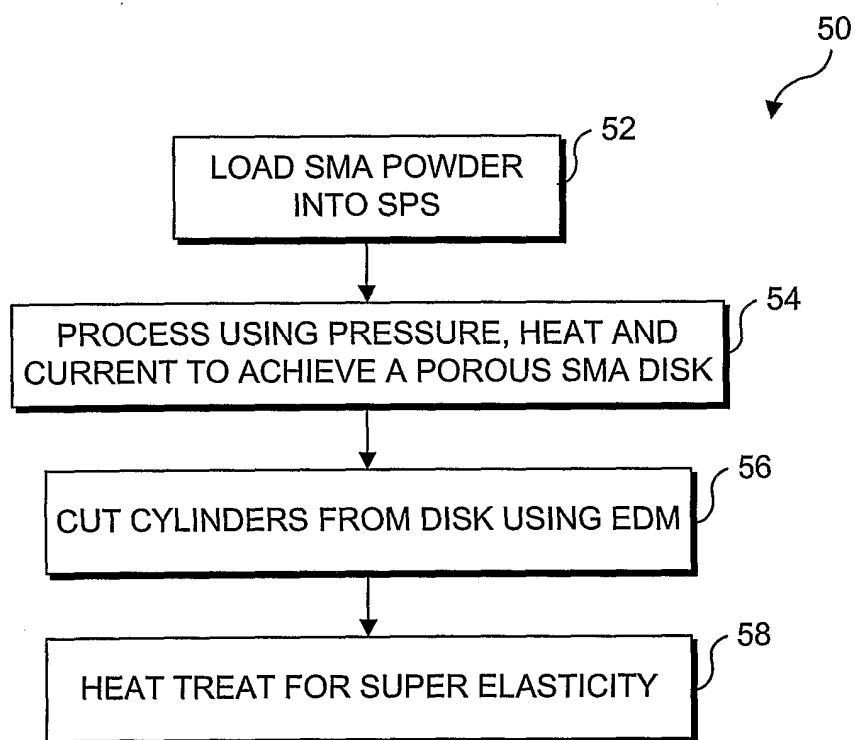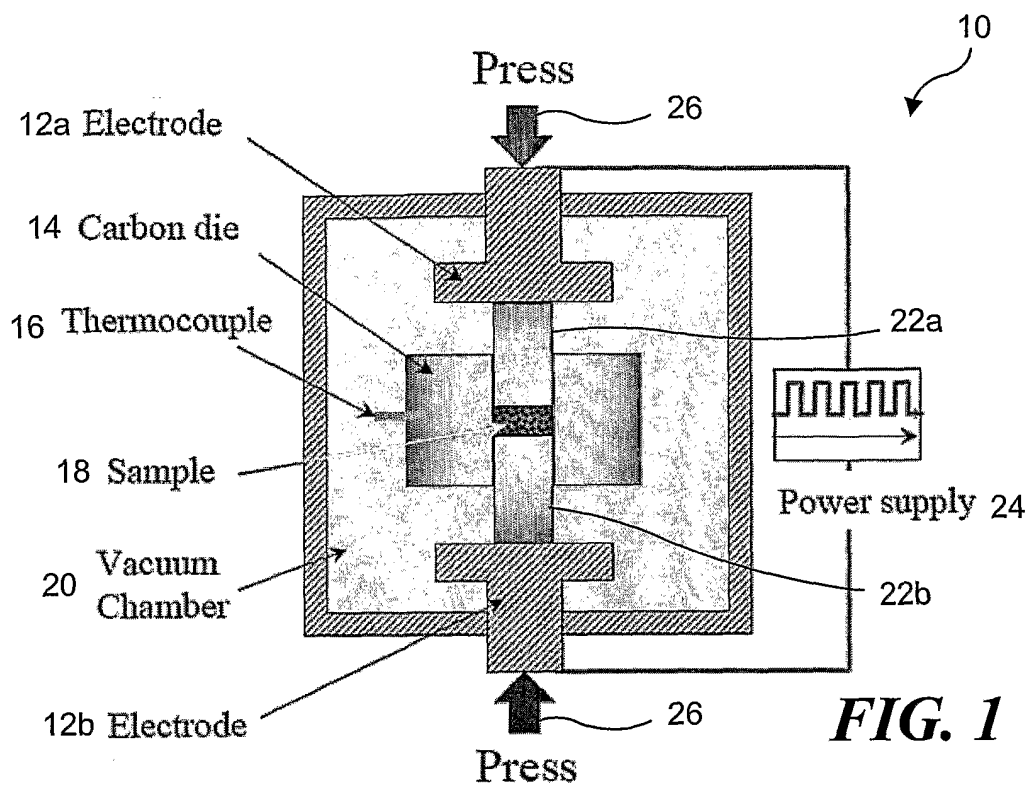**FIG. 2**

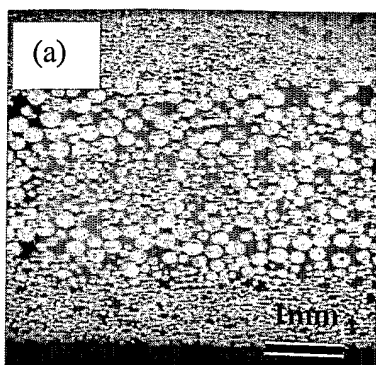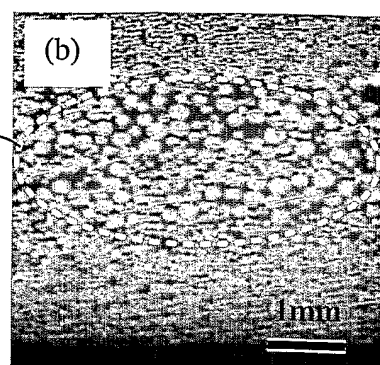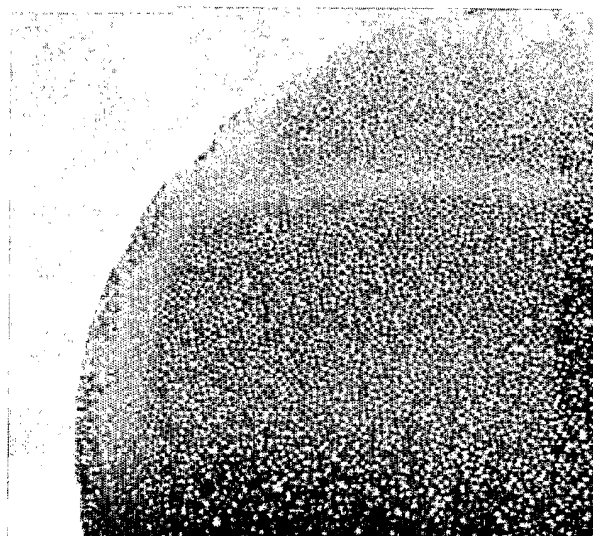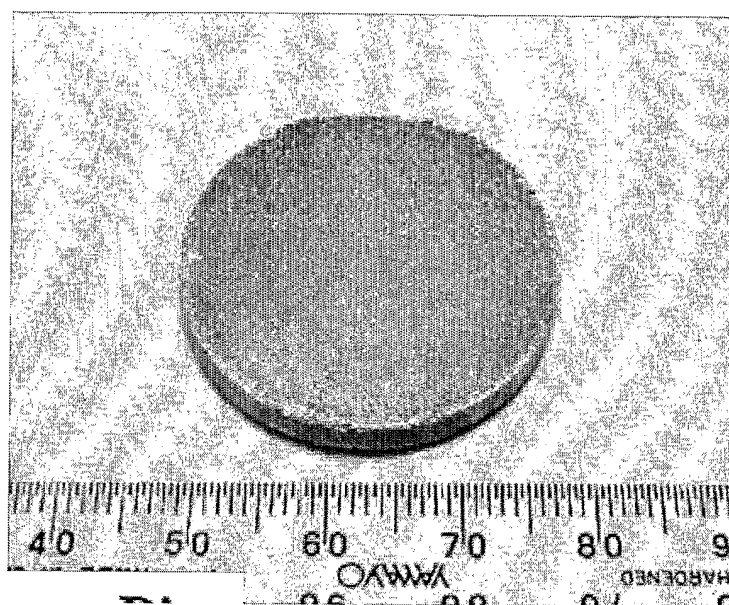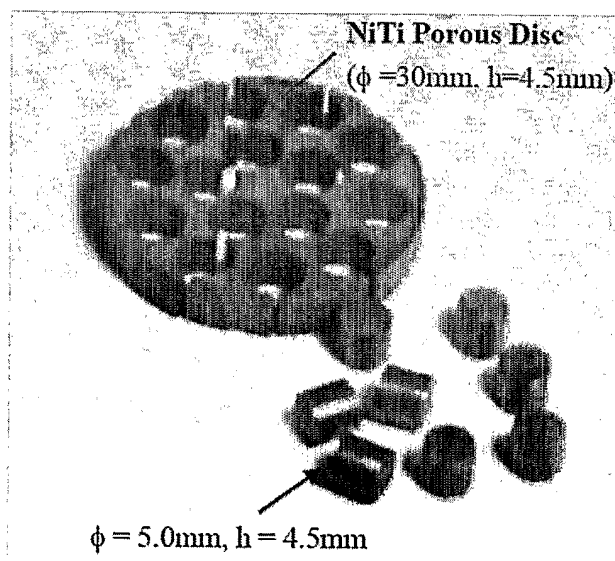**FIG. 3A****FIG. 3B****FIG. 3C****FIG. 3D****FIG. 3E**

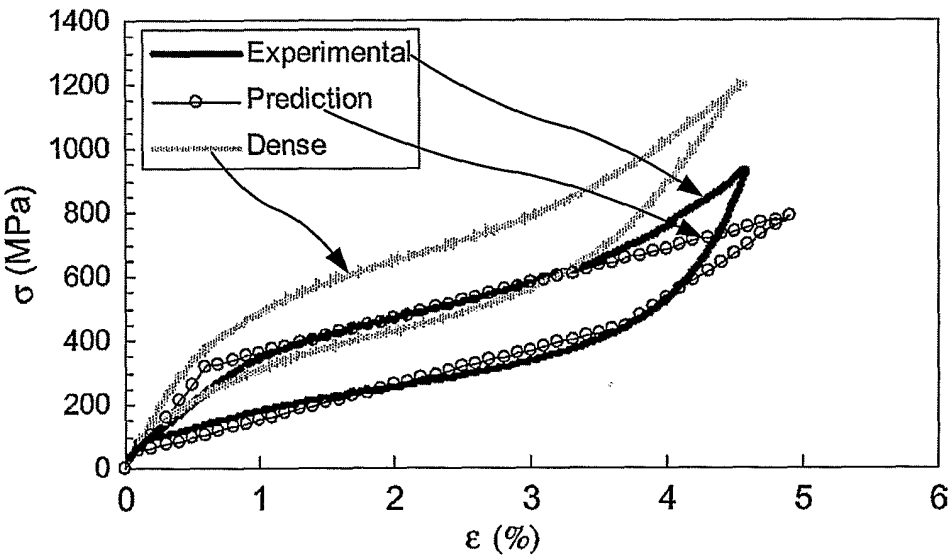
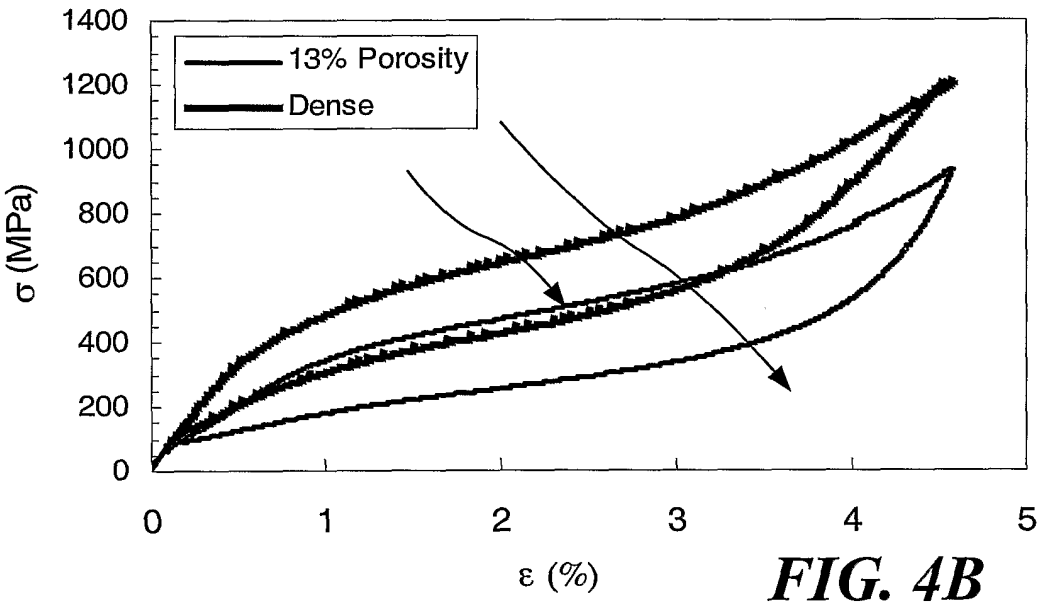
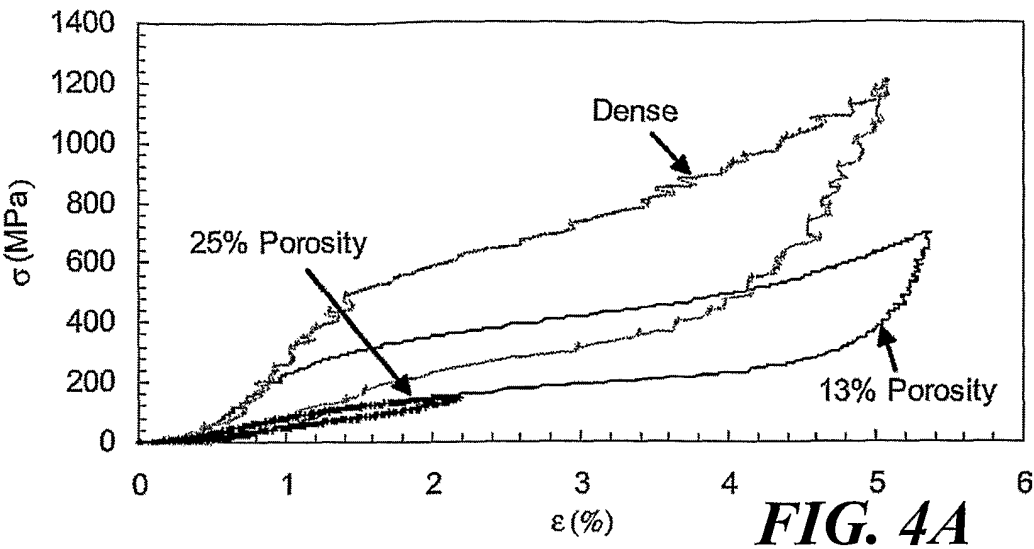


FIG. 6C

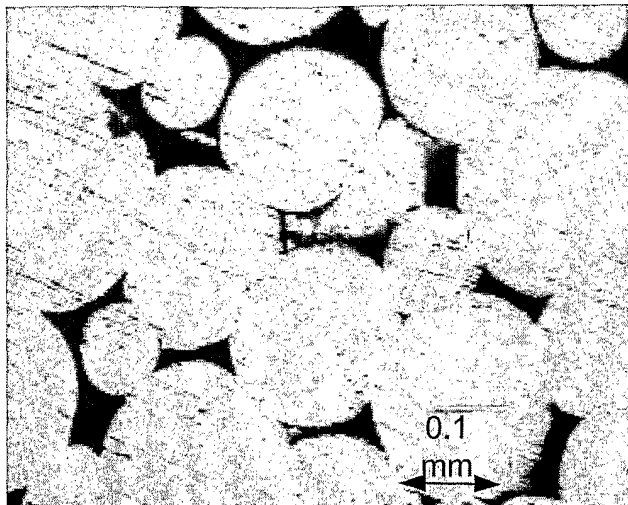


FIG. 5A

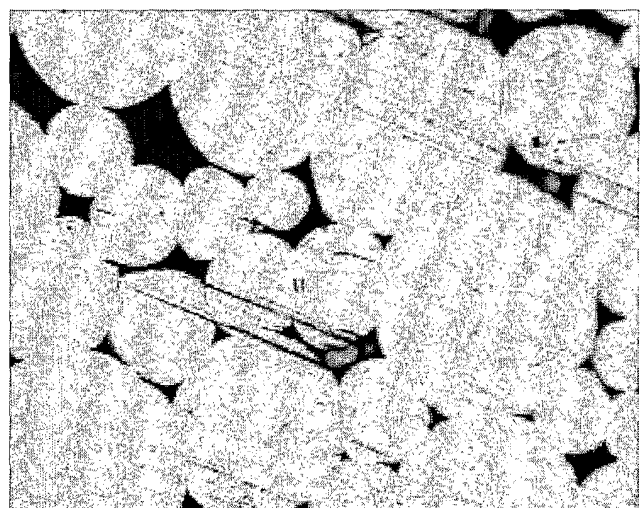


FIG. 5B

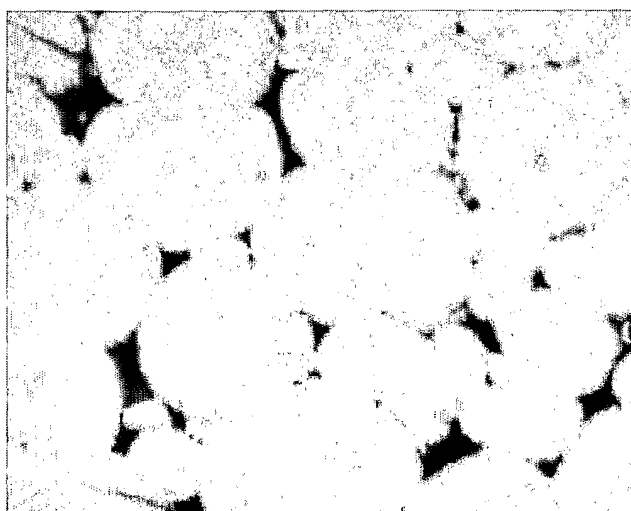


FIG. 5C

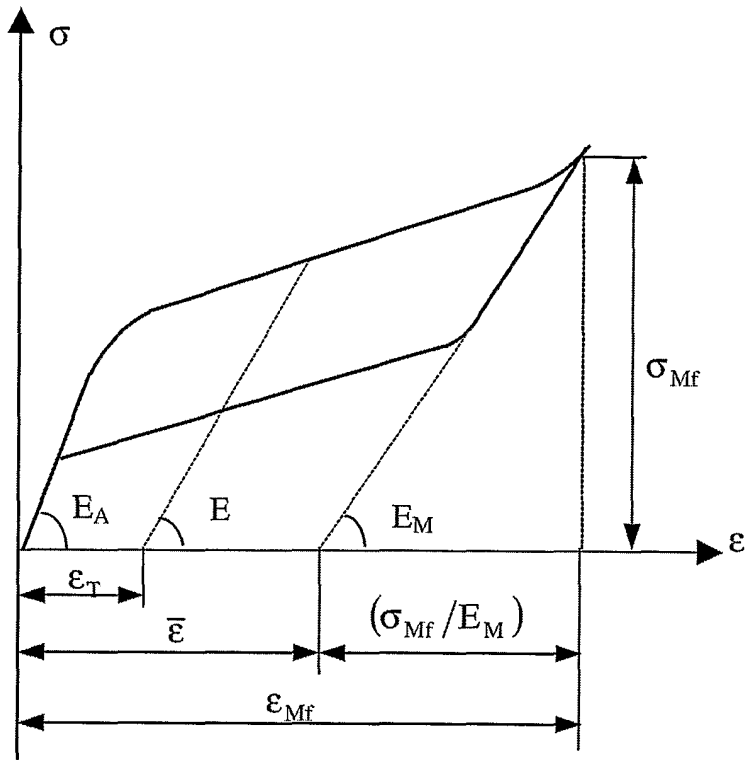


FIG. 6A

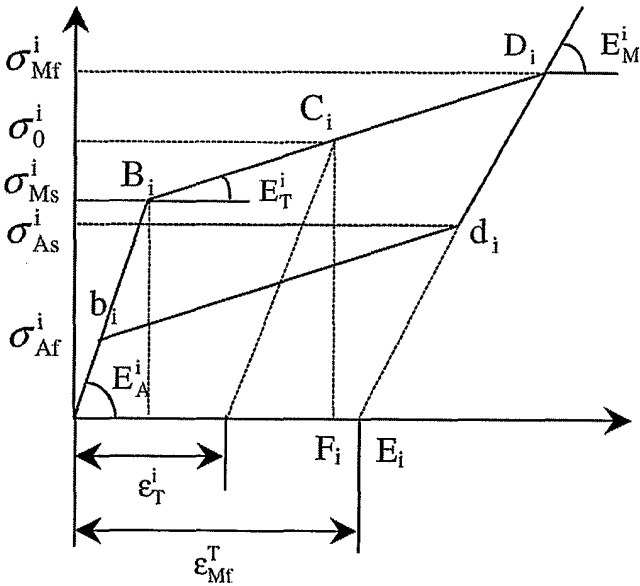
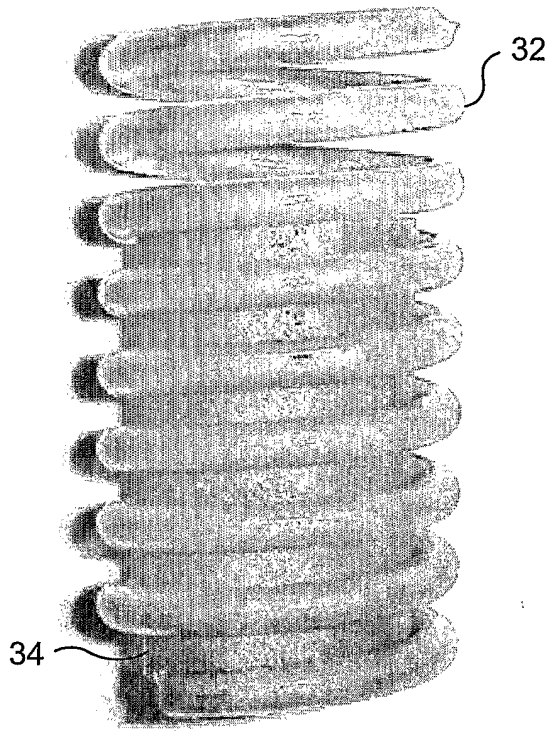
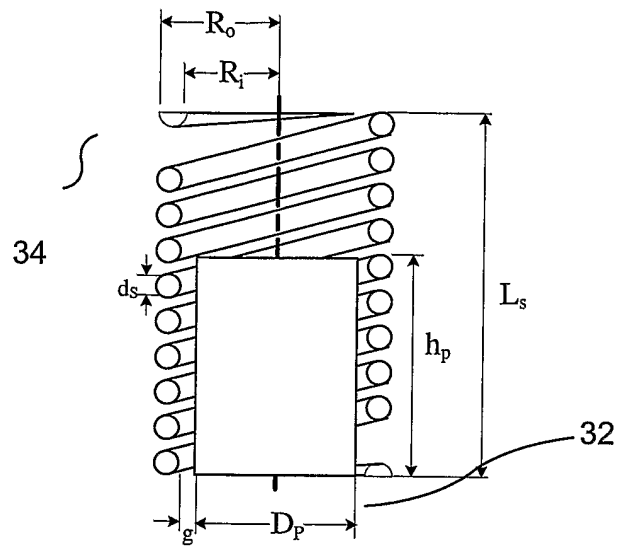
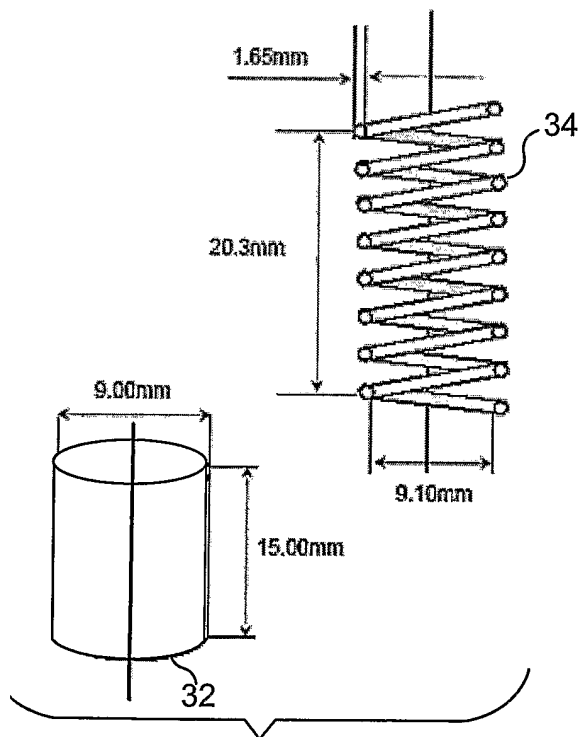
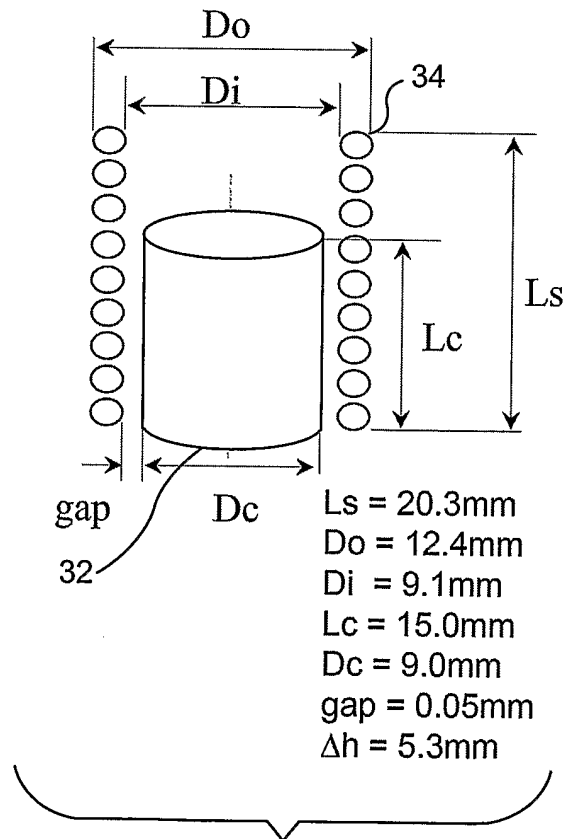


FIG. 6B

**FIG. 7A****FIG. 7B****FIG. 7C****FIG. 7D**

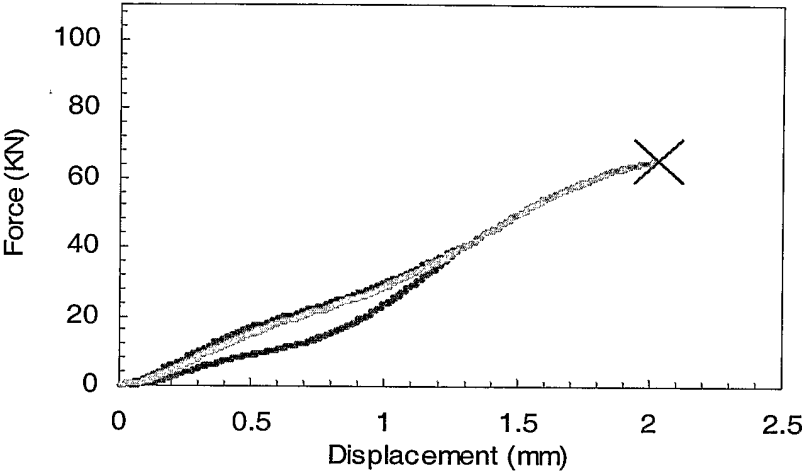
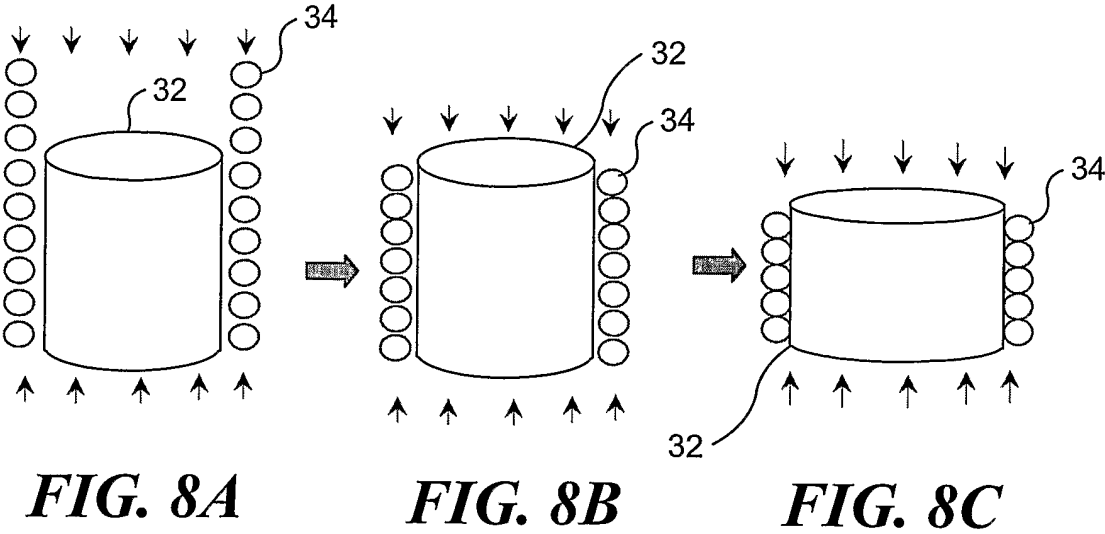
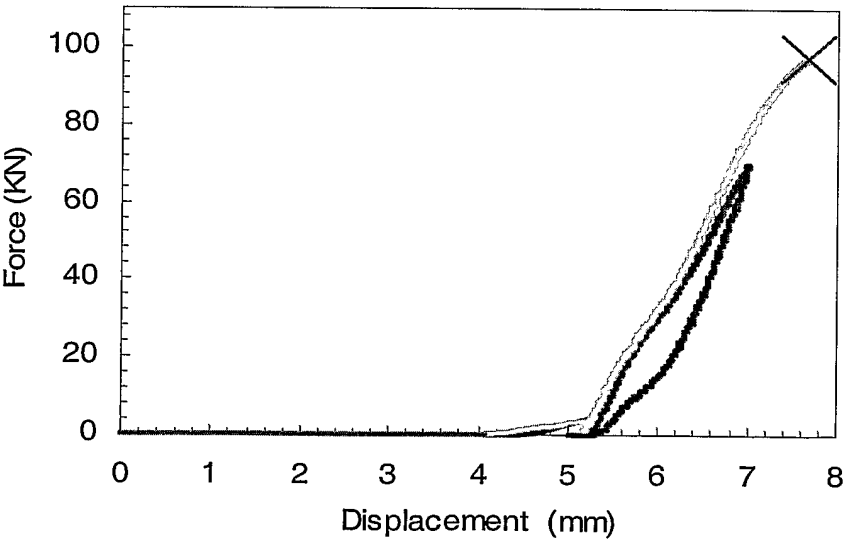


FIG. 9B



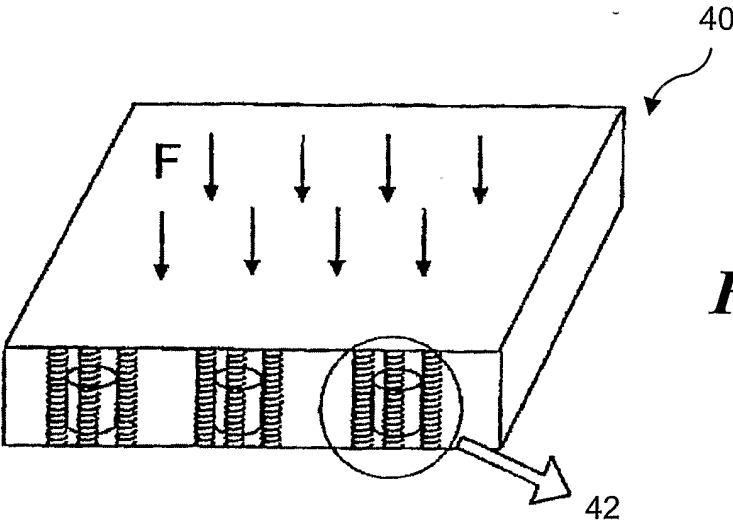


FIG. 10A

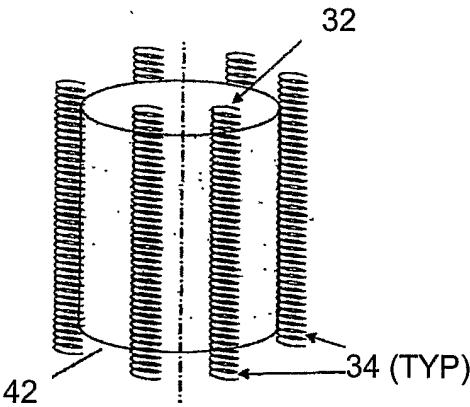


FIG. 10B

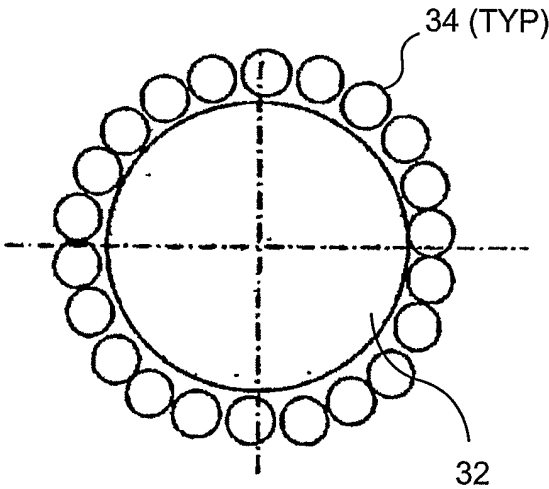


FIG. 10C