



(11) **EP 3 530 772 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
16.06.2021 Bulletin 2021/24

(51) Int Cl.:
C22F 3/00 (2006.01) **C21D 10/00** (2006.01)
C21D 1/09 (2006.01)

(21) Application number: **17916449.6**

(86) International application number:
PCT/CN2017/117069

(22) Date of filing: **19.12.2017**

(87) International publication number:
WO 2019/113995 (20.06.2019 Gazette 2019/25)

(54) **PLASTIC FORMING AND TOUGHENING PROCESS METHOD AND APPARATUS BASED ON ULTRASONIC VIBRATION**

KUNSTSTOFFFORMUNGS- UND HÄRTEVERFAHREN UND -VORRICHTUNG AUF DER BASIS VON ULTRASCHALLVIBRATION

PROCÉDÉ ET APPAREIL DE FORMAGE PAR DÉFORMATION PLASTIQUE ET DE RENFORCEMENT À BASE DE VIBRATIONS ULTRASONORES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(74) Representative: **Straus, Alexander et al**
2K Patent- und Rechtsanwälte - München
Keltenring 9
82041 Oberhaching (DE)

(30) Priority: **11.12.2017 CN 201711304450**

(43) Date of publication of application:
28.08.2019 Bulletin 2019/35

(56) References cited:
CN-A- 101 623 918 CN-A- 101 698 903
CN-A- 102 601 936 CN-A- 105 215 246
CN-A- 105 396 888 CN-A- 106 975 670
JP-A- 2000 140 999 US-A1- 2014 219 861

(73) Proprietor: **Huazhong University of Science and Technology**
Wuhan City
Hubei 430074 (CN)

- **SAMBELL ET AL:** "The technology of ceramic-fibre ceramic-matrix composites", COMPOSITES, IPC BUSINESS PRESS LTD. HAYWARDS HEATH, GB, vol. 1, no. 5, 1 September 1970 (1970-09-01), pages 276-285, XP024038579, ISSN: 0010-4361, DOI: 10.1016/0010-4361(70)90094-7 [retrieved on 1970-09-01]
- **HUNG J C ET AL:** "The influence of ultrasonic-vibration on hot upsetting of aluminum alloy", ULTRASONICS, IPC SCIENCE AND TECHNOLOGY PRESS LTD. GUILDFORD, GB, vol. 43, no. 8, 1 August 2005 (2005-08-01), pages 692-698, XP027612806, ISSN: 0041-624X [retrieved on 2005-08-01]
- **JIANG MA ET AL:** "Sub-second thermoplastic forming of bulk metallic glasses by ultrasonic beating", SCIENTIFIC REPORTS, vol. 5, no. 1, 8 December 2015 (2015-12-08), XP055640084, DOI: 10.1038/srep17844

(72) Inventors:

- **WANG, Xinyun**
Hongshan District Wuhan City
Hubei 430074 (CN)
- **ZHANG, Mao**
Hongshan District Wuhan City
Hubei 430074 (CN)
- **DENG, Lei**
Hongshan District Wuhan City
Hubei 430074 (CN)
- **JIN, Junsong**
Hongshan District Wuhan City
Hubei 430074 (CN)
- **GONG, Pang**
Hongshan District Wuhan City
Hubei 430074 (CN)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 530 772 B1

Description

BACKGROUND OF THE INVENTION

Technical Field

The present invention

[0001] The invention belongs to the field of amorphous alloy thermoplastic forming, and more particularly relates to a plastic forming and gradient toughening method and a device based on ultrasonic vibration.

Description of the Related Art

[0002] Amorphous alloy is a novel material with excellent properties such as high strength, corrosion resistance and wear resistance. Amorphous alloy exhibits good superplasticity in the hot state and can achieve near net shape formation of parts. However, due to the significant room temperature brittleness of the amorphous alloy, the amorphous alloy parts may directly undergo brittle fracture and completely fail once they are overloaded during service, making it difficult to directly apply the amorphous alloy parts in occasions where impact loads are present. Therefore, it is necessary to further improve the toughness of the amorphous alloy without impairing its excellent properties so as to improve the impact resistance of the amorphous alloy parts.

[0003] The amorphous alloy is in a thermodynamically metastable state, and spontaneously transformed to its thermodynamically stable state after obtaining sufficient energy, that is, crystallization occurs. After the amorphous alloy is crystallized, its properties are also changed. By forming nanocrystallines inside the amorphous alloy, the strength and toughness of the amorphous alloy can be remarkably improved. Therefore, according to the requirements of actual service conditions for the performance of amorphous alloy parts, nanocrystallines can be induced locally in the amorphous matrix by some means to form a nanocrystalline toughened amorphous matrix composite with a mechanical property gradient.

[0004] Chinese Patent Publication No. 101736213 proposed a method for strengthening and toughening an amorphous alloy by ultrasonic treatment, in which the amorphous alloy is strengthened and toughened by placing the amorphous alloy in a cooling water tank with a temperature lower than the crystallization temperature of the amorphous alloy and then applying an oscillation frequency with a power less than 3×10^4 W/mm² per unit area at the bottom of the water tank. The amorphous alloy treated by the method has a great improvement in plastic deformation capability at room temperature and an increase in thermal discharge in relaxation, with the precondition that the fracture strength is not changed. However, this method can only perform strengthening and toughening treatment on the entire amorphous alloy

sample, and cannot retain some amorphous regions according to actual use requirements to form an amorphous matrix composite with a mechanical property gradient. Chinese Patent Publication CN 101698903 A discloses a method for preparing a metal matrix amorphous/nanocrystalline composite layer, comprising the steps: preparing metal matrix amorphous solid or preparing a metal matrix amorphous coating on the surface of an object by a conventional method; putting the prepared metal matrix amorphous solid or the object with the metal matrix amorphous coating into water, at room temperature and under ultrasonic environment, vibrate at a frequency between 6.0 and 30.0kHz with an ultrasonic transducer to act on the metal, ultrasonic power between 100 and 500W, and forming the amorphous/nanocrystalline composite layer on the metal piece or the surface of the object. Chinese Patent Publication No. 102002659 proposed a method for continuously performing nanocrystallization on an amorphous alloy strip, in which at a temperature below the glass transition temperature of the amorphous alloy, the amorphous alloy strip is pressed on the top end of an amplitude transformer of a power ultrasonic device, and the amplitude transformer of the ultrasonic device exerts an ultrasonic effect on the amorphous alloy strip as the amorphous alloy strip moves, thereby achieving continuous nanocrystallization of the amorphous alloy strip. However, this method can only process the entire amorphous alloy strip, and can neither process actual parts with complex shapes nor achieve nanocrystal gradient toughening; Chinese Patent Publication No. 105420522 proposed a method for preparing an amorphous matrix composite, in which the flaky amorphous alloy and the second phase toughening material are alternately laminated and placed in a jig, and under a condition of constant pressure or increasing load, the laminated amorphous alloy and porous plate are heated while ultrasonic vibration is applied thereto, so that the amorphous alloy is rapidly softened and pressed into the pores of the second phase toughening plate to obtain an amorphous matrix composite. However, this method needs to introduce a second phase to perform overall toughening treatment on the amorphous alloy, is only suitable for the processing of sheet products, and cannot enable the processing of actual parts with complex shapes as well as local nanocrystalline gradient toughening of the parts according to actual use requirements. The above three strengthening and toughening methods are all not combined with the thermoplastic forming process of the amorphous alloy, and thus the parts need to be specially processed after being formed, resulting in complicated process and long production cycle. Sambell et al summarized advances in ceramic fibre technology ceramic forming processes and ceramic composite fabrication. The authors discuss an ultrasonic hot forming device comprising two punches in a female mold, which is provided with a heating device. The insert are connected to an ultrasonic device (Sambell et al., Composites vol. 1(5), p. 276-285, September, 1970). Hung et al., discussed the

influence of ultrasonic-vibration on hot upsetting of aluminum alloy. A cooling mechanism was used to solve the problem of high temperature. Effects of temperature and strain rate during ultrasonic-vibration on the upsetting of aluminum alloy were explored using this new system. The authors provide results indicating that ultrasonic-vibration can considerably reduce the compressive forces during hot upsetting. The reducing effect on compressive forces decreases while the temperature increases. The strain rate does not significantly affect the reducing effect on compressive forces.

SUMMARY OF THE INVENTION

[0005] In view of the above-described defects or improvement requirements in the art, the present invention provides a plastic forming and gradient toughening method and a device based on ultrasonic vibration, which aims to achieve nanocrystallization of a local region to be toughened on the amorphous alloy part by applying ultrasonic vibration to the local region to be toughened with an insert connected to an ultrasonic vibration amplitude transformer, thereby solving the technical problem of local toughening during thermoplastic forming.

[0006] In order to achieve the above objective, according to an aspect of the present invention, there is provided a plastic forming and gradient toughening method based on ultrasonic vibration, characterized in that the toughening method comprising:

- (a) according to actual use requirements of an amorphous alloy part to be formed, dividing one or more portions to be toughened on the amorphous alloy part to be formed, the portion being used for generating a nanocrystalline toughening phase and an amorphous state of other portions being retained;
- (b) designing a toughening device for forming the amorphous alloy part to be formed, wherein the toughening device is connected to an external drive mechanism and comprises one or more inserts connected to an ultrasonic vibration amplitude transformer and one or more resistance heating rods, the insert is disposed corresponding to the portion to be toughened and used for applying ultrasonic vibration to the portion to be toughened, the one or more resistance heating rods are used for heating raw material blank to be processed to a forming temperature, and parameters of the ultrasonic vibration generated by the ultrasonic vibration amplitude transformer are obtained by analyzing an energy propagation process of the ultrasonic vibration by finite element numerical simulation, in which energy of the ultrasonic vibration is adjusted by adjusting an amplitude, a frequency and a power of the ultrasonic vibration, and when the energy of the ultrasonic vibration exceeds an energy threshold value required for nanocrystallization, the corresponding amplitude, frequency and power of the ultrasonic vibration

are required parameters of the ultrasonic vibration; and

(c) placing raw material blank in the toughening device, heating the raw material blank by the one or more resistance heating rods to a forming temperature, and performing mold closing of the toughening device to form a required amorphous alloy part, ultrasonic vibration being started in the mold closing process and stopped when mold opening is performed.

[0007] Preferably, the forming temperature is between a glass transition temperature and a crystallization temperature of the raw material blank.

[0008] Further preferably, in the step (b), the toughening device is preferably a mold for thermoplastic forming.

[0009] Further preferably, the material of the amorphous alloy part is a Pd, Pt, Au, Zr, Ti, Fe, Cu, Ni, Al, Mg or Ce based amorphous alloy with a thermoplastic forming ability.

[0010] According to another aspect of the present invention, there is provided a device for use in the above toughening method, characterized in that the device comprises an upper mold, a lower mold and a female mold,

the upper mold and the lower mold are oppositely disposed and form a mold cavity with the female mold, the upper mold and the lower mold are respectively provided with a punch and more than one inserts, the punches are connected to a driving servo press and used to form raw material blank into a desired three-dimensional structure, the inserts are connected to an ultrasonic vibration amplitude transformer and used to apply ultrasonic vibration to one or more portions to be toughened, the female mold is provided with one or more resistance heating rods for heating the raw material blank.

[0011] In general, by comparing the above technical solution of the present inventive concept with the prior art, the present invention has the following beneficial effects:

1. in the present invention, an insert which is partially connected with an ultrasonic vibration amplitude transformer is disposed corresponding to a portion to be toughened to apply ultrasonic vibration to the portion, thereby achieving nanocrystallization process. The nanocrystallization process and the thermoplastic forming process are simultaneously carried out without additional processing after the parts are formed, which simplifies production processes and shortens the forming time;
2. in the present invention, ultrasonic vibration is adopted to improve the toughness of the material, since the ultrasonic vibration can significantly improve the forming ability of the material, and the propagation of the ultrasonic vibration wave has strong directionality so that the vibration energy distribution of the ultrasonic vibration wave can be precisely con-

trolled. Therefore, nanocrystallization can be facilitated by using the ultrasonic vibration to achieve amorphous alloy toughening;

3. in the present invention, one or more resistance heating rods are used, so that the forming temperature in the thermoplastic forming process is ensured on the one hand, and the uniformity of the temperature field inside the mold can be ensured by adjusting the distribution of the resistance heating rods on the other hand; and

4. in the method based on ultrasonic vibration according to the present invention, nanocrystallization toughening and thermoplastic forming of an amorphous alloy part are combined to achieve integration of forming and toughening, which simplifies production processes, shortens the processing time and improves the dimensional accuracy. Meanwhile, according to the actual service conditions of the amorphous alloy part, the microstructure of an amorphous alloy-based composite with a mechanical property gradient is formed inside the part, which can significantly improve the overall performance of the part.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

FIG. 1 is a flow chart of a toughening method according to a preferred embodiment of the present invention; and

FIG. 2 is a schematic structural diagram of an amorphous alloy gear member forming device according to the preferred embodiment of the present invention.

[0013] In all figures, the same elements or structures are denoted by the same reference numerals, in which: 1-upper ultrasonic vibration ring, 2-upper punch, 3-heating rod, 4-female mold, 5-raw material blank, 6-lower ultrasonic vibration ring, and 7-lower punch.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0014] For clear understanding of the objectives, features and advantages of the present invention, detailed description of the present invention will be given below in conjunction with accompanying drawings and specific embodiments. It should be noted that the embodiments described herein are only meant to explain the present invention. Furthermore, the technical features related to the embodiments of the invention described below can be mutually combined if they are not found to be mutually exclusive.

[0015] FIG. 1 is a flow chart of a toughening method according to a preferred embodiment of the present invention, and as shown in FIG. 1, a plastic forming and gradient toughening method based on ultrasonic vibration is illustrated, the method comprising:

(1) According to actual use requirements of the amorphous alloy part, the amorphous state is retained in a portion requiring high strength, strong corrosion resistance and wear resistance, and the nanocrystalline toughening phase is formed in a portion requiring high toughness. Therefore, in the design of the thermoplastic forming process, ultrasonic vibration is applied to the portion where the nanocrystalline toughening phase needs to be formed, and the ultrasonic vibration is not applied to the portion where the amorphous state needs to be retained.

(2) In the mold design, one or more inserts connected to the ultrasonic vibration amplitude transformer are disposed in one or more portions where ultrasonic vibration is required; the amplitude, frequency and power of the ultrasonic vibration are determined by analyzing the energy propagation process of the ultrasonic vibration by finite element numerical simulation and adjusting the amplitude, frequency and power of the ultrasonic vibration such that the vibration energy in the toughening target region exceeds the energy threshold value for nanocrystallization; and one or more resistance heating rods are embedded in the mold to heat the blank to a set forming temperature, and the mold is integrally mounted on a servo press.

(3) Integration of forming and toughening

[0016] The amorphous alloy blank is placed in the mold cavity and heated by the one or more resistance heating rods to a temperature between a glass transition temperature and a crystallization temperature. The lower mold and the female mold are kept stationary, and ultrasonic vibration is started after the upper mold is moved down and comes into contact with the blank. The upper mold continues to be moved down until the upper mold, the lower mold and the female mold are completely closed to obtain a desired amorphous alloy part. The ultrasonic vibration is stopped, and the upper mold is moved up to be separated from the part. The lower mold is moved up until the part is pushed out of the female mold.

[0017] The present invention will be further described in detail below with reference to the embodiment and the accompanying drawings.

[0018] FIG. 2 is a schematic structural diagram of an amorphous alloy gear member forming device according to the preferred embodiment of the present invention, and as shown in FIG. 2, ultrasonic vibration assisted hot closed-die forging forming of the amorphous alloy gear member is illustrated.

[0019] Since gear failure mainly occurs in the tooth portion, it is necessary to perform nanocrystallization toughening of the tooth portion while retaining the amorphous state of the spoke portion, so as to improve the impact resistance of the amorphous alloy gear member. According to this demand, a forming device as shown in FIG. 2

was designed.

[0020] The forming device is composed of three parts of an upper mold, a lower mold and a female mold 4. In the forming device, the upper mold is composed of an upper ultrasonic vibration ring 1 and an upper punch 2, the upper punch 2 is embedded in the upper ultrasonic vibration ring 1, and the upper punch 2 is provided with a shoulder for limiting the movement of the upper ultrasonic vibration ring 1. The lower mold is composed of a lower ultrasonic vibration ring 6 and a lower punch 7, the lower punch 7 is embedded in the lower ultrasonic vibration ring 6, and the lower punch 7 is provided with a shoulder for limiting the movement of the lower ultrasonic vibration ring 6. The upper punch 2 is connected to an upper slider of a servo press. The lower punch 7 is connected to a lower slider of the servo press. The upper ultrasonic vibration ring 1 and the lower ultrasonic vibration ring 6 are respectively connected to an ultrasonic generator. An inner wall of the female mold 4 is machined in a tooth shape, and one or more resistance heating rods 3 are embedded in the female mold 4.

[0021] At the time of forming, a cylindrical blank 5 is first placed inside the female mold 4. The resistance heating rods 3 are started to heat the blank 5 to a set temperature. The lower molds (6 and 7) and the female mold 4 are kept stationary. The upper punch 2 drives the upper ultrasonic vibration ring 1 to move down until they come into contact with the upper surface of the blank 5. The upper ultrasonic vibration ring 1 and the lower ultrasonic vibration ring 6 are started to vibrate at a set frequency and amplitude. The upper punch 2 continues to drive the upper ultrasonic vibration ring 1 to move down at a set loading rate until the female mold 4 is completely filled by the blank 5. In this process, the ultrasonic vibration concentrates on the edge portion of the blank 5, that is, the tooth portion of the gear member. On the one hand, filling of the material into the mold cavity can be significantly facilitated, and the dimensional accuracy of the part can be improved; on the other hand, nanocrystallization is induced in the tooth portion to achieve toughening, while the amorphous state of the spoke portion is retained. The ultrasonic vibration of the upper ultrasonic vibration ring 1 and the lower ultrasonic vibration ring 6 and the one or more resistance heating rod 3 are closed. The upper ultrasonic vibration ring 1, the upper punch 2, the lower ultrasonic vibration ring 6 and the lower punch 7 are moved up together at the same speed until the formed part 5 is pushed out of the inner cavity of the female mold 5. At this time, the forming process is finished.

Claims

1. A plastic forming and gradient toughening method based on ultrasonic vibration, **characterized in that** the toughening method comprising:

(a) according to actual use requirements of an amorphous alloy part to be formed, dividing one or more portions to be toughened on the amorphous alloy part to be formed, the portion being used for generating a nanocrystalline toughening phase and an amorphous state of other portions being retained;

(b) designing a toughening device for forming the amorphous alloy part to be formed, wherein the toughening device is connected to an external drive mechanism and comprises one or more inserts connected to an ultrasonic vibration amplitude transformer and one or more resistance heating rods, the insert is disposed corresponding to the portion to be toughened and used for applying ultrasonic vibration to the portion to be toughened, the one or more resistance heating rods are used for heating raw material blank to be processed to a forming temperature, and parameters of the ultrasonic vibration generated by the ultrasonic vibration amplitude transformer are obtained by analyzing an energy propagation process of the ultrasonic vibration by finite element numerical simulation, in which energy of the ultrasonic vibration is adjusted by adjusting an amplitude, a frequency and a power of the ultrasonic vibration, and when the energy of the ultrasonic vibration exceeds an energy threshold value required for nanocrystallization, the corresponding amplitude, frequency and power of the ultrasonic vibration are required parameters of the ultrasonic vibration; and

(c) placing raw material blank in the toughening device, heating the raw material blank by the one or more resistance heating rods to a forming temperature, and performing mold closing of the toughening device to form a required amorphous alloy part, ultrasonic vibration being started in the mold closing process and stopped when mold opening is performed.

2. The plastic forming and gradient toughening method based on ultrasonic vibration according to claim 1, **characterized in that** the forming temperature is between a glass transition temperature and a crystallization temperature of the raw material blank.
3. The plastic forming and gradient toughening method based on ultrasonic vibration according to any one of claims 1 or 2, **characterized in that** in the step (b), the toughening device is preferably a mold for thermoplastic forming.
4. The plastic forming and gradient toughening method based on ultrasonic vibration according to any one of claims 1-3, **characterized in that** the material of the amorphous alloy part is a Pd, Pt, Au, Zr, Ti, Fe, Cu, Ni, Al, Mg or Ce based amorphous alloy with a

thermoplastic forming ability.

5. A device for use in the toughening method according to any one of claims 1-4, **characterized in that** the device comprises an upper mold, a lower mold and a female mold, the upper mold and the lower mold are oppositely disposed and form a mold cavity with the female mold, the upper mold and the lower mold are respectively provided with a punch and more than one inserts, the punches are connected to a driving servo press and used to form raw material blank into a desired three-dimensional structure, the inserts are connected to an ultrasonic vibration amplitude transformer and used to apply ultrasonic vibration to more than one portions to be toughened, the female mold is provided with one or more resistance heating rods for heating the raw material blank.

Patentansprüche

1. Verfahren zur plastischen Verformung und Gradientenhärtung auf der Basis von Ultraschallschwingungen, **dadurch gekennzeichnet, dass** das Verfahren zur Hartung umfasst:

(a) Aufteilen eines oder mehrerer zu härtender Bereiche auf dem zu formenden amorphen Legierungsteil entsprechend den tatsächlichen Verwendungserfordernissen eines zu formenden amorphen Legierungsteils wobei der Bereich zur Erzeugung einer nanokristallinen Zähigkeitsphase verwendet wird und ein amorpher Zustand anderer Bereiche beibehalten wird;
 (b) Entwerfen einer Härtungseinrichtung zum Formen des zu formenden amorphen Legierungsteils, wobei die Härtungseinrichtung mit einem externen Antriebsmechanismus verbunden ist und einen oder mehrere Einsätze umfasst, die mit einem Ultraschallschwingungsamplitudentransformator und einem oder mehreren Widerstandsheizstäben verbunden sind, worin der Einsatz entsprechend dem vorzuspannenden Bereich angeordnet ist und zum Anlegen von Ultraschallschwingungen an den vorzuspannenden Bereich verwendet wird, wobei der eine oder die mehreren Widerstandsheizstäbe zum Erwärmen des zu verarbeitenden Rohmaterialrohlings auf eine Formgebungstemperatur verwendet werden, und Parameter der Ultraschallschwingung, die durch den Ultraschallschwingungsamplitudentransformator erzeugt wird, durch Analysieren eines Energieausbreitungsprozesses der Ultraschallschwingung durch numerische Simulation mit finiten Elementen erhalten werden, wobei die En-

ergie der Ultraschallschwingung durch Einstellen einer Amplitude, einer Frequenz und einer Leistung der Ultraschallschwingung eingestellt wird, und wobei die entsprechende Amplitude, Frequenz und Leistung der Ultraschallschwingung erforderliche Parameter der Ultraschallschwingung sind, wenn die Energie der Ultraschallschwingung einen für die Nanokristallisation erforderlichen Energieschwellenwert überschreitet; und

(c) Einlegen des Rohmaterialrohlings in die Härtungseinrichtung, Erwärmen des Rohmaterialrohlings durch den einen oder die mehreren Widerstandsheizstäbe auf eine Formungstemperatur und Durchführen des Formschließens der Härtungseinrichtung, um ein erforderliches amorphes Legierungsteil zu bilden, wobei die Ultraschallschwingung beim Formschließvorgang gestartet und beim Durchführen des Formöffnens gestoppt wird.

2. Verfahren zur plastischen Verformung und Gradientenhärtung auf der Basis von Ultraschallschwingungen nach Anspruch 1, **dadurch gekennzeichnet, dass** die Formtemperatur zwischen einer Glasübergangstemperatur und einer Kristallisationstemperatur des Rohmaterialrohlings liegt.

3. Verfahren zur plastischen Verformung und Gradientenhärtung auf der Basis von Ultraschallschwingungen nach einem der Ansprüche 1 oder 2, **dadurch gekennzeichnet, dass** im Schritt (b) die Härtungseinrichtung vorzugsweise eine Form zum thermoplastischen Umformen ist.

4. Verfahren zur plastischen Verformung und Gradientenhärtung auf der Basis von Ultraschallschwingungen nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** das Material des amorphen Legierungsteils eine amorphe Legierung auf der Basis von Pd, Pt, Au, Zr, Ti, Fe, Cu, Ni, Al, Mg oder Ce mit thermoplastischem Umformvermögen ist.

5. Einrichtung zur Verwendung in dem Härtungsverfahren nach einem der Ansprüche 1-4, **dadurch gekennzeichnet, dass** die Vorrichtung eine obere Form, eine untere Form und eine Matrize umfasst, die obere Form und die untere Form gegenüberliegend angeordnet sind und mit der Matrize einen Formhohlraum bilden, die obere Form und die untere Form jeweils mit einem Stempel und mehr als einem Einsatz versehen sind, die Stempel mit einer Antriebs-Servopresse verbunden sind und verwendet werden, um den Rohmaterialrohling in eine gewünschte dreidimensionale Struktur zu formen, die Einsätze mit einem Ultraschallschwingungsamplitudentransformator verbunden sind und verwendet werden, um Ultraschallschwingungen auf mehr als

einen zu härtenden Bereich auszuüben, und die Matrize mit einem oder mehreren Widerstandsheizstäben zum Erwärmen des Rohmaterialrohrlings versehen ist.

Revendications

1. Procédé de formage et de durcissement par gradient de plastique, basé sur une vibration ultrasonore, **caractérisé en ce que** le procédé de durcissement comprend:

(a) selon les exigences d'utilisation réelles d'une pièce en alliage amorphe à former, la séparation d'une ou de plusieurs portions à durcir sur la pièce en alliage amorphe à former, la portion étant utilisée pour générer une phase de durcissement nanocristalline et un état amorphe d'autres portions étant conservé;

(b) la conception d'un dispositif de durcissement pour former la pièce en alliage amorphe à former, le dispositif de durcissement étant relié à un mécanisme d'entraînement externe et comprenant un ou plusieurs inserts reliés à un transformateur d'amplitude de vibration ultrasonore et une ou plusieurs tiges de chauffage par résistance, l'insert étant disposé de manière à correspondre à la portion à durcir et utilisé pour appliquer une vibration ultrasonore à la portion à durcir, ladite une ou lesdites plusieurs tiges de chauffage par résistance étant utilisées pour chauffer une ébauche de matière première à traiter à une température de formage et des paramètres de la vibration ultrasonore générée par le transformateur d'amplitude de vibration ultrasonore étant obtenus par analyse d'un processus de propagation d'énergie de la vibration ultrasonore par simulation numérique par éléments finis, dans laquelle l'énergie de la vibration ultrasonore est ajustée par ajustement d'une amplitude, d'une fréquence et d'une puissance de la vibration ultrasonore et lorsque l'énergie de la vibration ultrasonore dépasse une valeur de seuil d'énergie requise pour la nanocristallisation, l'amplitude, la fréquence et la puissance correspondantes de la vibration ultrasonore étant des paramètres requis de la vibration ultrasonore; et

(c) le placement d'une ébauche de matière première dans le dispositif de durcissement, le chauffage de l'ébauche de matière première par ladite une ou lesdites plusieurs tiges de chauffage par résistance à une température de formage et la réalisation d'une fermeture de moule du dispositif de durcissement pour former une pièce en alliage amorphe requise, une vibration ultrasonore étant démarrée dans le procédé de

fermeture de moule et arrêtée lorsque l'ouverture de moule est réalisée.

2. Procédé de formage et de durcissement par gradient de plastique basé sur une vibration ultrasonore selon la revendication 1, **caractérisé en ce que** la température de formage est située entre une température de transition vitreuse et une température de cristallisation de l'ébauche de matière première.
3. Procédé de formage et de durcissement par gradient de plastique basé sur une vibration ultrasonore selon l'une quelconque des revendications 1 ou 2, **caractérisé en ce que** dans l'étape (b), le dispositif de durcissement est préférentiellement un moule pour formage thermoplastique.
4. Procédé de formage et de durcissement par gradient de plastique basé sur une vibration ultrasonore selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** le matériau de la pièce en alliage amorphe est un alliage amorphe à base de Pd, Pt, Au, Zr, Ti, Fe, Cu, Ni, Al, Mg ou Ce présentant une aptitude au formage thermoplastique.
5. Dispositif pour une utilisation dans le procédé de durcissement selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** le dispositif comprend un moule supérieur, un moule inférieur et un moule femelle, le moule supérieur et le moule inférieur sont disposés de manière opposée et forment une cavité de moule avec le moule femelle, le moule supérieur et le moule inférieur sont respectivement pourvus d'un poinçon et de plus d'un insert, les poinçons sont reliés à une servo-presse d'entraînement et utilisés pour former une ébauche de matière première dans une structure tridimensionnelle souhaitée, les inserts sont reliés à un transformateur d'amplitude de vibration ultrasonore et utilisés pour appliquer une vibration ultrasonore à plus d'une portion à durcir, le moule femelle est pourvu d'une ou plusieurs tiges de chauffage par résistance pour chauffer l'ébauche de matière première.

ACCOMPANYING FIGURES

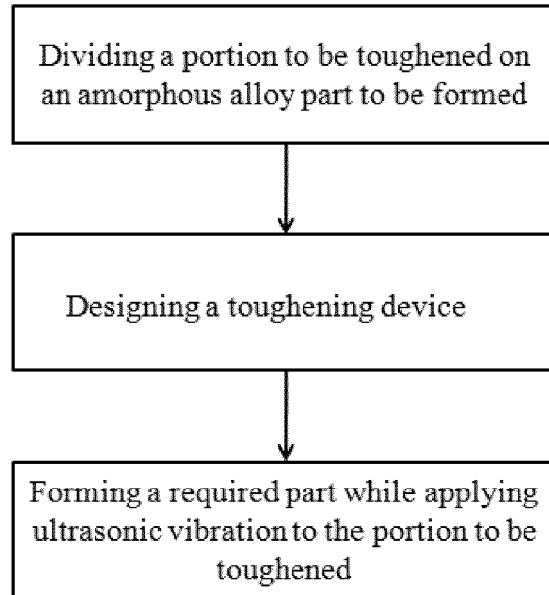


FIG. 1

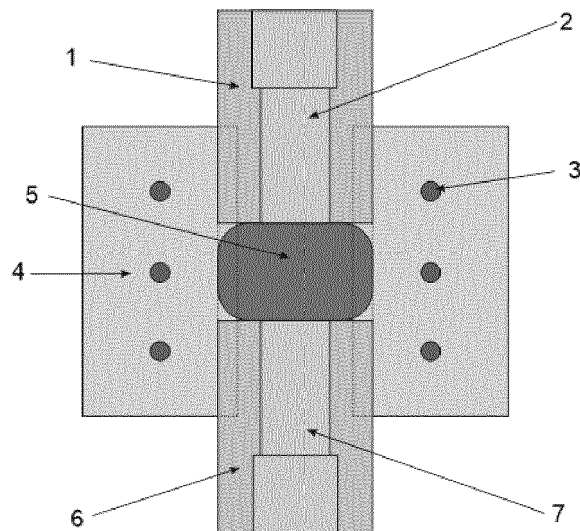


FIG. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 101736213 [0004]
- CN 101698903 A [0004]
- CN 102002659 [0004]
- CN 105420522 [0004]

Non-patent literature cited in the description

- **SAMBELL et al.** *Composites*, September 1970, vol. 1 (5), 276-285 [0004]