

Jan. 21, 1969

J. Z. DE LOREAN

3,422,806

INTERNAL COMBUSTION ENGINE

Filed July 3, 1967

Sheet 1 of 4

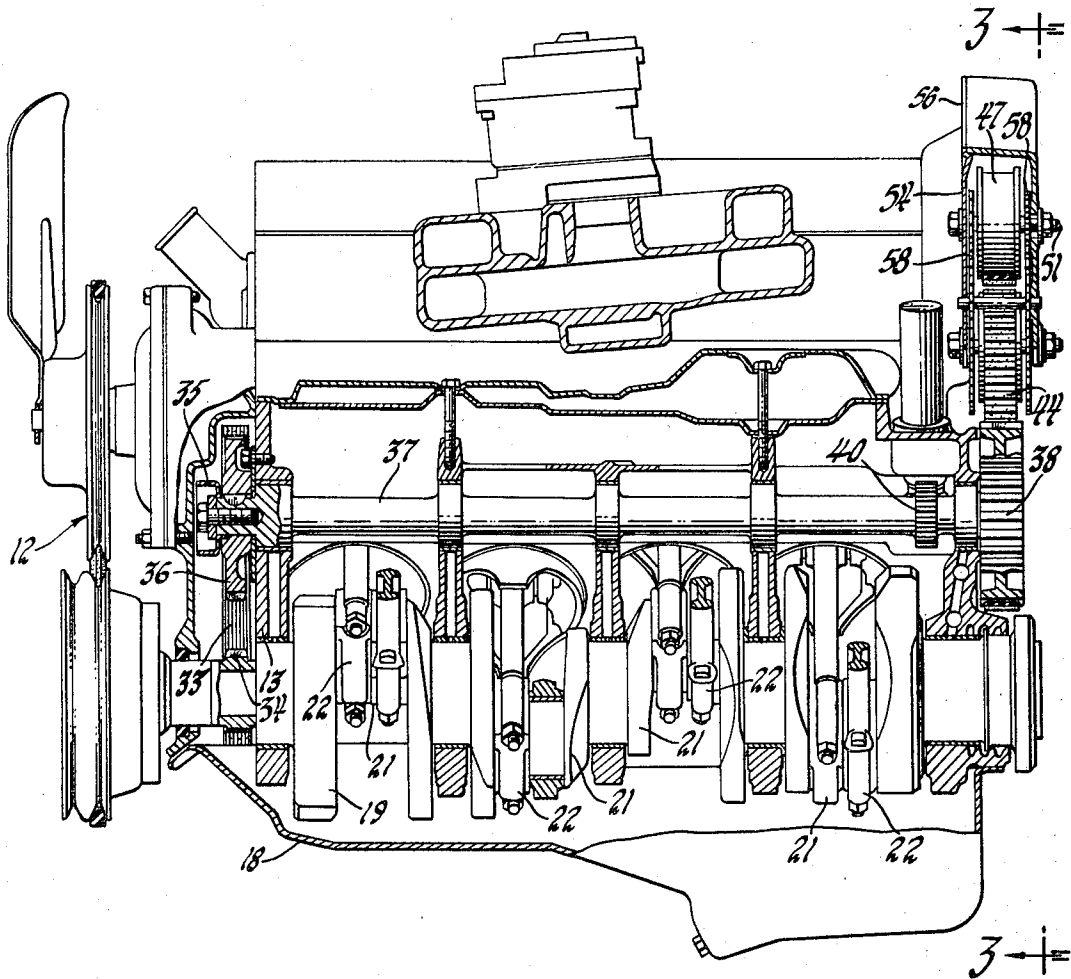


Fig. 1

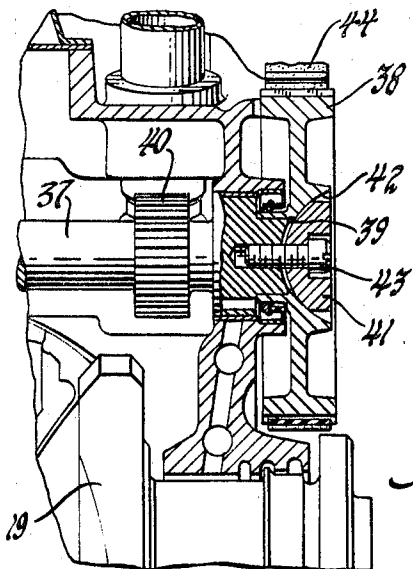


Fig. 2

INVENTOR

BY *John Z. DeLorean*

Robert J. Outland
ATTORNEY

Jan. 21, 1969

J. Z. DE LOREAN

3,422,806

INTERNAL COMBUSTION ENGINE

Filed July 3, 1967

Sheet 2 of 4

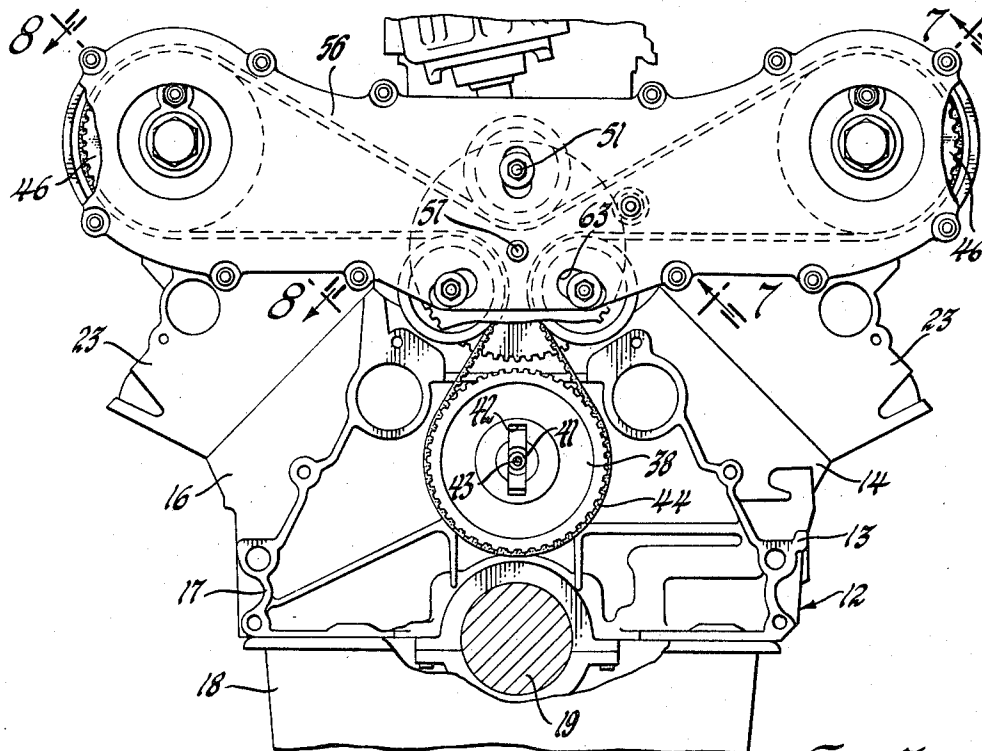


Fig. 3

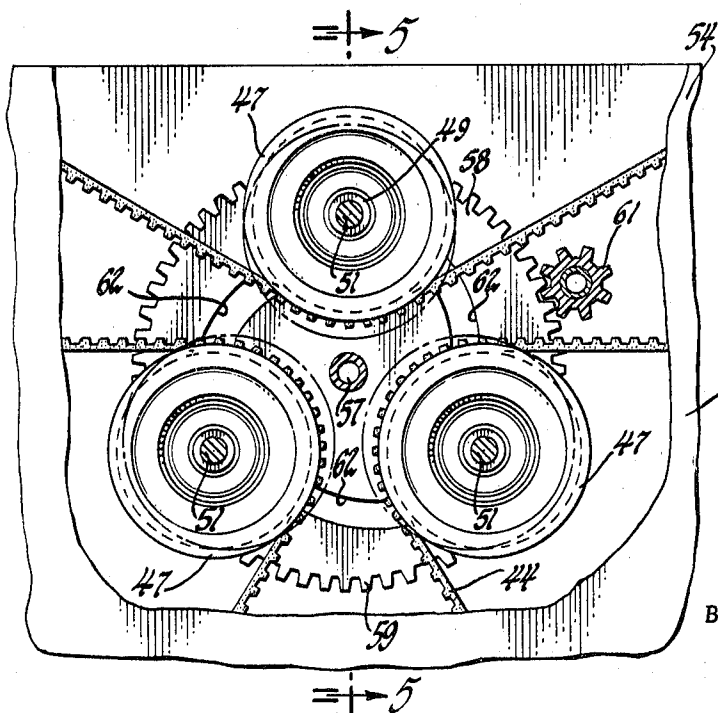


Fig. 4

INVENTOR

John Z. DeLorean

BY

Robert J. Outland

ATTORNEY

Jan. 21, 1969

J. Z. DE LOREAN

3,422,806

INTERNAL COMBUSTION ENGINE

Filed July 3, 1967

Sheet 3 of 4

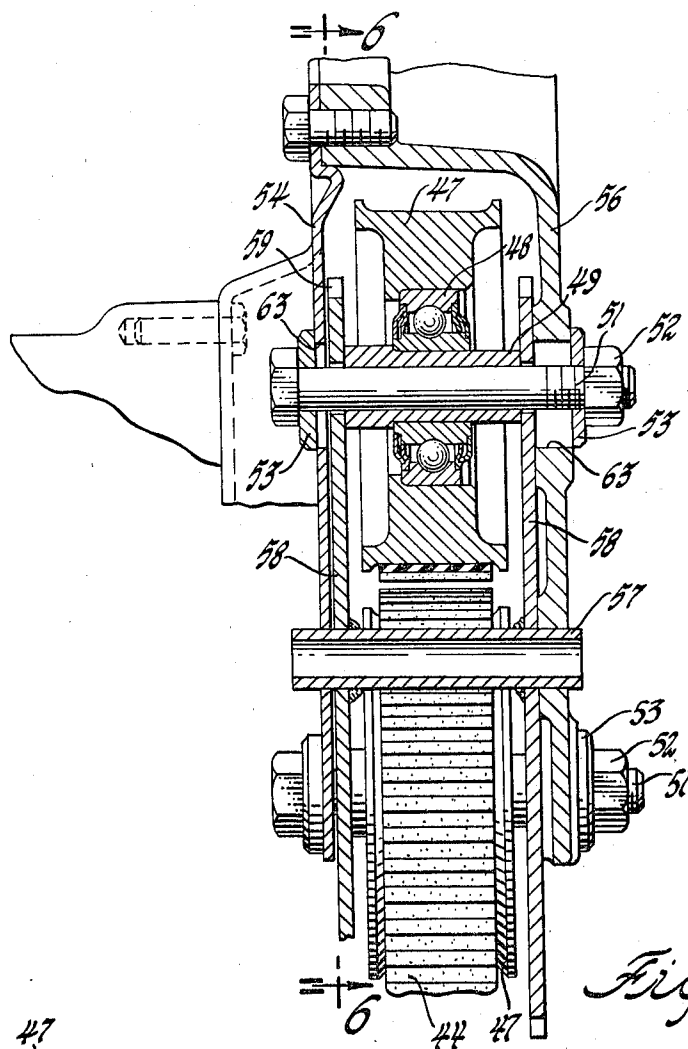


Fig. 5

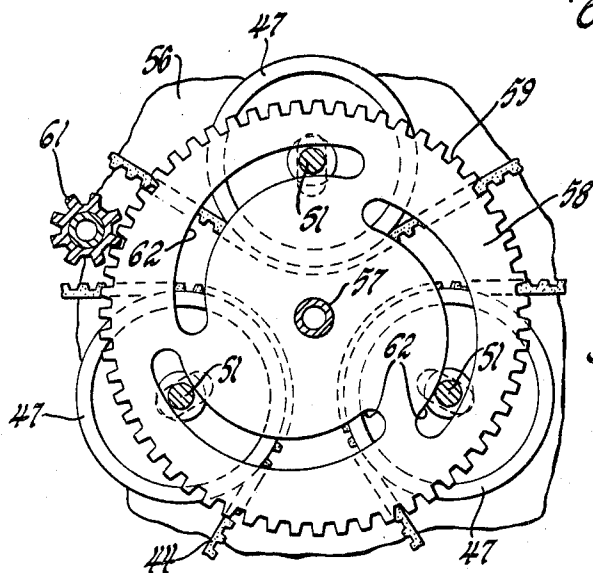


Fig. 6

INVENTOR.

John Z. DeLorean

BY

Robert J. Outland

ATTORNEY

Jan. 21, 1969

J. Z. DE LOREAN

3,422,806

INTERNAL COMBUSTION ENGINE

Filed July 3, 1967

Sheet 4 of 4

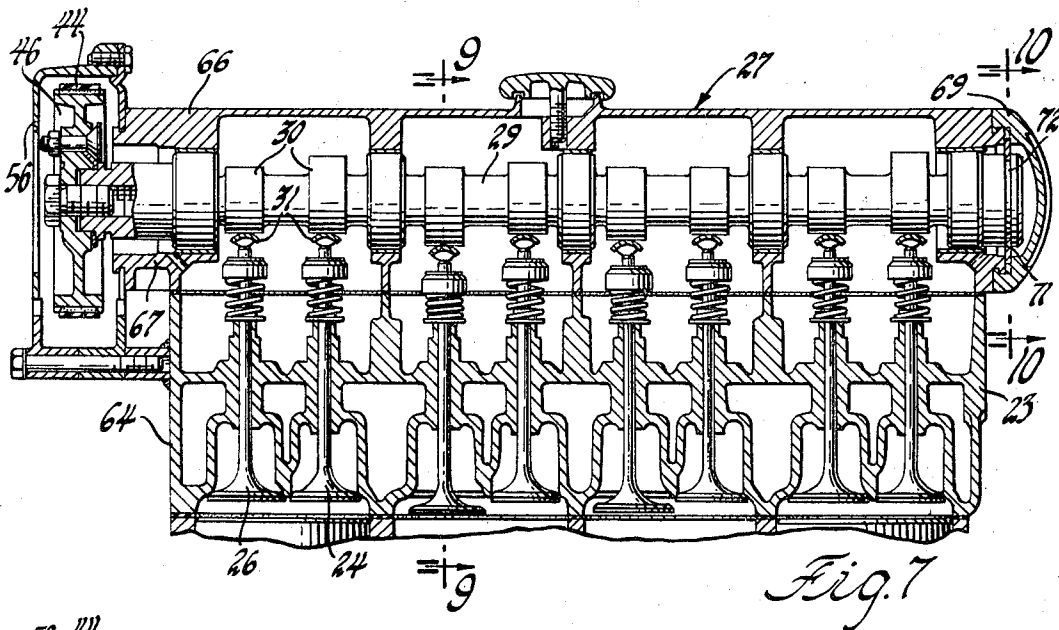


Fig. 7

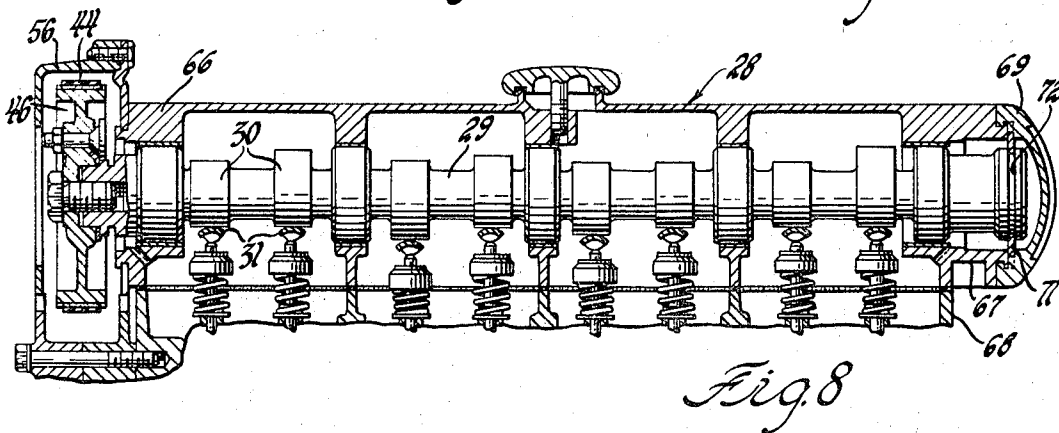


Fig. 8

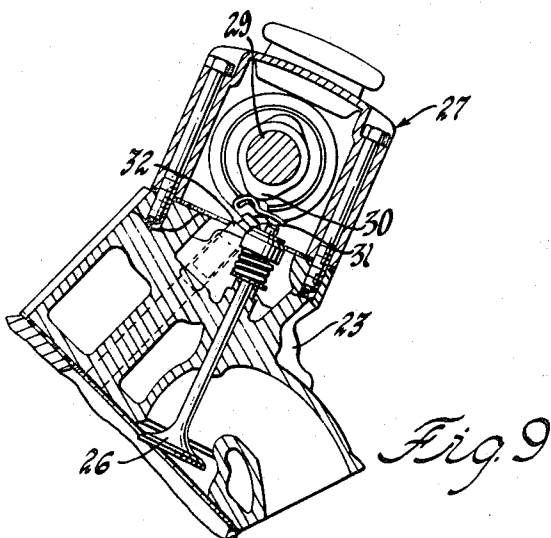


Fig. 9

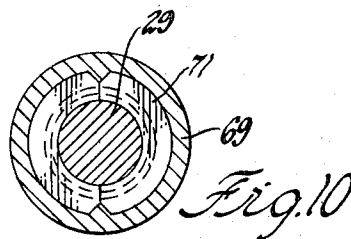


Fig. 10

INVENTOR

John Z. DeLorean

BY

Robert J. Outland

ATTORNEY

1

3,422,806

INTERNAL COMBUSTION ENGINE

John Z. De Lorean, Birmingham, Mich., assignor to
General Motors Corporation, Detroit, Mich., a corporation of Delaware

Filed July 3, 1967, Ser. No. 650,973

U.S. Cl. 123—195

10 Claims

Int. Cl. F02b 75/22; F01l 1/04

ABSTRACT OF THE DISCLOSURE

A V-type internal combustion engine includes overhead camshafts carried in interchangeably reversible cylinder head covers and driven from the crankshaft through an intermediate shaft centrally mounted above the crankshaft in the position commonly occupied by the camshaft of conventional push rod type overhead valve engines. The intermediate shaft is driven from the crankshaft through a front-mounted chain drive and in turn drives the camshafts through a rear-mounted cog belt drive. The cog belt drive includes novel belt tensioning means which utilize three pulleys that are radially adjustable with respect to a central axis and move together to equalize tension adjustments of the three belt runs. The pulleys are arranged to provide maximum wrap-around of the cog belts in relation to the drive and driven pulleys of the drive arrangement.

SPECIFICATION

This invention relates to internal combustion engines and more particularly to an arrangement for an engine of the overhead camshaft type having novel means for driving and supporting the engine camshafts. In its more particular aspects, the invention contemplates an engine having the following features:

(1) A camshaft drive arrangement wherein the crankshaft drives an intermediate shaft through a front-mounted chain drive and the intermediate shaft extends the length of the engine and drives the camshafts through a rear-mounted cog belt drive or the like;

(2) A camshaft drive belt tensioning arrangement for use with the camshaft drive of V-type engines and the like; and

(3) Interchangeable camshaft supporting cylinder head covers arranged for reversible use on either bank of an overhead camshaft V-type engine.

As the demand increases for higher horsepower outputs from automotive engines for various applications, it is natural for automotive engineers to consider the use of overhead camshaft arrangements which offer the advantage of reduced valve train inertia thereby permitting satisfactory engine operation at higher speeds and resulting in the ability to obtain higher horsepower output than conventional slower running engines of the same size; for example, of the type having conventional push rod and rocker arm valve gear. In view, however, of the lower cost of components for the conventional push rod type construction in which the camshaft is mounted in the engine block and the large production and satisfactory usage of such engines in many applications, it is desirable to design higher output overhead camshaft engines to utilize, to the greatest degree possible, the parts and production tooling available for use in and for the manufacture of the conventional engines. At the same time, an overhead camshaft arrangement must be adequate for the drive requirements of the engine overhead camshafts and should, at the same time, be arranged for efficient and compact installation in engine compartments of limited space and predetermined shape, such as conventional vehicle engine compartments. Furthermore, the cost of

2

such a design will be reduced if the number of special parts required is held to a minimum by the use of dual purpose components for similar applications.

The present invention meets these requirements by the provision of an overhead camshaft engine adapted from a conventional engine design and arranged to use a cylinder block sufficiently similar to that of a conventional overhead valve engine that it may be machined from the same casting and utilize substantially the same tooling as the conventional engine block. Additionally, while special cylinder heads and camshaft carrying covers are required, these are both arranged as interchangeable units to be utilized on either bank of the engine. Due to the normal offset of the cylinder banks and the required alignment of drive pulleys for the overhead camshafts, the reversibility of the camshaft carrying covers requires provision of a special extension portion which extends oppositely on the two banks so as to bring the ends into transverse alignment. In addition, the practical design of a suitable belt drive includes a novel tension adjusting arrangement which permits maximum power transmission through the belt by providing contact of the belt with the driving and driven pulleys of greater than 180° each to prevent slipping at high loads and at the same time provides equal adjustment of all three legs of the triangular belt arrangement at the same time.

These and other advantages of the present invention will be more clearly understood from the following description of a preferred embodiment of the invention selected for purposes of illustration and referring to the drawings wherein:

FIGURE 1 is a cross-sectional view of a V-type internal combustion engine having an overhead camshaft arrangement according to the invention;

FIGURE 2 is a fragmentary cross-sectional view of the engine of FIGURE 1 showing one type of drive pulley mounting arrangement;

FIGURE 3 is a rear end view of the engine of FIGURE 1 looking in the direction indicated by the arrows 3—3 of FIGURE 1;

FIGURE 4 is an enlarged view of a portion of FIGURE 3 partially broken away to disclose components of the belt tightening means;

FIGURE 5 is a cross-sectional view taken generally in the plane indicated by the line 5—5 of FIGURE 4;

FIGURE 6 is an interior view of the tensioner adjusting means taken generally in the plane indicated by the line 6—6 of FIGURE 5;

FIGURE 7 is a cross-sectional view of the right bank cylinder head and cover assembly taken generally in the plane indicated by the line 7—7 of FIGURE 3;

FIGURE 8 is a cross-sectional view of the left bank cylinder head and cover assembly taken generally in the plane indicated by the line 8—8 of FIGURE 3;

FIGURE 9 is a transverse cross-sectional view of the right bank cylinder head and cover assembly taken generally in the plane indicated by the line 9—9 of FIGURE 7; and

FIGURE 10 is a cross-sectional view showing the camshaft thrust locking means taken generally in the plane indicated by the line 10—10 of FIGURE 7.

Referring with more particularity to the drawings, numeral 12 generally indicates an internal combustion engine having a cylinder block 13 including a pair of angularly disposed banks of cylinders 14 and 16 joined at their lower ends by an integrally formed crankcase portion 17 which forms a crankcase cavity closed by a conventional oil pan 18. Rotatably journaled against the lower portion of the block is a crankshaft 19 having a plurality of throws 21 on which are received pairs of connecting rods 22 alternately connected with pistons in

the right and left bank cylinders respectively in the usual manner. Mounted on the upper ends of the cylinder block are cylinder heads 23 carrying aligned pairs of inlet and exhaust valves 24 and 26 respectively which control the flow of fluids to and from the engine cylinders in a conventional manner.

Secured on upper surfaces of the cylinders heads are right and left cover assemblies generally indicated by numerals 27 and 28 respectively. Cover assemblies 27 and 28 rotatably journal overhead camshafts 29 which carry cams 30. The cams 30 engage rocker arms 31 which pivot about hydraulic lash adjusting supports 32 carried by the cylinder heads and engage the stems of valves 24, 26 for actuating the valves in a known manner.

Camshaft drive arrangement

In order to provide for driving the overhead camshafts from the crankshaft, a novel camshaft drive arrangement is provided. The drive includes a chain 33 extending between a front-mounted crankshaft sprocket 34 and a driven sprocket 36 carried on the front end of a longitudinally extending shaft 37 and supporting a fuel pump drive eccentric 35. Shaft 37 is carried in bearings located centrally of the engine block in the position in which the camshaft of a conventional push rod type overhead valve engine is usually located and shaft 37 may replace such a camshaft in a substantially conventional cylinder block.

The shaft 37 extends longitudinally through the cylinder block and carries at its rear end distribution drive means 40 and a drive pulley 38 which is secured to a slotted end portion 39 of the shaft by a segmental key 41 retained in an annular recess 42 of the pulley by a screw 43. Pulley 38 drives a cog type belt 44 which engages the outer surface of the pulley and in turn the outer surfaces of driven pulleys 46 carried on the rear ends of the overhead camshafts 29 and drivingly secured thereto.

Thus, the camshaft drive takes advantage of the central shaft provision of conventional cylinder blocks to permit a drive from the front of the camshaft to the intermediate shaft 37 and from the rear of shaft 37 to the rear of the camshafts 29. This has the advantage of moving the excess height caused by the driven pulleys of the overhead camshaft drive to the rear of the engine which, due to the backwardly tilted mounting which is conventional in automotive vehicles, permits the front of the engine to be kept as low as possible and thus allows mounting of the engine with a lower vehicle hood line than would otherwise be possible. In addition, the arrangement leaves free the rear end of the crankshaft from drive pulleys or sprockets which might otherwise extend the length or require additional bearing support at the connection of the engine to the usual transmission or other driven component.

Belt tensioning means

Experience with overhead camshaft drives, particularly those with cog belts, shows that the greatest loads can be transmitted if the belt is wrapped around the drive and driven pulleys as far as possible so that the greatest number of belt and pulley teeth are in engagement at all times. The high tensile strength of belts in current use permits the transmission of extremely high loads. These loads have been found to be limited in part by the forces acting on the individual belt teeth which for design reasons are made relatively shallow. Thus, if the individual tooth forces are too high, the belt may stretch slightly permitting the teeth to slip with resulting mistiming of the driving and driven shafts.

This problem is overcome with the instant invention by the provision of unique belt tensioning means which comprise three equiangularly disposed pulleys 47 carried within the triangular space formed by drive pulley 38 and driven pulleys 46, one pulley 47 engaging each of the

lengths of belt 44 extending between two of the adjacent pulleys 38, 46. Pulleys 47 are rotatably carried on ball bearings 48 which are in turn carried by sleeves 49 on bolts 51, the bolts 51 are locked by nuts 52 and washers 53 to inner and outer cover members 54 and 56 respectively which form a housing covering the upper portions of the camshaft drive arrangement.

Centrally located between the pulleys and extending through cover members 54 and 56 is a tubular member 57 to which are welded a pair of plates 58 having toothed peripheries 59. The toothed peripheries engage the mating teeth of a gear wheel 61 which is also carried by cover members 54 and 56 and includes means (not shown) by which it may be engaged by a suitable manual tool and turned in order to rotate the plates 58 and tubular member 57 within the cover assembly. Both plates 58 also include three spiral slots 62 through which bolts 51 project. In addition, bolts 51 extend through slots 63 in cover members 54 and 56, the slots extending radially of central tubular member 57.

Adjustment of belt tension is accomplished by manual rotation of gear 61 by a suitable tool which in turn rotates plates 58 causing the edges of spiral grooves 62 to force bolts 51 inwardly or outwardly as the case may be within housing slots 63. When adjustment is complete, nuts 52 are tightened to fix the position of the pulleys on the cover members 54 and 56. With this arrangement, all three pulleys 47 are moved simultaneously so that belt stretch is taken up on all three legs of the triangular pulley drive at the same time thereby retaining the same relative timing between the pulleys under all belt length conditions. In addition, the positioning of the adjuster within the triangular limits of the three pulleys permits a maximum wrap around of the belt with respect to each of the pulleys, the wrap around being substantially greater than 180° in each case. Thus, the maximum possible force may be transmitted through a particular size of cog belt.

Cylinder head cover reversibility

As was previously mentioned, cylinder banks 14 and 16 are longitudinally offset due to the staggering of right and left bank connecting rods on the same crankshaft journals. As is common practice, the cylinder heads 23 mate with the cylinder banks and thus provide offset rear surfaces. In order, however, that the driven pulleys 46 of camshaft 29 may be aligned and the cover assembly formed by members 54, 56 may be efficiently supported, aligned support surfaces are necessary; thus, right and left cover assemblies 27 and 28 are arranged to provide the necessary mounting surfaces.

For this reason, right bank assembly 27 includes a portion extending beyond the rear wall 64 of the cylinder head. In order to utilize the same cover member 66 on both banks, an extension 67 is provided on member 66 which extends rearwardly of rear wall 64 of the right bank. When the cover is utilized on the left bank, it is reversed so that the extension extends forwardly of front wall 68. The opposite ends of member 66 are machined in an identical manner so as to alternately receive the components of cover assembly 54 and 56 at their rear ends and separate cap members 69 at their front ends. Split retainers 71, held by the cap members, engage grooves 72 in the respective camshafts to prevent longitudinal movement of the shafts.

While the various features of my invention have been disclosed in conjunction with a specific embodiment chosen for purposes of illustration, it is apparent that numerous changes could be made within the scope of the inventive concepts involved and it is, accordingly, intended that the invention not be limited except by the language of the following claims.

I claim:

1. An internal combustion engine having a cylinder block journaling a crankshaft, a cylinder head carried on said cylinder block and supporting a camshaft spaced

from and parallel with said crankshaft and means drivingly interconnecting said crankshaft with said camshaft, said means comprising the improvement of

an intermediate shaft carried for rotation in said cylinder block parallel to and substantially coextensive with said crankshaft and said camshaft,

first positive drive means near the front end of said engine and drivingly connecting the front ends of said crankshaft and said intermediate shaft and

second positive drive means near the rear end of said engine and drivingly connecting the rear ends of said intermediate shaft and said camshaft, said second positive means comprising toothed pulleys on said intermediate shaft and on said camshaft with a toothed belt drivingly interconnecting said pulleys.

2. The combination of claim 1 wherein said cylinder head mounts a valve cover and said camshaft is journaled in said valve cover.

3. An internal combustion engine having a cylinder block including a pair of longitudinally extending banks of cylinders arranged in a V, a crankshaft journaled in said block adjacent the inner ends of said cylinder banks, a cylinder head closing the outer ends of each of said banks and a valve actuating camshaft carried by each of said cylinder heads,

means drivingly connecting said crankshaft and said camshafts, said means comprising the improvement of

an intermediate shaft rotatably journaled in said block and centrally disposed between said cylinder banks and between said crankshaft and said camshafts, said intermediate shaft extending parallel to and substantially coextensive with said crankshaft and said camshafts,

first positive drive means near the front of said engine and drivingly connecting the front ends of said crankshaft and said intermediate shaft and

second positive drive means near the rear end of said engine and drivingly connecting the rear ends of said intermediate shaft and said camshafts, said second positive drive means comprising toothed pulleys on said intermediate shaft and on said camshafts and a toothed belt drivingly interconnecting said pulleys.

4. The combination of claim 3 wherein said cylinder heads each mount a longitudinally extending valve cover and said camshafts are journaled in said valve covers.

5. The combination of claim 4 wherein said first positive drive means comprises toothed wheels on said crankshaft and intermediate shaft and timing chain means interconnecting said toothed wheels, said intermediate shaft also carrying gear means engaging distributor drive means and an eccentric engaging fuel pump drive means.

6. An internal combustion engine having a cylinder block formed from a casting machinable on tooling used in the production of a line of overhead valve engines having the valves actuated through push rods from a single camshaft, said cylinder block having means for receiving a crankshaft and means for receiving an intermediate shaft for rotation in the position normally occupied by the camshaft of said line of overhead valve engines, said engine further including

a crankshaft received in said crankshaft receiving means,

a camshaft spaced from and parallel with said crankshaft,

an intermediate shaft carried for rotation in the intermediate shaft receiving means of said block and extending parallel to and substantially coextensive with said crankshaft and said camshaft,

first positive drive means near the front end of said engine and drivingly connecting the front ends of said crankshaft and said intermediate shaft and

second positive drive means near the rear end of said engine and drivingly connecting the rear ends of said intermediate shaft and said camshaft.

7. The combination of claim 6 wherein said engine includes a cylinder head carried on said cylinder block and supporting said camshaft and said second positive drive means comprises toothed pulleys on said intermediate shaft and on said camshaft and a toothed belt drivingly interconnecting said pulleys.

8. The combination of claim 7 wherein said cylinder head mounts a valve cover and said camshaft is journaled in said valve cover.

9. An internal combustion engine having a cylinder block formed from a casting machinable on tooling used in the production of a line of overhead valve V-type engines having the valves actuated through push rods from a single camshaft, said cylinder block including a pair of longitudinally extending banks of cylinders arranged in a V and having means for receiving a crankshaft and means for receiving an intermediate shaft for rotation in the position normally occupied by the camshaft of said line of overhead valve engines, said engine further including

a crankshaft journaled in said crankshaft receiving means adjacent the inner ends of said cylinder banks, a cylinder head closing the outer ends of each of said cylinder banks,

a valve actuating camshaft carried by each of said cylinder heads,

an intermediate shaft rotatably journaled in said intermediate shaft receiving means and extending parallel to and substantially coextensive with said crankshaft and said camshafts,

first positive drive means near the front end of said engine and drivingly connecting the front ends of said crankshaft and said intermediate shaft and

second positive drive means near the rear end of said engine and drivingly connecting the rear ends of said intermediate shaft and said camshafts.

10. The combination of claim 9 wherein said second positive drive means comprises toothed pulleys on said intermediate shaft and on said camshafts and a toothed belt drivingly interconnecting said pulleys.

References Cited

UNITED STATES PATENTS

1,173,105	2/1916	Fekete.	
2,001,866	5/1935	Caminez.	
2,466,256	4/1949	Messner.	
2,831,359	4/1958	Carle	123—90.10
2,963,007	12/1960	Leach.	
3,352,293	11/1967	Hulten	123—90

WENDELL E. BURNS, *Primary Examiner.*

U.S. Cl. X.R.

123—55, 90