

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
20 October 2005 (20.10.2005)

PCT

(10) International Publication Number
WO 2005/097003 A1

(51) International Patent Classification⁷: A61F 2/24

(21) International Application Number: PCT/US2005/009863

(22) International Filing Date: 24 March 2005 (24.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 10/811,565 29 March 2004 (29.03.2004) US

(71) Applicant (for all designated States except US): EDWARDS LIFESCIENCES CORPORATION [US/US]; One Edwards Way, Irvine, CA 92614 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): MARQUEZ, Salvador [US/US]; 20 Parterre Avenue, Foothill Ranch, CA 92610 (US).

(74) Agents: CONDINO, Debra, D. et al.; Edwards Lifesciences LLC, One Edwards Way, Irvine, CA 92614 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CII, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PI, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:
— with international search report

[Continued on next page]

(54) Title: CONTROLLED SEPARATION HEART VALVE FRAME



WO 2005/097003 A1

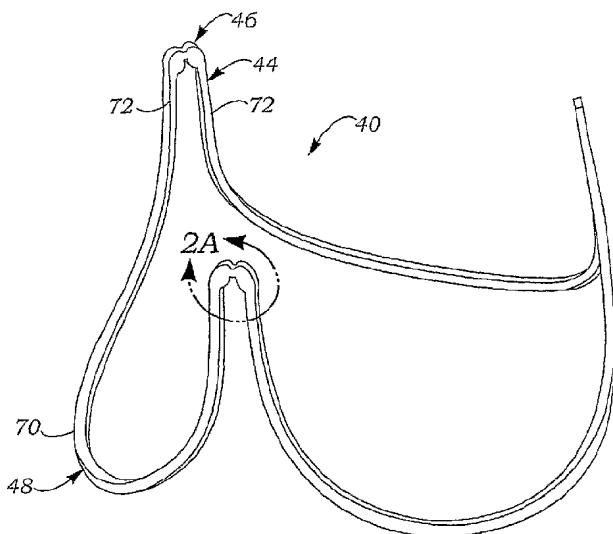

(57) Abstract: A highly flexible prosthetic heart valve having an internal leaflet support frame that is designed to separate into individual cusps after implantation. The leaflet support frame (or "stent" or "wireform") has a plurality of alternating cusps (26) on an inflow end and commissures (44) on an outflow end. The cusps of flexible leaflets attach around the support frame cusps. The support frame (40) provides structural rigidity during implantation, but each support frame commissure has a point of weakness (76) that is designed to fracture upon repeated relative movement of the cusps after implantation such that the support frame cusps separate. Because of the flexible nature of the heart valve, after the cusps separate the implanted heart valve does not significantly impede the natural motions of the annulus or adjacent vessel walls. The support frame may be a homogeneous material such as Nitinol with the point of weakness being a narrowing at the commissure tips. The commissure tips can include enlarged regions adjacent the point of weakness that help prevent the separated ends from poking through surrounding fabric.



- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONTROLLED SEPARATION HEART VALVE FRAME

Field of the Invention

5 [0001] The present invention pertains to an internal support frame for a prosthetic heart valve and, more particularly, to a leaflet support frame that separates into cusps after implantation.

Background of the Invention

10 [0002] Prosthetic heart valves are used to replace damaged or diseased heart valves. In vertebrate animals, the heart is a hollow muscular organ having four pumping chambers: the left and right atria and the left and right ventricles, each provided with its own one-way outflow valve. The natural heart valves are identified as the aortic, mitral (or bicuspid), tricuspid and pulmonary valves. The 15 valves of the heart separate chambers therein, and are each mounted in an annulus therebetween. The annuluses comprise dense fibrous rings attached either directly or indirectly to the atrial and ventricular muscle fibers. In a valve replacement operation, the damaged leaflets are typically excised and the annulus sculpted to receive a replacement valve.

20 [0003] The four valves separate each ventricle from its associated atrium, or from the ascending aorta (left ventricle) or pulmonary artery (right ventricle). After the leaflets have been excised, the annulus generally comprises a ledge extending into and defining the orifice between the respective chambers. Prosthetic valves may attach on the upstream or downstream sides of the annulus 25 ledge, but preferably reside outside of the ventricles to avoid interfering with the large contractions therein. Thus, for example, in the left ventricle a prosthetic valve is preferably positioned on the inflow side of the mitral valve annulus (toward the left atrium), or on the outflow side of the aortic valve annulus (toward the ascending aorta).

30 [0004] One of the primary types of heart valve prostheses is a tissue-type or “bioprosthetic” valve which is constructed with natural-tissue valve leaflets (whole valve, e.g., porcine, or a plurality of leaflets, e.g., from bovine equine or

other pericardium) which function much like a natural human heart valve, imitating the natural action of the flexible heart valve leaflets which seal against each other to ensure the one-way blood flow. Synthetic leaflets have also been proposed, and thus the term "flexible leaflet valve" refers to both natural and 5 artificial "tissue-type" valves. Two or more flexible leaflets are mounted within a peripheral support structure that usually includes posts or commissures extending in the outflow direction to mimic natural fibrous commissures in the native annulus. Components of the valve are usually assembled with one or more biocompatible fabric (e.g., Dacron) coverings, and a fabric-covered sewing ring is 10 typically provided on the inflow end of the peripheral support structure.

[0005] In most bioprosthetic-type valves, a metallic or polymeric structure provides base support for the flexible leaflets, which extend therefrom. One such support is an elastic "support frame," sometimes called a "wireform" or "stent," which has a plurality (typically three) of large radius cusps supporting the 15 cusp regions of each flexible leaflet. The ends of each pair of adjacent cusps converge somewhat asymptotically to form upstanding commissures that terminate in tips, each extending in the opposite direction as the arcuate cusps and having a relatively smaller radius. The support frame typically describes a conical tube with the commissure tips at the small diameter end. This provides 20 an undulating reference shape around which a fixed edge of each leaflet attaches (via components such as fabric and sutures) much like the natural fibrous skeleton in the aortic annulus. One example of the construction of a flexible leaflet valve is seen in U.S. Patent No. 5,928,281 to Huynh, et al. (Edwards Lifesciences, Corp., Irvine, CA), in which the exploded view of Fig. 1 illustrates 25 a fabric-covered wireform 54 and a fabric-covered support stent 56 on either side of a leaflet subassembly 52.

[0006] Because of the rigidity of the material used in the support frame, conventional valves have a diameter that is minimally affected by the natural motion of the heart orifice. In the aortic position, the commissures extend in the 30 downstream direction a spaced distance from the walls of the downstream aortic wall. Movement of the aortic wall or sinuses does not substantially affect

movement of the cantilevered commissures, though fluid flow and pressures generated by movement of the walls ultimately does cause the commissures to dynamically flex to some extent (i.e., they are cantilevered downstream in the aorta). Natural dilatation of the annulus is therefore restricted, imposing an 5 artificial narrowing of the orifice, and increasing the pressure drop therethrough.

[0007] Some flexible leaflet prosthetic heart valves are designed to be relatively more flexible. For example, U.S. Patent No. 4,106,129 to Carpentier, et al. discloses a heart valve with a compliant supporting stent capable of annular deformation. The stent is made with a single flexible wire pre-formed to define 10 inverted U-shaped commissures supports merging smoothly with connecting arcuate portions. The heart valve in Carpentier, et al. is capable of yielding to a limited extent in response to forces which tend to alter the configuration and circumference of the supporting stent. Figs. 9 and 10 of the '129 Patent illustrate aortic and mitral embodiments, respectively, with sewing rings adapted to attach 15 to the particular annulus.

[0008] More recently, U.S. patent No. 6,558,418 to Carpentier, et al. discloses a highly flexible tissue-type heart valve having a structural stent in a generally cylindrical configuration with cusps and commissures that are permitted to move radially. The stent commissures are constructed so that the 20 cusps are pivotably or flexibly coupled together at the commissures to permit relative movement therebetween. The prosthetic valve of the '418 patent is designed such that alternating peripheral portions are attached to the aortic annular region and the sinus region, and the flexible valve accommodates the in-and-out movements of both regions. The structural stent is useful during 25 implantation to maintain the valve shape for proper suturing, and to provide a barrier to leaflet placations. However, once implanted, the structural stent still provides an impediment to complete flexibility.

[0009] Accordingly, there is a need for a highly flexible heart valve that responds to and does not significantly impede the natural motions of the annulus 30 and adjacent vessel walls but which also maintains a desired shape during implantation

Summary of the Invention

[0010] The present invention provides an improved leaflet support frame for a prosthetic heart valve that maintains its shape during implantation but 5 eventually separates into a plurality of cusps thereafter. The support frame includes alternating cusps and commissures with a plurality of flexible leaflets secured along their cusp edges to the frame, one per frame cusp. The frame commissures are designed to fracture at a period after implantation such that the cusps move substantially independently of each other. In contrast to earlier 10 biodegradable cusp connections, the frame commissures have substantially the same material stiffness in bending as the frame cusps so as to substantially limit the possibility of the valve cusps prematurely breaking free of each other from the inevitable manipulation of the valve during implantation.

[0011] In accordance with one embodiment, a support frame for a flexible 15 leaflet prosthetic heart valve is provided that has a plurality of cusps each sized and shaped to support a cusp of a flexible leaflet of the heart valve, and a plurality of commissures, one between each adjacent pair of cusps. The commissures and cusps have substantially the same material stiffness in bending, but the commissures each have a point of weakness designed to fracture upon 20 repeated relative movement of the cusps after implantation thereby permitting the cusps to move substantially independently of each other.

[0012] In an alternative embodiment, the support frame comprises a plurality of cusps sized and shaped to support cusps of flexible leaflets of the heart valve, and a plurality of commissures, one between each adjacent pair of 25 cusps. The commissures and cusps are formed integrally of a homogeneous material and the commissures each have a point of weakness designed to fracture upon repeated relative movement of the cusps after implantation thereby permitting the cusps to move substantially independently of each other. Preferably, the support frame is made of a flexible material such as Nitinol.

30 [0013] Preferably, each cusp of the support frame transitions into two commissure regions, and wherein the point of weakness at the commissures

comprises a frangible bridge between adjacent commissure regions. The frangible bridge may comprise a narrow portion of the support frame relative to adjacent portions, or may be a notch. Desirably, the commissure regions terminate in enlarged ears on either side of the frangible bridge. The support 5 frame may be covered with a biocompatible fabric, and the enlarged ears are sized to prevent the commissure regions from poking through the fabric once the frangible bridge has fractured.

[0014] The invention also encompasses a method of replacement of a natural heart valve with a flexible leaflet prosthetic heart valve. The method 10 includes providing a flexible leaflet prosthetic heart valve having an internal support frame with alternating cusps and commissures, the cusps of the flexible leaflets being attached along the support frame cusps. The commissures of the internal support frame are designed to fracture upon repeated relative movement of the cusps after implantation such that the support frame cusps can move 15 substantially independently of each other. The method includes implanting the flexible leaflet prosthetic heart valve.

[0015] Desirably, the internal support frame is made of a continuous flexible element which will withstand and spring back from substantial compressive forces imparted thereon during implantation. The step of implanting 20 the flexible leaflet prosthetic heart valve may comprise compressing the valve and delivering it to the site of implantation through a tube in a less-invasive procedure. In one version, the flexible leaflet prosthetic heart valve is designed to be implanted in the aortic position and further includes a sewing band that follows the alternating cusps and commissures of the support frame. The step of 25 implanting the heart valve therefore comprises attaching the sewing band up and down the fibrous cusps and commissures of the natural aortic annulus and ascending aorta. In accordance with an exemplary embodiment, the commissures of the internal support frame are designed to fracture from between approximately two days and two weeks after implantation.

Brief Description of the Drawings

[0016] Fig. 1 is an exploded view of components of a prosthetic heart valve of the present invention;

[0017] Fig. 2 is a perspective view of an exemplary leaflet support frame 5 of the present invention seen from an outflow end;

[0018] Fig. 2A is an enlarged view of one of the commissure tips of the leaflet support frame of Fig. 2; and

[0019] Fig. 3 is a perspective view of the leaflet support frame seen from an inflow end.

10

Description of the Preferred Embodiments

[0020] The present invention provides a highly flexible prosthetic heart valve that is primarily suited for implantation in the aortic position. In particular, the prosthetic heart valve has an attachment or sewing band that follows the 15 undulating shape of an internal support frame. As such, the sewing band may be attached (e.g., with sutures) up and down the fibrous cusps and commissures of the natural aortic annulus and ascending aorta. It should be understood, however, that the characteristics of the heart valve of the present invention may also be suitable for use in other valve locations, such as in the tricuspid position.

[0021] The prosthetic heart valve is highly flexible and includes an internal frame that supports a plurality of flexible leaflets providing occluding surfaces for the valve. The internal frame is designed to break apart into separate cusps, one per leaflet, after implantation to render the valve even more flexible. One example of construction of a prosthetic heart valve is shown and described 25 below, although it should be understood that the invention is not limited by a particular valve construction. Any valve that has flexible leaflets supported around their periphery may include an internal frame that separates into parts after implantation. A particular preferred construction of a flexible heart valve, aside from substitution of the separable internal support frame described herein, 30 is disclosed in U.S. Patent No. 6,558,418 to Carpentier, et al., which is expressly incorporated herein by reference.

[0022] As mentioned above, the term “flexible leaflet” refers to any valve leaflet that flexes and “coapts” against the other leaflets to close the valve, much like the native leaflets. Because of the separable internal support frame and relative cusp movements, at least the coapting edges of the leaflets must be 5 somewhat flexible to accommodate the motion of the peripheral support structure. Preferably, the flexible leaflets are separate synthetic (e.g., polymer) or natural (e.g., pericardium) leaflets attached to the peripheral support structure. However, whole natural valves such as xenograft porcine valves may be used. Also, it is conceivable that a synthetic leaflet that is partly rigid but flexible along 10 its coapting edge may be used.

[0023] Fig. 1 illustrates in exploded view primary components of an exemplary prosthetic heart valve 20 of the present invention. The heart valve 20 includes a subassembly of flexible leaflets 22, preferably comprising three separate leaflets 24a, 24b, 24c. Each leaflet includes an arcuate cusp edge 26 on an inflow end opposite a free or coapting edge 28 on an outflow end. In the exemplary embodiment, a pair of tabs 30 extend outward from either end of the coapting edge 28. As explained in U.S. Patent No. 6,558,418, such tabs can be used to secure the leaflets 24 to commissures of a peripheral support frame in a manner that reduces stress in the attachment sutures. Each tab on the leaflets is 15 juxtaposed against a tab on an adjacent leaflet so that there are three pairs of contacting tabs extending outward approximately 120 degrees apart in the leaflet subassembly 22.

[0024] The leaflet subassembly 22 (or separate leaflets 24) is held in place within the valve 20 by a support structure comprising a cloth-covered 20 support frame 40 and a sewing band 42. The sewing band 42 is also desirably covered with cloth or some other material that aids connectivity and/or biocompatibility. The support frame 40 and sewing band 42 are similarly shaped with a plurality, preferably three, posts or commissures extending in an outflow direction and a plurality of arcuate cusps on an inflow end. As can be seen from 25 Fig. 1, the arcuate cusps of the support structure correspond to be leaflet cusps 26.

[0025] The exemplary leaflet support frame 40 (shown without its cloth cover in Figs. 2 and 3) includes three upstanding commissures 44a, 44b, 44c terminating in tips 46a, 46b, 46c, and three arcuate cusps 48a, 48b, 48c. Although not clearly shown, the surface of revolution defined by the leaflet support frame 40 is desirably a cylinder or more preferably, a cone, with the commissure tips 46 being disposed slightly radially closer together than the apices of the arcuate cusps 48. A cloth cover seen in Fig. 1 closely surrounds the support frame 40 and preferably provides an outwardly extending flap 50 that is used to secure the valve components together. The material of the cloth cover may be any biocompatible fabric, preferably a polymer fabric such as polyethylene terephthalate (PET). Greater details of the leaflet support frame 40, a primary subject of this invention, are provided below.

[0026] The sewing band 42 also has three upstanding commissures 54a, 54b, 54c terminating in tips 56a, 56b, 56c, and three arcuate cusps 58a, 58b, 58c. A variety of suture-permeable materials may be used, although a molded silicone core covered with a fabric (e.g., PET) is preferred.

[0027] When assembled, the leaflets 24 are sandwiched between and attached to both the support frame 40 and sewing band 42. Sutures are typically used to join the outwardly projecting flap 50 of the support frame 40 through the cusp edges 26 of the leaflets 24 and through the cloth-covered sewing band 42. Although not shown, each pair of leaflet tabs 30 projects outward through gaps 60 in the support frame 40 and may be folded away from one another so as to lie to the inside of each of the commissures 54 of the sewing band 42 in the assembled valve 20. Again, although various construction details may be modified, each leaflet 24 is desirably generally continuously attached around the support frame 40 along the cusp edge 26 and at the two tabs 30. The coapting edge 28 remains free.

[0028] Now with reference to Figs. 2 and 3, the support frame 40 may be fabricated as a single, continuous, integral, wire-like element 70 of a homogeneous material. One particularly desirable material is Nitinol, and a preferred fabrication technique is to laser-cut a 2-dimensional blank from a sheet,

or a 3-dimensional blank from a tube, and then bend and heat treat the blank into the illustrated shape. Further details on this technique can be seen in U.S. patent application No. 10/423,019, filed April 24, 2003, the disclosure of which is expressly incorporated herein by reference. Using such techniques, the cross-
5 section of the element 70 will typically be square or rectilinear, although electro-polishing is desirably performed to microscopically round the corners.

[0029] Nitinol is preferred because of its biocompatibility combined with flexible qualities. That is, the support frame 40 must be relatively stiff to maintain the valve shape during implantation when the surgeon is attempting to
10 manipulate and attach the valve into place. At the same time, the support frame 40 should be capable of springing back from the sometimes strong forces experienced during the implantation procedure. Alternatively, the support frame 40 may be made of a single, continuous piece of an alloy of carbon, silicon, phosphorus, sulphur, chromium, nickel, beryllium, cobalt, iron, manganese and
15 molybdenum which is sold under the ELGILOY trade name by Elgiloy, L.P. of Elgin, Ill., U.S.A. Another potentially useful material is titanium or an alloy thereof. The support frame 40 could also be molded from a polymer, such as DELRIN, or any other biocompatible material exhibiting appropriate flexibility.

[0030] Fig. 2A is an enlargement of one of the commissure tips 46. In a
20 preferred embodiment, the cross-section of the wire-like element 70 is substantially constant around the entire support frame 40 except at the tips 46. Each arcuate cusp 48a, 48b, 48c transitions into a commissure region 72 adjacent to the tips 46. The commissure regions are generally linear and extend upward to an enlarged ear 74. Adjacent ears 74 join across a relatively weak point or
25 frangible bridge 76 at the center line of the commissure tip 46. The frangible bridge 76 comprises a narrowing of the cross-section of the elongated element 70 relative to the rest of the element. The bridge 76 is designed to fatigue and fracture after the valve is implanted so that the cusps 48 separate, or in other words, become free to move substantially independently of each other (though
30 they will preferably remain coupled via the sewing band 42 or surrounding fabric).

[0031] For a support frame 40 fabricated as a continuous Nitinol element, the bridge 76 desirably has a cross-section of approximately 0.015" (0.381 mm) in height (axial dimension) and 0.020" (0.508 mm) thickness (radial dimension). Although the length of the bridge 76 does impact the moment arm from the ears 74, and thus any stress applied thereto after implantation the length is relatively small (approximately the same as the height) and small changes will not greatly alter the stress. With this cross-section, the bridge 76 is designed to fatigue and fracture anywhere between about 2 days and 2 weeks after implantation (or equivalent number of cycles at a heart beat rate 1 Hz). Those of skill in the art will understand that depending on the material/construction and desired time to fracture, the specific dimensions of the bridge 76 may vary. In the illustrated embodiment, the frangible bridge 76 comprises a narrow length of material between the ears 72, but another technique is to provide a notch or other such feature that creates a stress point in the bridge.

[0032] An alternative construction process is to form three separate cusps and to connect them at the frangible bridges 76. To provide the benefits of the invention the connection should have a stiffness/rigidity similar to a bridge formed integrally with the cusps 48. That is, the commissure tips 46a, 46b, 46c should be relatively rigid at implant to prevent the arcuate cusps 48a, 48b, 48c from unduly pivoting with respect to one another. Of course, some cusp pivoting may occur due to the inherent flexibility of the support frame 40, just as long as the commissure tips 46a, 46b, 46c unduly do not increase that flexibility. For example, a welded connection between adjacent ears 74 might be designed to break some time after implantation. Alternatively, a separate member forming the bridge 76 might be connected at each end to the surrounding ears 74 by welding or threading, for example. It should be clear that there are various ways to fabricate a support frame 40 that has commissures and cusps with substantially the same material stiffness in bending but a point of weakness at each commissure designed to fracture upon repeated relative movement of the cusps after implantation such that the cusps separate.

[0033] In another aspect of the invention, the enlarged ears 74 help

prevent the separated cusps 48 of the support frame 40 from poking through the surrounding fabric. In a preferred embodiment, the enlarged ears 74 desirably have a radius of about 0.5-1.5 mm, preferably about 1.0 mm, to prevent fabric poke-through.

5 [0034] The present heart valve is used in a surgical method of replacing a natural heart valve. Any of the aforementioned heart valves are implanted in the appropriate location (e.g., in the aortic annulus and ascending aorta) using traditional open-chest surgery, or a less-invasive surgery such as a mini-thoracotomy, or even percutaneously. If the support frame 40 of the heart valve
10 is made of a highly flexible material such as Nitinol, the valve may be compressed to a relatively small package and inserted using a minimally-invasive technique, such as percutaneously through a catheter passed up through the femoral artery. Another technique that may be used is through a port access incision in the chest. One particularly advantageous aspect of the invention is
15 that the support frame allows for the bending of the frame at the commissure tips during implantation, but because it is a continuous or at least unitary piece, does not allow for relative axial motion of the commissures.

20 [0035] Once in position, the surgeon secures the valve to the surrounding anatomy using sutures, staples, or other such attachment structures as are known in the field. Depending on the technique used, the attachment structure may be manipulated manually, or via robotic assistance.

25 [0036] It will also be appreciated by those of skill in the relevant art that various modifications or changes may be made to the examples and embodiments described without departing from the intended scope of the invention. In this regard, the particular embodiments of the invention described herein are to be understood as examples of the broader inventive concept disclosed.

WHAT IS CLAIMED IS:

1. A support frame for a flexible leaflet prosthetic heart valve, comprising:

5 a plurality of cusps each sized and shaped to support a cusp of a flexible leaflet of the heart valve; and

a plurality of commissures, one each between each adjacent pair of cusps, the commissures each having a point of weakness designed to fracture upon repeated relative movement of the cusps after implantation such that the cusps move substantially independently of each other.

10

2. The support frame of claim 1, wherein the support frame is a single, continuous, element.

15 3. The support frame of claim 2, wherein the support frame is formed from a continuous, homogeneous material.

4. The support frame of claim 3, wherein the commissures and cusps have substantially the same material stiffness in bending prior to reaching the point of fatigue.

20

5. The support frame of claim 1, wherein the support frame is made of Nitinol.

25 6. The support frame of claim 1, wherein each cusp of the support frame transitions into two commissure regions, and wherein the point of weakness at the commissures comprises a frangible bridge between adjacent commissure regions.

30 7. The support frame of claim 6, wherein the frangible bridge comprises a narrow portion of the support frame relative to adjacent portions.

8. The support frame of claim 6, wherein the point of weakness comprises a notch.

9. The support frame of claim 6, wherein the commissure regions 5 terminate in enlarged ears on either side of the frangible bridge.

10. The support frame of claim 9, further including a biocompatible fabric covering the support frame, and wherein the enlarged ears are sized to prevent the commissure regions from poking through the fabric once the 10 frangible bridge has fractured.

11. A support frame for a flexible leaflet prosthetic heart valve, comprising:

15 a plurality of cusps sized and shaped to support cusps of flexible leaflets of the heart valve; and

a plurality of commissures, one each between each adjacent pair of cusps, the commissures and cusps being formed integrally of a homogeneous material and the commissures each having a point of weakness designed to fracture upon repeated relative movement of the 20 cusps after implantation whereby the cusps can move substantially independently of each other.

12. The support frame of claim 11, wherein the support frame comprises three cusps and three commissures.

25

13. The support frame of claim 11, wherein the support frame is made of Nitinol.

30

14. The support frame of claim 11, wherein each cusp transitions into two commissure regions, and wherein the point of weakness at the commissures

comprises a frangible bridge between adjacent commissure regions.

15. The support frame of claim 14, wherein the frangible bridge comprises a narrow portion of the support frame relative to adjacent portions.

5

16. The support frame of claim 14, wherein the point of weakness comprises a notch.

10 17. The support frame of claim 14, wherein the commissure regions terminate in enlarged ears on either side of the frangible bridge.

15 18. The support frame of claim 17, further including a biocompatible fabric covering the support frame, and wherein the enlarged ears are sized to prevent the commissure regions from poking through the fabric once the frangible bridge has fractured.

19. A method of replacement of a natural heart valve with a flexible leaflet prosthetic heart valve, comprising:

20 providing a flexible leaflet prosthetic heart valve having an internal support frame with alternating cusps and commissures, the cusps of the flexible leaflets being attached along the support frame cusps, the commissures of the internal support frame being designed to fracture upon repeated relative movement of the cusps after implantation such that the support frame cusps move substantially independently of each other;

25 and

implanting the flexible leaflet prosthetic heart valve.

30 20. The method of claim 19, wherein the internal support frame is made of a continuous flexible element which will withstand and spring back from substantial compressive forces imparted thereon during the implanting step.

21. The method of claim 19, wherein the step of implanting the flexible leaflet prosthetic heart valve comprises compressing the valve and delivering it to the site of implantation through a tube in a less-invasive procedure.


5

22. The method of claim 19, wherein the flexible leaflet prosthetic heart valve is designed to be implanted in the aortic position and further includes a sewing band that follows the alternating cusps and commissures of the support frame, and wherein the step of implanting comprises attaching the sewing band up and down the fibrous cusps and commissures of the natural aortic annulus and ascending aorta.

10
15 23. The method of claim 19, wherein the commissures of the internal support frame are designed to fracture from between about two days and two weeks after implantation.

1/2

Fig. 1

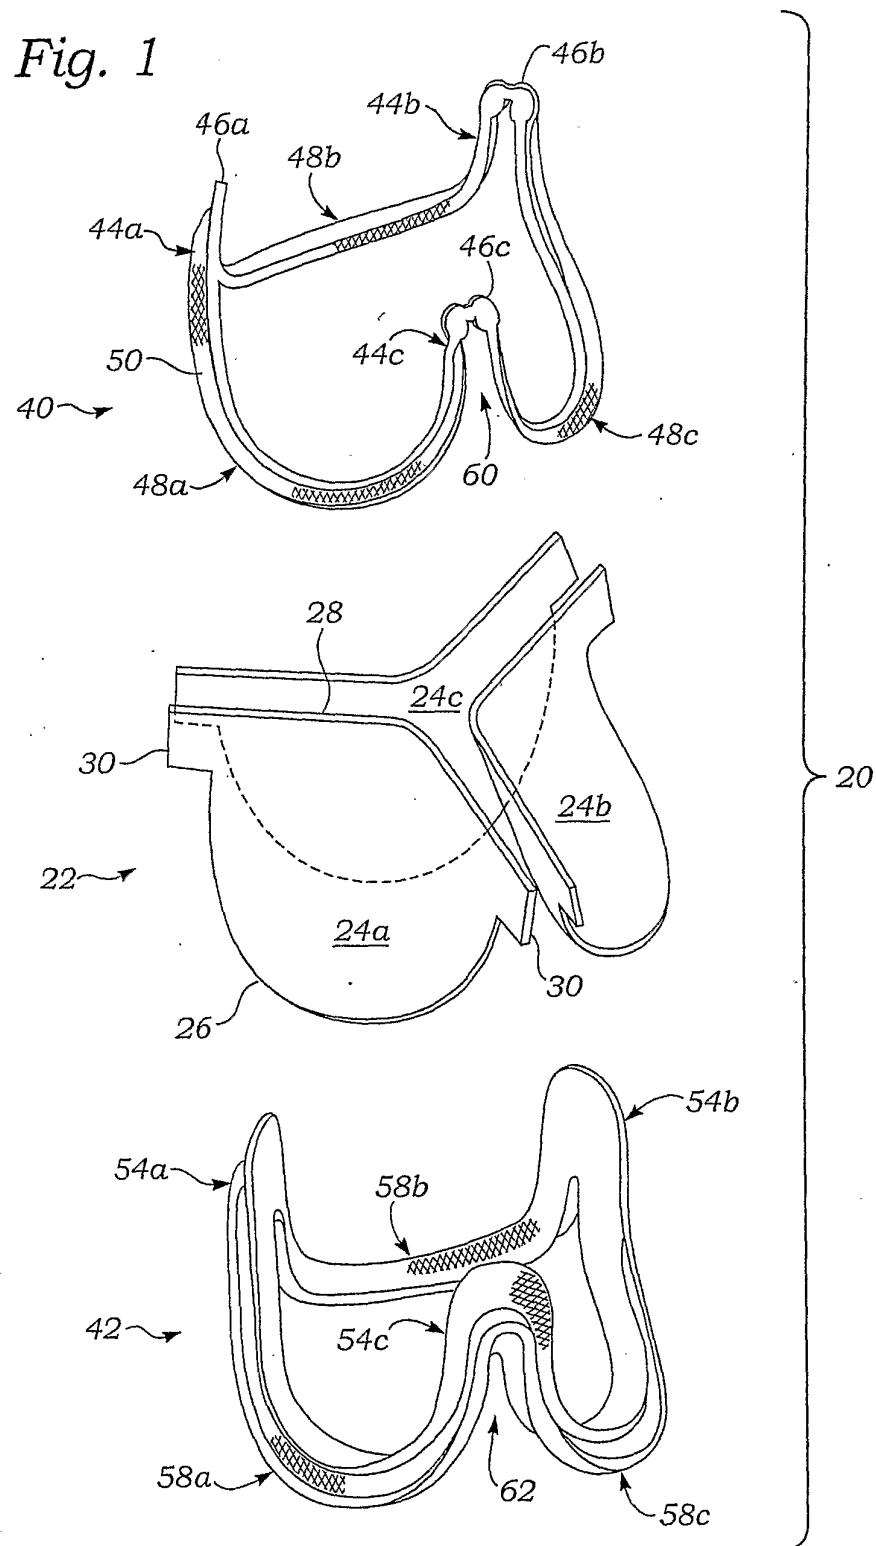

2/2

