



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/10/02
(87) Date publication PCT/PCT Publication Date: 2019/02/07
(85) Entrée phase nationale/National Entry: 2020/01/29
(86) N° demande PCT/PCT Application No.: US 2017/054788
(87) N° publication PCT/PCT Publication No.: 2019/027487
(30) Priorité/Priority: 2017/08/01 (US62/539,906)

(51) Cl.Int./Int.Cl. *A44C 17/02* (2006.01),
A44C 13/00 (2006.01), *A44C 15/00* (2006.01),
A44C 5/00 (2006.01), *A44C 9/00* (2006.01)

(71) Demandeur/Applicant:
ARK CRYSTAL, LLC, US

(72) Inventeurs/Inventors:
HARAMEIN, NASSIM, US;
BROWN, SCOTT, US;
KENDRICK, KEVIN, US

(74) Agent: AVENTUM IP LAW LLP

(54) Titre : CADRES MODULAIRES POUR SOLIDES GEOMETRIQUES
(54) Title: MODULAR FRAMES FOR GEOMETRIC SOLIDS

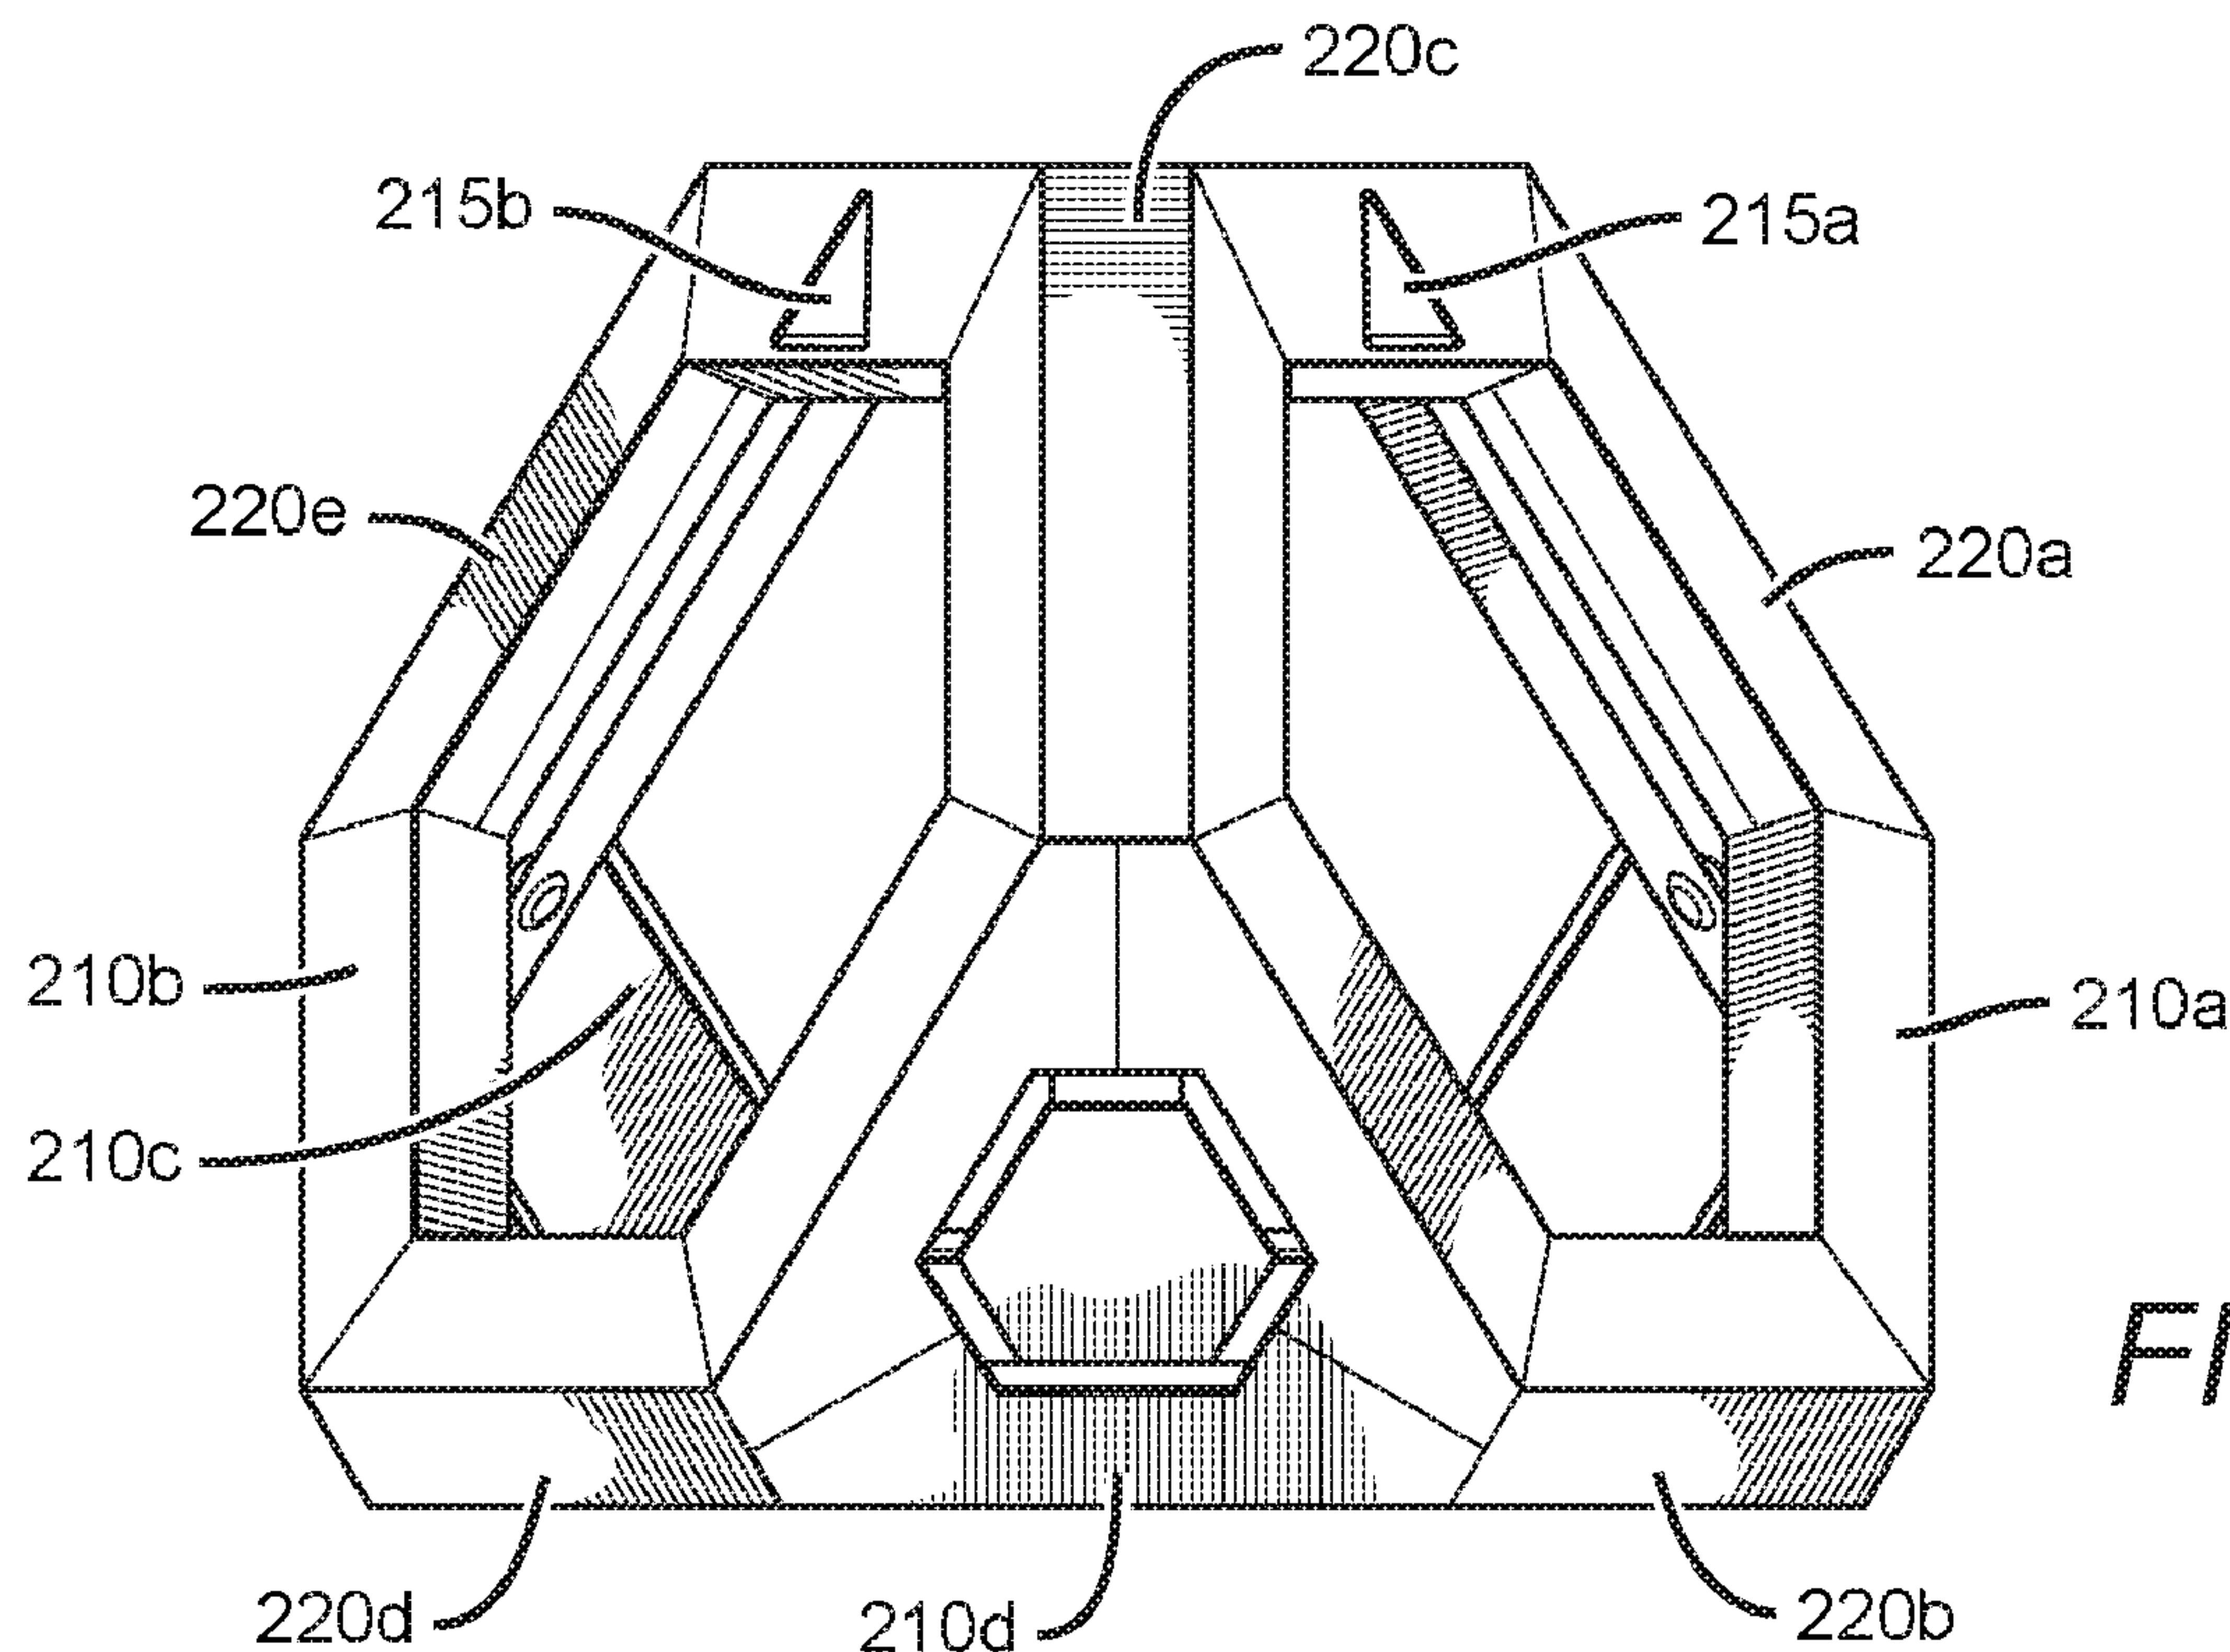


FIG. 2B

(57) **Abrégé/Abstract:**

Modular frames configured to couple with one another without external fasteners are provided. Some contemplated frames include magnetic fasteners positioned within an edge covering portion, and are configured to removably couple with at least one of another frame and a frame holder.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
07 February 2019 (07.02.2019)



(10) International Publication Number
WO 2019/027487 A1

(51) International Patent Classification:

A44C 17/02 (2006.01) *A44C 15/00* (2006.01)
A44C 13/00 (2006.01) *A44C 5/00* (2006.01)
A44C 9/00 (2006.01)

(21) International Application Number:

PCT/US2017/054788

(22) International Filing Date:

02 October 2017 (02.10.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/539,906 01 August 2017 (01.08.2017) US

(71) Applicant: **ARK CRYSTAL, LLC** [US/US]; 1001 Avenida Pico Ste C #304, San Clemente, California 92673 (US).

(72) Inventors: **HARAMEIN, Nassim**; 1001 Avenida Pico Ste C #304, San Clemente, California 92673 (US). **BROWN, Scott**; 1001 Avenida Pico Ste C #304, San Clemente, California 92673 (US). **KENDRICK, Kevin**; 1001 Avenida Pico Ste C #304, San Clemente, California 92673 (US).

(74) Agent: **CASTANEDA, Steven** et al.; Fish IP Law, LLC, 2603 Main Street, Ste 1000, Irvine, California 92614 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MODULAR FRAMES FOR GEOMETRIC SOLIDS

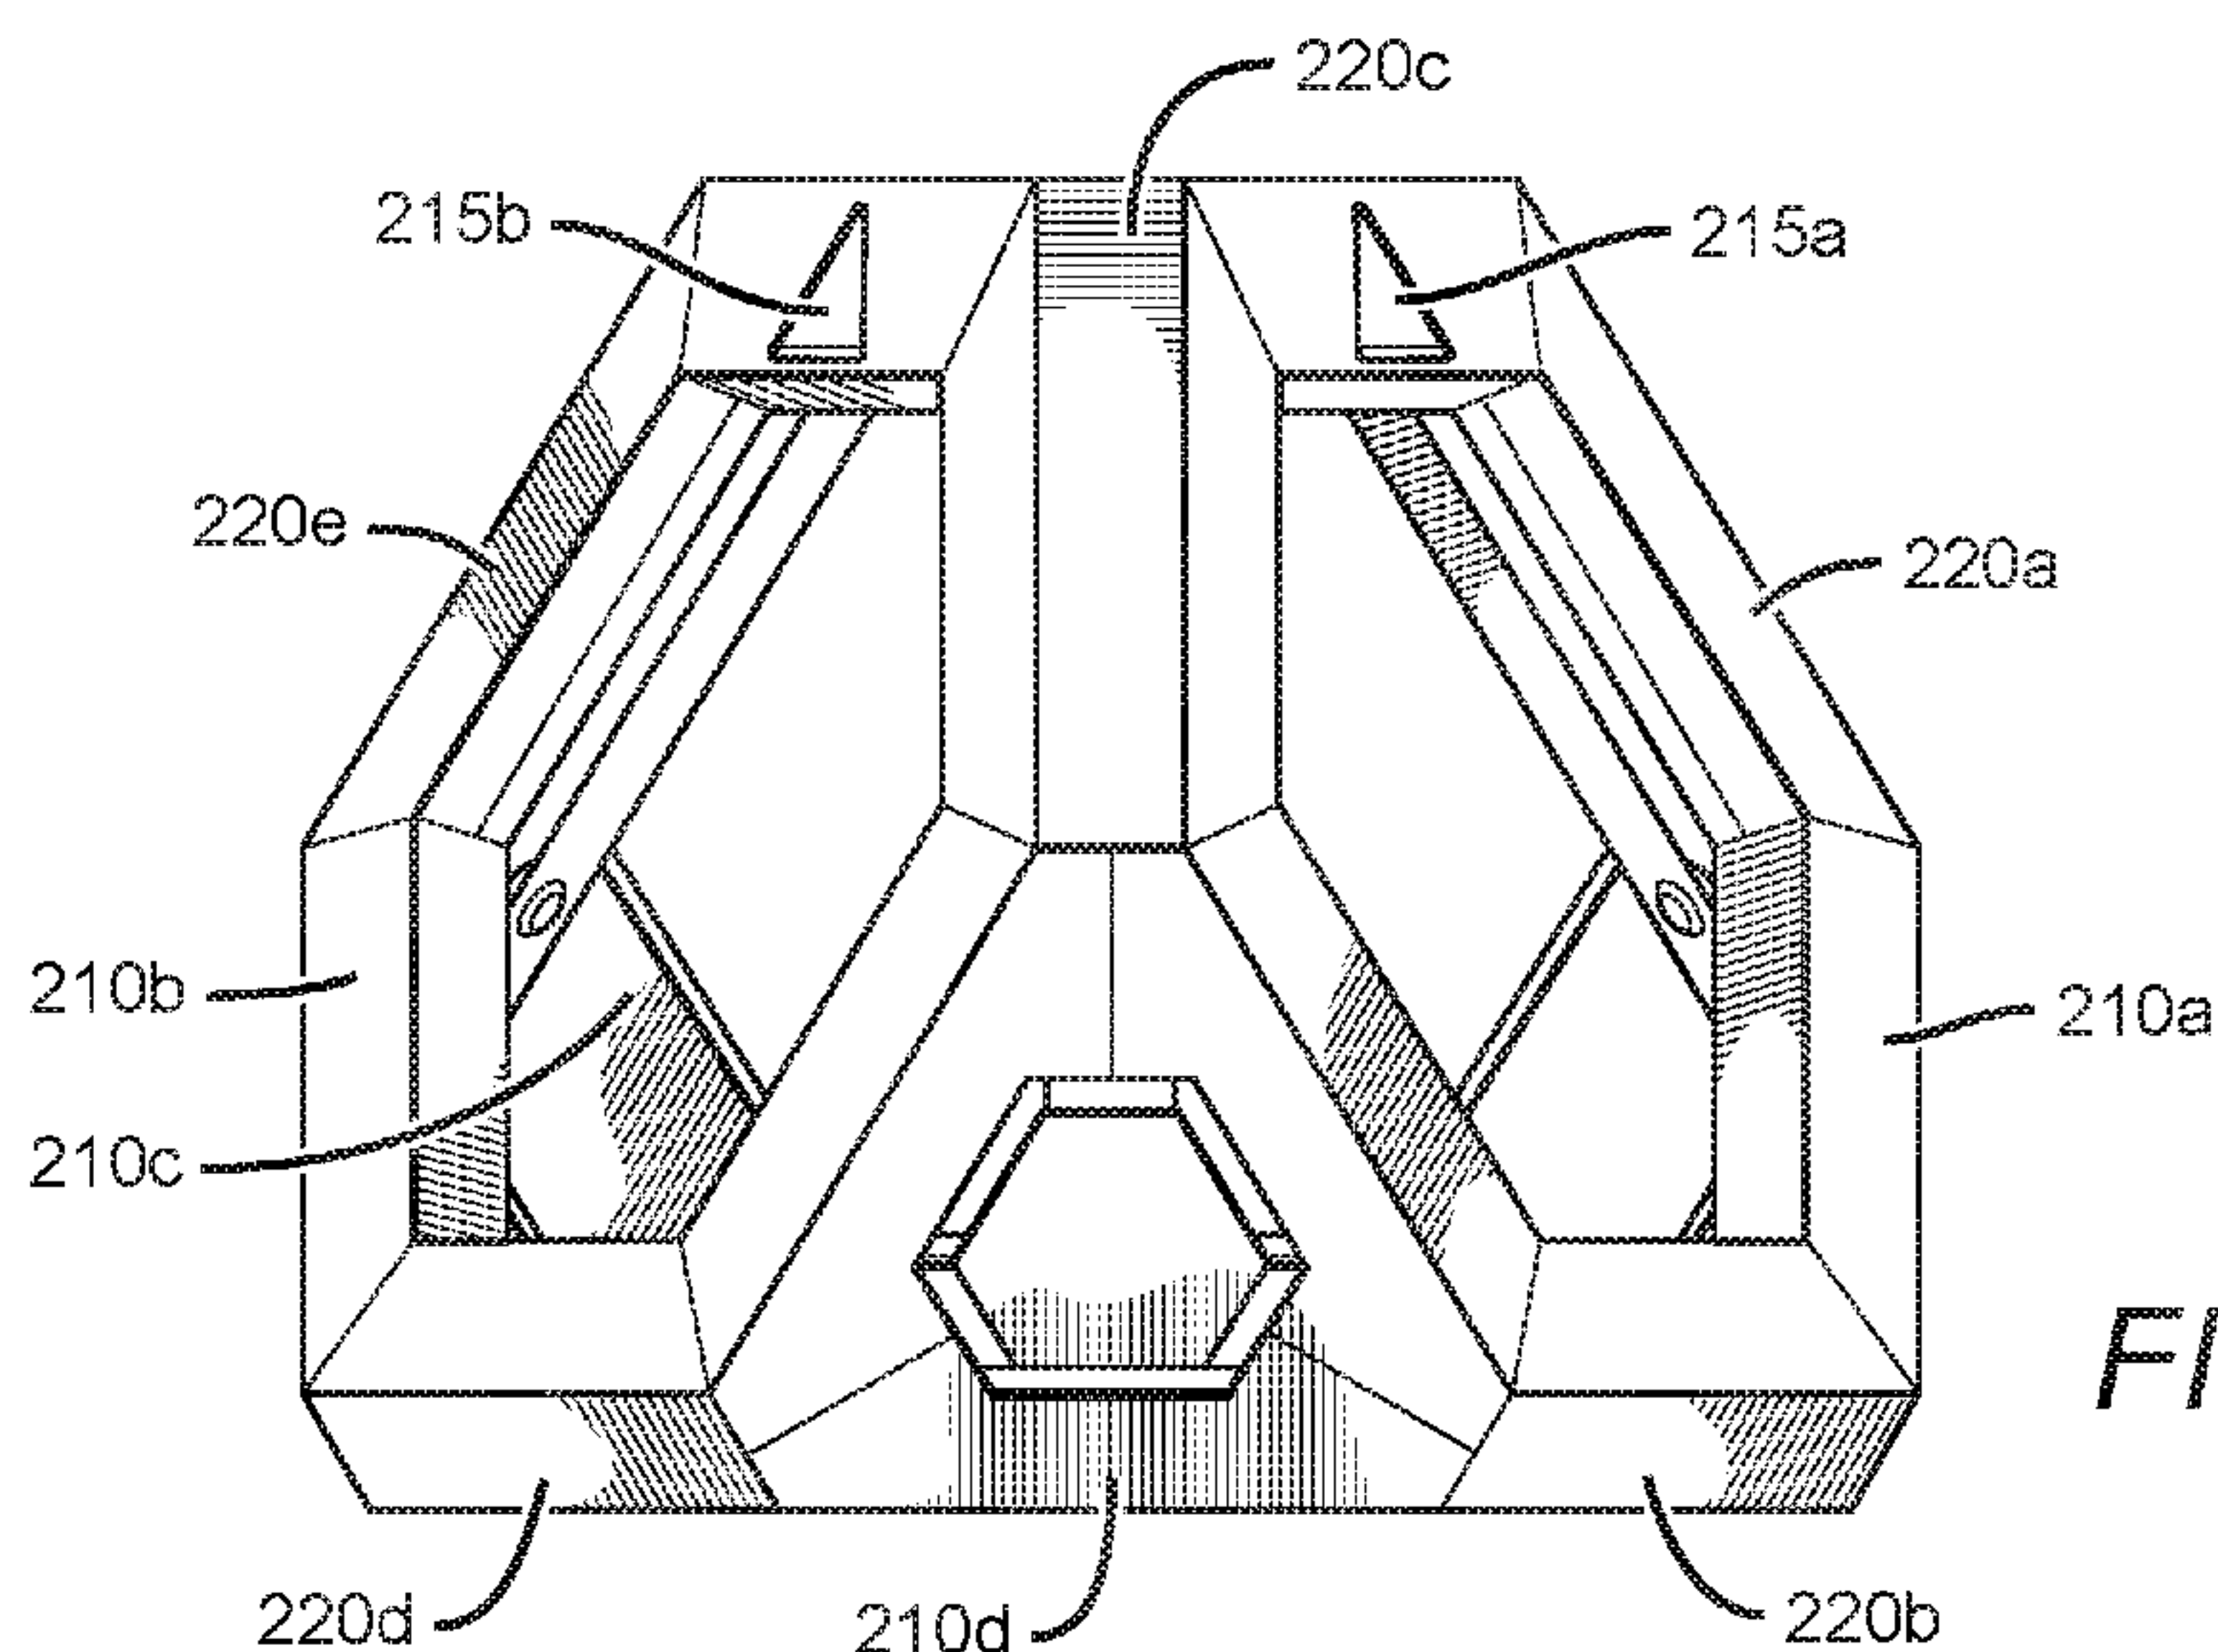


FIG. 2B

(57) Abstract: Modular frames configured to couple with one another without external fasteners are provided. Some contemplated frames include magnetic fasteners positioned within an edge covering portion, and are configured to removably couple with at least one of another frame and a frame holder.

MODULAR FRAMES FOR GEOMETRIC SOLIDS

[0001] This application claims priority to U.S. provisional application number 62/539,906 for Modular Frames For Geometric Solids, filed on August 1, 2017. This and all other extrinsic materials discussed herein are incorporated by reference in their entirety as if each were specifically indicated to be incorporated by reference. Where a definition or use of a term in an incorporated reference is inconsistent or contrary to the definition of that term provided herein, the definition of that term provided herein applies and the definition of that term in the reference does not apply.

Field of the Invention

[0002] The field of the invention is frames, especially frames for geometric solids.

Background of the Invention

[0003] Ornamental items (e.g., rings, necklaces, bracelets, watches, armbands, anklets, etc.) and other wearable items often comprise a frame that holds geometric solids such as gems, crystals, or pendants in place. In many known scenarios the geometric solid is permanently coupled to a frame; a ring setting or broach for example. In other known examples, some modularity is provided, but various moving pieces are required, which could lead to loss, as well as damage over extended use.

[0004] French patent application publication number FR 2618311 to Fullin teaches a modular pendant for earrings having two elements with triangular profiles that couple to one another in a few different configurations via a housing and an apparent snap-fit connection between the housing and the two elements. Unfortunately, Fullin's earrings do not appear to be configured to act as a frame for any geometric solid, and appear to have couplers (projections) that only allow for a very limited degree of modularity.

[0005] US Patent 9199182 to Hunts teaches a building component including a housing with a recess, and connector arms partially disposed within the recess and configured to couple with an axle positioned within a recess of another building component. Similarly to Fullin, Hunts building components appear to have couplers that only allow for a limited degree of modularity. Additionally, Hunt's snap-fit connection could lead to damage or loss of the

connection arms or axel over time. Additionally, the coupling between building components may be weak and unsuitable for use as a frame.

[0006] Thus, there is still a need for improved modular frames for geometric solids.

Summary of The Invention

[0007] The present invention is directed to devices and methods for modular frames for geometric solids. As used herein, a “frame” includes an object that at least partially encloses and surrounds a geometric solid. In some preferred embodiments, the frame surrounds at least 10%, at least 15%, at least 25%, at least 50%, at least 60% or even more of a surface area of a geometric solid such as a crystal gem. In some preferred embodiments, the frame surrounds less than 10%, less than 15%, less than 25%, less than 30%, less than 35% or even less of a surface area of a geometric solid. In some preferred embodiments, the frame is positioned over each edge of the geometric solid. In some preferred embodiments, the frame is positioned over or around each vertex of the geometric solid. Some contemplated frames are configured to be used as individual frames, but could also advantageously be coupled with one or more other frames to form a larger jewelry item having multiple frames. Additionally or alternatively, a frame kit could be provided that is configured to form frames suitable for geometric solids of different sizes and shapes. For example, the frame kit could be used to form a frame for a modified tetrahedron crystal, and could be taken apart and be used to form a frame for a multi-tetrahedron matrix. Preferably, the modular frames could be coupled to one another without the need for any external connectors (e.g., clips, connector arms) that could easily break or be lost. Viewed from a different perspective, all that is needed to form a larger jewelry item (with multiple frames holding multiple geometric solids) is the individual frames themselves, as they would be worn as individual frames.

[0008] In some aspects of the inventive subject matter, a modular frame for a geometric solid comprises (a) a first panel having a first window and a first side or arm that includes (1) a first mating edge and (2) a second edge different from the first mating edge and including a first catch, and (b) a second panel having a second window and a second side or arm that includes (1) a second mating edge and (2) a second edge different from the second mating edge and including a second catch. The first and second panels could couple to one another to form a recess or seat sized and dimensioned to receive a magnet. A first clip could be positioned over the magnet, and around at least a portion of the first arm and at least a portion

of the second arm. The clip could include first and second clasps that are configured to mate with first and second catches of the first and second panels to form a first edge covering portion that includes a length of each of the first and second arms partially enclosed by the first clip. The first edge covering portion could advantageously be sized and dimensioned to be positioned over a chamfered edge of a geometric solid.

[0009] It is contemplated that a cylindrical or other magnet could be positioned in the first edge covering portion (e.g., between the clip and the first and second arms), which allows the frame to removably attach or otherwise couple with one or more different frames or objects (e.g., water bottle, pendant, decorative element of a different type made to fit the frame and removably attach to it).

[0010] It should be appreciated that frame panels and frames could have any suitable shape(s) to at least partially enclose or orient a geometric solid or a matrix of geometric solids. For example, contemplated frame(s) could be sized and dimensioned to hold a geometric solid that is of cuboctahedron, tetrahedron, icosahedron, cubic, rectangular cubic, dodecahedron, spheric or ovoid shape. Contemplated frame(s) could also be sized and dimensioned to hold a multi-tetrahedron or other matrix (*see e.g.*, <http://www.abzu2.com/2014/01/29/the-flower-of-life-and-the-64-tetrahedron-grid-the-mother-and-father-of-the-geometry-of-the-fabric-space/>). The frame(s) could be matched in orientation to the molecular orientation of the crystal lattice itself. A serial number could be included on the frame, for example, on the bottom frame panel and perpendicular to the x-axis of the geometric tetrahedron on the x-end of that axis. The crystal itself could also include a serial number, for example, one also positioned perpendicular to the x-axis on the x+ end of said axis.

[0011] Contemplated frame panels could comprise any suitable number of sides (e.g., 2, 3, 4, 5, 6, 7, 8, 9, 10 or more), and the sides could have the same or different lengths, widths, shapes and curvatures. For example, a side (arm) that is configured to form a portion of an edge covering portion could comprise notches that are relatively small, and catches that extend along a substantial length of the side or arm (e.g., at least 25%, at least 50%, at least 65% of a length of the side), while a side that is configured to form a portion of a vertex saddle (a portion of the frame that is positioned over or around a vertex saddle, and optionally includes an opening sized and dimensioned to frame the vertex saddle) could have an irregular octagonal or other shape.

[0012] Where the geometric solid has four primary faces of substantially the same size (e.g., a truncated and chamfered tetrahedron), a modular frame could be made from four identical panels. Similarly, where the geometric solid has five, six, seven, eight or nine primary faces of substantially the same size, the modular frame could be made from five, six, seven, eight or nine identical panels, respectively. However, it should be appreciated that panels used to frame geometric solids having primary faces of substantially the same size and shape (or different sizes and shapes) could be different from one another. For example, a first frame panel having a side arm including a seat sized and dimensioned to receive a magnet fastener could be configured to mate with a second frame panel having a side arm that is thinner than the side arm of the first frame panel. One or both of the side arms could include a catch sized and dimensioned to block a clasp of a clip in place, for example below the clasp.

[0013] Additionally or alternatively, in some instances, for example where the geometric solid has a face that is generally triangular in shape, the frame panels could similarly be triangular in shape. Similarly, where the geometric solid has a face that is generally ovular, rectangular, pentagonal, hexagonal or heptagonal in shape, the frame panel could have an ovular, rectangular, pentagonal, hexagonal or heptagonal shape, respectively. Additionally or alternatively, in some instances, for example where the geometric solid has a face that is generally triangular in shape with truncated vertices, the frame panels could include six arms – three of which substantially align with the edges of the geometric solid, and three of which substantially align with the truncated vertices.

[0014] Similarly, it is contemplated that frame panels could include windows of any suitable size and shape that allow users to see portions of the framed geometric solid. The openings could have the same general shape as the frame panel itself (e.g., regular or irregular oval, regular or irregular rectangle, regular or irregular pentagon, regular or irregular hexagon, regular or irregular heptagon, regular or irregular octagon), or any other suitable shape (e.g., shape of an alphanumeric character, logo, image, different regular or irregular shape).

[0015] Various objects, features, aspects and advantages of the inventive subject matter will become more apparent from the following detailed description of preferred embodiments, along with the accompanying drawing figures in which like numerals represent like components.

Brief Description of The Drawing

[0016] Figure 1 illustrates a top view of a geometric solid of the inventive subject matter.

[0017] Figures 2A-2C illustrate a detailed side face view (2A), side edge view (2B), and top view (2C) of an individual frame for the geometric solid of Figure 1.

[0018] Figures 3A-3C illustrate a panel of an individual frame.

[0019] Figures 4A-4C illustrate a bumper.

[0020] Figures 5A-5D illustrate a clip.

[0021] Figures 6A-6I illustrate different components of an individual frame.

[0022] Figure 7 illustrates a jewelry item comprising multiple individual frames coupled with one another.

[0023] Figures 8A-8H illustrate a frame holder of the inventive subject matter, with Figures 8D-8H showing the frame holder coupled with an individual frame.

Detailed Description

[0024] The following discussion provides example embodiments of the inventive subject matter. Although each embodiment represents a single combination of inventive elements, the inventive subject matter is considered to include all possible combinations of the disclosed elements. Thus if one embodiment comprises elements A, B, and C, and a second embodiment comprises elements B and D, then the inventive subject matter is also considered to include other remaining combinations of A, B, C, or D, even if not explicitly disclosed.

[0025] The inventors have discovered that single frames could be made in a manner that allows a user to removably couple it with one or more other identical, similar or substantially different frames without the need for additional fasteners. Contemplated frames could be configured to hold a geometric solid, and optionally provide windows through which portions of the geometric solid is visible when the frames are worn by a user (e.g., as a necklace), or otherwise displayed.

[0026] Modular frames of the inventive subject matter provide for at least one of securing and orienting one or more geometric solids (for example, a crystal or a crystalline solid),

preferably possessing at least one vertex and one edge. Such an apparatus, system, or method can serve as an educational tool utilized in the demonstration or investigation of effects realized by the placement or orientation of such a geometric solid relative to its environment. Similarly, embodiments of the inventive concept can serve as educational tools utilized in the investigation of effects realized by the placement or orientation of a plurality of geometric solids relative to their environment or to each other. Indicators, such as etching, an image, an opening, alphanumeric characters, serial number, or a logo could be provided along different portions of the frame (or the geometric solid itself) that informs a user of the orientation of such a preferred axis or pole relative other orientations. Further, especially in embodiments where the geometric solid includes a crystal, such a crystal can include additional indicia, including a serial number, a name, a manufacturer, a logo, an orientation relative to a parent crystal, a location relative to a parent crystal or block from which the crystal was cut, or other information. A serial number could be included on the frame, for example, on a frame panel or a clip, and another serial number (same or different) could be included on the crystal. In some embodiments, the frame could be matched in orientation to the molecular orientation of the crystal lattice itself, and the serial numbers could provide an indication of such match. For example, a serial number could be included on a bottom frame panel, and positioned perpendicularly to the x-axis of the crystal on the x- end of that axis. The crystal itself could also include a serial number, and be positioned perpendicular to the x-axis on the x+ end of said axis.

[0027] The frame can include at least one vertex saddle configured to receive or frame a vertex of a geometric solid. Preferably, the vertex saddle is made via a coupling of two or more frame panels. The frame can further comprise at least one edge strut (or an edge covering portion), which could also be made via a coupling of two or more frame panels. Such an edge strut can be configured to cover or conform to at least a portion of an edge of a geometric structure. In some embodiments, the frame can include multiple frame panels, saddles and struts configured to hold a truncated and chamfered tetrahedron solid or other geometric solid of any suitable shape (*e.g.*, trihedral, icosahedron, cube, rectangular cube, sphere, ovoid, etc.). Where the geometric solid includes curvatures, it is contemplated that some or all of the frame panels could be curved rather than generally flat.

[0028] **Figure 1** illustrates an exemplary geometric solid of the inventive subject matter. Crystal **100** could be cut according to the methods described in U.S. Patent No. 9,435,054.

[0029] Crystal **100** is a chamfered and truncated tetrahedron solid having six chamfered edges **105, 115, 125, 135, 145, 155**, and four truncated vertices **110, 120, 130, and 140**. However, it should be appreciated that contemplated geometric solids could comprise any suitable size, shape and material, and frame panels of the inventive subject matter could be sized and dimensioned to form modular frames configured for securing, holding and orienting any suitable geometric solid.

[0030] **Figures 2A-2C** show a modular frame **200** of the inventive subject matter partially enclosing crystal **100** and securing it in place. Frame **200** includes first frame panel **210a**, second frame panel **210b**, third frame panel **210c**, and fourth frame panel **210d**. First frame panel **210a** is coupled to third frame panel **210c** via first clip **220a**, first frame panel **210a** is coupled with fourth frame panel **210d** via second clip **220b**, first frame panel **210a** is coupled to second frame panel **210b** via third clip **220c**, second frame panel **210b** is coupled with fourth frame panel **210d** via fourth clip **220d**, third frame panel **210c** is coupled with second frame panel **210b** via fifth clip **220e**, and third frame component **210c** is coupled to fourth frame component **210d** via sixth clip **220f**. In some other embodiments, it should be appreciated that contemplated frames could include any suitable number of frame panels (e.g., at least 5, at least 6, at least 7, at least 8, between 5-10, between 4-8) and any suitable number of clips (e.g., at least 5, at least 6, at least 7, at least 8, between 5-10, between 4-8).

[0031] Each of the first, second and third frame components (**210a, 210b, 210c**) include indicia such as an opening, etching or image (**215a, 215b, 215c**) which could identify the preferred orientation of crystal **100** relative to the Z+ or C axis. The Z axis is the optical axis, and is generally known as the axis of growth. The Z- end of the axis is the base of crystal growth, and the Z+ end of the Z axis is the direction of the crystal growth. The crystals could also be oriented relative to the X-axis. For example, the crystal could be serialized on the lower edge chamfer perpendicular to the x-axis on the x+ end of the x-axis. The s-axis is the electric axis and the x+ end exhibits a positive voltage when the crystal is compressed along this axis. Chamfered edge covered by clip **220b** is one area where the serial number could be etched into the crystal. Bumpers (e.g., foam, gel, silicone) are provided via frame **200**, which advantageously create a gap (e.g., **205**) between an inner surface of frame **200** and a face, edge or vertex of crystal **100**. Contemplated gaps could be of any suitable length (e.g., between 1-10mm, between 1-5mm), and could be uniform throughout the length of the crystal and frame. For example, as illustrated in Figure 2A, bumper **230a** prevents portions of

crystal **100** near vertex **130** from directly contacting the frame panels. Contemplated bumpers could advantageously prevent crystal **100** from damage that would otherwise potentially be caused by frame **200** or frame panels **210a**, **210b**, **210c**, or **210d**. Additionally or alternatively, the bumpers could include protrusions or extensions having some give or springiness such that crystals of different sizes could securely fit within frame **200**. Additionally or alternatively, the bumpers could be interchanged with bumpers that protrude through frames to different extents to accommodate crystals of different sizes. Where a crystal is relatively small, bumpers that protrude through the frames to a greater extent could be provided to prevent movement of the crystal within the frame. Where a crystal is relatively large, bumpers that protrude through the frames to a lesser extent could be provided. In some embodiments, bumpers may have a range as low as 0.5mm. Viewed from a different perspective, the length of the bumper extension, uncompressed, could be as low as 1.0mm, as low as 0.7mm, as low as 0.5mm. The bumper extension could then be compressed when the crystal is installed in the frame.

[0032] **Figures 3A-3C** illustrate a single frame panel **300**, which is suitable as a building block to frame a tetrahedron solid, especially a truncated and chamfered tetrahedron solid. Frame panel **300** includes sides, which include three vertex saddle forming sides **310a**, **310b** and **310c**, and three edge strut forming sides **320a**, **320b** and **320c**.

[0033] As best seen in Figure 3B, one or more of the edge strut forming sides (e.g., **320c**) could include a seat forming portion **325**, and a mating edge **345** including first notch **330** and second notch **335**. Edge strut forming side **320c** could further include first and second recesses along a wall perpendicular (or substantially perpendicular – forming an angle of between 75-105 degrees) to mating edge **345**, each of the recesses being sized and dimensioned to receive a portion of a bumper (see **Figures 4A-4C**) and secure it in place.

[0034] Frame panels of the inventive subject matter could be made of any suitable material or materials, including for example, plastic, silicone, rubber, wood, metal, gold, silver, or a composite material. Additional information relating to the coupling of the frame panels is provided below in connection with Figures 6A-6I).

[0035] Figure 4A illustrates a bumper **400**, which is configured to provide a gap between portions of a geometric solid and a frame. Bumper **400** has a base **410**, which is sized and dimensioned to fit at least partially within a seat formed by one or more sides or one or more

panels, and a protrusion **415** sized and dimensioned to extend through an opening formed by one or more panels. Bumper **400** and any of its components could be made from any suitable material or materials (e.g., plastic, metal, foam, gel, silicone). Protrusion **415**, which acts to protect a crystal or other solid against a frame panel by creating a gap or acting as a spacer, is preferably made of a material that would not damage the crystal (e.g., a foam padding, soft plastic, gel, silicone). Protrusion **415** of bumper **410** is sized and dimensioned to extend through an opening formed by (a) notches (e.g., notch **330**) of adjacent frame panels, or by (b) a side or arm of a single frame panel. Base **410** is preferably sized and dimensioned to fit between the frame panels and a clip that couples the frame panels to one another (see **Figures 5A-5D**).

[0036] Figure 4B illustrates a bumper **420** having a base **423**, and two protrusions **425a** and **425b**. Protrusion **425a** is similar to protrusion **415**, and protrusion **425b** is sized and dimensioned to fit within a seat formed by one or more frame panels, and (a) act as a spacer between a surface of the frame panel (e.g., an inner side wall of the seat) and the base **423**, (b) act as a spacer between a magnet positioned in the seat and the base **423**, or (c) fit within a recess formed on a inner surface of the seat of one or more frame panels.

[0037] Bumper **430** is similar to bumpers **400** and **420**, and comprises a base **435**, protrusion **440a**, protrusion **440b**, and protrusion **440c**. Protrusion **440b** is similar to protrusion **415**, and protrusion each of bumpers **440a** and **440c** is sized and dimensioned to fit within a seat formed by two or more frame panels, and (a) act as a spacer between a surface of the frame panel and the base **435**, (b) act as a spacer between a magnet positioned in the seat and the base **435**, or (c) fit within a recess formed on a inner surface of the seat.

[0038] Figures 5A-5D illustrate a clip **500** of the inventive subject matter, which is used to couple two or more frame panels to one another. Clip **500** includes a top **510**, a front **530a**, a back **530b**, a first side **520a** and a second side **520b**, which extend from top **510**. Figure 5C illustrates a bottom view of clip, which shows top **510**, first side **520a** and second side **520b** form a recess or channel sized and dimensioned to receive portions of first and second frame panels (e.g., a seat formed by the first and second frame panels), and secure them to one another, for example via a snap fit.

[0039] Figure 5D illustrates a cross-sectional view of clip **500**, which shows first side **520a** and second side **520b** are curved or bent to form first and second clasps having nooks **550b**

and **550a**, which are sized and dimensioned to receive portions of the frame panels having a corresponding shape (e.g., a catch) via a snap fit. Preferably, clip **500** is made of a material that allows a distance between first and second sides **520a** and **520b** to be temporarily increased to fit over the catches, and automatically spring back to its original shape.

[0040] Clips of the inventive subject matter could be made of any suitable material or materials, including for example, plastic, silicone, rubber, wood, metal, gold, silver, or a composite material. The material of the clip could be the same as or different from the frame panels and the bumpers. In some preferred aspects, the clips are made of a material and thickness such that the magnetic force from a magnet seated between the clip and frame panels could pass through with sufficient intensity to couple with magnets or clips from a different frame. Additionally or alternatively, clips of the inventive subject matter could comprise any shape (e.g., cross-sectional shape, channel shape) that is, for example, suitable to be secured over lengths of first and second arms of first and second frame panels.

[0041] **Figure 6A** illustrates another modular frame of the inventive subject matter **600**, which includes a cut-away view, and a side with a clip removed, to show how panels are coupled together to form a seat in which bumpers and a magnet could be positioned.

[0042] Frame **600** comprises four frame panels (**610a**, **610b**, **610c** and **610d**), and is sized and dimensioned to hold a crystal (e.g., crystal **100**). Three frame panels (e.g., **610a**, **610b**, **610d**) couple with one another to form each vertex saddle, which could include an opening having a shape that is the same as, or different from, the truncated vertex of the crystal. The opening could be oversized relative to the truncated vertex to accommodate gaps formed between frame **600** and crystal **100** by bumpers (e.g., bumpers **650a** and **650b**), for example where the frame's vertex saddle is flush or substantially flush with the truncated vertex of the crystal.

[0043] Furthermore, the vertex saddle could include an opening that is tapered such that a gap between the inner surface of the vertex saddle and an outer surface of the crystal is the same at each point that the vertex saddle is positioned over a portion of the crystal. This is best seen in Figure 7 where at least three sides of the vertex saddle have outer surfaces that are angled to parallel the truncated crystal. In some embodiments, some or all frame faces (which includes portions of a frame panel and 3 clips), and some or all sides of the frame

could be at least one of parallel to a face of the geometric solid and planar (not taking the window into consideration).

[0044] As illustrated, a portion of an edge strut has been cut away, and the clip removed, to show the arrangement of bumpers **650a** and **650b**, and magnet **660** positioned there-between. The edge strut that has been cut away is sized and dimensioned to cover a chamfered edge **135** of crystal **100**.

[0045] **Figure 6B** illustrates two frame panels being placed relative to one another to form a portion of frame **600**. Frame panel **610a** includes a mating surface **615a** along a first arm, which is sized and dimensioned to align with a mating surface **615b** along a first side of frame panel **610b** to form a connection point **615** of a vertex saddle. When mating surfaces **615a** and **615b** align with one another, a seat **625** is formed. Seat **625** could be sized and dimensioned to receive one or more magnets or other fasteners, and one or more bumper bases, where desired. As shown in **Figure 6C-6E** and described above with Figures 3A-3C, one or more openings **645a** and **645b** could be formed via notches on first and second frames **610a** and **610b**, which could be sized and dimensioned to receive protrusions (e.g., **650a1**, **650a2**) of a bumper (e.g., **650a**, **650b**). Additionally or alternatively, one of the frame panel arms could include an opening sized and dimensioned to receive the protrusions.

[0046] Once bumpers **650a** and **650b** are secured in place, magnet **655** could optionally be positioned between bumpers **650a** and **650b**, which allows frame **600** to removably couple with or attach to other frames having a suitable fastener (as shown in **Figures 6F-6G**), for example another magnet, or a metal clip. Clip **665** could be placed over seat **625**, bumpers **650a**, **650b** and magnet **655**, and snapped into place over seat **625**, bumpers **650a** and **650b**, and magnet **655** (as shown in **Figures 6H-6I**) to form an edge strut or edge covering portion. The edge strut could be sized and dimensioned to be positioned over at least 50%, at least 60%, at least 70%, at least 80% or even more of an edge (e.g., a chamfered edge) of the geometric solid. Each of the frame panels of frame **600** could be coupled to one another in the same way as described above with respect to frame panels **610a** and **610b**.

[0047] **Figure 7** illustrates a plurality of modular frames coupled to one another at frame connection points (e.g., **770**). Each frame connection point includes edge struts from two or more frames, each of which could include a magnet fastener positioned between a clip extending over arms of two or more frame panels, and a seat formed by the arms of the two

frame panels. As illustrated, frame **700** is removably attached to frames **710** and **760**, frame **710** is removably attached to frames **700**, **720** and **750**, frame **720** is removably attached to frames **710** and **730**, frame **730** is removably attached to frames **720**, **740** and **750**, frame **740** is removably attached to frames **730** and **760**, frame **760** is removably attached to frames **700**, **740** and **760**. It should be appreciated that a frame of the inventive subject matter could removably attach to a frame via two magnets, or via a magnet and a material attracted to the magnet (e.g., a metal clip). It should also be appreciated that frames of the inventive subject matter could be removably coupled to one another via mechanical fasteners such as clasps and catches. For example, some contemplated frames could be coupled using the fasteners of U.S. 2014/0072942, which is incorporated herein in its entirety.

[0048] Frames could be coupled with one another in an edge-to-edge, saddle-to-saddle, or edge-to-saddle configuration. Where an edge covering portion of a first frame couples with an edge covering portion of a second frame (via magnets positioned within the edge covering portions), the frames are coupled in an edge-to-edge configuration. Where an edge covering portion of a first frame couples with a vertex saddle portion of a second frame, the frames are coupled in an edge-to-saddle configuration. Where a vertex saddle portion of a first frame couples with a vertex saddle portion of a second frame, the frames are coupled in a saddle-to-saddle configuration. While the description above is largely directed to magnets positioned under clips and hidden from the user, it should be appreciated that magnetic fasteners could be positioned along any portion of a frame, including for example on an outer wall of a frame, or embedded in an arm or side of a frame panel.

[0049] Additionally or alternatively to coupling with one or more frames, a modular frame of the inventive subject matter could couple with a frame holder that is configured to hang on a necklace or other item of jewelry.

[0050] **Figures 8A-8H** illustrate an exemplary frame holder, which includes decorative features, provides additional protection to the geometric solid, and comprises an opening sized and dimensioned to allow a necklace to be threaded through and orient a frame and geometric solid in a desired manner. Frame holder **800** includes a base **810** having an opening **830**, a first base arm **820a**, a second base arm **820b** and a third base arm **820c**. In the embodiment shown, each of the base arms extend away from base **810** at an angle relative to the base (e.g., between 25-85 degrees, between 25-65 degrees, between 35-55 degrees) such that the free ends of the base arms are positioned to align with opening **830**. However, it

should be appreciated that the base arms could extend away from the base at any suitable angle to accommodate the shape of a frame it receives. For example, a base arm could extend away from the base and at an obtuse angle (e.g., between 95-170 degrees, between 95-125 degrees) and then bend back towards the opening.

[0051] Base **810** could include an opening having ends **840a** and **840b**, and the opening could be sized and dimensioned to receive a necklace such that the frame holder could hang on the necklace when worn. In some preferred embodiments, the opening is positioned on the base such that when the necklace is worn and the frame holder hangs from the necklace, the base sits against the wearer's body, and the free ends of base arms **820a**, **820b** and **820c** are positioned away from the wearer's body. More specifically, it is contemplated that in some embodiments the opening is positioned such that Figure 8C illustrates a side of the base that would face the wearer, and Figure 8F illustrates the side of the frame holder facing away from the wearer.

[0052] As best seen in Figures 8C and 8G, base **810** includes fasteners (e.g., fixed catches, movable catches) **850a**, **850b**, **850c**, which are sized and dimensioned to releasably or permanently secure a frame (e.g., **600**) in place between the opening **830** and base arms **820a**, **820b**, **820c**. Additionally or alternatively, frame holder **800** could include magnetic fasteners (or a ferromagnetic or ferrous material) that are configured to couple with magnets of the frame **600**. For example, base arms **820a**, **820b**, **820c** could each enclose or otherwise include a magnet such that when frame is slid through opening **830**, magnets of the edge covering portions fasten with magnets of base arms **820a**, **820b**, **820c**. Once coupled to one another, frame **600** could be positioned relative to frame holder **800** such that base arms **820a**, **820b**, and **820c** are positioned over the edge covering portions of frame **600**, indicia on the frame (e.g., **215a**) is visible and optionally aligned with indicia on the frame holder base, and at least a portion of at least one face of crystal **100** is visible.

[0053] The base and base arms could be made of any suitable material, and could be made of the same or different material(s) as a modular frame it is sized and dimensioned to receive. In some aspects, the entire frame holder could be made of an injection molded plastic. In other aspects, at least one of the base and the base arms could be made of a metal, a wood, a plastic, a glass, a rubber, or any other suitable material(s).

[0054] As used in the description herein and throughout the claims that follow, the meaning of “a,” “an,” and “the” includes plural reference unless the context clearly dictates otherwise. Also, as used in the description herein, the meaning of “in” includes “in” and “on” unless the context clearly dictates otherwise.

[0055] Also, as used herein, and unless the context dictates otherwise, the term "coupled to" is intended to include both direct coupling (in which two elements that are coupled to each other contact each other) and indirect coupling (in which at least one additional element is located between the two elements). Therefore, the terms "coupled to" and "coupled with" are used synonymously.

[0056] In some embodiments, the numbers expressing quantities of ingredients, properties such as concentration, reaction conditions, and so forth, used to describe and claim certain embodiments of the invention are to be understood as being modified in some instances by the term “about.” Accordingly, in some embodiments, the numerical parameters set forth in the written description and attached claims are approximations that can vary depending upon the desired properties sought to be obtained by a particular embodiment. In some embodiments, the numerical parameters should be construed in light of the number of reported significant digits and by applying ordinary rounding techniques. Notwithstanding that the numerical ranges and parameters setting forth the broad scope of some embodiments of the invention are approximations, the numerical values set forth in the specific examples are reported as precisely as practicable. The numerical values presented in some embodiments of the invention may contain certain errors necessarily resulting from the standard deviation found in their respective testing measurements. Moreover, and unless the context dictates the contrary, all ranges set forth herein should be interpreted as being inclusive of their endpoints and open-ended ranges should be interpreted to include only commercially practical values. Similarly, all lists of values should be considered as inclusive of intermediate values unless the context indicates the contrary.

[0057] It should be apparent to those skilled in the art that many more modifications besides those already described are possible without departing from the inventive concepts herein. The inventive subject matter, therefore, is not to be restricted except in the spirit of the appended claims. Moreover, in interpreting both the specification and the claims, all terms should be interpreted in the broadest possible manner consistent with the context. In particular, the terms “comprises” and “comprising” should be interpreted as referring to



elements, components, or steps in a non-exclusive manner, indicating that the referenced elements, components, or steps may be present, or utilized, or combined with other elements, components, or steps that are not expressly referenced. Where the specification claims refers to at least one of something selected from the group consisting of A, B, C and N, the text should be interpreted as requiring only one element from the group, not A plus N, or B plus N, etc.



CLAIMS

What is claimed is:

1. A modular frame for a geometric solid, comprising:
 - a first panel having (a) a first window, and (b) a first side including a first mating surface;
 - a second panel having (a) a second window, and (b) a second side including a second mating surface; and
 - wherein the first and second panels are coupled to one another via a first clip that is positioned around at least a portion of the first side and at least a portion of the second side, and wherein the first and second sides and the first clip form a first edge covering portion of the modular frame.
2. The modular frame of claim 1, wherein the first clip includes a top and a bottom, and wherein the top has a greater length than the bottom.
3. The modular frame of claim 1, wherein a first magnet is seated between the clip and the first and second panels.
4. The modular frame of claim 3, wherein a first bumper is seated at least partially between the clip and the first and second panels, wherein a second bumper is seated at least partially between the clip and the first and second panels, and wherein the first and second bumpers are positioned on opposite sides of the first magnet.
5. The modular frame of claim 4, further comprising a first opening formed by first and second notches of the first and second sides, respectively, and wherein the first bumper includes a first portion that extends through the gap to prevent the geometric solid from directly contacting the first and second sides.
6. The modular frame of claim 3, wherein the first edge covering portion of the modular frame is configured to mate with a second edge covering portion of a second modular frame via the first magnet and a second magnet of the second edge covering portion.
7. The modular frame of claim 1, wherein the first clip and the first and second panels are made from the same material.

8. The modular frame of claim 1, wherein at least one of the first clip and a third side of the first panel includes an indicator of an orientation of the geometric solid, and wherein the indicator is at least one of an etching, an alphanumeric character, an image, a logo, and an opening.
9. The modular frame of claim 1, wherein the first edge covering portion is positioned over a chamfered edge portion of the geometric solid.
10. The modular frame of claim 1, further comprising third and fourth panels, and wherein the first, second, third and fourth panels couple to one another to form the modular frame, and wherein the modular frame is sized and dimensioned to hold a tetrahedron crystal.
11. The modular frame of claim 1, further comprising a third panel, wherein the third panel couples with the first and second panels via second and third clips, and wherein the first, second and third panels form a first opening sized and dimensioned to receive at least a portion of a vertex of the geometric solid.
12. The modular frame of claim 11, wherein the vertex is truncated, and wherein each of the first opening and the vertex are hexagon shape.
13. The modular frame of claim 1, wherein the first panel is hexagonal.
14. The modular frame of claim 1, wherein the first window is hexagonal.
15. The modular frame of claim 1, wherein the first clip has a trapezoidal cross-section.
16. The modular frame of claim 1, wherein the first clip comprises a first clasp and a second clasp, wherein the first side includes a first catch, wherein the second side includes a second catch, and wherein the first and second clasps are configured to couple with the first and second catches, respectively.

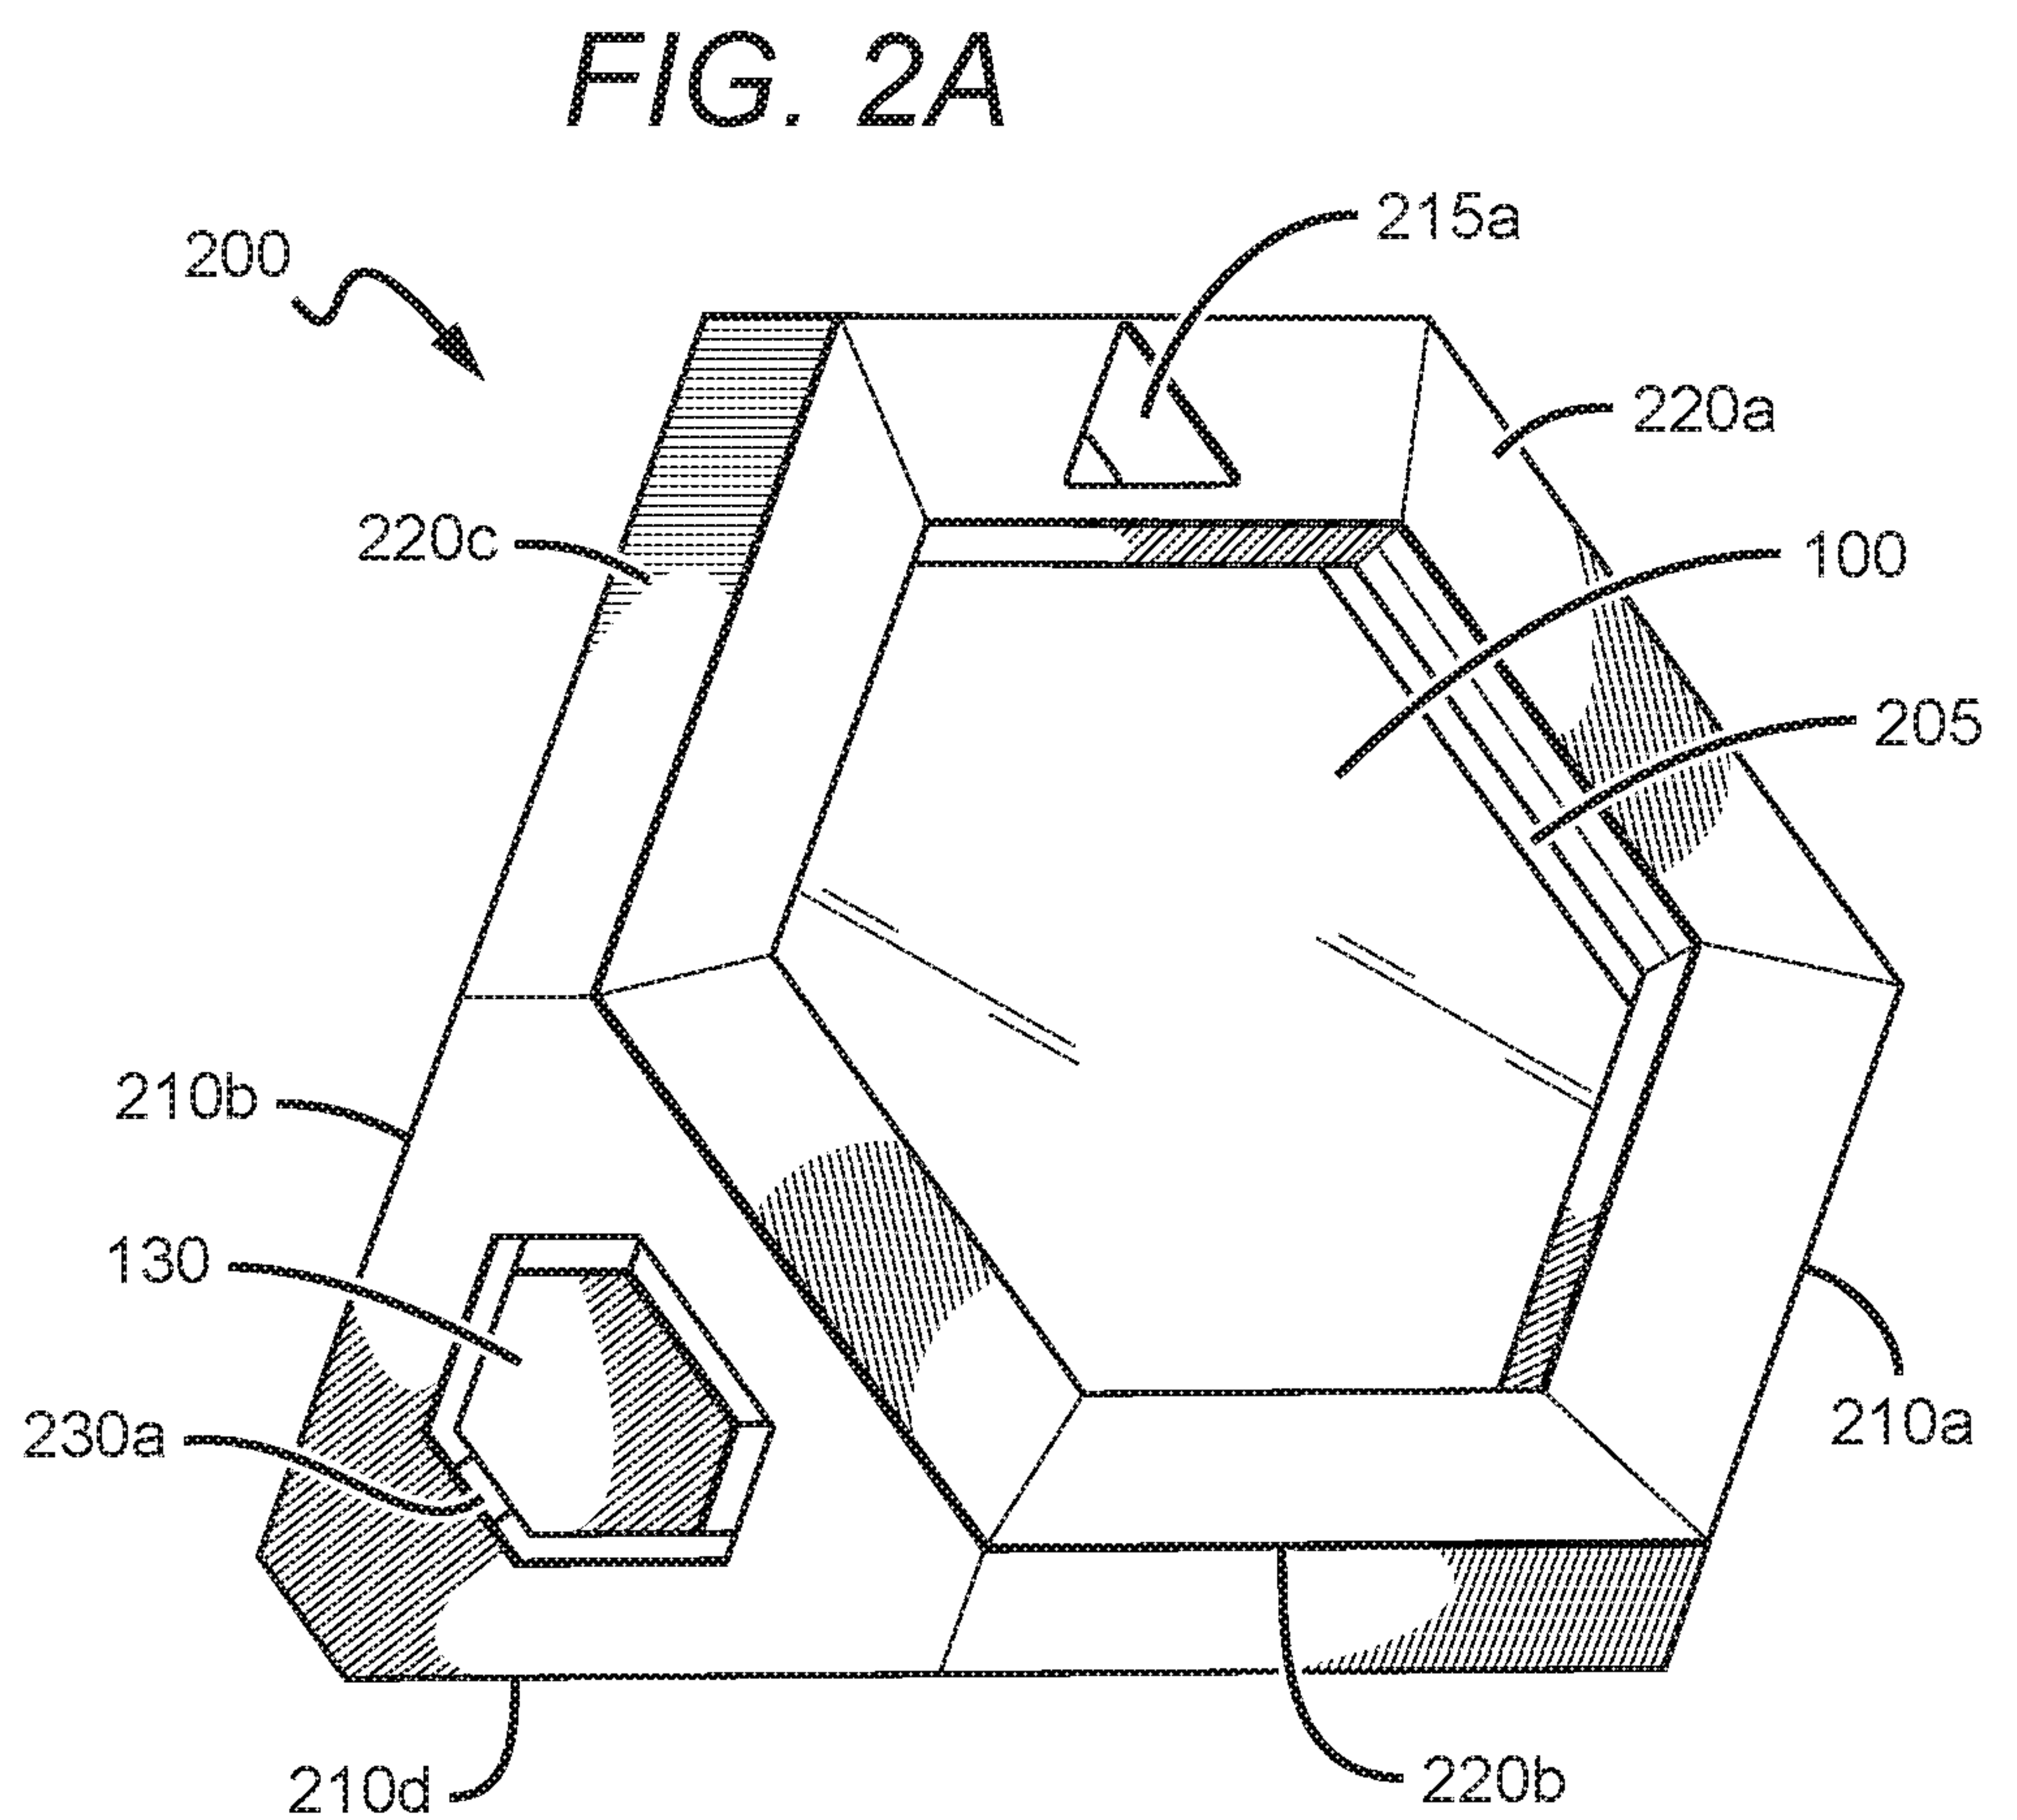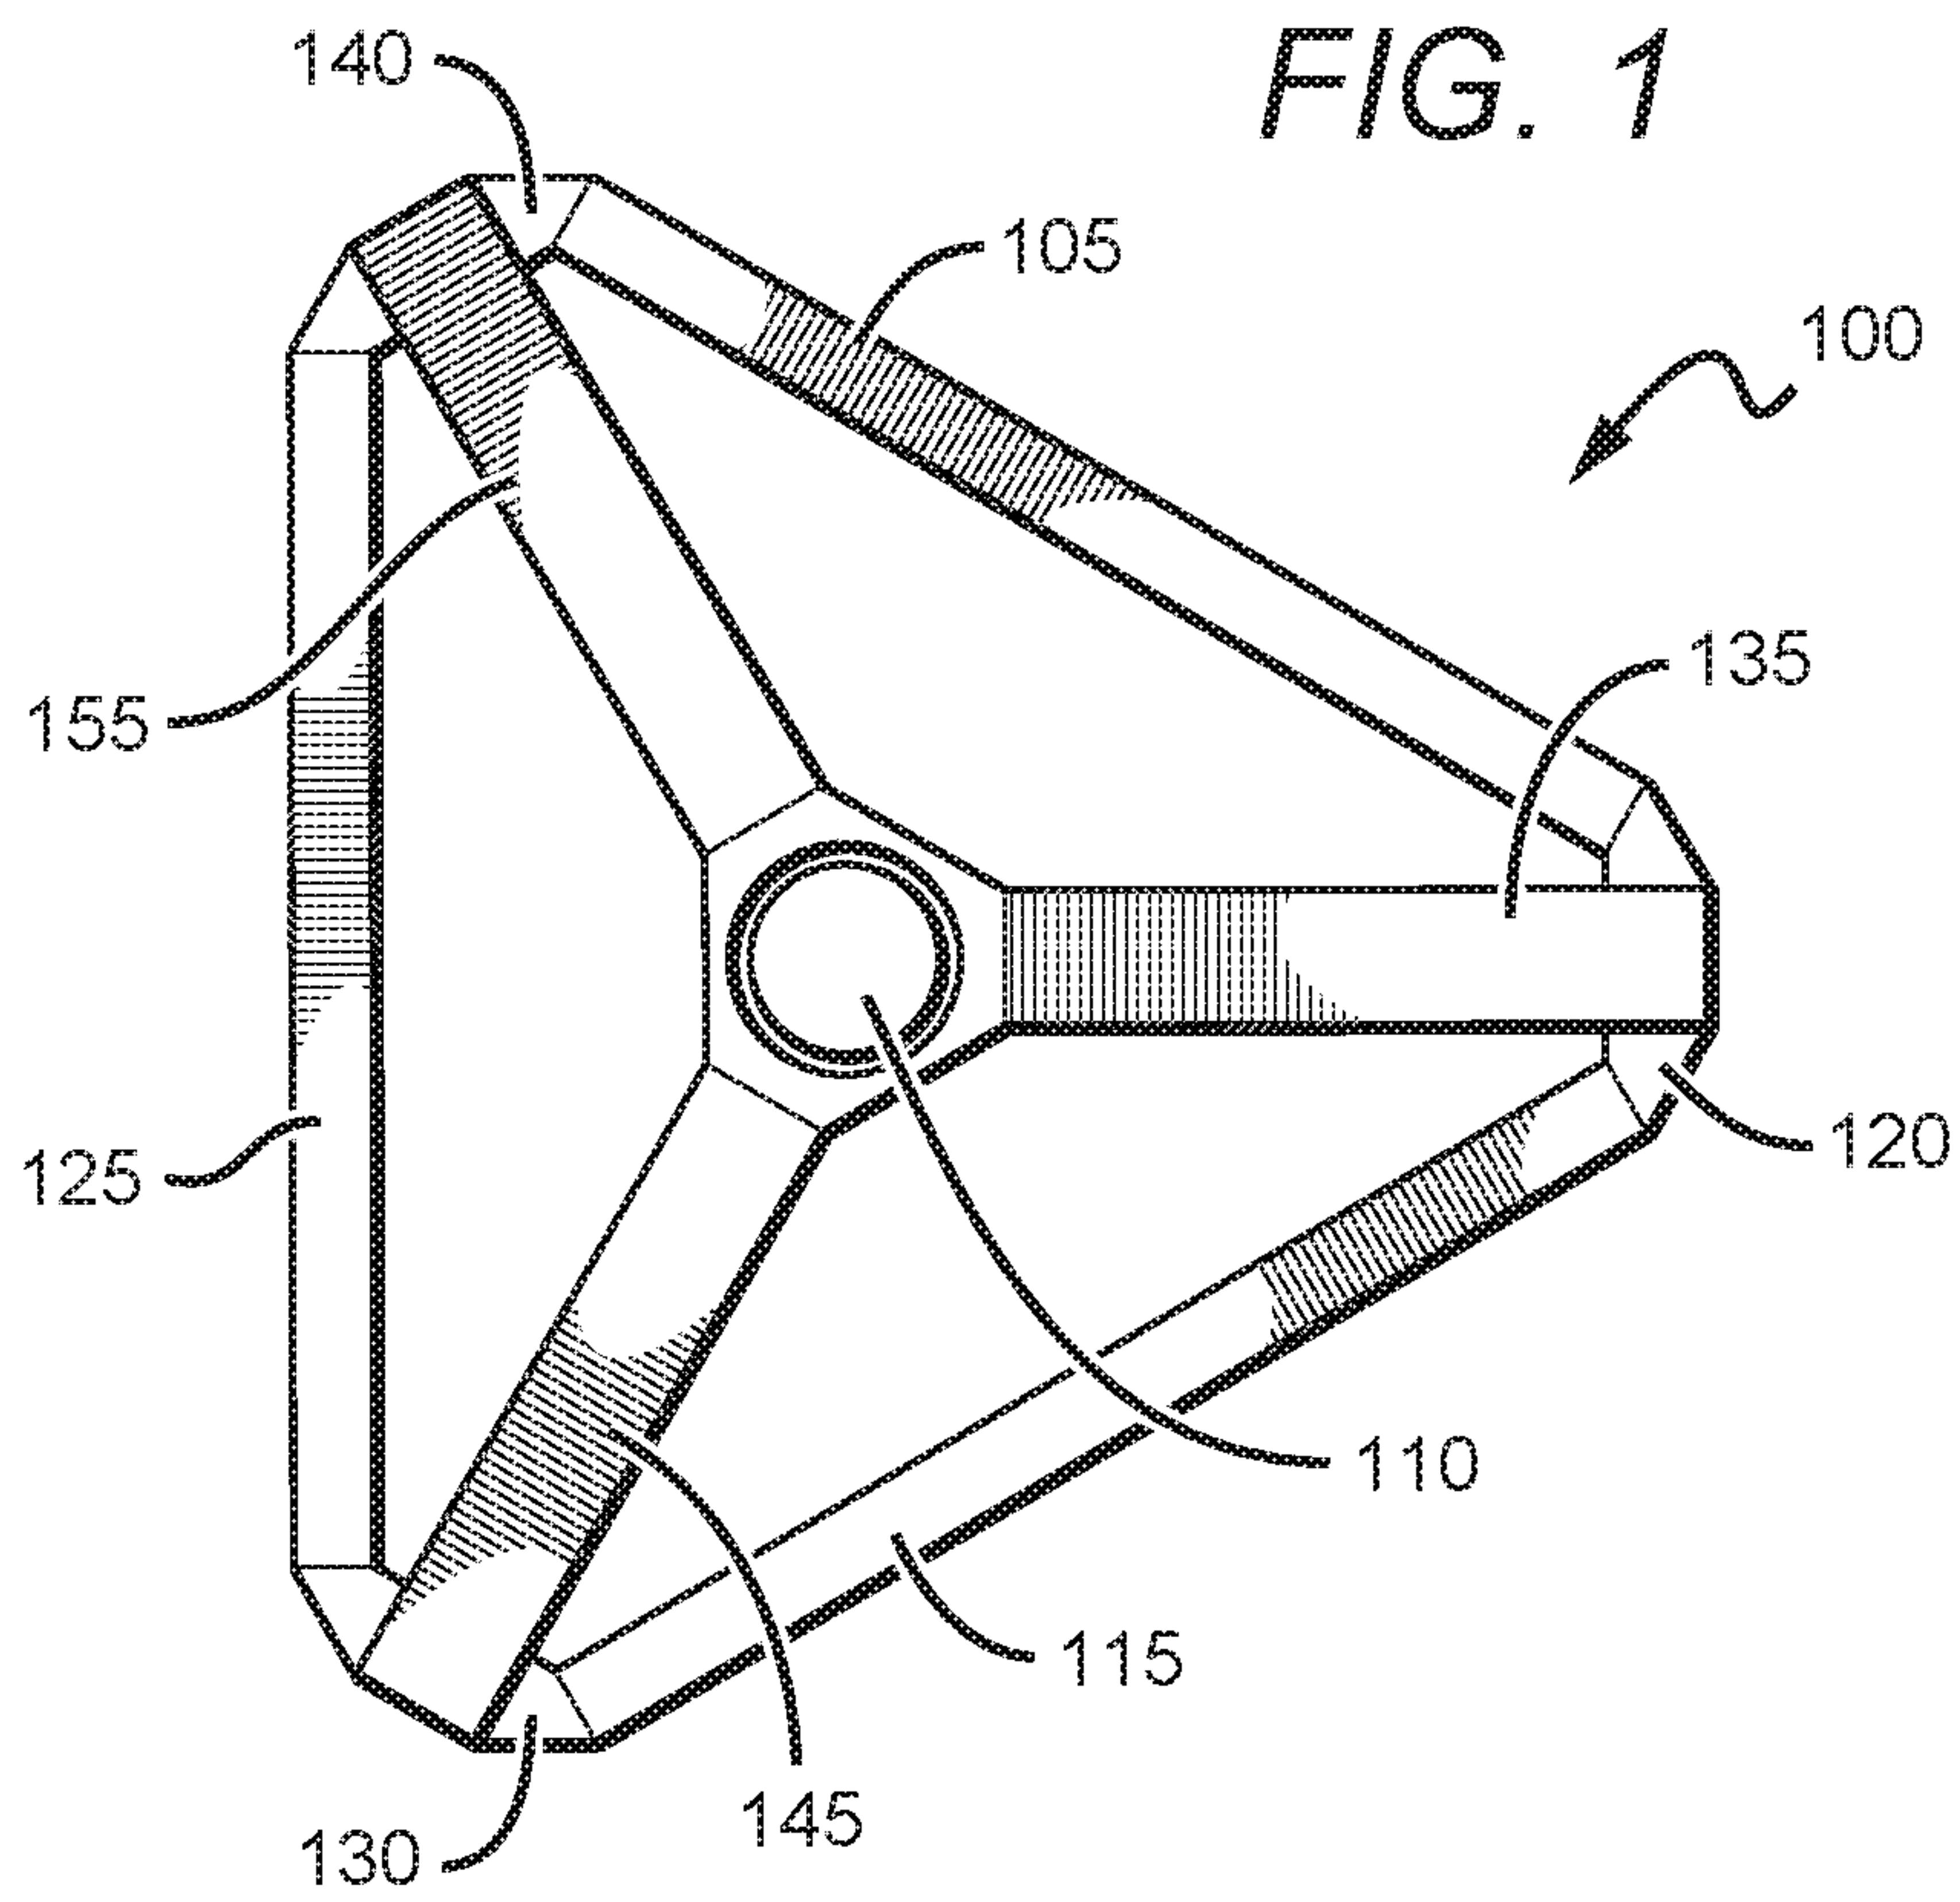

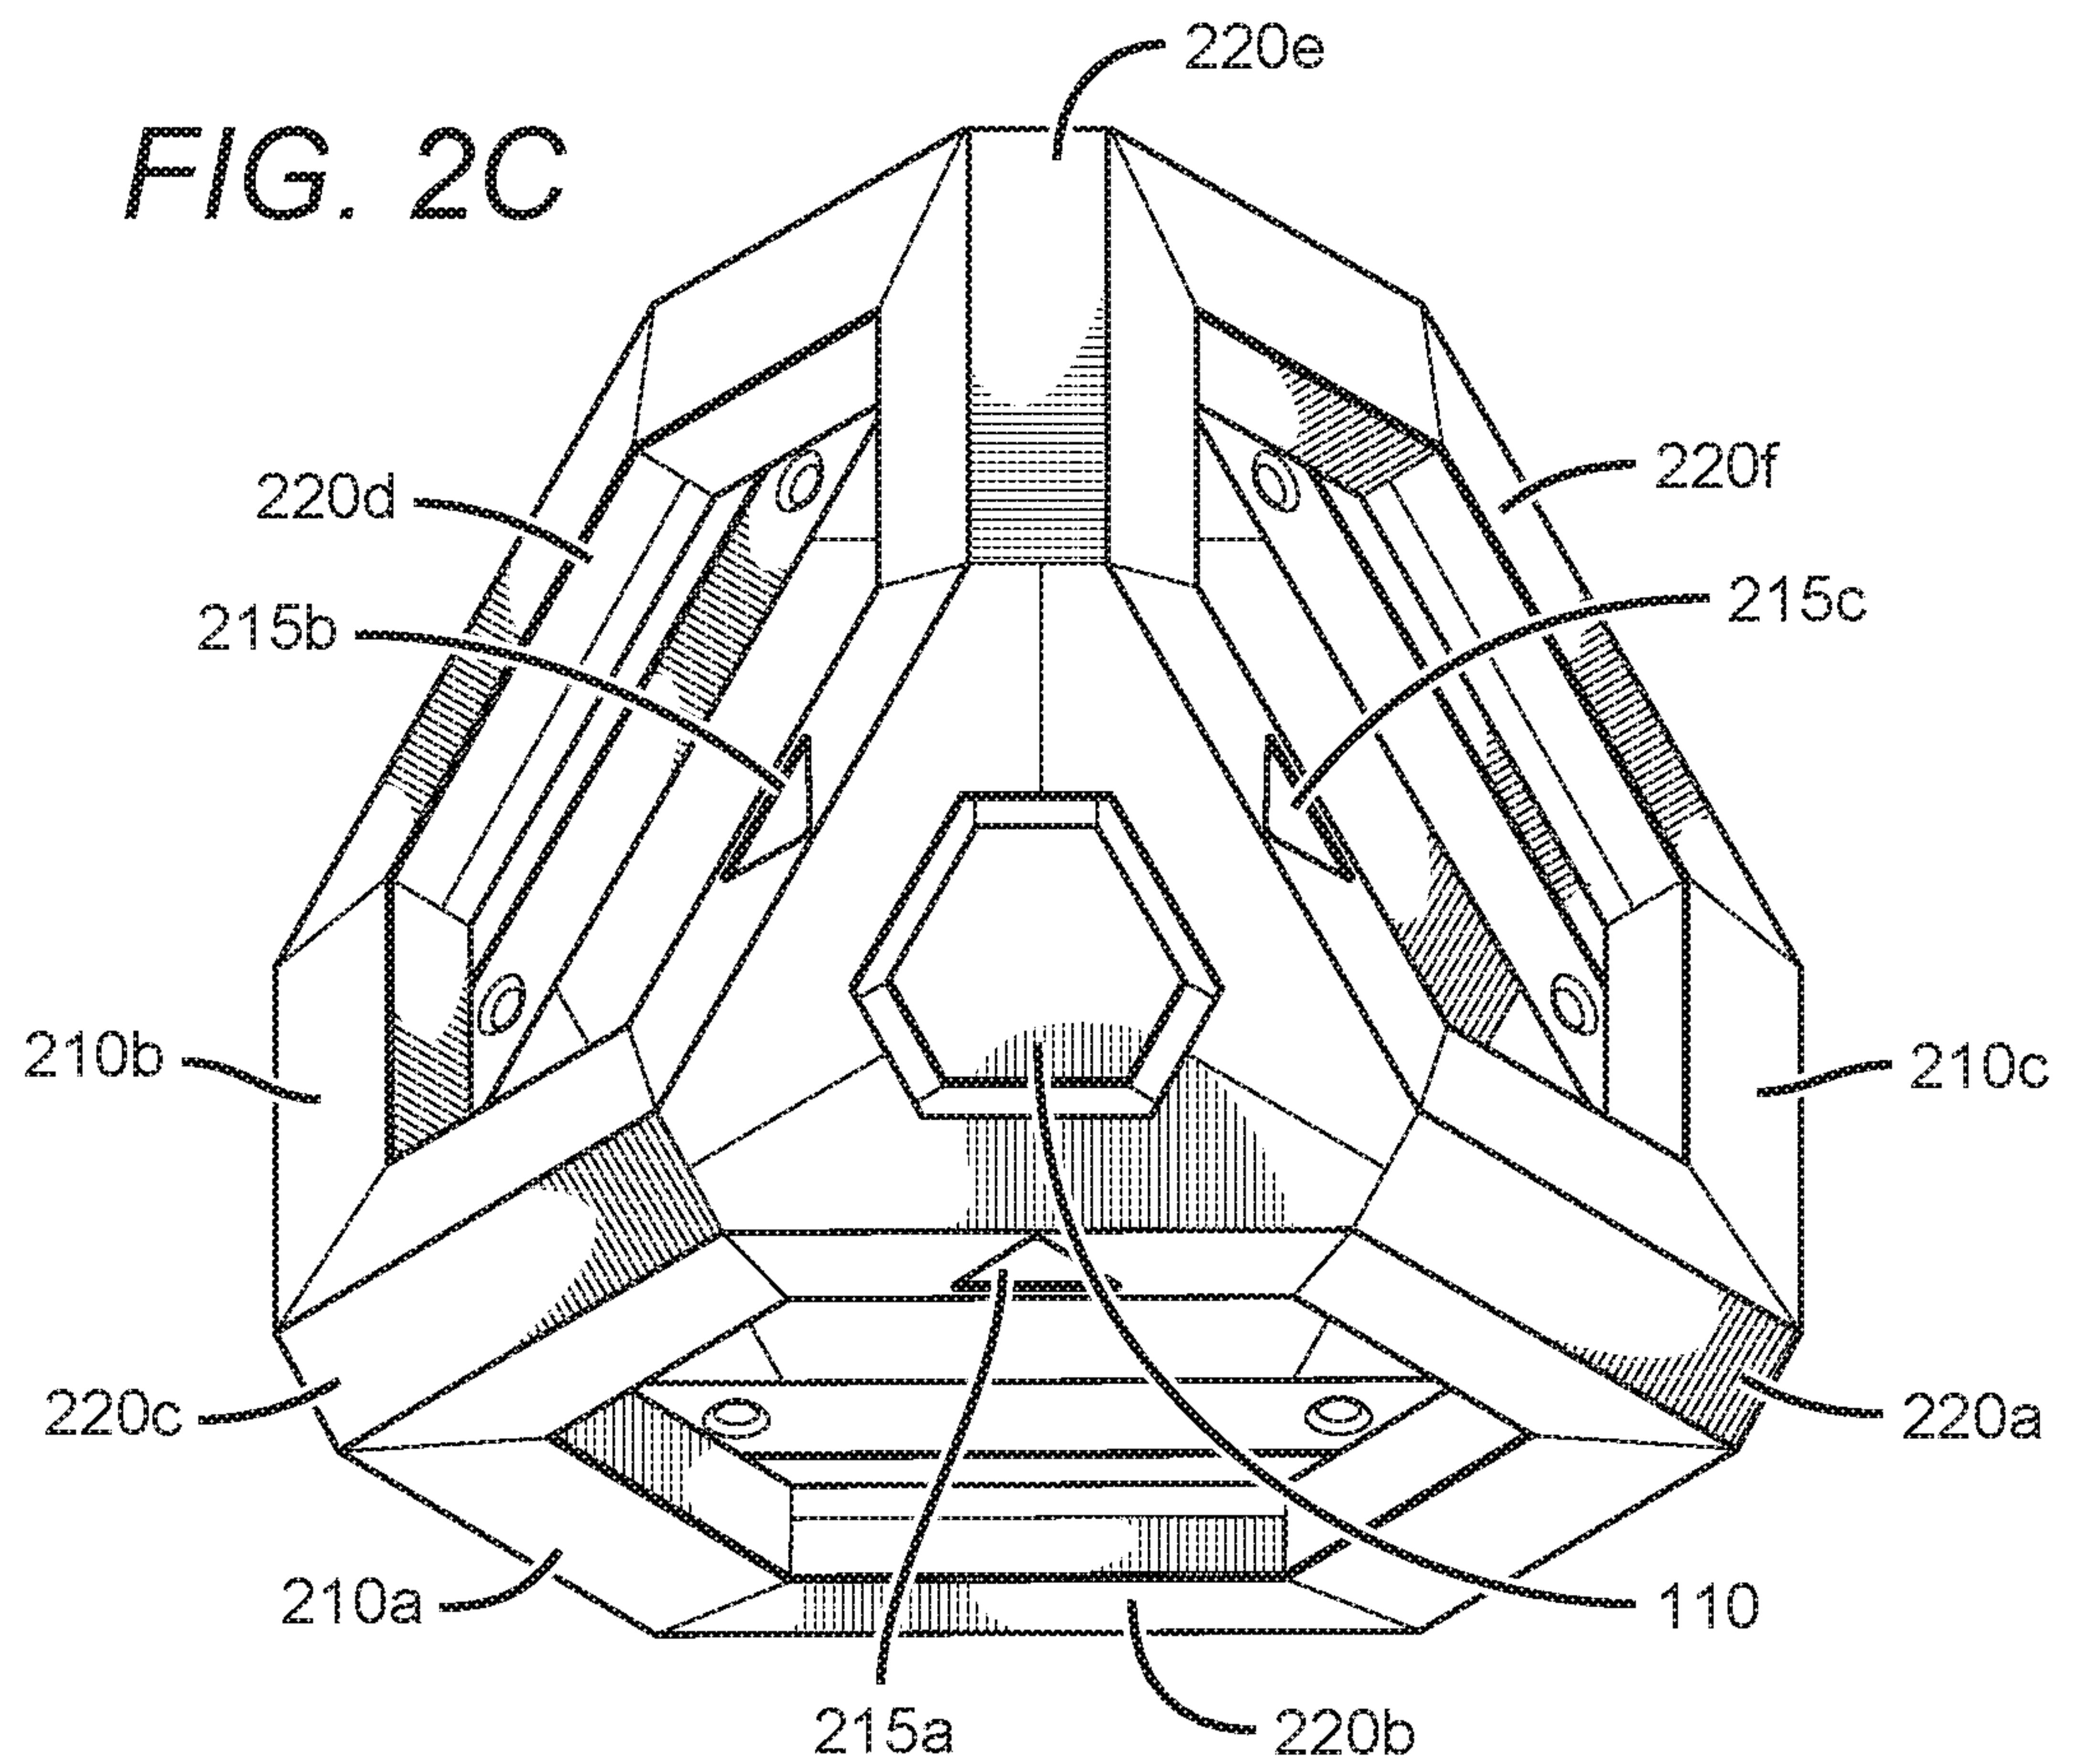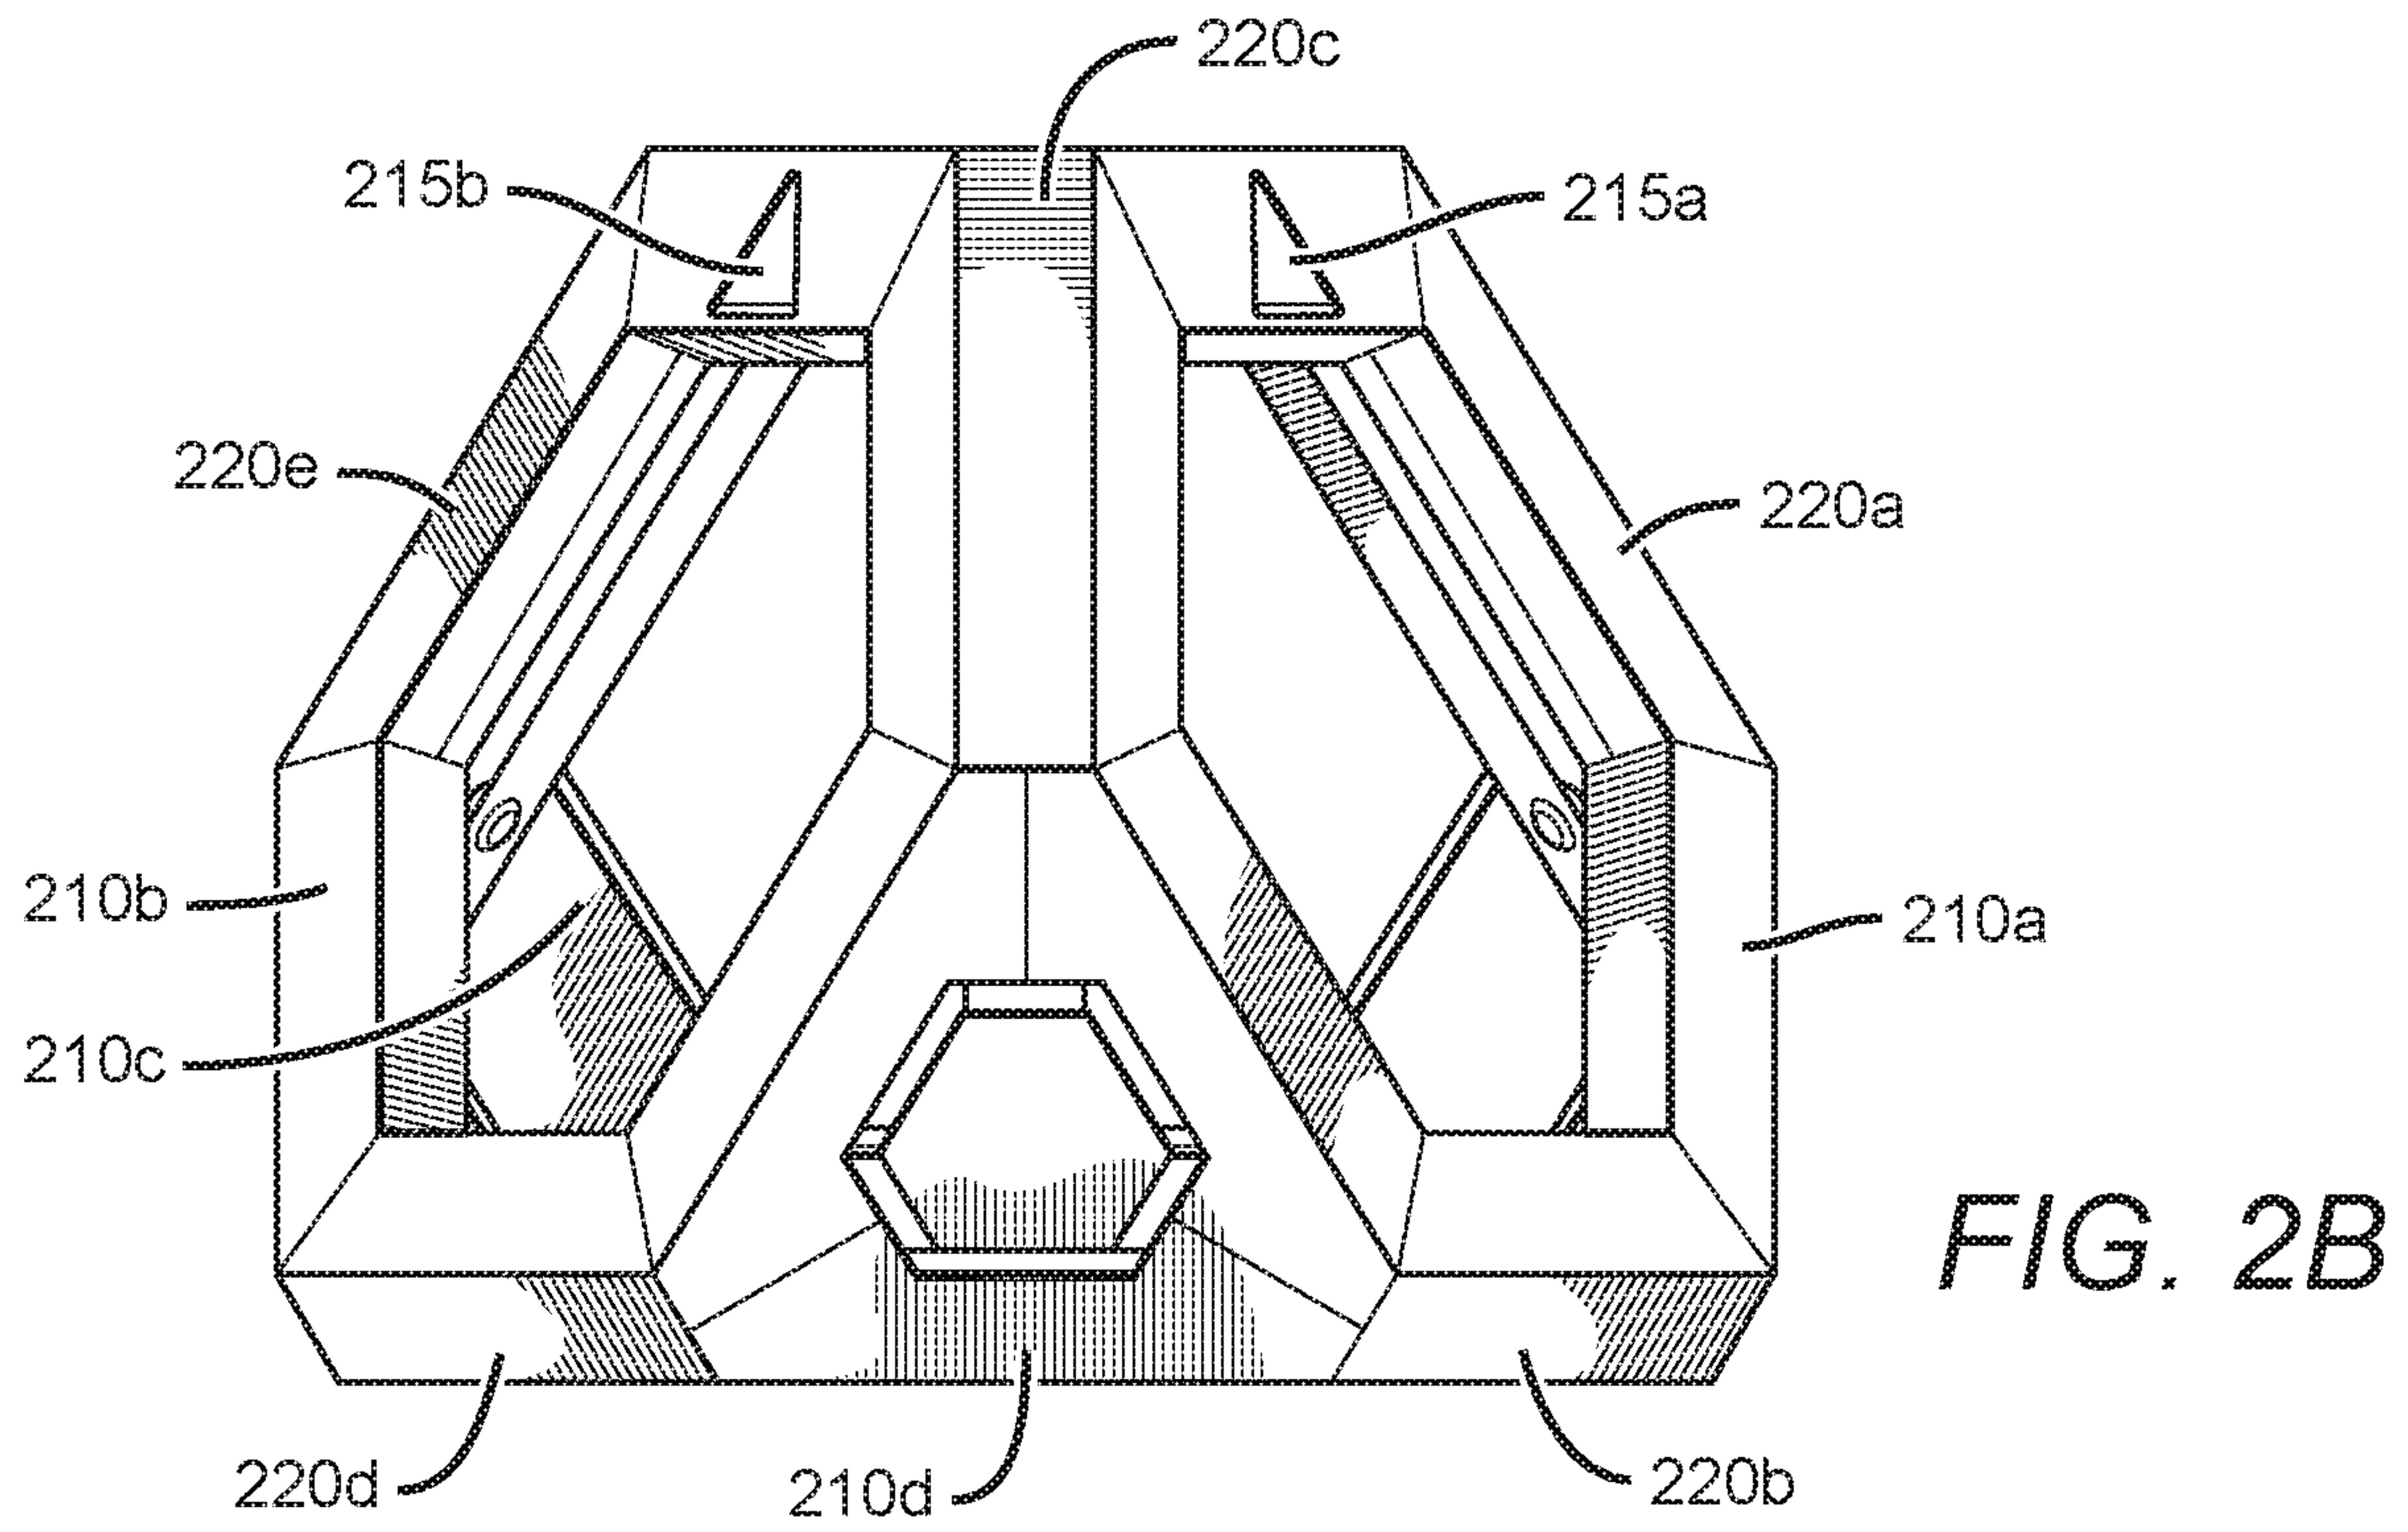

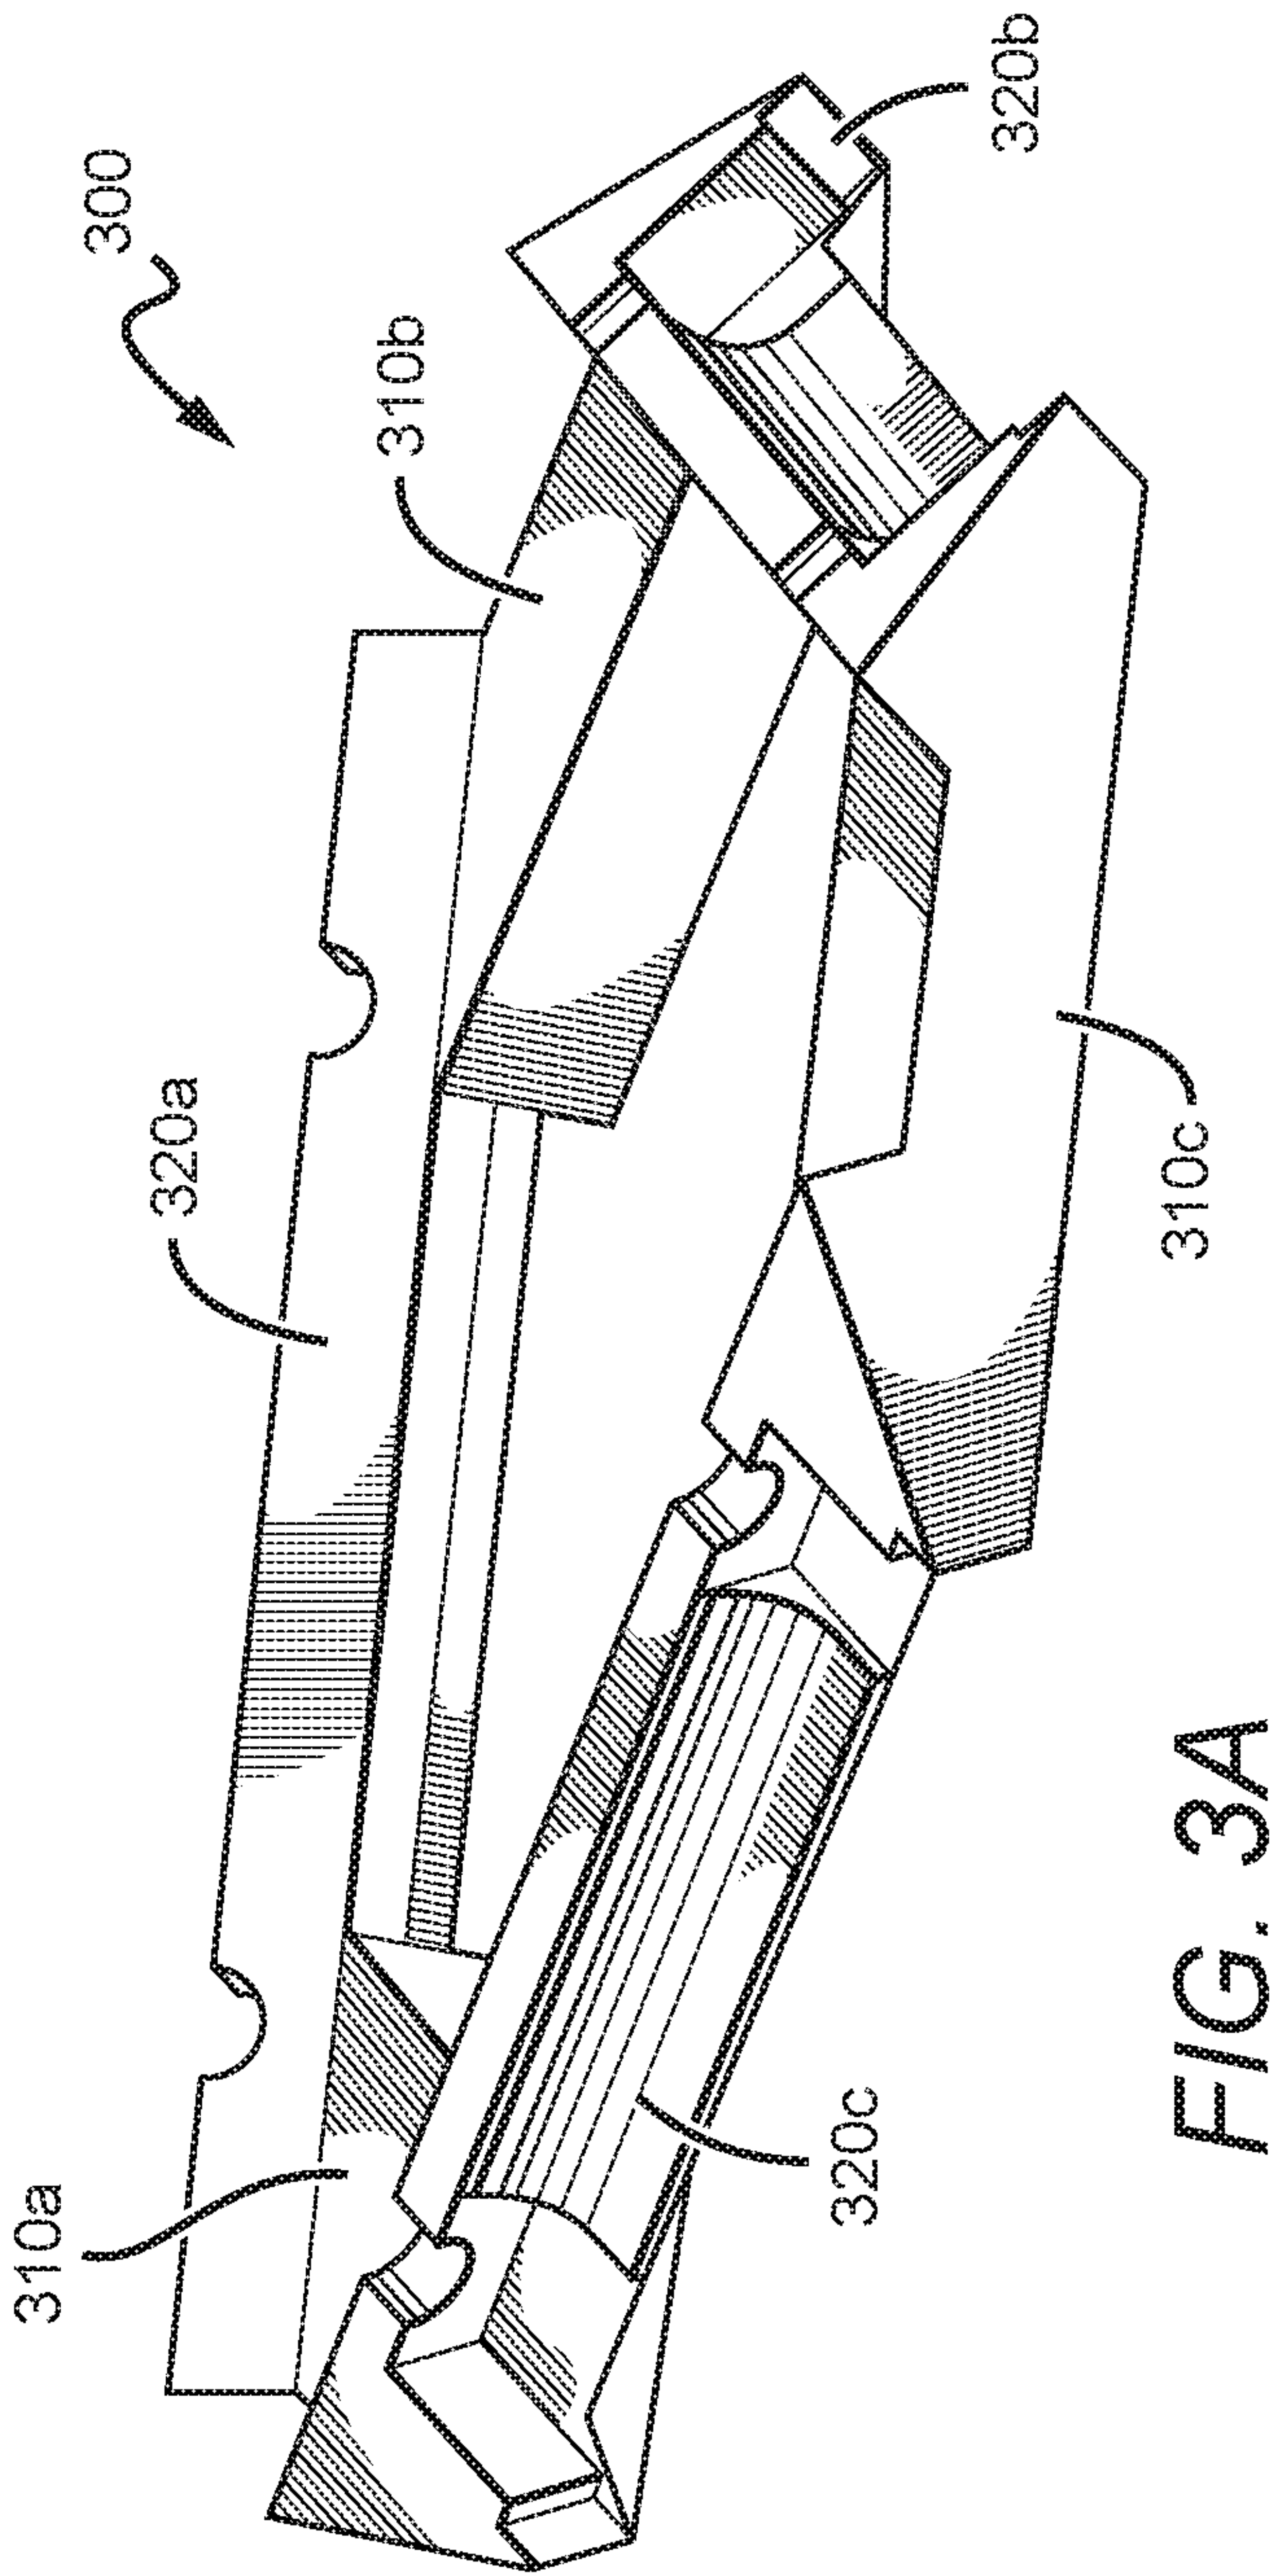


FIG. 3B

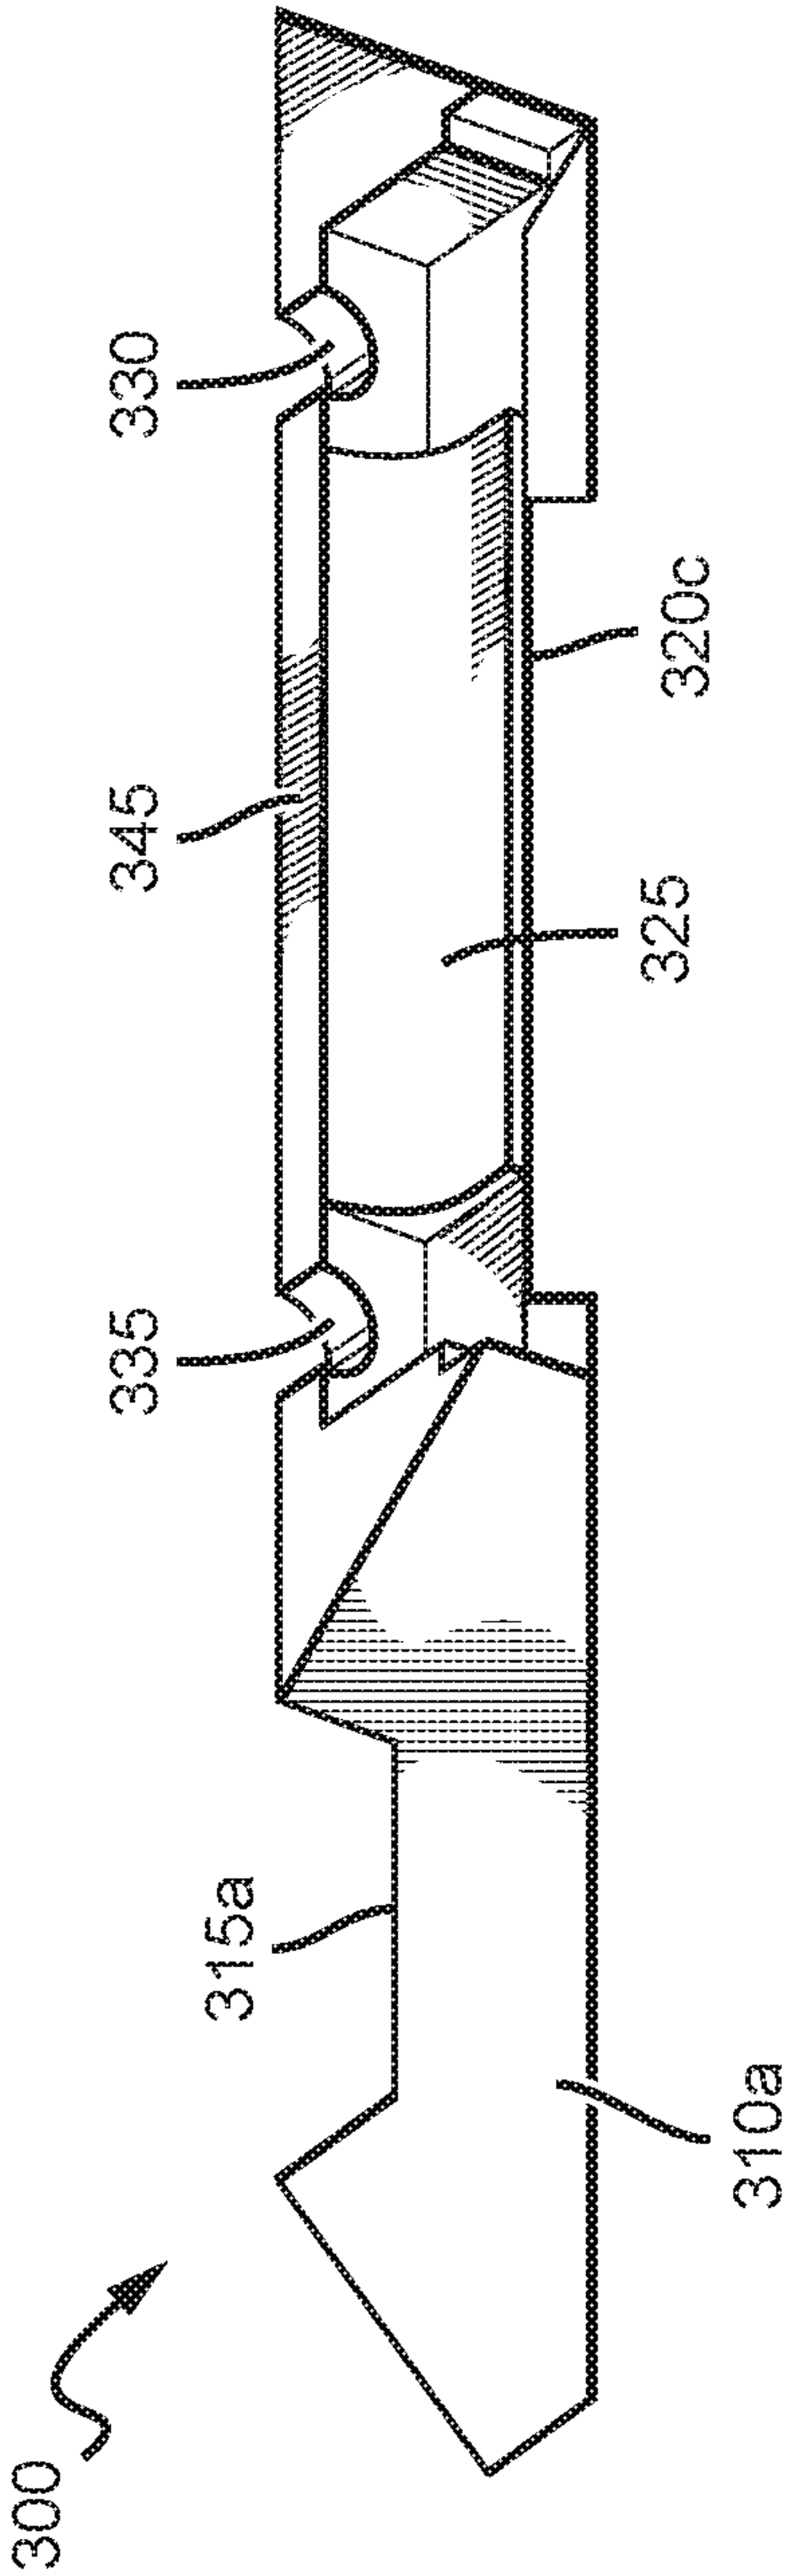
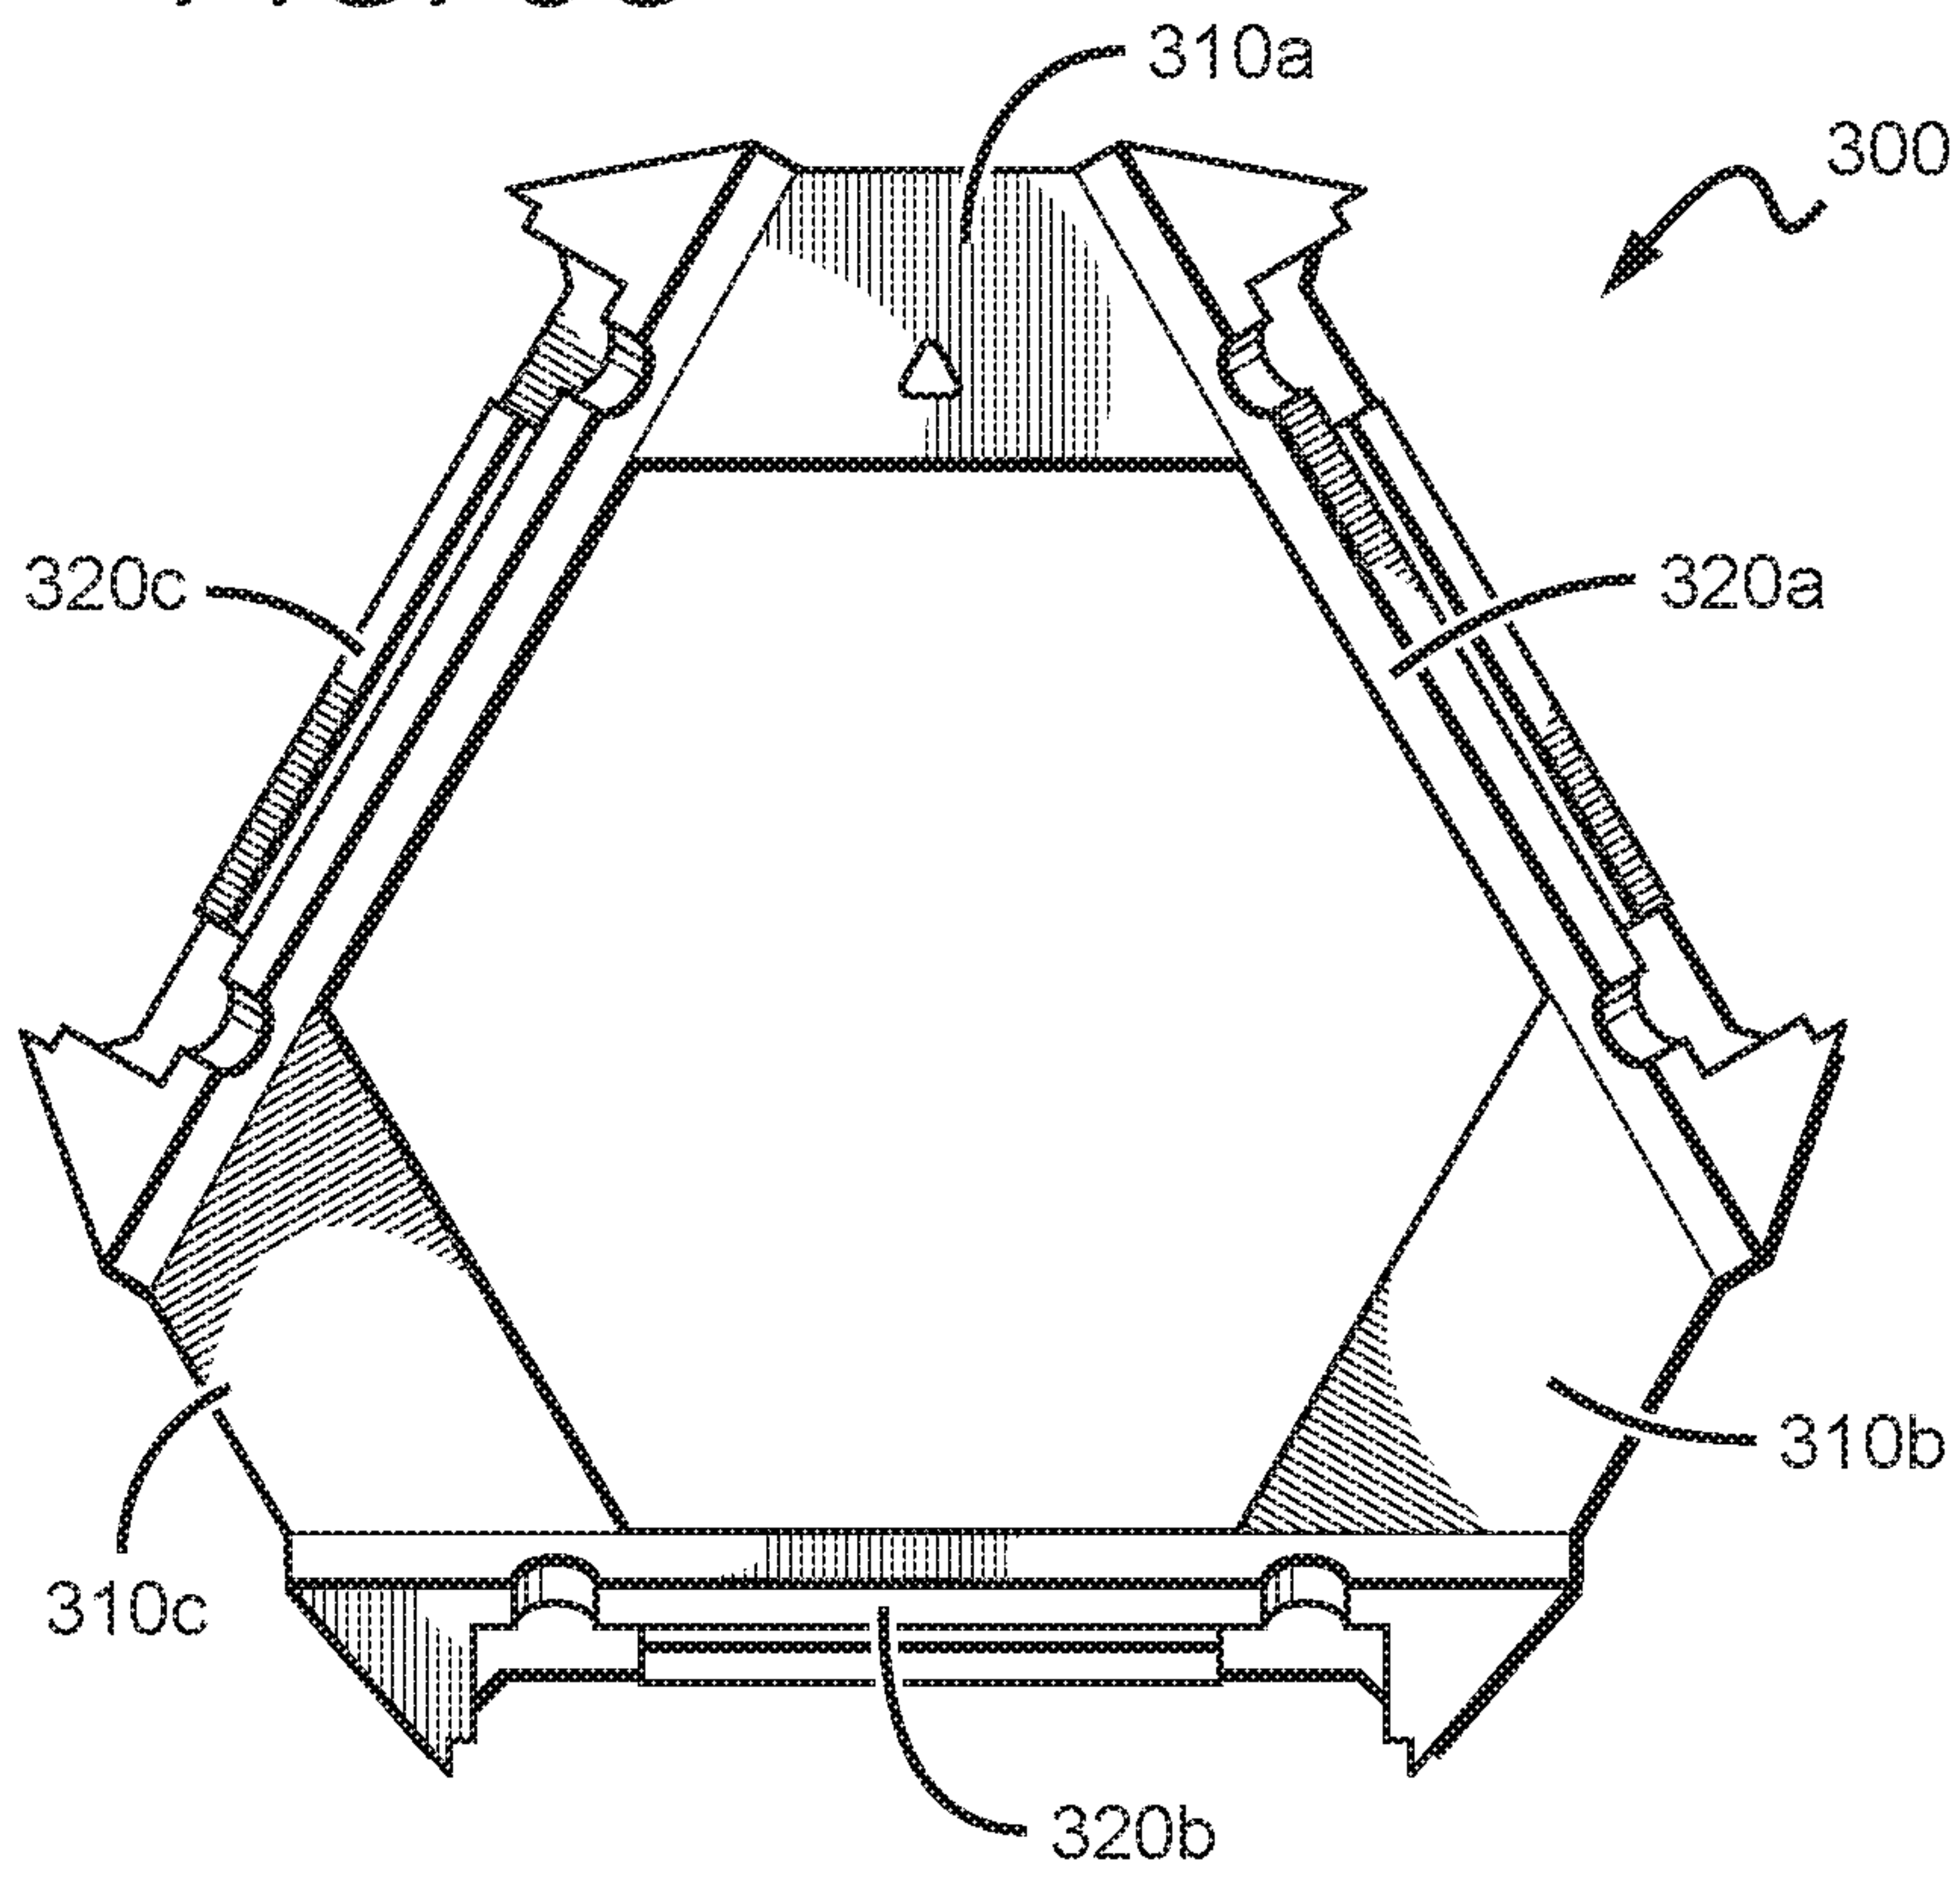
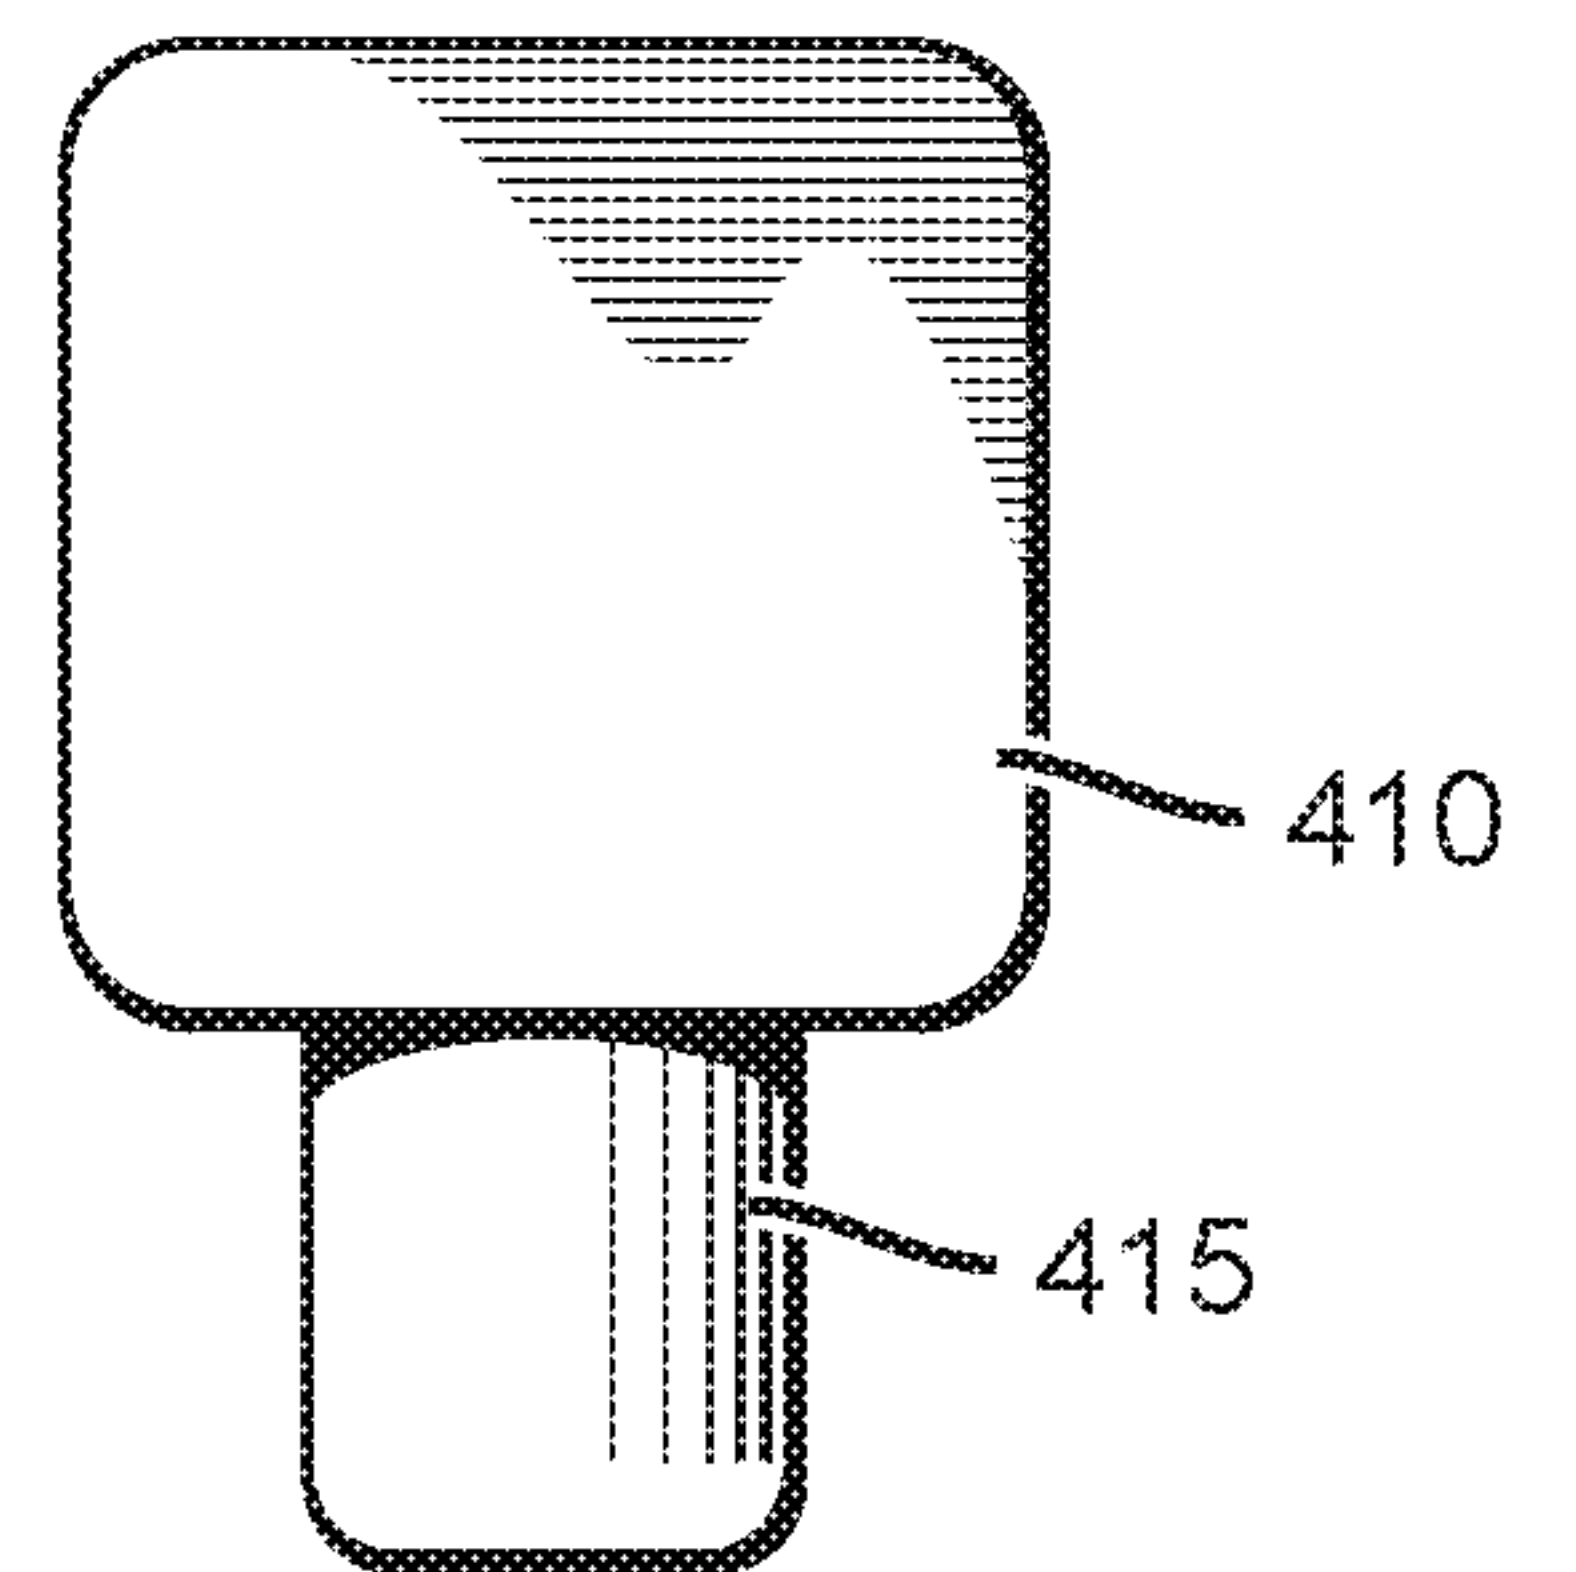
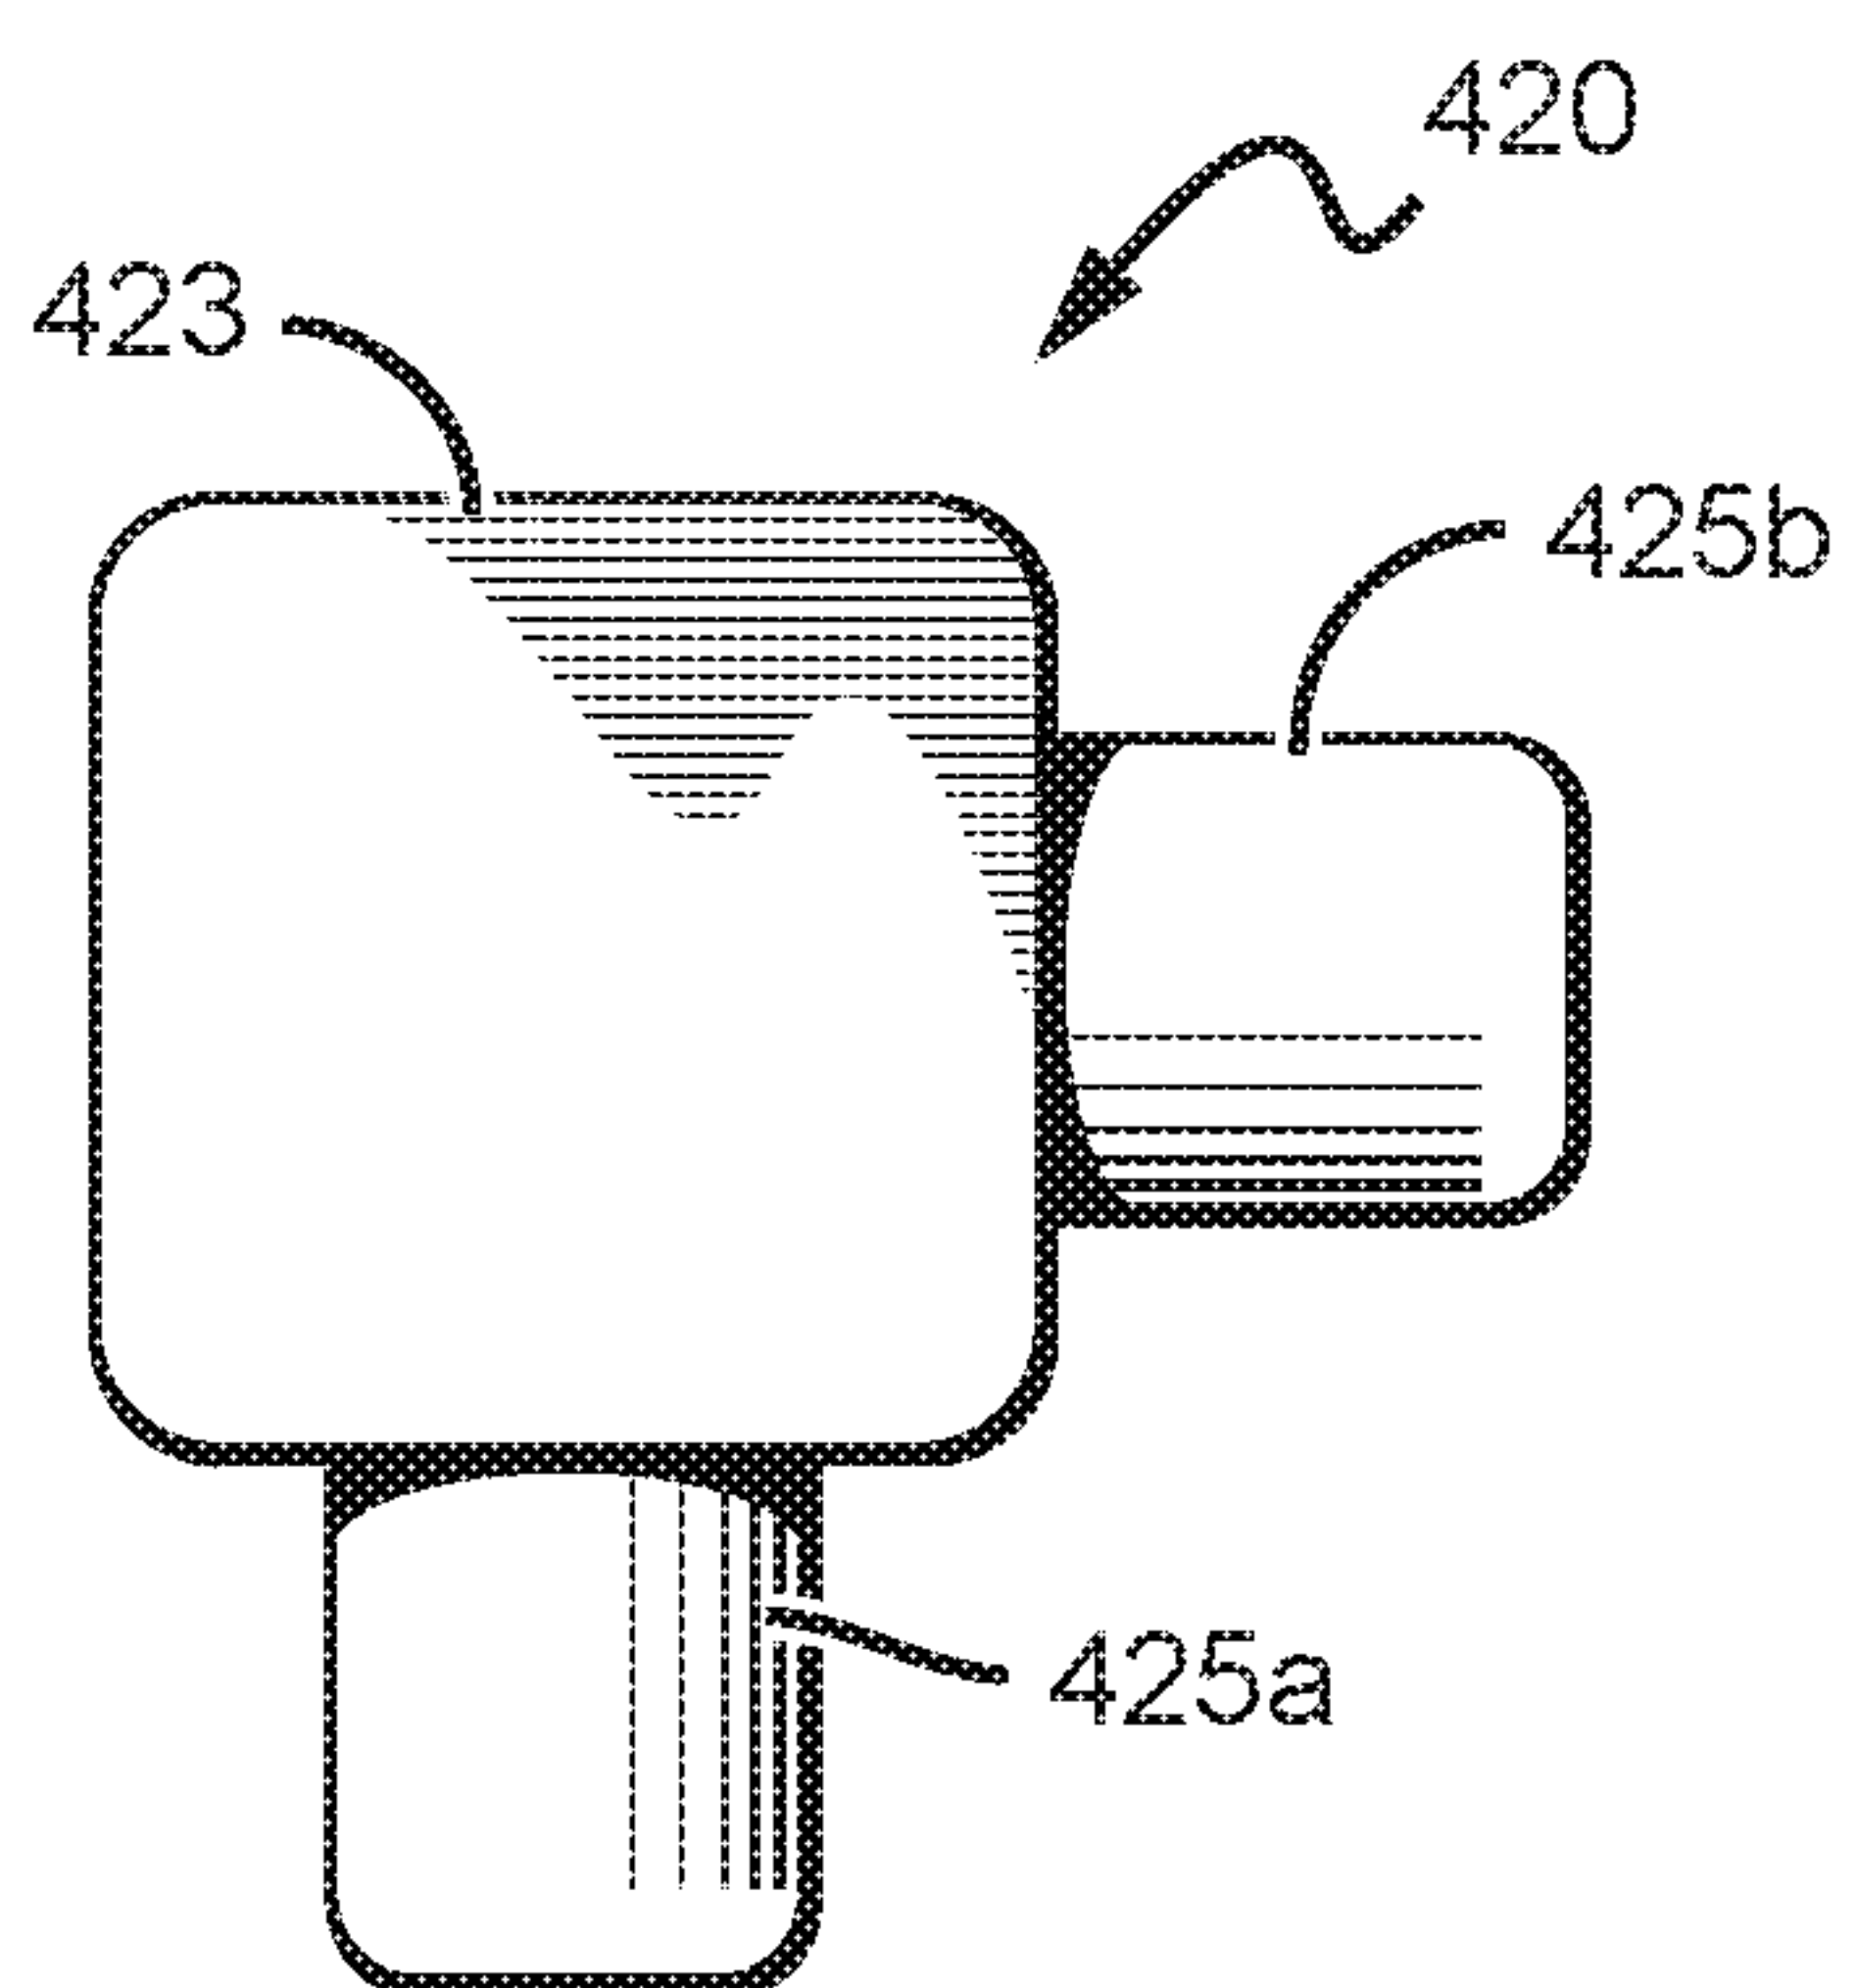
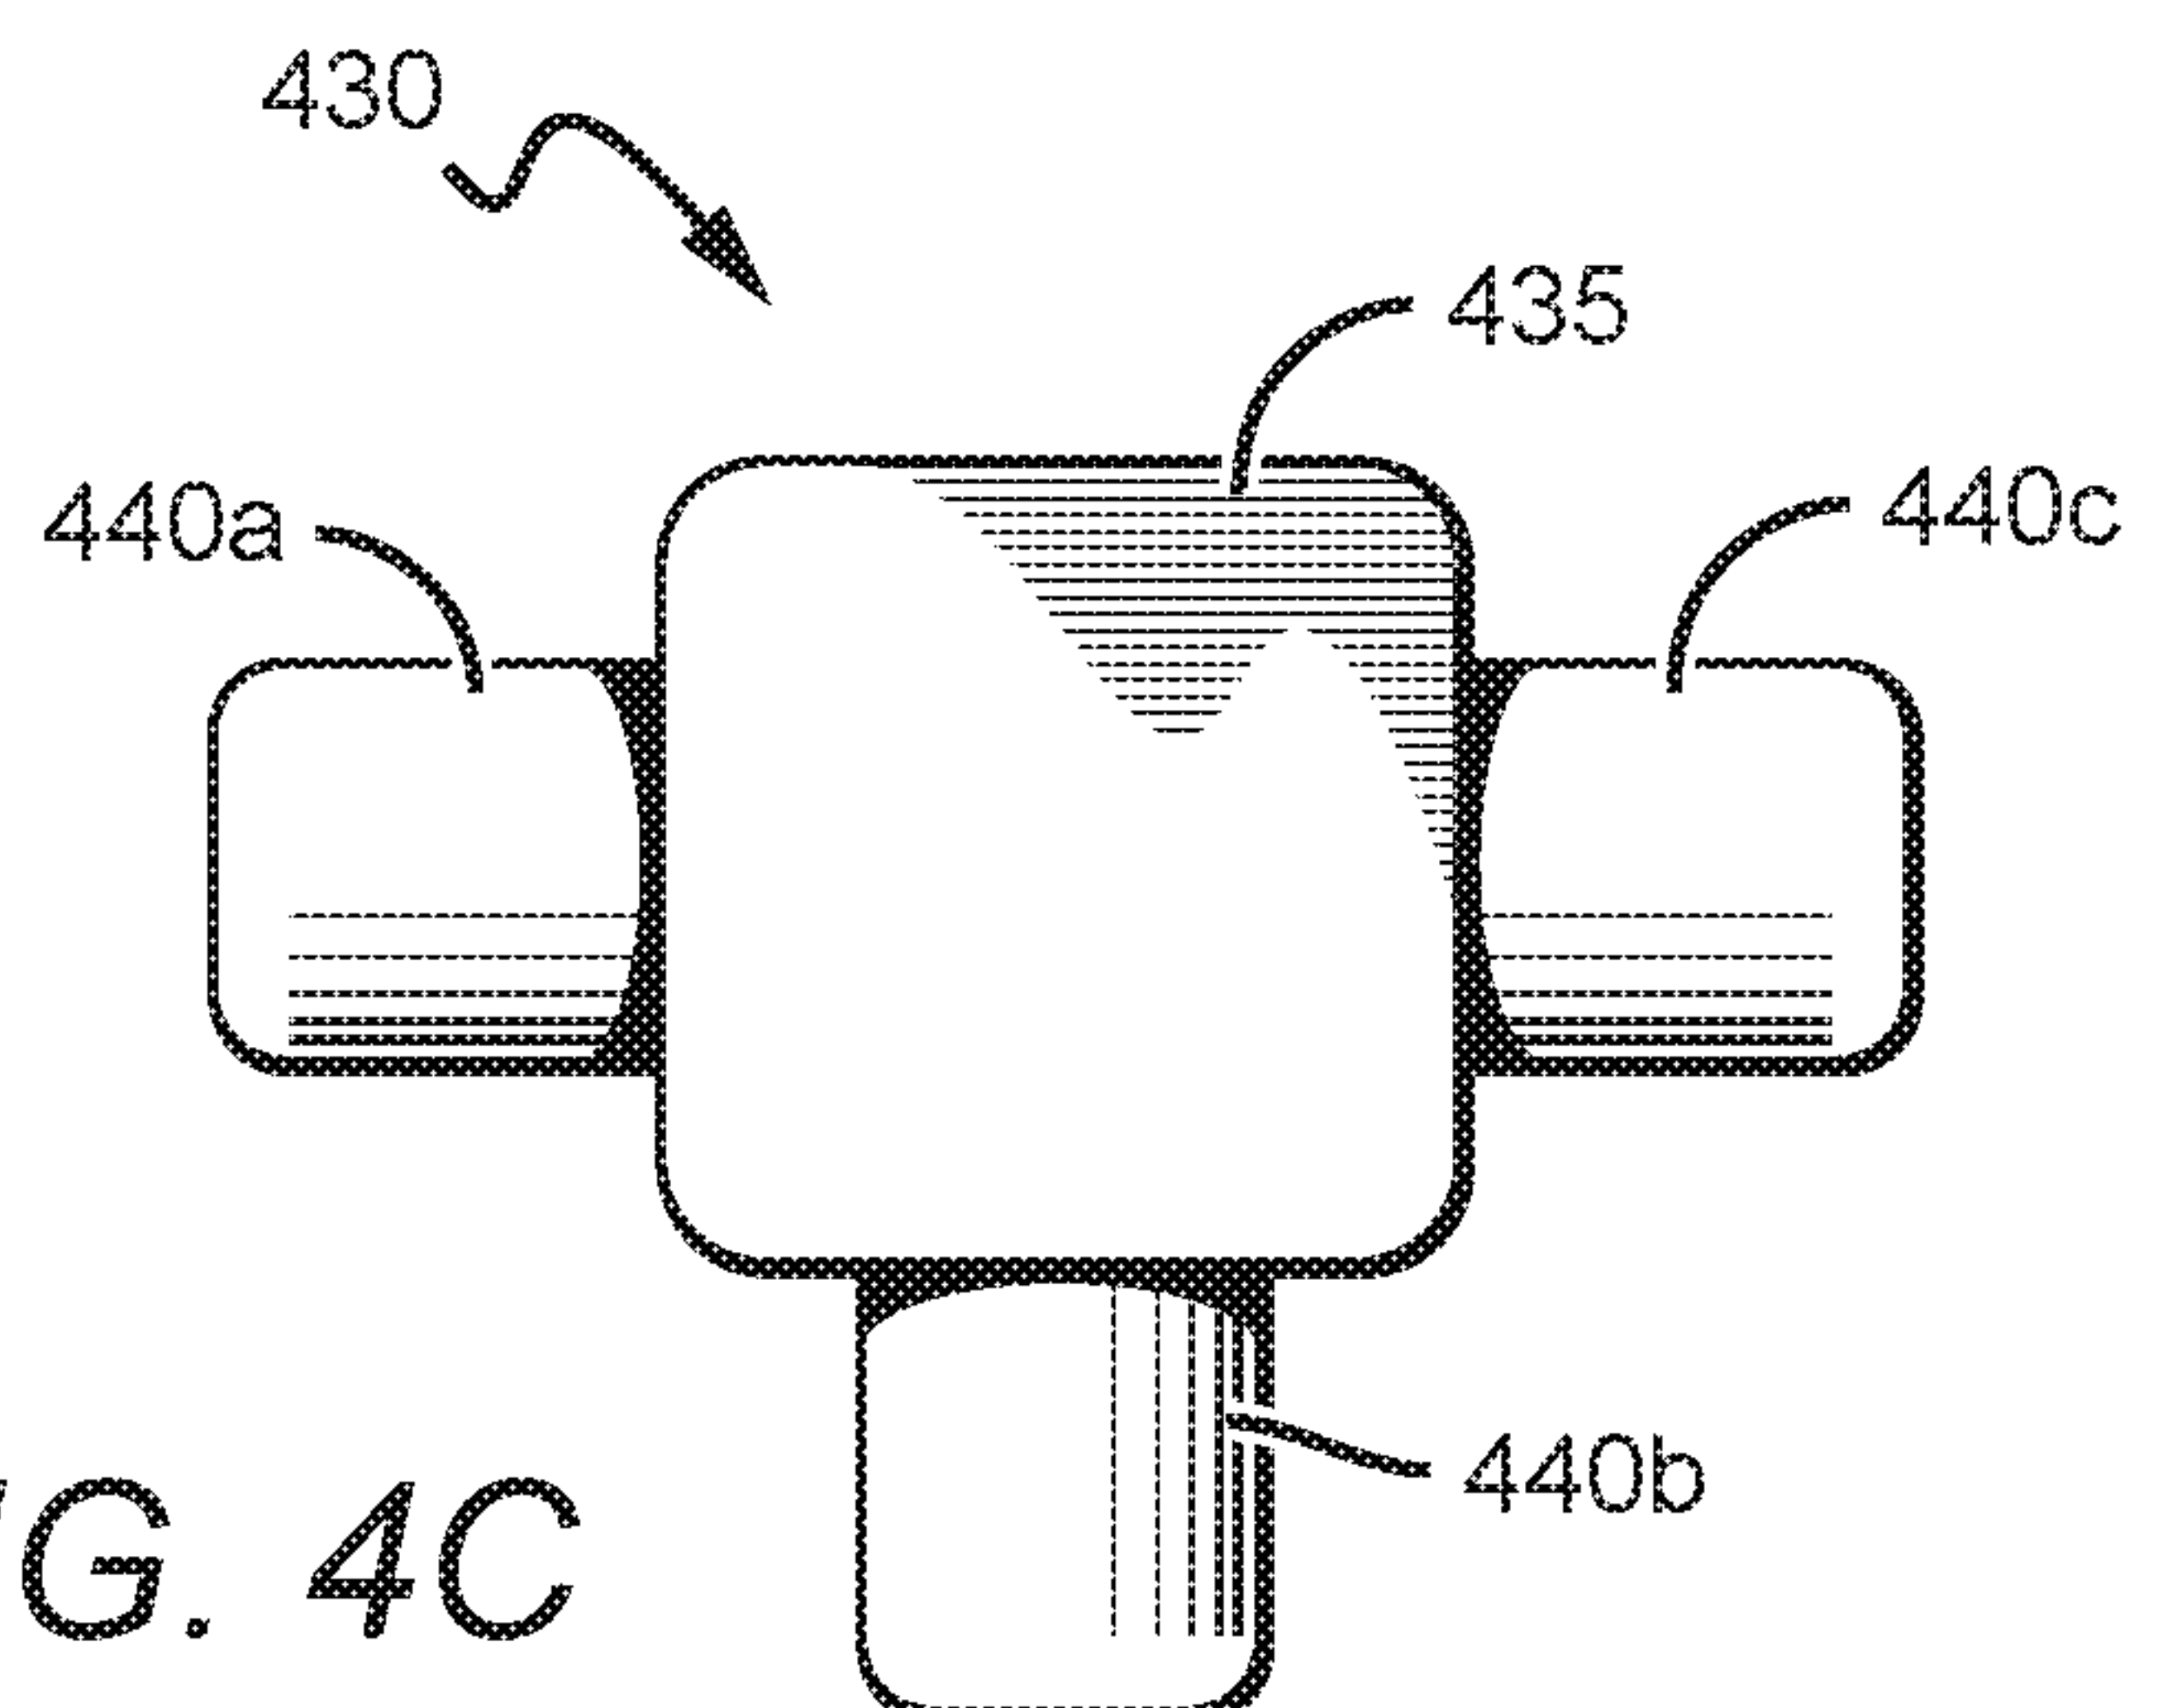


FIG. 3C*FIG. 4A**FIG. 4B**FIG. 4C*

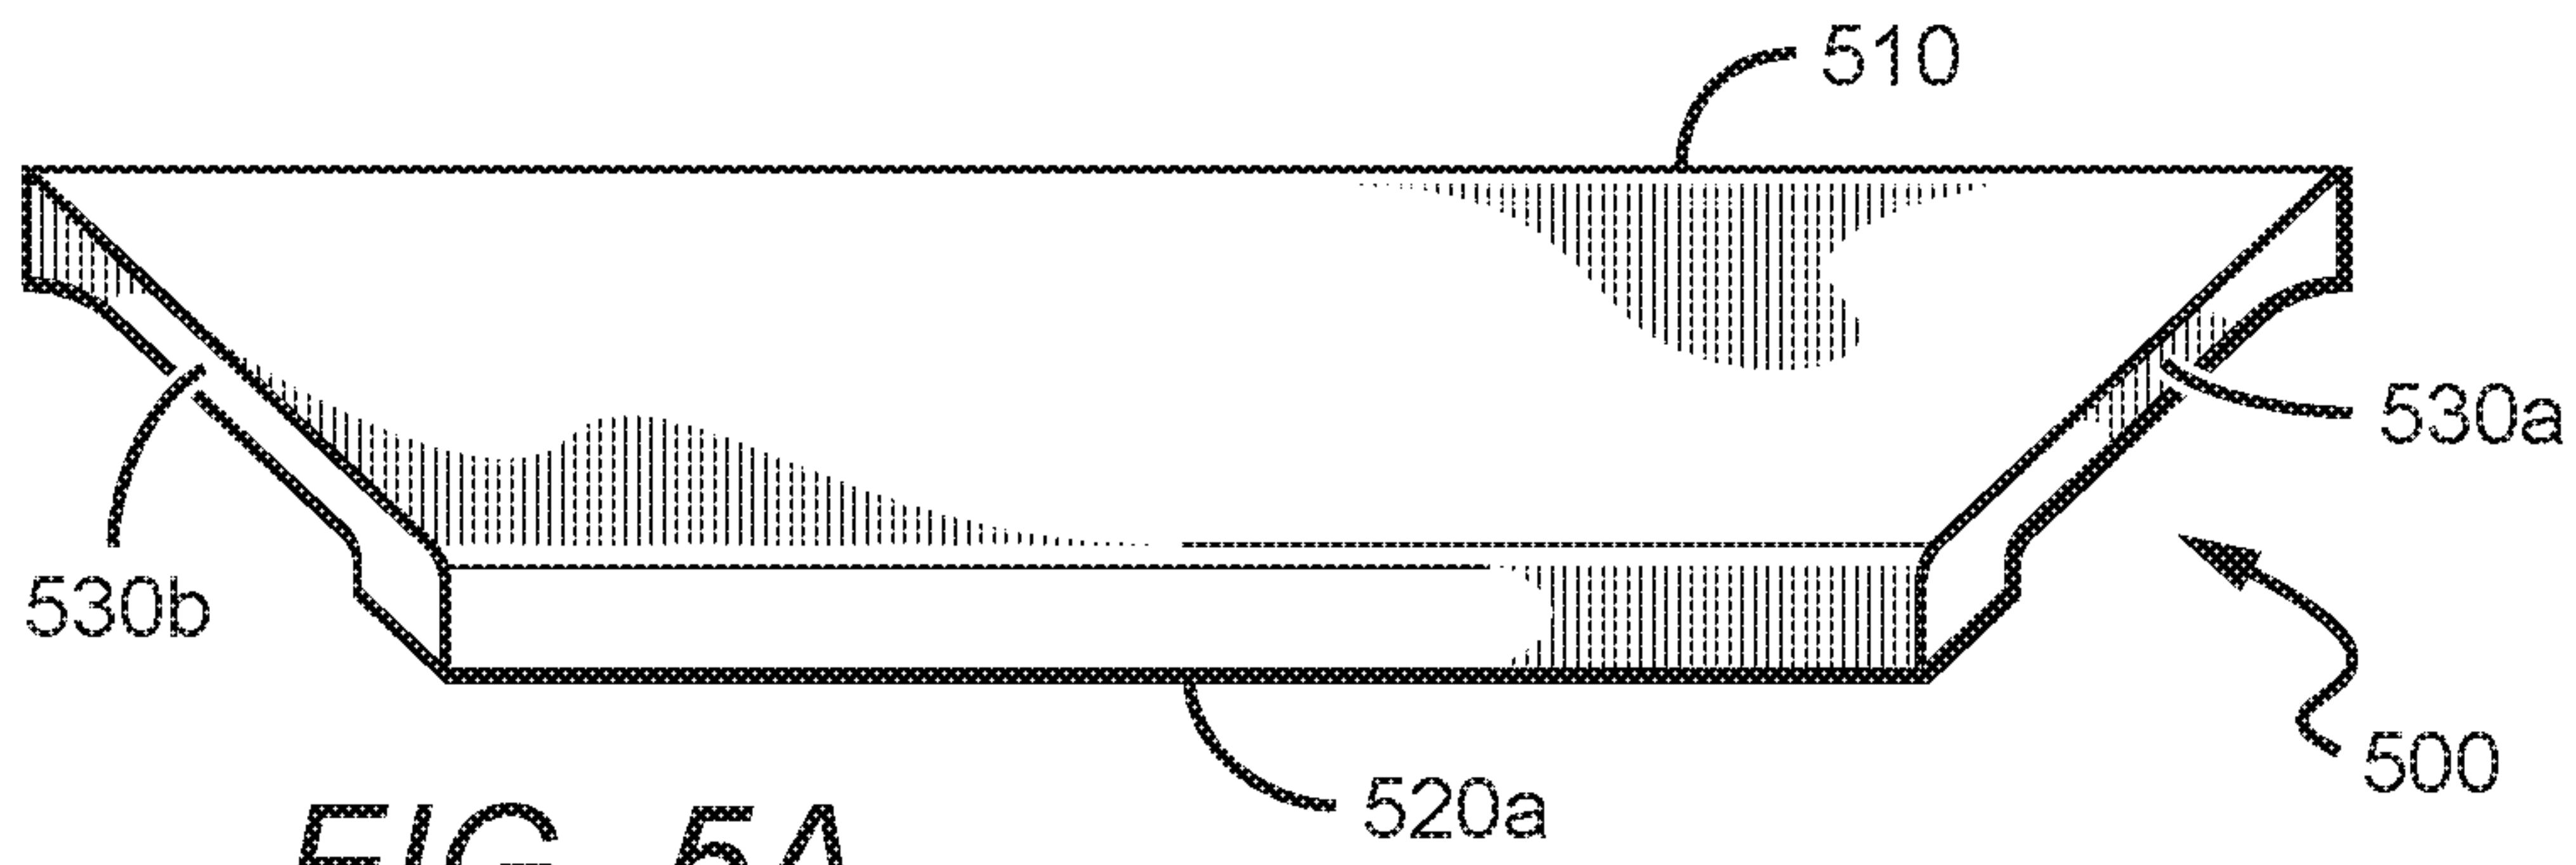


FIG. 5A

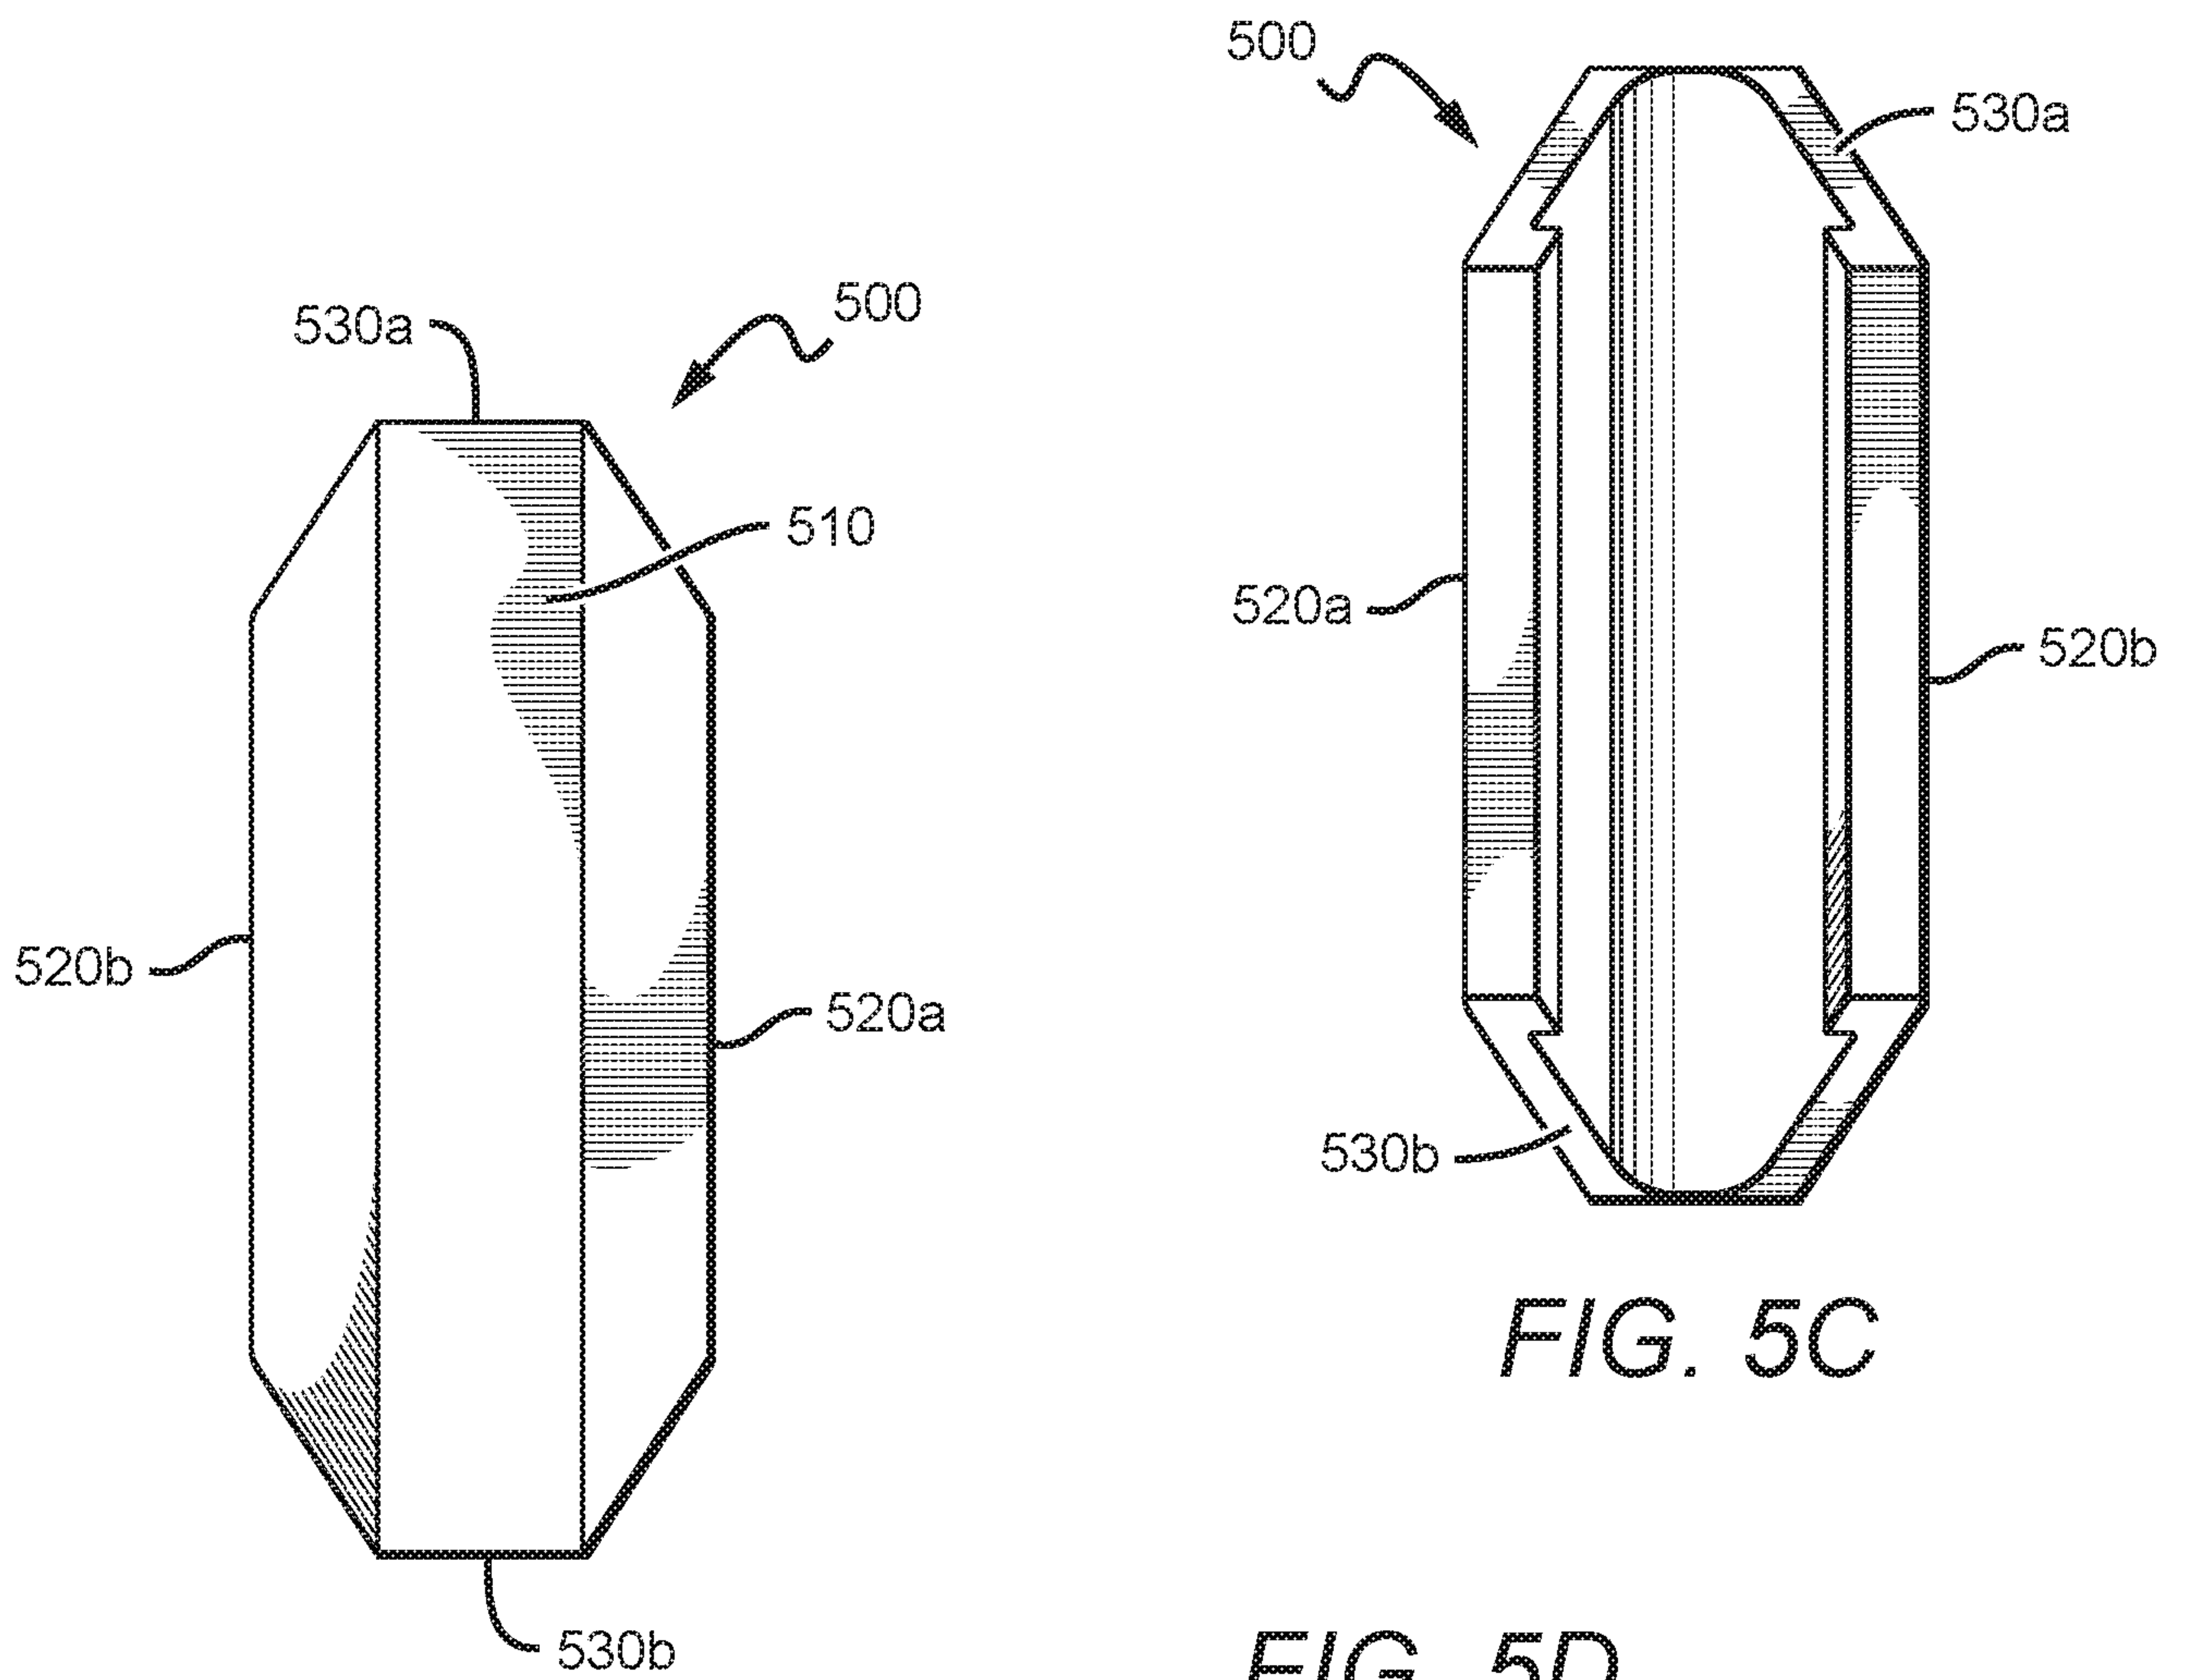


FIG. 5B

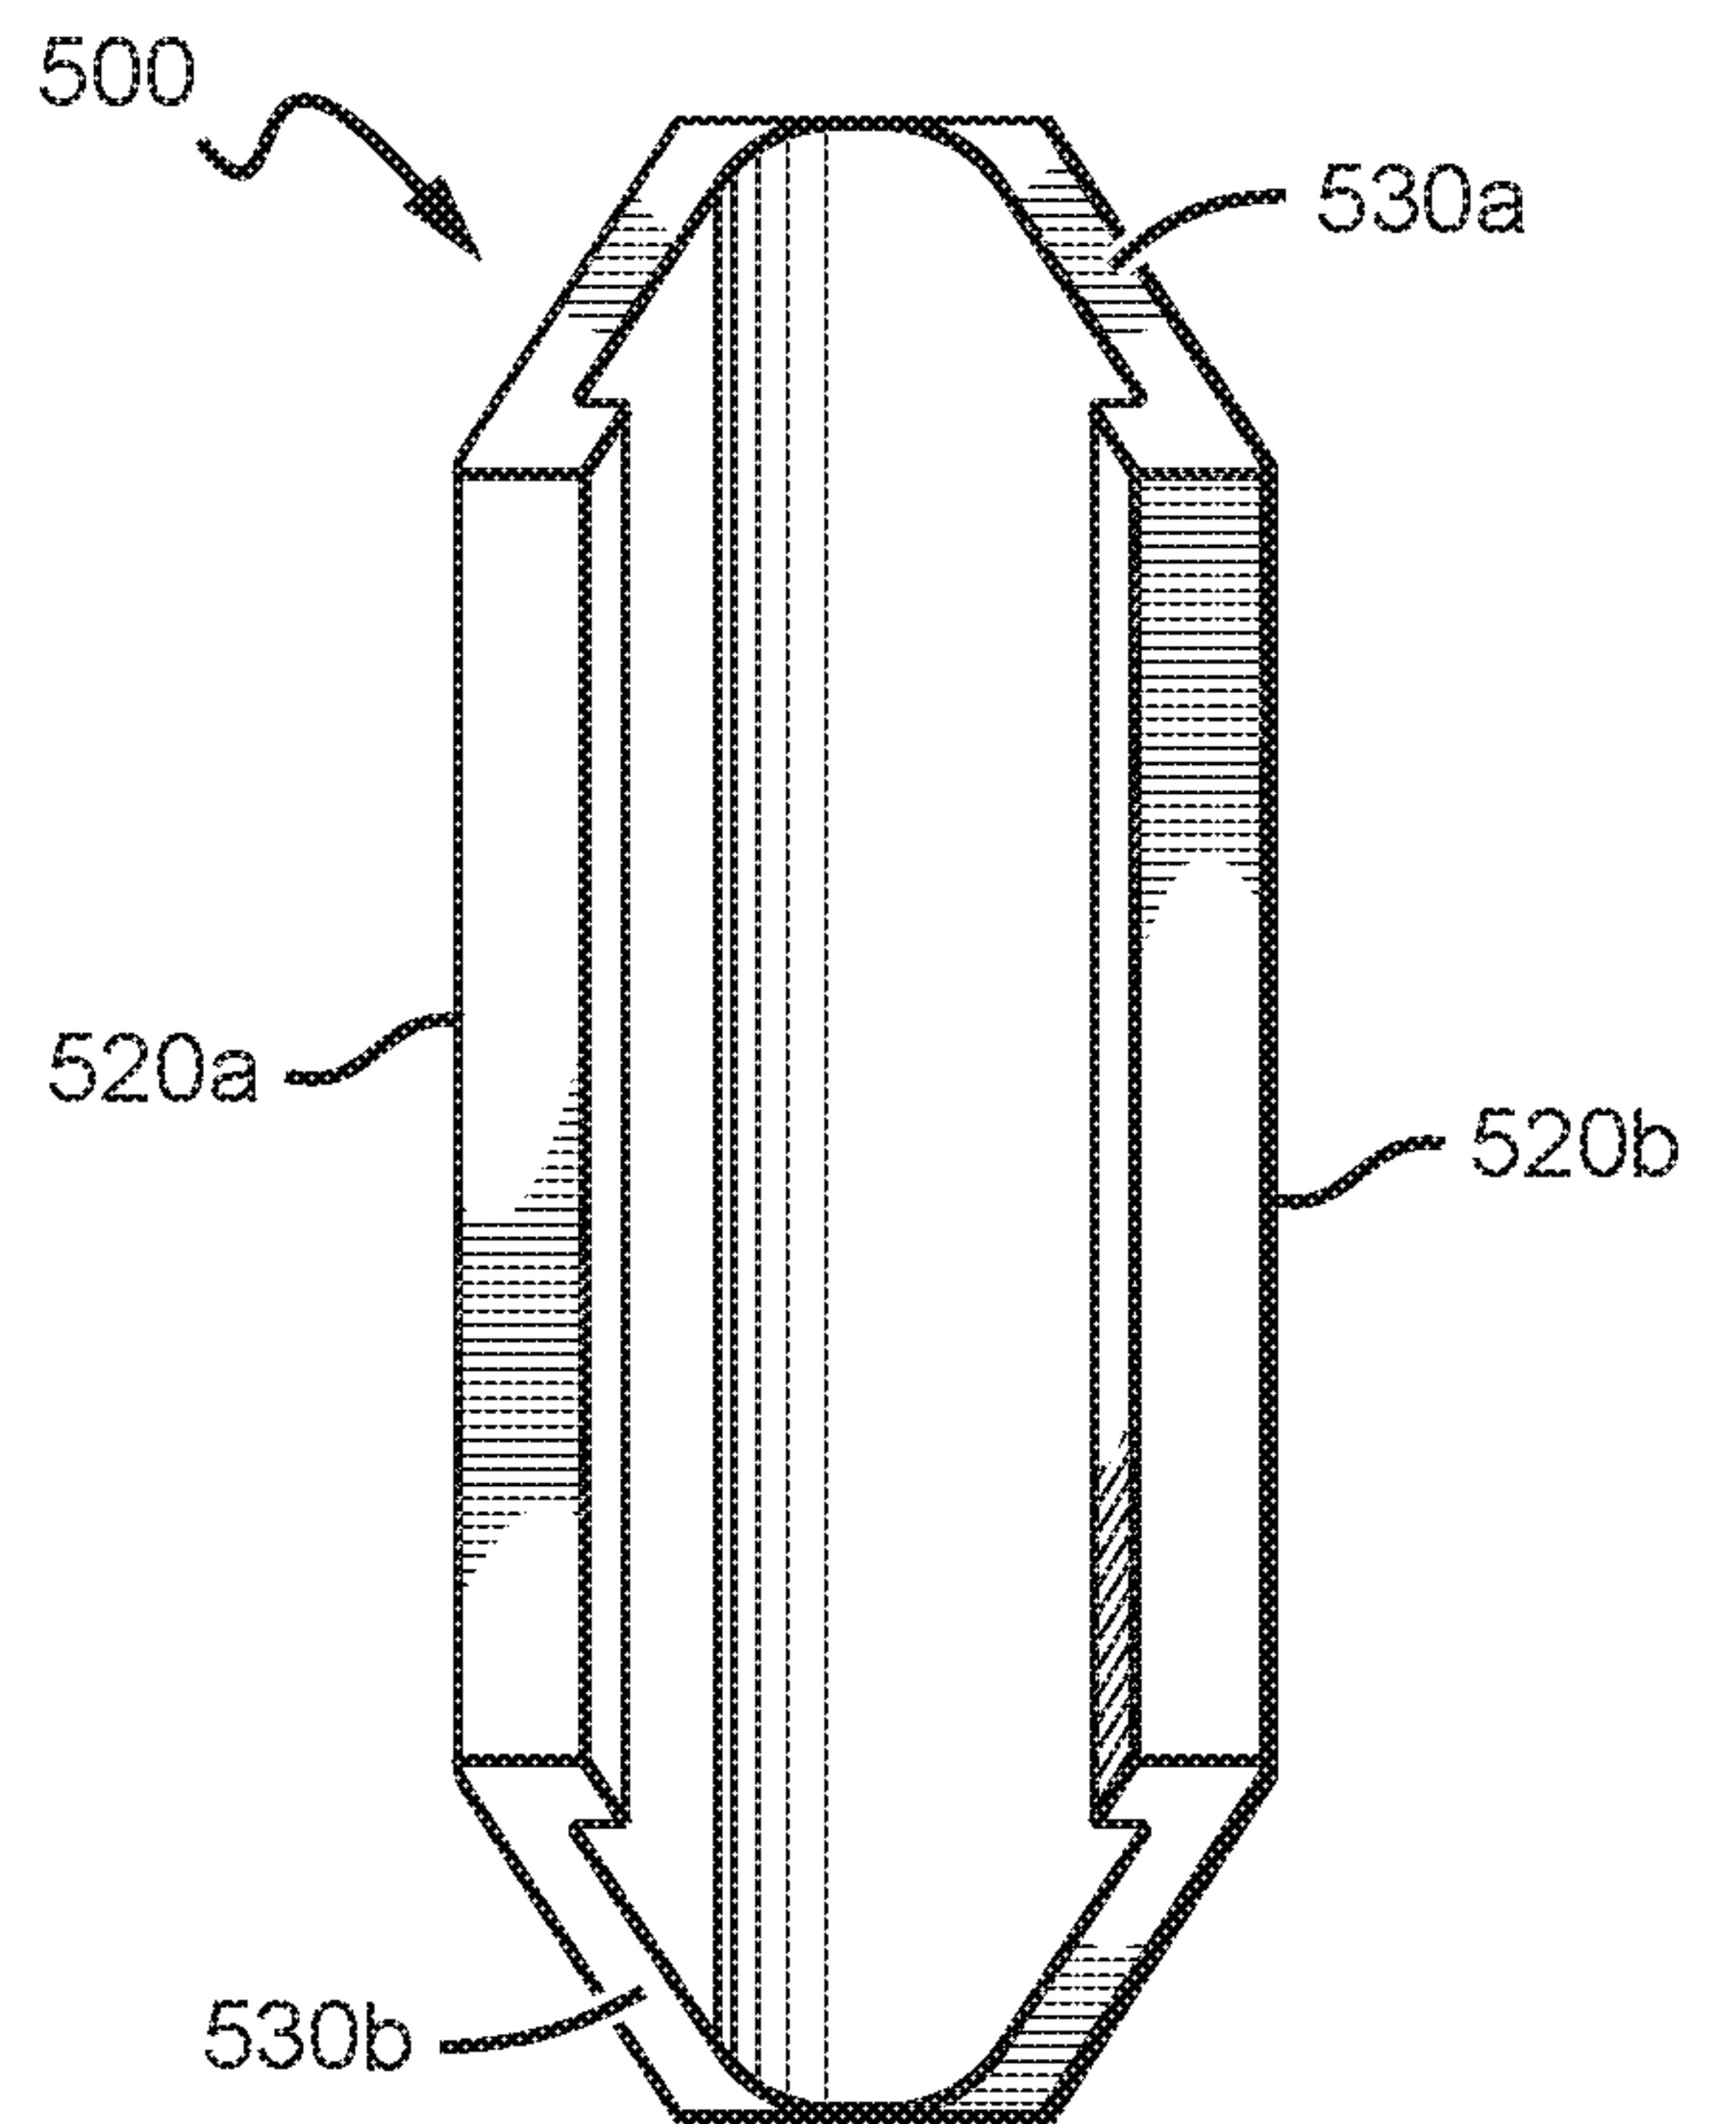


FIG. 5C

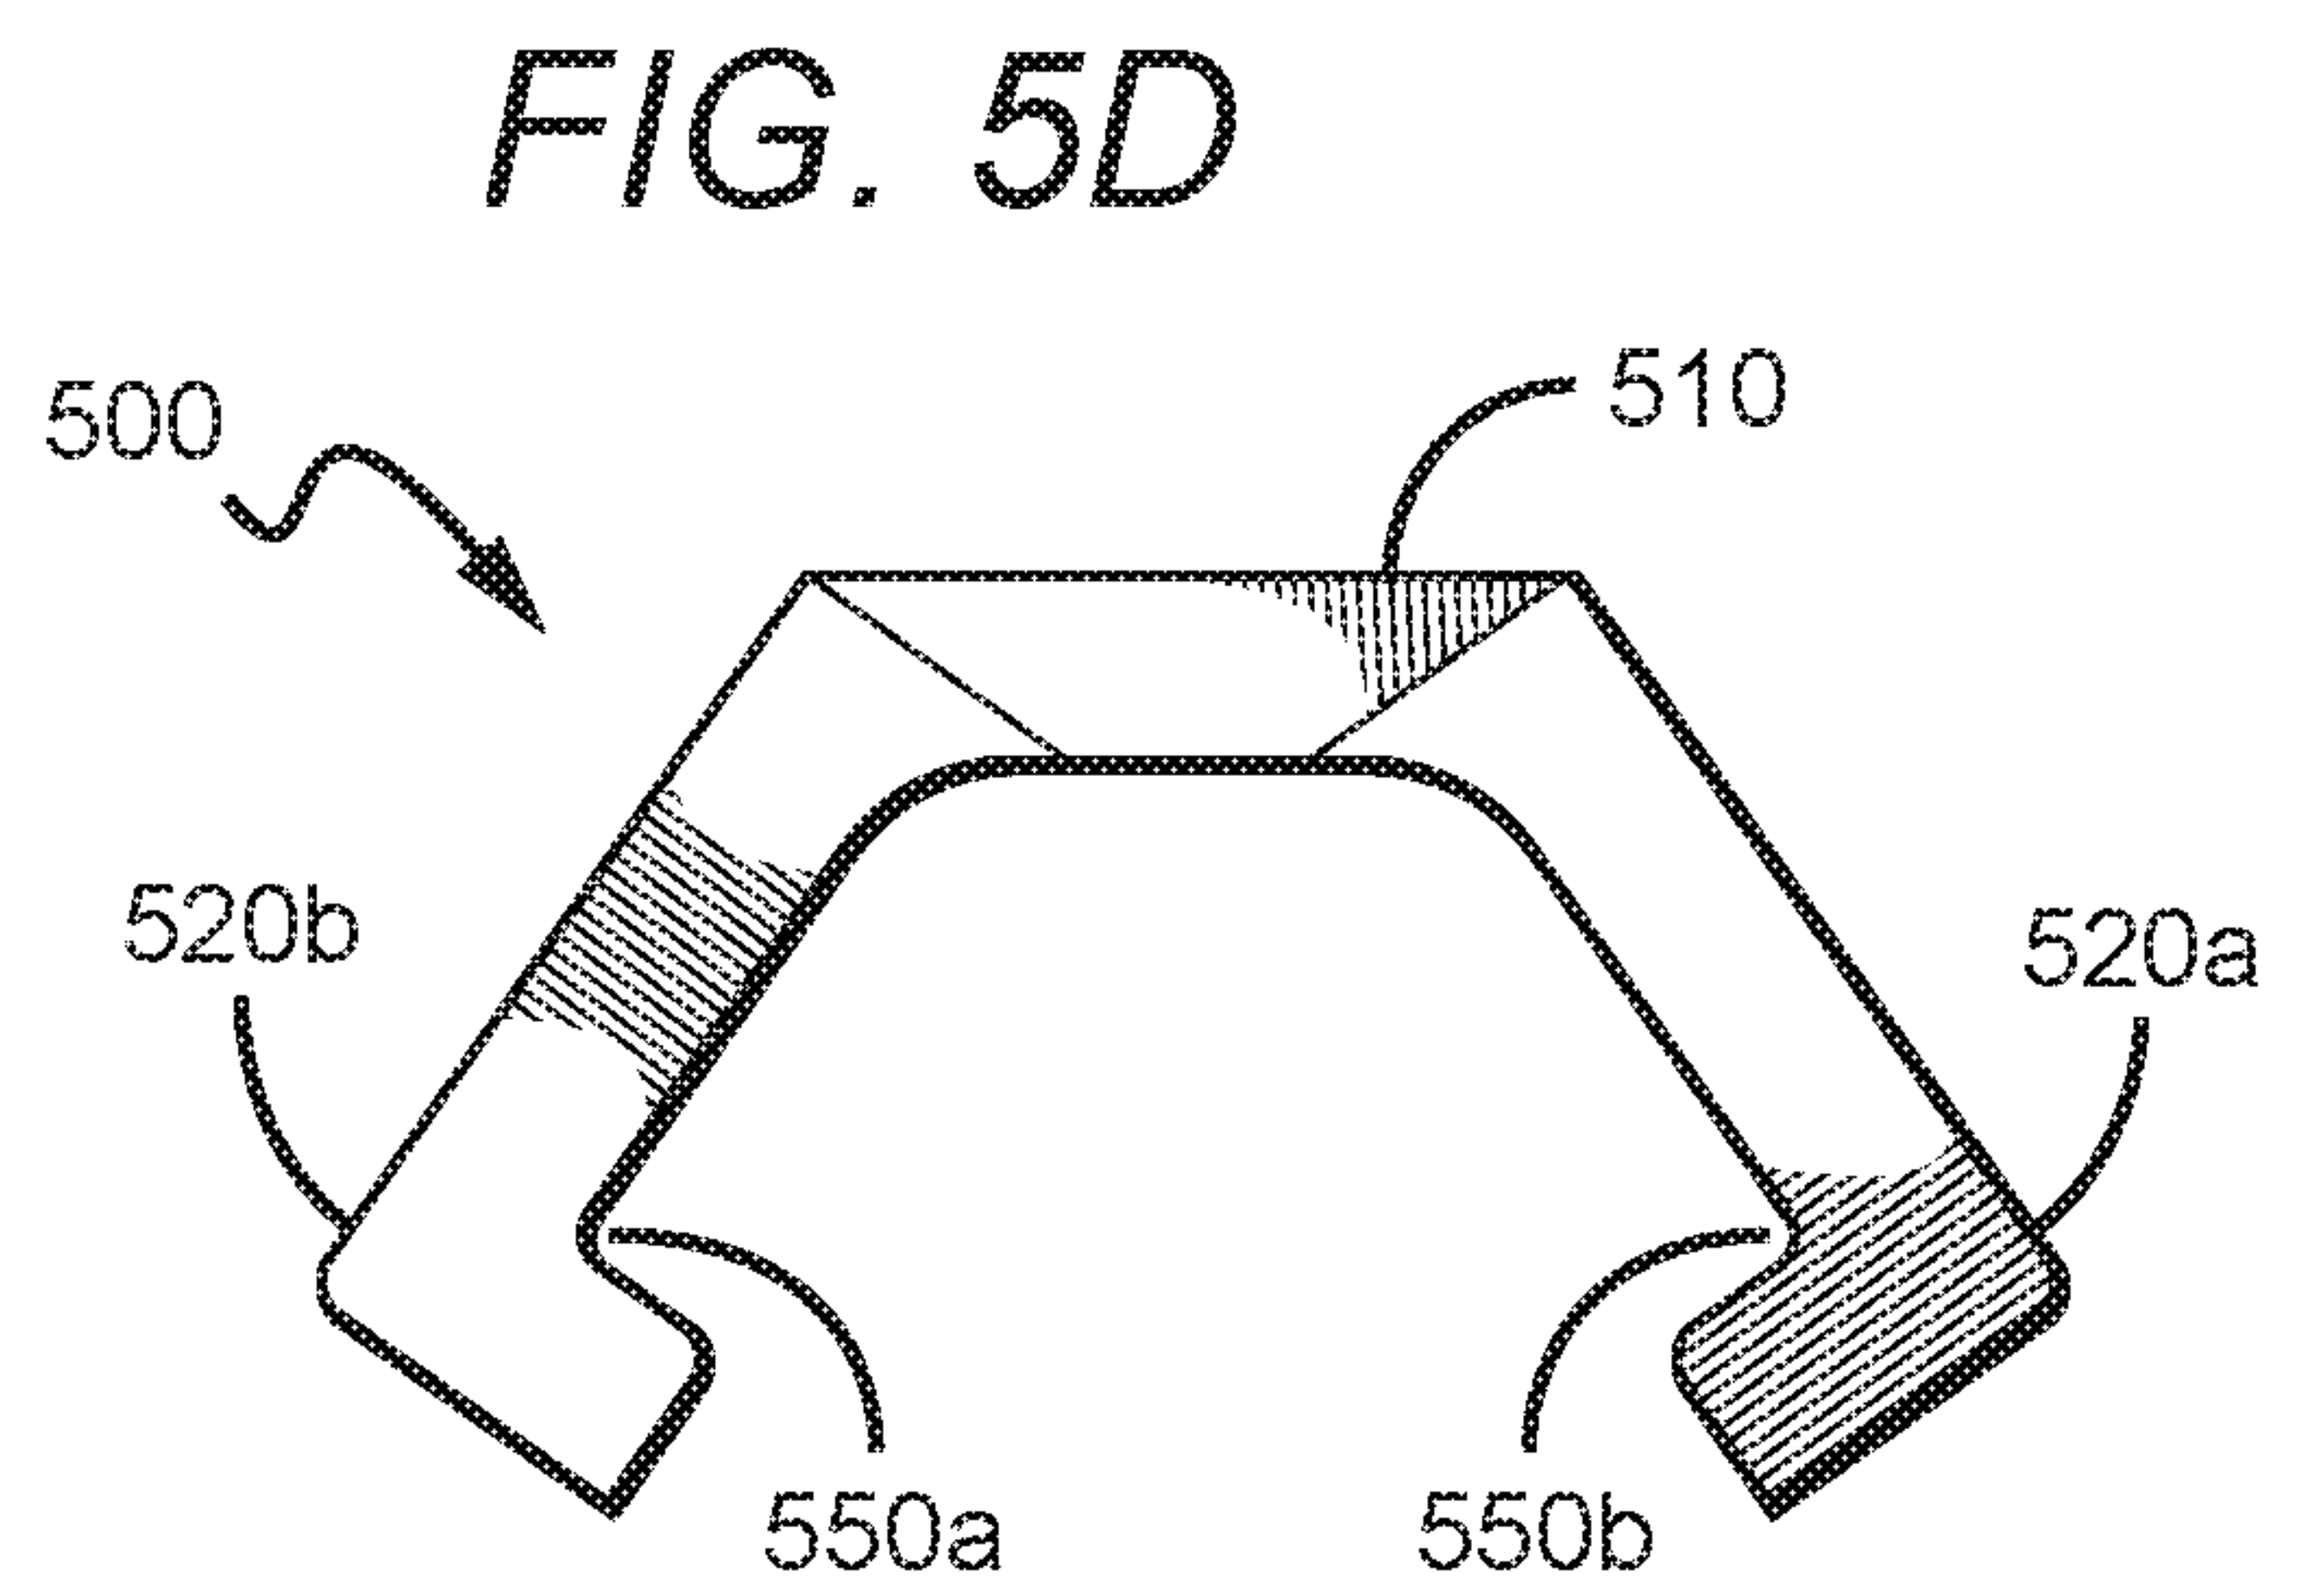


FIG. 5D

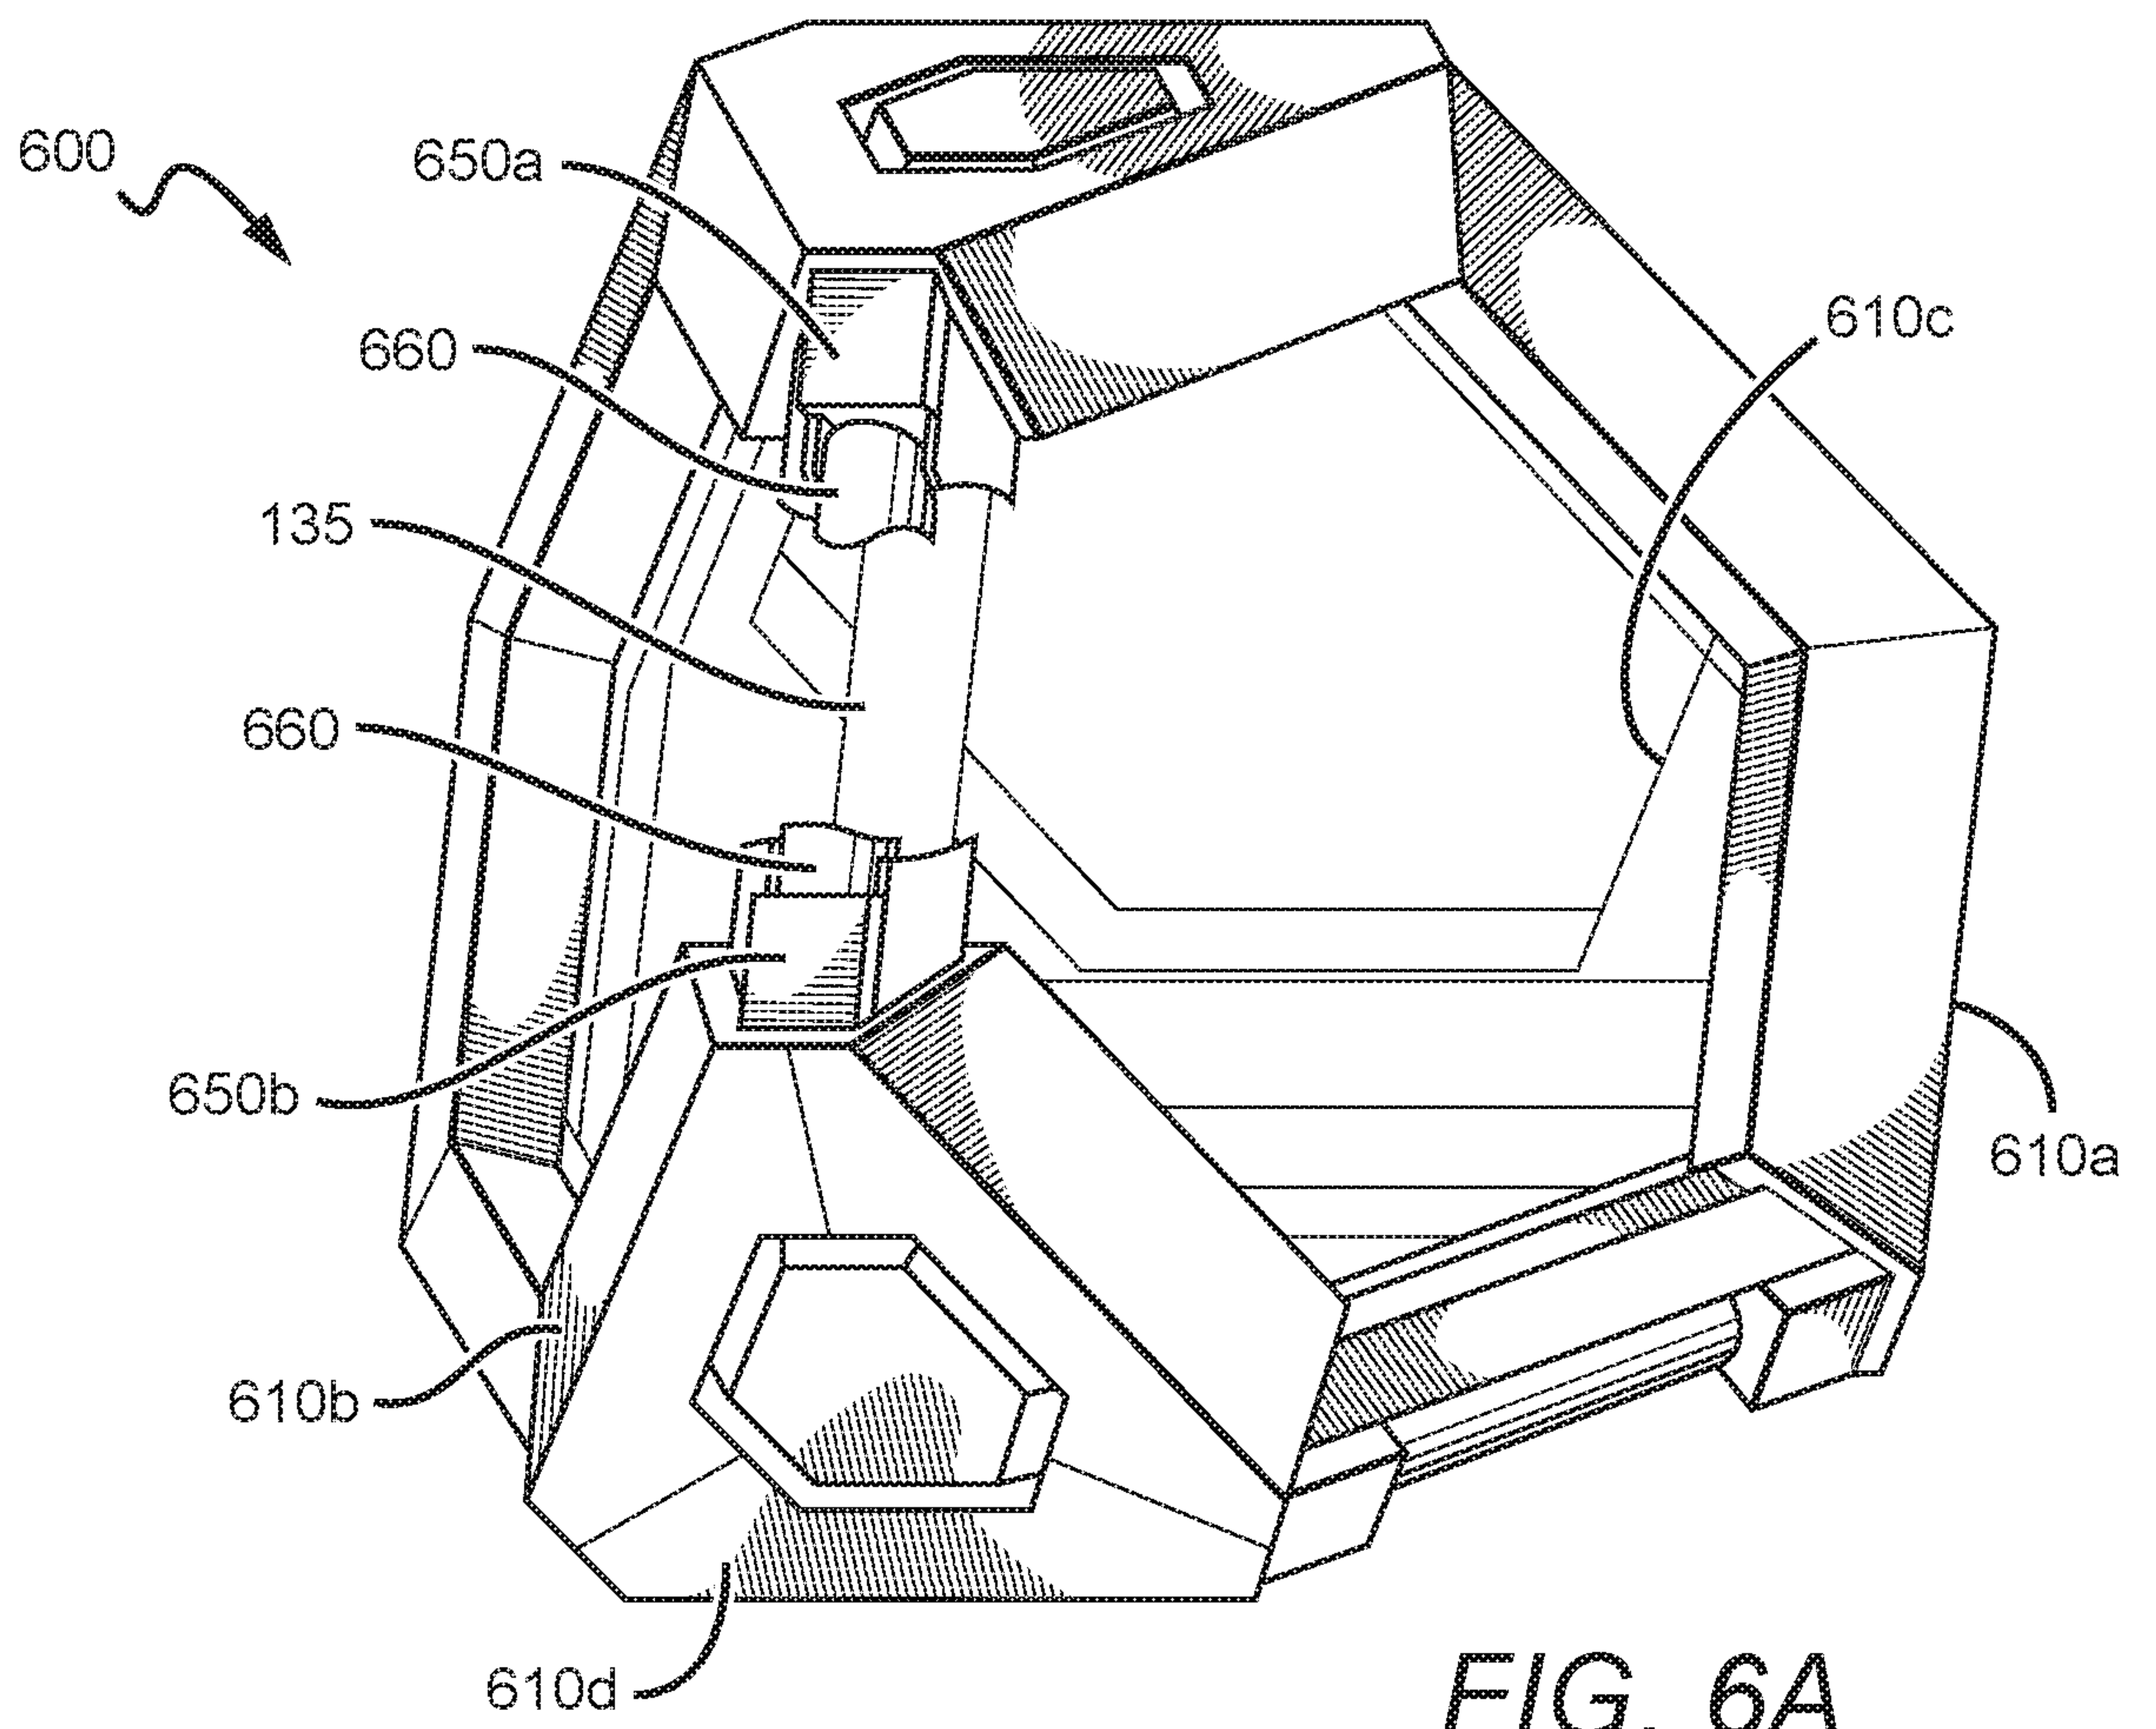
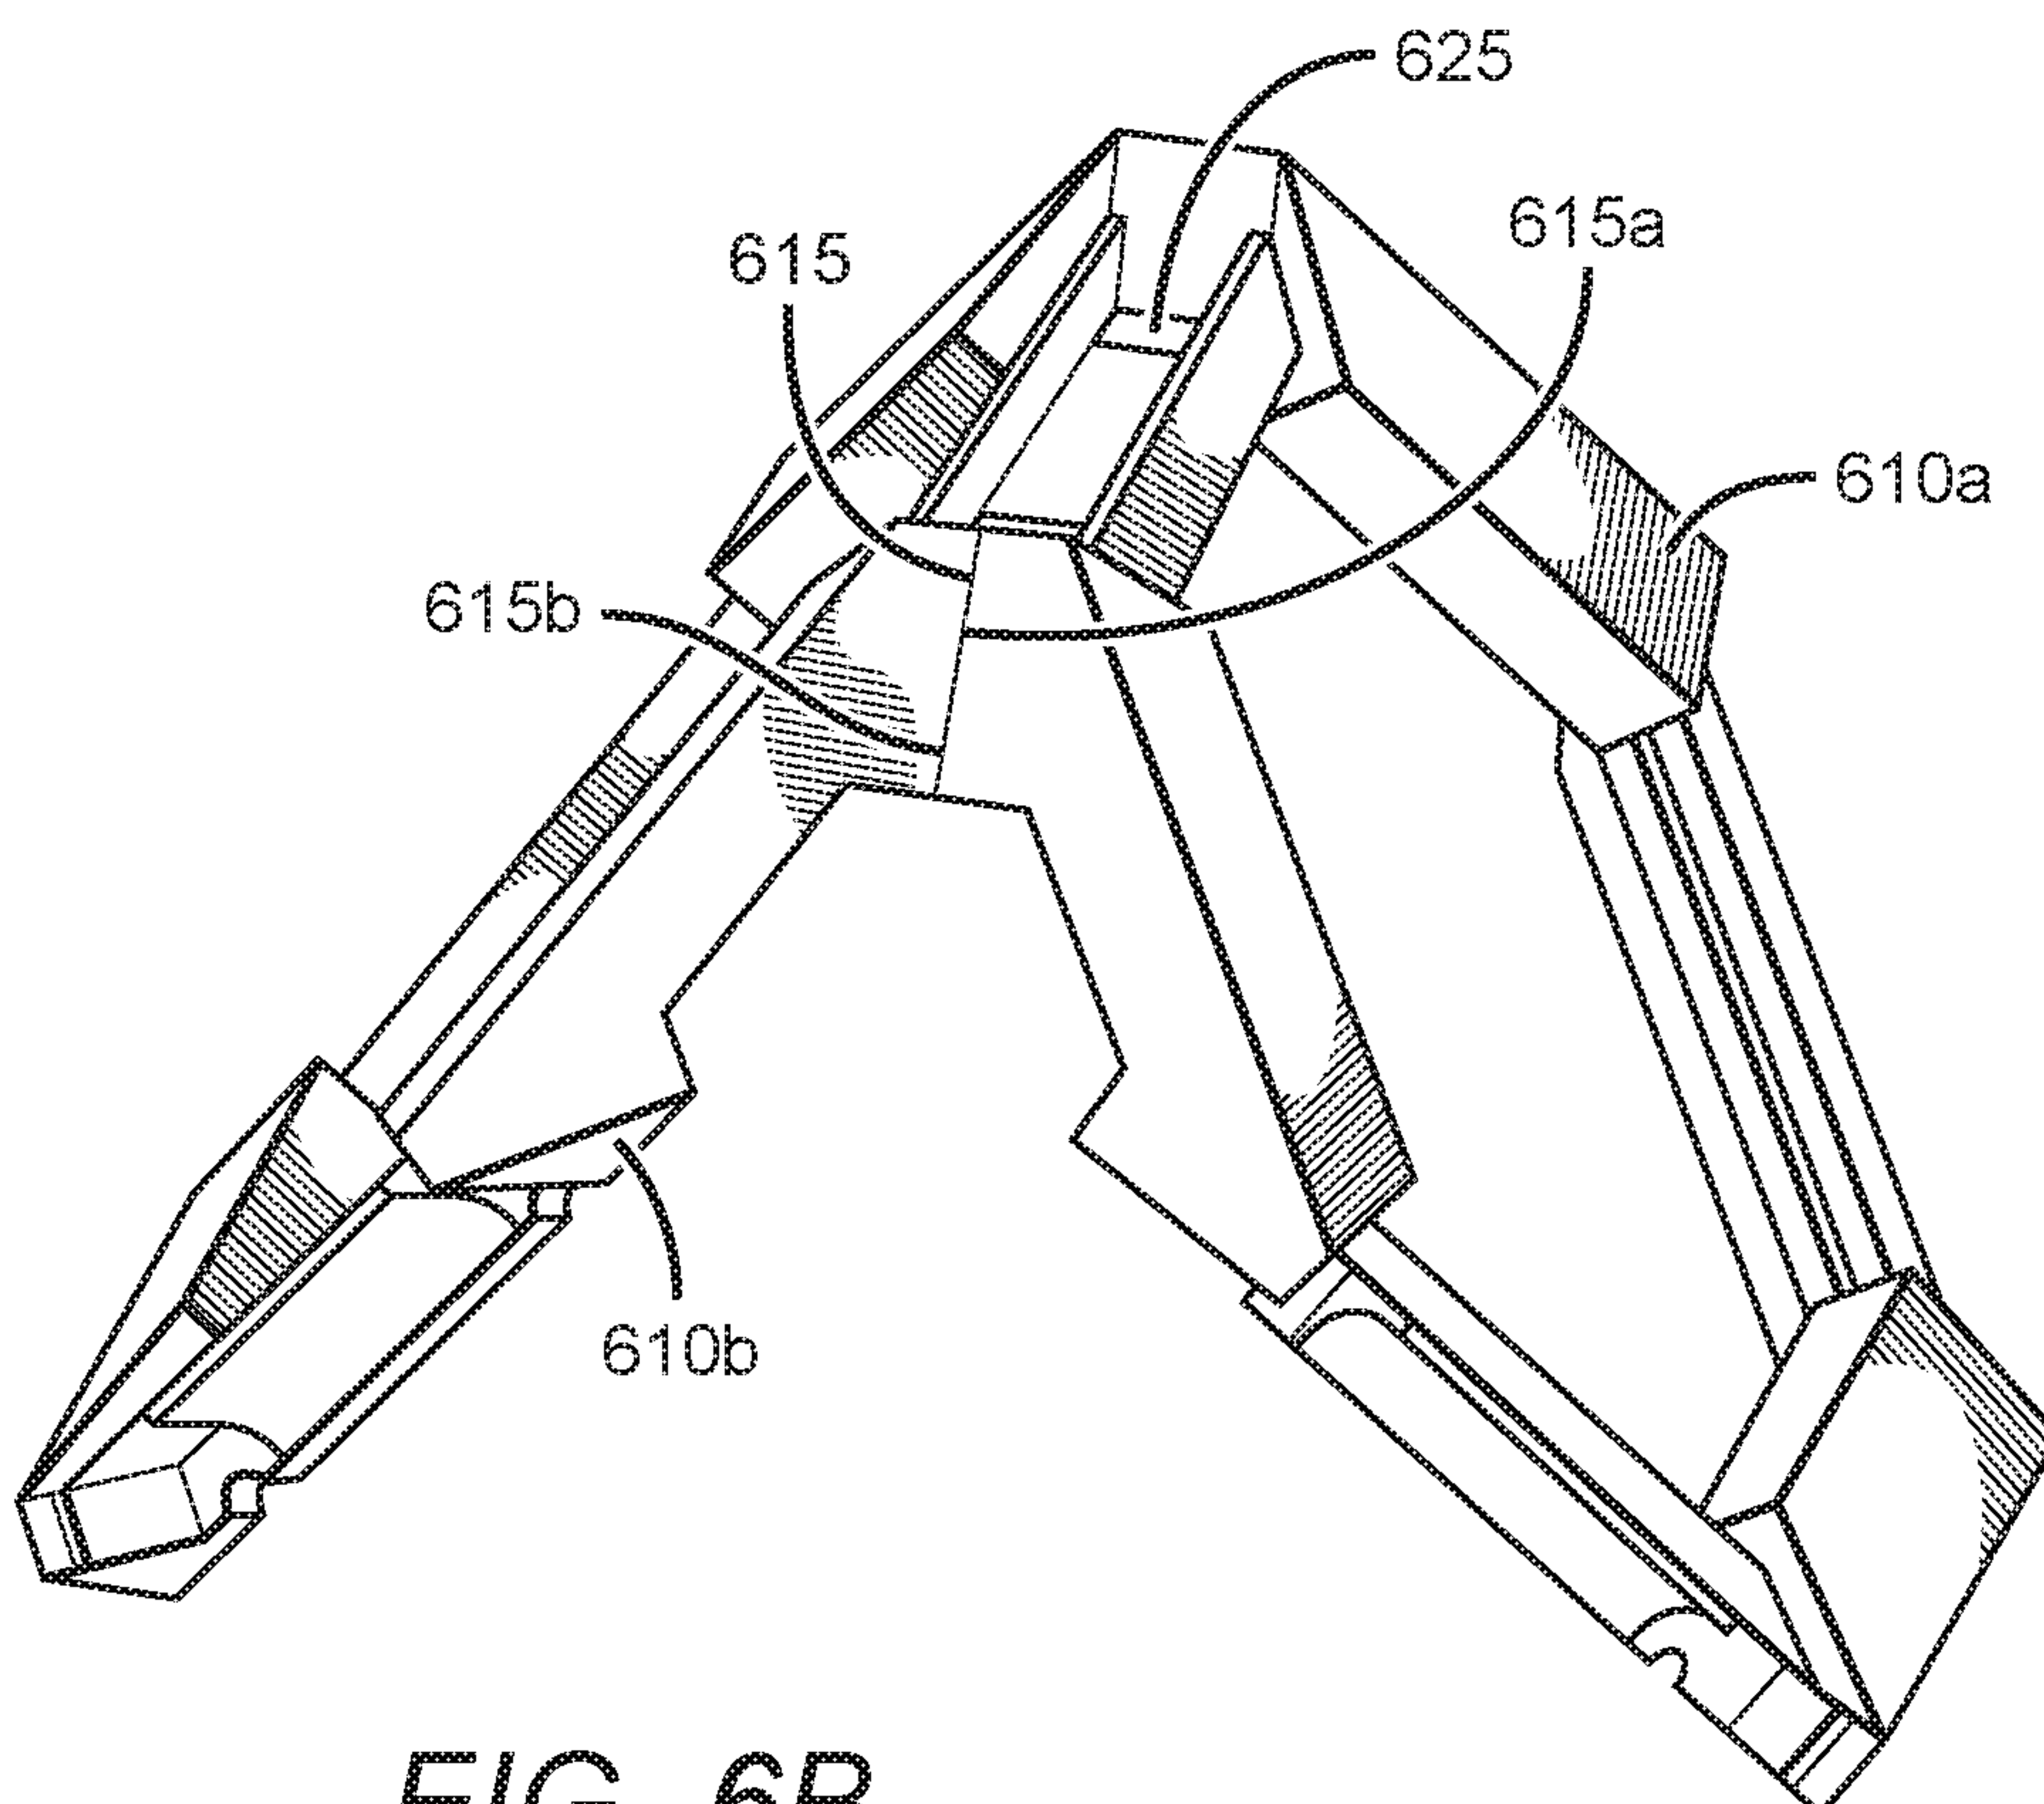
**FIG. 6A****FIG. 6B**

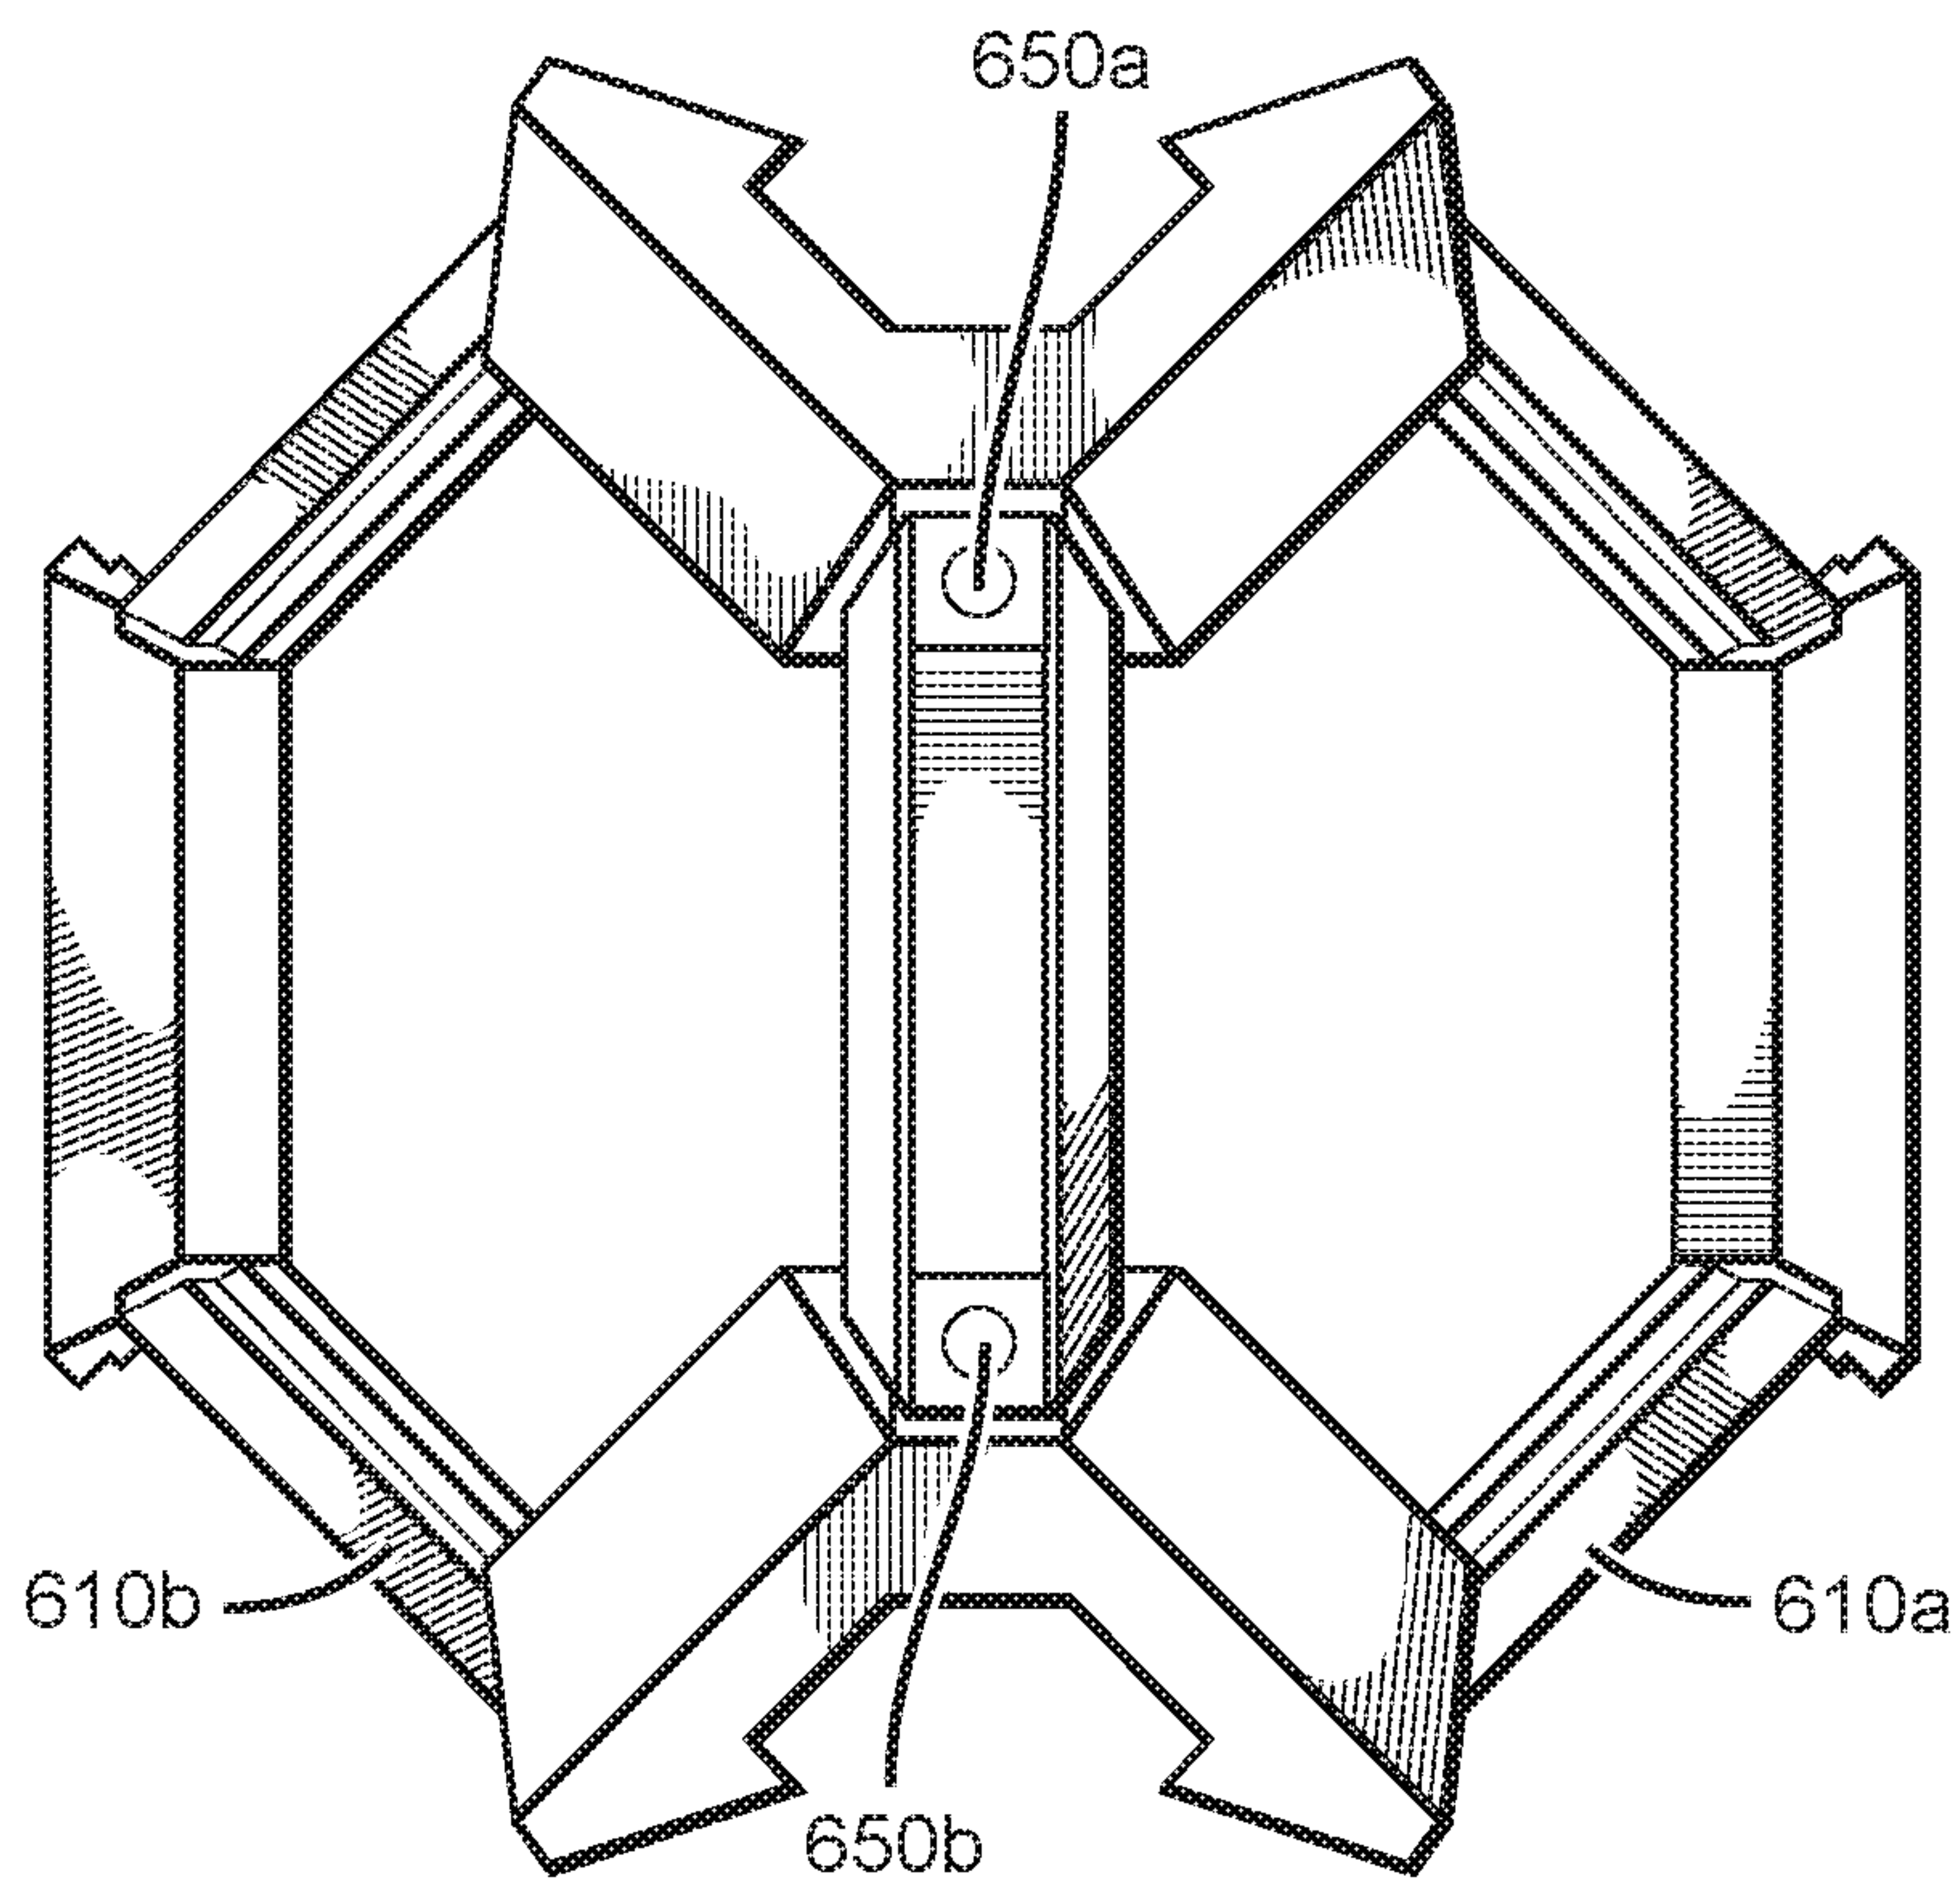
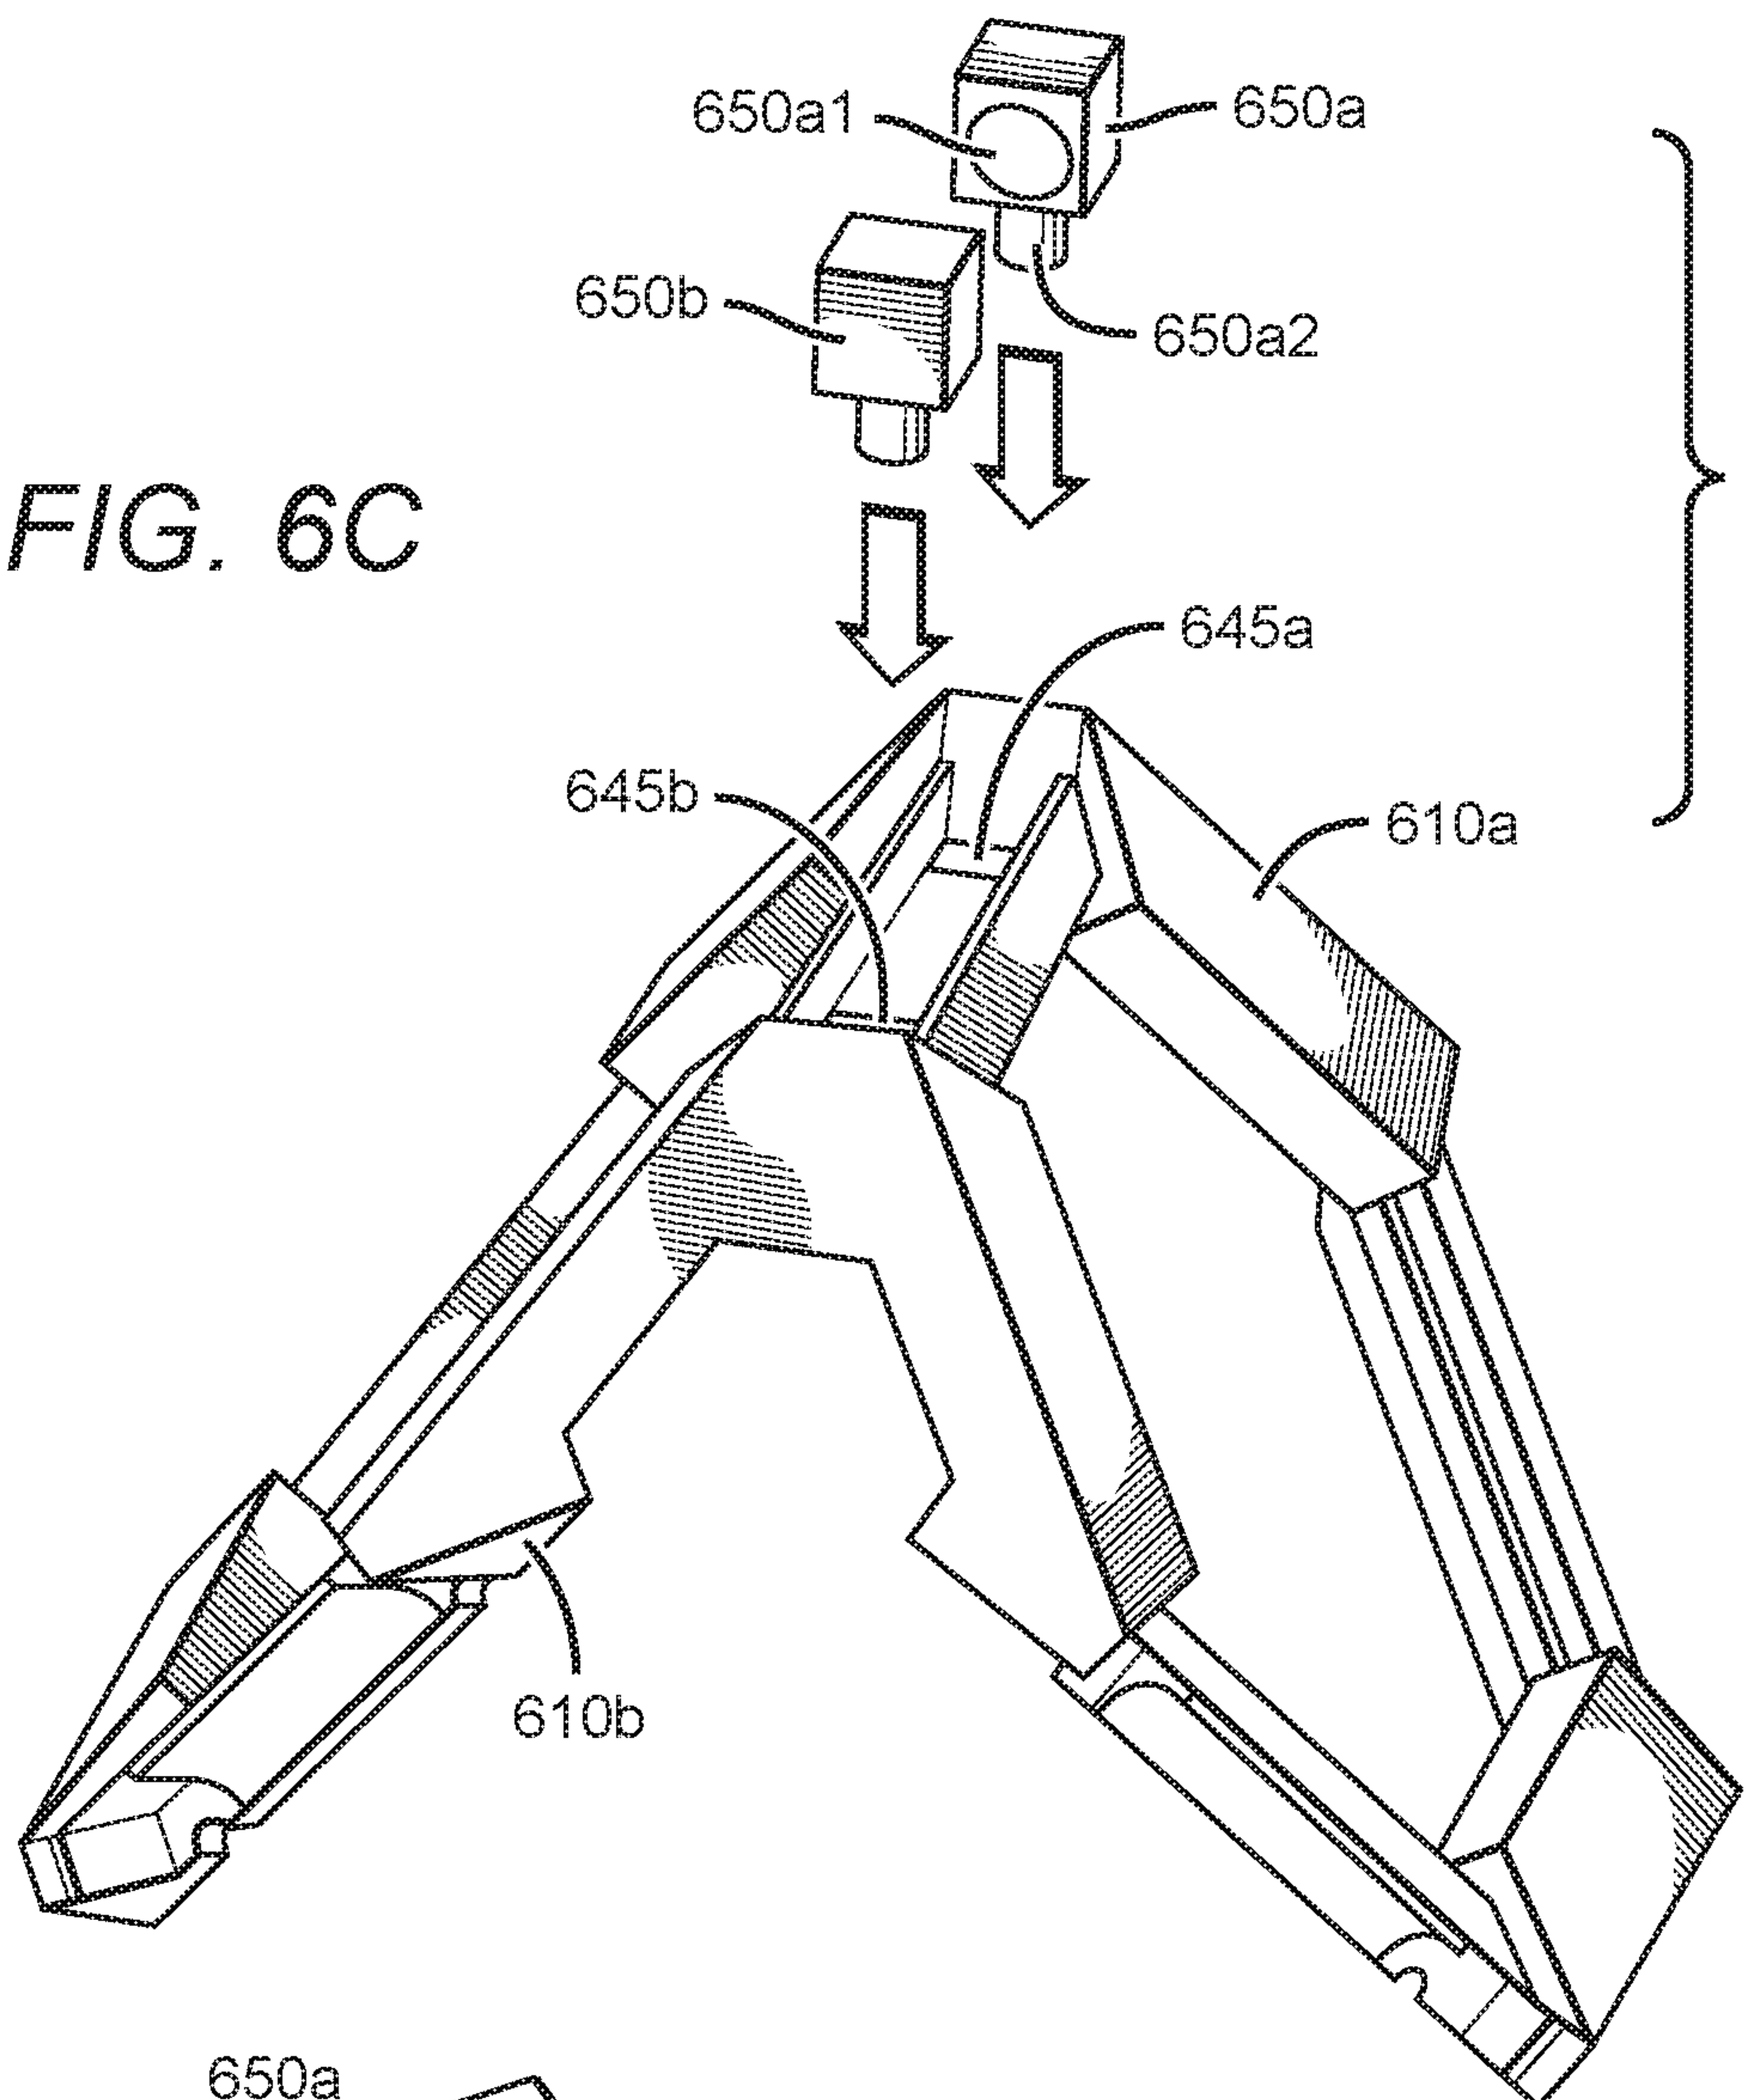
FIG. 6C*FIG. 6D*

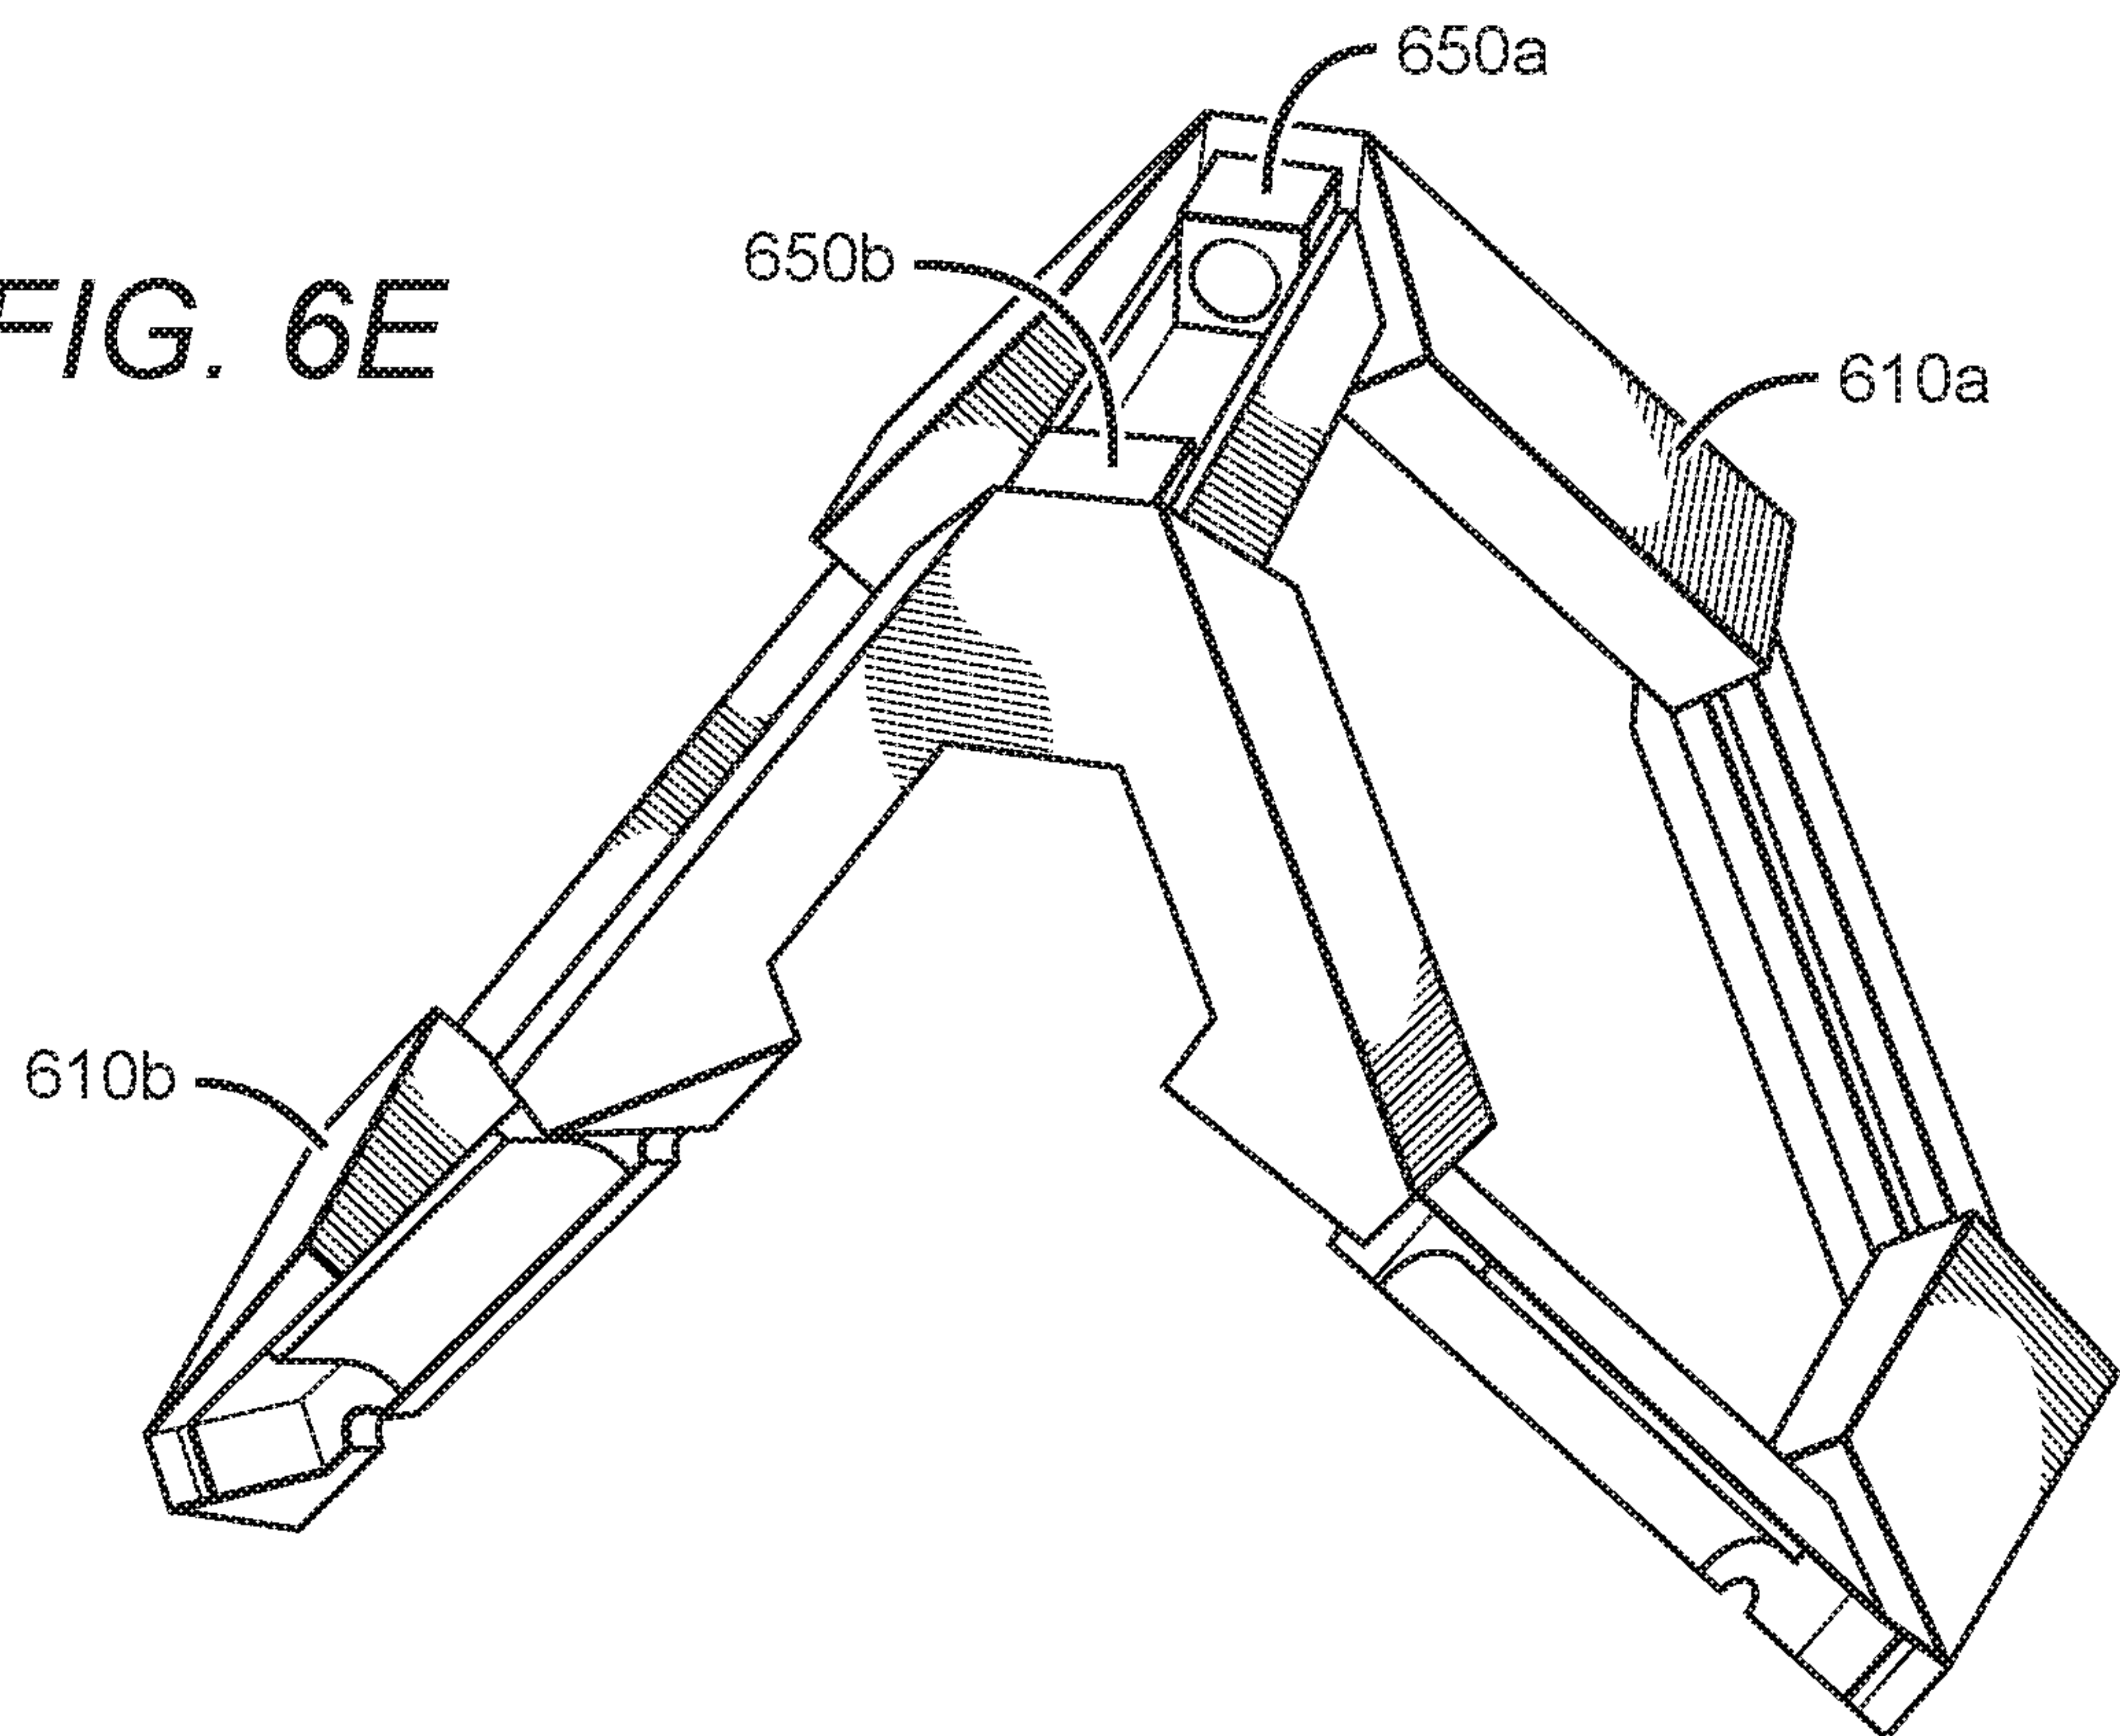
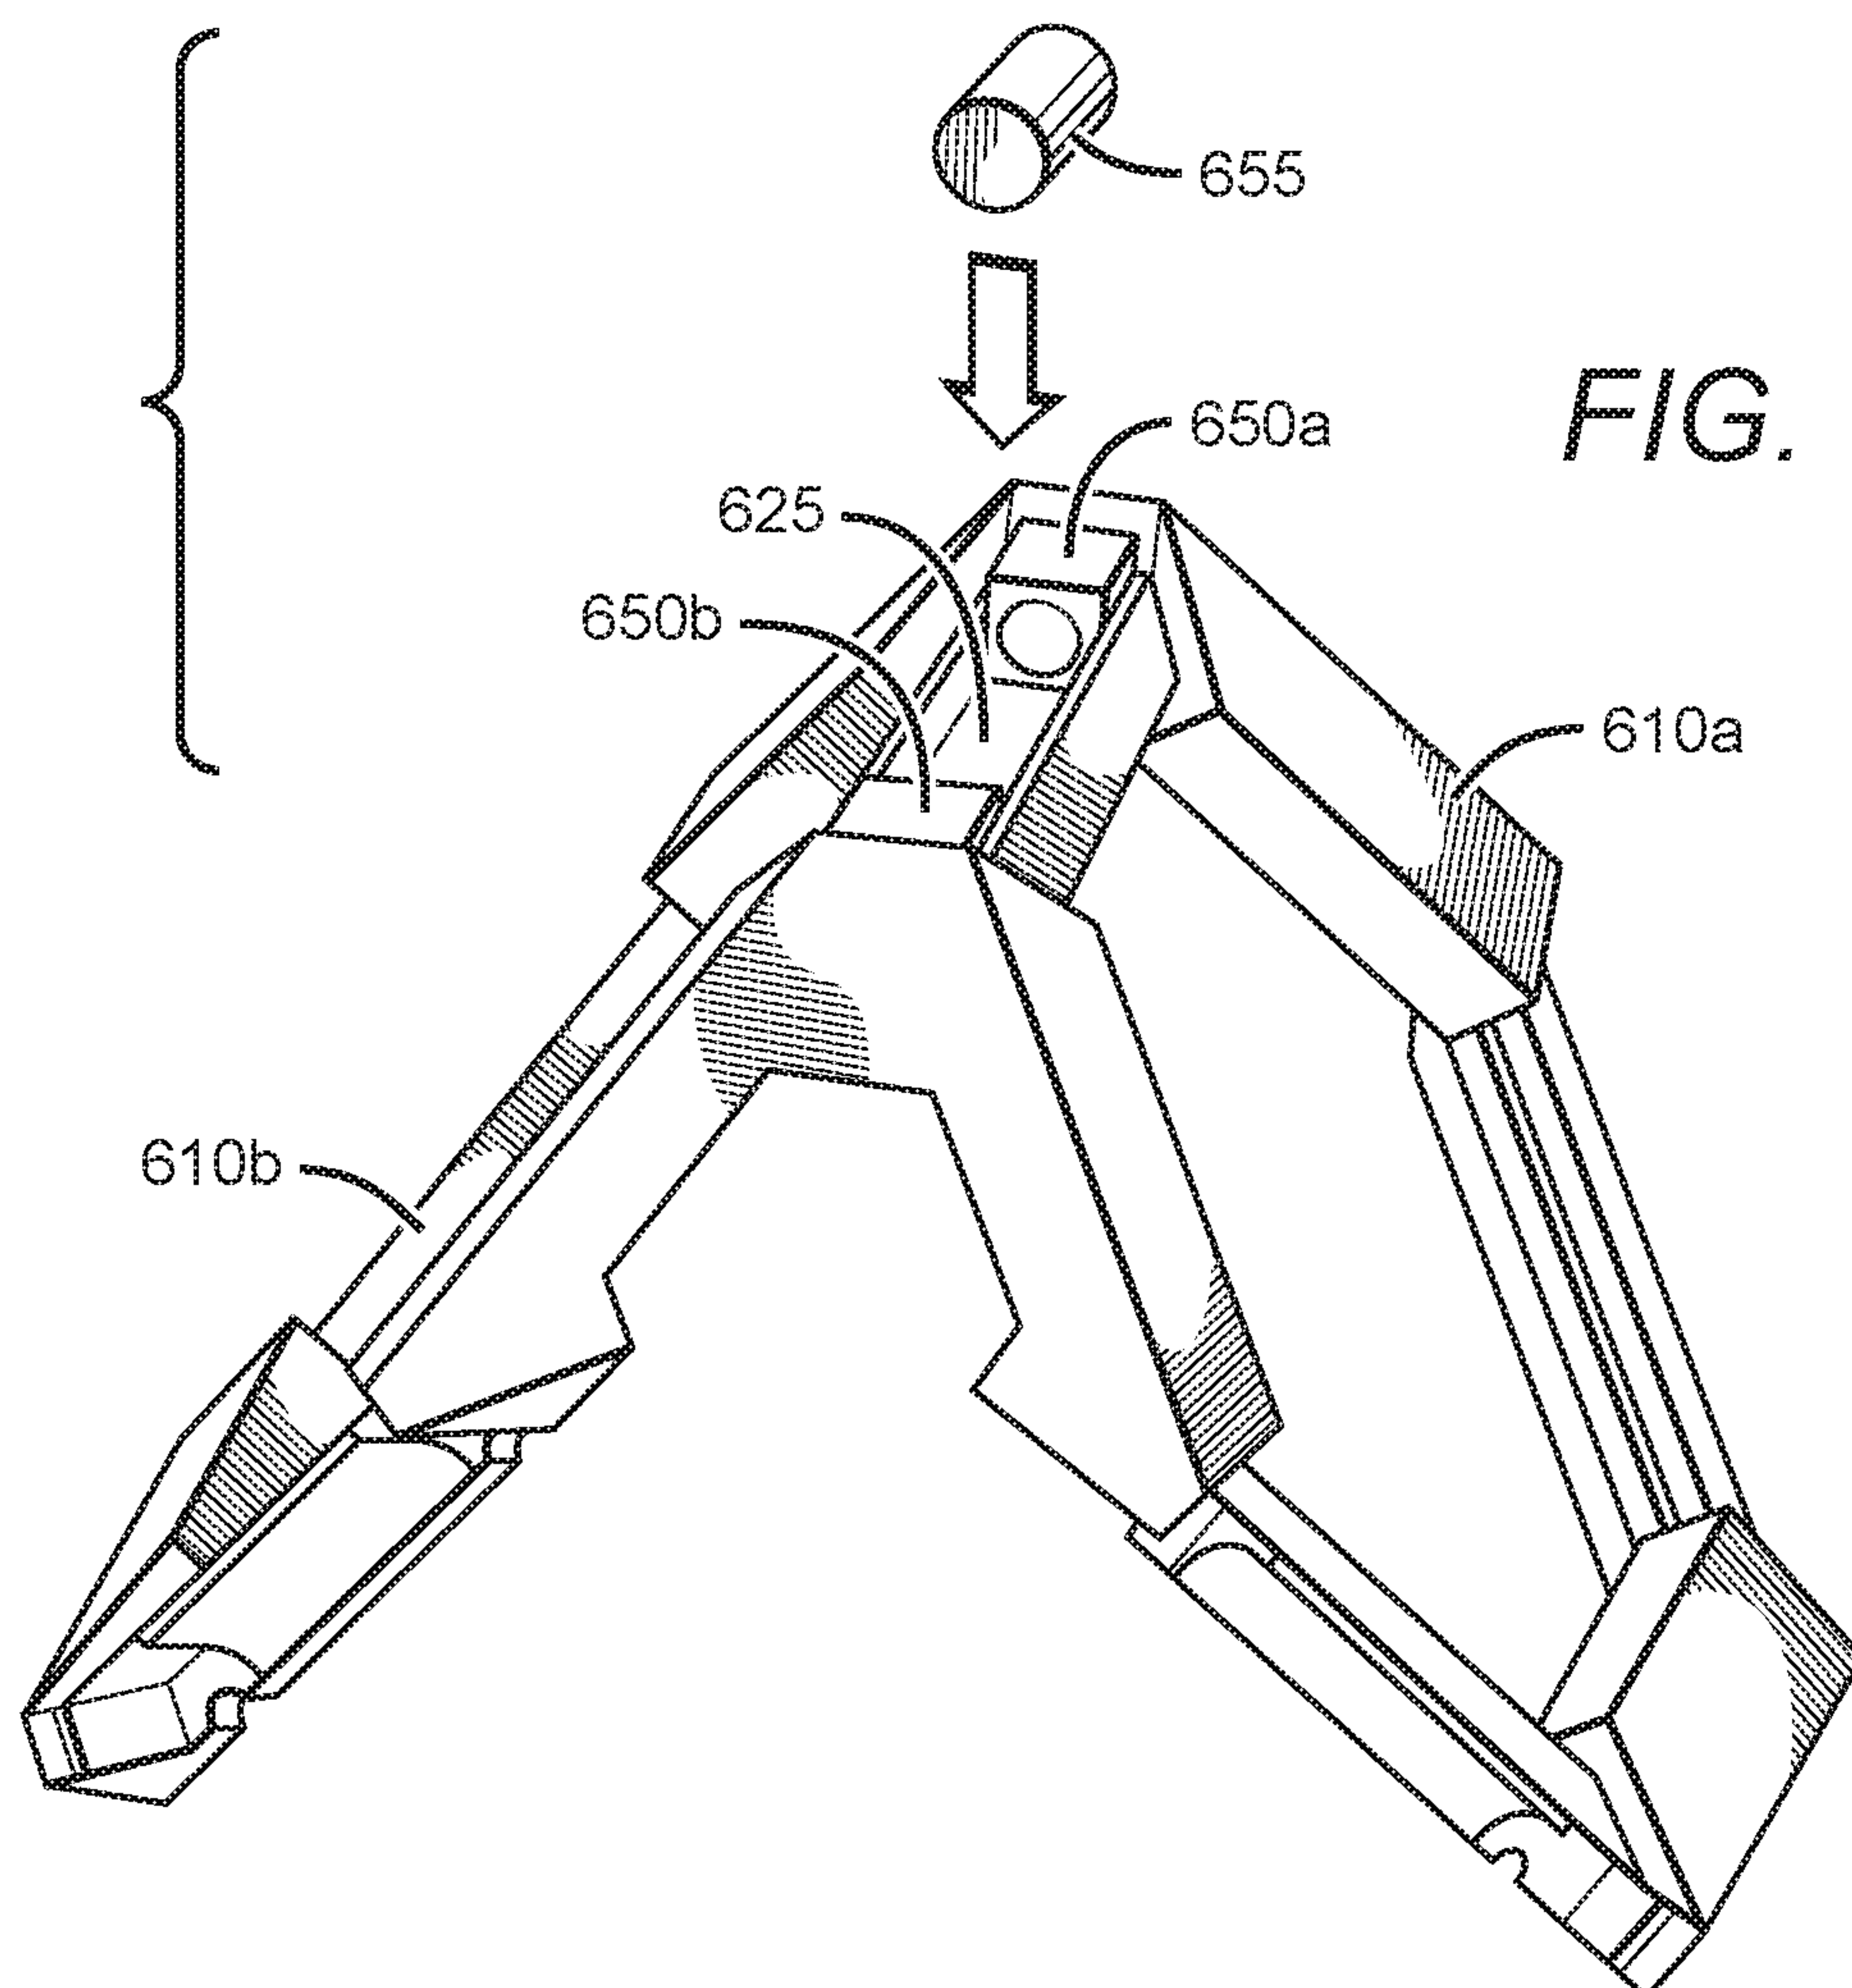
FIG. 6E*FIG. 6F*

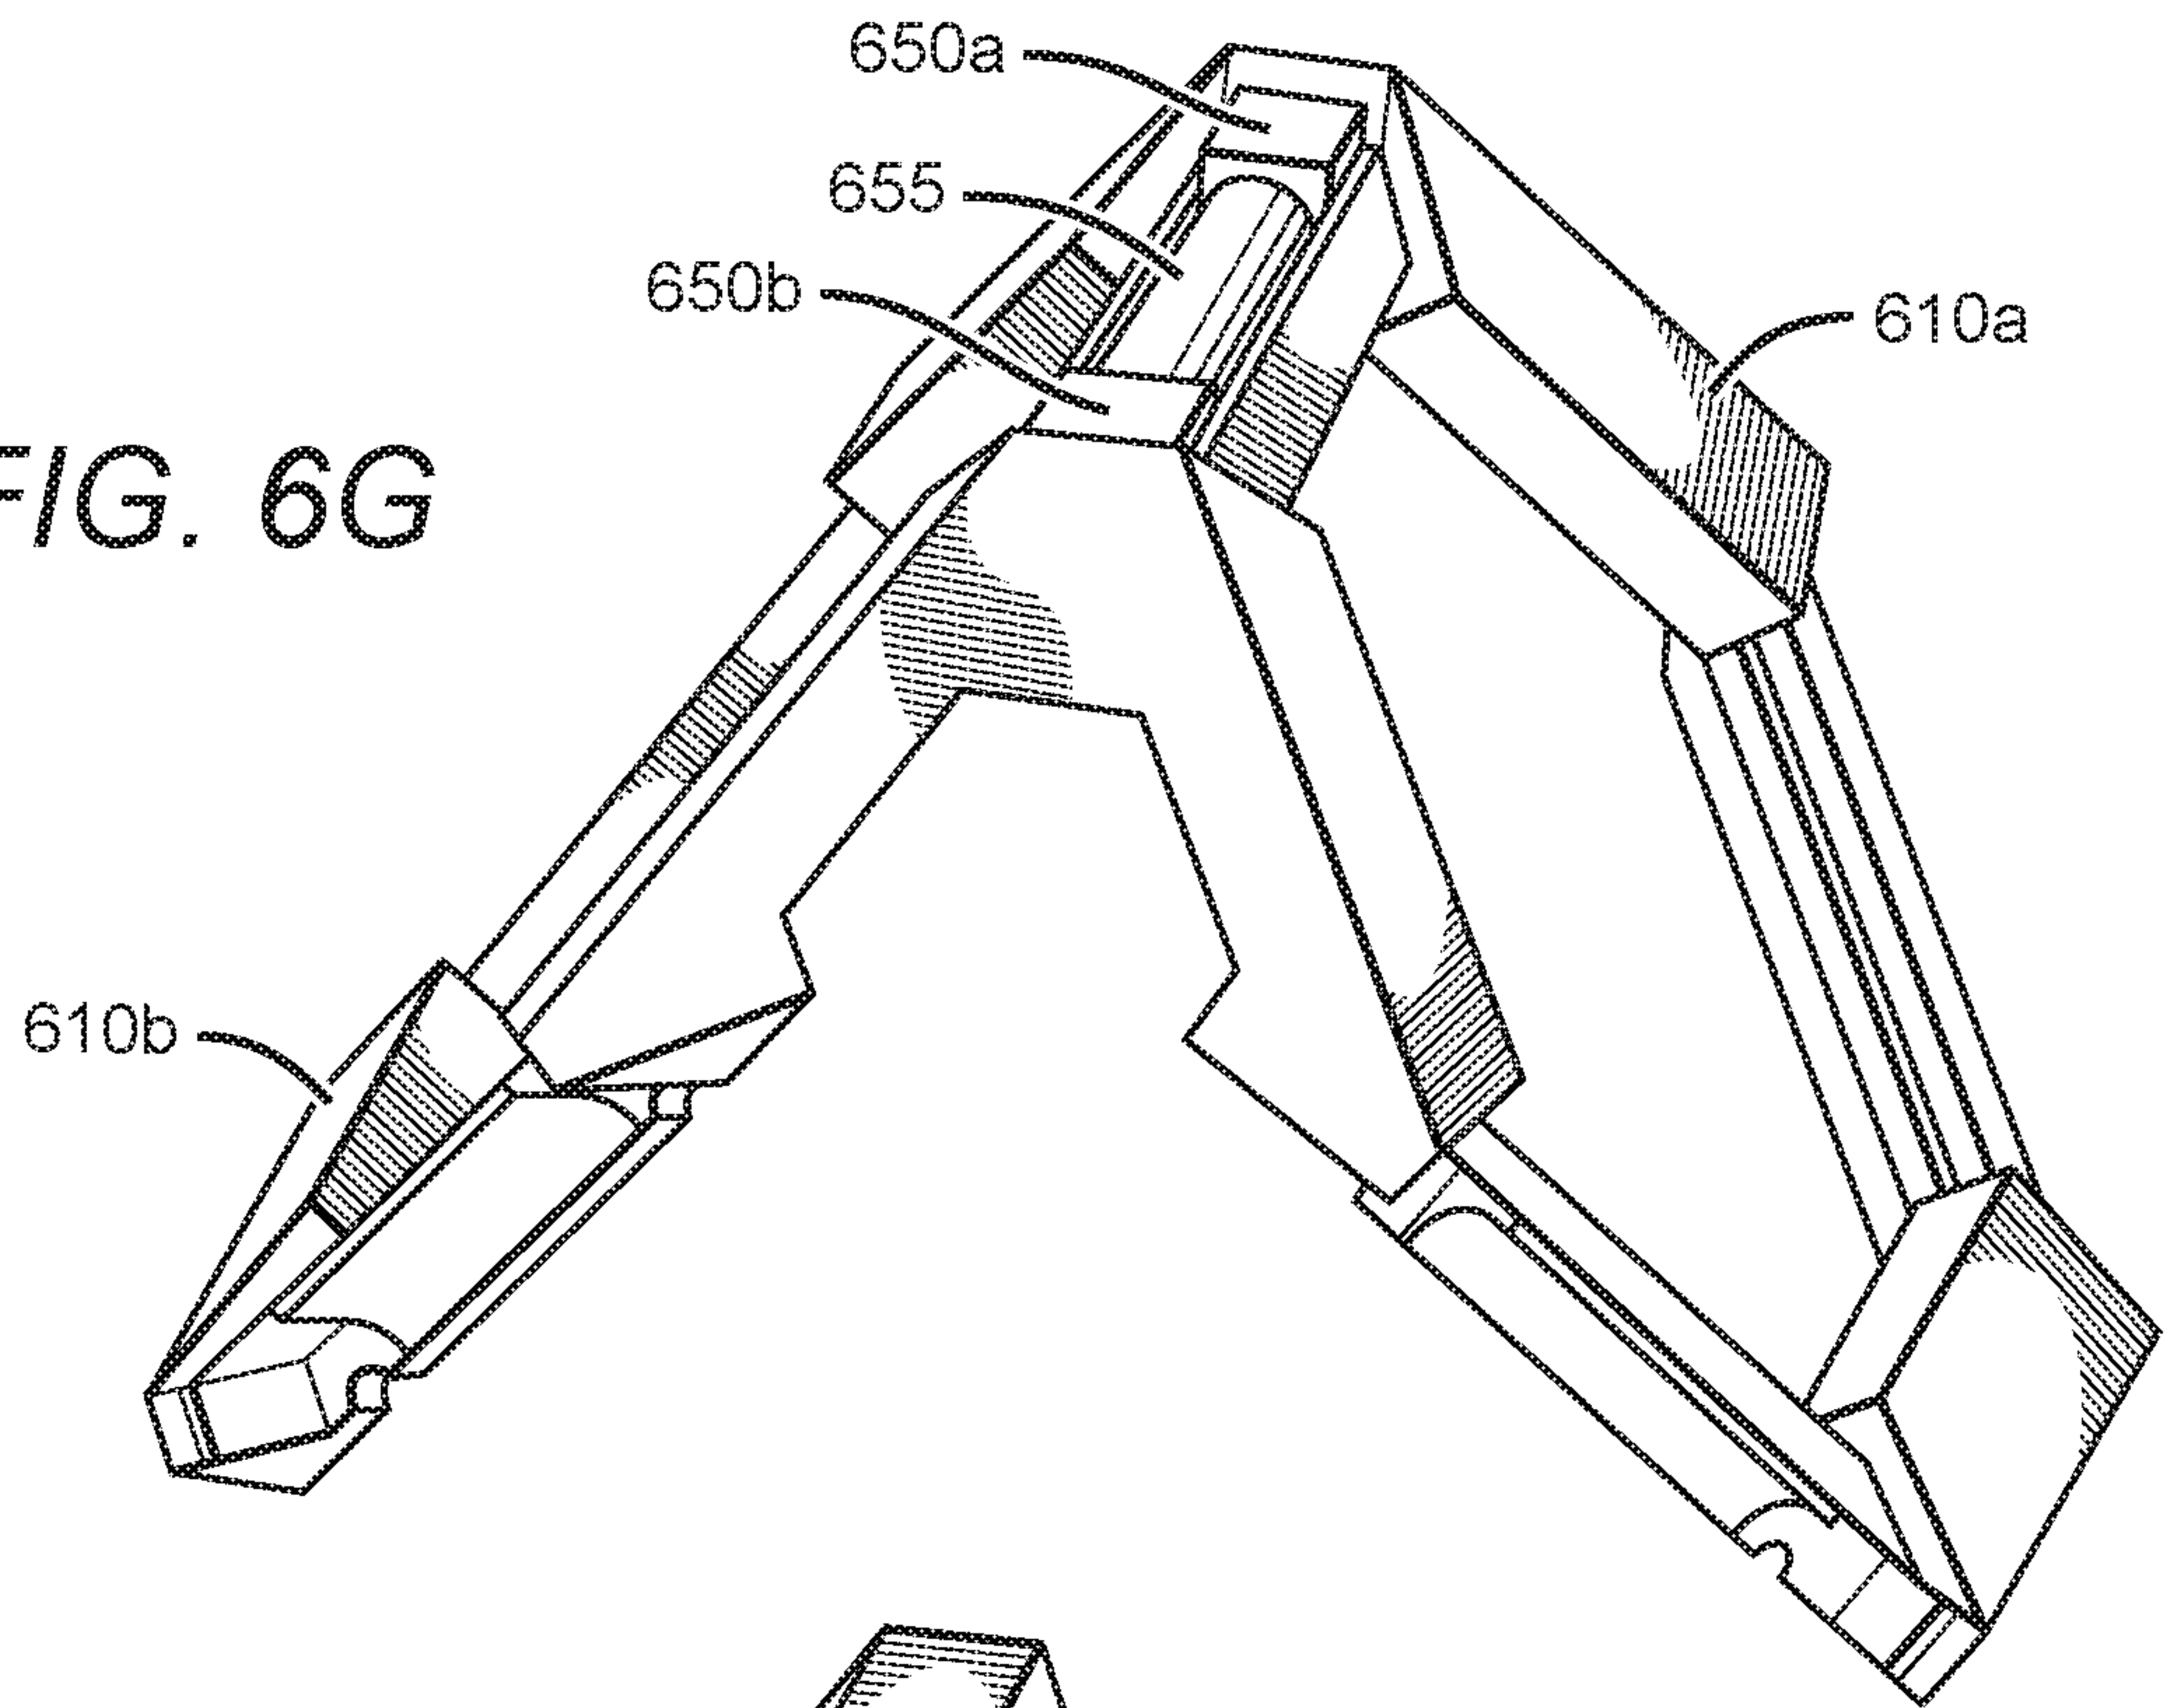
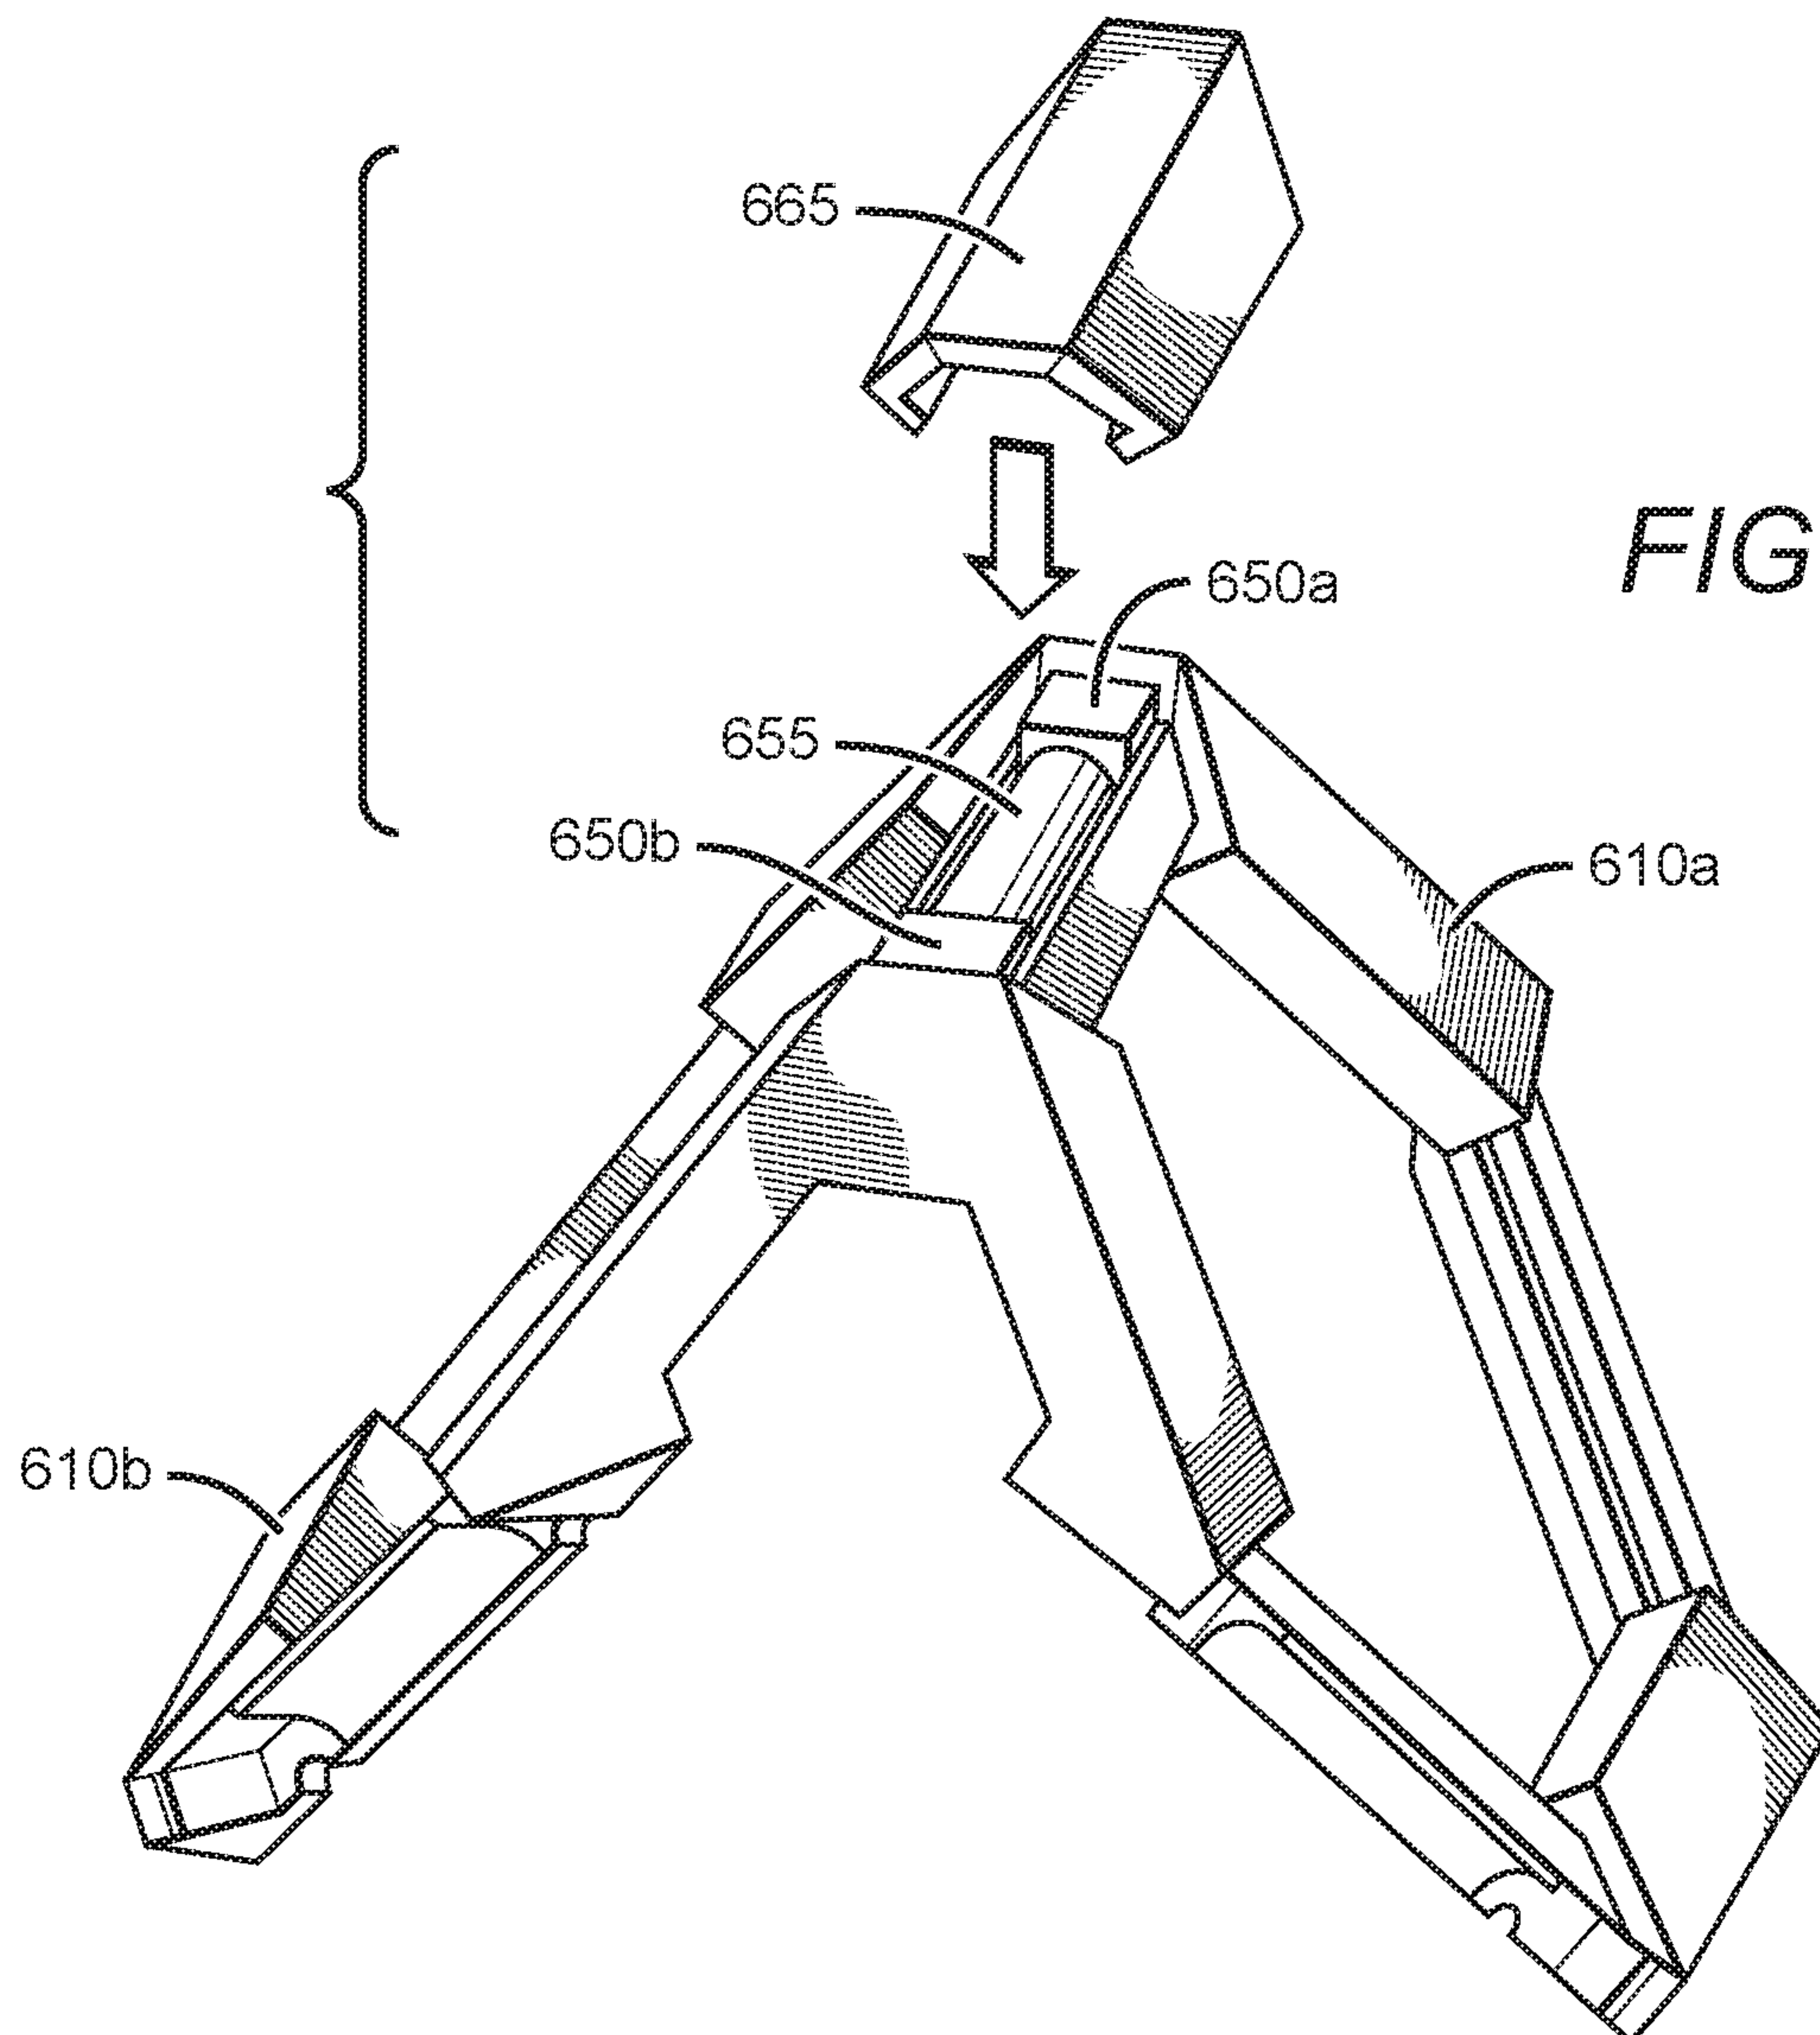
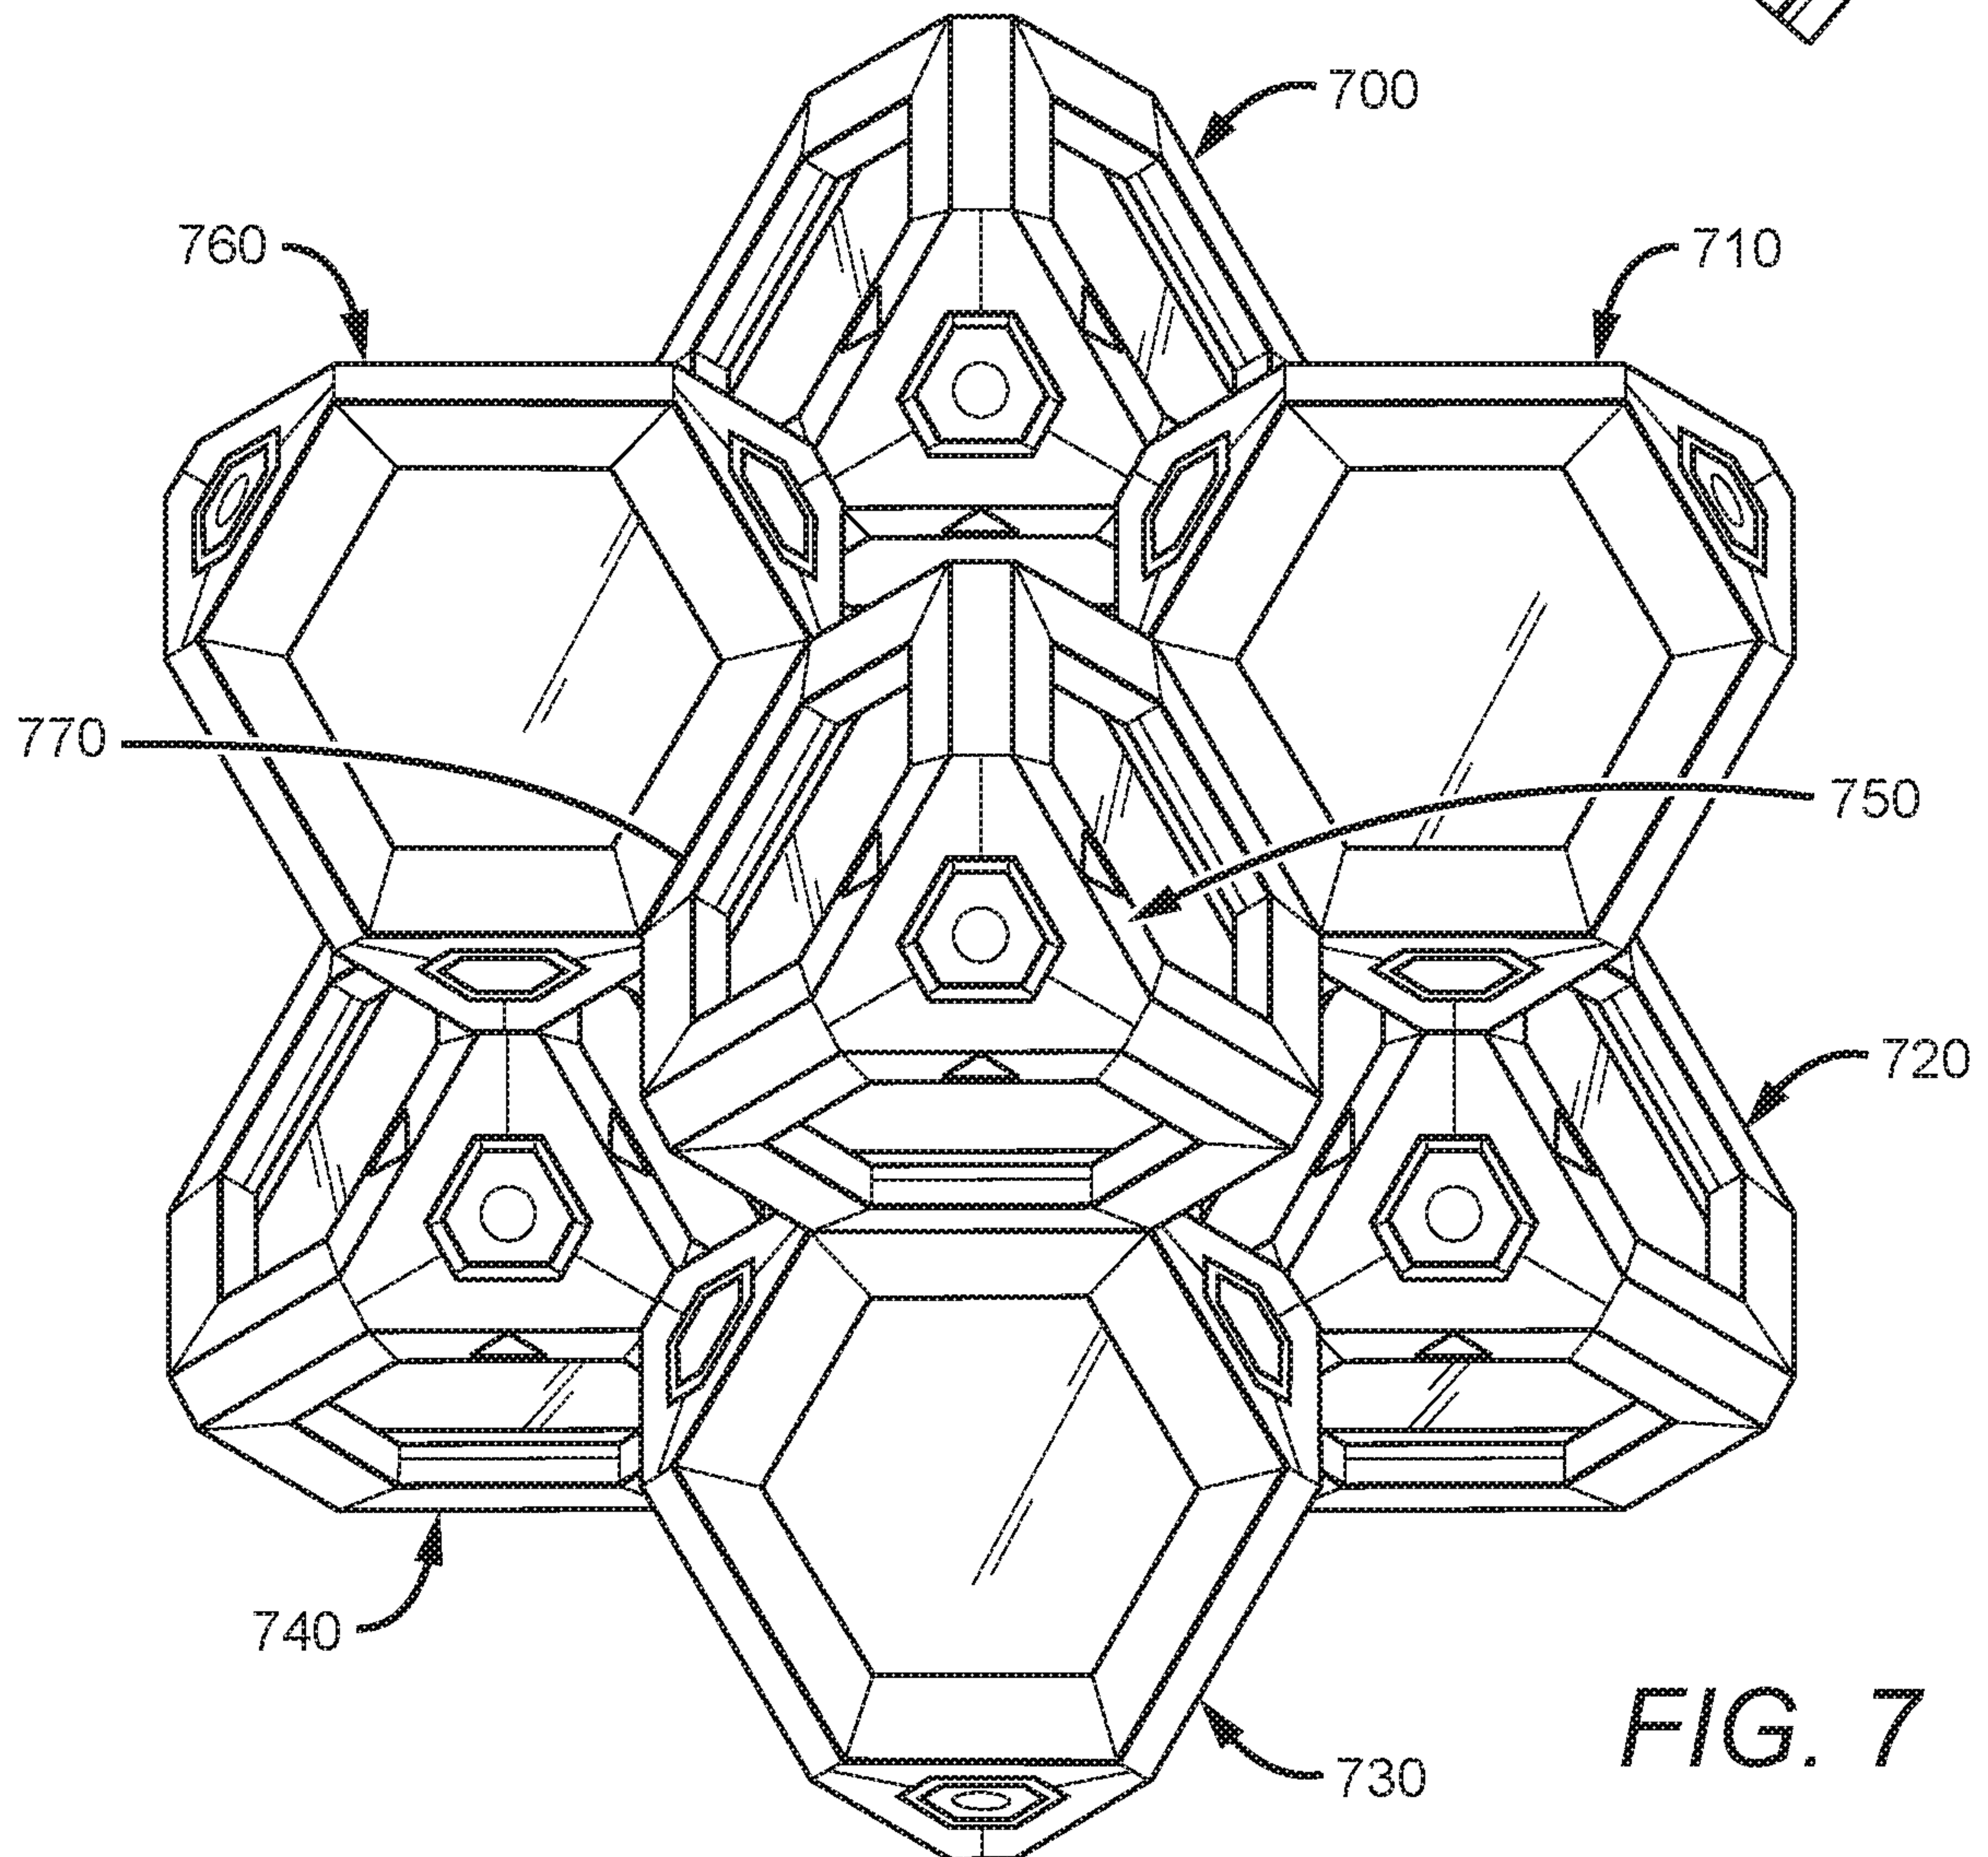
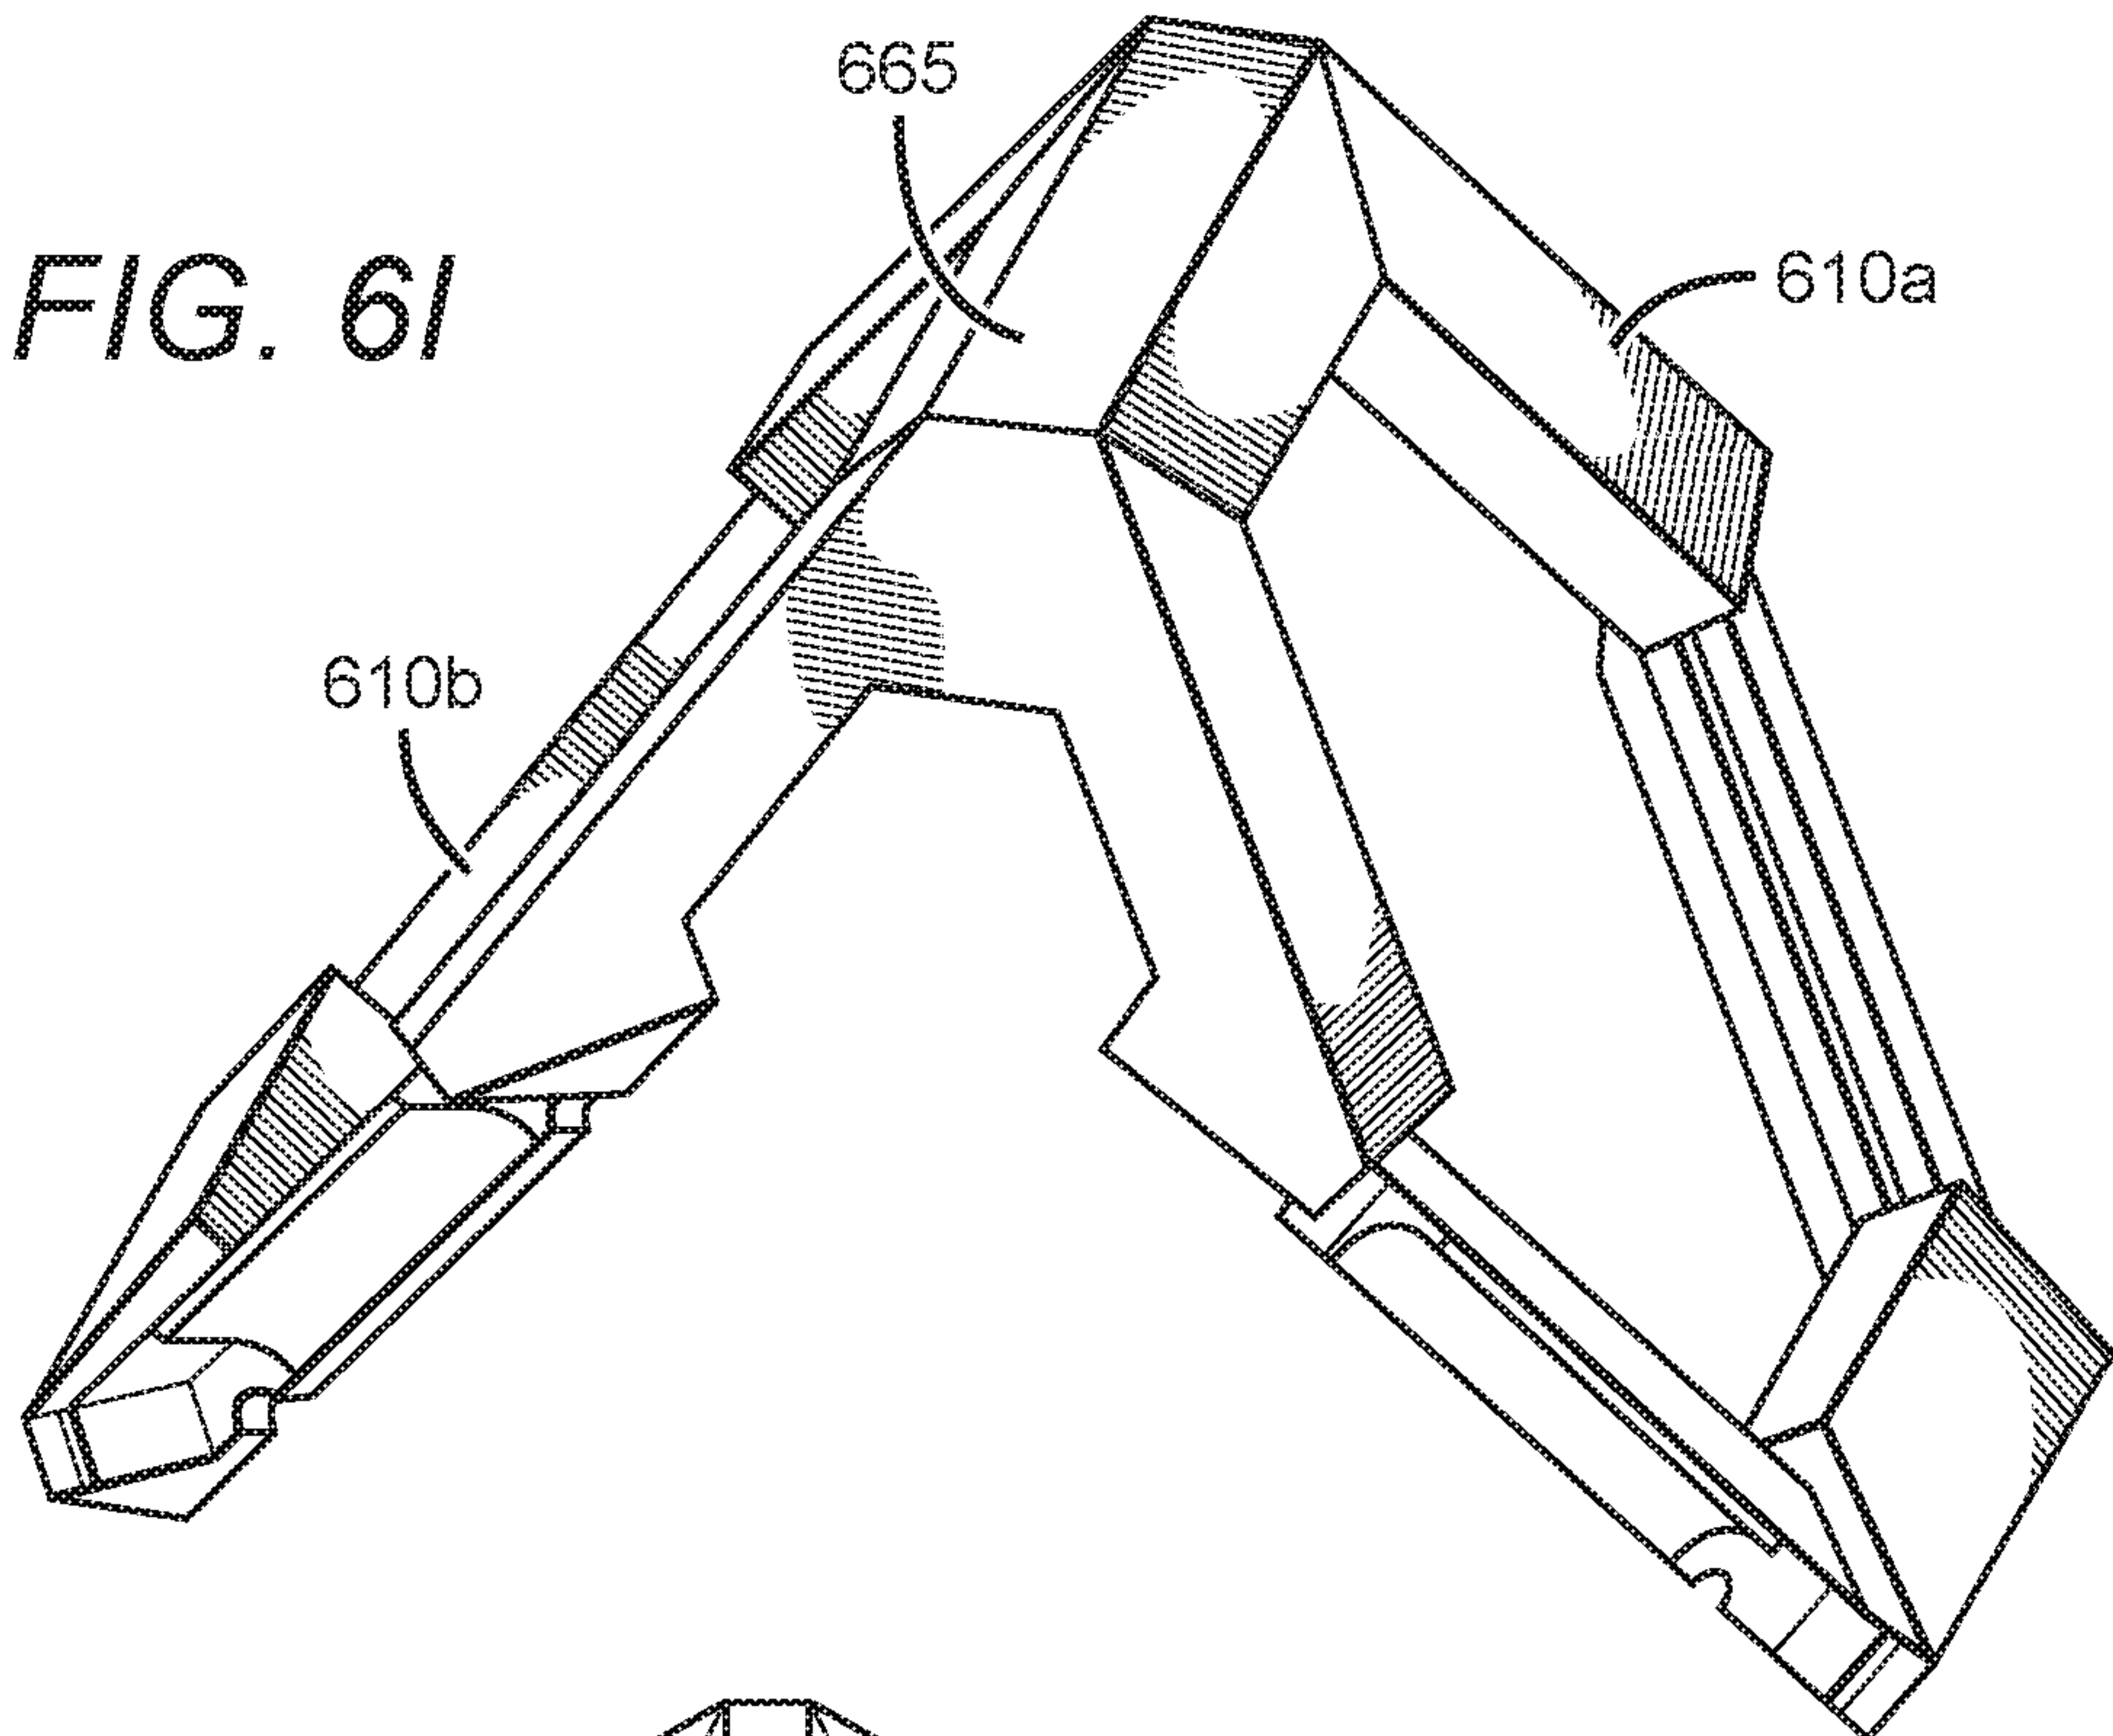
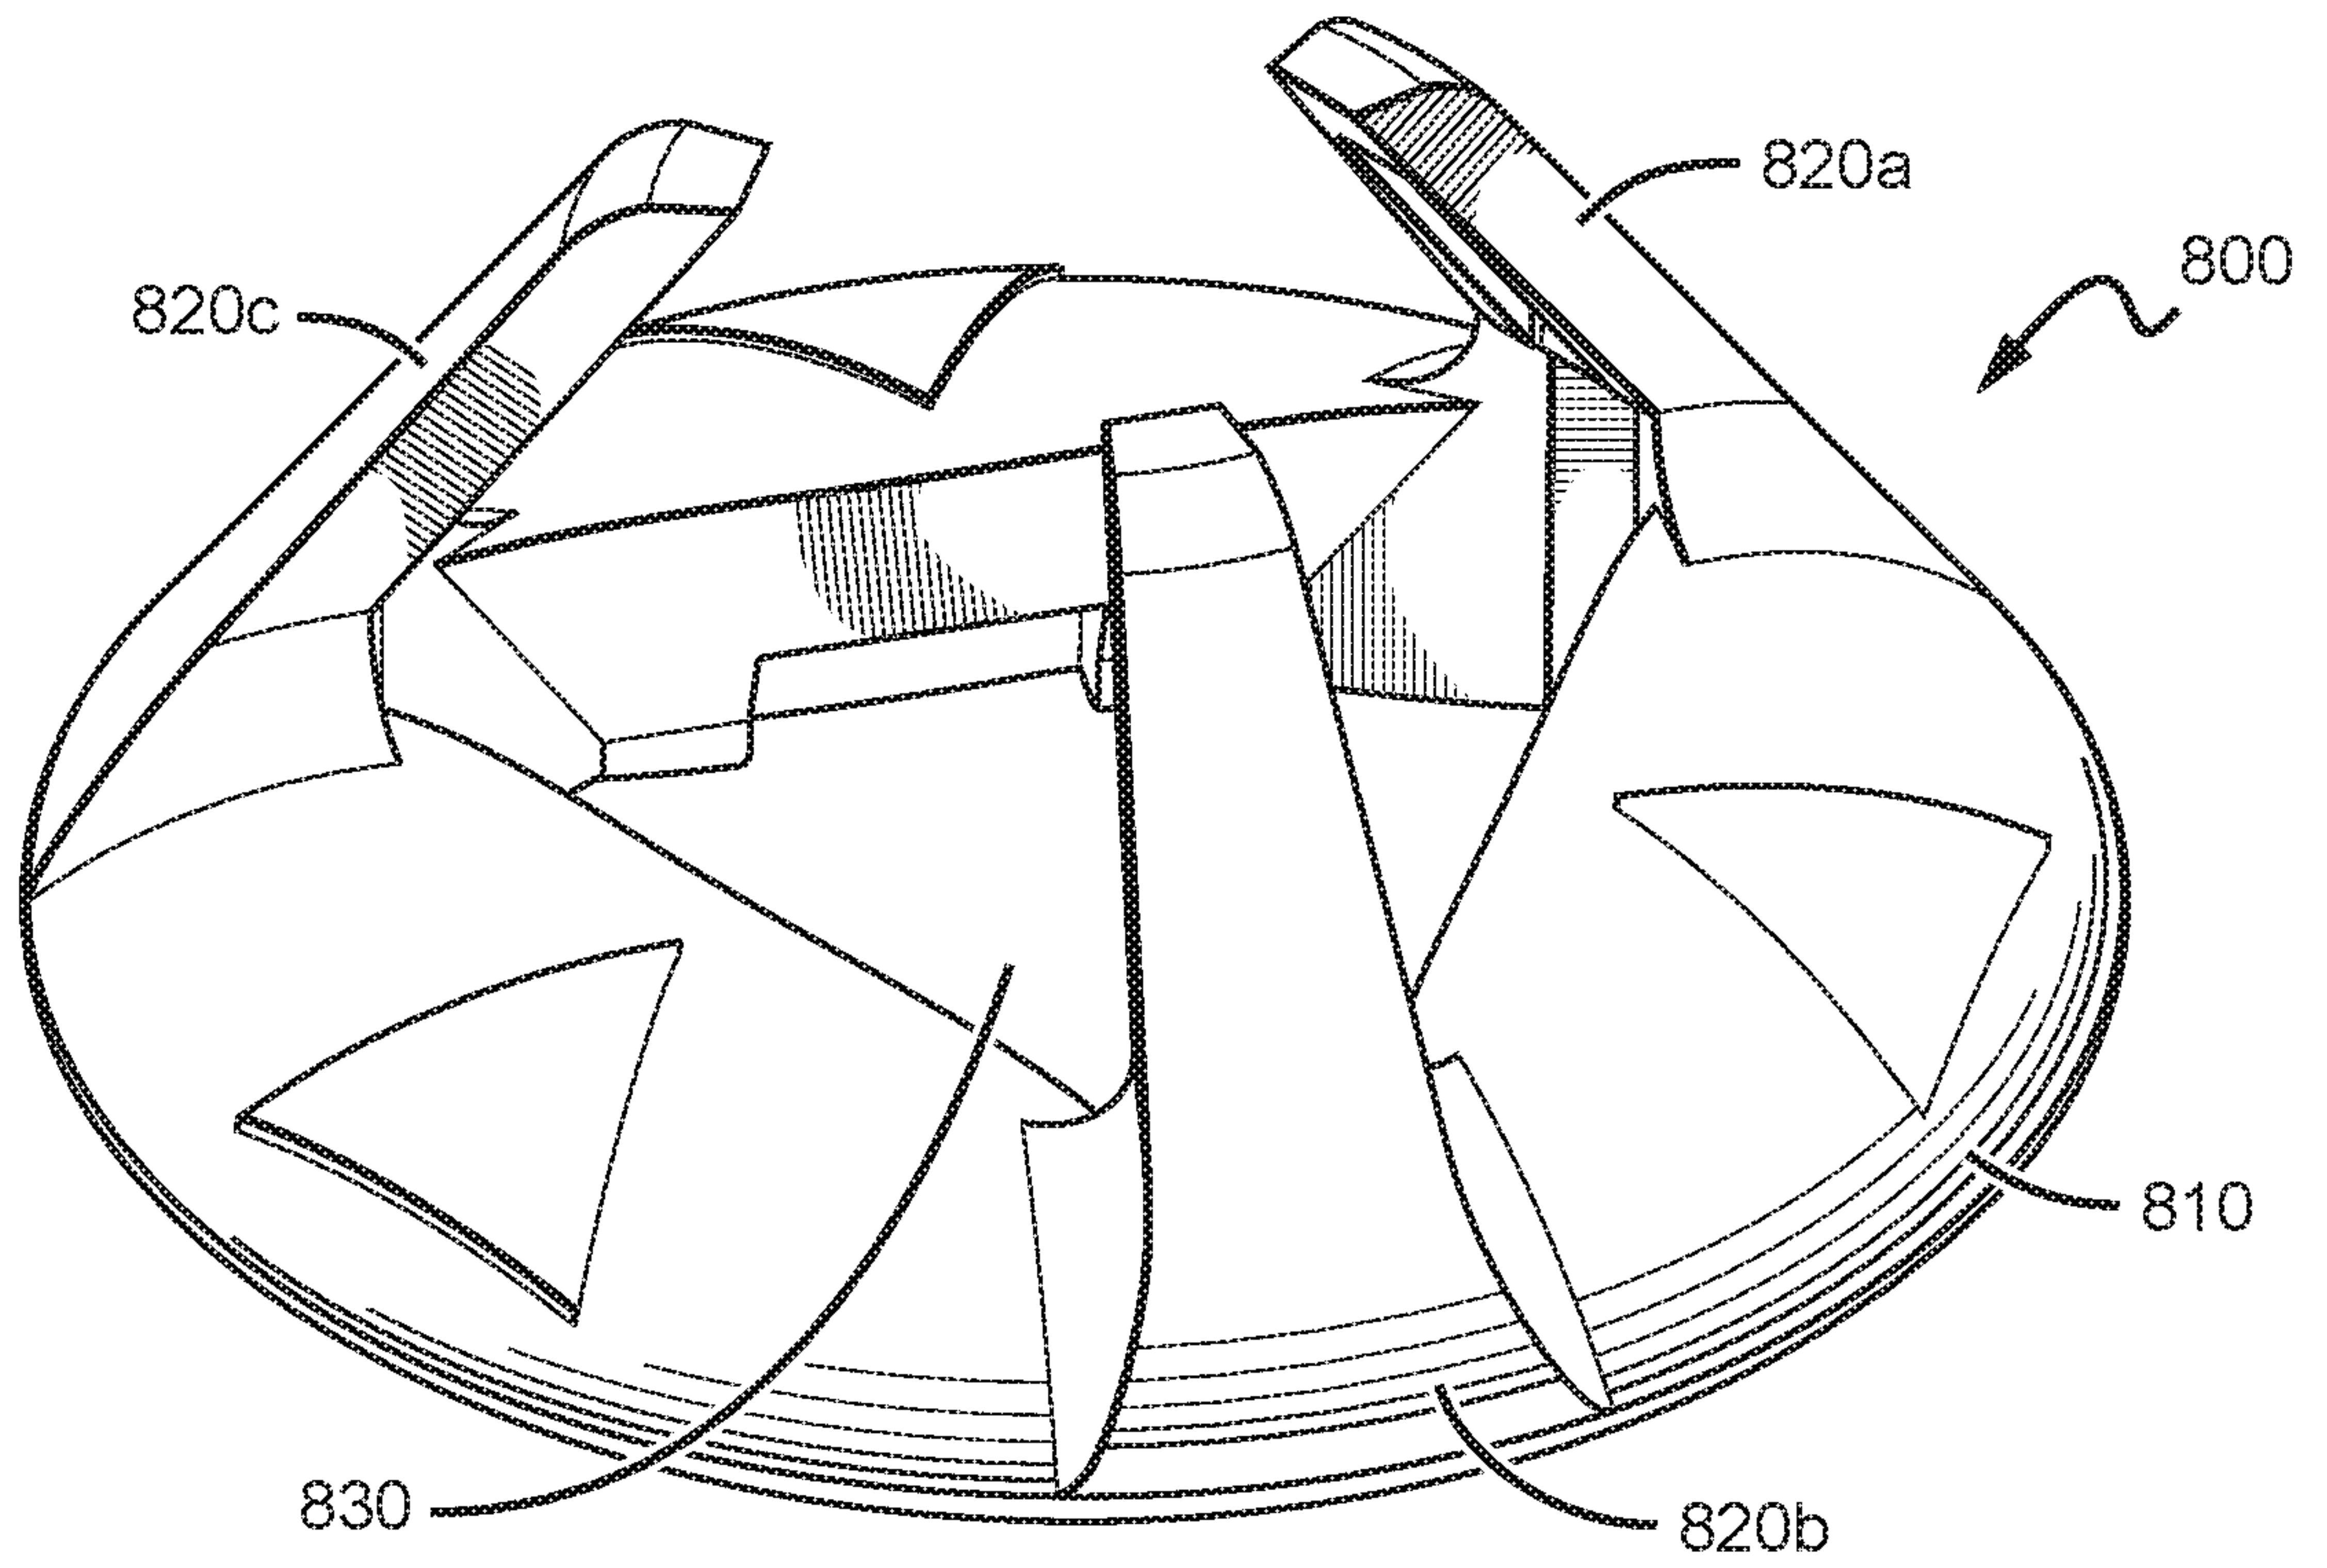
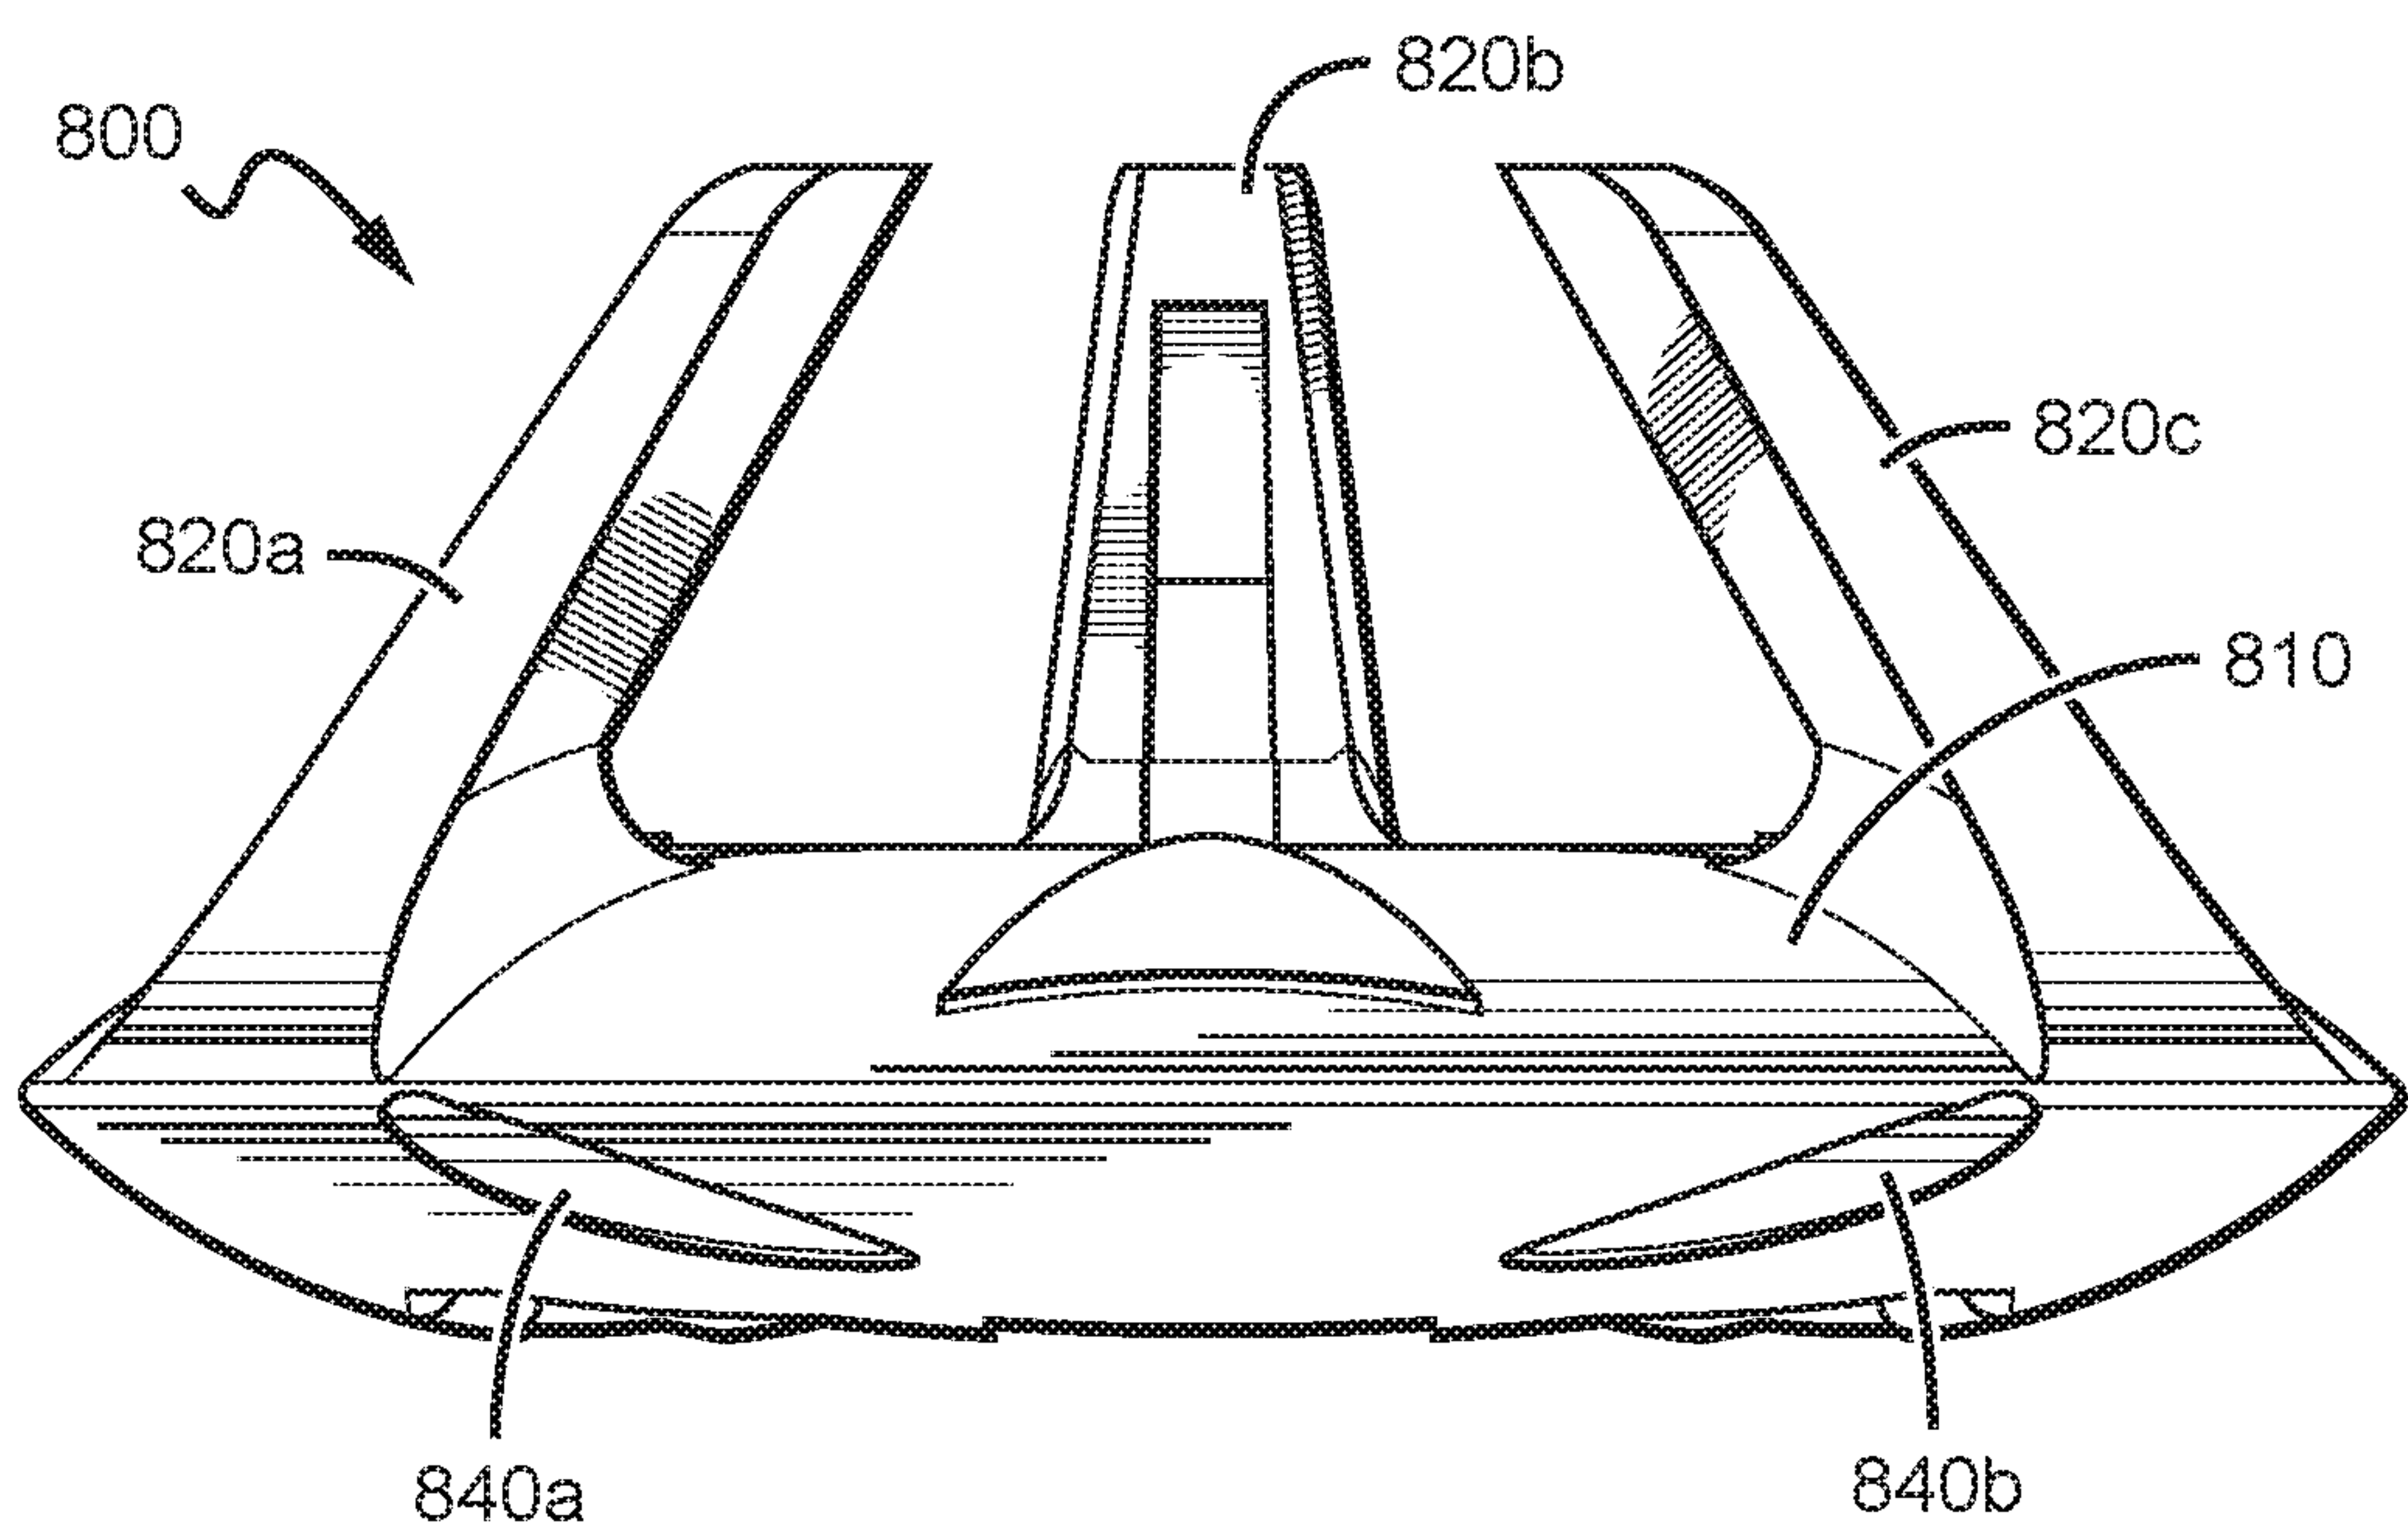
FIG. 6G*FIG. 6H*

FIG. 6I*FIG. 7*

*FIG. 8A**FIG. 8B*

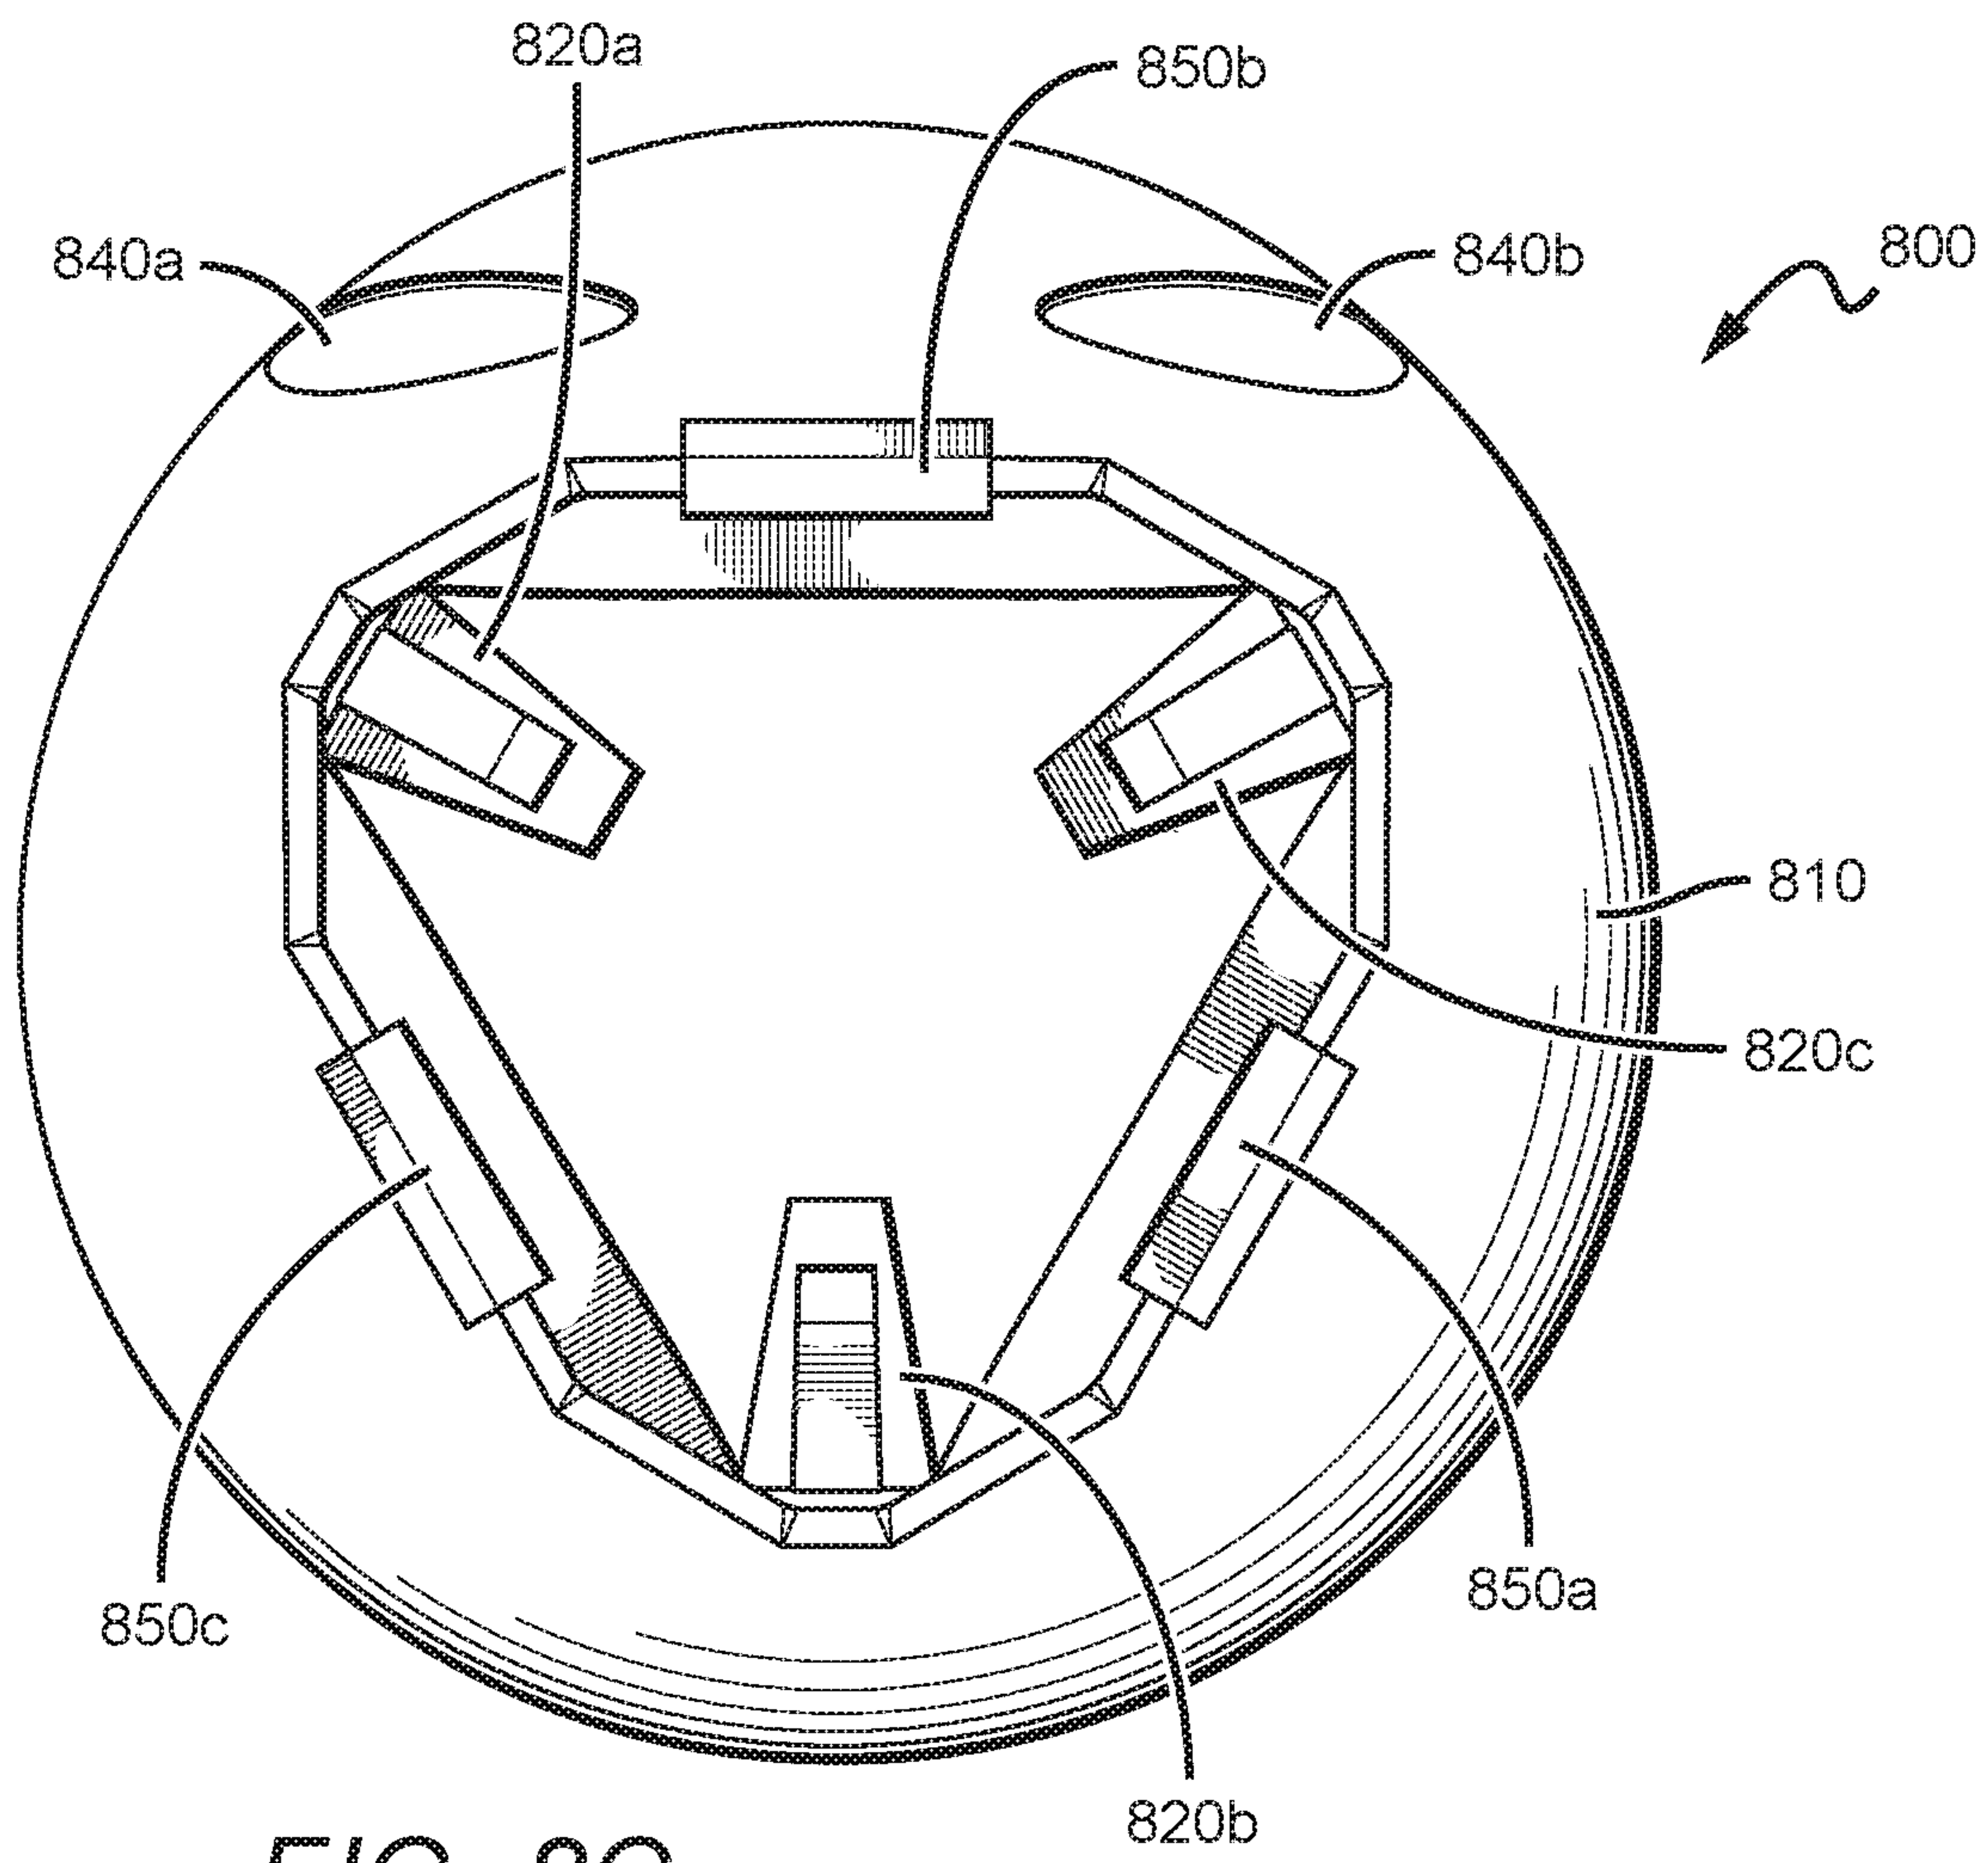
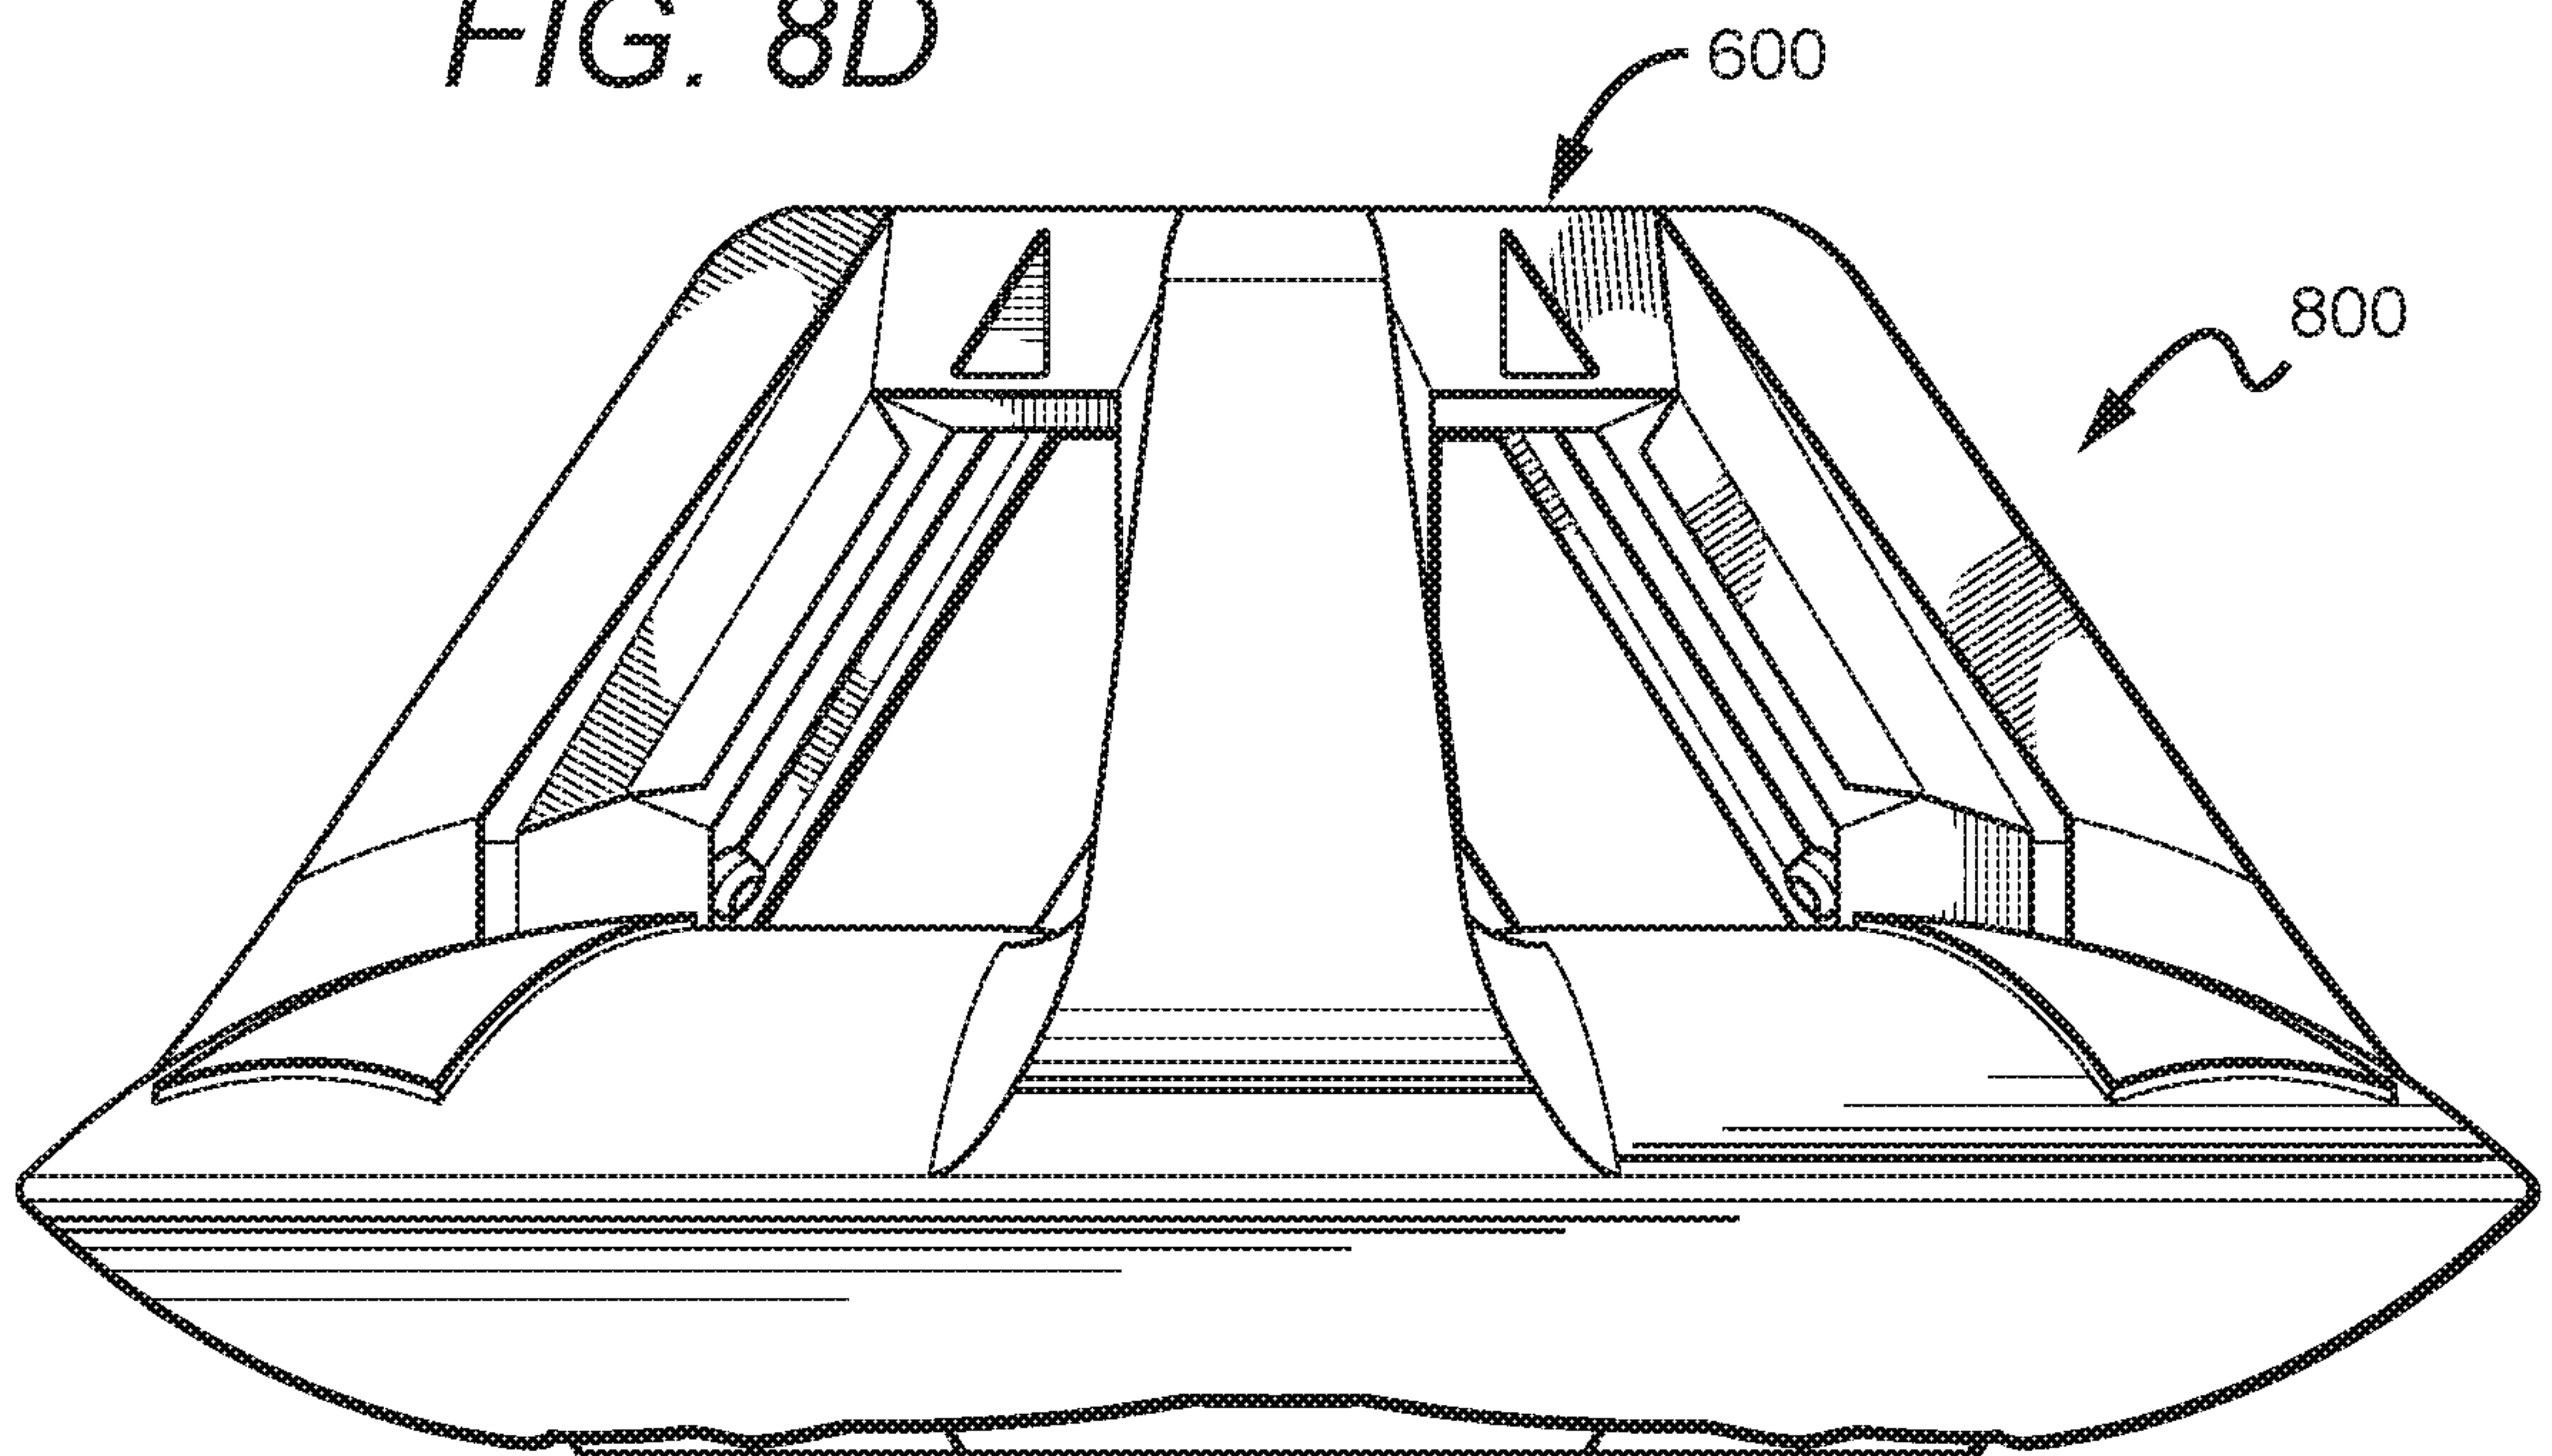
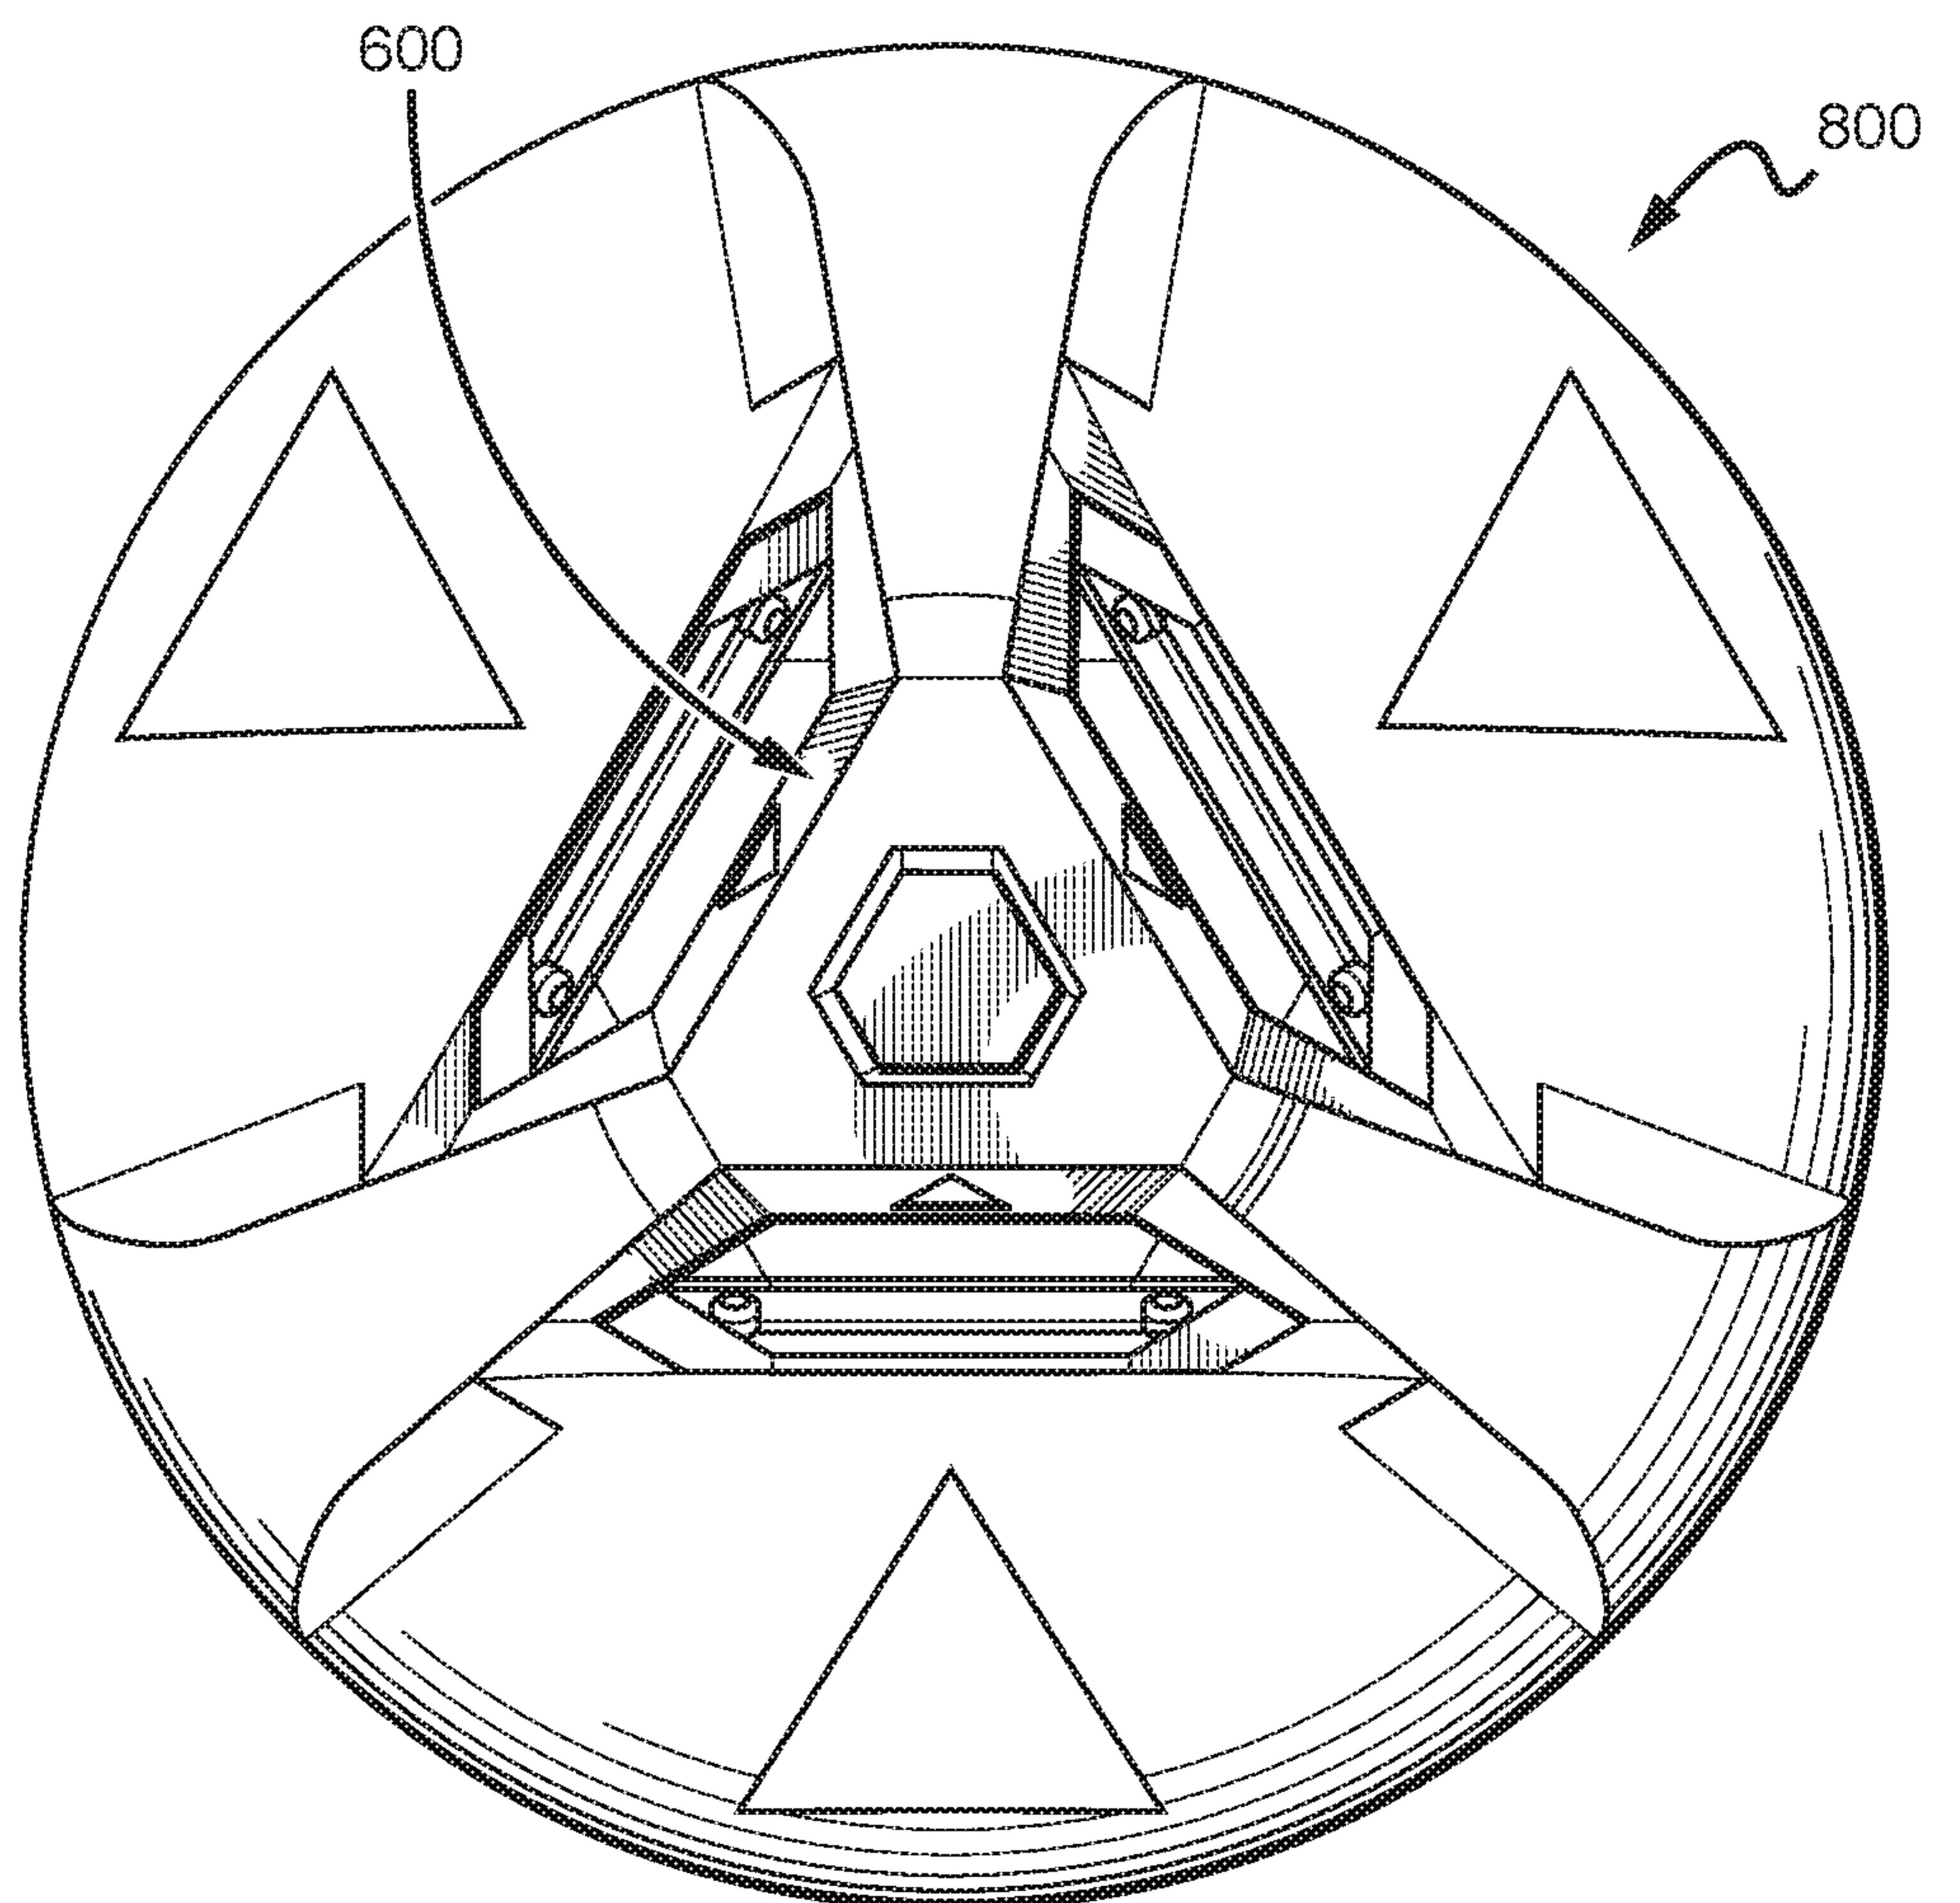
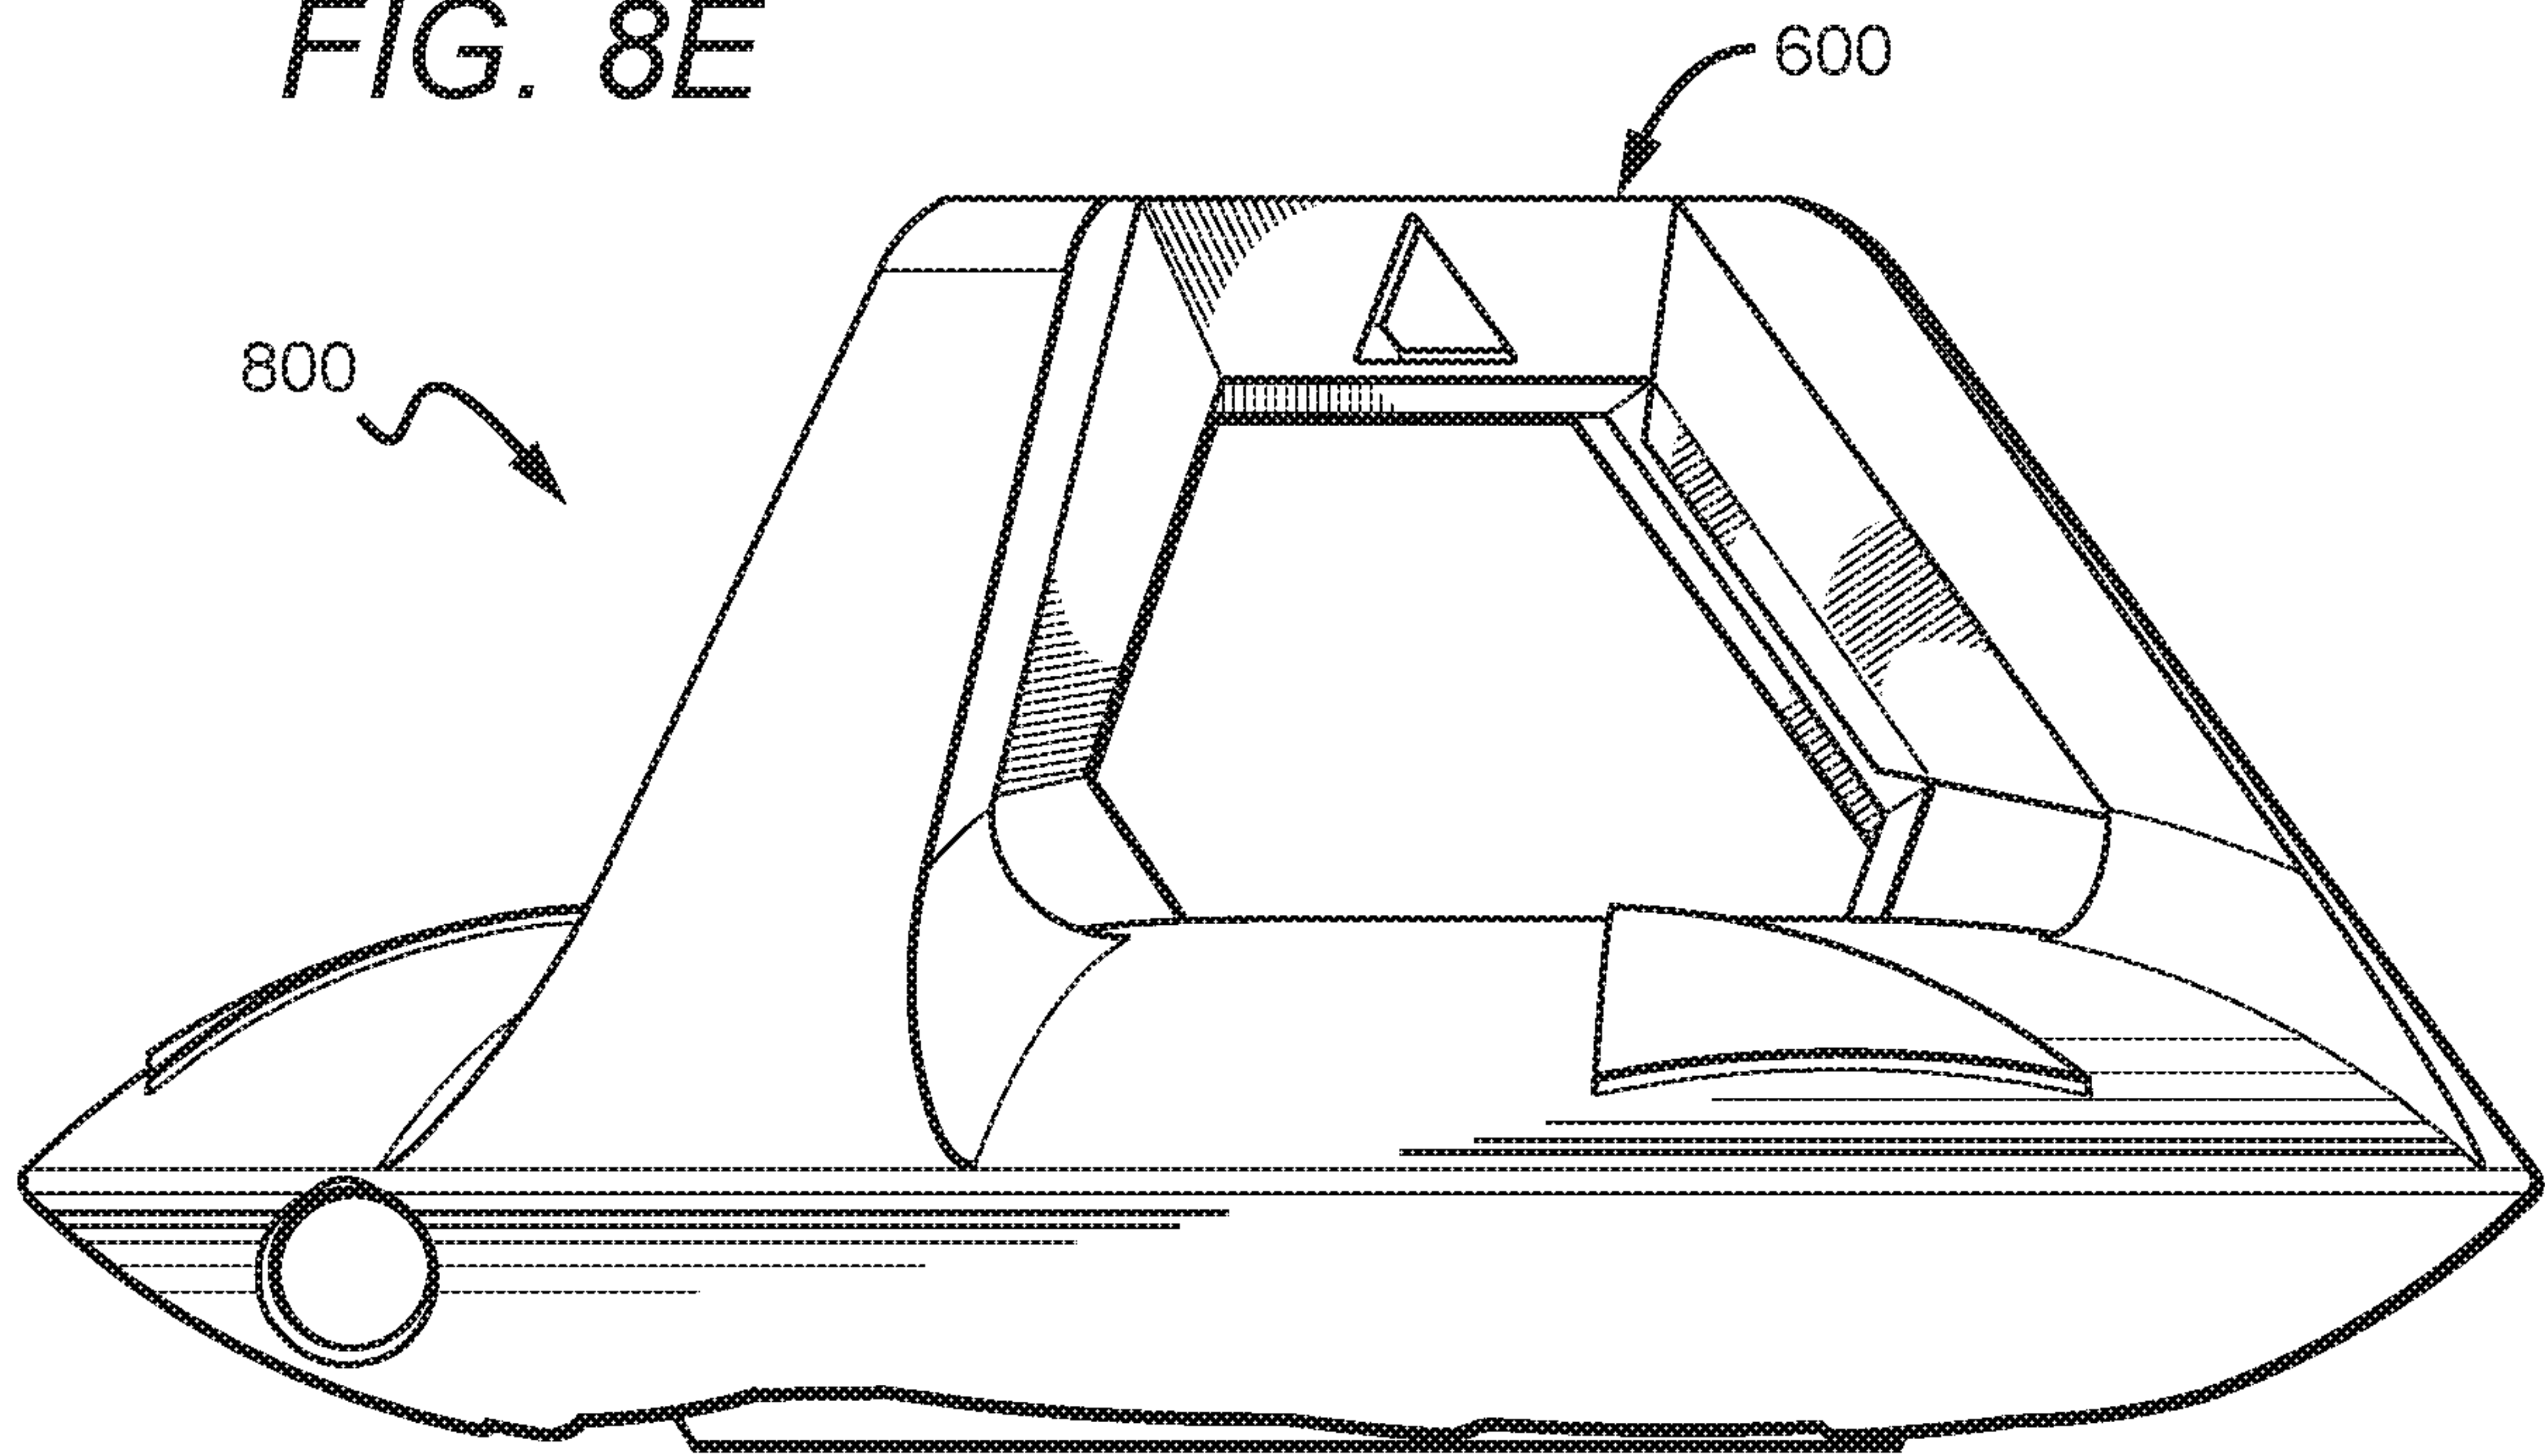
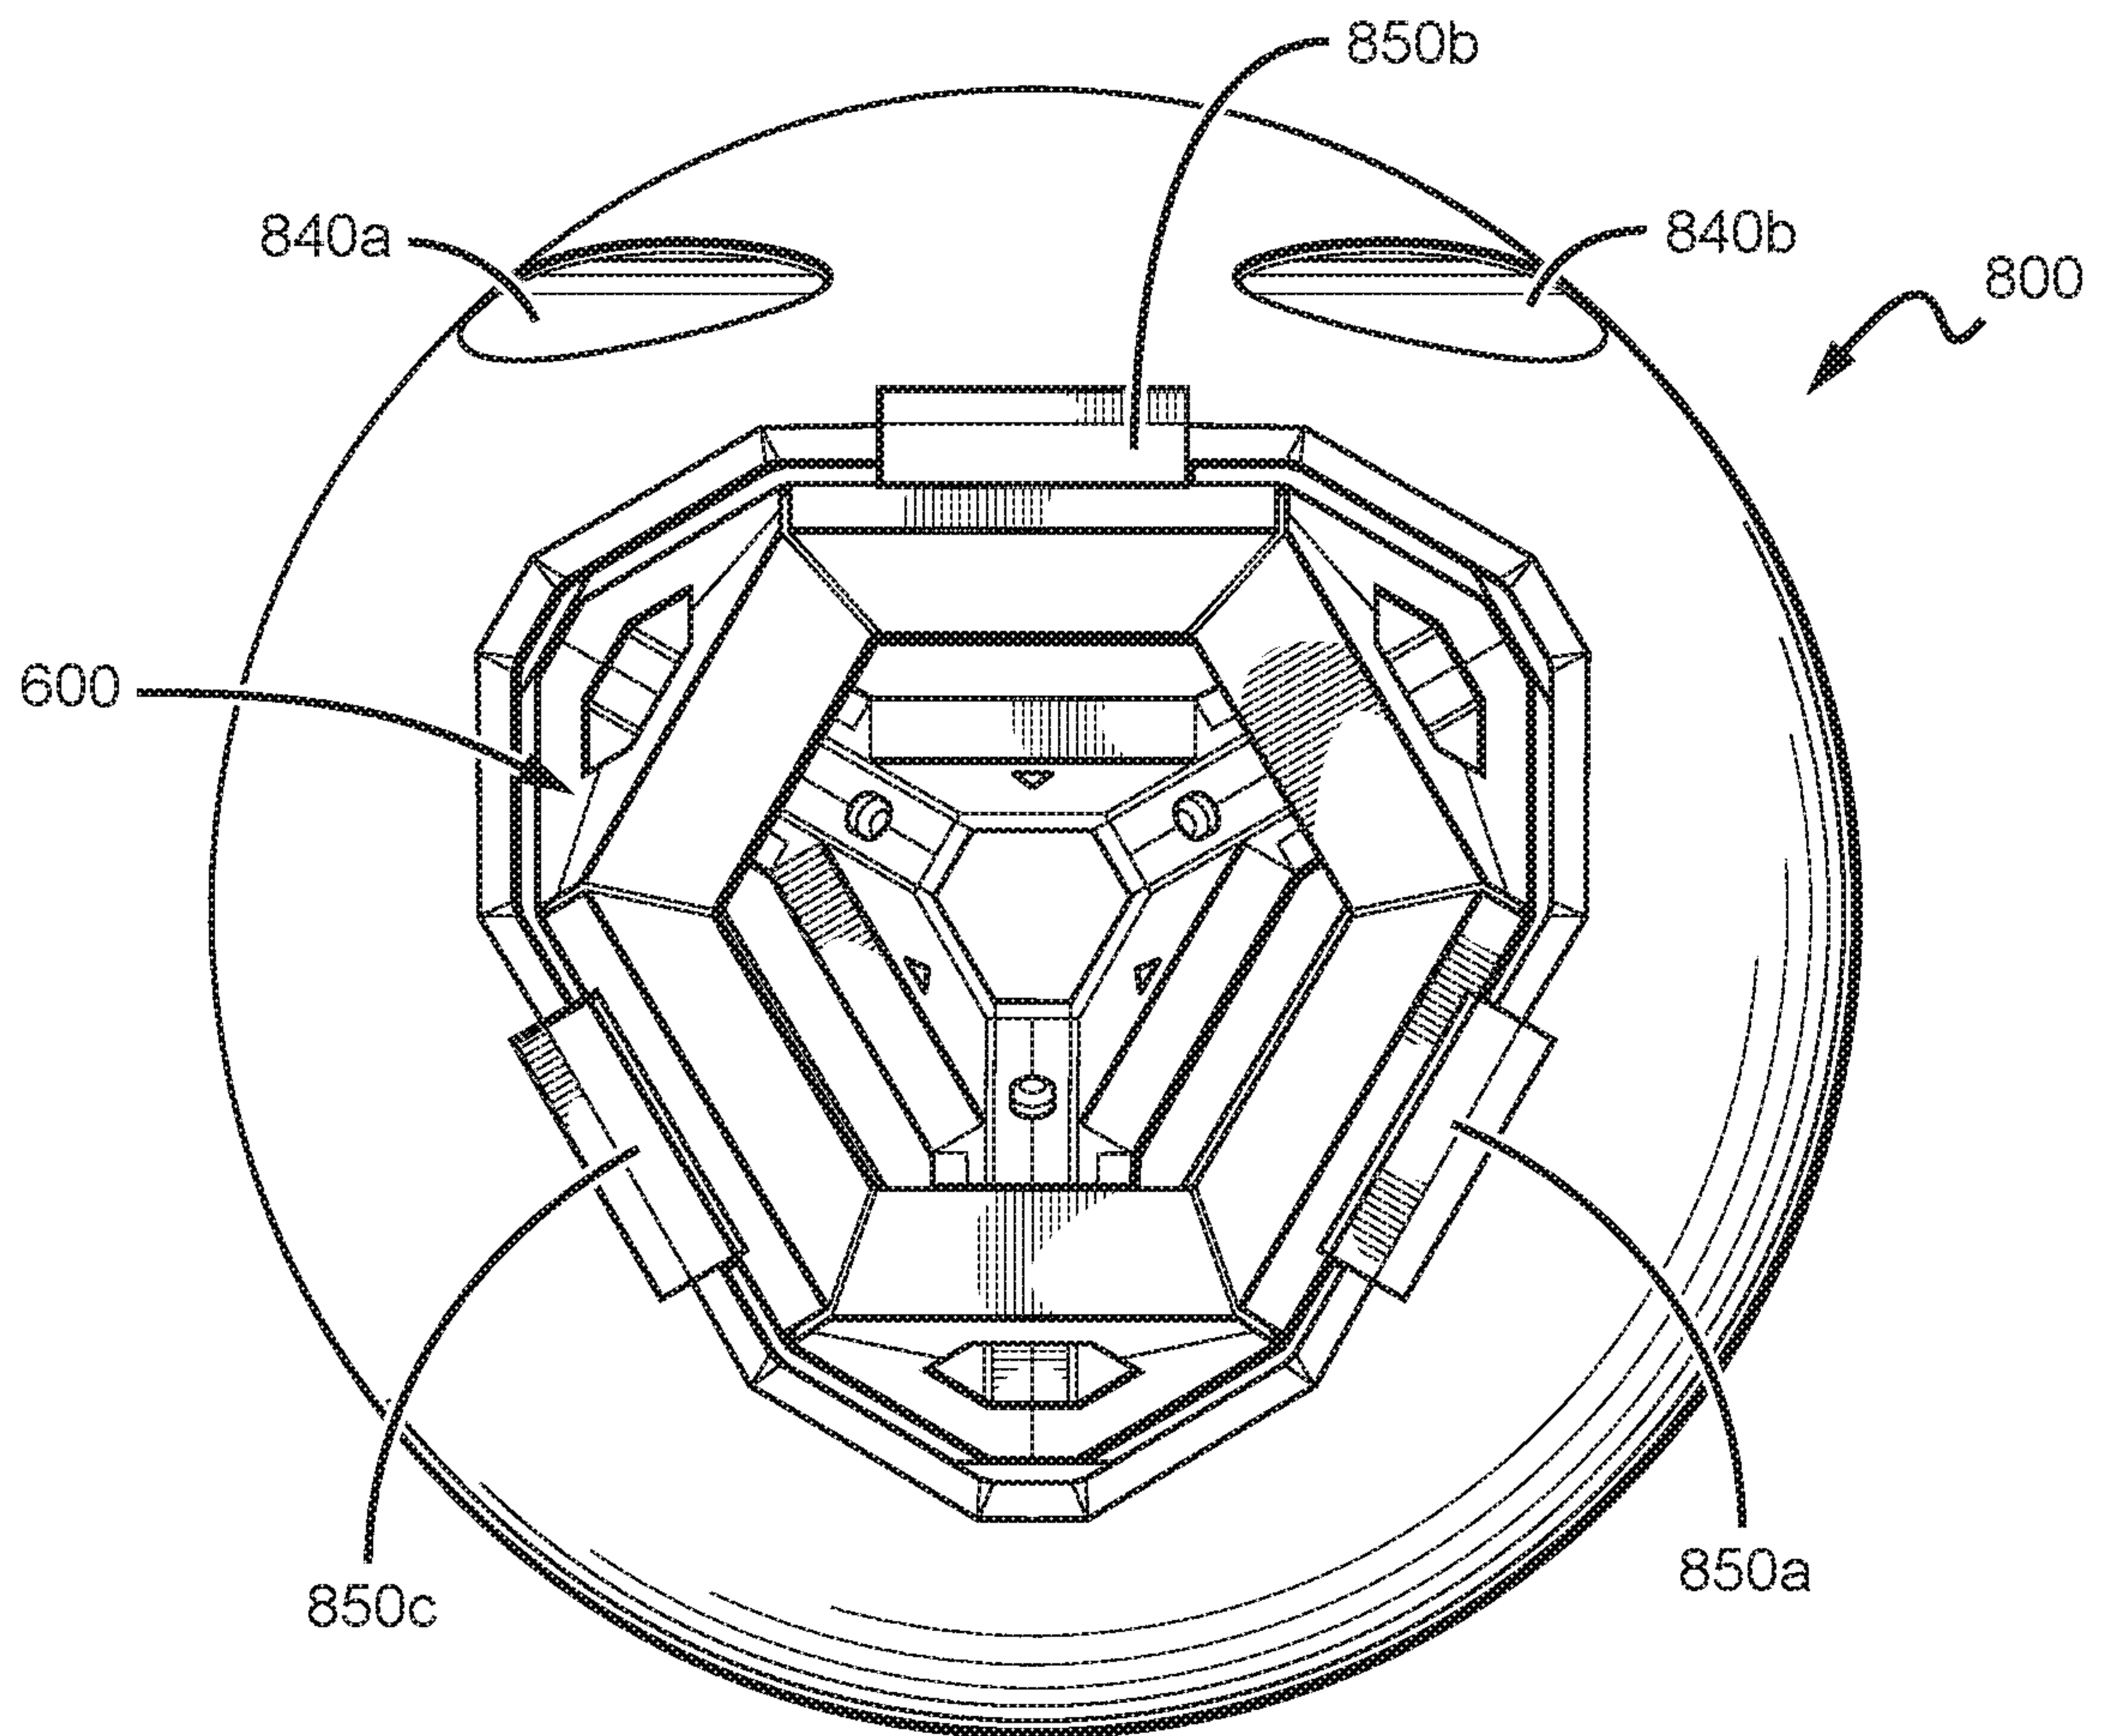
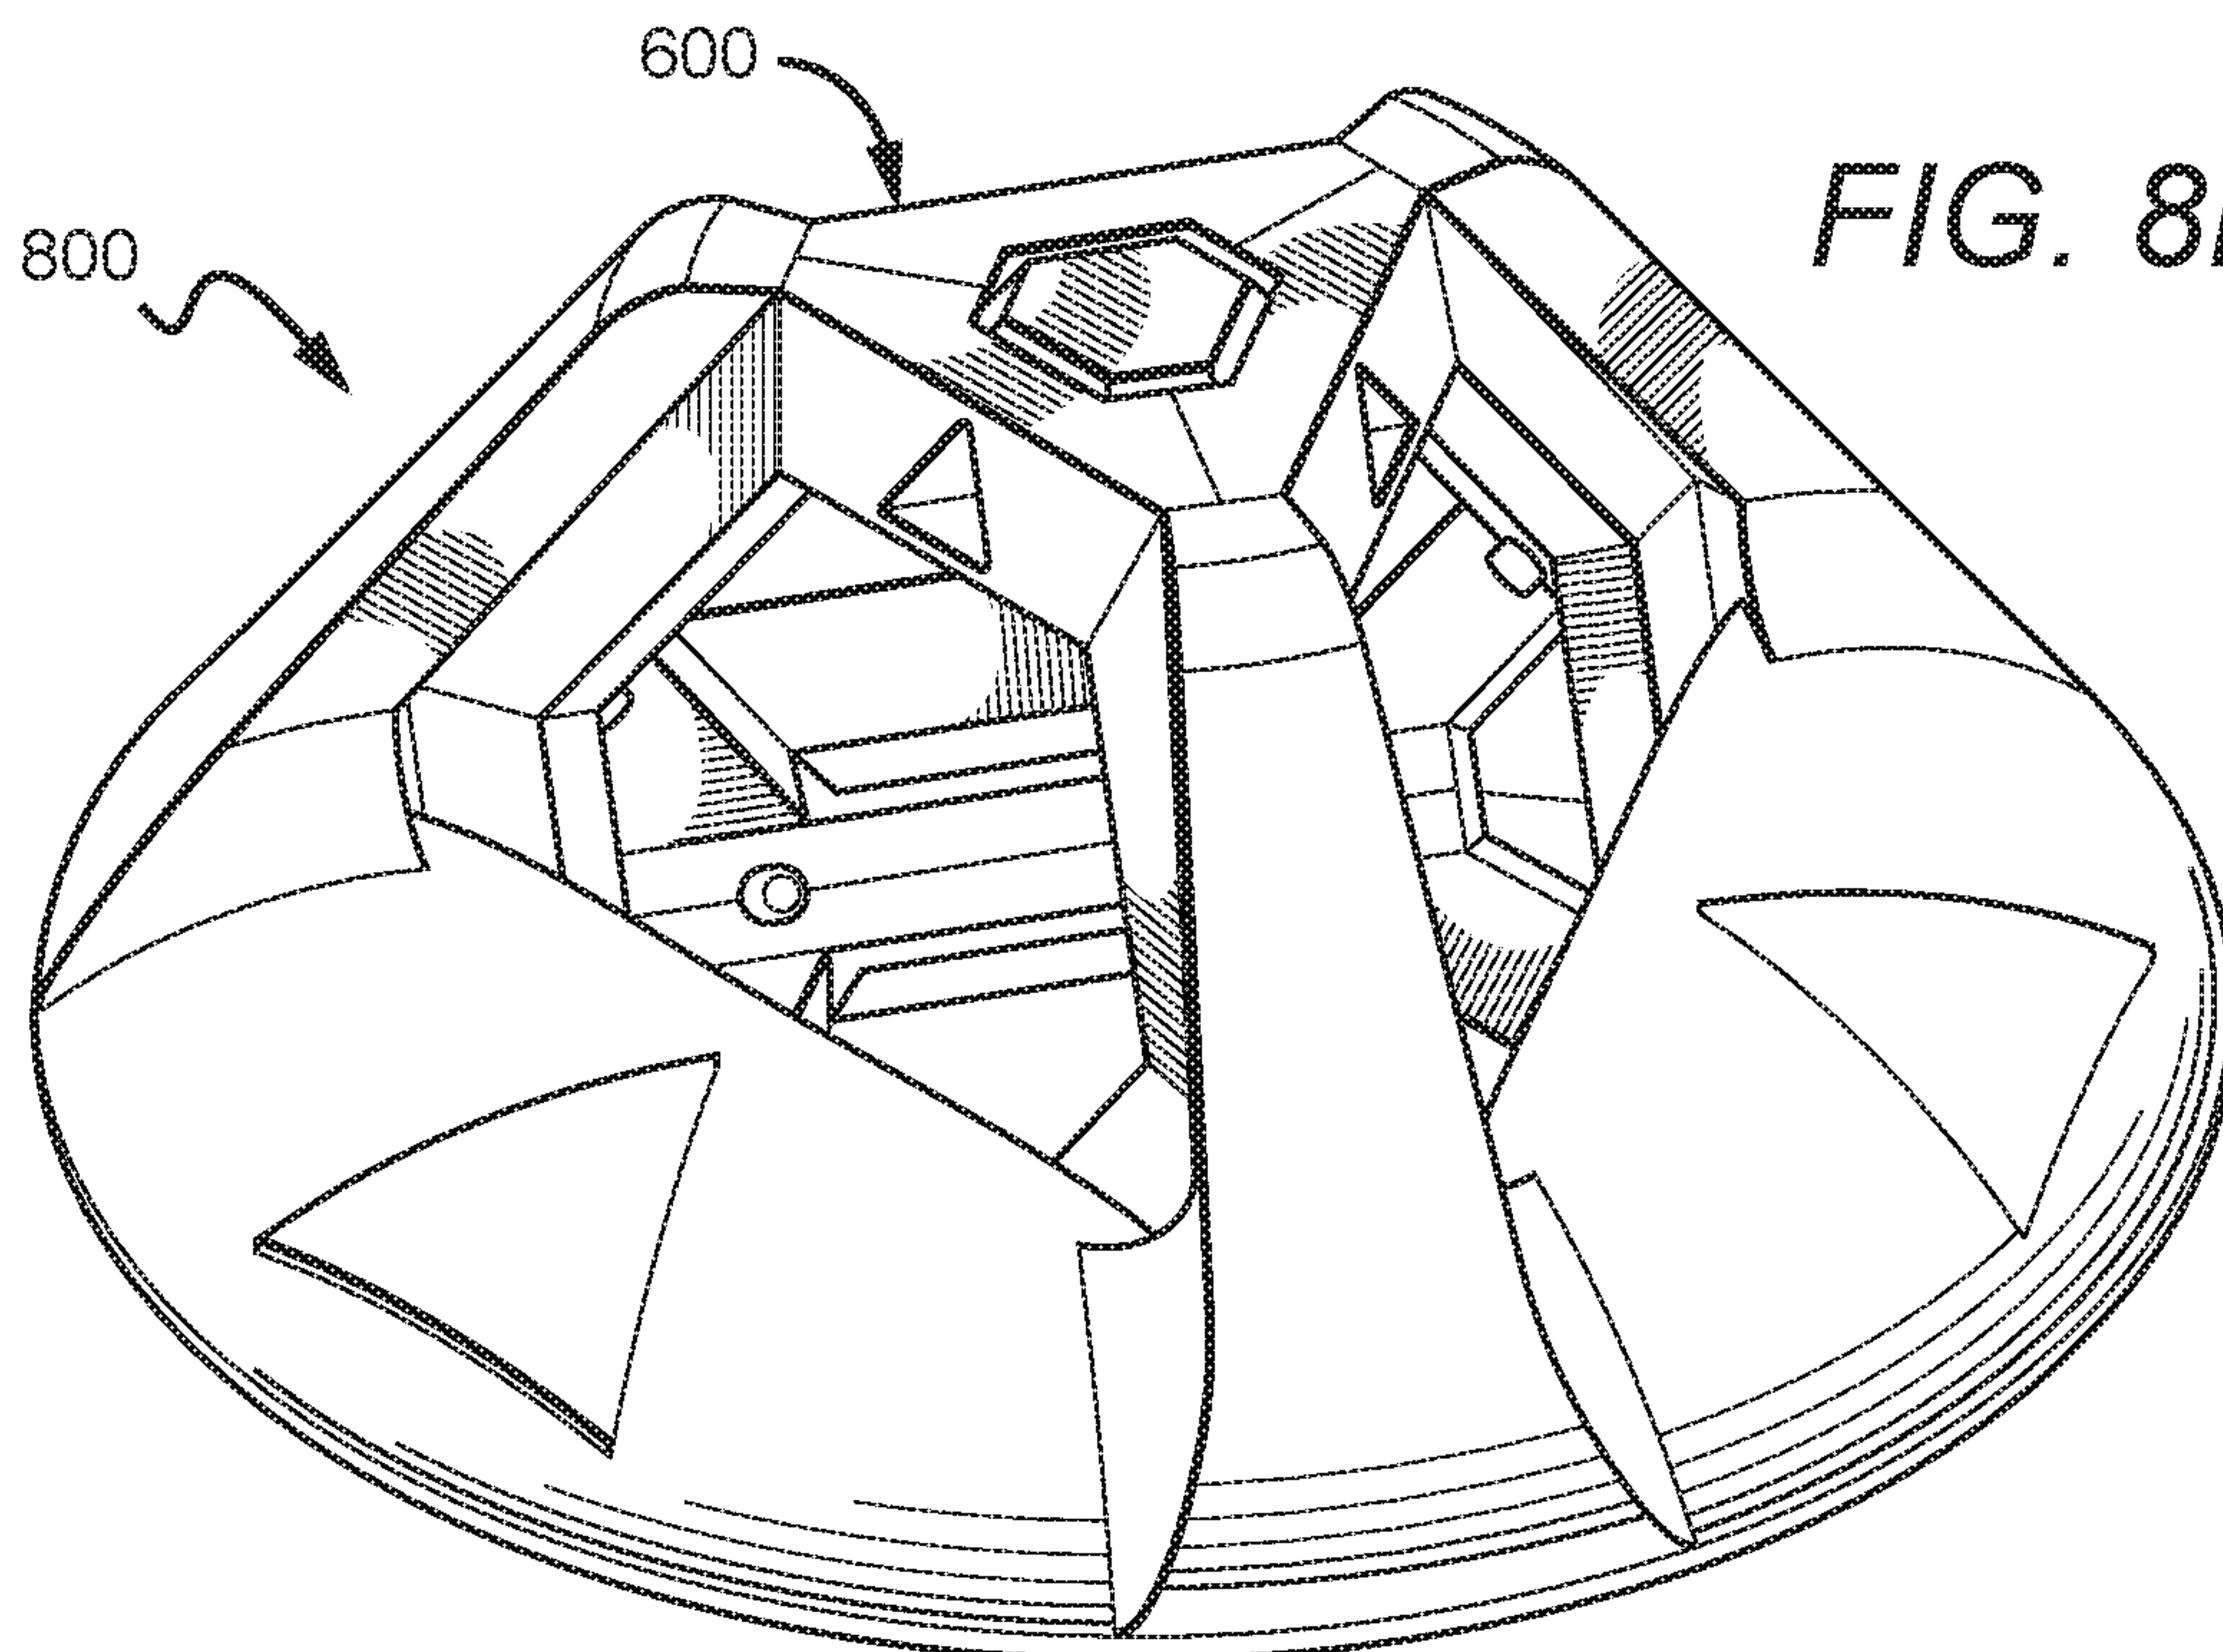
*FIG. 8C**FIG. 8D*

FIG. 8E*FIG. 8F*

*FIG. 8G**FIG. 8H*

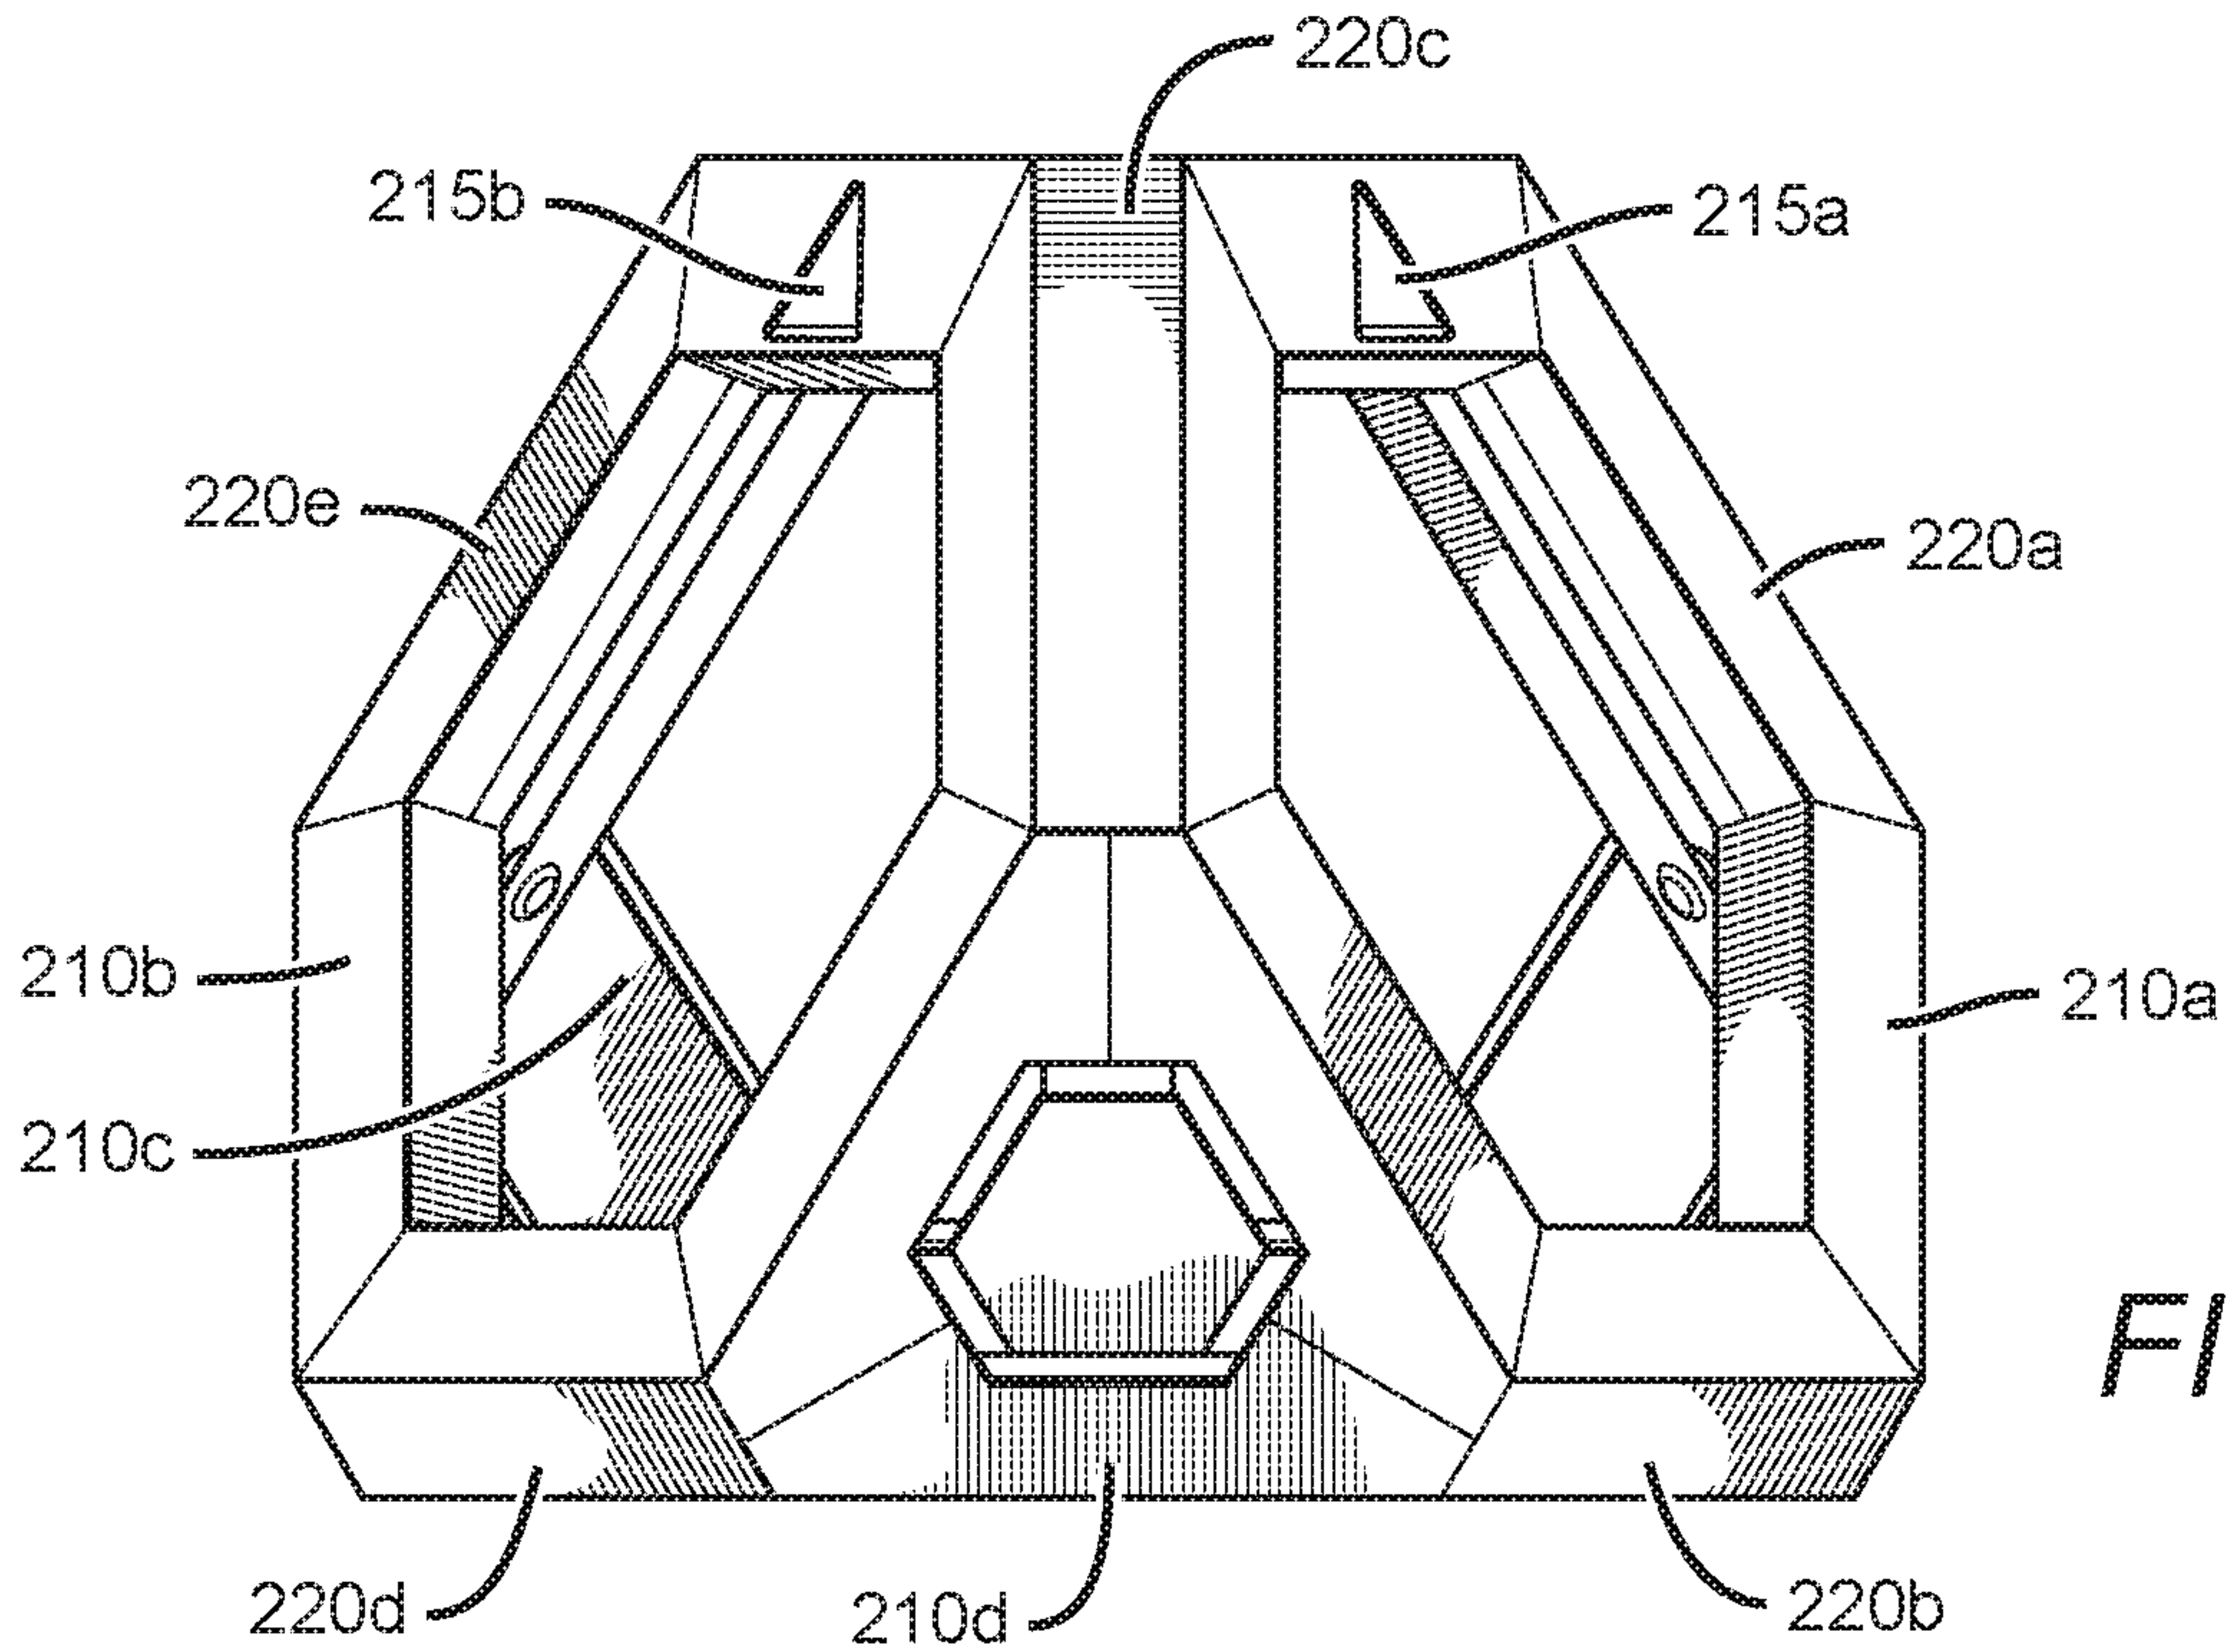


FIG. 2B