



(51) International Patent Classification:
H01Q 1/12 (2006.01)

(21) International Application Number:
PCT/US2016/029290

(22) International Filing Date:
26 April 2016 (26.04.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/154,111 28 April 2015 (28.04.2015) US
62/307,877 14 March 2016 (14.03.2016) US

(71) Applicant: COMMSCOPE TECHNOLOGIES LLC
[US/US]; 1100 CommScope Place SE, Hickory, NC 28602
(US).

(72) Inventors: SKREPCINSKI, Alan J.; 2600 Micarta Dr.,
Plano, TX 75025 (US). ROVELL, Kevin L.; 745 Granite
Ridge Dr., Fort Worth, TX 76179 (US). PASWALK, Kevin
Ray; 6701 Bison Trail, Wauwaga, TX 76137 (US).

(74) Agent: CANNON, James, R.; Myers Bigel & Sibley, P.A.,
P.O. Box 37428, Raleigh, NC 27627 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ANTENNA MOUNT

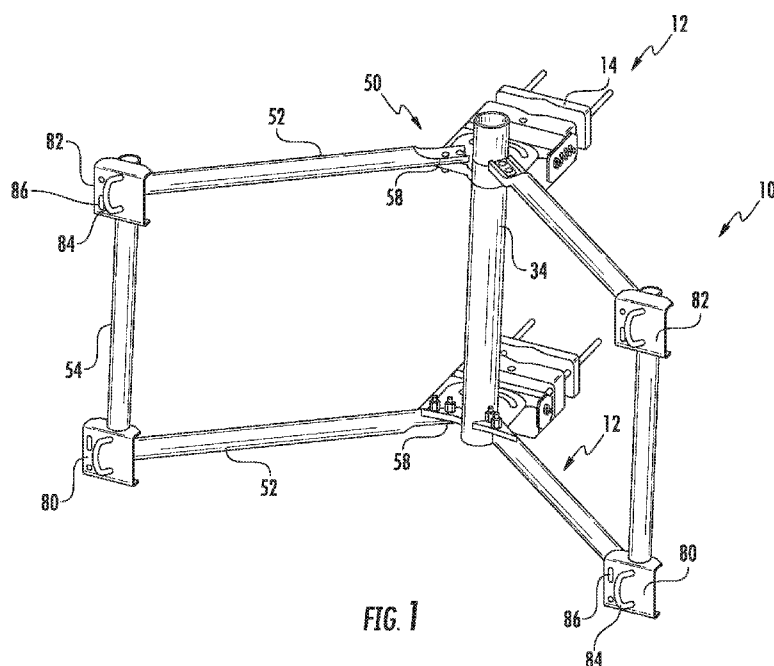

(57) Abstract: A mount for an antenna includes: first and second generally C-shaped arms, each with upper and lower free ends; equipment face mounting brackets mounted on the first and second arms; and lower and upper plates mounted to a post. The upper free ends of the first and second arms are pivotally mounted to the upper plate, and the lower free ends of the first and second arms are pivotally mounted to the lower plate, such that the first and second arms are movable between retracted and extended positions. The first and second arms are fixed in the extended position relative to the upper and lower plate via fasteners inserted through holes in the upper and lower free ends of the arms and in the upper plate, the pivotal mounts and the holes defining a desired angle between the first and second arms in the extended position.

ANTENNA MOUNT

Related Applications

[001] The present application claims priority from and the benefit of U.S. Provisional Application No. 62/154,111, filed April 28, 2015, and U.S. Provisional Application No. 62/307,877, filed March 14, 2016, the disclosures of which are hereby incorporated herein in their entirety.

Field of the Invention

[002] The present invention relates generally to mounts for antennas, and more particularly to mounts for antennas on an antenna tower or monopole.

Background

[003] With increased demand for more wireless communication, the number of radio and antenna units that a tower traditionally supports has increased and is expected to continue to increase. New towers will need to be designed to support greater numbers of antenna and radio units, while existing towers are retrofitted to support more units, and effort is made to fully utilize space available on the towers.

[004] In addition, antennas are becoming larger in order to handle more wireless traffic. One parameter that influences antenna design is Effective Projected Area (EPA), which is determined by calculations defined by TIA/ANSI-222-G. EPA is intended to predict the effect of wind loading on an antenna structure to enable designers to create a safe design. The configuration of the antenna mount can impact the calculations. As such, minimizing an antenna mount's contribution to EPA can be desirable.

[005] In addition, because antennas are typically mounted on towers well above the ground, technicians working on the antennas and their mounts are at some risk. As a result, a mount design that can reduce the time a technician spends on the tower may also be desirable.

Summary

[006] As a first aspect, embodiments of the invention are directed to a mount for an antenna, comprising: first and second generally C-shaped arms, each with upper and lower free ends; equipment face mounting brackets mounted on the first and second arms; and lower and upper plates mounted to a post. The upper free ends of the first and second arms are pivotally mounted to the upper plate, and the lower free ends of the first and second arms are pivotally mounted to the lower plate, such that the first and second arms are movable between retracted and extended positions. The first and second arms are fixed in the extended position relative to the upper plate via fasteners inserted through holes in the upper free ends of the arms and in the upper plate, and the first and second arms are fixed in the extended position relative to the lower plate via fasteners inserted through holes in the lower free ends of the arms and in the lower plate, the pivotal mounts and the holes defining a desired angle between the first and second arms in the extended position.

[007] As a second aspect, embodiments of the invention are directed to a tilt angle selection mechanism for an antenna mount, comprising: a lower bracket configured to attach to an antenna mount, the lower bracket including lower side panels; an upper bracket configured to attach to the antenna mount, the upper bracket including upper side panels, each of the upper side panels including a plurality of holes; and upper and lower bases for mounting the antenna mount to an antenna tower. The lower side panels are attached to the lower base at a pivotable joint. The upper side panels are attached to the upper base via the insertion of a member through a selected one of the plurality of holes and into the upper base, the insertion of the member preventing pivotal movement of the lower bracket relative to the lower base.

[008] As a third aspect, embodiments of the invention are directed to an azimuth adjustment mechanism for an antenna mount, comprising: upper and lower azimuth plates, each having an arcuate slot; arms attached to the upper and lower azimuth plates, the arms configured for mounting of a frame; a post in which the upper and lower azimuth plates are mounted, wherein the arcuate slots are configured with a radius of curvature that is

substantially collinear with an axis defined by the post; and upper and lower brackets attached to the post, each of the brackets having an adjustment member received in the slot of, respectively, the upper and lower azimuth plates so that the frame can rotated about the axis defined by the post.

[009] As a fourth aspect, embodiments of the invention are directed to a package of antenna mounts, comprising a plurality of antenna mounts, each of the antenna mounts comprising:

first and second generally C-shaped arms, each with upper and lower free ends; equipment face mounting brackets mounted on the first and second arms; and lower and upper plates mounted to a post. The upper free ends of the first and second arms are pivotally mounted to the upper plate, and wherein the lower free ends of the first and second arms are pivotally mounted to the lower plate, such that the first and second arms are movable between retracted and extended positions. In the retracted position, the first and second arms are pivoted to be generally parallel with each other. The antenna mounts are disposed in vertically stacked relationship. The package further comprises a shipping pallet underlying the stacked antenna mounts.

Brief Description of the Figures

[010] **FIG. 1** is a front perspective view of an antenna mount according to embodiments of the invention.

[011] **FIG. 2** is a rear perspective view of the antenna mount of **FIG. 1**.

[012] **FIG. 3** is a partial front side perspective view of the antenna mount of **FIG. 1**.

[013] **FIG. 4** is a partial rear side perspective view of the antenna mount of **FIG. 1**.

[014] **FIG. 5** is a front perspective view of the antenna mount of **FIG. 1** with an equipment frame mounted thereon.

[015] **FIG. 6** is a perspective view of a shipping package with one mount of **FIG. 1** on a shipping pallet.

[016] **FIG. 7** is a perspective view of a shipping package with three mounts of **FIG. 1** stacked with interleaved pallets and hardware stored in a central box.

[017] **FIG. 8** is a perspective view of a shipping package with three mounts of **FIG. 1** stacked with interleaved pallets and hardware for mounting to a monopole positioned therein.

[018] **FIG. 9** is a partial top view of three antenna mounts of **FIG. 1** mounted to a monopole via a ring mount.

Detailed Description

[019] The present invention now is described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[020] Like numbers refer to like elements throughout. In the figures, the thickness of certain lines, layers, components, elements or features may be exaggerated for clarity. Broken lines illustrate optional features or operations unless specified otherwise.

[021] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the specification and relevant art and should not be interpreted in an idealized or overly formal sense unless expressly so defined herein. Well-known functions or constructions may not be described in detail for brevity and/or clarity.

[022] As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. As used herein, phrases such as "between X and Y" and "between about X and Y" should be interpreted to include X and Y. As used herein, phrases such as "between about X and Y" mean "between about X and about Y." As used herein, phrases such as "from about X to Y" mean "from about X to about Y."

[023] It will be understood that when an element is referred to as being "on", "attached" to, "connected" to, "coupled" with, "contacting", etc., another element, it can be directly on,

attached to, connected to, coupled with or contacting the other element or intervening elements may also be present. In contrast, when an element is referred to as being, for example, "directly on", "directly attached" to, "directly connected" to, "directly coupled" with or "directly contacting" another element, there are no intervening elements present. It will also be appreciated by those of skill in the art that references to a structure or feature that is disposed "adjacent" another feature may have portions that overlap or underlie the adjacent feature.

[024] Spatially relative terms, such as "under", "below", "lower", "over", "upper", "lateral", "left", "right" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is inverted, elements described as "under" or "beneath" other elements or features would then be oriented "over" the other elements or features. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the descriptors of relative spatial relationships used herein interpreted accordingly.

[025] Referring now to the figures, an antenna mount, designated broadly at **10**, is shown in **FIGS. 1-4**. The mount **10** includes two pipe clamps **12**, each of which includes rear and front pipe clamping jaws **14, 16** connected by bolts **18**. The pipe clamps **12** are configured to clamp to a leg of an antenna tower or other mounting structure positioned between the rear and front clamping jaws **14, 16** when the bolts **18** are tightened.

[026] As can be seen in **FIG. 4**, two side panels **20** are fixed to opposite side walls of a lower U-bolt bracket **22**. Also, each of the side panels **20** is mounted to the lower front clamping jaw **16** via a bolt **24** about which the side panels **20** can pivot. Two side panels **26** are mounted to opposite side walls of an upper U-bolt bracket **32** also, but the side panels **26** include a plurality of mounting holes **28** arranged in two rows, through which a bolt **30** mounts the side panels to the upper clamping jaw **16** (**FIG. 3**). The plurality of mounting holes **28** enables the relative position of the upper U-bolt bracket **32** to the upper front clamping jaw **16** to be varied, which in turn varies the "tilt" angle of an antenna mounted to the antenna tower to be selected as needed. Each of the holes **28** may be regularly spaced from the other holes **28** to provide incrementally increasing angular tilt; for example, the rightmost hole **28** shown in **FIG. 3** may correspond to zero tilt angle, the next rightmost hole

28 may correspond to one degree of tilt, the next rightmost hole 28 may correspond to two degrees of tilt, and so on. Those skilled in this art will recognize that other bases or foundations for mounting of the upper and lower U-bolt brackets to an antenna tower or other mounting structure may be employed.

[027] FIGS. 3 and 4 illustrate that the lower and upper U-bolt brackets 22, 32 are mounted to a cylindrical vertical post 34 via respective U-bolts 36, 37. Upper and lower azimuth adjustment plates 38, 40 are fixed to the vertical post 34. Each of the upper and lower azimuth adjustment plates 38, 40 has an arcuate slot 42 near its rear edge; the arcuate slot 42 has a radius of curvature that is substantially collinear with an axis defined by the vertical post 34. An adjustment bolt 44 (or other adjustment member, such as a pin or the like) is inserted through the slot 42 and into a hole in the upper surface of the corresponding U-bolt bracket 22, 32. When the adjustment bolt 44 is loosened, the upper and lower azimuth plates 38, 40 (and, in turn, the vertical post 34 and structures mounted thereto) are free to rotate relative to the lower and upper U-bolt brackets 22, 32 about the vertical axis defined by the post 34. Thus, the azimuth of an antenna mounted on the mount 10 can be adjusted by simply loosening the adjustment bolts 44, rotating the antenna into the desired position, and tightening the adjustment bolts 44.

[028] Referring still to FIGS. 3 and 4, two frame mounting holes 47, 48 are located near the front corners of the azimuth plates 38, 40. The holes 47, 48 are arranged such that one pair of holes 47, 48 defines an axis that forms a substantially horizontal angle of 120 degrees with the a substantially axis defined by the other pair of holes 47, 48 in the azimuth plates 38, 40.

[029] Referring now to FIGS. 1-4, two generally C-shaped arms 50 are attached at their ends to the upper and lower azimuth plates 38, 40. Each of the arms 50 includes two horizontal runs 52 and a vertical run 54, which in some embodiments are formed as a monolithic component (for example, via welding). At the free ends of the horizontal runs 52, the ends of the arms 50 have flattened sections 58 with two holes 60, 61. Bolts 62, 64 or other threaded or unthreaded fasteners are inserted into the holes 60, 61, then into the holes 47, 48 in the azimuth plates 38, 40, to secure the arm 50 to the upper and lower azimuth plates 38, 40. As can be seen in FIGS. 3 and 4, the flattened section 58 has raised edges 70 that sandwich a recess 72 within which the holes 60, 61 are located. It should also be understood that the bolt 62 may be replaced with another variety of pivotal attachment, such as a pin, post, rivet or the like.

[030] Referring now to **FIGS. 1 and 2**, two equipment face mounting brackets **80, 82** are mounted at the intersections or vertices between the vertical run **54** and the horizontal runs **52** of each arm **50**. Each of the equipment face mounting brackets **80, 82** includes a base panel **84** with mounting holes **86**. The equipment face mounting brackets **80, 82** are welded or otherwise fixed to the arms **50** so that the base panels **84** are substantially coplanar to facilitate mounting of equipment.

[031] Referring now to **FIG. 5**, a frame **100** for antenna mounting is shown mounted to the equipment face mounting brackets **80, 82**. The frame **100** includes two horizontal tubes **102** that are mounted to the equipment face mounting brackets **80, 82** via U-bolts **104** or the like. Notably, the horizontal tubes **102** are positioned at essentially the same elevation as the horizontal runs **52** of the arms **50**, which can reduce EPA. Vertical tubes **106** (in the illustrated embodiment four vertical tubes **106** are present) are mounted to the horizontal tubes **102** via U-bolts **108** inserted into holes in mounting brackets **110** fixed to the horizontal tubes **102**. The vertical tubes **106** then provide mounting locations for antennas.

[032] One of the advantages that can be provided by the mount described above is related to packaging and shipping. As can be seen in **FIG. 6**, a disassembled subassembly **200** of the mount **10** can be provided that includes the arms **50** with the equipment face mounting brackets **80, 82** welded thereto, the vertical post **34**, and the upper and lower azimuth plates **38, 40**. Each of the arms **50** is attached to the upper azimuth plate **38** with only the bolt **62** and to the lower azimuth plate **40** only with the bolt **62**. As such, the arms **50** can be pivoted relative to the upper and lower azimuth plates **38, 40** to a retracted position in which they are substantially parallel with each other, thereby forming a substantially level structure.

[033] In this configuration, the subassembly **200** forms a structure that can be easily vertically stacked, either to form a stack of subassemblies **200** themselves or, as can be seen in **FIGS. 7 and 8**, as an alternating series of layers with pallets **210** or other packaging layer to form an easily shipped package (in either instance, a stack of three mounts **10** would be typical to surround a position on an antenna tower). **FIG. 7** shows three subassemblies **200** stacked on pallets **210** with a box **220** of hardware contained within the package for shipping, and **FIG. 8** shows three subassemblies **200** stacked on three pallets **210** with unboxed hardware **230** contained within the package for shipping.

[034] The aforementioned configuration can also facilitate assembly of the mount **10**. When the subassembly is removed from its “parallel” state described above, the arms **50** can be pivoted relative to the upper and lower azimuth plates **38, 40** about the axis defined by the

bolts **62** until the holes **61** of the arms **50** align with holes **48** in the azimuth plates **38, 40**. Bolts **64** can then be inserted into the holes **61, 48** and secured with nuts. Thus, through only this simple process, the arms **50** can be pivoted to and fixed in an extended position at the desired angle of 120 degrees. Both the mounting/alignment of the arms **50** and the azimuth adjustment are achieved with the same components (namely, the lower and upper azimuth plates **38, 40**).

[035] Also, because the equipment face mounting brackets **80, 82** are already fixed relative to the arms **50**, once the arms **50** are pivoted and fixed in the extended position as described immediately above (and as shown in **FIGS. 1 and 2**), the equipment face mounting brackets **80, 82** are mechanically properly positioned to be coplanar with each other for mounting of the frame **100**.

[036] It should also be noted that the presence of the raised edges **70** and recess **72** in the flattened section **58** of the arms **50** can further facilitate assembly. The width of the recess **72** can be selected to approximate the width of the head of the bolt **64**, which may be a square head or hex head bolt. As such, insertion of the bolt **64** through the hole **61** positions the head of the bolt **64** within the recess **72**, where the raised edges **70** can prevent the bolt head from rotating. This inhibition of rotation of the bolt **64** renders securing of the bolt **64** with a nut much easier, as it can be achieved with a single wrench or similar tool.

[037] In addition, in some embodiments a label (such as an etched bar code or the like) is included on the mount **10** to enable the mount **10** to be tracked. Potentially pertinent information may include the source of materials, the manufacturing date, lot and site, the packaging and/or shipping date, instructions for assembly, and the like.

[038] Construction and installation of the mount **10** typically proceeds according to the following steps:

- (a) the arms **50** are unfolded from their parallel position to a position 120 degrees apart, and are secured with the bolts **64**;
- (b) the horizontal tubes **102** are secured to the equipment face mounting brackets with U-bolts **104**;
- (c) the vertical tubes **106** are secured to the horizontal tubes **102** with U-bolts **108** to form the frame **100**;
- (d) the front and rear pipe clamping jaws **14, 16** are mounted to a tower leg at the desired height;

(e) the mount **100** is raised to the proper height, and the lower side panels **20** are attached to the lower front pipe clamping jaw **16** via the bolt **24**;

(f) the upper side panels **20** are attached to the upper front pipe clamping jaw **16** via the bolt **32** positioned in the desired mounting hole **28** to set the desired tilt angle;

(g) the upper and lower azimuth plates **38, 40** are rotated relative to the lower and upper U-bolt brackets **22, 32** to orient the frame **100** as desired, and the adjustment bolts **44** are tightened; and

(h) the antenna (or other equipment) is raised and mounted on the frame **100**.

[039] Although the mount **10** is illustrated for mounting to a leg of a tower, those skilled in this art will appreciate that the mount **10** may also be mounted to other structures. For example, **FIG. 9** illustrates three mounts **10** attached to a monopole **200**. In such a configuration, the upper and lower azimuth plates **38, 40** of each mount are attached to respective brackets **202** of a ring mount **204** that is in turn attached to the monopole **200**. Other mounting structures may also be employed, in which case other hardware may be used to attach the mounts **10** thereto.

[040] The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are to be included within the scope of the following claims.

That Which is Claimed is:

1. A mount for an antenna, comprising:
first and second generally C-shaped arms, each with upper and lower free ends;
equipment face mounting brackets mounted on the first and second arms;
lower and upper plates mounted to a post;
wherein the upper free ends of the first and second arms are pivotally mounted to the upper plate, and wherein the lower free ends of the first and second arms are pivotally mounted to the lower plate, such that the first and second arms are movable between retracted and extended positions; and
wherein the first and second arms are fixed in the extended position relative to the upper plate via fasteners inserted through holes in the upper free ends of the arms and in the upper plate, and the first and second arms are fixed in the extended position relative to the lower plate via fasteners inserted through holes in the lower free ends of the arms and in the lower plate, the pivotal mounts and the holes defining a desired angle between the first and second arms in the extended position.
2. The mount defined in Claim 1, wherein the fasteners are threaded fasteners, and wherein the pivotal mounting of the first and second arms is achieved with threaded fasteners.
3. The mount defined in Claim 1, wherein the equipment face mounting brackets are substantially coplanar when the first and second arms are in the extended positions.
4. The mount defined in Claim 1, wherein the upper plate is an upper azimuth plate having an arcuate slot, and wherein a bracket is attached to the post, the bracket having an adjustment member received in the slot so that the mount can rotated about an axis defined by the post.
5. The mount defined in Claim 1, wherein at least one of the upper and lower free ends of the first and second arms has a flattened section with raised edges sandwiching a recess, and wherein the fasteners are threaded fasteners having a head that is prevented from rotating when inserted into the recess between the raised edges.

6. A tilt angle selection mechanism for an antenna mount, comprising:
 a lower bracket configured to attach to an antenna mount, the lower bracket including lower side panels;
 an upper bracket configured to attach to the antenna mount, the upper bracket including upper side panels, each of the upper side panels including a plurality of holes;
 upper and lower bases for mounting the antenna mount to an antenna tower;
 wherein the lower side panels are attached to the lower base at a pivotable joint;
 and

wherein the upper side panels are attached to the upper base via the insertion of a member through a selected one of the plurality of holes and into the upper base, the insertion of the member preventing pivotal movement of the lower bracket relative to the lower base.

7. The tilt angle selection mechanism defined in Claim 6, wherein the plurality of holes is regularly spaced.

8. The tilt angle selection mechanism defined in Claim 6, wherein the upper and lower brackets are attached to a post via U-bolts.

9. An azimuth adjustment mechanism for an antenna mount, comprising:
 upper and lower azimuth plates, each having an arcuate slot;
 arms attached to the upper and lower azimuth plates, the arms configured for mounting of a frame;
 a post in which the upper and lower azimuth plates are mounted, wherein the arcuate slots are configured with a radius of curvature that is substantially collinear with an axis defined by the post;
 upper and lower brackets attached to the post, each of the brackets having an adjustment member received in the slot of, respectively, the upper and lower azimuth plates so that the frame can rotated about the axis defined by the post.

10. The azimuth adjustment mechanism defined in Claim 9, wherein the adjustment members comprise threaded fasteners that can fix the upper and lower azimuth plates relative to the upper and lower brackets.

11. A package of antenna mounts, comprising:

(a) a plurality of antenna mounts, each of the antenna mounts comprising:

first and second generally C-shaped arms, each with upper and lower free ends;

equipment face mounting brackets mounted on the first and second arms;

lower and upper plates mounted to a post;

wherein the upper free ends of the first and second arms are pivotally mounted to the upper plate, and wherein the lower free ends of the first and second arms are pivotally mounted to the lower plate, such that the first and second arms are movable between retracted and extended positions;

wherein in the retracted position, the first and second arms are pivoted to be generally parallel with each other;

wherein the antenna mounts are disposed in vertically stacked relationship;

and

(b) a shipping pallet underlying the stacked antenna mounts.

12. The package defined in Claim 11, wherein the stacked antenna mounts are separated from each other by packaging layers.

13. The package defined in Claim 11, wherein the first and second arms are may be fixed in the extended position relative to the upper plate via fasteners inserted through holes in the upper free ends of the arms and in the upper plate, and the first and second arms may fixed in the extended position relative to the lower plate via fasteners inserted through holes in the lower free ends of the arms and in the lower plate, the pivotal mounts and the holes defining a desired angle between the first and second arms in the extended position.

14. A method of constructing an antenna mount, comprising:


(a) providing an antenna mount as defined in Claim 1;


(b) pivoting the first and second arms to the extended position;

(c) securing the first and second arms in the extended position;

(d) securing horizontal tubes to the equipment face mounting brackets; and

(e) securing vertical tubes to the horizontal tubes.

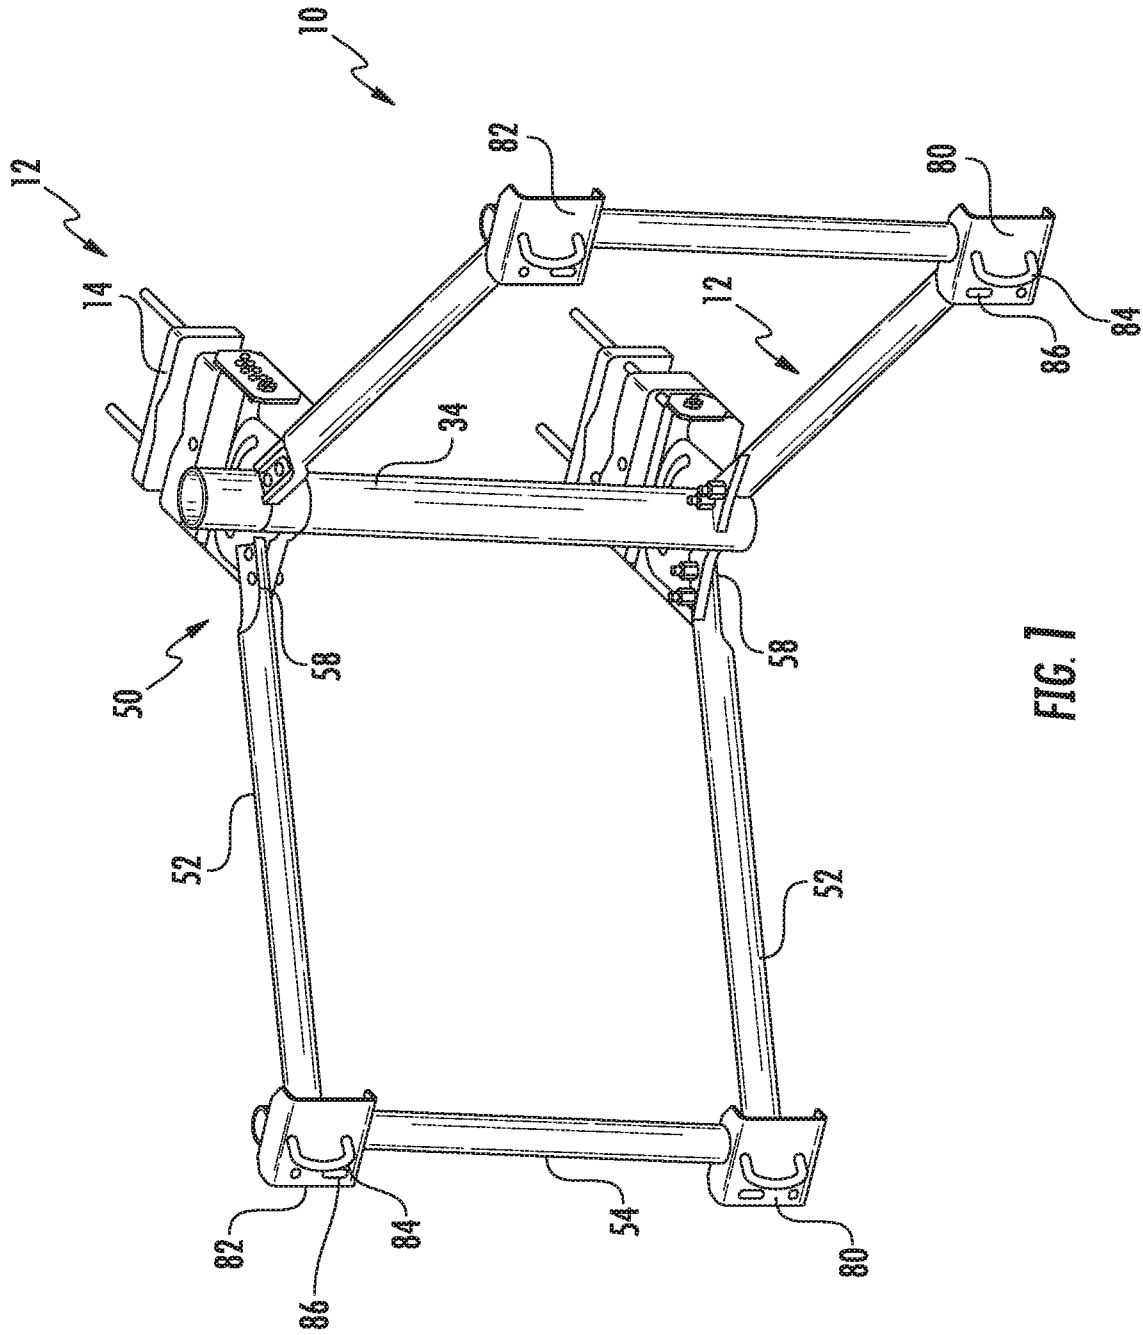

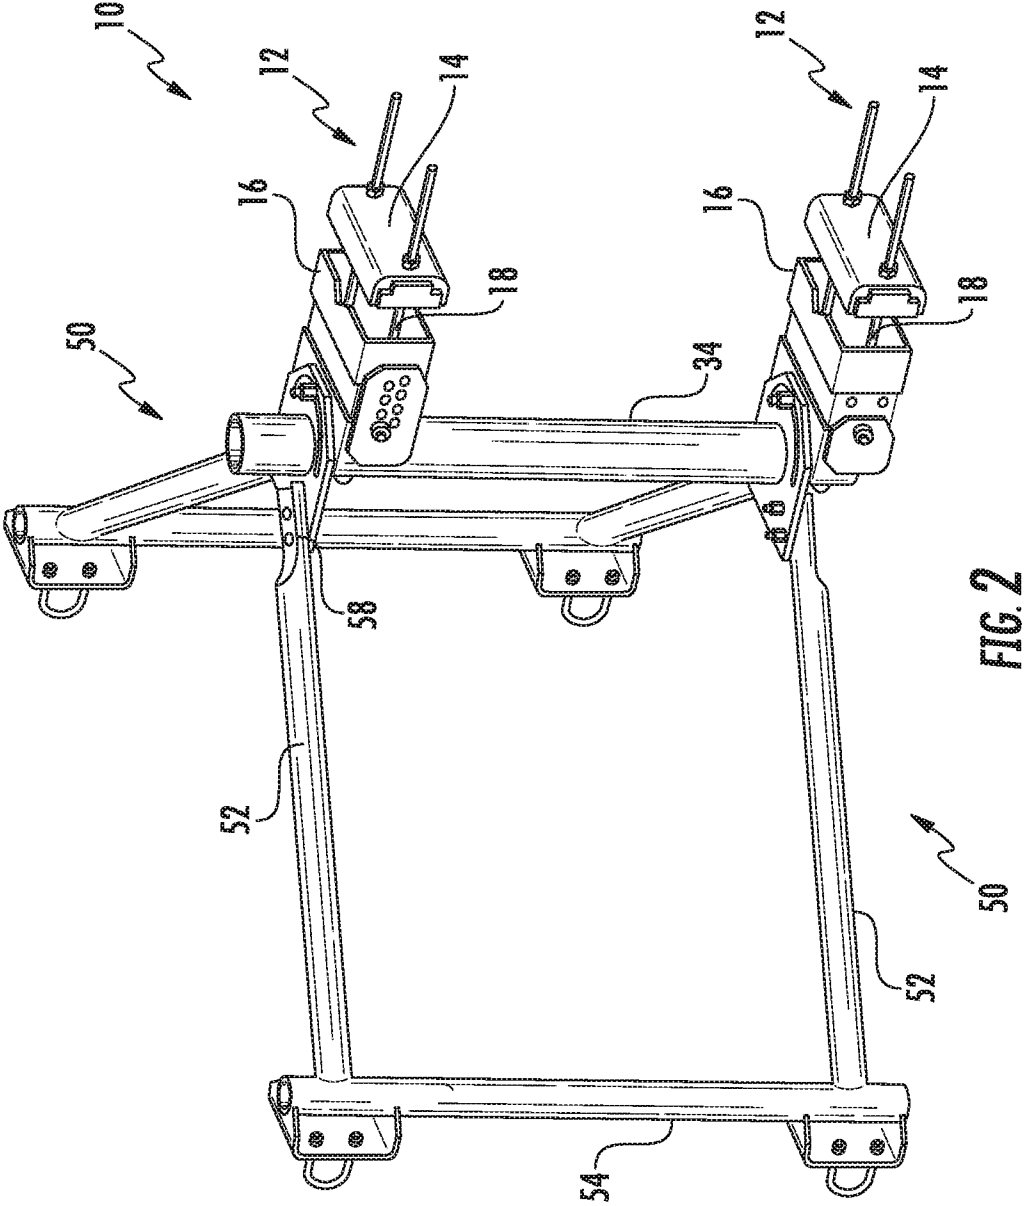

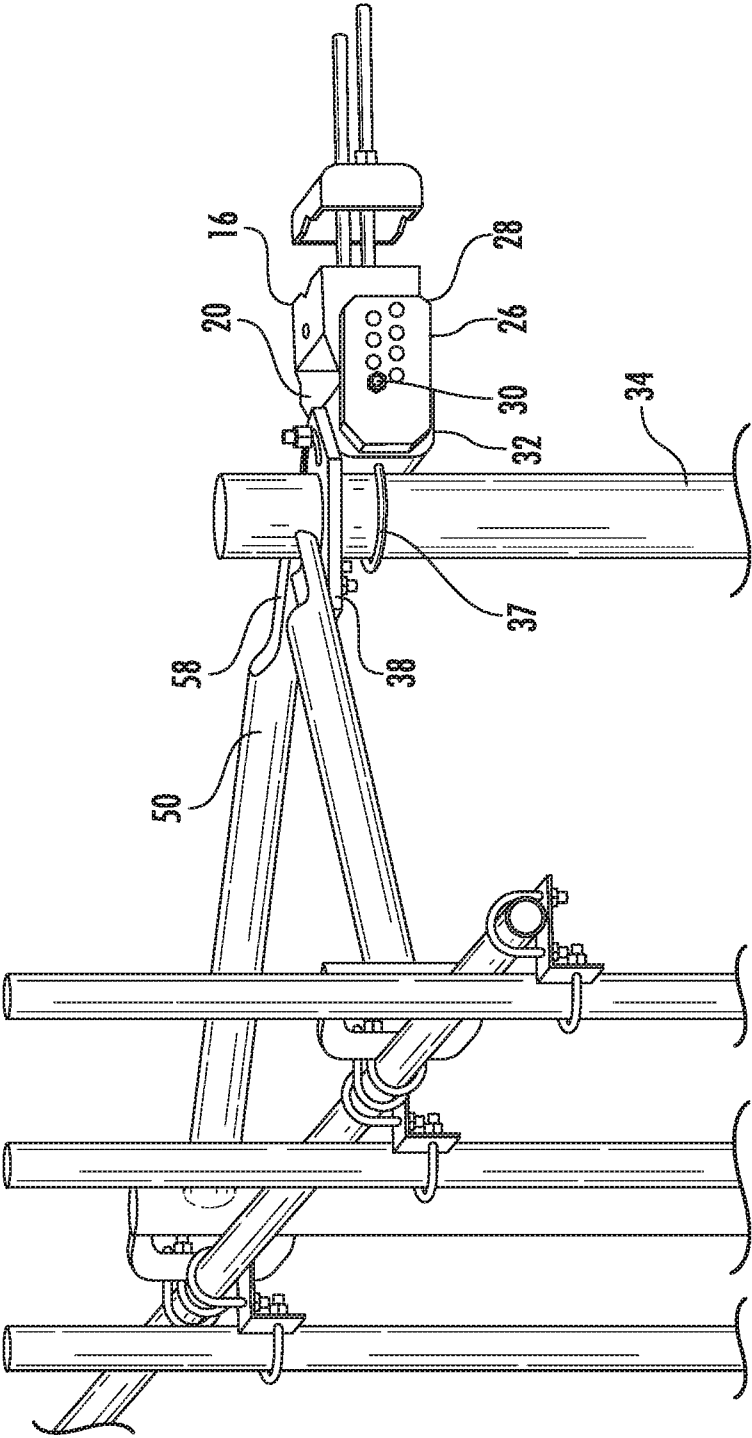


FIG. 3

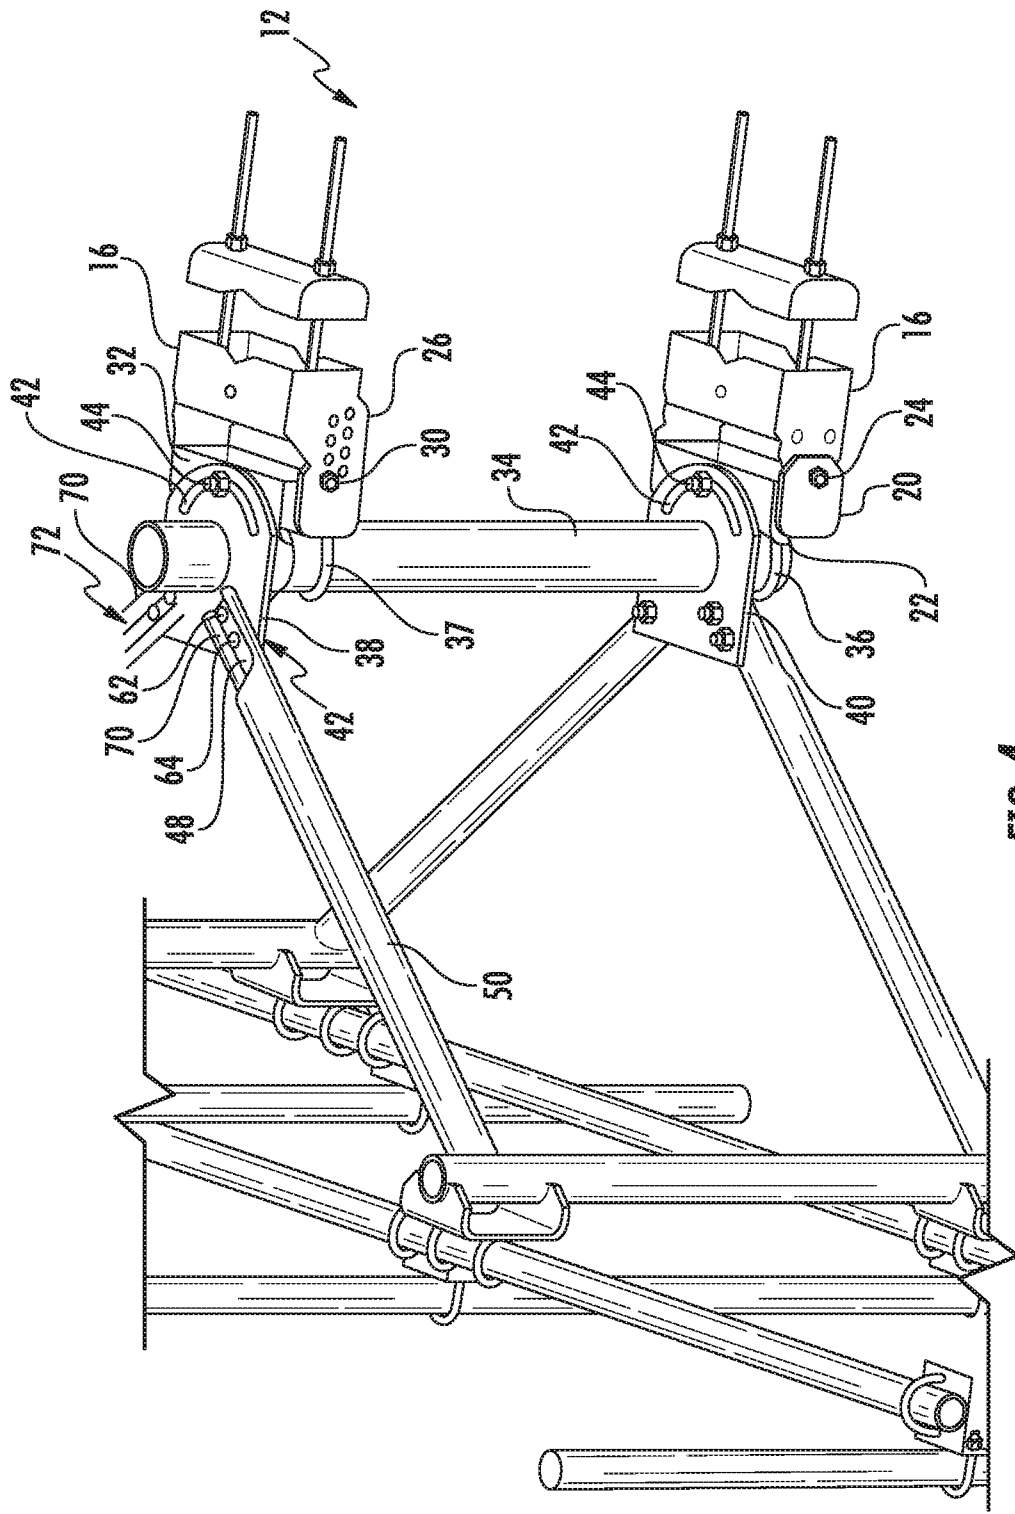


FIG. 4

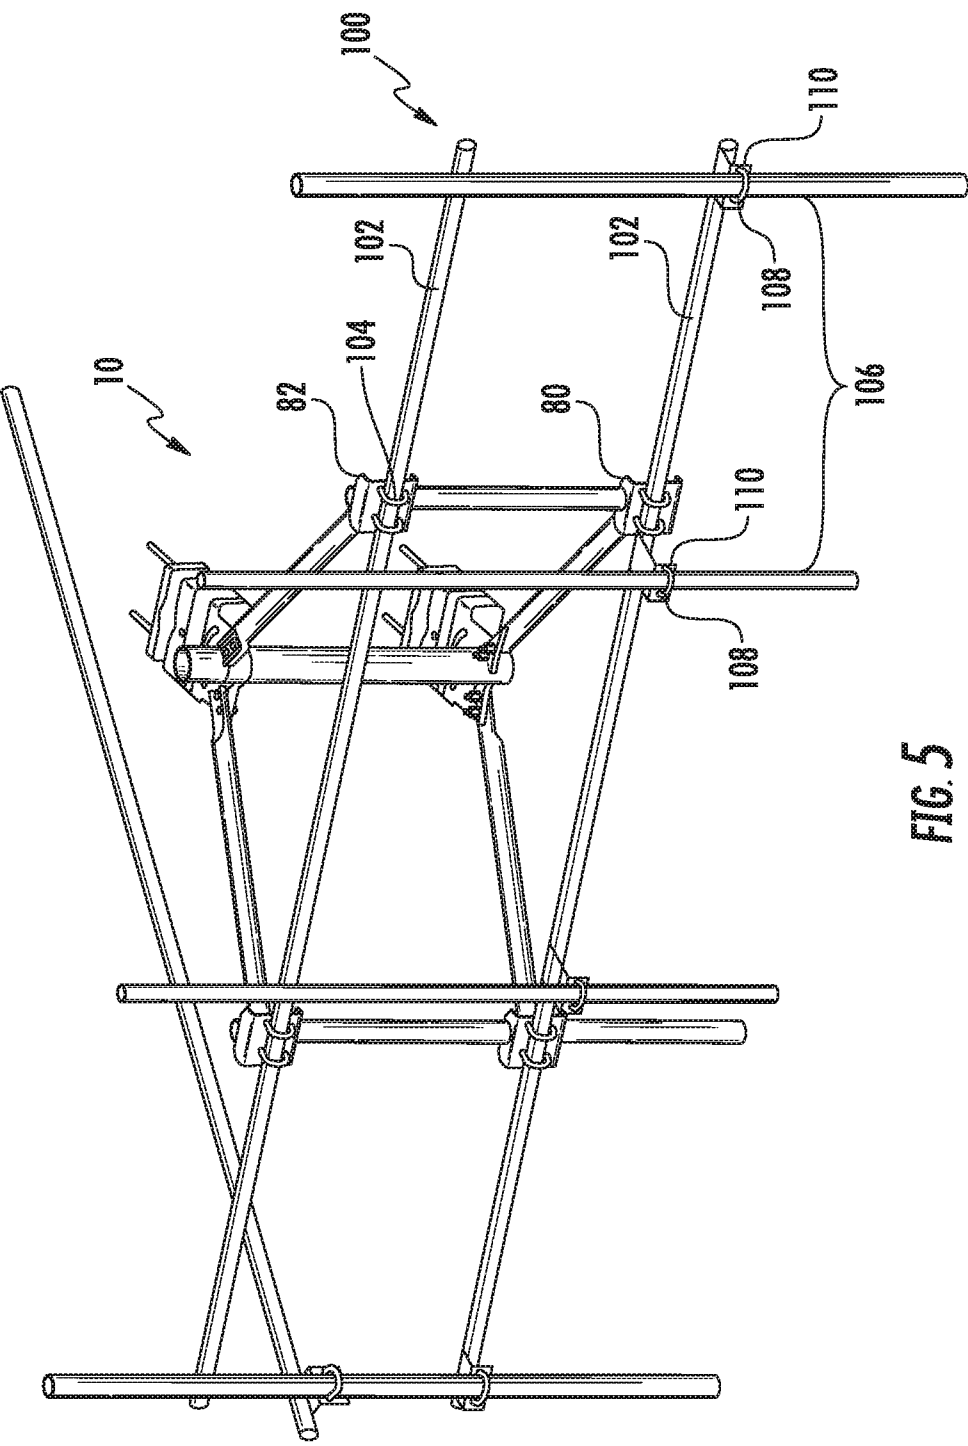


FIG. 5




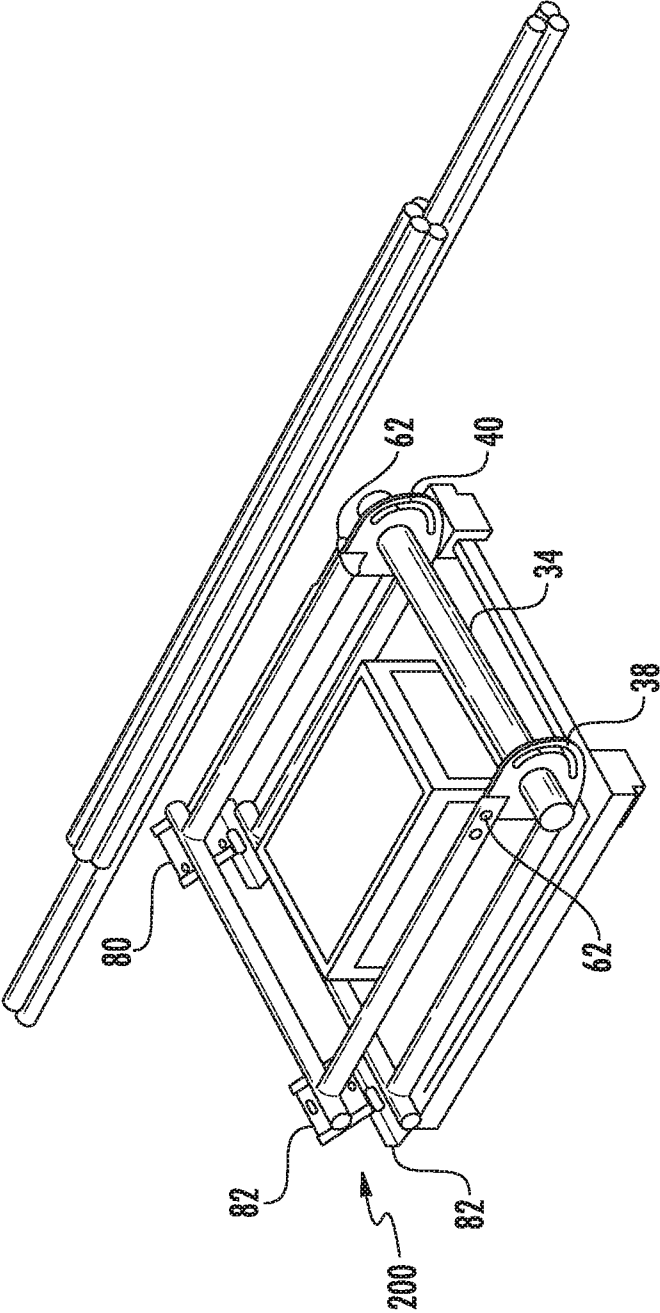


FIG. 6

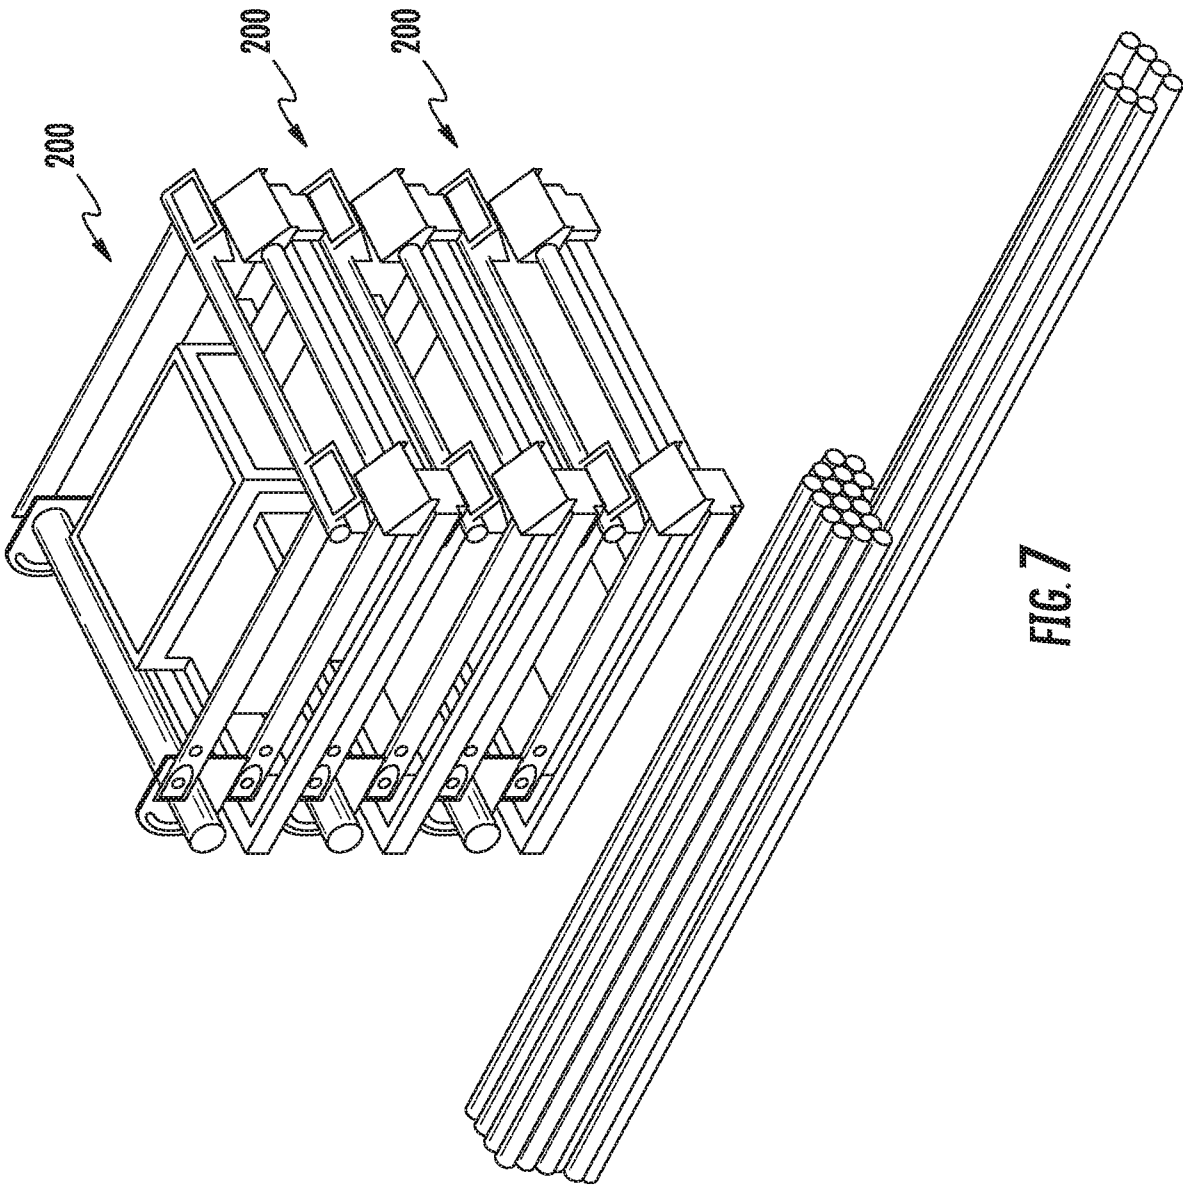

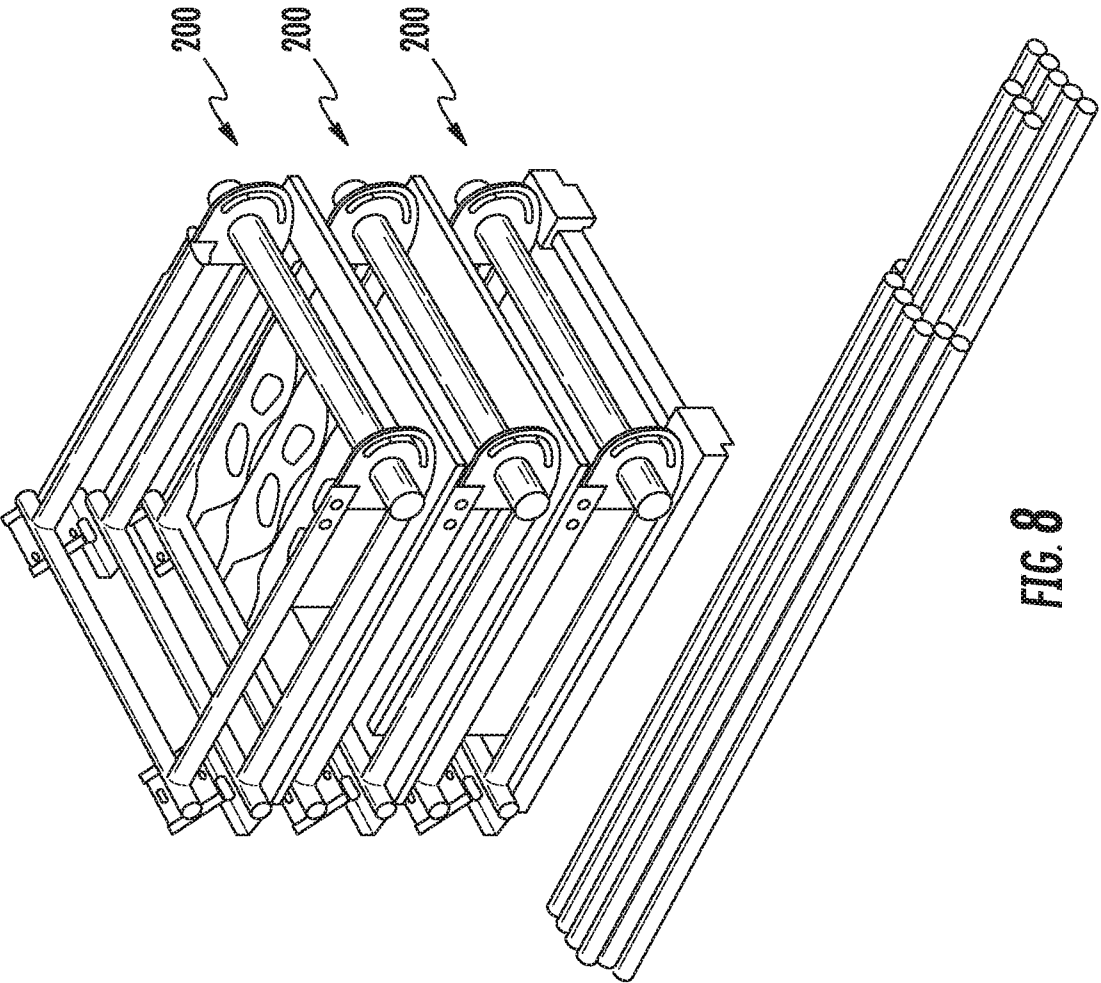

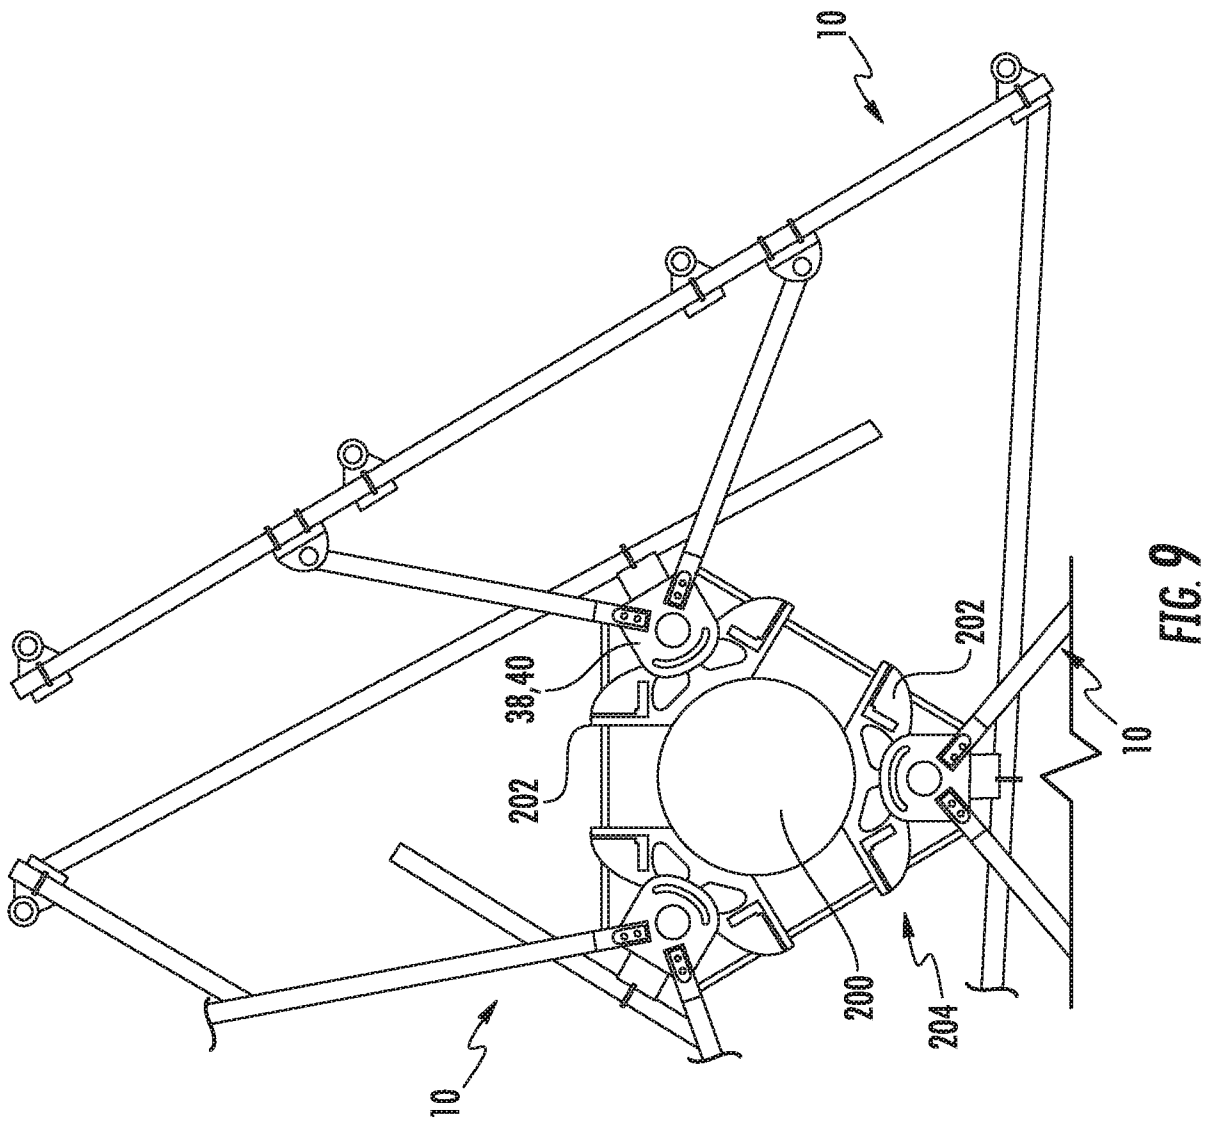

A. CLASSIFICATION OF SUBJECT MATTER**H01Q 1/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01Q 1/12; H01Q 1/08; H01Q 19/12; H01Q 7/02; A47K 1/00; B23P 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: antenna, mount, bracket, plate, panel

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007-0205957 A1 (BRANDON M. CHAPMAN) 06 September 2007 See abstract and claims 1-7.	1-14
A	US 7113145 B1 (MYRON C. NOBLE) 26 September 2006 See claims 1-3 and figures 1-4.	1-14
A	US 2011-0095956 A1 (TIMOTHY JOHN CONRAD) 28 April 2011 See paragraphs [0030]-[0032] and figure 2.	1-14
A	US 2008-0048928 A1 (SEAN MICHAELIS) 28 February 2008 See claims 1,8,15.	1-14
A	US 2013-0221182 A1 (IAN THOMAS RENILSON et al.) 29 August 2013 See abstract and claims 1-7.	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 July 2016 (26.07.2016)

Date of mailing of the international search report

27 July 2016 (27.07.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

Jang, Gijeong

Telephone No. +82-42-481-8364



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/029290

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0205957 A1	06/09/2007	US 7466286 B2	16/12/2008
US 7113145 B1	26/09/2006	None	
US 2011-0095956 A1	28/04/2011	US 8319697 B2	27/11/2012
US 2008-0048928 A1	28/02/2008	CL 2007002429 A1	24/03/2008
		US 2010-0177010 A1	15/07/2010
		US 7683853 B2	23/03/2010
US 2013-0221182 A1	29/08/2013	CN 104126250 A	29/10/2014
		CN 104126250 B	25/05/2016
		EP 2817851 A1	31/12/2014
		EP 2817851 A4	21/10/2015
		IN 6569DEN2014 A	22/05/2015
		US 8866695 B2	21/10/2014
		WO 2013-126108 A1	29/08/2013