

EUROPEAN PATENT SPECIFICATION

- ④⑤ Date of publication of patent specification: **25.04.90** ⑤① Int. Cl.⁵: **C 10 L 1/14**
②① Application number: **85304230.7**
②② Date of filing: **13.06.85**

⑤④ **Corrosion inhibitors for alcohol-based fuels.**

③① Priority: **13.06.84 US 619977**
18.06.84 US 621777

④③ Date of publication of application:
27.12.85 Bulletin 85/52

④⑤ Publication of the grant of the patent:
25.04.90 Bulletin 90/17

④④ Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

⑤⑥ References cited:
US-A-2 907 646
US-A-2 993 772
US-A-3 036 902
US-A-3 098 727
US-A-3 582 295
US-A-4 185 594
US-A-4 305 730
US-A-4 431 430
US-A-4 448 586

⑦③ Proprietor: **ETHYL CORPORATION**
Ethyl Tower 451 Florida Boulevard
Baton Rouge Louisiana 70801 (US)

⑦② Inventor: **Knapp, Gordon Grayson**
433 Kimmeridge Drive
Baton Rouge Louisiana 70815 (US)

⑦④ Representative: **Bizley, Richard Edward et al**
BOULT, WADE & TENNANT 27 Furnival Street
London EC4A 1PQ (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

EP 0 165 776 B1

Description

In the past, metal corrosion caused by conventional motor fuels such as gasoline was not much of a problem because such hydrocarbon fuels are inherently non-corrosive. However, with the advent of fuels containing alcohols such as gasohol or straight alcohol fuels, corrosion has become a major problem because such fuels are corrosive. It has been reported that this corrosion is due to the presence of acidic contaminants in such fuels such as formic acid. It is almost impossible to avoid such contaminants because they occur in fuel grade alcohols and are also formed in storage as normal alcohol oxidation products.

It is known from U.S. 4,305,730 that polymerized linoleic acid, especially trimer, is an effective corrosion inhibitor for alcohol-type motor fuels. It has now been discovered that the corrosion inhibiting properties of such polymerized polyunsaturated aliphatic monocarboxylic acids are improved by use of the co-additives described herein. The substituted imidazoline co-additives of the invention, more fully described hereafter, also are known compounds which heretofore have found use, for example, in motor fuel compositions to prevent carburetor icing as disclosed in U.S. 3,036,902.

It is also known from U.S. 2,993,772 that alkenyl succinic acids as well as their anhydrides inhibit and/or prevent the deposit-forming tendency of hydrocarbon fuels during combustion and/or modify the deleterious effect of the formed deposits in both leaded and unleaded fuels particularly in gasoline and jet fuels. It has now also been discovered that a combination of certain substituted imidazolines with a monoalkenylsuccinic acid wherein the alkenyl group contains 8 to 30 carbon atoms provides corrosion inhibiting properties to fuels containing alcohols such as gasohol or straight alcohol fuels.

According to the present invention, metal corrosion caused by alcohol-type motor fuels is inhibited by adding to the fuel a combination of (A) a member selected from (i) polymerized polyunsaturated aliphatic monocarboxylic acid or (ii) an alkenylsuccinic acid or its equivalent anhydride having effective solubility in said fuel, preferably at least one monoalkenylsuccinic acid wherein the alkenyl group contains 8 to 30 carbon atoms and (B) substituted imidazoline.

The invention provides a liquid fuel adapted for use in an internal combustion engine, said fuel comprising from 5 to 100 weight percent of one or more alcohols, from 0 to 95 weight percent gasoline and as a corrosion inhibitor the combination of (A) a member selected from (i) a polymer of one or more C₁₆ to C₁₈ polyunsaturated aliphatic monocarboxylic acids, (ii) an alkenylsuccinic acid or its equivalent anhydride having effective solubility in said fuel, preferably at least one monoalkenylsuccinic acid wherein the alkenyl group contains 8 to 30 carbon atoms and (B) a substituted imidazole.

The additive combination of this invention can be beneficial in any engine fuel containing or consisting of an oxygenate. Such fuels include gasoline-alcohol mixtures referred to as "gasohol" as well as straight alcohol fuels. Useful alcohols are methanol, ethanol, *n*-propanol, isopropanol, 1-butanol, 2-butanol, *t*-butanol, 2-methyl-2-propanol, isobutanol or mixtures thereof such as methanol and *t*-butanol. Gasohols usually contain 2 to 30 volume percent alcohol. At concentrations above 10 volume percent phase separation problems may be encountered especially in the presence of water.

Phase separation can be minimized by including co-solvents in the gasohol such as ethers, ketones or esters, for example. An especially useful co-solvent is methyl *tert*-butyl ether which also serves to increase octane value.

The additive combination is used in a corrosion inhibiting amount. A useful range of additive concentration is 2.8 to 1400 mg/litre [1 to 5000 pounds per thousand barrels (ptb)]. A more preferred range is 14 to 5600 mg/litre (5 to 2000 ptb) and the most preferred concentration is 14 to 1400 mg/litre (5 to 500 ptb).

Component A (i) is a polymer of one or more 16 to 18 carbon polyunsaturated aliphatic monocarboxylic acids. Examples of these are tall oil fatty acid, oleic acid, linoleic acid and linolenic acid including mixtures thereof. The polymers comprise mainly dimers and trimers of the polyunsaturated acids. Suitable polymers of linoleic acid are available commercially. Mixtures high in trimer content are most preferred.


The monoalkenylsuccinic acids (Component Aii) are well known in the art. These acids may be readily prepared by the condensation of an olefin with maleic anhydride followed by hydrolysis (see U.S. Pat. No. 2,133,734 and U.S. Pat. No. 2,741,597). Suitable monoalkenylsuccinic acids include octenylsuccinic acid, decenylsuccinic acid, undecenylsuccinic acid, dodecenylsuccinic acid, pentadecenylsuccinic acid, octadecenylsuccinic acid and isomers thereof having alkenyl groups of various hydrocarbon structures. The preferred monoalkenylsuccinic acid is dodecenylsuccinic acid, more preferably, dodecenylsuccinic acid prepared from propylene tetramer.

While an alkenyl group ranging from 8 to 30 carbon atoms is preferred as indicated above, it is contemplated that substantially any alkenylsuccinic acid or its equivalent anhydride may be employed in the fuels of the present invention provided it is sufficiently soluble in the fuel to be effective in combination with the substituted imidazoline compounds of the invention as a corrosion inhibitor. Further, since relatively pure olefins are difficult to obtain and are often too expensive for commercial use, alkenylsuccinic acids prepared as mixtures by reacting mixed olefins with maleic anhydride may be employed in this invention as well as relatively pure alkenyl succinic acids. Mixed alkenylsuccinic acids wherein the alkenyl group averages 6—8, 8—10 and 10—12 carbon atoms are commercially available.

Component B of the combination is a substituted imidazoline.


EP 0 165 776 B1

The substituted imidazoline used in this invention can be represented by the following general formula (I):

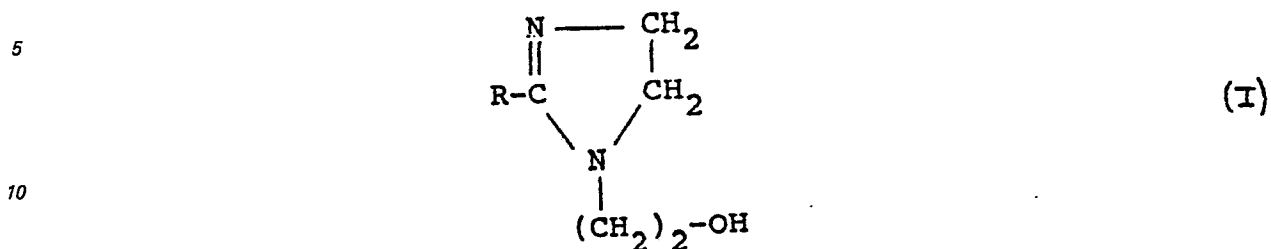

in which R is a hydrocarbon alkenyl group having from 7 to 24 carbon atoms.

15 The imidazolines having Formula I which are useful in this invention may be readily obtained by reacting suitable organic acids with N-(2-hydroxyethyl)ethylene diamine. This reaction involves the elimination of 2 molecules of water between the acid and the amine. This reaction is represented by the following equation:

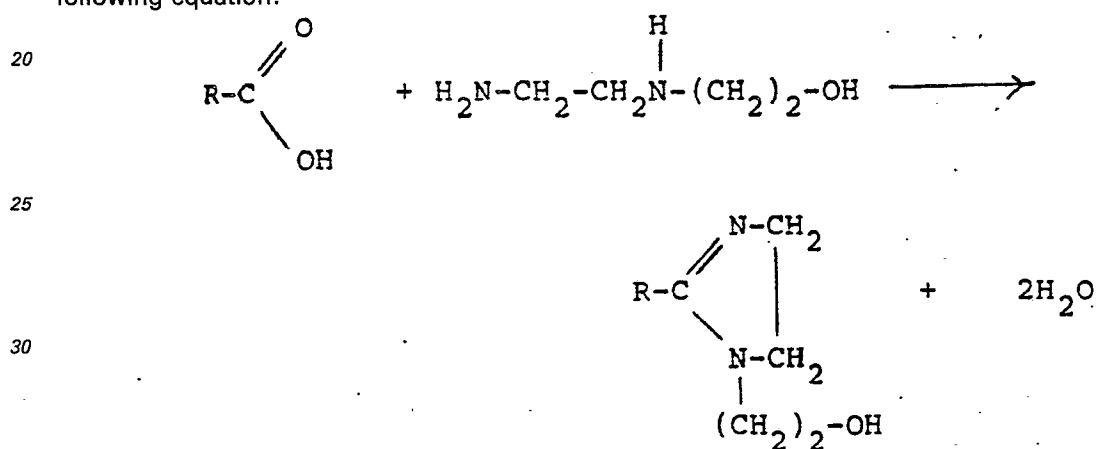

35 In addition to the imidazoline, small amounts of a corresponding linear amino amide are also obtained. This amino amide is the result of eliminating only one molecule of water between the acid and the amine. Methods of preparing the imidazolines are well known. Useful procedures are described in Wilson, U.S. 2,267,965, and Wilkes, U.S. 2,214,152. As can be seen from the reaction equation given above, the R group in the imidazoline is the alkenyl residue of the particular acid which is used in its preparation. In other words, the R group will have one carbon atom less than the acid which is used to prepare the imidazoline.

40 Acids which are useful in preparing the imidazolines are hydrocarbon mono-carboxylic acids having up to about 20 carbon atoms. The preferred acids are unsaturated organic acids such as 9,10 decylenic acid, octenoic acid, oleic acid, linoleic acid and the like. Preferred acids are commonly obtained as hydrolysis products of natural materials. These acids thus obtained are mixtures. For example, acids obtained from olive oil, typically, are a mixture of about 83 percent oleic acid, 6 percent palmitic acid, 4 percent stearic acid and 7 percent linoleic acid. This mixture is quite useful for preparing imidazolines to be used in this invention. Organic acid mixtures obtained on saponifying and acidulating babassu oil, castor oil, peanut oil or palm oil are examples of useful acids. Several imidazoline compounds which can be used in the present invention are available commercially. A preferred imidazoline is 2-heptadecenyl-1-(2-hydroxyethyl)-imidazoline.

50 The weight ratio of component A to component B in the combination can vary over a wide range, typically 1 to 10 parts A to 1 to 10 parts B. In a preferred embodiment, the weight ratio is about 0.5—5 parts component A for each part component B. In a more preferred embodiment there are 0.6—4.0 parts component A per each part component B. The most preferred ratio is 1:1.

55 Components A and B can be separately added to the fuel. More preferably components A and B are pre-mixed to form a package and this package is added to the fuel in an amount sufficient to provide the required degrees of corrosion protection.

60 Most preferably components A and B are also pre-mixed with a solvent to make handling and blending easier. Suitable solvents include alcohols (e.g., methanol, ethanol, isopropanol), ketones (acetone, methyl ethyl ketone), esters (*tert*-butyl acetate) and ethers (e.g., methyl *tert*-butyl ether).

Aromatic hydrocarbons are very useful solvents. These include benzene, toluene, xylene and the like. Excellent results can be obtained using xylene.

65 The concentration of the active components A and B in the package can vary widely. For example, the active content can range from 5 weight percent up to the solubility limit of A or B in the solvent. With xylene, a total active content of 5—60 weight percent is generally used, especially about 50 weight percent.

EP 0 165 776 B1

Tests were conducted to measure the anticorrosion properties of the additive combination. In the tests, the corrosion of steel cylinder rods (1/8 in. × 3 in.) (0.3175 cm × 7.62 cm) semisubmersed in test fluid was measured under different test conditions. The rods were first cleaned with carborundum 180, polished with crocus cloth, washed with acetone and then dried at room temperature.

5 Each rod was weighed and then semisubmersed in 10 milliliters of the test fluid in a sealed bottle for the specified time at the specified temperature.

At the end of the test period, the rods were removed from the fuel, and after loose deposits were removed with a light brush, the rods were washed and dried as at the start of the test and then reweighed. Any change in rod weight was recorded. Loss of weight indicated corrosion.

10 A series of three tests were carried out lasting 7 days, 14 days and 30 days, respectively. The series of tests were conducted in fuels comprising 5 volume percent methanol and 5 volume percent *t*-butanol in gasoline (indolene) containing 0.5 weight percent of 5.0 percent acetic acid in water. The tests were conducted at 25°C.

15 The test additives added to the test fuels were equal weight mixtures [280 mg/litre (100 ptb)] of either (i) predominantly oleic acid dimer or predominantly oleic acid trimer or (ii) dodecenylsuccinic acid prepared from dodecene or propylene tetramer in combination with 2-heptadecenyl-1-(2-hydroxyethyl)imidazoline and 140 mg/litre (50 ptb) of each individual component.

The results of these tests which are set out in the table below demonstrate the excellent anticorrosion properties of a fuel containing an additive combination of the invention.

20 TABLE

7-DAY TESTS

25	Additives	Weight Reduction (mg.)
	none	7.5
30	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline	5.6
	oleic acid dimer	1.7
	oleic acid trimer	1.8
35	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + oleic acid dimer	1.1
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + oleic acid trimer	0.5
40	dodecenylsuccinic acid from dodecene	5.7
	dodecenylsuccinic acid from propylene tetramer	3.8
45	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + dodecenylsuccinic acid from dodecene	0.1
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + dodecenylsuccinic acid from propylene tetramer	0.1

50

55

60

65

EP 0 165 776 B1

14-DAY TESTS

	Additives	Weight Reduction (mg.)
5	none	10.3
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline	5.7
	oleic acid dimer	3.7
10	oleic acid trimer	4.7
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + oleic acid dimer	0.4
15	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + oleic acid trimer	0.1
	dodecenylsuccinic acid from dodecene	10.5
20	dodecenylsuccinic acid from propylene tetramer	8.9
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + dodecenylsuccinic acid from dodecene	0.4
25	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + dodecenylsuccinic acid from propylene tetramer	0.2

30-DAY TESTS

	Additives	Weight Reduction (mg.)
30	none	12.1
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline	4.4
	oleic acid dimer	6.5
35	oleic acid trimer	9.3
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + oleic acid dimer	1.1
40	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + oleic acid trimer	0.2
	dodecenylsuccinic acid from dodecene	15.1
45	dodecenylsuccinic acid from propylene tetramer	15.1
	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + dodecenylsuccinic acid from dodecene	0.9
50	2-heptadecenyl-1-(2-hydroxyethyl)imidazoline + dodecenylsuccinic acid from propylene tetramer	0.9


Claims

60

1. A liquid fuel adapted for use in an internal combustion engine, said fuel comprising 5 to 100 weight percent of one or more alcohols, 0 to 95 weight percent gasoline and, as a corrosion inhibitor, a combination of (A) a member selected from (i) a polymer of one or more C₁₆ to C₁₈ polyunsaturated aliphatic monocarboxylic acids or (ii) an alkenylsuccinic acid or its equivalent anhydride having effective
65 solubility in said fuel, preferably at least one monoalkenylsuccinic acid in which the alkenyl group contains

EP 0 165 776 B1

8 to 30 carbon atoms, and (B) at least one substituted imidazoline having the structural formula:

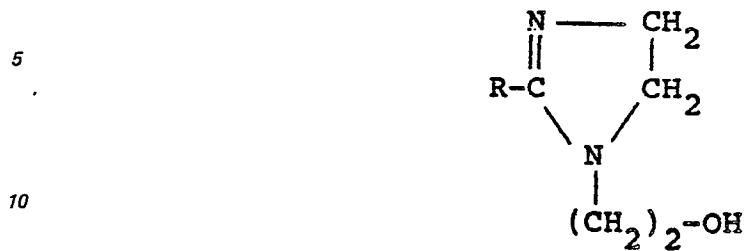

wherein R represents a hydrocarbon alkenyl group having from 7 to 24 carbon atoms.

15 2. A liquid fuel as claimed in claim 1 wherein said polymer of one or more C₁₆ to C₁₈ polyunsaturated aliphatic monocarboxylic acids comprises linoleic acid dimer, trimer or a mixture thereof.

3. A liquid fuel as claimed in either claim 1 or claim 2 wherein said monoalkenylsuccinic acid is dodecenylsuccinic acid.


20 4. A liquid fuel as claimed in any one of claims 1 to 3 wherein said substituted imidazoline is 2-heptadecenyl-1-(2-hydroxy-ethyl)imidazoline.

5. A liquid fuel as claimed in any one of claims 1 to 4 wherein the weight ratio of component A to component B in the combination is from 1:10 to 10:1, preferably 1:1.

25 6. A liquid fuel as claimed in any one of claims 1 to 5 wherein the corrosion inhibitor is present at an amount ranging from 2.8 to 14000 mg/litre (1 to 5000 pounds per thousand barrels), preferably 14 to 1400 mg/litre (5 to 500 pounds per thousand barrels).

7. A liquid fuel as claimed in any one of claims 1 to 6 wherein said fuel comprises a major amount of a hydrocarbon distillate in the gasoline distillation range and from 2 to 30 volume percent of one or more alkanols containing from 1 to 4 carbon atoms.

30 8. The use, as a corrosion inhibitor concentrate for fuels comprising 5 to 100 weight percent of one or more alcohols and 0 to 95 weight percent gasoline, of a solvent containing 5 to 60 weight percent of a combination of (A) a polymer of one or more C₁₆ to C₁₈ polyunsaturated aliphatic monocarboxylic acids and (B) at least one substituted imidazoline having the structural formula:

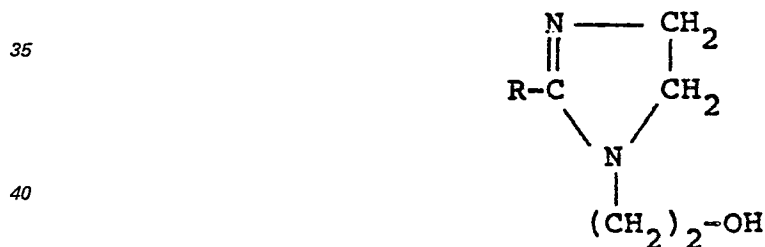

45 in which R is a hydrocarbon alkenyl group having from 7 to 24 carbon atoms.

9. A method of preparing a liquid fuel comprising blending a fuel comprising 5 to 100 weight percent of one or more alcohols and 0 to 95 weight percent gasoline with, as a corrosion inhibitor, a combination as defined in any one of claims 1 to 5, the components of said combination being either premixed or added separately.


50 10. A method as claimed in claim 9 wherein the corrosion inhibitor is present at an amount ranging from 2.8 to 14000 mg/litre (1 to 5000 pounds per thousand barrels), preferably 14 to 1400 mg/litre (5 to 500 pounds per thousand barrels), of a fuel as defined in claim 7.

55 Patentansprüche

1. Zur Verwendung in einem Verbrennungsmotor angepaßter flüssiger Kraftstoff, enthaltend 5 bis 100 Gew.% eines oder mehrerer Alkohole, 0 bis 95 Gew.% Benzin und als Korrosionsinhibitor eine Kombination von (A) einer Verbindung, ausgewählt aus (i) einem Polymer von einer oder mehreren C₁₆ bis
60 C₁₈ polyungesättigter aliphatischer Monocarbonsäure(n) oder (ii) einer Alkenylbernsteinsäure oder ihrem äquivalenten Anhydrid mit wirksamer Löslichkeit im Kraftstoff, vorzugsweise mindestens eine

EP 0 165 776 B1

Monoalkenylbernsteinsäure, in der die Alkenylgruppe 8 bis 30 Kohlenstoffatome enthält und (B) mindestens ein substituiertes Imidazolin mit der folgenden Strukturformel:

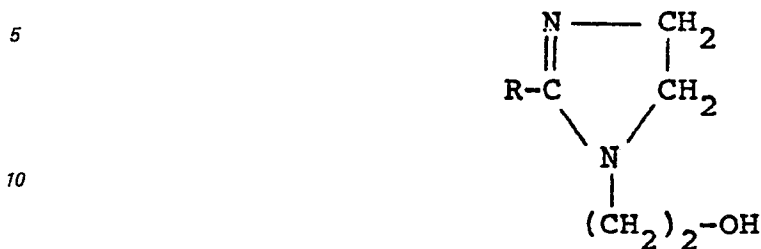

15 in der R eine Kohlenwasserstoffalkenylgruppe mit 7 bis 24 Kohlenstoffatomen bedeutet.

2. Flüssiger Kraftstoff nach Anspruch 1, in dem das Polymer von einer oder mehreren C₁₆ bis C₁₈ polyungesättigten aliphatischen Monocarbonsäure(n) Linolsäuredimer, -trimer oder deren Mischung enthält.

20 3. Flüssiger Kraftstoff nach Anspruch 1 oder 2, in dem die Monoalkenylbernsteinsäure Dodecenylnbernsteinsäure ist.


4. Flüssiger Kraftstoff nach einem der Ansprüche 1 bis 3, in dem das substituierte Imidazolin 2-Heptadecenyl-1-(2-hydroxy-ethyl)imidazolin ist.

25 5. Flüssiger Kraftstoff nach einem der Ansprüche 1 bis 4, in dem das Gewichtsverhältnis der Komponente A zur Komponente B in der Kombination 1:10 bis 10:1, vorzugsweise 1:1, beträgt.

6. Flüssiger Kraftstoff nach einem der Ansprüche 1 bis 5, in dem der Korrosionsinhibitor in einer Menge im Bereich von 2,8 bis 14000 mg/l (1 bis 5000 Pfund pro 1000 Barrel), vorzugsweise 14 bis 1400 mg/l (5 bis 500 Pfund pro 1000 Barrel), vorhanden ist.

30 7. Flüssiger Kraftstoff nach einem der Ansprüche 1 bis 6, in dem der Kraftstoff eine wesentliche Menge eines Kohlenwasserstoffdestillats im Benzindestillationsbereich und 2 bis 30 Vol.% eines oder mehrerer Alkohole, die 1 bis 4 Kohlenstoffatome enthalten, enthält.

8. Verwendung eines Lösungsmittels, enthaltend 5 bis 60 Gew.% einer Kombination von (A) einem Polymer einer oder mehrerer C₁₆ bis C₁₈ polyungesättigter aliphatischer Monocarbonsäure(n) und (B) mindestens ein substituiertes Imidazolin mit der folgenden Strukturformel:

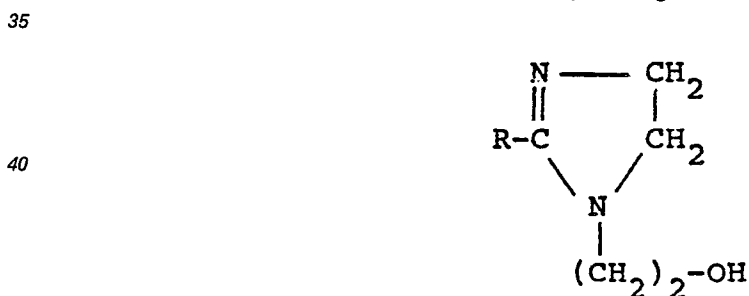

in der R eine Kohlenwasserstoffalkenylgruppe mit 7 bis 24 Kohlenstoffatomen bedeutet, als Korrosionsinhibitorkonzentrat für Kraftstoffe, enthaltend 5 bis 100 Gew.% eines oder mehrerer Alkohole und 0 bis 95 Gew.% Benzin.

50 9. Verfahren zur Herstellung eines flüssigen Kraftstoffs, bei dem man einen Kraftstoff, der 5 bis 100 Gew.% eines oder mehrerer Alkohole und 0 bis 95 Gew.% Benzin enthält mit, als Korrosionsinhibitor, einer Kombination, wie in einem der Ansprüche 1 bis 5 beansprucht, wobei die Komponenten der Kombination entweder vorgemischt sind oder separat zugegeben werden, vermischt.

55 10. Verfahren nach Anspruch 9, bei dem der Korrosionsinhibitor in einer Menge im Bereich von 2,8 bis 14000 mg/l (1 bis 5000 Pfund pro 1000 Barrel), vorzugsweise 14 bis 1400 mg/l (5 bis 500 Pfund pro 1000 Barrel), eines Kraftstoffs, wie in Anspruch 7 definiert, vorhanden ist.

Revendications


60 1. Carburant liquide adapté à l'utilisation dans un moteur à combustion interne, ledit carburant comprenant 5 à 100% en poids d'un ou plusieurs alcools, 0 à 95% en poids d'essence et, comme inhibiteur de corrosion, un mélange (A) d'un constituant choisi entre (i) un polymère d'un ou plusieurs acides monocarboxyliques aliphatiques poly-insaturés en C₁₆ à C₁₈ et (ii) un acide alcénylsuccinique ou son anhydride équivalent présentant une solubilité effective dans ledit carburant, de préférence au moins un

65

EP 0 165 776 B1

acide monoalcénylsuccinique dans lequel le group alcényle contient 8 à 30 atomes de carbone, et (B) d'au moins une imidazoline substituée répondant à la formule structurale:

5



dans laquelle R représente un groupe hydrocarboné alcényle ayant 7 à 24 atomes de carbone.

15 2. Carburant liquide suivant la revendication 1, dans lequel le polymère d'un ou plusieurs acides monocarboxyliques aliphatiques polyinsaturés en C₁₆ à C₁₈ consiste en un dimère ou trimère d'acide linoléique, ou bien en un de leurs mélanges.

3. Carburant liquide suivant la revendication 1 ou la revendication 2, dans lequel l'acide monoalcénylsuccinique est l'acide dodécénylsuccinique.

20 4. Carburant liquide suivant l'une quelconque des revendications 1 à 3, dans lequel l'imidazoline substituée est la 2-heptadécényl-1-(2-hydroxyéthyl)imidazoline.


5. Carburant liquide suivant l'une quelconque des revendications 1 à 4, dans lequel le rapport pondéral du constituant A au constituant B dans le mélange est égal à une valeur comprise dans l'intervalle de 1:10 à 10:1, de préférence égal à 1:1.

25 6. Carburant liquide suivant l'une quelconque des revendications 1 à 5, dans lequel l'inhibiteur de corrosion est présent en une quantité comprise dans l'intervalle de 2,8 à 14 000 mg/l (1 à 5000 lbs pour 1000 barils), de préférence de 14 à 1400 mg/litre (5 à 500 lbs pour 1000 barils).

30 7. Carburant liquide suivant l'une quelconque des revendications 1 à 6, qui comprend une quantité dominante de distillat hydrocarboné dans la plage de distillation de l'essence et 2 à 30% en volume d'un ou plusieurs alcanols contenant 1 à 4 atomes de carbone.

8. Utilisation, comme concentré inhibiteur de corrosion pour des carburants renfermant 5 à 100% en poids d'un ou plusieurs alcools et 0 à 95% en poids d'essence, d'un solvant contenant 5 à 60% en poids d'un mélange (A) d'un polymère d'un ou plusieurs acides monocarboxyliques aliphatiques polyinsaturés en C₁₆ à C₁₈ et (B) d'au moins une imidazoline substituée répondant à la formule structurale:

35



45

dans laquelle R représente un groupe hydrocarboné alcényle ayant 7 à 24 atomes de carbone.

50 9. Procédé de préparation d'un carburant liquide, consistant à mélanger un carburant, comprenant 5 à 100% en poids d'un ou plusieurs alcools et 0 à 95% en poids d'essence, avec comme inhibiteur de corrosion, un mélange suivant l'une quelconque des revendications 1 à 5, les constituants dudit mélange étant mélangés préalablement ou ajoutés séparément.

10. Procédé suivant la revendication 9, dans lequel l'inhibiteur de corrosion est présent en une quantité comprise dans l'intervalle de 2,8 à 14 000 mg/litre (1 à 5000 lbs pour 1000 barils), de préférence de 14 à 1400 mg/litre (5 à 500 lbs pour 1000 barils), d'un carburant suivant la revendication 7.

55

60

65