

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(10) International Publication Number

WO 2019/036434 A1

(43) International Publication Date
21 February 2019 (21.02.2019)

(51) International Patent Classification:
C09D 5/02 (2006.01) *E04B 9/00* (2006.01)
C09D 5/04 (2006.01) *E04B 9/04* (2006.01)
E04B 1/84 (2006.01) *C09D 7/40* (2018.01)

(74) Agent: SHIMOLA, Howard et al.; Pearne & Gordon LLP, 1801 East 9th Street, Suite 1200, Cleveland, Ohio 44114-3108 (US).

(21) International Application Number:
PCT/US2018/046638

(22) International Filing Date:
14 August 2018 (14.08.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
15/677,345 15 August 2017 (15.08.2017) US

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(71) Applicant: USG INTERIORS, LLC [US/US]; 550 West Adams Street, Chicago, IL 60661-3676 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(72) Inventors: HULKA, Samuel D.; 103 N. Cathy Lane, Mount Prospect, Illinois 60056 (US). GULBRANDSEN, Peder J.; 2729 Lansdale, Aurora, Illinois 60503 (US). BURY, Rafael; 1226 Sarasota Dr., Wheeling, Illinois 60090 (US).

(54) Title: ACOUSTICALLY TRANSPARENT SANDABLE COATING

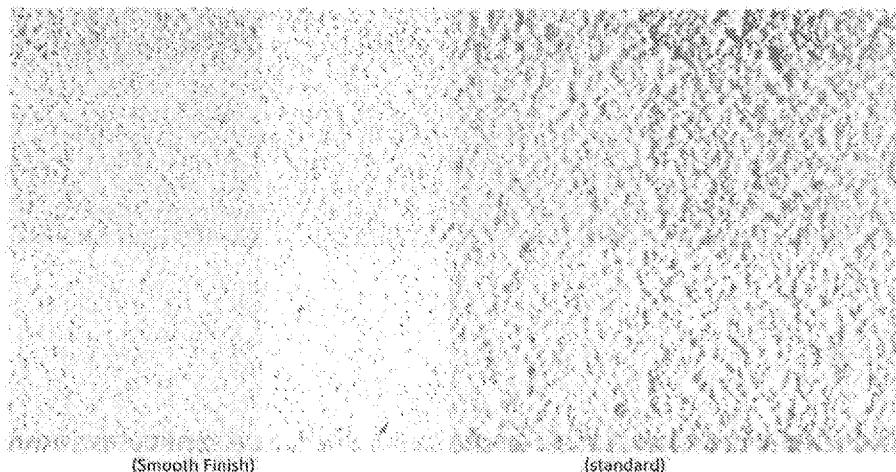


FIG. 6

(57) Abstract: A formulation for an acoustically transparent coating for use on an acoustical substrate comprising a water dispersible binder and relatively large filler particles, and characterized by a high pigment to volume concentration, high viscosity, high shear thinning, and fast drying to enable the formulation to be sprayed in droplets that retain their identity when in mutual contact and in a dry coating can be efficiently sanded flat.

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

ACOUSTICALLY TRANSPARENT SANDABLE COATINGBACKGROUND OF THE INVENTION

5 The invention relates to acoustically transparent coatings useful for improving the appearance of acoustical substrates.

PRIOR ART

U.S. Patents 8,684,134, 8,770,345 and 8,925,677
10 disclose drywall sheets or panels used to construct monolithic acoustical ceilings. The panels are perforated and clad with a thin, porous, translucent web such as a non-woven translucent fiber glass veil or scrim. Joints between the panels can be finished with
15 tape and joint compound in the same manner as ordinary drywall is taped per gypsum association publication GA-216-2013.

There is a need for a coating that can be applied across the drywall panels to conceal the taped joints and
20 the perforations visible through the veil and that does not significantly diminish the sound absorption afforded by the panels. It is important that the coating can be applied without requiring excessive skill on the part of a painter or tradesman and that a full coating will dry
25 within a limited time, preferably less than half of a single work day.

SUMMARY OF THE INVENTION

The invention provides a finish or appearance
30 coating for an acoustical substrate that is characterized by a high porosity with a resulting high acoustical transparency and that can be efficiently sanded for a smooth, uniform appearance. The coating is particularly useful for concealing the perforations in drywall sheets

clad with a translucent or semi-transparent non-woven veil and taped joints between such sheets in a monolithic acoustical ceiling construction.

The disclosed coating material is adapted to be
5 sprayed in droplet form in multiple layers that are allowed to dry before a successive layer is applied. The resulting coating structure is a three dimensional matrix of residual droplets and intervening voids or pores. The coating material is characterized by relatively large
10 filler particles, notably high pigment volume concentration, substantial shear thinning, and fast drying properties.

The coating material is sprayed in a form of relatively large droplets. Owing to the physical
15 properties of the material, the droplets retain at least some of their individual character once deposited on the substrate or the previous layer of the material. The droplets, due to their viscosity and quick drying properties, do not fully merge with adjacent droplets.
20 The droplets retain sufficient individuality to provide open spaces between the droplets of the same coating layer as well as the previous coating layer. The open spaces, which are small enough to be overlooked by the unaided eyes of a casual observer in a ceiling
25 application, interconnect through the separate coat layers providing a porosity through the entire thickness of the coating.

The disclosed coating formula, besides affording acoustical transparency, can be readily sanded to provide
30 a relatively smooth appearance.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a fragmentary, schematic, isometric view of a gypsum panel acoustical monolithic ceiling employing the invention;

5 FIG. 2 is a fragmentary, cross-sectional view on an enlarged scale of the monolithic acoustical ceiling of FIG. 1;

FIG. 3 is a scanning electron microphotograph representing a face of the inventive coating;

10 FIG. 4 is a generalized graph of the viscosity of a formula of the inventive coating;

FIG. 5 is a graph of typical air flow resistivity of the inventive coating; and

15 FIG. 6 is a photograph showing the outer layer of the inventive coating as first dried on the right and after sanding on the left.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to FIG. 1, there is shown a schematic 20 partial view of an acoustical monolithic ceiling installation 10. Portions of layers of the ceiling 10 are peeled away to reveal constructional details. The ceiling 10 is a suspended system including a drywall grid 11, known in the art, comprising main tees 12 spaced on 4 25 ft. centers and intersecting cross tees 13 spaced on 16 in. or 2 ft. centers. Dimensions used herein are typically nominal dimensions and are intended to include industry recognized metric equivalents. The main tees 12, to which the cross tees 13 are interlocked, are 30 suspended by wires 14 attached to a superstructure (not shown). A perimeter of the grid 11 is conventionally formed by channel molding 15 secured to respective walls 16.

Acoustical panels 20 are attached to the lower sides of the grid tees 12, 13 with self-drilling screws 21. The illustrated acoustical panels are 4 ft. by 8 ft. in their planar dimensions, but can be longer, shorter 5 and/or of different width as desired or practical. The size of the panel 20 and spacing of the grid tees 12 and 13, allows the edges of the panel to underlie and be directly attached to a grid tee, assuring that these edges are well supported.

10 Referring to FIG. 2, the acoustical panel 20 is characterized with a perforated gypsum core 24. One method of providing the core 24 is to modify a standard commercially available sheet of drywall by perforating it through a front paper face 23, the gypsum core 24, and a 15 rear paper side or face 25. Perforations 28 can be formed by drilling, punching, or with other known hole-making techniques. The perforations 28 are preferably uniformly spaced; by way of an example, the perforations can be round holes of 8 mm diameter on 16 mm centers.

20 This arrangement produces a total area of the perforations substantially equal to 20% of the full planar area of a panel 20. Other hole sizes, shapes, patterns and densities can be used. For example, tests have shown that a hole density of 9% of the total area 25 can achieve good results. Marginal areas, as well as intermediate areas corresponding to centers of support grid, joists, or studs, of a sheet can be left unperforated to maintain strength at fastening points.

Sheets 29, 30 are laminated to both full sides of 30 the perforated drywall sheet thereby at least partially closing both ends of the perforations 28. At a rear side of the drywall, the backer sheet or web 30 is preferably an acoustically absorbent non-woven fabric known in the acoustical ceiling panel art. By way of example, the

backer fabric can be that marketed under the trademark SOUNDTEX® by Freudenberg Vliesstoffe KG.

At a front side of the drywall sheet 22, a sheet or web in the form of a non-woven fabric scrim layer 29 is
5 attached with a suitable adhesive. The facing layer or sheet 29 is porous; a suitable material for this application is that used commercially as a cover or face for conventional acoustical ceiling panels. An example of this type of veil material is that marketed by Owens
10 Corning Veil Netherlands B.V. under the product code A125 EX-CH02.

The panel 20 with other identical panels is hung on the grid 11 in the same manner as ordinary drywall is installed. Similarly, as shown in FIG. 1, joints 33 are
15 taped in the same way as regular drywall is taped. Drywall joint compound or similar material 34 is used to adhere a tape or similar material 35 to adjacent margins of two abutting panels 20 by applying it directly to the sheets 29 and over the tape 35 to conceal the tape.

20 After the joint compound 34 has been sanded or sponged smooth, the front sheets 29 and remaining joint compound are painted with an acoustically transparent coating 31 of the invention. When the term monolithic is used herein, it is to denote that essentially the entire
25 visible surface of a ceiling or wall appears to be a seamless expanse without joints.

The coating 31, in accordance with the invention, is sprayed onto the room facing side of the panels 20 clad with the scrim or veil 29 which constitute a substrate
30 for the coating. The coating 31, ideally, has several physical properties including relatively large filler particles, notably high pigment volume concentration (PVC), high viscosity, shear thinning, and fast drying

performance. When used as an appearance coat for ceiling structures, the coating 31 should dry white.

A formulation for a suitable coating includes a binder and relatively large particles serving as a pigment or filler of a size larger than that ordinarily used in conventional paint-like coatings. The binder can be a resin or polymer binder in or useable as an aqueous dispersion such as, but not limited to, acrylic, styrene, or vinyl polymer latex or oil-based media such as an alkyd, polyurethane, polyester, or epoxy and combinations thereof.

The relatively large particles include, but are not limited to, glass spheres, perlite, ceramic, fly ash, polymeric spheres, borosilicate, coarse sand, silica, and coarse carbonate. The relatively large particles are spherical or three-dimensional in shape without a prominent plate-like character or without a primarily columnar shape. The size of the large particles can range between 20 and 900 microns.

Table 1 below sets out an example of a suitable formula for the inventive acoustically transparent sandable coating 31.

TABLE 1

MATERIALS	SOURCE	WEIGHT %	WEIGHT % RANGE	FUNCTION
Water		37.49	(10-70)	Solvent
Natrosol HHXR	DOW Chemical	0.41	(0-2)	Thickener
Tamol 1254	DOW Chemical	0.29		Dispersant
Titanium Dioxide	Tioxide	6.11		Filler
Haltech HP 42-296	Haltech	14.68	(0.05-80)	Latex Binder
Calcium Carbonate	Omya	29.60	(0-60)	Filler
Mica P80F	USG	3.70		Filler
Troykyd D01	Troy Chemical	0.19		Defoamer
Texanol	Eastman Chemical Co.	0.37		Coalescent
Mergal 174 II	Troy Chemical	0.16	(0-0.3)	Biocide
3M K1	3M	7.00	(1-25)	Filler
		100.00		

5 The function or role of the various constituents is noted in the column on the far right. Water, thickener, binder and large particle filler are essential and the biocide is essential while the formula resides in a can. The remaining constituents can be considered optional.

10 For reference purposes, the titanium dioxide has an average particle size of about 0.6 microns; the calcium carbonate can have an average particle size of about 12 microns, and the plate-like mica can have major dimensions of about 20 microns.

15 The 3M K1 material is glass bubbles (hollow spheres) of soda-lime borosilicate with a reported true density of typically 0.125 grams/cc. and an average particle size of 65 microns. The 3M K1 material is particularly useful in practice of the invention. This material occupies much 20 of the volume of the formulation owing to its relatively low density resulting from its hollow sphere structure. The K1 material, additionally, has a relatively low oil absorption of 0.2 - 0.6 grams oil/cc of product per ASTM

D281-84. Still further, the K1 material has a natural white color which is useful in ceiling applications. The titanium dioxide serves as an opacity improving filler and whitening pigment. The calcium carbonate increases 5 the solids and density of the coating to further improve drying time and hardness of the dried coating.

The pigment volume concentration (PVC) of the coating formulation, based on all the solids, is relatively high and ideally is between 75% and 95% while 10 alternative formulations will fall in a wider range of about 50% to about 99%. Generally, there is insufficient binder when the coating is dry to fill the voids between the particles in the coating allowing air gaps in the coating. The ratio of the volume of relatively large 15 particle fillers to fillers of more conventional lesser size can range between about 0.1 to about 10.

The coating formulation of Table 1 has a relatively high viscosity of about 190 BBU (Brabender Units) to about 265 BBU at room temperature. Alternative 20 formulations can have a viscosity of between about 66 BBU to about 1450 BBU at room temperature.

The coating formulation of Table 1 is, and alternative formulations should be, characterized by a high rate of shear thinning. The shear thinning 25 characteristics of the Table 1 formulation is generalized in FIG. 4 where by the measured viscosity drops more than 40:1. The viscosity, in part, is contributed by the thickener component of the formulation. The listed thickener is cellulosic, but known synthetic and natural 30 thickeners can be used. The thickener also serves to keep the constituents in suspension. The generalized viscosity chart of FIG. 4 was measured on a Brookfield HA viscometer using a T-bar:C spindle. Alternative coating formulations should have a high shear thinning property

so that the viscosity can reduce by a factor of at least 10 to 1 under shear conditions.

The coating of Table 1 or an equivalent is preferably applied to the taped, veil clad, perforated drywall panels or other substrate in a spray process of separately sprayed layers. Each layer or coat is allowed to substantially dry before a subsequent coat is applied.

Preferably, the wet coating material is sprayed in large droplets using, for example, a conventional hopper

texture sprayer such as that marketed by Graco. Ideally, the gun and/or its air supply is adjusted so that the droplets are about 1 to about 4 mm. in size and, preferably, about 2 mm. in size. The shear thinning property, characterized in FIG. 4, of the wet coating

allows it to be readily sprayed in droplet form despite its high viscosity. A single coating layer should involve spraying the substrate in two perpendicular directions or passes so that a uniform covering by the layer is achieved. Two to seven layers can be applied,

with four layers being preferred, to conceal the perforations and taped joints of the ceiling. Coverage by the total coating layers can be between 15 to 35 square foot per gallon, with 25 square foot being preferred. The formulation of Table 1 or a like

formulation has a density of 4 to 11 lbs. per gallon with a preferred range of 5 to 6.5 lbs. per gallon.

FIG. 3 demonstrates the porous nature of the inventive coating when applied to an acoustical substrate. Inspection of FIG. 3 shows that the droplets retain an individual nature while the binder bonds the solids to the substrate at the first layer and to adjacent droplets between and among layers. The scale on the lower right-hand corner of FIG. 3 indicates a measure of 1 mm. and droplets can be observed in the FIG.

measuring more or less than 1 mm. Preferably, the dried droplets range between 1/2 and 2-1/2 mm. The original droplet size will shrink when the water content evaporates.

5 As layers of the coating are deposited, a three-dimensional matrix of droplets is built-up. Voids, dark areas in FIG. 3, can be observed between the residual droplet forms. These voids are interconnected through the thickness of the coating resulting in a porous and
10 acoustically transparent coating. Voids or pores in FIG. 3 are generally less than 0.5 mm in size so that at ceiling height they are not readily observable by a person standing on the associated floor. The low absorption rate of the major solids volume of the
15 coating, in the Table 1 formula afforded by the 3M K1 large particles, assures that the coating will be fast-drying. The shear thinning property of the wet coating allows it to be readily sprayed in droplet form.

The combination of high viscosity and fast drying properties enables the droplets to beneficially retain their individuality and avoid completely merging with adjacent droplets. The disclosed formulation of Table 1 applied in the specified layers dries to the extent that it will not transfer to a finger, i.e. is dry to the
25 touch, most preferably after 20 minutes for a first coat and 30 minutes on subsequent coats in an environment of 75 degrees F. and 50% relative humidity. Preferably, alternative formulations with fast drying properties will dry to the touch in 60 minutes in a first coat. This
30 fast drying property of the coating is also important since it enables a painter to complete a job on the same day.

FIG. 5 illustrates typical airflow resistivity as measured separately for each successive dry coat of the

Table 1 material. The resistivity is determined with an air flow of 2 liters per minute through a surface area of 3.14 square inches. The total dry thickness of the coating tested in FIG. 5 was 0.031 inch. The initial 5 resistivity reading at "0 coats" is a measure of the resistivity of the veil 29. The dry coating is preferably between 0.03 and 0.15 inches thick.

The right-hand side of FIG. 6 illustrates the sprayed and dried finish of the top (outer) layer of the 10 inventive coating. Architects, interior designers, building owners and/or tenants may prefer a smoother finish. A finer texture shown at the left in FIG. 6 can be obtained with the inventive coating formulation, without loss of acoustical transparency, by a sanding 15 process. The inventive coating, as a result of the notably high pigment volume concentration formulation can be readily sanded while retaining acoustical transparency.

Before sanding, the coating surface is characterized 20 by macroscopic hills and valleys corresponding to residuals of spaced droplets deposited during the spray application process. When sanded flat, as in FIG. 6 at the left, the inventive coating is characterized with a major part of its surface area being essentially flat, 25 ignoring very fine sandpaper scratch marks, and comparatively small local valleys.

By way of example, a ceiling area of 400 square foot covered with the inventive coating can be manually sanded with a pole sander in 45 minutes to obtain a flat surface 30 represented at the left in FIG. 6. This can be compared for reference to another formulation requiring as much as 1 hour and 45 minutes to manually sand a 400 square foot ceiling area. Dust particles not removed in the sanding

process can be removed with an air blower, jet, or vacuum, for example.

Sanding tests were conducted to objectively measure the sandability of the inventive coating requiring 45 minutes and the reference coating requiring 1 hour and 45 minutes of manual sanding of a 400 square foot ceiling area. The tests were conducted according to the ASTM D2486 standard (Test Method A) with appropriate deviations/modifications. Sandpaper of 180 grit (CAMI 10 Scale) was substituted for the specified brush with a weight of 1 pound over the sandpaper, no "abrasive scrub medium (liquid)" was used and no brass shim was used. The coating was applied to an acoustical substrate as described above. The inventive coating requiring 45 minutes of manual sanding tested at 60-65 cycles to obtain a flat surface (represented on the left in FIG. 6) while the reference coating requiring 1 hour 45 minutes tested at 110-115 cycles to obtain a flat surface. Based on these tests and experience the inventive coating 15 formulation should sand flat, preferably in about 85 cycles and more preferably in about 60-65 cycles under the described modified ASTM D2486 standard. 20

25

It should be evident that this disclosure is by way of example and that various changes may be made by adding, modifying or eliminating details without departing from the fair scope of the teaching contained in this disclosure. The invention is therefore not limited to particular details of this disclosure except to the extent that the following claims are necessarily 30 so limited.

WHAT IS CLAIMED IS:

1. A formulation for an acoustically transparent coating for use on an acoustical substrate comprising a
5 water dispersible binder and relatively large filler particles, and characterized by a high pigment to volume concentration, high viscosity, high shear thinning, and fast drying to enable the formulation to be sprayed in droplets that retain their identity when in mutual
10 contact, the pigment to volume concentration being selected to provide a surface that can be sanded flat with about 85 cycles of a modified ASTM D2486 (Method A) standard test using 180 grit (CAMI) sandpaper.

15 2. A method of forming an acoustically transparent coating on an acoustical substrate comprising spraying multiple layers of droplets on the substrate, the layers being allowed to at least partially dry before application of a subsequent layer, the droplets having
20 sufficient portions free of contact with adjacent droplets to provide interconnected pores that extend through a full thickness of the coating, allowing the coating to fully dry and thereafter sanding the coating flat.

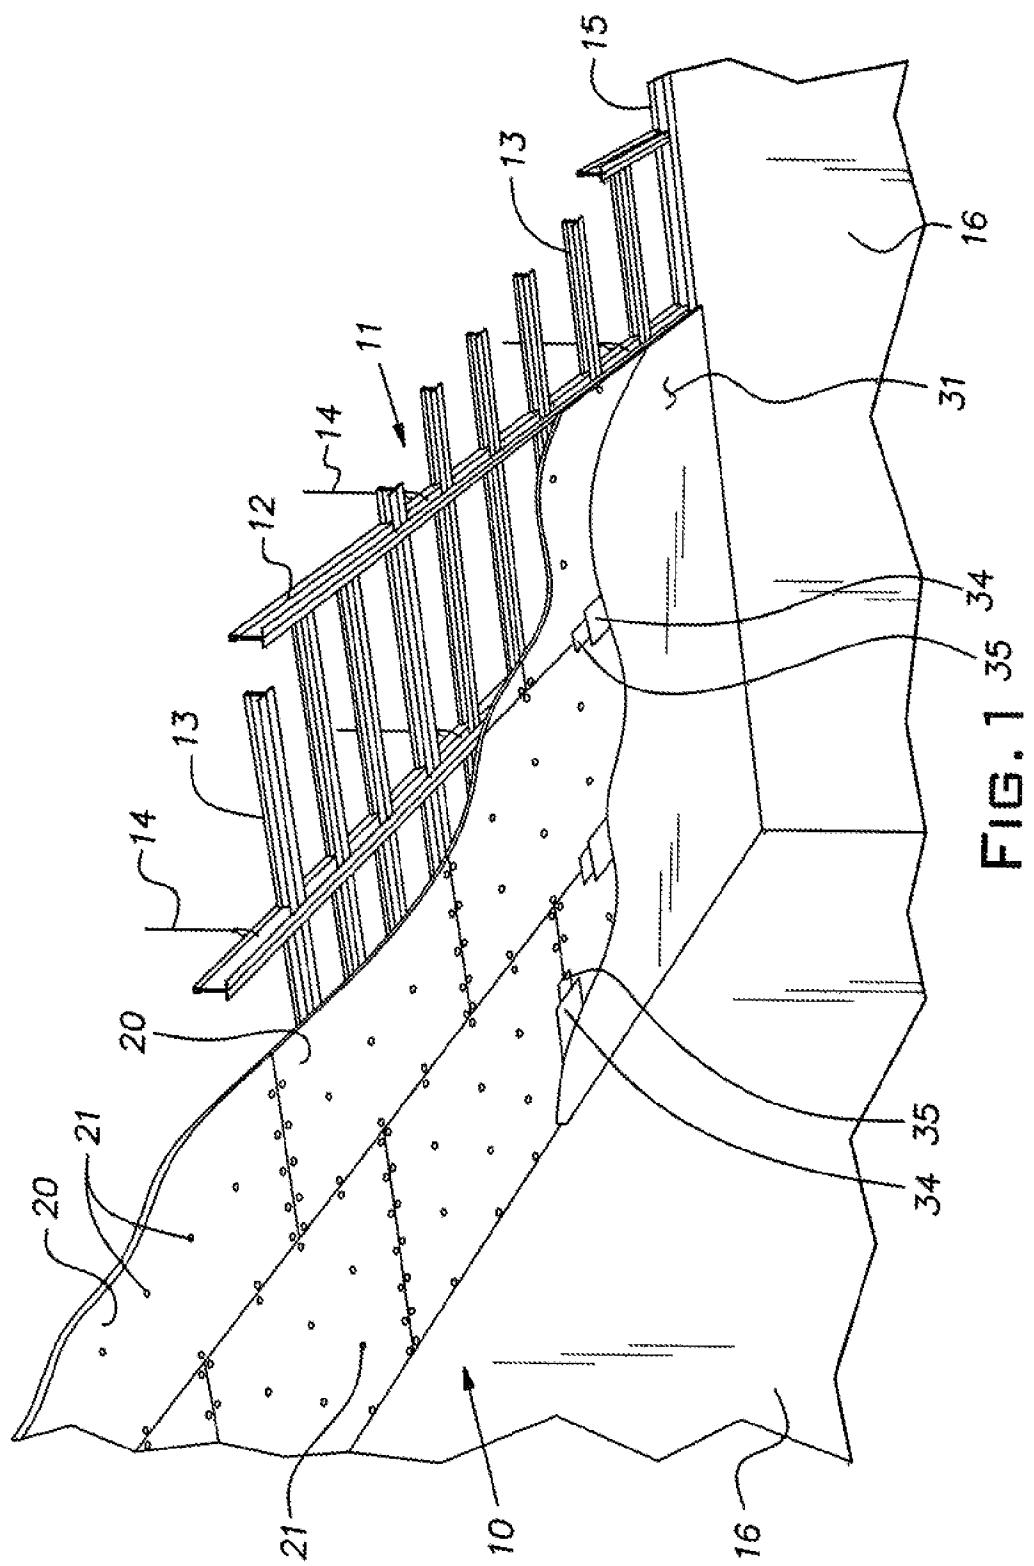


FIG. 1 35 34

2/5

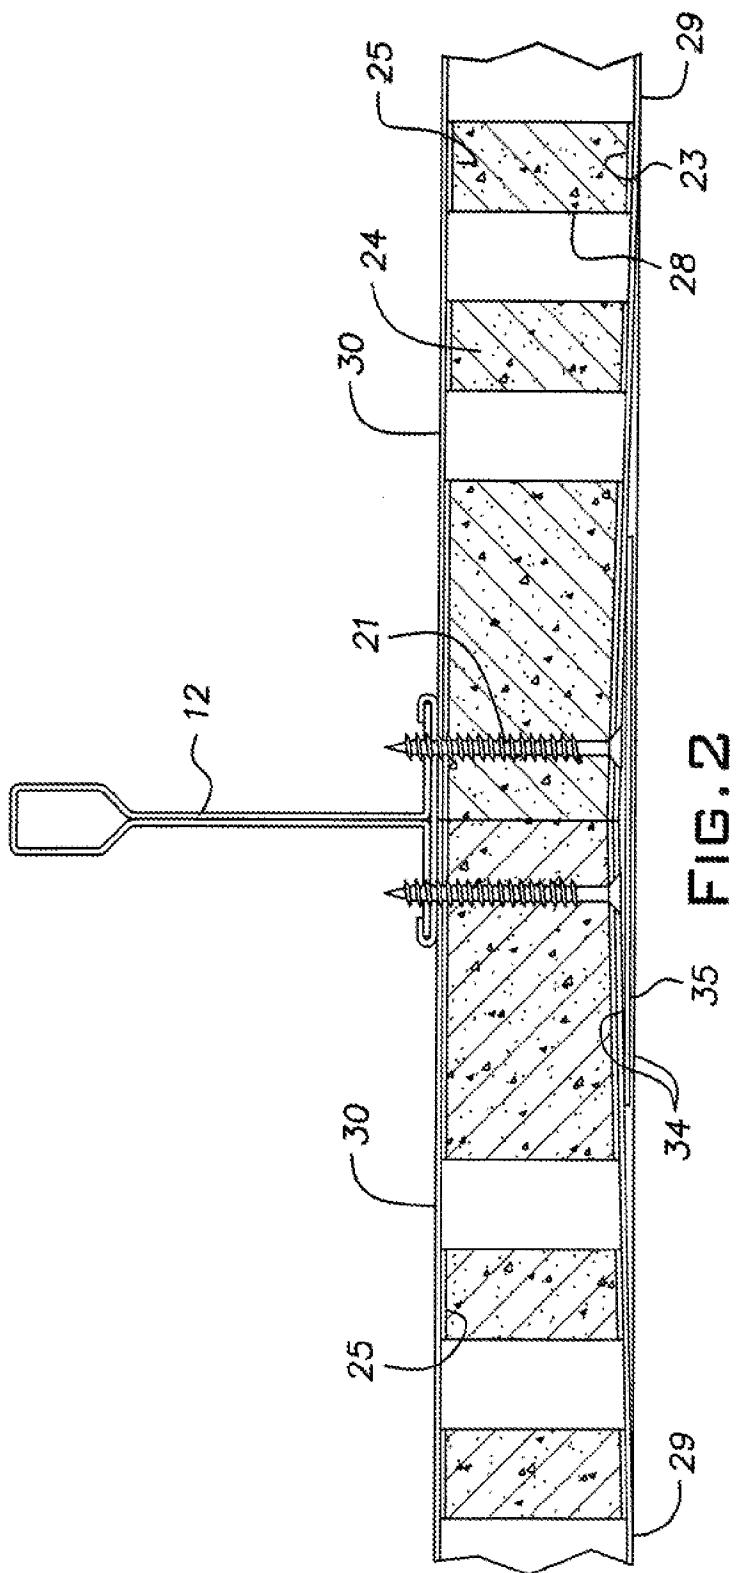


FIG. 2

3/5

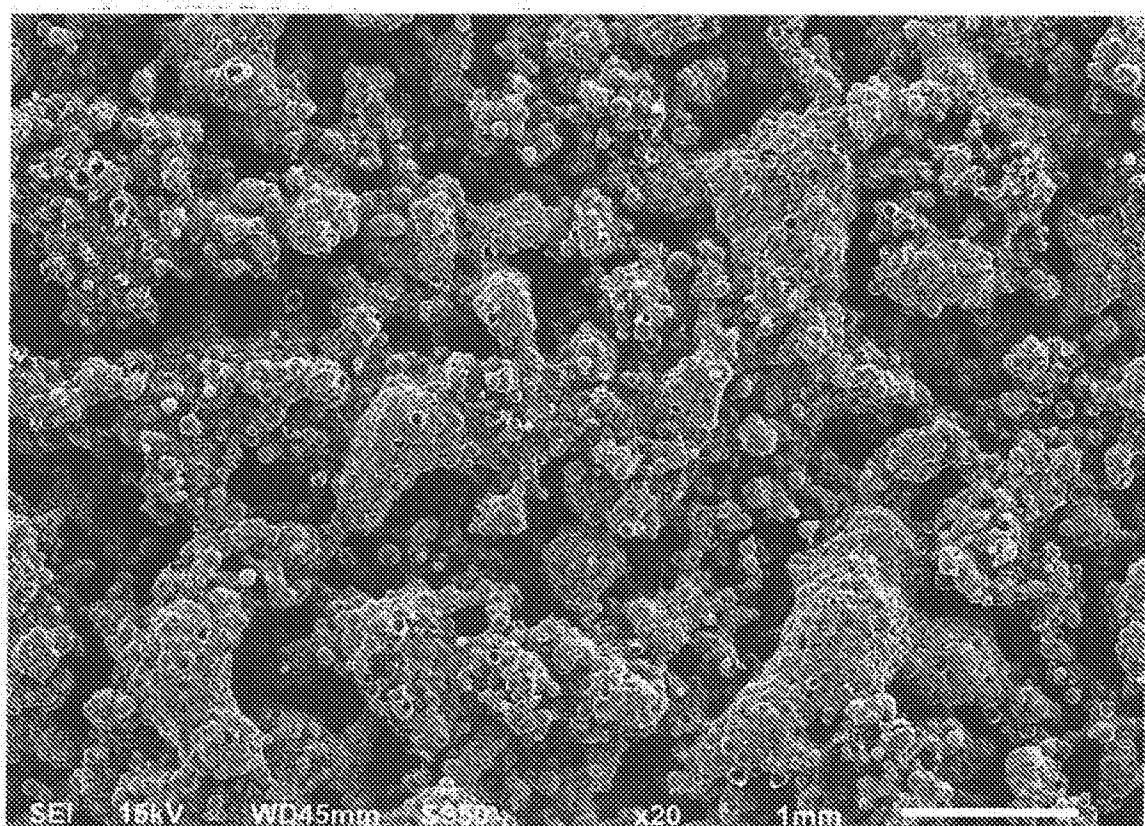


FIG. 3

4/5

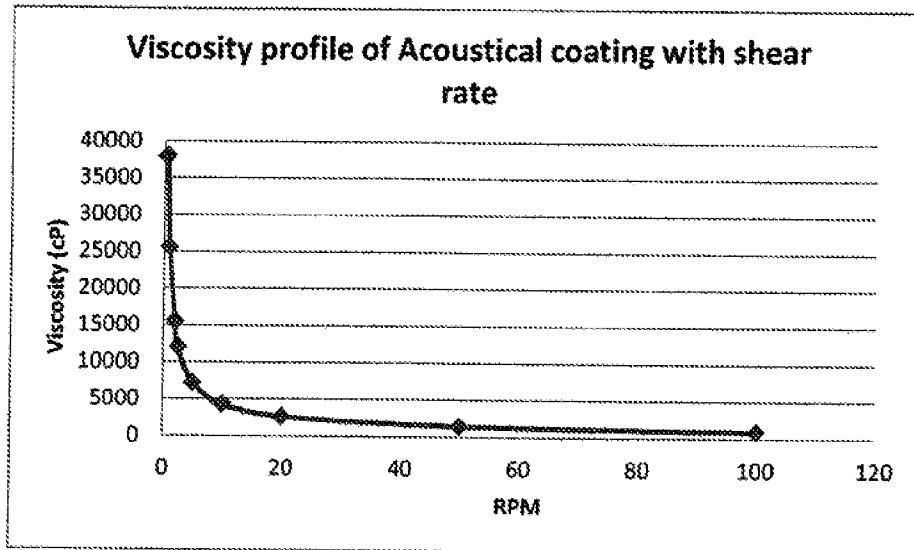


FIG. 4

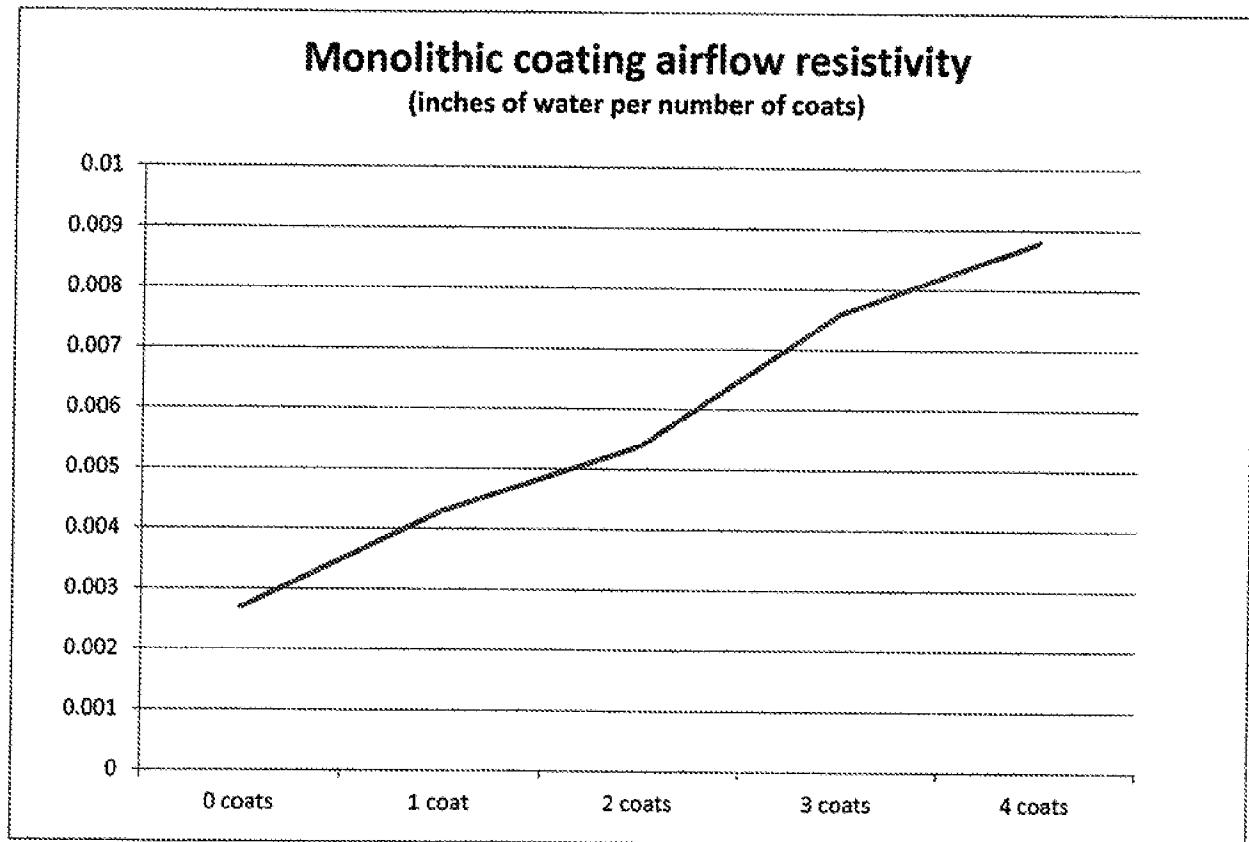


FIG. 5

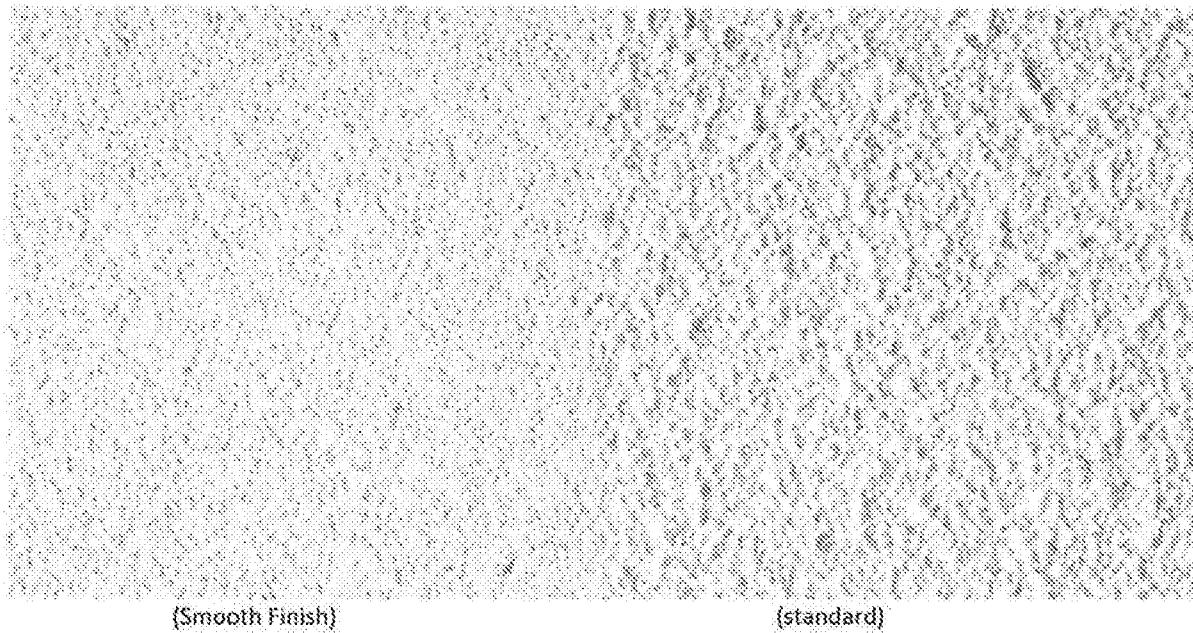


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/046638

A. CLASSIFICATION OF SUBJECT MATTER				
INV. C09D5/02	C09D5/04	E04B1/84	E04B9/00	E04B9/04
C09D7/40				

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09D C08K E04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/124291 A1 (DUGAN ERIN [US] ET AL) 8 May 2014 (2014-05-08) cited in the application paragraphs [0030] - [0032], [0063] - [0066]	1
Y	----- EP 1 403 330 A1 (ARMSTRONG WORLD IND INC [US]) 31 March 2004 (2004-03-31) paragraphs [0019], [0021] - [0024], [0027], [0035] - [0037]; claims 1-10,48-52; tables 1,2	2
X	----- EP 1 589 066 A1 (ARIEL ZEEV [IL]) 26 October 2005 (2005-10-26)	1,2
Y	paragraph [0031]; claims 1-19 ----- -/-	2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
---	--

13 November 2018

30/11/2018

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer
--	--------------------

Schmitt, Johannes

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/046638

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/129643 A1 (YEUNG LEE K [US]) 27 May 2010 (2010-05-27)	1
Y	paragraphs [0009], [0024] - [0033], [0035], [0036], [0038]; claims 1-19; examples 1-8 -----	2
X	US 5 674 594 A (SENENIG DARRYL L [US]) 7 October 1997 (1997-10-07) column 2, line 27 - column 3, line 5; claims 1-4 -----	1
X, P	WO 2018/048865 A1 (USG INTERIORS LLC [US]) 15 March 2018 (2018-03-15) claims 1-10 -----	1
2		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2018/046638

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 2014124291	A1	08-05-2014	NONE		
EP 1403330	A1	31-03-2004	AT 358702 T AU 2003248441 A1 CA 2441141 A1 DE 60312938 T2 EP 1403330 A1 JP 2004124094 A MX PA03008721 A US 2004062898 A1 US 2006128863 A1	15-04-2007 22-04-2004 30-03-2004 13-12-2007 31-03-2004 22-04-2004 10-09-2004 01-04-2004 15-06-2006	
EP 1589066	A1	26-10-2005	EP 1589066 A1 US 2005256228 A1		26-10-2005 17-11-2005
US 2010129643	A1	27-05-2010	AR 074206 A1 AU 2009316530 A1 CA 2744271 A1 CN 102209631 A CO 6400127 A2 EP 2358527 A2 JP 5557145 B2 JP 2012509787 A KR 20110087315 A MY 158925 A NZ 593619 A PE 02382012 A1 RU 2011120485 A UA 102568 C2 US 2010129643 A1 UY 32256 A WO 2010059817 A2 ZA 201104553 B		29-12-2010 27-05-2010 27-05-2010 05-10-2011 15-03-2012 24-08-2011 23-07-2014 26-04-2012 02-08-2011 30-11-2016 26-04-2013 11-03-2012 27-12-2012 25-07-2013 27-05-2010 30-06-2010 27-05-2010 28-03-2012
US 5674594	A	07-10-1997	CA 2153186 A1 US 5674594 A		25-02-1996 07-10-1997
WO 2018048865	A1	15-03-2018	US 9738796 B1 WO 2018048865 A1		22-08-2017 15-03-2018