

(No Model.)

T. M. GARRISON.  
CLOTHES HANGER.

No. 490,145.

Patented Jan. 17, 1893.

Fig. 1.

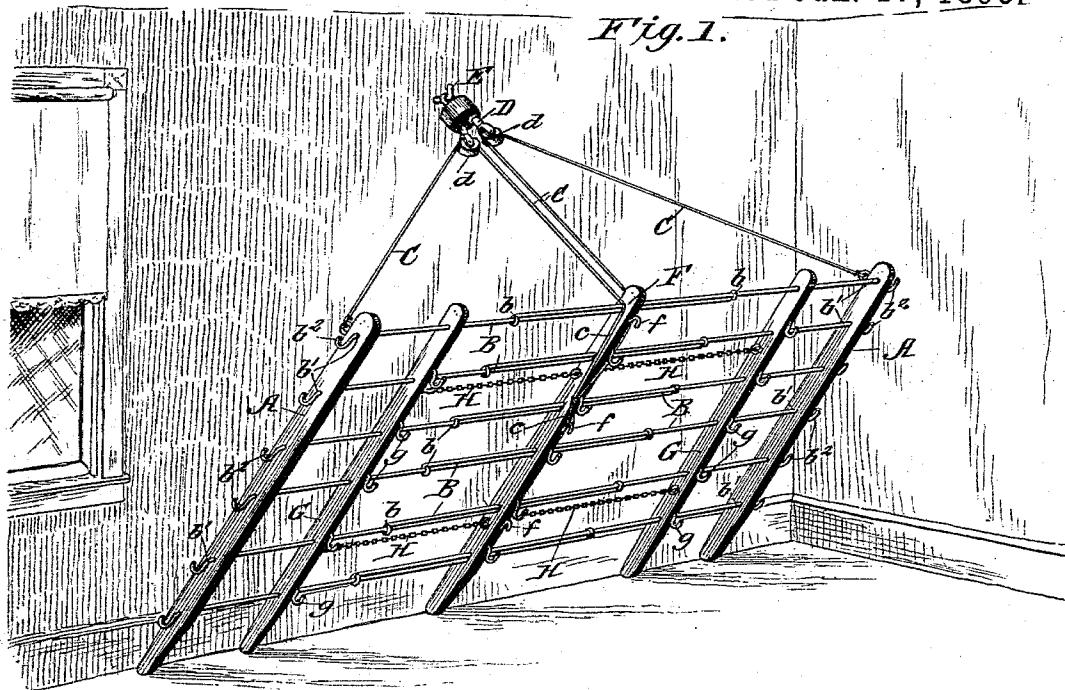


Fig. 2.


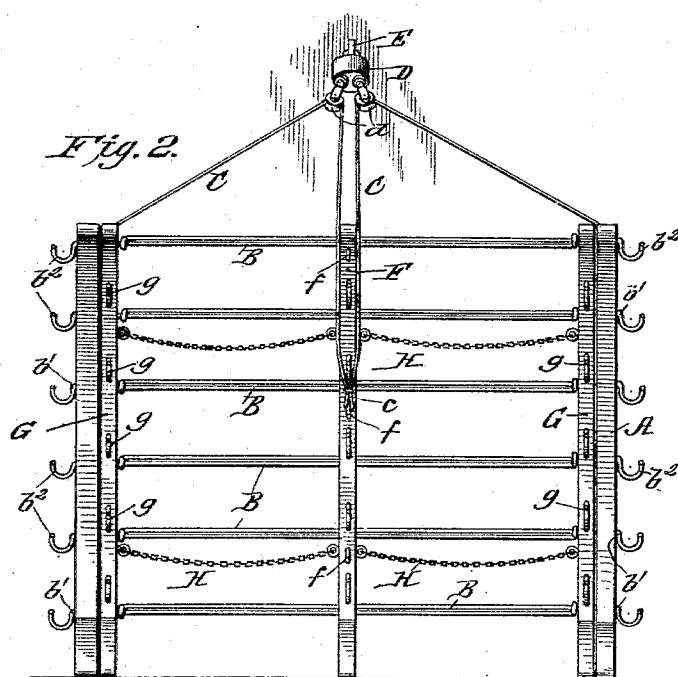


Fig. 3.

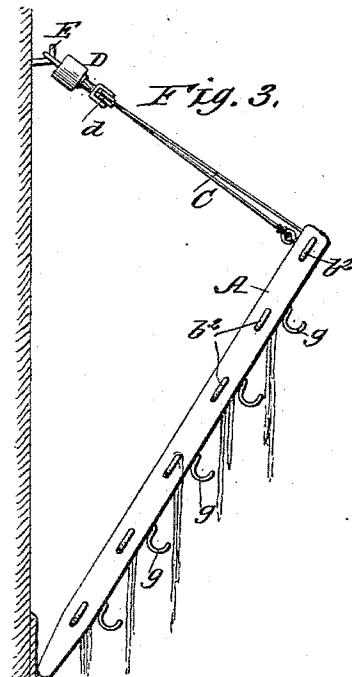

WITNESSES:

Fred J. Dietrich

M. D. Blonder

INVENTOR:

Theodore M. Garrison

BY Meier

ATTORNEYS

# UNITED STATES PATENT OFFICE.

THEODORE M. GARRISON, OF HAZLETON, PENNSYLVANIA.

## CLOTHES-HANGER.

SPECIFICATION forming part of Letters Patent No. 490,145, dated January 17, 1893.

Application filed April 11, 1892. Serial No. 428,722. (No model.)

*To all whom it may concern:*

Be it known that I, THEODORE M. GARRISON, residing at Hazleton, in the county of Luzerne and State of Pennsylvania, have invented certain new and useful Improvements 5 in Clothes-Hangers, of which the following is a specification.

My invention has for its object to provide a simple, inexpensive and easily manipulated 10 clothes hanger, which will effectively serve for the purpose intended and which can be compactly folded when not in use.

My invention consists in the peculiar combination and novel arrangement of parts all 15 of which will hereinafter be fully described in the specification, and particularly pointed out in the claims reference being had to the accompanying drawings in which

Figure 1 is a perspective view of my improvement in position for use. Fig. 2 is a front view of the same folded. Fig. 3 is an end view thereof and Fig. 4 is a detail view of the same hereinafter specially referred to.

Referring to the drawings A A indicate 25 the end bars or legs, which are connected by the parallel rods B, which in practice are preferably of galvanized wire. These bars are formed in sections their ends lapping and formed with slidable connections b b whereby 30 the hanger body A can be readily extended or folded in as may be desired.

As a simple and effective means for joining the rods B with end legs, such rods have their ends b' passed through the bars A and projected beyond them, and such projected ends 35 are bent to form hook members b' which, while serving to hold the rods and bars together also form supporting hooks, upon which to hang some of the articles. Connected to the 40 upper ends of the end bars are the ends of the supporting cord C which is passed over the double sheave hanger D, which in turn is hung upon a stud, pin or hook E projected from the wall.

By reference to Fig. 1 it will be noticed 45 that the central or loop portion c of the cord C is drawn down between the sheaves d, and such portion c is connected to one of a series of hooks f upon a centrally arranged 50 bar F movably held on the rods B. By this construction when the lower end of the hanger body is placed against the wall at the base, the upper portion can be readily tilted forward by adjusting the loop c to the dif-

ferent hooks f, such adjustment, admitting 55 of a proper inclination of the hanger body when filled. Thus, in operation when the hanger frame is arranged almost vertical, after the lower wire is filled with clothes, the frame is inclined forward, by adjusting the 60 loop c as before stated. The advantage of this inclination, is the convenience of placing the clothes on the rods, in such a manner that the contents of each rod will hang clear 65 of the next lower one.

In connection with the central bar F slide- 70 able bars G are arranged on the rods B one to each side of the center bar F, and such bars have hooks g on their front face to support articles of clothing. To limit the outward 75 adjustment flexible chain connections H are employed which connect the outer bars G with the central bar F as clearly shown. By providing the bars G G and F additional stability is added to the hanger frame, and fur- 80 ther means for supporting the clothing pro- 85 vided, and by rendering such bars adjustable they can be shifted along the rods B as may be desired.

Having thus described my invention, what 80 I claim and desire to secure by Letters Patent is,

1. A clothes hanger comprising the end bars A the rods B, their outer ends connected to such bars, their inner ends, having a slide- 85 able connection with each other, the bars F and G, having supporting hooks held to slide on such bars B means for limiting their outer adjustment on such bars and means for sup- 90 porting such hanger all arranged substantially as shown and for the purpose described.

2. An improved clothes hanger comprising a support or hanger having divergently ar- 95 ranged supporting sheaves, the frame or sup- port proper formed of sections having slide- 100 able connections, a central bar F, slideable on the cross bars of the main frames, having a series of hooks f, the supporting cord C, se- cured at its ends to the end bars of the main frame, its central or loop portion passed over 105 and between the diverging pulley supports, and adapted for detachable connection with any one of the hooks f on the bar F all sub- stantially as and for the purposes described.

THEODORE M. GARRISON.

Witnesses:

C. BACHMAN,  
GEO. E. MALKAMES.