

ASSIGNEE - APPLICANT

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952 (AS AMENDED)

DECLARATION IN SUPPORT OF AN APPLICATION FOR A PATENT

Name of applicant) In support of an Application made by:
J.E. Ekornes A/S
Title) for a patent for an invention entitled:

ARRANGEMENT IN A CHAIR

Full name of I, EINAR EKORNES
signatory) of
Address of N-6222 IKORNES
signatory)

do solemnly and sincerely declare as follows:

1. I am authorised by the above mentioned applicant for the patent to make this Declaration on its behalf.
2. The name and address of each actual inventor of the invention is as follows:

Insert
details of
inventor(s)

Jostein Ekornes
N-6222 IKORNES
Norway

Insert
details of
assignment,
etc.)

and the fact(s) upon which the applicant is entitled to make this application are as follows:

The Inventor has assigned all his rights to the Australian application and all patents resulting thereof to the applicant by virtue of an assignment deed of April 18, 1989

Delete
paragraphs
3 and 4
for Non-
Convention
application)

3. The basic application(s) as defined by Section 141 of the Act was(were) made as follows:

Country ..Norway..... on 19 October 1987.....
in the name(s) J.E. EKORNES A/S.....
and in on
in the name(s)
and in on
in the name(s)

4. The basic application(s) referred to in the preceding paragraph of this Declaration was(were) the first application(s) made in a Convention country in respect of the invention the subject of this application.

Place and
date of
signing)

Declared at IKORNES this 18. day of APRIL 1989

Signed: Einar Ekornes.....
Position: DIRECTOR (DIRECTOR).....

(12) PATENT ABRIDGMENT (11) Document No. AU-B-25456/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 606477

(54) Title
ARRANGEMENT IN AN ADJUSTABLE CHAIR

International Patent Classification(s)
(51)⁴ **A47C 001/032**

(21) Application No. : **25456/88**

(22) Application Date : **14.10.88**

(87) WIPO Number : **WO89/03648**

(30) Priority Data

(31) Number	(32) Date	(33) Country
874362	19.10.87	NO NORWAY

(43) Publication Date : **23.05.89**

(44) Publication Date of Accepted Application : **07.02.91**

(71) Applicant(s)
J.E. EKORNES A/S

(72) Inventor(s)
JOSTEIN EKORNES

(74) Attorney or Agent
GRANT ADAMS & COMPANY, GPO Box 1413, BRISBANE QLD 4001

(56) Prior Art Documents
WO 87/03182
US 3947069
US 3773383

(57) Claim

1. A device in a chair having a back member, a seat member, frame means for supporting said back and seat members, fixed pivot means between said back and said frame means for mounting said back member for pivotal movement thereabout, slide means between said frame means and said seat member for mounting said seat member for sliding forward and rearward in substantially horizontal positions, first articulation means comprising first movable pivot means for pivotally interconnecting said back and seat members for altering the relative angular positions therebetween from and to erected and recline positions and for pivoting said back member between vertical and rearwardly inclined positions with said first movable pivot means movable along a radius fixed by said fixed pivot means and said slide means, the improvement in which said slide means

(11) AU-B-25456/88
(10) 606477

-2-

comprises curved sliding means mounted below said seat member a predetermined distance, second articulation means comprising second movable pivot means interconnecting said curved sliding means and said seat member for altering the relative angular positions therebetween and for pivoting said seat member along said substantially horizontal positions with said slide means moving along a radius larger than the radius along which said first articulation means moves.

PCT

WORLD

OPI DATE 23/05/89

APPLN. ID

25456 / 88

AOJP DATE 29/06/89

PCT NUMBER PCT/N088/00079

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification

A47C 1/032

A1

(11) International Publication Number:

WO 89/ 03648

(43) International Publication Date:

5 May 1989 (05.05.89)

(21) International Application Number: PCT/N088/00079

(22) International Filing Date: 14 October 1988 (14.10.88)

(31) Priority Application Number: 874362

(32) Priority Date: 19 October 1987 (19.10.87)

(33) Priority Country: NO

(71) Applicant (for all designated States except US): J.E. EKORNES A/S [NO/NO]; N-6222 Ikornnes (NO).

(72) Inventor; and


(75) Inventor/Applicant (for US only): EKORNES, Jostein [NO/NO]; N-6222 Ikornnes (NO).

(74) Agent: OSLO PATENTKONTOR A/S DR. ING. K.O. BERG; P.O. Box 7007 H, N-0306 Oslo 3 (NO).

(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), DK, FI, FR (European patent), GB, GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.

Published


With international search report.

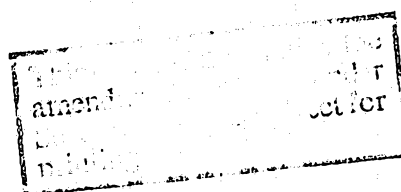

(54) Title: ARRANGEMENT IN AN ADJUSTABLE CHAIR

(57) Abstract

The invention relates to a device in a chair, especially an adjustable chair (1aa) having an articulation means (7) between a seat member (3) a back rest member (8a), so as to allow an alteration of the angular position therebetween, the alteration taking place by pivoting said back rest member (8a) around a pivoting point (8) whilst said seat member (3) is displaced along a predetermined sliding path. The invention is characterized in that the device comprises one or more curved sliding means (1), the radius of curvature (R) of said sliding means (1) or the center (4) thereof being arranged in accordance with given functional properties of said chair (1aa), which in turn means that for example an increase of the tangential angle (α) of the sliding means (1) may compensate for the increased weight from a person on the back rest member (8a) as the latter is taking a more reclined position, for thereby providing a chair which is in balance in all positions and rendering smaller friction than compared with prior art models.

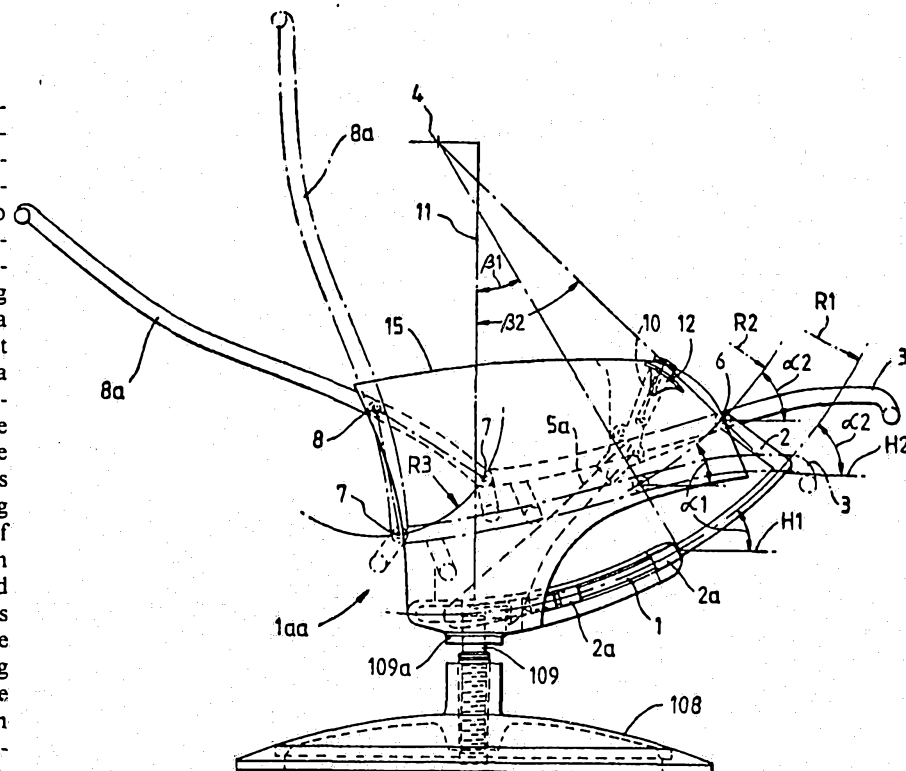

Arrangement in an adjustable chair.

Field of the invention

5

The present invention relates to a device in a chair, especially an adjustable chair comprising an articulation means between a seat member and a back rest member, so as to allow an alteration of the angular position therebetween.

10

Prior art

15

A chair of this type is for example known from NO patent specification 125 836.

20

From SE published and printed specification 388 118 there is known such a chair having a back rest which is linked together with a seat member, the seat member on its lower side being equipped with straight metal hoops which can pass through a bearing cup provided fixedly on the chair frame, but pivotably in relation thereto. In order to maintain the chair in the sitting position having the back rest in an upright position there is on the metal hoop provided a wedge-shaped element wedging in the opening of the bearing cup.

25

30

From Finnish printed and published specification 72865 there is known a device for regulating and locking the back member of a chair, there being provided on the seat member a straight guiding rod which at its one end is linked together with the front portion of the seat, and which at its other end freely protrudes through a recess in a lockable bearing cup. The locking means comprises a handle which with its one end can be pivoted into and out of the recess in the bearing cup for thereby catching or releasing the guiding bar in the recess.

35

From German printed and published specification 2 104 944

there is known a flip up device which can be used in connection with larger and heavier chairs, for example chairs in cosmetic treatment, dentist chairs, etc., there being for the various slanted positions of the chair achieved the same point of gravity for the chair and the user relative to the subframe of the chair. There is used a curved guide rail which can move between rollers, and which resides in a box-shaped house mounted on the seat member of the chair. In various positions of the back rest member and of a person, the chair will adjust itself to a position in which the point of gravity is the same, since the seat member then will adjust itself such that the point of gravity will be right below the seat member.

However, nothing is said in this German publication about an articulation means between the seat member and the back rest member, let alone a pivot point on the back rest member around which the back rest member can be pivoted by the user in order to bring the back rest member to various angular positions, i.e. how various moments will be exercised by the body of the user depending on the inclination of the back rest member related to said pivot point, and how the seat member is to be displaced along a specific guiding path.

From EP-0 096 273-A3 there is known a chair, wherein the back rest member can be pivoted about a fixed point on the chair frame, the back rest member at the bottom being linked to the seat which can slide along a guide bearing. In a given embodiment the guide bearing may take the form of curved guiding elements which are mounted on the seat, and which are guided in corresponding tracks provided stationary on the chair frame.

From US 4 607 883 and US 4 660 884 there are also known chairs having an articulation means between a seat member and a back rest member. However, neither are there here given any instructions for how it is possible with simple expedients to provide a double sliding path rendering larger options as regards versatility in the application facilities

for such chairs.

Brief discussion of the invention

In view of this prior art, an object of the present invention is to provide a device rendering larger possibilities for adjusting the force necessary for changing the relative position between seat member and back rest member, an objective of the invention also being to give instructions for a regulating mechanism which further improves the operational facilities of the chair.

In other words, the invention aims at providing a chair which so to say independently of the geometry of the chair brings forth a predetermined resistance when the chair is adjusted, ie. a resistance which is most favourable for the user when changing the sitting position from an upright position to a backwardly inclined or lowered position.

This is achieved with a device in a chair having a back member, a seat member, frame means for supporting said back and seat members, fixed pivot means between said back and said frame means for mounting said back member for pivotal movement thereabout, slide means between said frame means and said seat member for mounting said seat member for sliding forward and rearward in substantially horizontal positions, first articulation means comprising first movable pivot means for pivotally interconnecting said back and seat members for altering the relative angular positions therebetween from and to erected and recline positions and for pivoting said back member between vertical and rearwardly inclined positions with said first movable pivot means movable along a radius fixed by said fixed pivot means and said



slide means, the improvement in which said slide means
comprises curved sliding means mounted below said seat
member a predetermined distance, second articulation
means comprising second movable pivot means
5 interconnecting said curved sliding means and said seat
member for altering the relative angular positions
therebetween and for pivoting said seat member along
said substantially horizontal positions with said slide
means moving along a radius larger than the radius along
10 which said first articulation means moves.

In other words, the invention is based on the fact that
the notional center of the curved sliding means can be
adjusted up from or down towards the chair, a lowering
including a



reduction of the radius of curvature of the sliding means and therefore a large difference in the slanting angle of the sliding means when the back rest member is moved from a raised to a lowered position.

5

Appropriately, the present device may be included in an adjustable chair, such that a displacement of the notional center of the sliding means rearwardly towards the back rest member, involves an increase in the total angle, i.e. an overall steeper angle of the sliding means in all positions of the back rest member.

10

Brief discussion of the drawings

15

Fig. 1 is a diagrammatic sideview of an embodiment of a chair of the present type, wherein a first embodiment of the device according to the invention has been implemented.

20

Fig. 2 and 2a are views similar to Fig. 1, but illustrate the chair in a reclined position.

Fig. 3 and 3a illustrate on a larger scale details of the friction and height adjustment means.

25

Fig. 4 is a view as seen from the front of the chair illustrated in Fig. 1, 2 and 2a.

30

Description of preferred embodiments

With reference to Fig. 1, 2 and 2a which illustrate an embodiment of a chair of the present adjustable type, it should be noted that Fig. 1 illustrates an embodiment of the present chair, which here is generally designated by reference numeral 1aa, and which is shown in an upright position, i.e. in which position a back rest member 8a takes a substantially upright position and a the seat member 3 takes a

35

substantially horizontal position, whereas Fig. 2 and 2a illustrate a reclined or stretched-out position of the seat member and the back rest member, the seat member 3 still having a substantially horizontal position but the back rest member 8a having been displaced from its previous erect position to an approximately slightly slanted horizontal position.

The embodiment of the adjustable chair 1aa according to the invention, in which the present device can find its application, comprises a back rest member 8a and a seat support member 3, the back rest member 8a and the seat member 3 being interconnected to each other by means of an articulation means 7 for enabling alternating angular positions between said back rest member 8a and seat support member 3. Said members 8a, 3 are provided on a subframe 109a which in turn is supported on an adjustable column 109 provided on a base plate 108.

On the subframe 109a there are provided slide bearings 2a through which can be displaced one or more sliding means 1, taking the form of one or more curved arcs, preferably circular arcs, which at its or their front end is provided with an arm element 2 extending from the sliding means 1 towards the seat support member 3, the sliding means 1 and its arm 2 preferably substituting an integral unit, but being connected to the seat support member 3 through a second articulation means 6.

As further indicated, especially in Fig. 4, the sliding means 1 here comprise two substantially parallel sliding elements, but it is to be understood that fewer or lesser sliding elements can of course be used.

The center 4 of the curved sliding means 1 is indicated as a notional point 4 in Fig. 1, 2 and 2a, it being understood that if the sliding means 1 are provided with a constant radius of curvature, this notional center 4 will be a fixed

point for this type of embodiment.

5 The function of the chair 1aa is such that when the top of the back rest member 8a is pressed backwards or forwards, or the seat member 3 is pushed forwards or rearwards, then the back rest member 8a will turn around the pivot point 8 which is stationary in relation to the subframe 109a. The articulation means 7 between the seat member 3 and the back rest member 8a will then move along a substantially circular path having its center in the pivot point 8, and a radius designated R3.

10 The second articulation means 6 on the seat member 3 will due to its connection with the arm 2 integral with the sliding means 1, move along a circular path having its notional center at the previous discussed point 4, but having a radius of curvature designated R2.

15 The sliding means 1 which controls the movement of the seat member 3, will also in this case when the sliding means 1 represent circular arcs, have the center of radius located at the same point 4, but the distance therefrom to the sliding means 1 will be a radius designated R1.

20 It is to be understood that the sliding means 1 are guided in said slide bearings 2a which are more or less stationary arranged in relation to the subframe 109a, but have associated therewith friction means 5 which are also arranged relative to the subframe 109a and can be operated by the user through an operating means 12 connecte through a transmission 5a from an appropriate place, for example on an arm rest 15.

25 When the back rest member 8a is displaced backwards as illustrated in Fig. 2 and 2a the tilting angle β , i.e. the angle between a vertical plane 11 and a radius R1 or R2 running from the notional circular point 4 to the articulation point 6 on the seat member 3 will increase from β_1 to β_2 .

At the same time the angle α , i.e. the angle between a horizontal plane H and a tangent to the curved sliding means 1 substantially in the area of the second articulation point 6 between the arm 2 of the sliding means 1 and the seat member 3, will increase from α_1 to a larger angle α_2 .

The advantages of introducing such a sliding means 1 which will have its tangential angle α changed depending on the angular position between the seat member and the back rest member, is to the fact that the force required by the user to effect this change in angular position, can be regulated depending on whether the user is to carry out an inclining or reclining movement. When the user is sitting in a substantially erect position, i.e. with an approximately 90° inclined position between back and seat, the embodiment according to Fig. 1, 2 and 2a will render a small tangential angle α for the sliding means 1 in the area of the articulation means 6 or in the area of the slide bearings 2a, which is to the fact that the user have to exercise a relatively small force in order to change the angular position between seat member and back rest member, which is favourable since it is, in connection with prior art adjustable chairs, usually heavy to move the chair when sitting in an upright position.

In reclined position of the chair 1aa, i.e. when the back rest member 8a is fully lowered, it is usually, in connection with prior art adjustable chairs, too easy to perform a backwards tilting movement, but in accordance with the present invention and the present arrangement, the tangential angle α of the sliding means 1 will become larger the larger the angle of inclination of the back rest member 8a will be. This in turn involves that the seat member 3 has to be lifted more and more steeper as the back rest member 8a is lowered, and this raising of the seat member for example from a level H1 to a level H2, including the lower part of the body of the user, will compensate for the weight of the back of the user resting on the back rest member 8a.

In other words, the change in tangential angle α of the sliding means 1 will compensate for the increased effect of the lever arm represented by the back rest member 8a and the upper part of the body of the user, the weight of which will create a moment by pressing against the upper part of the back rest member 8a with an increased arm proportional to the increasing tilting angle of the back rest member (8a).

As an overall concept this variation in tangential angle α and inclination angle β will bring forth a chair according to the present invention, which in all positions will function in a balanced state, provided the friction means are appropriately adjusted, this balanced position rendering a relatively lower friction than compared with prior art adjustable chairs of any model.

An important feature of the present invention is to the fact that if it is desired to change the individual functional properties of the chair, this can be done by reducing or increasing the length of the radius R2, i.e. reduce or increase the radius of curvature of the sliding means 1. In accordance therewith there is then achieved a small or a large difference in the tangential angle of the sliding means in the vertical and the reclined position of the back rest member 8a. Likewise, by increasing or reducing the distance L between the pivoting point or the notional center 4 of the sliding means 1 and the vertical line 11 extending through the central line of the support column 109 of the chair 1aa, it is possible to increase or reduce the average tangential angle of the sliding means 1.

Experience has indicated that in such an adjustable chair including a friction means 5 it is more easy to achieve an appropriate adjustment of the friction and a smooth sliding during adjustment of the chair if the chair is provided with a sliding means having a relatively long extension, and also to achieve a smooth sliding velocity along the slide bearings as the chair is having its angular position altered. A

disadvantage which may be experienced in this connection is a large movement of the seat member and a large difference in level of the seat in the various positions.

5 In the present design the length and the curvature of the sliding means can be regulated without involving an increase in the length of movement of the seat member. This is mainly achieved by giving the sliding means 1 a relatively large radius of curvature and by mounting said sliding means below
10 the seat member 3. By this arrangement it is also achieved a difference between the adjusting velocity of the seat member 8a and the sliding means 1 by keeping the angular velocity of the tilting angle β constant, but making the radius R1 of the sliding means larger than the radius R2 of the seat
15 member 3. By increasing the difference L2 between R1 and R2 the difference in adjusting velocity and sliding length at a point on the sliding means 1 and the seat member 3, for example at point 6a and point 6, respectively, will increase.

20 By systematically changing said distances and numeric values, as well as by changing the radius R3 and the distance between the first articulation means 7 and the second articulation means 6, it is possible to manufacture a chair
25 having very favourable sliding properties and functioning in a balanced mode with very low friction, it also been possible to produce all desired relations between the operating force which has to be effected in the vertical and declined position of the chair, respectively.

30 In the present case there have been used two sliding means 1x and 1y as illustrated in Fig. 3, 3a and 4, the center of each sliding means having its own notional center as discussed previously. Whether there are used two or more or even
35 one sliding means, the chair will function so as to allow varying operating characteristics by moving said centers up from or down towards the seat member, a reduction of the radius of the sliding means meaning that there is achieved a

large difference in the tangential angle of the sliding means in the erected position and the declined position of the back rest member, respectively.

- 5 It is to be understood that the friction means can be made as a hidden arrangement, it being observed that no jamming should be risked at any place between moving parts.

10 In Fig. 3 and 3a there is illustrated a suggested braking mechanism in which a wire 5a in a stocking, as indicated in the drawings, is contemplated used for compressing the friction means 5 in the direction of the arrow A. By pressing said friction means 5 a pressure is transferred against the two curved sliding means 1x, 1y, and this pressure is to be
15 regulated through the operating means 12 on the arm rest 15. It is also possible to use other forms for locking mechanisms. It is also to be understood that the chair can operate satisfactorily by using only one sliding means and a friction means pressing on the outside of said single sliding
20 means.

The friction means 5 thus comprises an elastic element 107 which through a force in the direction of the arrow A is subjected to a structural change so as to expand substantially in a direction perpendicular to the direction of the
25 arrow A, for thereby pressing a breaking block 107a, 107b against a breaking surface 4c of the sliding means 1x, 1y, respectively.

30 The embodiment of a chair illustrated in the drawings is also equipped with an adjustable supporting column 109, and the operation thereof is indicated by reference numeral 10, said means preferably being arranged on the arm rest 15, and operating through a wire 6a.

35 In Fig. 4, which is a view as seen from the front of the chair according to Fig. 1, 2 and 2a it appears that the seat supporting member 3 is comprised by a transverse member 3a which at its center portion is provided with two of the pre-

viously discussed second articulation means $6x$, $6y$, each of which is connected to an arm element $2x$ and $2y$, respectively, merging into a curved sliding means $1x$ and $1y$, respectively, which in turn are supported in a slide bearing $2a$ and $2b$, respectively, substantially stationary affixed to the subframe $109a$ of the chair $1aa$.

In such a structure the seat member 3 will consequently move along a first circular path having a first radius $R2$, whereas the sliding means $1x$, $1y$ which are provided at a distance $L2$ from the seat member 3 will move along a second radius $R1$ which is larger than said first radius $R2$.

It is to be understood that the shape of any sliding means according to the present invention can have a varying curvature along its extension, for example including a steeper curvature at its rear end, i.e. at the end closest to the back rest member of the chair. In connection with such an embodiment including a variable curvature of the sliding means, it is to be understood that the slide bearings carrying and guiding said variable curvature sliding means must be arranged pivotably around an axis substantially perpendicular to the sliding means.

It is to be understood that in any embodiment, whether one, two or more parallel sliding means are used, each sliding means could be supported by two shorter guiding means or bearing means arranged at an appropriate mutual spacing. Depending on whether the sliding means is or are given a varying curvature, said single guiding means or multiple guiding means may be arranged stationary and pivotably, respectively, relative to a fixed structure of the chair.

Further, it is to be understood that the size of the first radius $R2$ may be in the range of $0,5-1,5$ m, whereas the length of the second radius $R1$, could be $0,3-0,5$ m larger.

In other words, it is possible within the scope of the present invention to arrange a curved sliding means 1 below

12

the path followed by the seat member 3 during the adjustment thereof, and to regulate the length and the curvature of said sliding means in a simple and practical way in accordance with the various operating properties of the different chairs.

5

10

15

20

25

30

35

CLAIMS:

1. A device in a chair having a back member, a seat member, frame means for supporting said back and seat members, fixed pivot means between said back and
5 said frame means for mounting said back member for pivotal movement thereabout, slide means between said frame means and said seat member for mounting said seat member fo sliding forward and rearward in substantially horizontal positions, first articulation means
10 comprising first movable pivot means for pivotally interconnecting said back and seat members for altering the relative angular positions therebetween from and to erected and recline positions and for pivoting said back member between vertical and rearwardly inclined
15 positions with said first movable pivot means movable along a radius fixed by said fixed pivot means and said slide means, the improvement in which said slide means comprises curved sliding means mounted below said seat member a predetermined distance, second articulation
20 means comprising second movable pivot means interconnecting said curved sliding means and said seat member for altering the relative angular positions therebetween and for pivoting said seat member along said substantially horizontal positions with said slide
25 means moving along a radius larger than the radius along which said first articulation means moves.

2. Device as claimed in Claim 1, in which an arm rest at the side of said seat member forms a part of said frame means and extends above said seat member and
30 in which the curved sliding means have a radius of curvature which is larger than the distance from the level of the seat member to the level of said arm rest.

3. Device as claimed in Claim 1 or Claim 2, in which the sliding means have a radius of curvature, a
35 notional center thereof being so high above the seat member that a tangential angle of the sliding means is



changed within relatively small limits when the seat member is displaced from an erected to a more reclined position.

4. A device as claimed in Claim 1 or Claim 2, in which the sliding means have a radius of curvature having a notional center which is so close to the back rest member that a tangential angle of the sliding means changes rapidly towards a higher value when the seat member is displaced by pivoting the back rest member from an erected to a more reclined position.

5. A device as claimed in Claim 3, in which the radius or curvature of the sliding means passes through a notional centre which is located a distance behind a vertical plane through a central column of the chair, a further displacement of said notional center rearwardly from said vertical plane resulting in an overall increase of the tangential angle of the said sliding means in all positions of said chair.

6. A device as claimed in Claim 4, in which the radius of curvature of the sliding means passes through a notional center which is located a distance behind a vertical plane through the central column of the chair, a further displacement of said notional center rearwardly from said vertical plane resulting in an overall increase of tangential angle of said sliding means in all positions of said chair.

7. Device as claimed in Claim 1, in which the sliding means comprises one or more curved sliding rails which, at their front end, are provided with a connection arm which arms are joined to said seat member by means of said second articulation means.

8. Device as claimed in Claim 1, in which the shape of the sliding means has a varying curvature along its extension.

9. Device as claimed in Claim 1, in which the length of said first radius is in the range of 0.5 to



1.4 metres, whereas the length of the second radius is 0.3 to 0.5 metres larger.

10. Device as claimed in Claim 1, in which the device also comprises a first operating mechanism for
5 operating a friction element influencing said sliding means, and comprising, for example, a cable extending from said operating mechanism.

11. Device as claimed in Claim 10, in which the friction element comprises an elastic element, which,
10 under the influence of a force is subjected to a structural change for expanding in a direction towards a breaking surface of the sliding means.


12. Device as claimed in Claim 11, in which the elastic friction element is arranged between two sliding
15 means and by the influence of a pressure initiated by said first operating mechanism will have its centre zone compressed for thereby pressing the side zones towards a respective breaking surface of the sliding means.

13. Device as claimed in Claim 12 in which the
20 device also comprises a gas column carrying said sliding means and a second operating mechanism for operating said gas column.



2/4

Fig. 2.

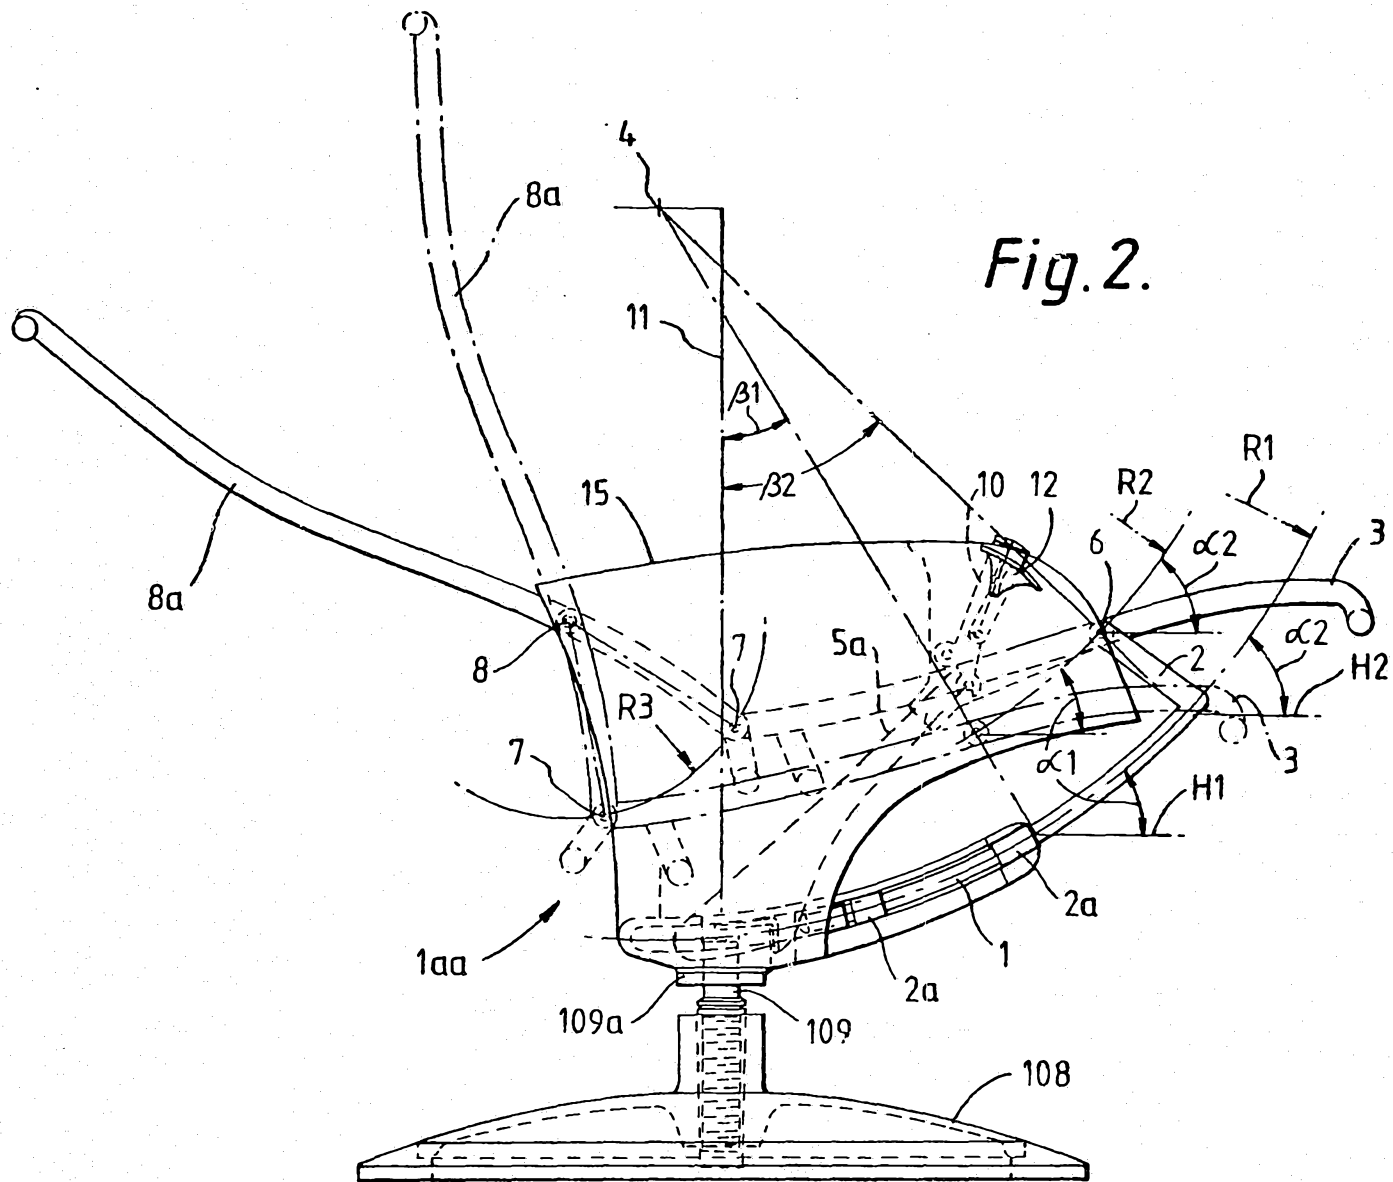

- 3/4

Fig. 3.

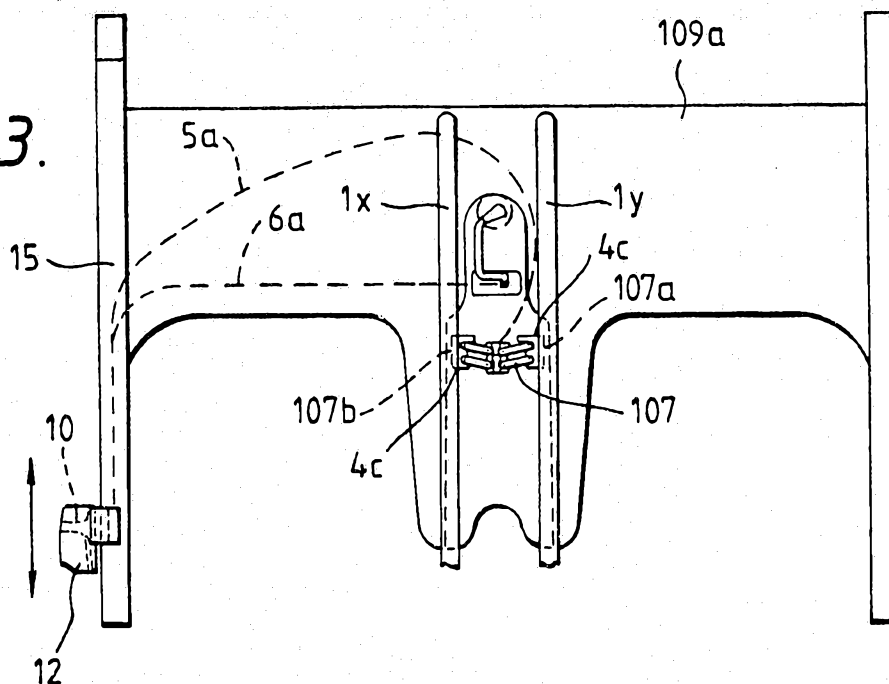


Fig. 4.

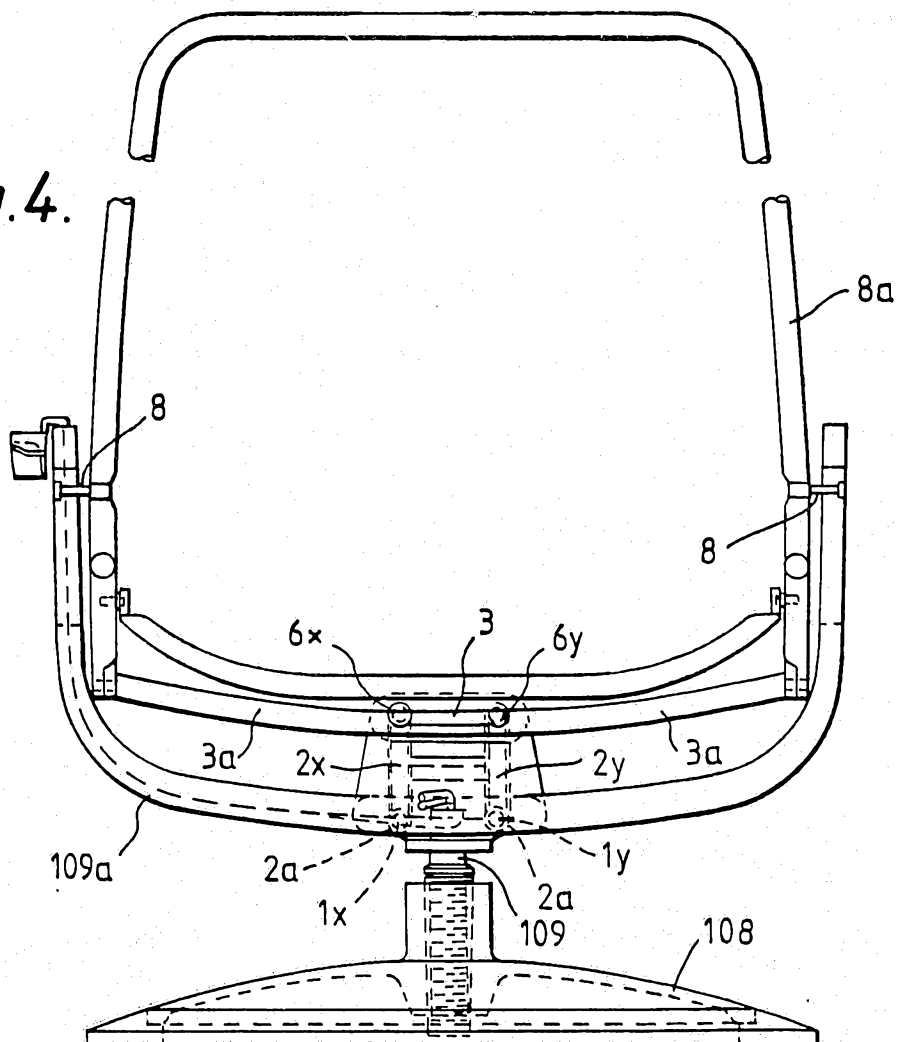


Fig.3a.


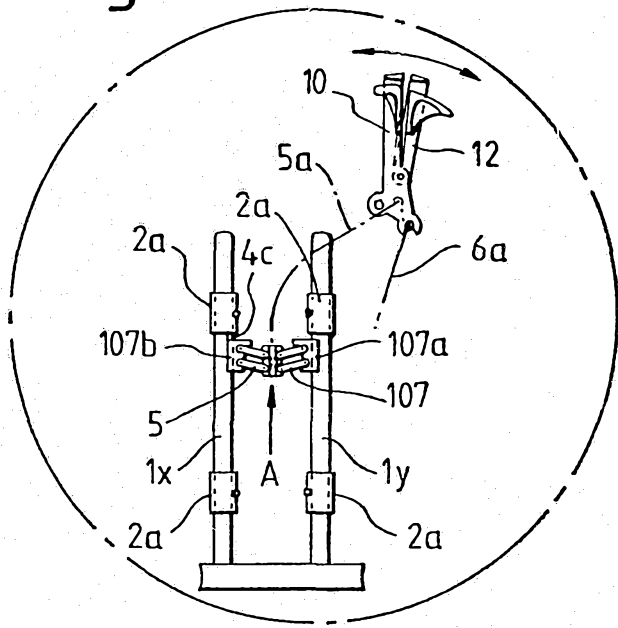


Fig.2a.

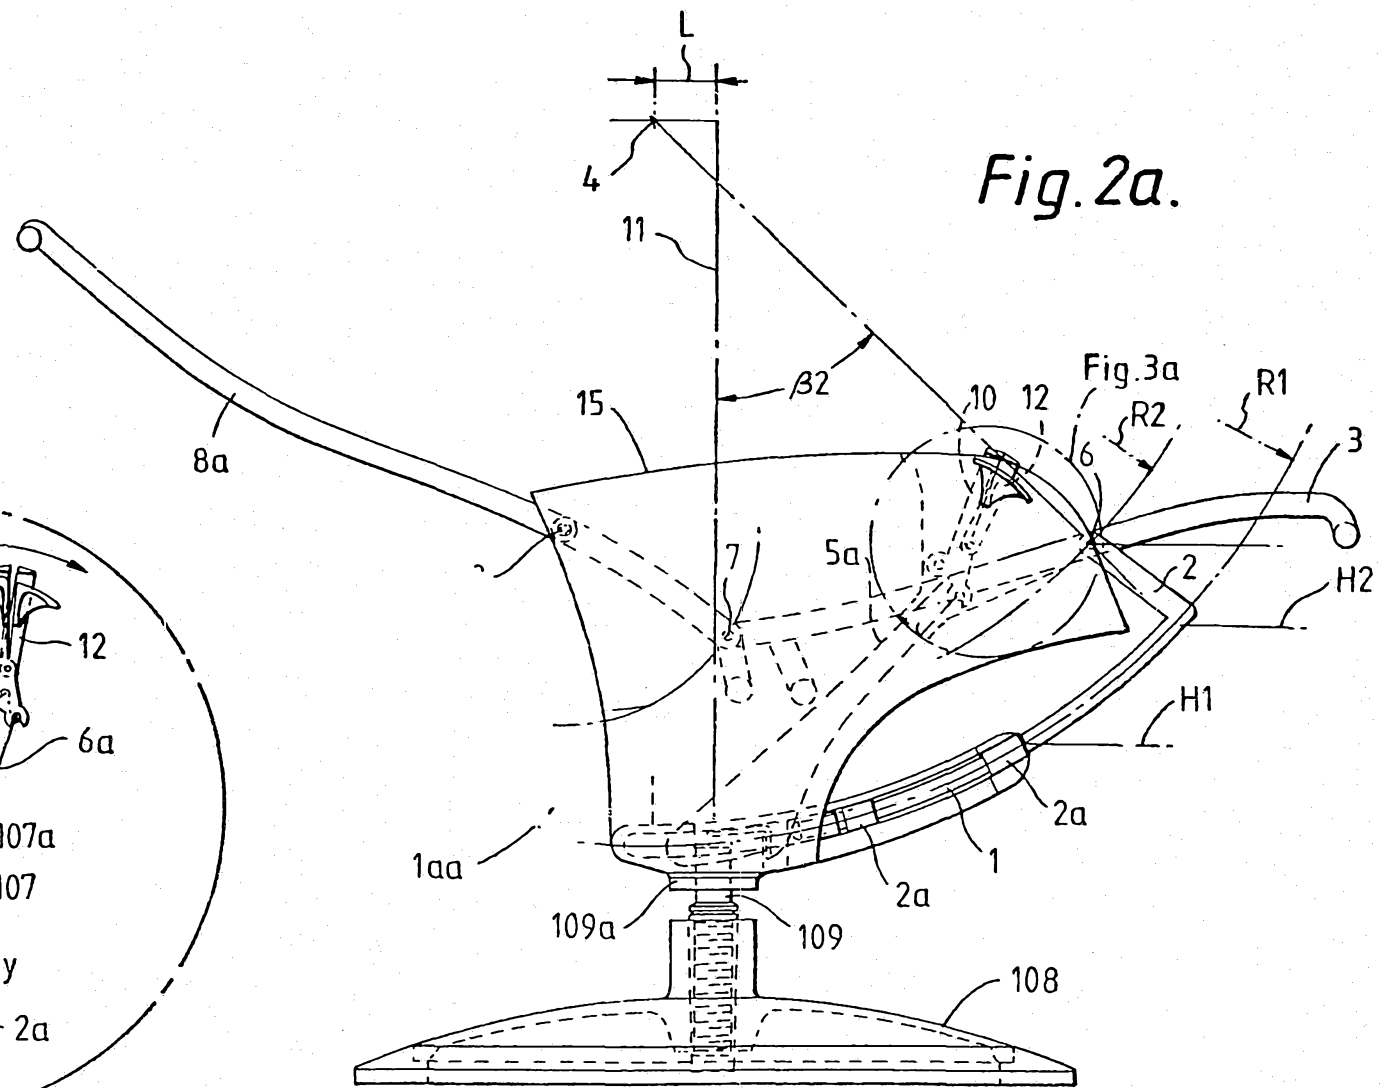

H/H

INTERNATIONAL SEARCH REPORT

International Application No PCT/NO88/00079

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁴		
According to International Patent Classification (IPC) or to both National Classification and IPC ⁴		
A 47 C 1/032		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbol:	
IPC 4 US C1	A 47 C 1/03 - 1/034 297:315-322	
Documentation Searched other than Minimum Documentation to the extent that such documents are included in the fields searched ⁸		
SE, NO, DK, FI classes as above		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	WO, A1, 87/03182 (SAARAINEN, JORMA) 4 June 1987 & FI, 72865	1, 10-13
A	GB, A, 470 122 (JOSEF TELTSCHER AND OSKAR ARMIN KRISTIANPOLLER) 10 August 1937	1
A	US, A, 3 947 069 (LUSCH) 30 March 1976 & SE, 388118	1, 10-13
A	US, A, 3 773 383 (EKORNES) 20 November 1973 & NO, 125 836	1, 10-13
⁹ Special categories of cited documents: ¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
1989-01-18	1989-01-23	
International Searching Authority	Signature of Authorized Officer	
Swedish Patent Office	Nils Andersson	