



AU9643211

(12) PATENT ABRIDGMENT (11) Document No. AU-B-43211/96
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 697957

- (54) Title
METHOD OF PRODUCING STRIPS OF ELASTIC FILM AND AN ABSORBENT PRODUCT INCORPORATING SUCH STRIPS
- International Patent Classification(s)
(51)⁶ **B29C 055/00 A61F 013/15 B26D 003/00 D01D 005/42**
- (21) Application No. : **43211/96** (22) Application Date : **19.12.95**
- (87) PCT Publication Number : **WO96/19332**
- (30) Priority Data
- (31) Number (32) Date (33) Country
9404436 21.12.94 SE SWEDEN
- (43) Publication Date : **10.07.96**
- (44) Publication Date of Accepted Application : **22.10.98**
- (71) Applicant(s)
SCA MOLNLYCKE AB
- (72) Inventor(s)
ROBERT KLING
- (74) Attorney or Agent
WATERMARK PATENT & TRADEMARK ATTORNEYS , Locked Bag 5, HAWTHORN VIC 3122
- (56) Prior Art Documents
DE 3604703
GB 2134068
AU 83121/87
- (57) Claim

1. Method of producing a flexible absorbent article having an elasticated area, starting from a single sheet of film, wherein said single sheet is fed in a longitudinal forward direction (X) up to a severing zone (b), in which said sheet is severed longitudinally into a plurality of strips, said plurality of strips then being fed further in the forward direction simultaneously whilst being stretched in said longitudinal direction to thereby reduce their width (e) and thickness, wherein said film is an elastic film and wherein said plurality of strips is applied to a sheet of an absorbent article in an area which is to be elasticated, said strips being fixedly attached to said absorbent article either simultaneously with their application or shortly thereafter.

7. Flexible absorbent article for absorption of human exudate, said article having one or more elasticated zones in which a plurality of elongated elastic members have been attached, characterized in that each of said elastic members includes a thin flat strip of elastic film each strip having a substantially constant width along its entire length and being separated from an adjacent strip by a distance (g', g'', g''', g''') which is substantially constant along the length of each strip.



AU9643211



PCT)

(51) International Patent Classification 6 : B29C 55/00, B26D 3/00, D01D 5/42		A1	(11) International Publication Number: WO 96/19332
			(43) International Publication Date: 27 June 1996 (27.06.96)
(21) International Application Number: PCT/SE95/01534		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).	
(22) International Filing Date: 19 December 1995 (19.12.95)			
(30) Priority Data: 9404436-9 21 December 1994 (21.12.94) SE			
(71) Applicant (for all designated States except US): AB MÖLNLYCKE [SE/SE]; S-405 03 Göteborg (SE).		Published With international search report. With amended claims.	
(72) Inventor; and (75) Inventor/Applicant (for US only): KLING, Robert [SE/SE]; Vävaregatan 13, S-511 63 Skene (SE).			
(74) Agents: GRAUDUMS, Valdis et al.; Albihn West AB, P.O. Box 142, S-401 22 Göteborg (SE).			
(71) SCA MÖLNLYCKE AB			

(54) Title: METHOD OF PRODUCING STRIPS OF ELASTIC FILM AND AN ABSORBENT PRODUCT INCORPORATING SUCH STRIPS

(57) Abstract

The present invention relates to a method of producing a plurality of strips starting from a single sheet (1) of elastic film, wherein said single sheet (1) is fed in a longitudinal forward direction (X) up to a severing zone (b), in which the sheet is severed longitudinally into a plurality of strips (2-6), said plurality of strips then being fed further in the forward direction, while simultaneously being stretched in said longitudinal direction to thereby reduce their width (e) and thickness. The invention also relates to an absorbent product which makes use of a plurality of strips which are flat, thin and rectangular in one or more elasticated areas of said product to provide good and uniform breathing ability along said elasticated area(s).

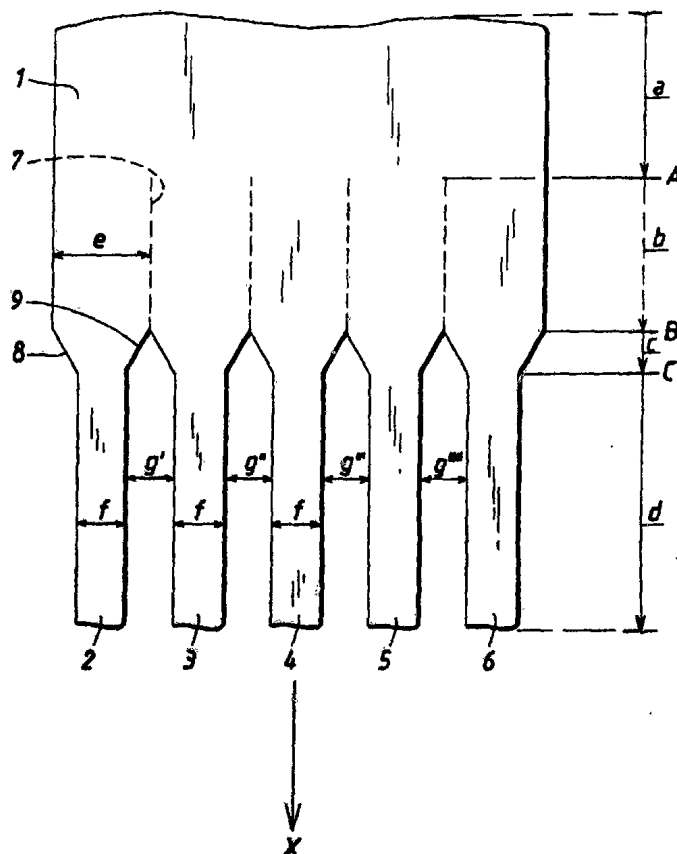

5

Title Method of producing strips of elastic film and an absorbent product incorporating such strips.

Field of the invention

10

The present invention relates to a method of producing a plurality of strips of elastic film starting from a single sheet of elastic film and to an absorbent article for absorbing human exudate, in which said strips are attached in an area to be elasticated.

15

Prior art

20

In some prior art absorbent articles e.g. US-A-3 860 003, a strip of rubber material is applied in a zone of the article which is to be elasticated so that it affords a better fitting for the user and thus provides increased comfort as well as helping to prevent leakage. Such elasticated zones however give rise to many problems such as pressure on the wearer's leg due to the strip which is kept as narrow as possible to save material, yet still wide enough to give a sufficient tension to provide a good fit in all positions of movement. A further problem arises in that the strip itself is made of rubber and thus does not provide a "breathable" material (i.e. a material constructed so as to allow moisture from the body's skin to escape). Since the strip is relatively wide, this can often result in certain areas of the body often being wet which may result in soreness, loss of the skin's resistance to abrasion and even infection.

30

35

To solve this problem of moisture release, it is however known in the art to use films of elastic material which are able to "breathe". Such films are however more expensive and offer only a limited breathing ability in the best of cases. Although relatively thin strips are available (e.g. down to about 6mm width), handling problems result when

40

trying to use such small strips which makes them impractical for this purpose. Moreover when supplied, each single roll of thin strip must be separately packed which results in wastage as well as greater expense.

5

As a solution to pressure zones on the wearer's thighs and to improve moisture release, the document US-A-4 687 477 proposes a solution which replaces the single wide strips in the elasticated leg areas of an absorbent garment by a series of between three and forty-five rubber strands laid side-by-side along the areas to be elasticated. Whilst said rubber strips allow good breathing ability due to the spaces between them, rubber however has the disadvantage of being quite a heavy material. Additionally, rubber is a moulded product and thus a certain thickness has to be maintained in order to obtain a level of uniformity in the rubber strand which provides adequate resistance against breakage. Such thickness in turn increases weight even further. Far more importantly however, since the strips of rubber must be divided later into separate strands and moved laterally apart with respect to each other for application to the product, the mouldings are formed as individual moulded strands of rubber which are held together in a manner which is intrinsically separable. This intrinsic separability is brought about by a weak rubber fusion between adjacent strands, for example by spraying talcum powder onto the individual strands and then allowing a light contact between them. This requirement for separability is however very problematic since the weakness of the inter-strand bond is difficult to control accurately. If the strength is too low (i.e. a very weak bond) this may result in premature splitting of the joint between the strands and, if it is too strong, one of the strands may be torn during attempted separation from the adjacent strand. In either case, the resultant loose strands become difficult to deal with and, when this

10

15

20

25

30

35

happens during operation in the machine, the resultant stoppage is very costly, especially in the field of absorbent article manufacture where the production speed is very high (e.g. a belt speed of about 200m/min).

5

The present invention thus seeks to provide a means of elasticsation which gives good breathing ability in the area of elasticsation, is thin and light and which can be handled without the risk of premature separation of the strands. Thus, when the strips are applied to an absorbent article, the article can be made lighter and cheaper than hitherto.

10

Summary of the invention

The aforementioned problems are solved by the features of the invention as defined in the method of claim 1 and the product of claim 7.

15

Preferred features of the invention are defined in the dependent claims.

20

By adopting the method of the invention, the individual strips produced remain combined as a single sheet of uniform-thickness film having no joints formed on the material before severing into individual strips. This allows easier handling and the avoidance of any measures concerning joint strength control between the individual strips. The film sheet and resultant strips can thus be very thin (e.g. between 5 and 120 μ) since there are no separable joints. Moreover, merely by stretching the film after passing through a severing zone, each of the resultant strips becomes narrower and simultaneously forms an intermediate free zone between the strips without any lateral movement. This zone will allow moisture to escape in an elasticsated zone of an article, on which the strips are subsequently applied.

25

30

35

The finished absorbent article fitted with such strips will thus have "breathable" elasticated portions which can thus be made very lightweight in comparison to prior art articles.

5

Brief description of the drawing

A preferred embodiment of the invention will now be described in more detail with reference to the accompanying figure, in which an enlarged, schematic plan view of a sheet of elastic film is depicted during processing from being an undivided elastic film through to being a plurality of separated and stretched strips for subsequent attachment to an absorbent article.

15

Detailed description of a preferred embodiment

A single sheet 1 or web of air-impermeable elastic film is continuously passed from its supply roll (not shown) through zones "a" to "d" which will be described in more detail later.

20

The film may be of any suitable material as long as it is sufficiently elastically deformable without risk of tearing. However the film is preferably very thin e.g. with a thickness of between 10 and 150 μ in the relaxed state.

25

Examples of suitable films may be those made of elastomers based on polystyrene/elastomer block copolymers such as S-B-S, S-EB-S and S-I-S. Other suitable films may be made of e.g. EVA, EBA or EPDM. Preferably the film will also have an elastic extensibility of over 100% (i.e. it can be extended elastically by 100% or more with respect to its relaxed dimension).

30

Zone "a" ends at line "A" which is in line with the upper part of the plurality of dotted lines 7. A second zone "b", ending at line B, is a zone in which the elastic sheet is separated into a plurality of strips of width "e" by

35

severing the single sheet longitudinally at one or more locations across the width of said sheet. Said locations are denoted by the dotted lines 7 in the figure.

5 Severing of the sheet 1 may occur in several ways. For instance, a plurality of rotating circular discs may be positioned on one side of the sheet, each of said discs having a cutting edge arranged in the plane of the sheet 1 and bearing against an underlying support surface. Such
10 cutting discs may be e.g. 1 mm wide and thus may be conveniently used side by side. As an alternative an ultrasonic cutter may be used, as known per se. Other suitable cutting methods will be obvious to a person skilled in the art.

15 Whilst four separate severing locations have been depicted by each of the four lines 7, and thus producing five strips 2, 3, 4, 5 and 6, the number of locations may vary according to requirements. Each of the widths "e" will
20 preferably be the same and thus, in the shown example, each strip will have a width "e" of about 6 mm when starting from a sheet of about 30mm width.

The feeding of the sheet may occur in any suitable manner,
25 driven roller pairs nipping the sheet therebetween being one appropriate example. Such feeding means should however be appropriately arranged so that the sheet 1 is fed in its forward longitudinal direction (see arrow X) in a taught, yet substantially unstretched condition throughout the
30 zones "a" and "b", by applying only a low tension to the sheet. In this way, the film sheet 1 will thus have a substantially uniform thickness and width throughout these zones.

Zone "c" starts at line "B". Suitable means, such as a roller operated at a lower speed than the other driven roller pairs, is provided in line with line "B" and serves to provide a resistive force to the movement of the strips 2-6 downstream of line "B". The severed strips are fed in the direction X at their leading edge by suitable means such as a roller pair or by the attachment of the strips to the products on a moving production line for example.

10

Due to the feeding which is counteracted by said resistive force, each of the strips are stretched in the longitudinal direction so that their width will change from width "e" to width "f" over the length of zone "c". Each of the strips whilst in zone "c" will thus have its two edges 8 and 9 converging until width "f" is reached. Width "f" is the final width of each of the individual strips 2 to 6 to be applied to the absorbent product.

As can be seen in the figure, the contraction of the width of the strips in zone "c" causes the strips to be come spaced between adjacent edges so that a spacing of width g' is formed between the two strips 2 and 3 for example. Similarly a gap of g'' , g''' and g'''' is formed between the strips 3, 4, 5 and 6 as shown. The spacing between the strips is preferably constant throughout zone "d" such that each strip is rectangular. In a preferred embodiment, the width of the strips 2 to 6 is also constant.

The final width of the sheet of film 1 after stretching and including the spacing between each strip is given by the formula :

35

7

$$\text{Final width} = M (1 - ((1-k)/N))$$
where k = contraction coefficient M = original width of non-stretched

film

5

 N = number of strips after splitting

It should also be noted that not only the width but also the thickness of each strip will decrease during stretching. Thus it will be appreciated that the resultant strips may be very thin (e.g. down to 5 μ) and very narrow (e.g. down to as low as 1 or 2 mm) but secure production of the individual strips is possible due to the fact that the strips started as a single sheet. For present day requirements, a strip width of 3mm in stretched condition is suitable, although the strip width can be varied within large limits.

With the individual strips 2 to 6 in an extended condition (zone "d") and spaced by a distance "g", the plurality of strips is applied to a product in a zone designated to be elasticated, and attached appropriately. Moreover due to the inter-strip spacing, a breathing space has been provided between each strip without any lateral movement having been effected.

25

The invention also concerns absorbent articles such as nappies or sanitary pads which per se are well known. Such articles generally comprise an impermeable backing layer as well as a permeable top sheet designed for contact with the body, between which an absorbent is placed (e.g. a core of cellulose pulp with super absorbent polymer). In order to provide a good fit during movement, elasticated zones are provided e.g. in the portions designed to be around the wearer's thighs or waist. In order to provide an elasticated zone, the strips in zone "d" (see above) are thus attached to the article in a gathered or non-gathered

30
35

condition (in a manner known per se) and, due to their inherent elasticity, provide an elastic zone. Due to the inter-strip spacing "g", no lateral movement of the strips is required to obtain a product which thus has a breathable
5 elasticated zone which is furthermore made of a particularly light elastic film.

Since the strips may be constant in width along their length if the stretching is constant, they will thus have
10 a spacing which is constant between adjacent strips which provides a uniform breathing ability along the whole length of the elasticated zone.

Where a certain number of strips is provided on opposite
15 sides of the absorbent product, two sheets 1 will normally be used for either side to avoid any lateral movement forces on the thin strips. However, the strips may for example be divided into two sections in a non-stretched (or low-stretched) zone and then directed to either side of the
20 product before being severed and stretched. In the least preferred embodiment, the sheet may be severed and stretched into strips which are lead in respective groups to either side of the product whilst maintaining the inter-strip spacing of each group.

25 The final thickness of the strips may be as low as 5μ up to about 100μ , although a thickness of between 10μ and 40μ is suitable. Similarly, a suitable width would be between 2 and 16 mm in the stretched condition and preferably between
30 3 and 8 mm.

The elasticated zone may also be the belt or waist zone of an absorbent article.

35 In a further embodiment, strips may be provided which present a fibrous material surface on one side (which has

advantages per se). To accomplish this, the non-porous elastic sheet may also be attached to a fibrous covering material to provide a combined sheet before the severing zone and thus the fibrous material will be held
5 substantially intact by each of the continuous strips even in the stretched condition.

A further advantageous embodiment of the invention is its application in providing a split band giving good breathing
10 ability in connection with absorbent products made in a "longitudinal" direction. As is known in the art, absorbent garments may be produced lying top end (waist end) to bottom end in the direction of conveyor belt travel which is called longitudinal production, or they may lie
15 transverse to the longitudinal direction which is called transverse production.

When producing absorbent products in longitudinal production, the making of e.g. seams and the application of
20 e.g. leg elastic in the longitudinal direction is a relatively simple matter since synchronisation is uncomplicated. However, when applying a material layer or forming a seam in the transverse direction is required particular difficulties result.

25 One particular example concerns the application of waist elastic in the form of a foam sheet or the like. In order to achieve elasticsation and application of the strip in this condition, the strip has to be cut into the form of a patch or the like and then stretched before being applied
30 and attached to the waist area. EP-A-0 338 662 shows an example of an apparatus which is designed to perform such an operation. The apparatus comprises two circular discs angled to the vertical, each of said discs having pins
35 thereon for receiving one end of a pre-cut strip in the position of closest separation of the discs and, by

rotation of the discs to a position of furthest separation, the strip is stretched and can then be applied in this stretched condition to an absorbent product.

5 To provide an elasticated waistband in this area which consists of a plurality of thin strips (in the manner defined above with respect to the method of the invention) in order to provide a waist area which has a good breathing ability, is very difficult since stretching and applying of
10 many individual strips leads to many difficulties. Consequently, when using longitudinal production, the waist bands are often produced by using a broad strip of material instead.

15 With the method of the invention however, a solution to this problem is provided in that the separate waist band elastic patches can be provided with ends which are non-severed, so as to allow application to e.g. the pins of the discs (see e.g. pins 15 in EP 0 338 662), yet the middle
20 part of the elastic portion between the ends (e.g. starting from 1 or 2 cm from each end) will be severed in one or more locations (i.e. corresponding to the lines 7 in the figure). In this way, the patch can be applied, as previously, to the disc pins or the like without difficulty
25 and, upon stretching the individual strip portions of the patch will contract in width and thickness so as to provide an appearance as in zone "d" of the figure.

Thus a stretched patch will be produced on the discs having
30 two non-severed ends (such as in zone "a") joined by a plurality of strips (such as in zone "d"). This strip will then be applied in the stretched condition to the waist region and attached thereto.

35 Since the patches are discrete entities which are to be applied to the waist portion of said article, said patches

may be produced using a method as shown in only zones "a" and "b" of the figure, but where the severing means are only operated intermittently so as to sever only the required areas, leaving sequential leading and trailing non-severed ends. Such a method then allows the web of attached patches to be rolled up on to a further reel for later use if such is required. When applying the patches in longitudinal production, the reel is unwound and, by appropriate means, is cut into separate patches which are then rotated through 90° and individually attached to the pins on the rotating discs (as in EP-A-0 338 662) for stretching and application. To avoid the requirement of a 90° rotation, the patches may alternatively be severed between their ends (still leaving two non-severed ends) by use of multiple cutters which are synchronised with the movement of the film.

Whilst the invention has been described above with respect to a preferred embodiment thereof, the invention is not limited thereto and it will be appreciated that many variations of the invention are possible within the scope of the appended claims. For example, other materials and applications are possible.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. Method of producing a flexible absorbent article having an elasticated area, starting from a single sheet of film, wherein said single sheet is fed in a longitudinal forward direction (X) up to a severing zone (b), in which said sheet is severed longitudinally into a plurality of strips, said plurality of strips then being fed further in the forward direction simultaneously whilst being stretched in said longitudinal direction to thereby reduce their width (e) and thickness, wherein said film is an elastic film and wherein said plurality of strips is applied to a sheet of an absorbent article in an area which is to be elasticated, said strips being fixedly attached to said absorbent article either simultaneously with their application or shortly thereafter.
2. Method according to claim 1, wherein the width of said strips is reduced to a constant width (f) after passing through an initial stretching zone (c),
3. Method according to claim 1, or claim 2, wherein each of said strips has substantially the same constant width (f) after the initial stretching zone (c).
4. Method according to claim 3, wherein at least three strips are produced having a spacing (g' , g'' , g''' , g'''') between opposing edges of adjacent strips, and wherein said spacing is constant along the length of the strips.
5. Method according to any one of the preceding claims, wherein all of said strips are applied to said absorbent article sheet while still attached to said single sheet (1).
6. Method of producing a flexible absorbent article according to any one of the preceding claims, characterized in that said plurality of strips is applied to said sheet of said absorbent article while each strip of said plurality of strips is still in its stretched condition.
7. Flexible absorbent article for absorption of human exudate, said article having one or more elasticated zones in which a plurality of elongated elastic members have been attached, characterized in that each of said elastic members includes a thin flat strip of elastic film each strip having a substantially constant width along its entire length and being separated from an adjacent strip by a distance (g' , g'' , g''' , g'''') which is substantially constant along the length of each strip.



8. Flexible absorbent article according to claim 7, characterized in that said strips have a thickness of between 5 and 100 μ , preferably between 20 and 40 μ when applied to the product.

9. Flexible absorbent article according to either of claims 7 or 8, characterized in that said strips have a width of between 2 and 16mm and preferably between 3 and 8 mm when applied to the product.

10. Flexible absorbent article according to any one of claims 7 to 9, characterized in that said absorbent article is an absorbent garment, and in that said strips are applied to the waist portion of said absorbent garment.

11. Flexible absorbent article according to any one of claims 7 to 10, characterized in that said absorbent article is an absorbent garment, and in that said strips are applied to portions of said absorbent garment designated to surround the legs or thighs of the wearer.

12. Method of producing a flexible absorbent article substantially as described with reference to the drawing.

13. Flexible absorbent article for absorption of human exudate substantially as described with reference to the drawing.

Dated this 27th day of August, 1998

SCA MÖLNLYCKE AKTIEBOLAG



WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

CJH:JPF:DM vax doc 24: AU4321196.WPC




Abstract

The present invention relates to a method of producing a plurality of strips starting from a single sheet (1) of elastic film, wherein said single sheet (1) is fed in a longitudinal forward direction (X) up to a severing zone (b), in which the
5 sheet is severed longitudinally into a plurality of strips, said plurality of strips then being fed further in the forward direction, while simultaneously being stretched in said longitudinal direction to thereby reduce their width (e) and thickness. The invention also relates to an absorbent product which makes use of a plurality of strips which are flat, thin and rectangular in one or more
10 elasticated areas of said product to provide good and uniform breathing ability along said elasticated area (s).



1/1

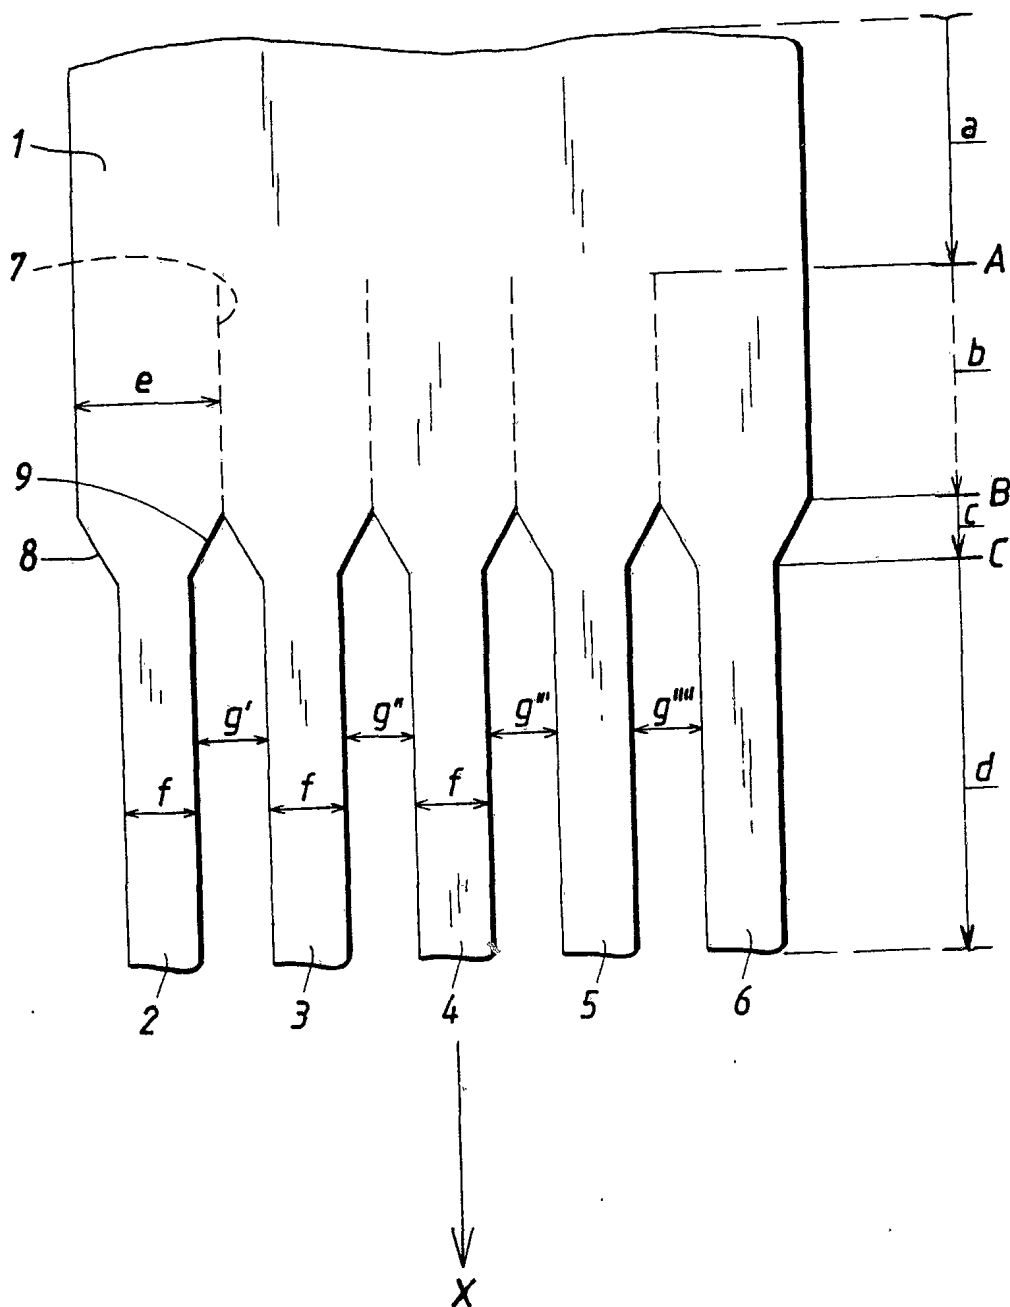

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01534

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B29C 55/00, B26D 3/00, D01D 5/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B29C, B26D, D01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 3604703 A1 (WINDMÖLLER & HÖLSCHER), 10 Sept 1987 (10.09.87), column 3, line 12 - line 28, figure 1	1-4
A	--	5-6
A	GB 2134068 A (ROBOPAC S.R.L. ET AL), 8 August 1984 (08.08.84)	1-6
A	DE 2932772 A1 (SWEGER MASCHINEN AG), 26 February 1981 (26.02.81)	1-6
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance.

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 April 1996

Date of mailing of the international search report

21 -05- 1996

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Maria Börlin

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01534

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0274752 A2 (KIMBERLY-CLARK CORPORATION), 20 July 1988 (20.07.88) --	7-11
A	SE 458577 B (UNI-CHARM CORP), 17 April 1989 (17.04.89) -- -----	7-11

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01534

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet!

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐
☒

The additional search fees were accompanied by the applicant's protest.

No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/01534

The subjects, as listed below, are so different from each other that no technical relationship can be appreciated to be present so as to form a general inventive concept. The claimed method is not considered to be designed for producing strips for exclusive use in absorbent articles.

Invention 1:

The invention according to claims 1-6 relates to a method for producing a plurality of strips from a single sheet of elastic film.

Invention 2:

The invention according to claims 7-11 relates to a flexible absorbent article, having one or more elasticated zones in which a plurality of elongated elastic members have been attached.

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/04/96

International application No.
PCT/SE 95/01534

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A1- 3604703	10/09/87	EP-A, A- 0241643 JP-A- 63059520	21/10/87 15/03/88
GB-A- 2134068	08/08/84	AU-B, B- 565895 AU-A- 2321984 BE-A, A- 898334 CH-A, B- 657821 DE-A- 3343805 FR-A, B- 2539725 JP-A- 59142913 NL-A- 8304486 SE-A- 8306689 US-A- 4671043	01/10/87 26/07/84 16/03/84 30/09/86 26/07/84 27/07/84 16/08/84 16/08/84 26/07/84 09/06/87
DE-A1- 2932772	26/02/81	JP-A- 56069097	10/06/81
EP-A2- 0274752	20/07/88	AU-A- 8312187 CA-A- 1286052 JP-A- 63243308 US-A- 4770656 US-A- 4834738	07/07/88 16/07/91 11/10/88 13/09/88 30/05/89
SE-B- 458577	17/04/89	AU-B, B- 554251 AU-A- 1913983 DE-A, C, C 3308015 EP-A, A, B 0095034 FR-A- 2525080 GB-A, B- 2118021 JP-A- 58180601 SE-A- 8301987 US-A- 4626305 US-A- 4687477	14/08/86 21/03/85 15/12/83 30/11/83 21/10/83 26/10/83 22/10/83 02/12/83 02/12/86 18/08/87