




(86) Date de dépôt PCT/PCT Filing Date: 2007/08/10
 (87) Date publication PCT/PCT Publication Date: 2008/02/28
 (85) Entrée phase nationale/National Entry: 2009/01/20
 (86) N° demande PCT/PCT Application No.: US 2007/075708
 (87) N° publication PCT/PCT Publication No.: 2008/024641
 (30) Priorité/Priority: 2006/08/10 (US60/837,129)

(51) Cl.Int./Int.Cl. *G08B 21/00* (2006.01),
G01M 3/04 (2006.01), *G01N 7/00* (2006.01)
 (71) Demandeur/Applicant:
TYCO THERMAL CONTROLS LLC, US
 (72) Inventeurs/Inventors:
MCCOY, KENNETH F., US;
WHITE, LAWRENCE J., US
 (74) Agent: KIRBY EADES GALE BAKER

(54) Titre : DISPOSITIF ET PROCEDE DE DETECTION DE FUITE DISCRETE
 (54) Title: DISCRETE LEAK DETECTION DEVICE AND METHOD

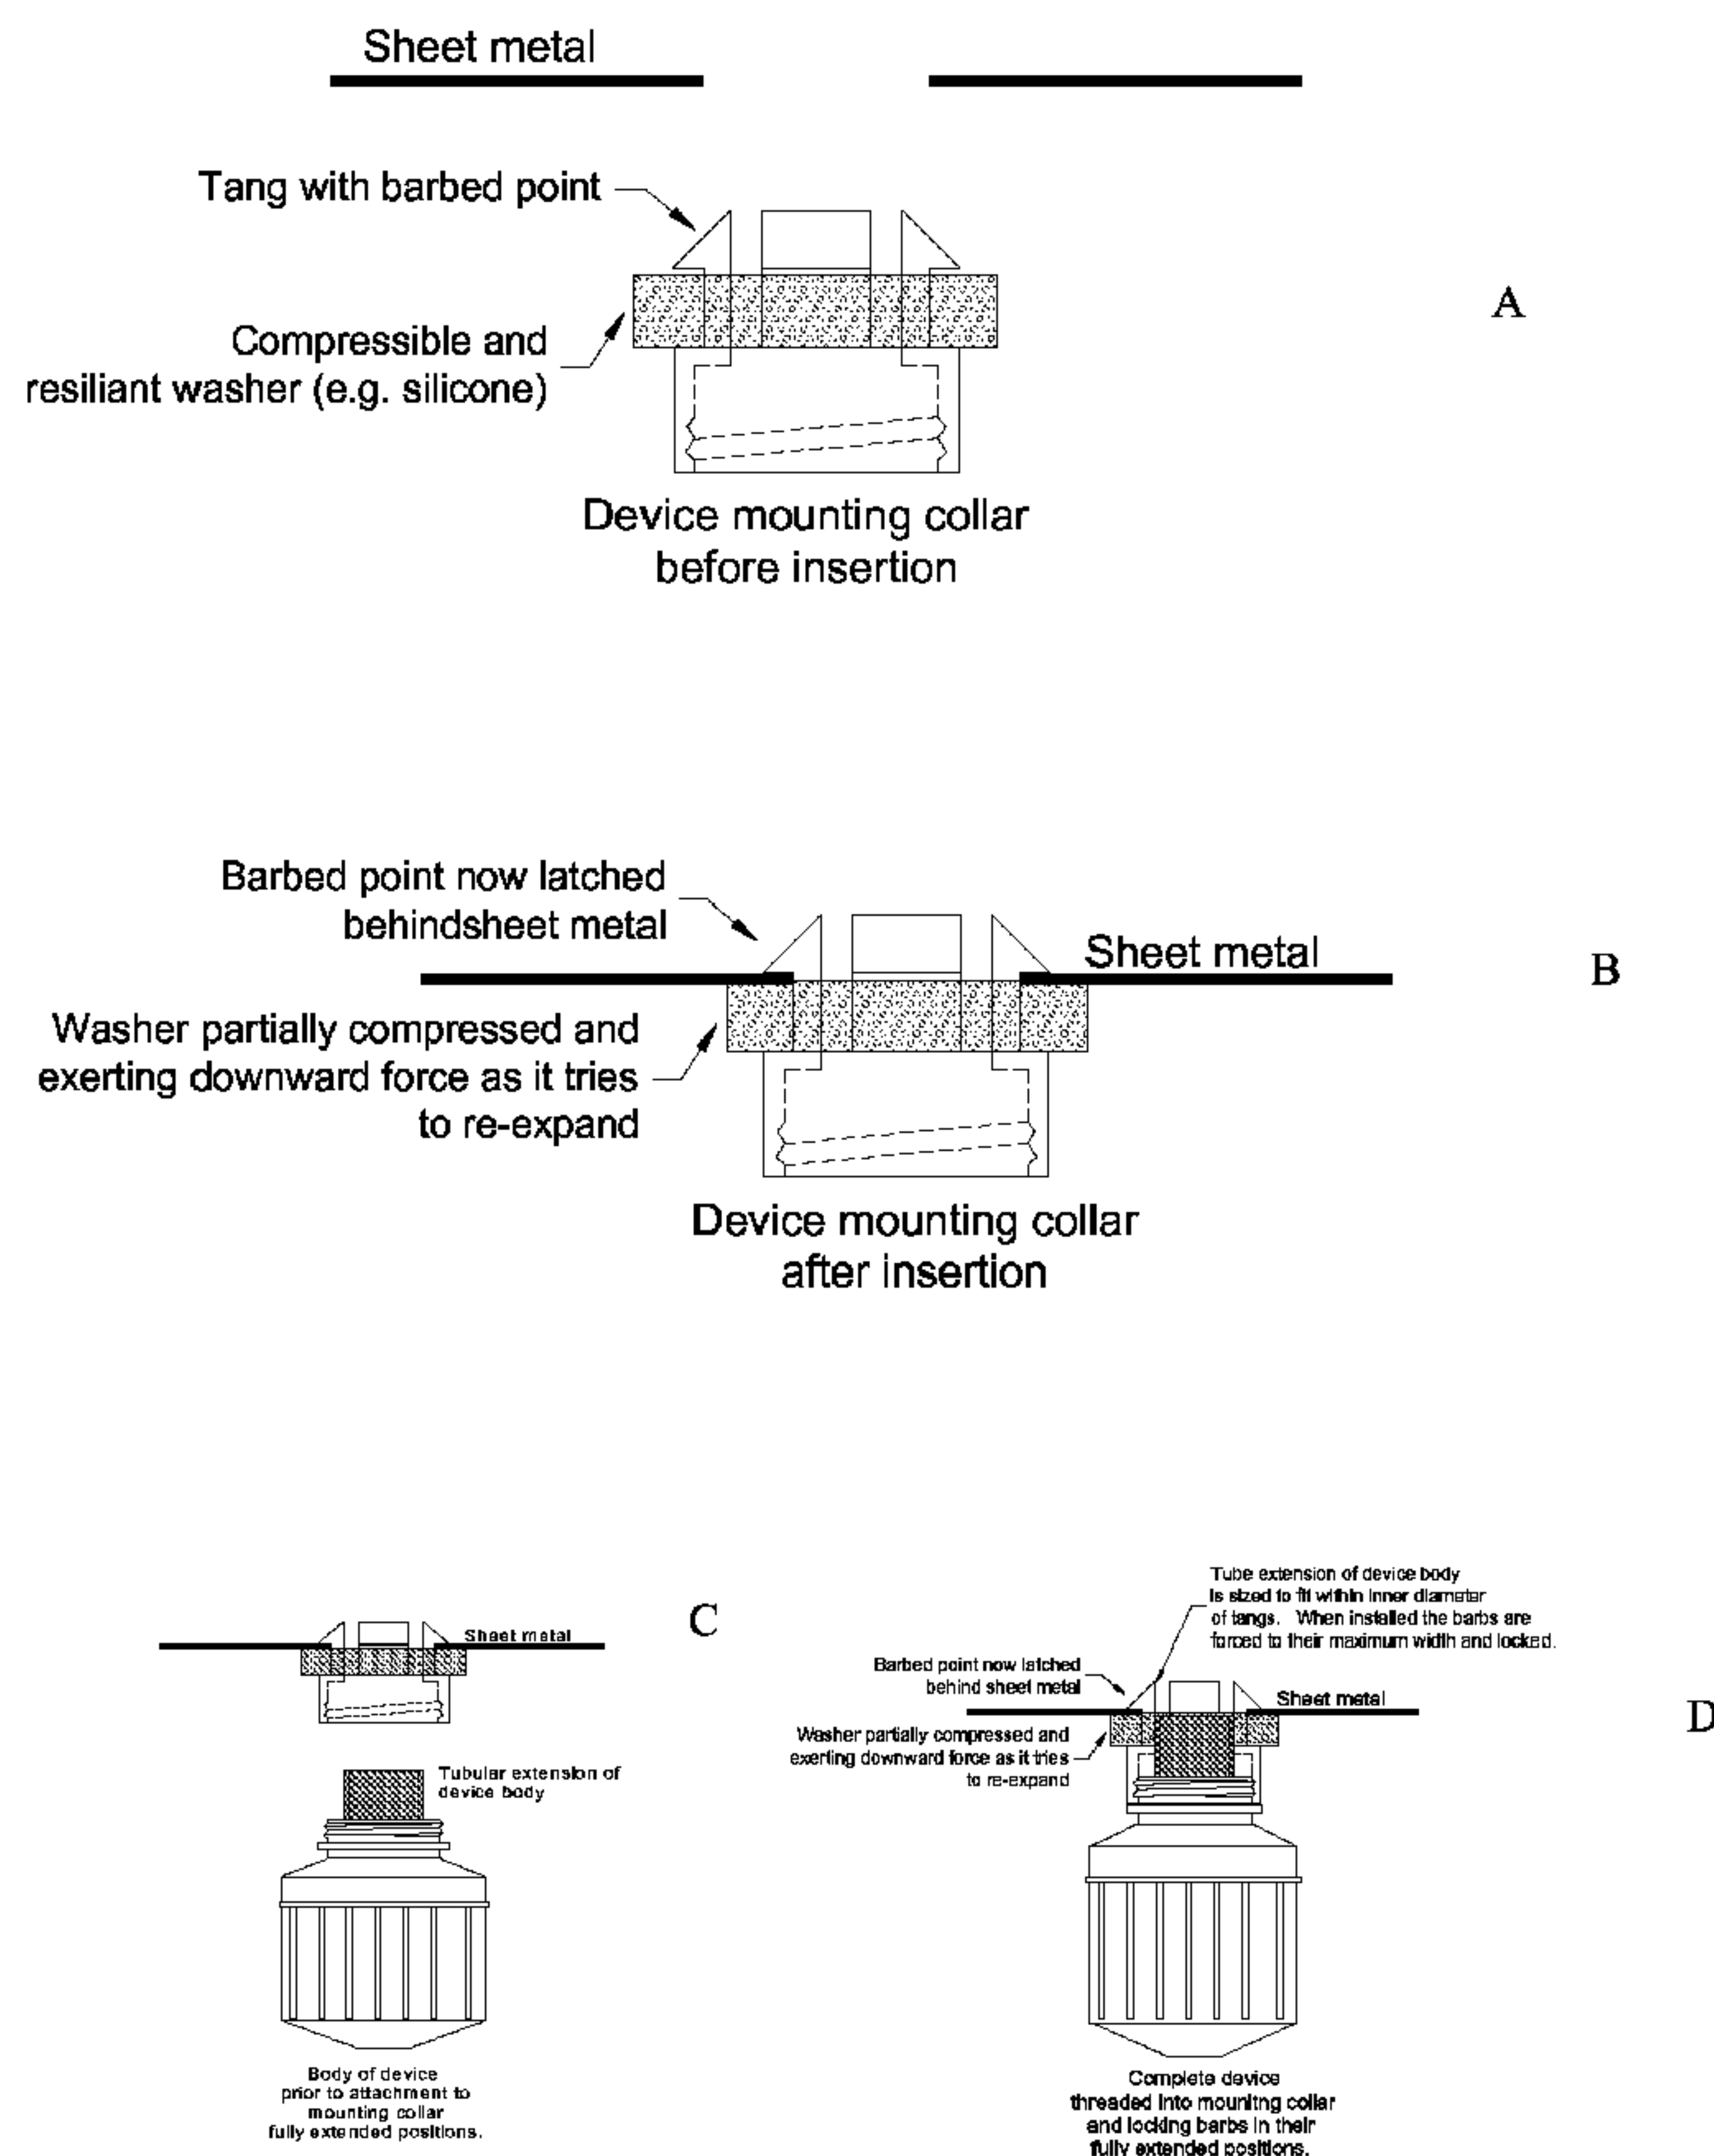

(57) Abrégé/Abstract:

A fluid detection device having an attachment means for fixing the device to a surface, the attachment means forming a passage through the surface, a discriminating sensor device effective to differentiate between a target fluid and a non-targeted fluid, a source of power and an indicator for indicating the presence of the target fluid.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 February 2008 (28.02.2008)

PCT

(10) International Publication Number
WO 2008/024641 A3

(51) International Patent Classification:
G08B 21/00 (2006.01) *G01N 7/00* (2006.01)
G01M 3/04 (2006.01)

94061 (US). **WHITE, Lawrence J** [US/US]; 5412 Port Sailwood Drive, Newark, California 94560 (US).

(21) International Application Number:
PCT/US2007/075708

(74) Agent: **PRATT, Wyatt**; Tyco Engineered Products & Services, 9 Roszel Road, Princeton, New Jersey 08540 (US).

(22) International Filing Date: 10 August 2007 (10.08.2007)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/837,129 10 August 2006 (10.08.2006) US

(71) Applicant (for all designated States except US): **TYCO THERMAL CONTROLS LLC** [US/US]; 2415 Bay Road, Redwood City, California 94063 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

(72) Inventors; and
(75) Inventors/Applicants (for US only): **MCCOY, Kenneth F** [US/US]; 2320 Cheshire Way, Redwood City, California

[Continued on next page]

(54) Title: DISCRETE LEAK DETECTION DEVICE AND METHOD

(57) Abstract: A fluid detection device having an attachment means for fixing the device to a surface, the attachment means forming a passage through the surface, a discriminating sensor device effective to differentiate between a target fluid and a non-targeted fluid, a source of power and an indicator for indicating the presence of the target fluid.

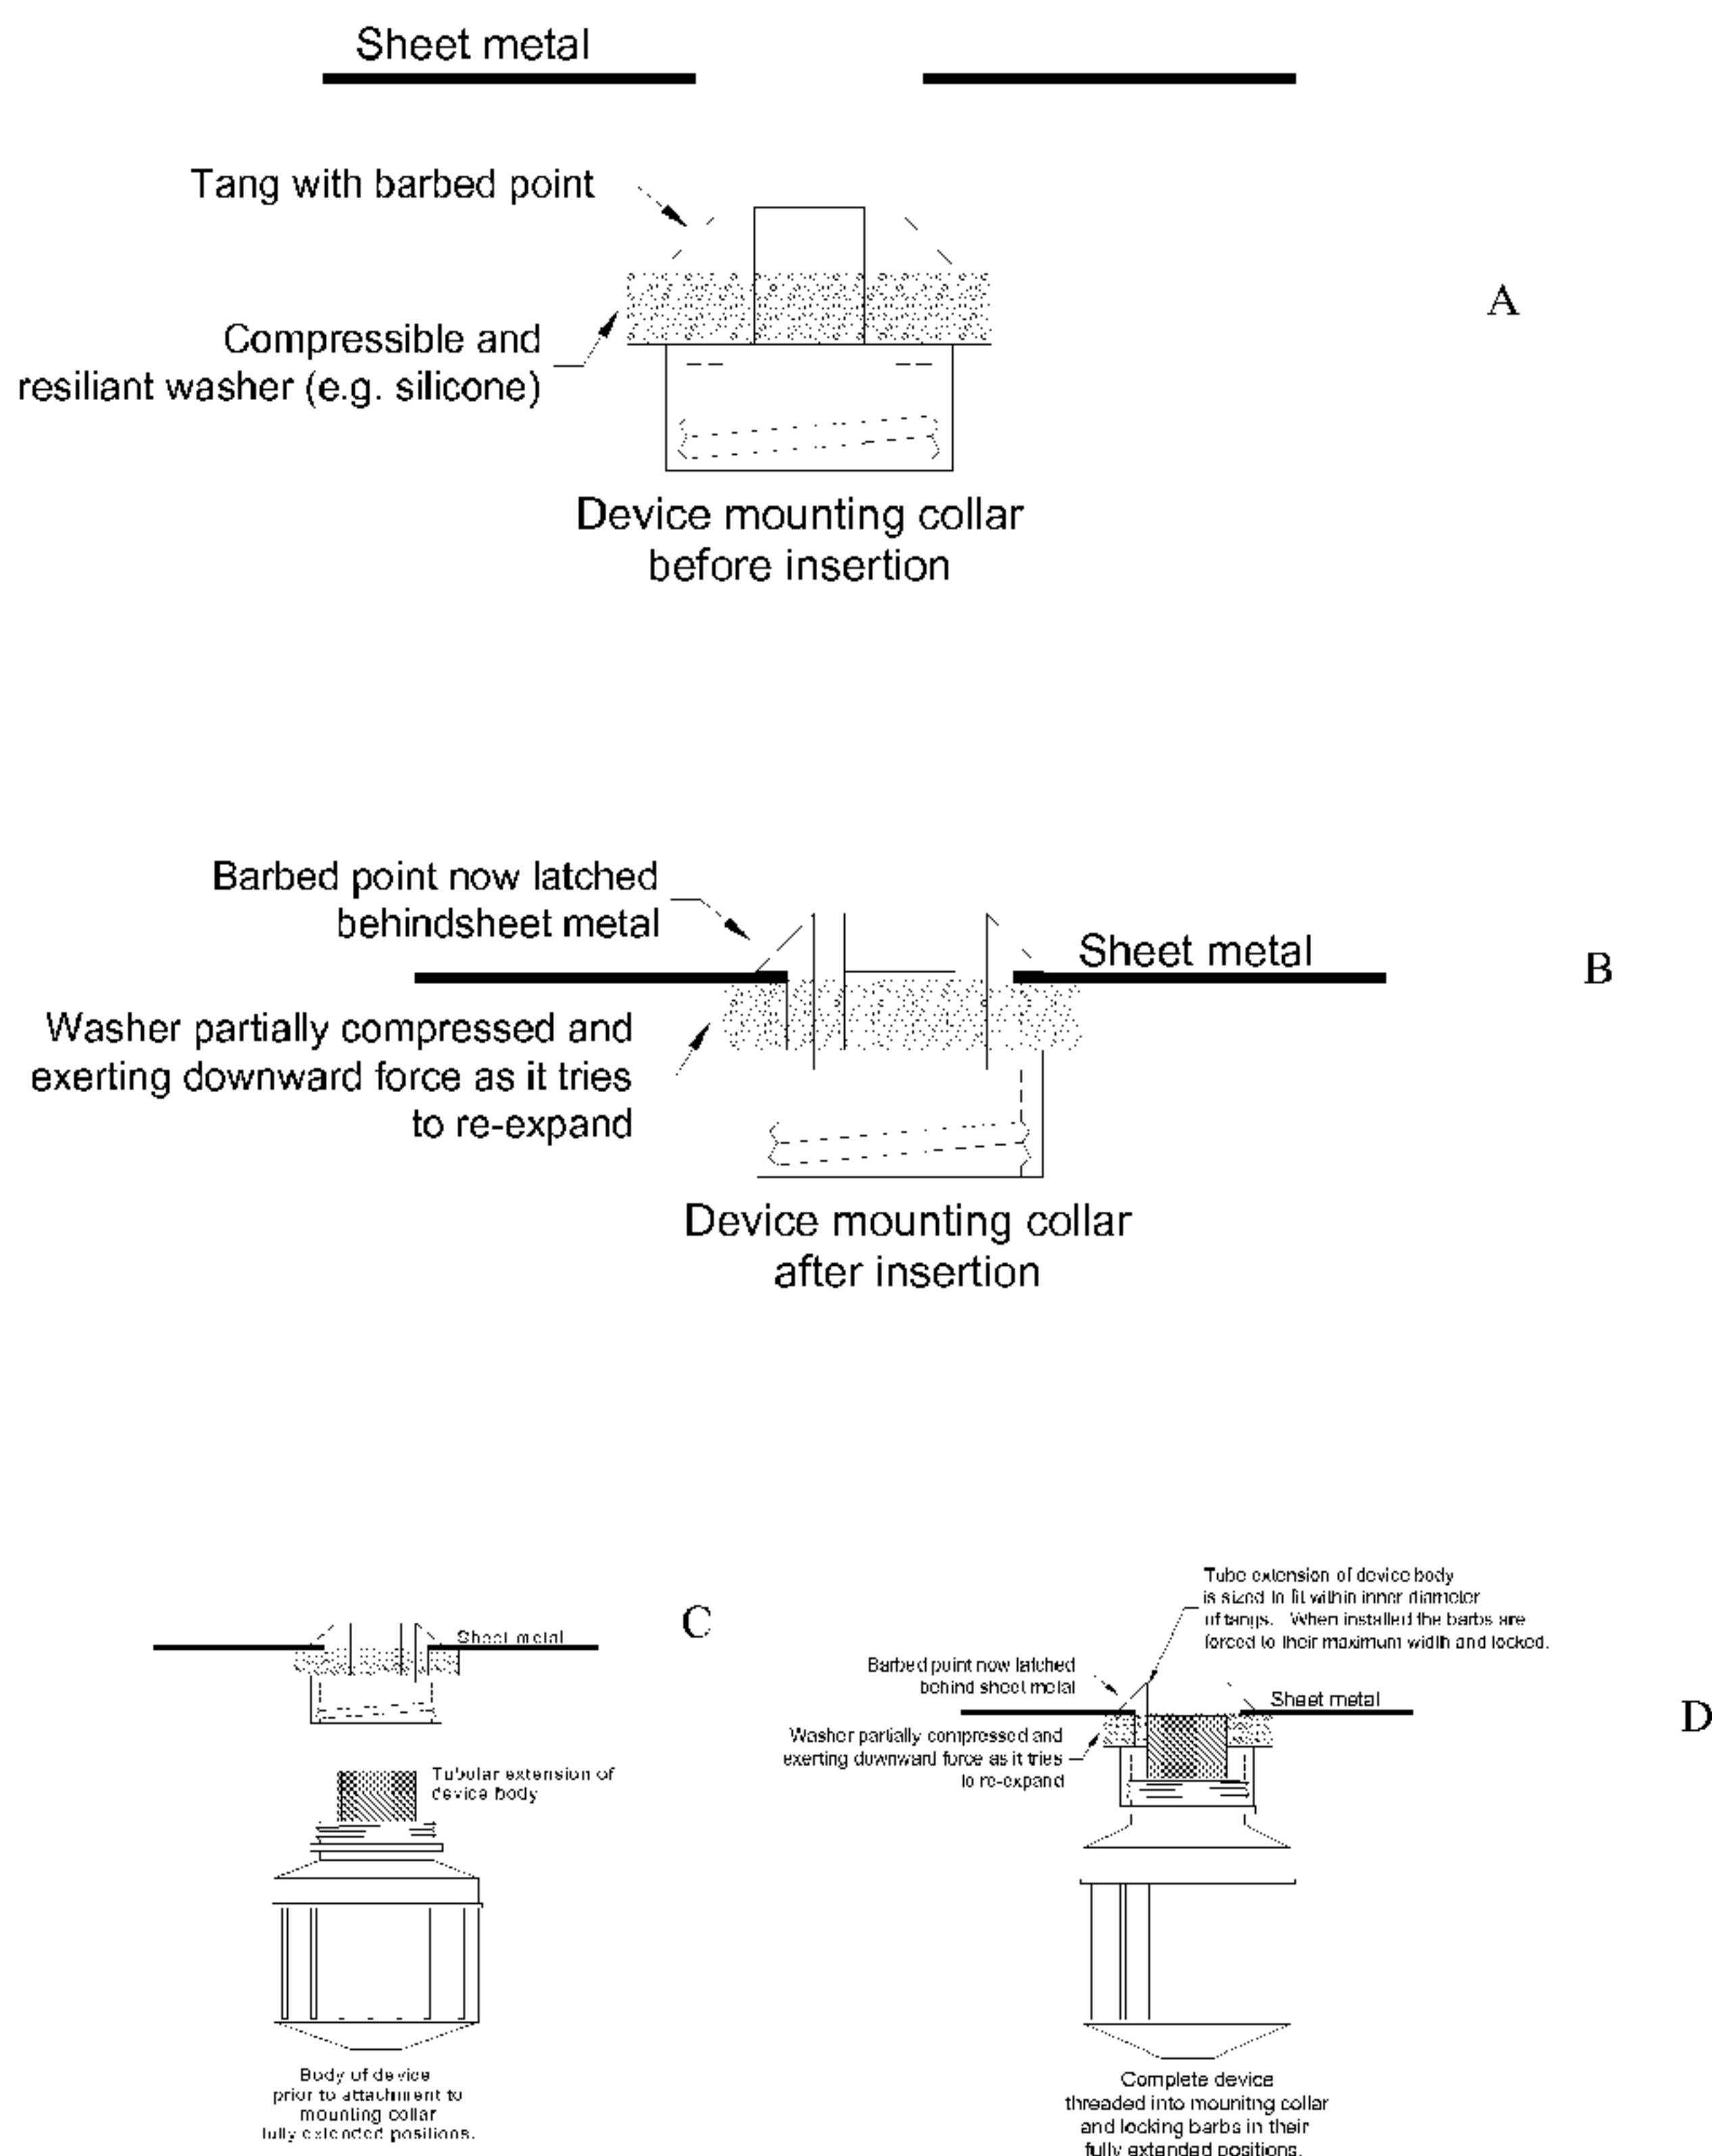

WO 2008/024641 A3

WO 2008/024641 A3



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
10 July 2008

Published:

— *with international search report*

DISCRETE LEAK DETECTION DEVICE AND METHOD

This invention includes a device and method for detecting the presence of one or more targeted liquids in volume of space where the targeted liquid is not normally present.

BACKGROUND OF THE INVENTION

Transporting liquids such as crude oil, refined petroleum products, or corrosive liquids such as concentrated acids or bases is often accomplished utilizing tanks and underground pipelines. Underground pipelines are subject to leakage from the piping, fittings, and valves. When an underground pipe carrying a hazardous or corrosive liquid develops a leak, the leak must first be detected and located before it can be repaired.

Various systems for detecting leaks are well-known. For example, sensor cables may be used to detect changes in variables along an elongate path, such as the presence of a liquid such as water, an organic solvent, or a corrosive liquid. Sensor cables may be extended in a pipeline, along the length or longitudinal axis or at various sections or points at which the leakage of liquids tends to occur. Additionally, crude oil leak detection over the many thousands of miles of an oil pipe transport system is extremely difficult to perform. However, detecting low rate leaks caused by corrosion of the carrier pipe (inner pipe) is increasingly important to the oil companies and governmental agencies, such as the State of Alaska, as the piping system ages.

Accordingly, there is a need in the field of transporting liquids for improvements in leak detection. The present invention addresses this and other needs.

BRIEF SUMMARY OF THE INVENTION

The present invention includes a fluid detection device having an attachment means for fixing the device to a surface, the attachment means forming a passage through the surface, a discriminating sensor device effective to differentiate between a target fluid and a non-targeted fluid, a source of power and an indicator for indicating the presence of the target fluid.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGs. **1A-1D** illustrate a preferred embodiment of the invention;

FIGs. **2A-2B** illustrate examples of sensors components of the invention;

FIG. **3** illustrates an attachment mechanism for the invention;

FIGs. **4A-4B** illustrate simple dual mode enunciation systems of the invention;

and,

FIGs. **5A-5B** illustrate the invention having the power and enunciation functions performed remotely.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The invention preferably includes a device having an attachment means or device, a discriminating sensor device that can differentiate between the target fluid and a non-targeted fluid (*e.g.*, water), a source of power; and an indicator. The invention may further include a method using the above-described device where the method assures that the targeted fluid will come into contact with the sensor device.

One preferred embodiment of the invention is shown in Figs. **1A-1D**. As seen in Figs. **1A** and **1B**, the device includes an attachment having two or more tangs with barbed points, and a soft compressible and resilient washer. The device is attached to and placed through a surface in a two part operation using a mounting collar and the body of the device. This method is especially suited to attaching the device to a thin layer of material as for instance sheet metal. The sheet metal may have a soft or deformable insulation material on the surface of the sheet metal opposite the device. To use this method of attachment, the installer will drill a hole of the appropriate diameter through the sheet metal. The device is then installed by pushing the tang end of the device through the hole such that the barbs extend beyond the edge of the sheet metal and latch the device into place. The thick washer of a soft but resilient material, closed cell silicone foam for instance, is fitted to the device so that during the installation, the washer is compressed between the surface of the sheet metal and the body of the mounting collar. After the barbs latch behind the inner surface of the sheet metal, the tendency of the deformed washer to re-expand serves to pull back against the barbs and insure a snug fit at a predictable depth.

Referring to Figs. **1C** and **1D**, the body of the device can next be threaded into the threads at the bottom of the mounting collar. A tubular extension of the sensor chamber can be sized such that with the body of the device in place, the barbs are completely extended in a radial direction and locked into place and are incapable of bending inward. This feature assures a positive locking mechanism and allows substantial weight to be

suspended up to the breaking point of barbs, tangs or yield strength of the sheet metal. This feature is particularly helpful if the area above the sheet metal is filled with a semi-rigid, but deformable, foam insulation such as polyurethane.

Referring to Figs. **2A** and **2B**, the sensor device (shown in Fig. **2A**) is fabricated at the end of a printed circuit board. The sensor element has a film of material that changes resistance in the presence of the targeted fluid. In this embodiment, the film is a thin layer of carbon particles suspended in a polymer binder such that the carbon particles make contact with each other and produce a lower resistivity when the target fluid is not present. When the target fluid is present the polymer binder material can be formulated to swell, thereby reducing the quantity of carbon particles touching each other and secondarily causing a dramatic change in resistivity through the film. Other geometries of carbon/polymer films are determinable by one skilled in the art, such as the deposition of the carbon/polymer film on the exterior surface of a tubular, leaded component such as for instance a 1 watt carbon resistor, shown in Fig. **2B**.

In both of these embodiments and similar embodiments, the sensor device can be constructed and assembled into the body of the device such that the sensor element extends up to and within the tubular extension of the device. It is possible to seal the lower portion of the tubular extension, for instance with epoxy potting compound, such that a chamber closed on the bottom but open on the top is formed. In the initial embodiment, with the device attached to the bottom side of a pre-insulated crude oil pipeline, a drip chamber is formed such that any oil leaking from the primary pipe and

flowing along the inside of the insulation's sheet metal cladding, will drip into the tubular extension of the device and into direct contact with the sensor element.

The sensor technology sited in this preferred device has the special property of discriminating between a fluid of interest, as for example crude oil, and water. It is important to ignore water since water can frequently be present due to condensation or imperfect sealing of the insulation cladding or lagging.

An additional aspect of the invention utilizes other discriminating sensors in other double wall pipe or double bottom tank systems where a targeted fluid should be detected but water should be ignored. An example of another discriminating sensor is the acid sensor disclosed in United States Patent No. 6,777,947, by McCoy et. al., entitled "Sensor Cable", issued August 17, 2004. In this example the targeted fluid would be concentrated acid. The outer wall of a typical double wall hazardous fluid pipe system would provide the mechanism to convey any leak to the body of the device. The means of attachment and the use of the tubular extension acting as a drip chamber would be identical.

The means of attachment is not limited to the tang, barb and locking mechanism as described above. For example, in situations where the wall thickness of the containment pipe or exterior tank bottom is sufficiently thick, a threaded mechanism may prove equally effective. Such an arrangement is shown in Fig. 3.

The invention preferably includes a power supply. Representative power supplies include batteries of sufficient shelf life and charge storage capacity as an ideal means of powering a self contained version of the device. As an example, the 19 amp-hour, 3.6 VDC Lithium Thionyl D-cell, Model TL-5930 manufactured by Tadrian Lithium Batteries has excellent shelf life characteristics and high energy density. Using the carbon / polymer thin film sensor technology the resistance of the sensor film can be monitored with an extremely low current such that the standby life of the self-contained device is projected to be in excess of 5 years. If and when the polymer film is contacted by a target fluid, such as crude oil, the remaining residual battery power can be utilized to activate one or several enunciation devices. The initial embodiment of the device is sized to enclose the thin film sensor device, circuit board space for the components for monitoring the resistance of the sensor, and one or more simple enunciation devices.

The indicator or method of enunciation of the invention indicates that a targeted fluid has been detected. In one embodiment of the device, the method of enunciation includes high brightness, high efficiency LEDs. As seen in Figs. **1C** and **1D**, the lower cover of the enclosure system is fabricated from a clear polymer material so that the LEDs can be seen through the clear cover. The circuitry of the device can be easily made to intermittently flash the LEDs when the resistance of the sensor film exceeds a pre-set threshold. In this embodiment, "no flashing" indicates that no target fluid has contacted the device, while flashing LEDs indicate that the target fluid has contacted the sensor portion of the device. Very low duty cycle pulsing can be effective as enunciation and is very conservative of battery power. For instance a flash lasting 50 milliseconds emitted

once every second, can be easily detected by a near-by observer while consuming only 5% of the energy required to operate the LEDs continuously.

Other examples of battery powered enunciation devices include low power FM transmitter or a radio frequency node of a mesh network.

As seen in Figs. **4A** and **4B**, an example of a simple dual mode enunciation system is illustrated. The device is shown to be made to flash the LEDs and transmit a low power FM signal. In this example a maintenance worker driving along a service road would be able to see a flashing indication if the device has detected a leak. Using a vehicle mounted FM radio receiver, the worker would be able to hear a tone or a pulsed signal when in the vicinity of a device that had detected the target fluid.

Initial analysis of the circuitry necessary to monitor the sensor film, flash the LEDs and emit an FM signal indicates that the battery capacity may be sufficient for an enunciation lasting in excess of 30 days from initial detection of the targeted fluid when the TL-5930 battery is used.

As seen in Figs. **5A**, **5B** and **5C**, this embodiment of the invention has the power and enunciation functions performed through a direct wire connection to control room equipment. The output of the sensor circuit may easily be configured to close a solid state switch (*e.g.*, a transistor) when the target fluid is detected. A switch closure can be detected and located along a four wire circuit in the method taught by United States

Patent No. 5,235,286, to Masia et. al., entitled "Method for Detecting and Obtaining Information about Changers in Variables", issued August 10, 1993.

A device of this type is useful when physical inspection is not easily achieved. Representative uses of the invention include monitoring pipeline systems preferably having a multiple wall system (*e.g.*, having an inner pipe with an outer protective layer). These systems are commonly found in above ground pre-insulated pipes such as oil piping systems found on the north slope of Alaska having a steel pipe interior within a polyurethane foam filled shell. The control room device, for example, Tyco Thermal Controls device TT-SIM can be simply modified to produce sufficient current to power in excess of 100 detection devices. The circuit embodied in the TT-SIM can also locate which device along the string of 100 or more devices made the detection and can report the distance from the control room to the detection device in terms of feet or meters.

While certain embodiments of the disclosure have been described herein, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as exemplifications of particular embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

What is claimed is:

1. A fluid detection device, comprising:
 - an attachment means for fixing the device to a surface, the attachment means forming a passage through the surface;
 - a discriminating sensor device effective to differentiate between a target fluid and a non-targeted fluid;
 - a source of power; and
 - an indicator for indicating the presence of the target fluid.

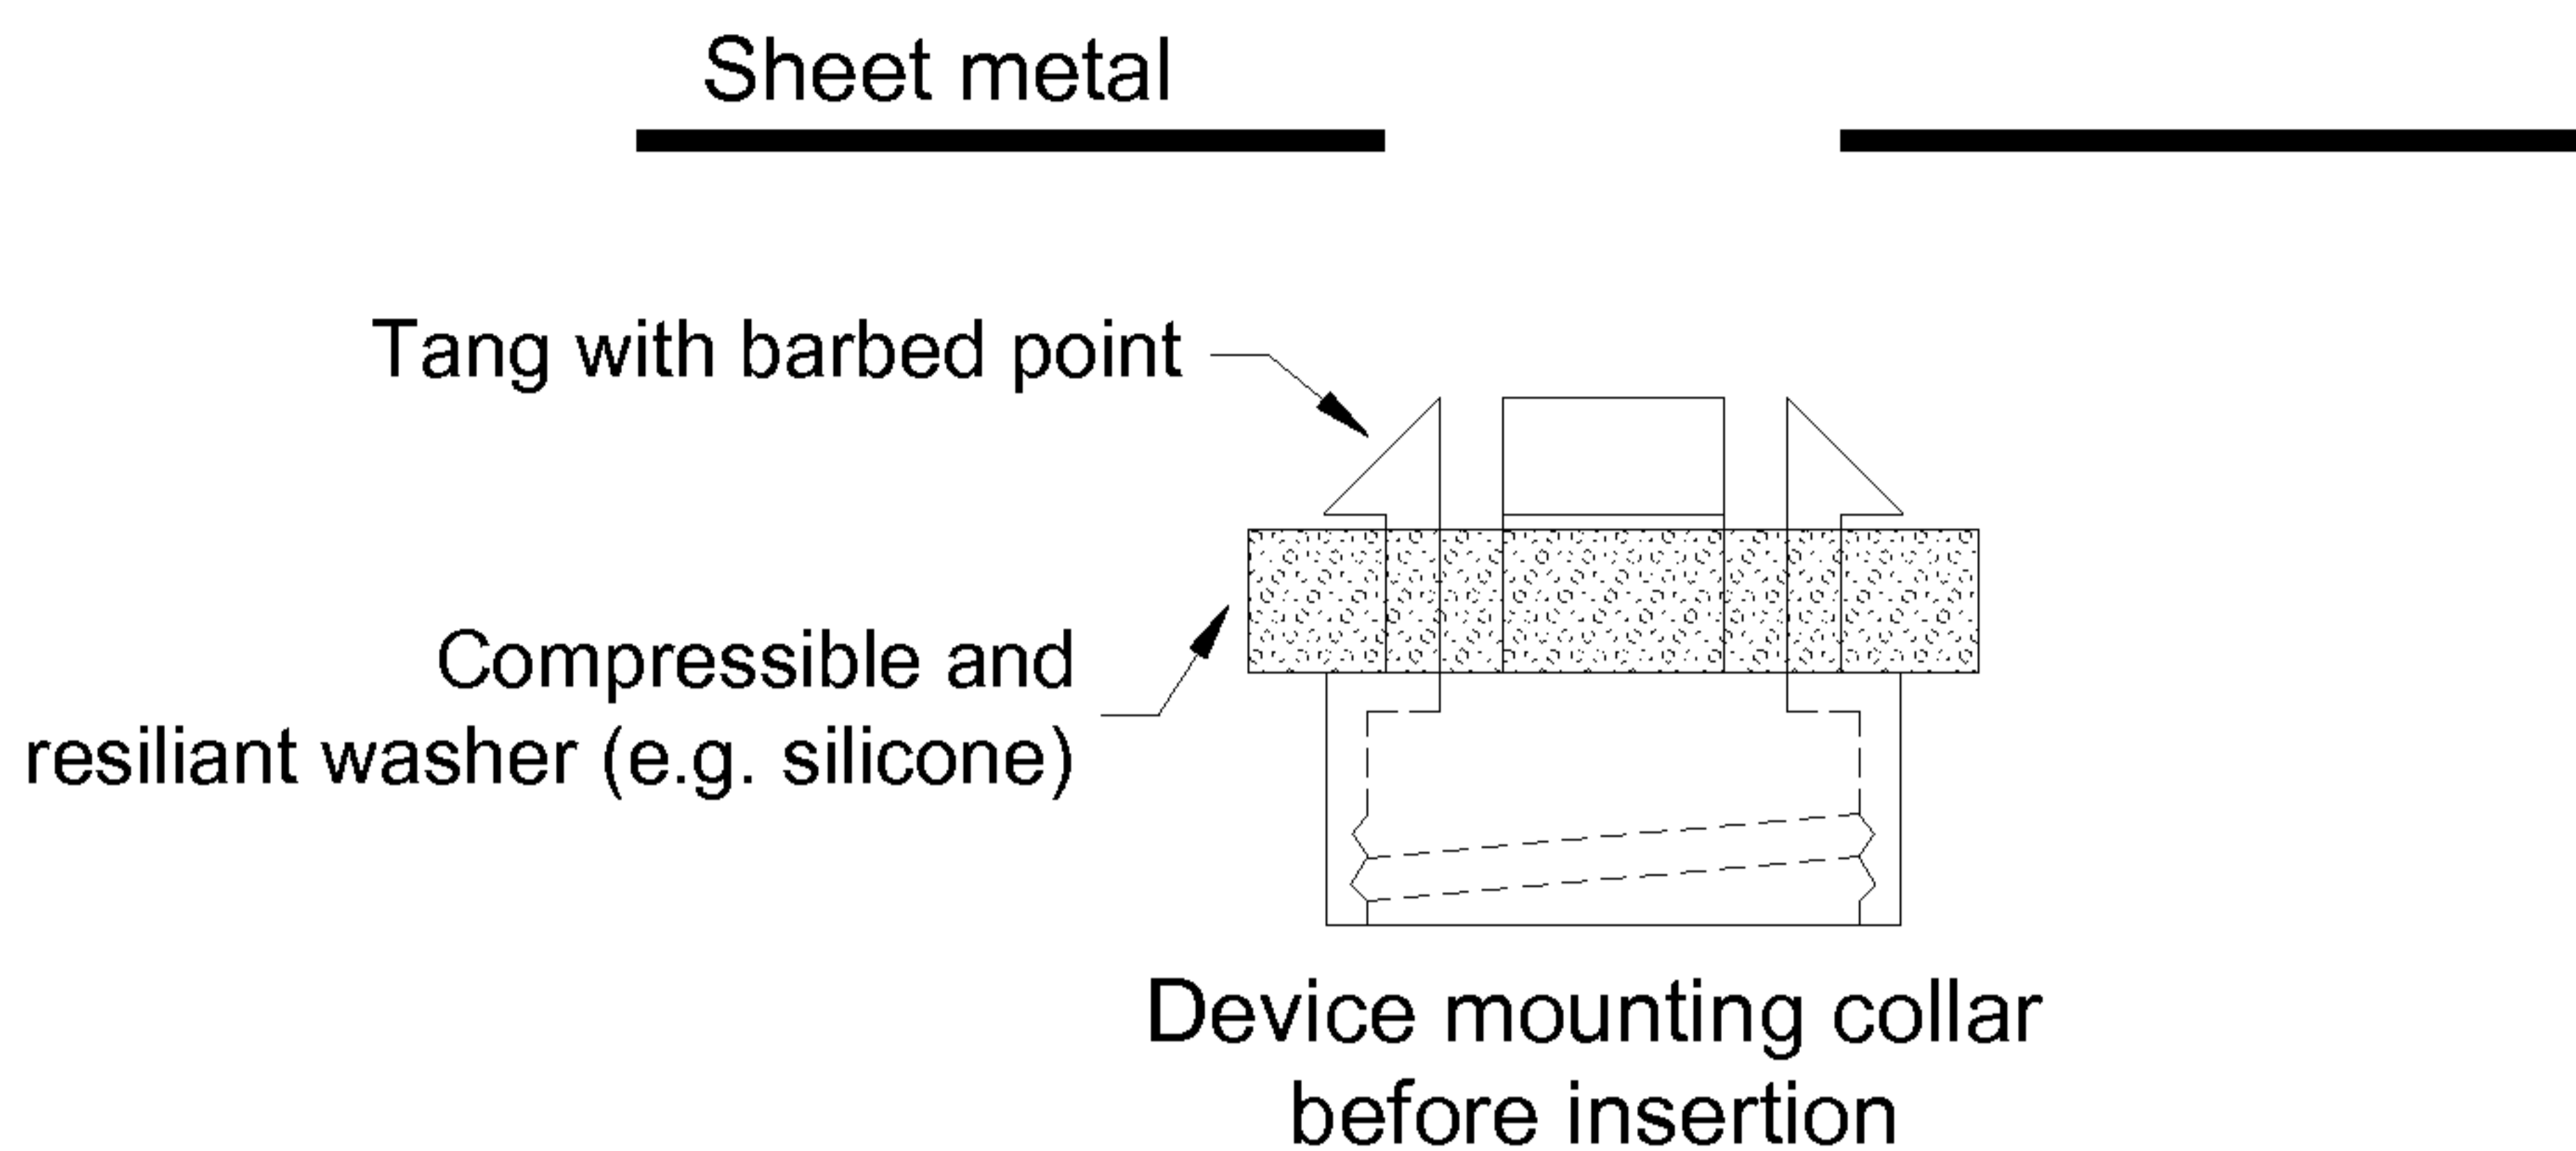


Fig. 1A

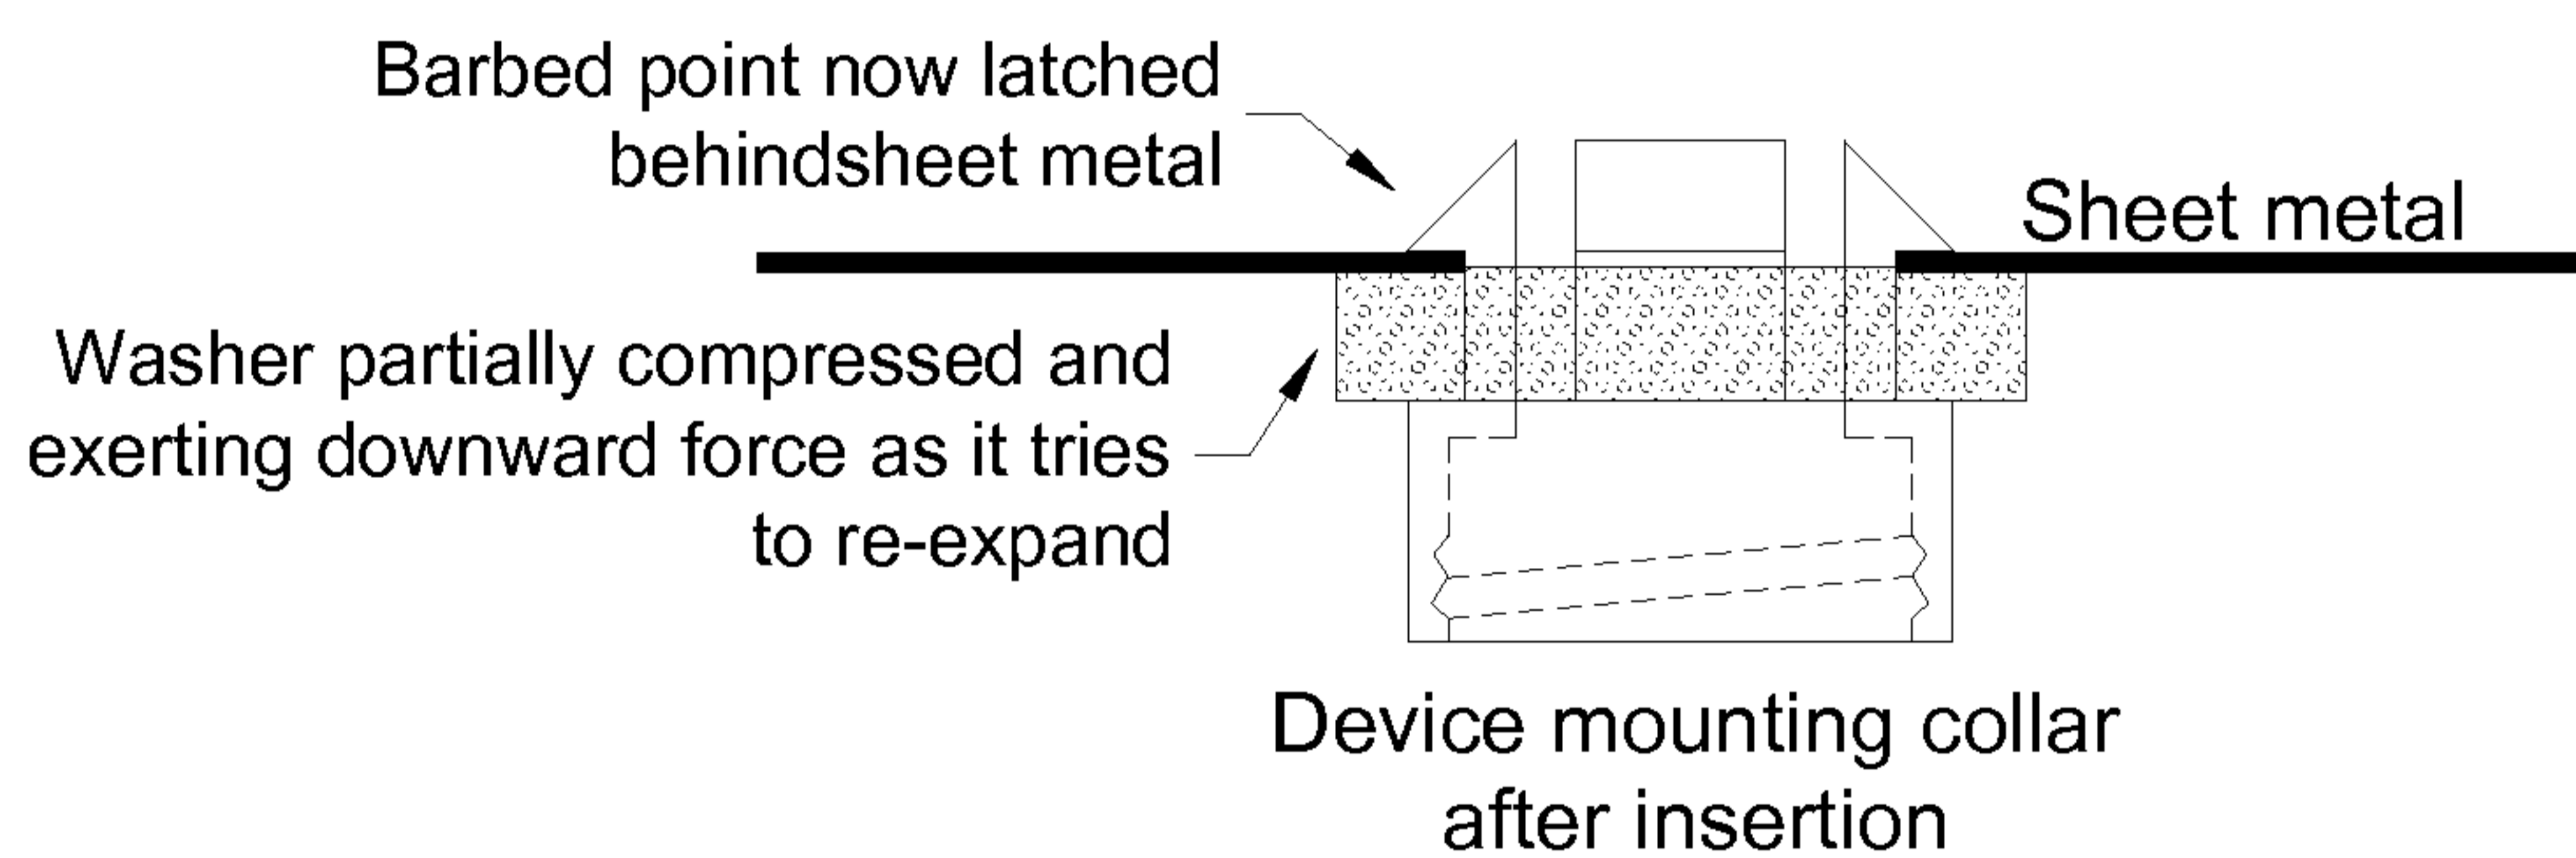


Fig. 1B

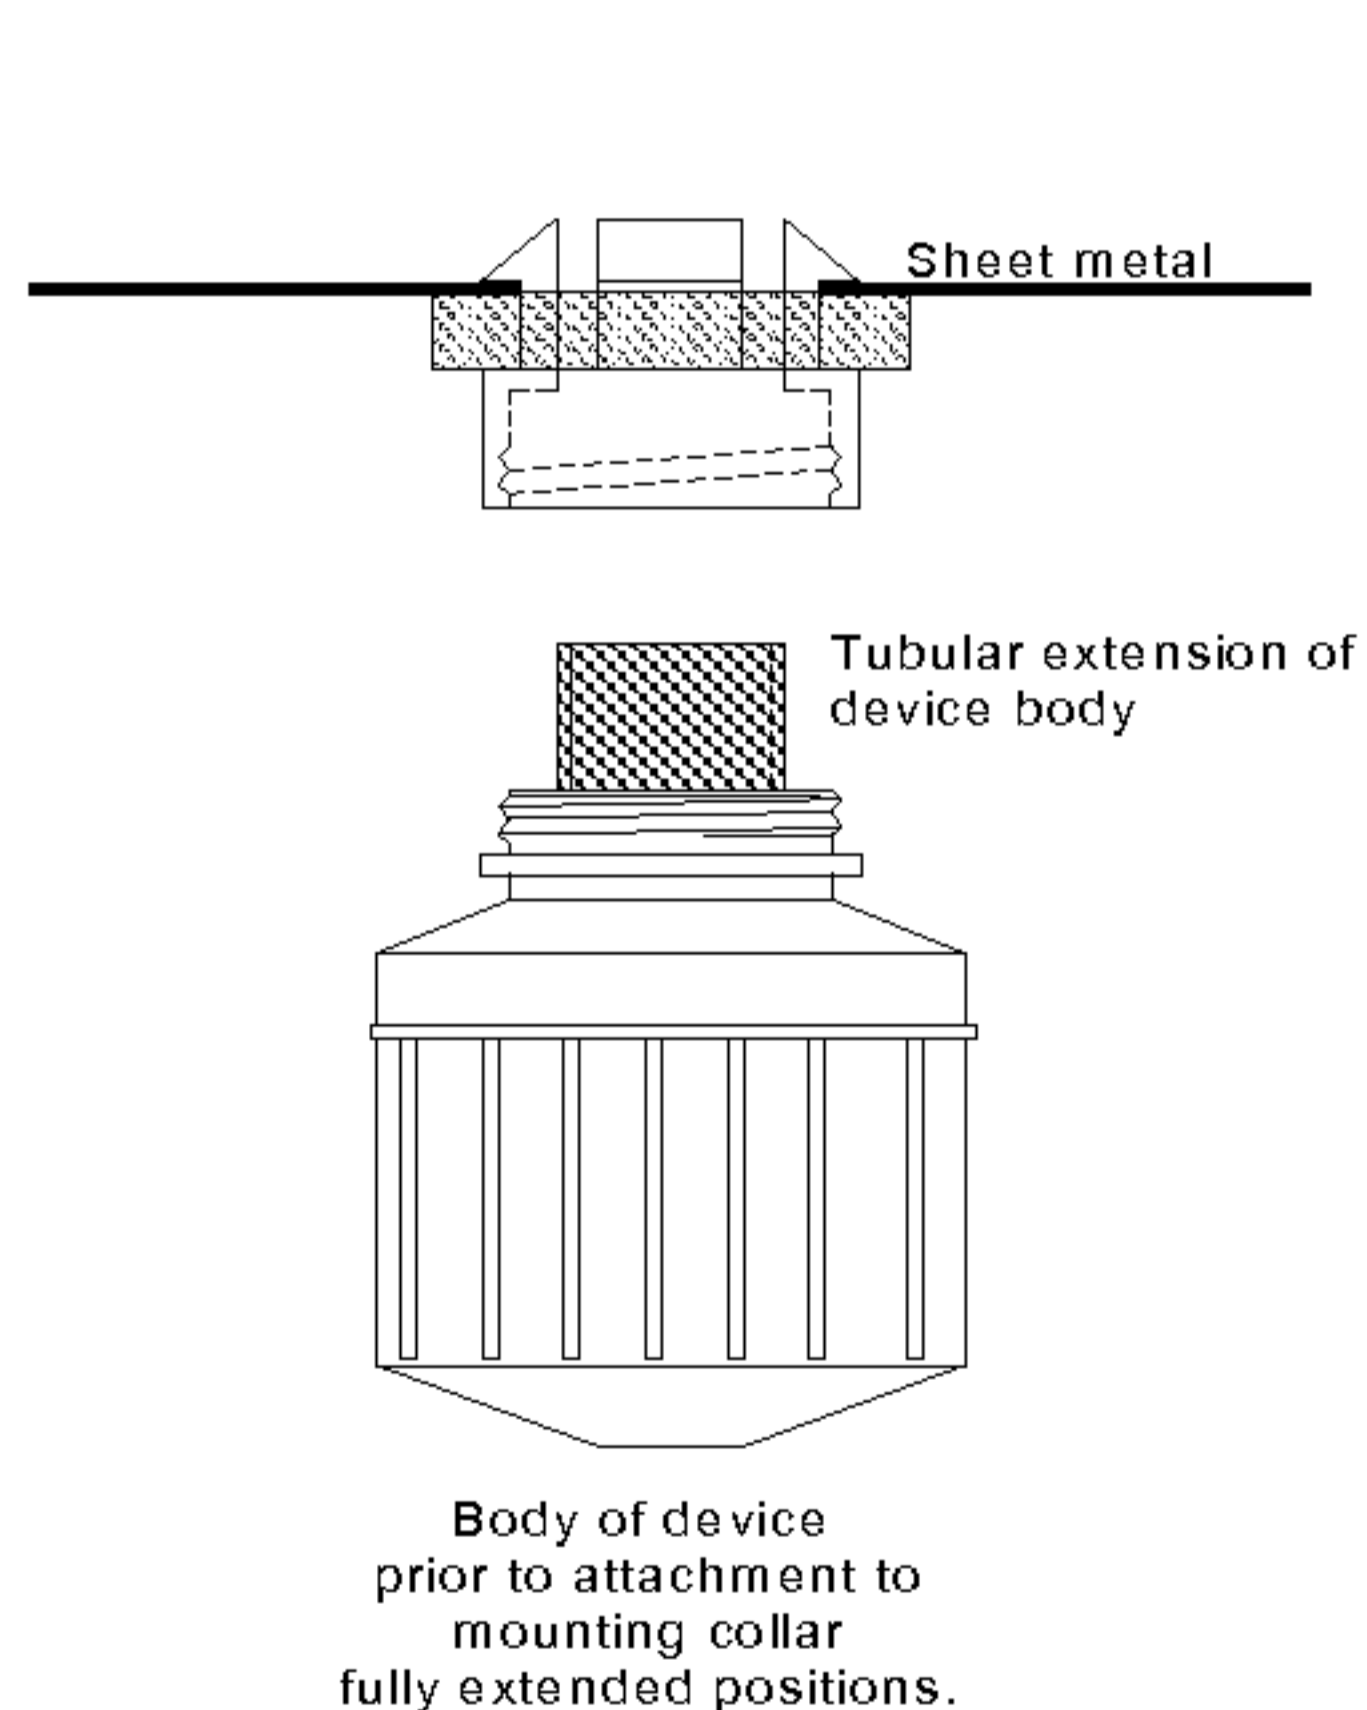


Fig. 1C


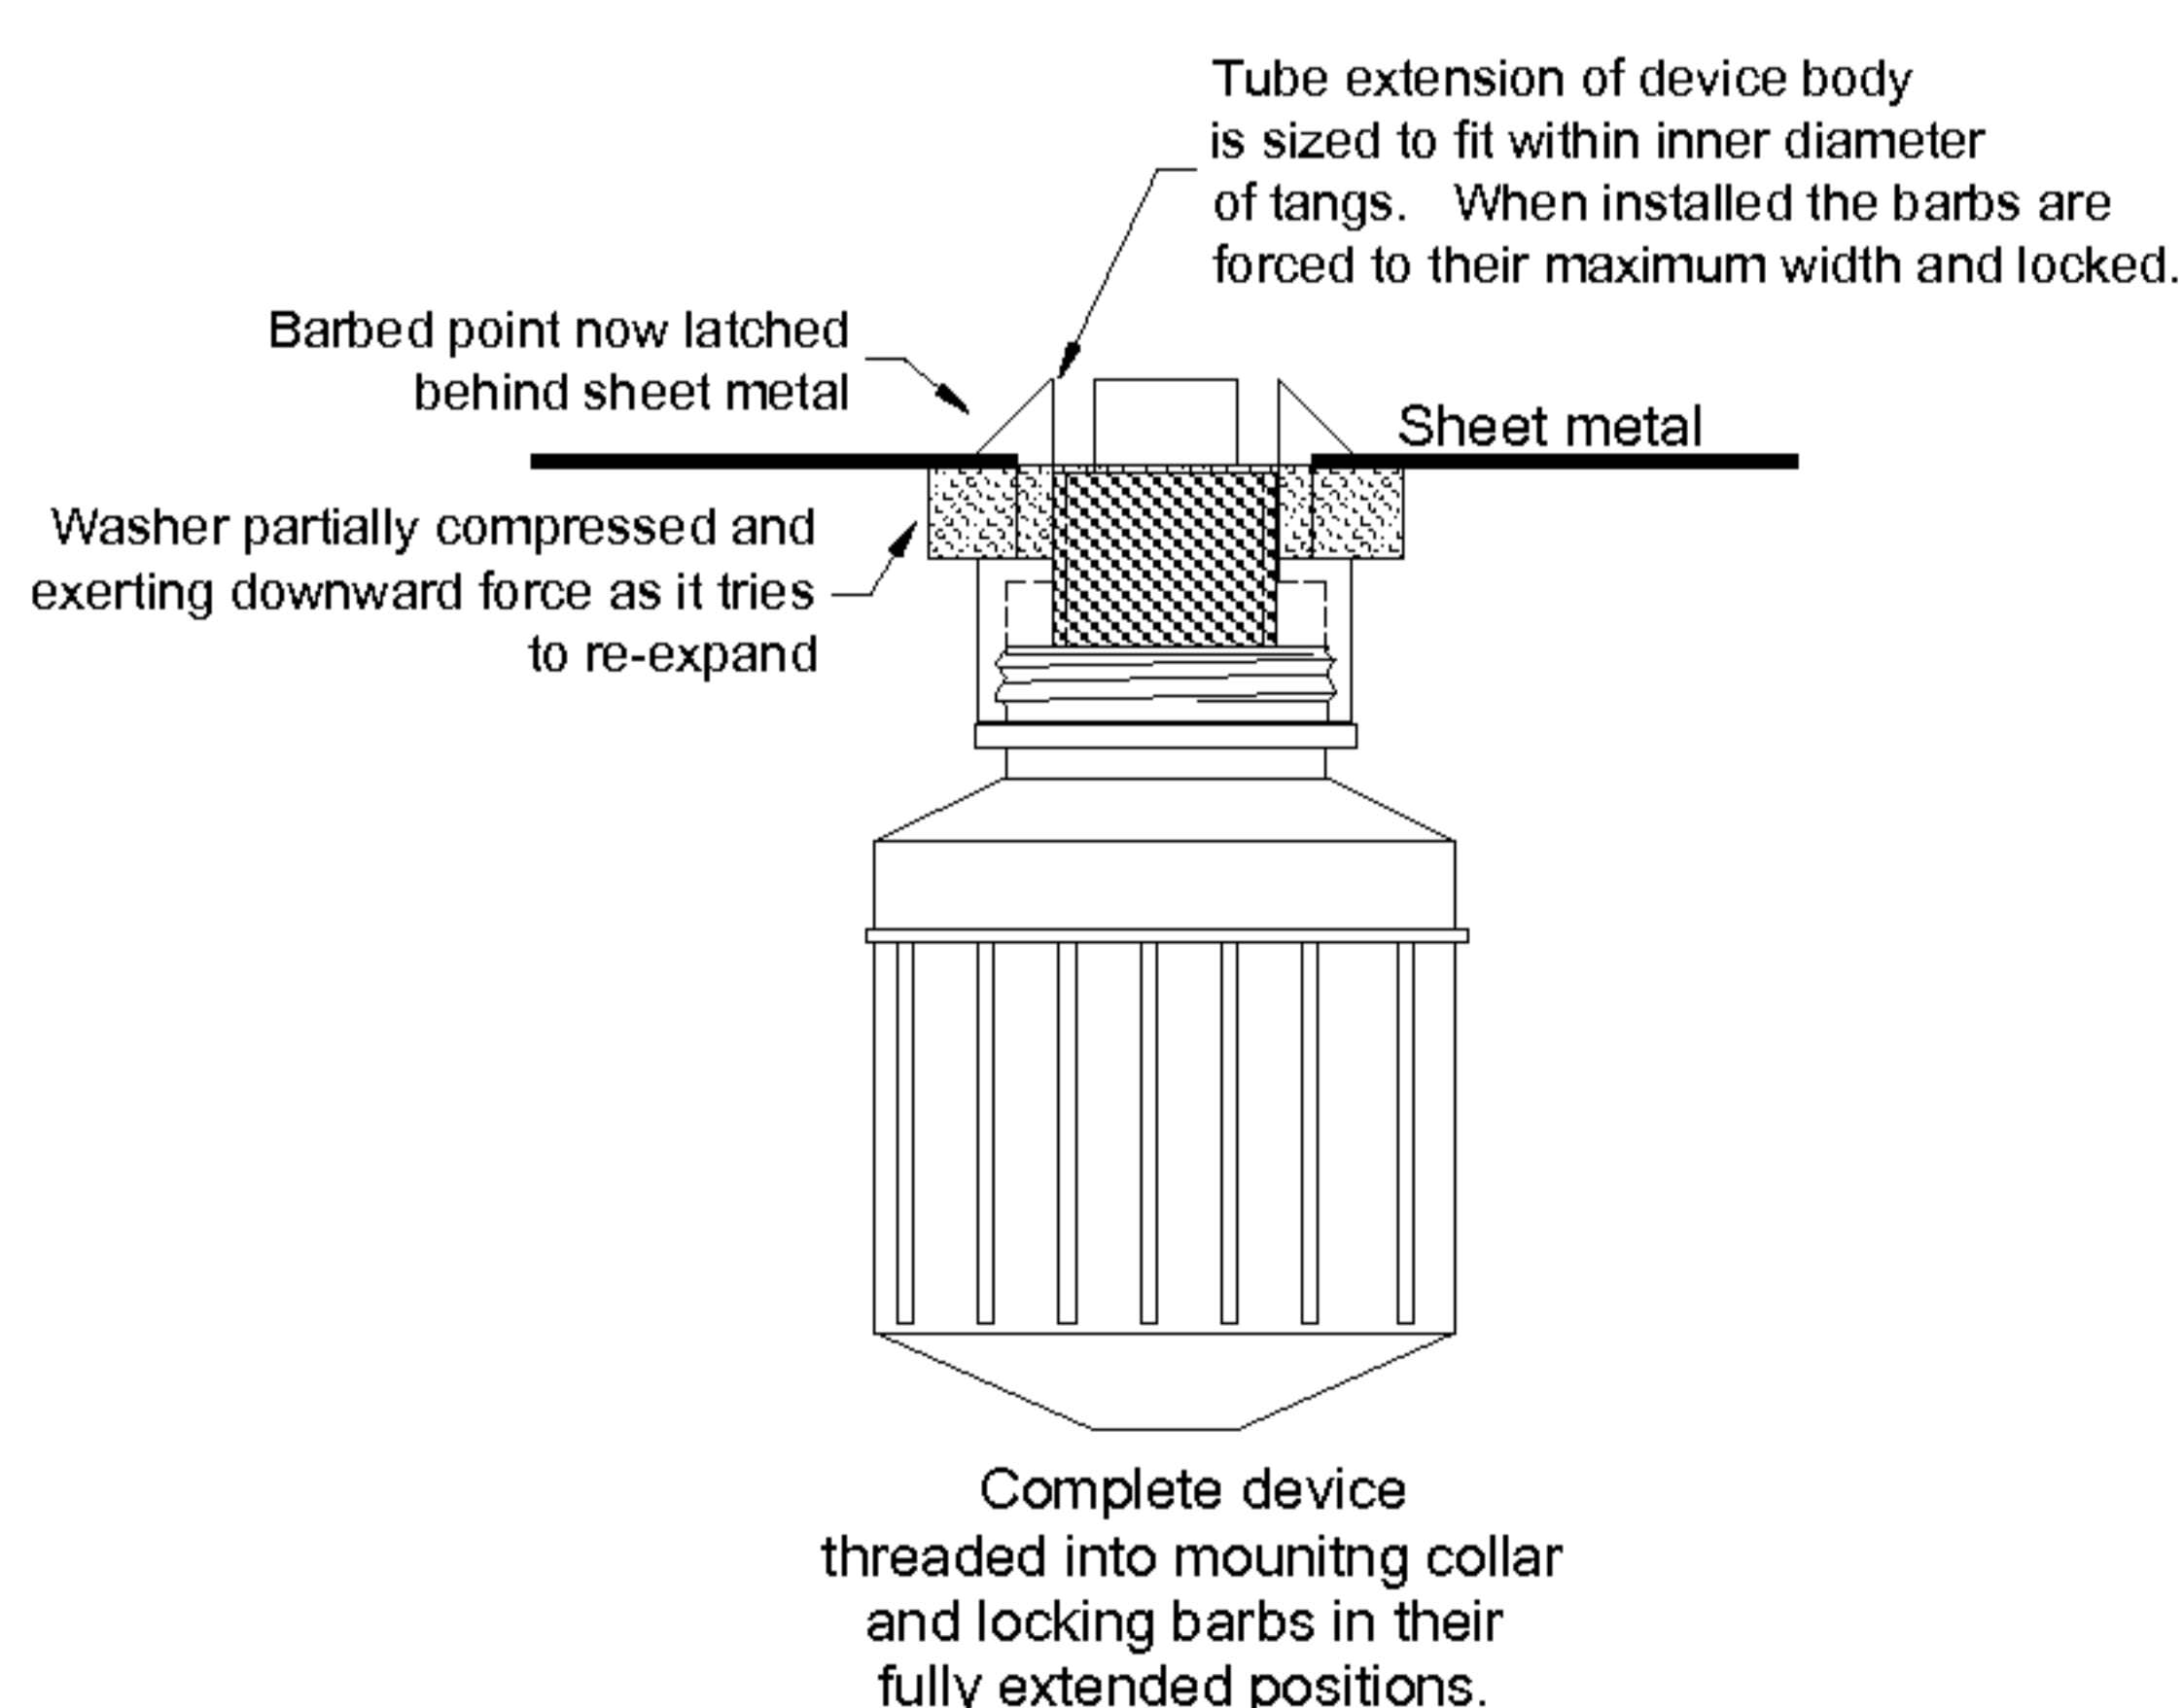


Fig. 1D

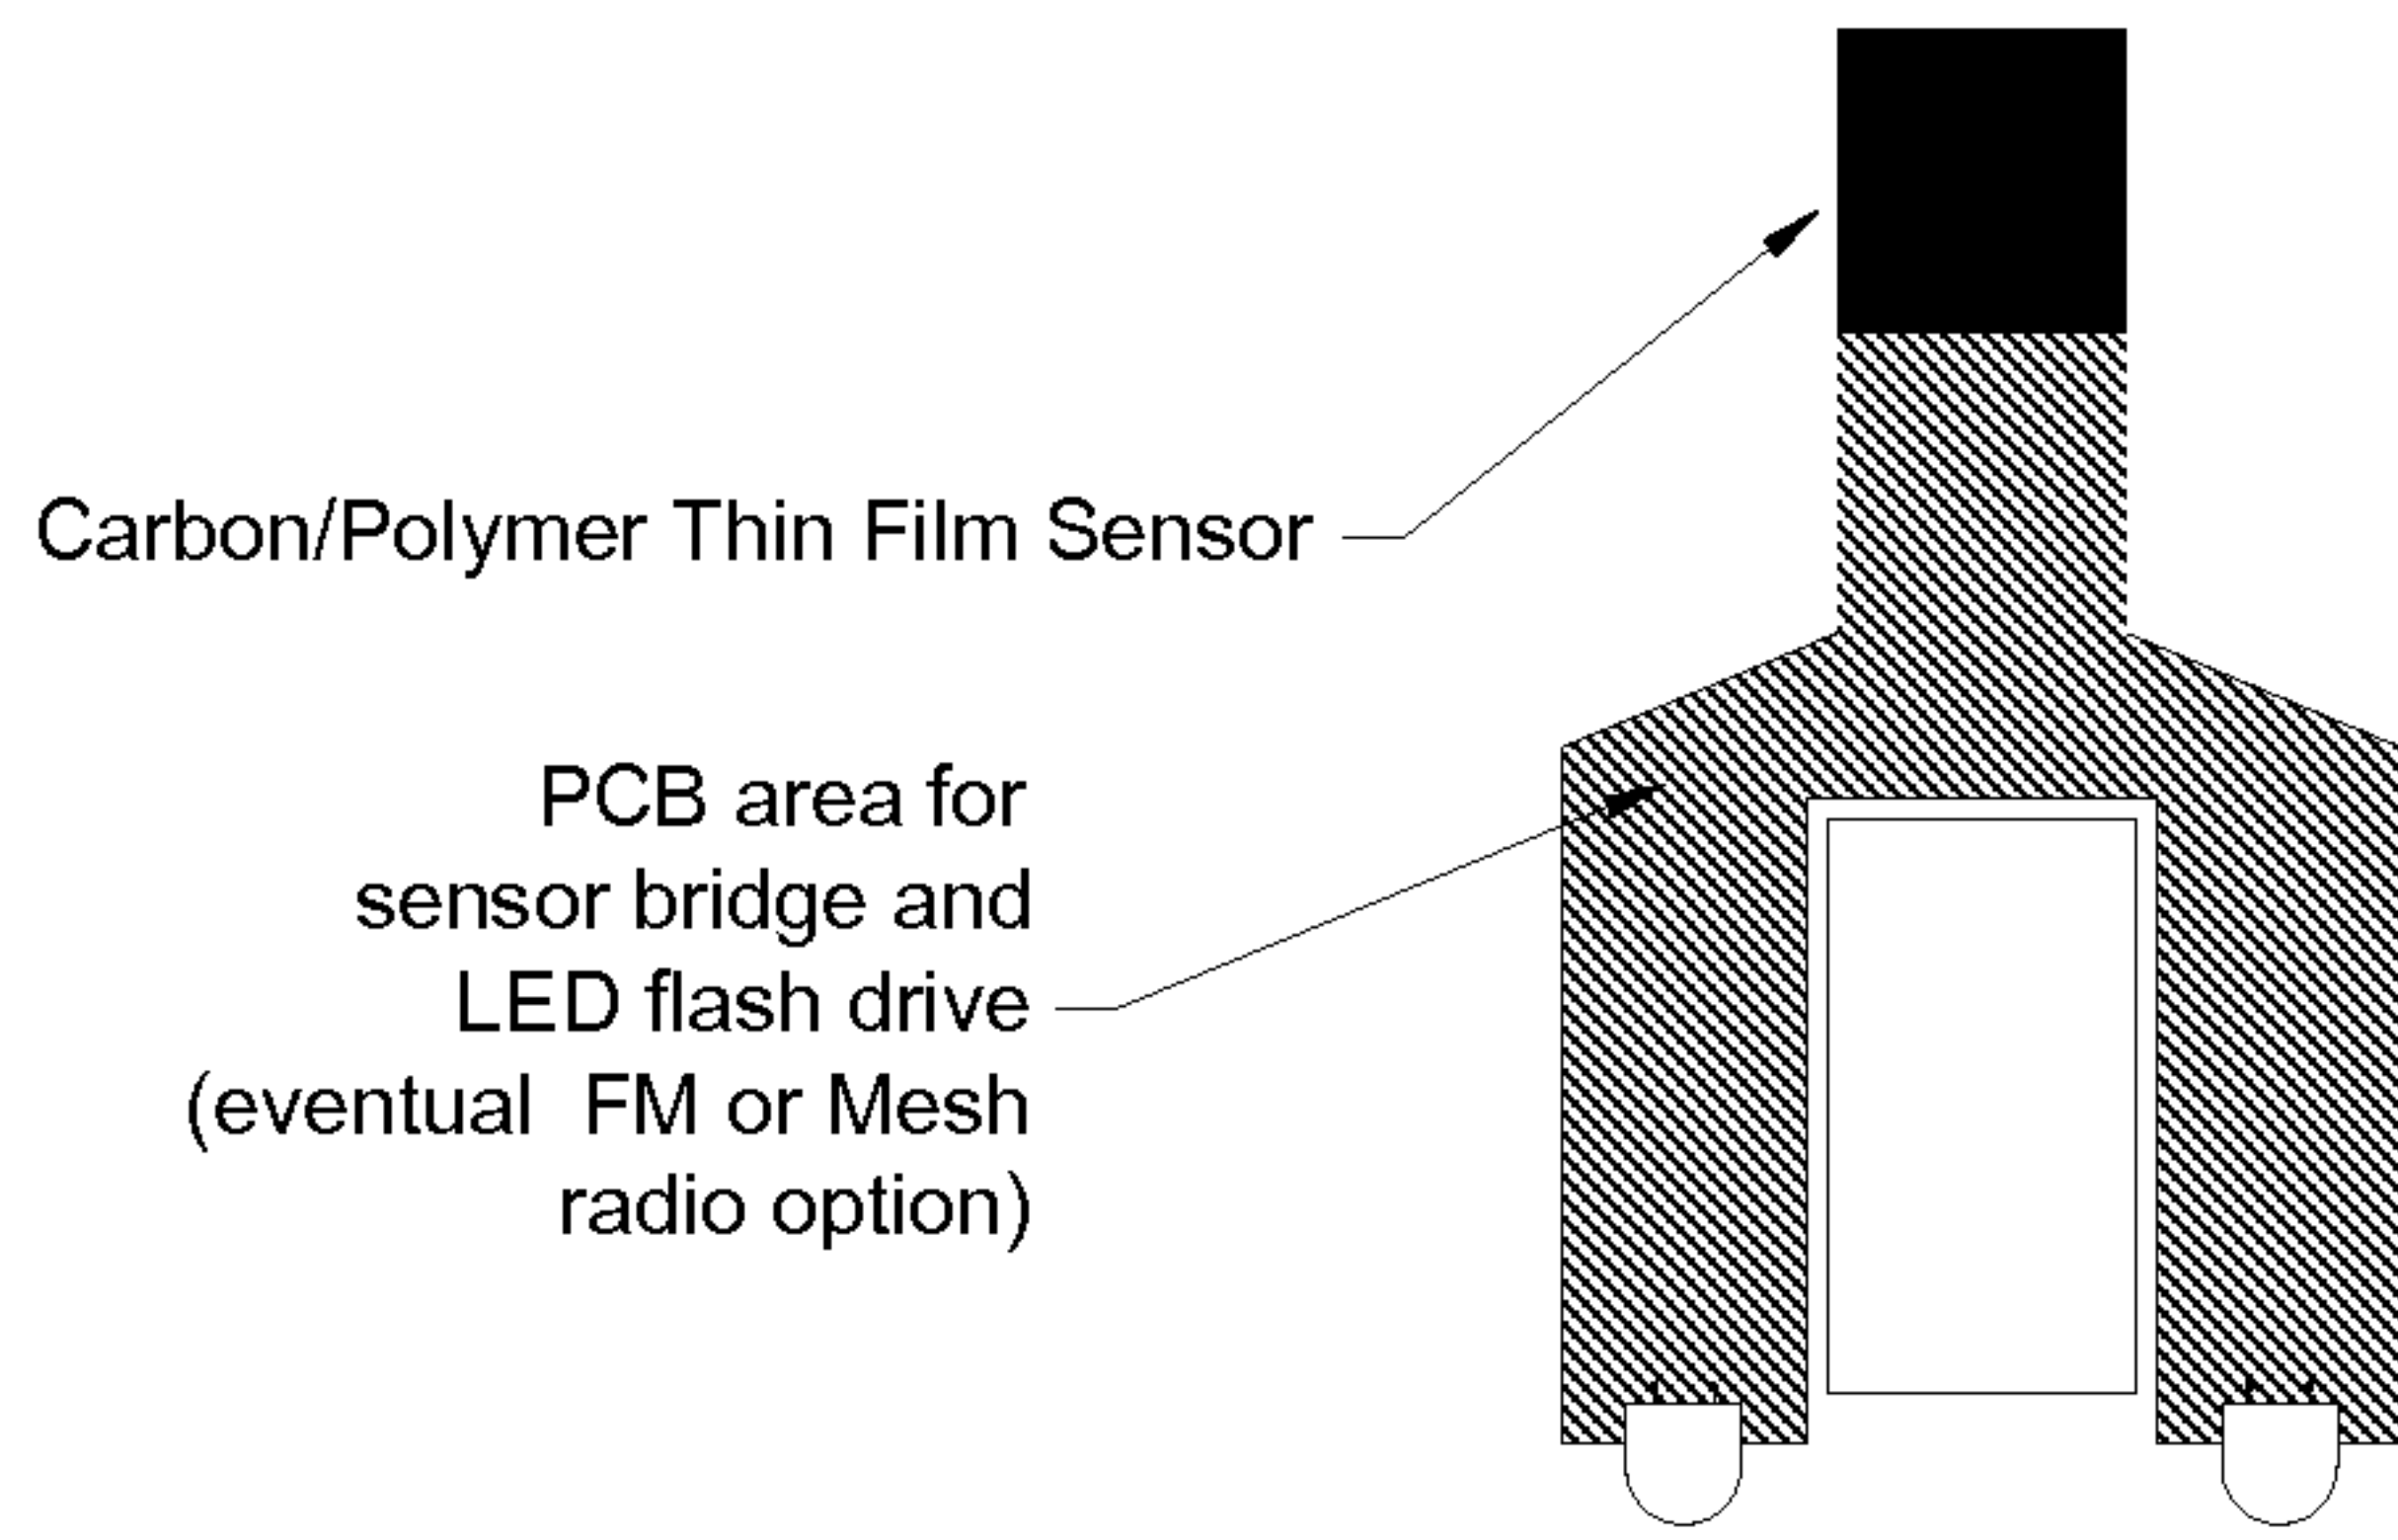

Carbon/Polymer Thin Film Sensor

PCB area for
sensor bridge and
LED flash drive
(eventual FM or Mesh
radio option)

Fig. 2A

Tubular body (e.g. 1 meg ohm / 1 watt
carbon resistor coated with carbon
polymer film


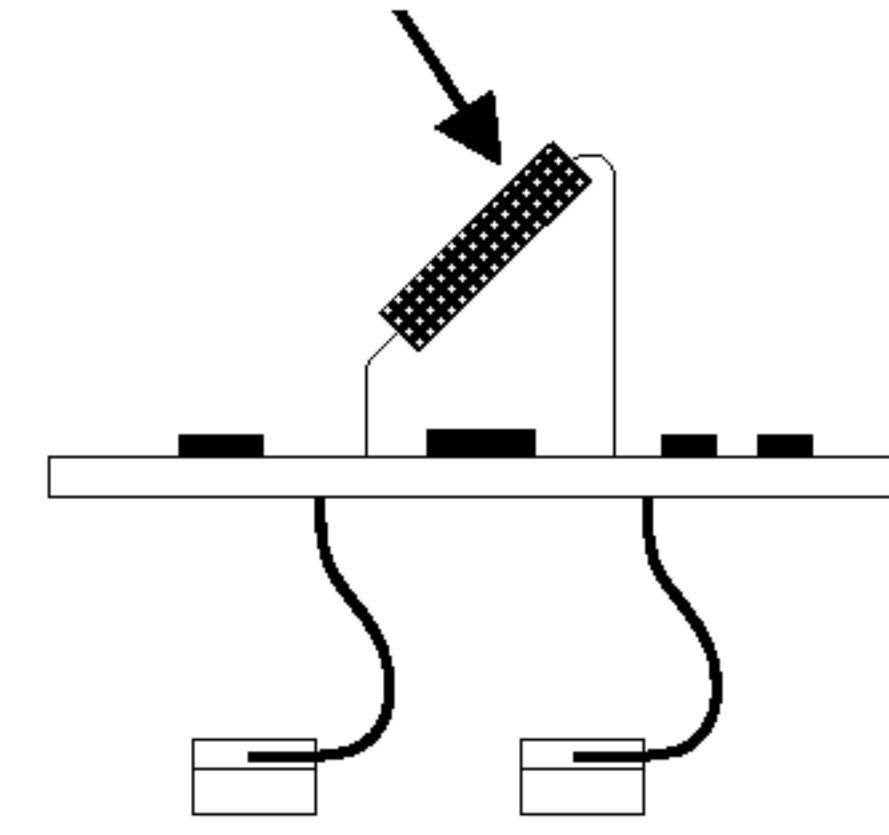


Fig. 2B

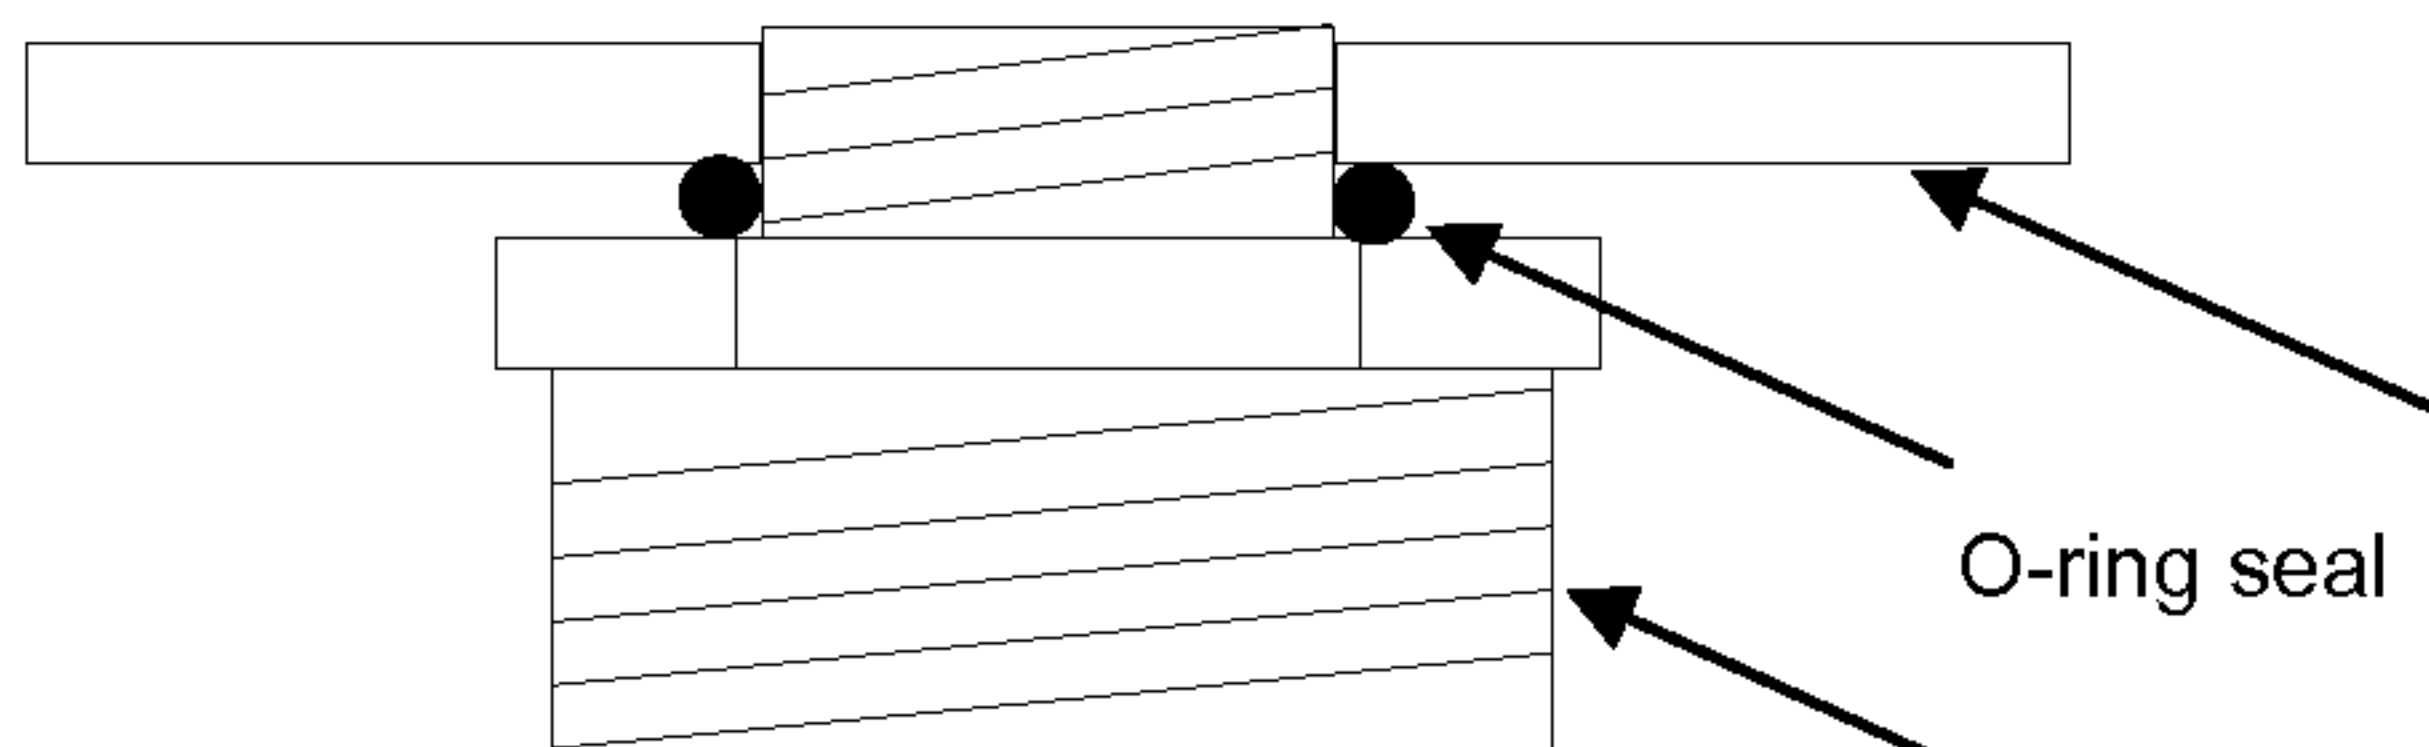

Thick outer pipe wall of double containment
hazardous pipe system

O-ring seal

Threaded version of device

Fig. 3

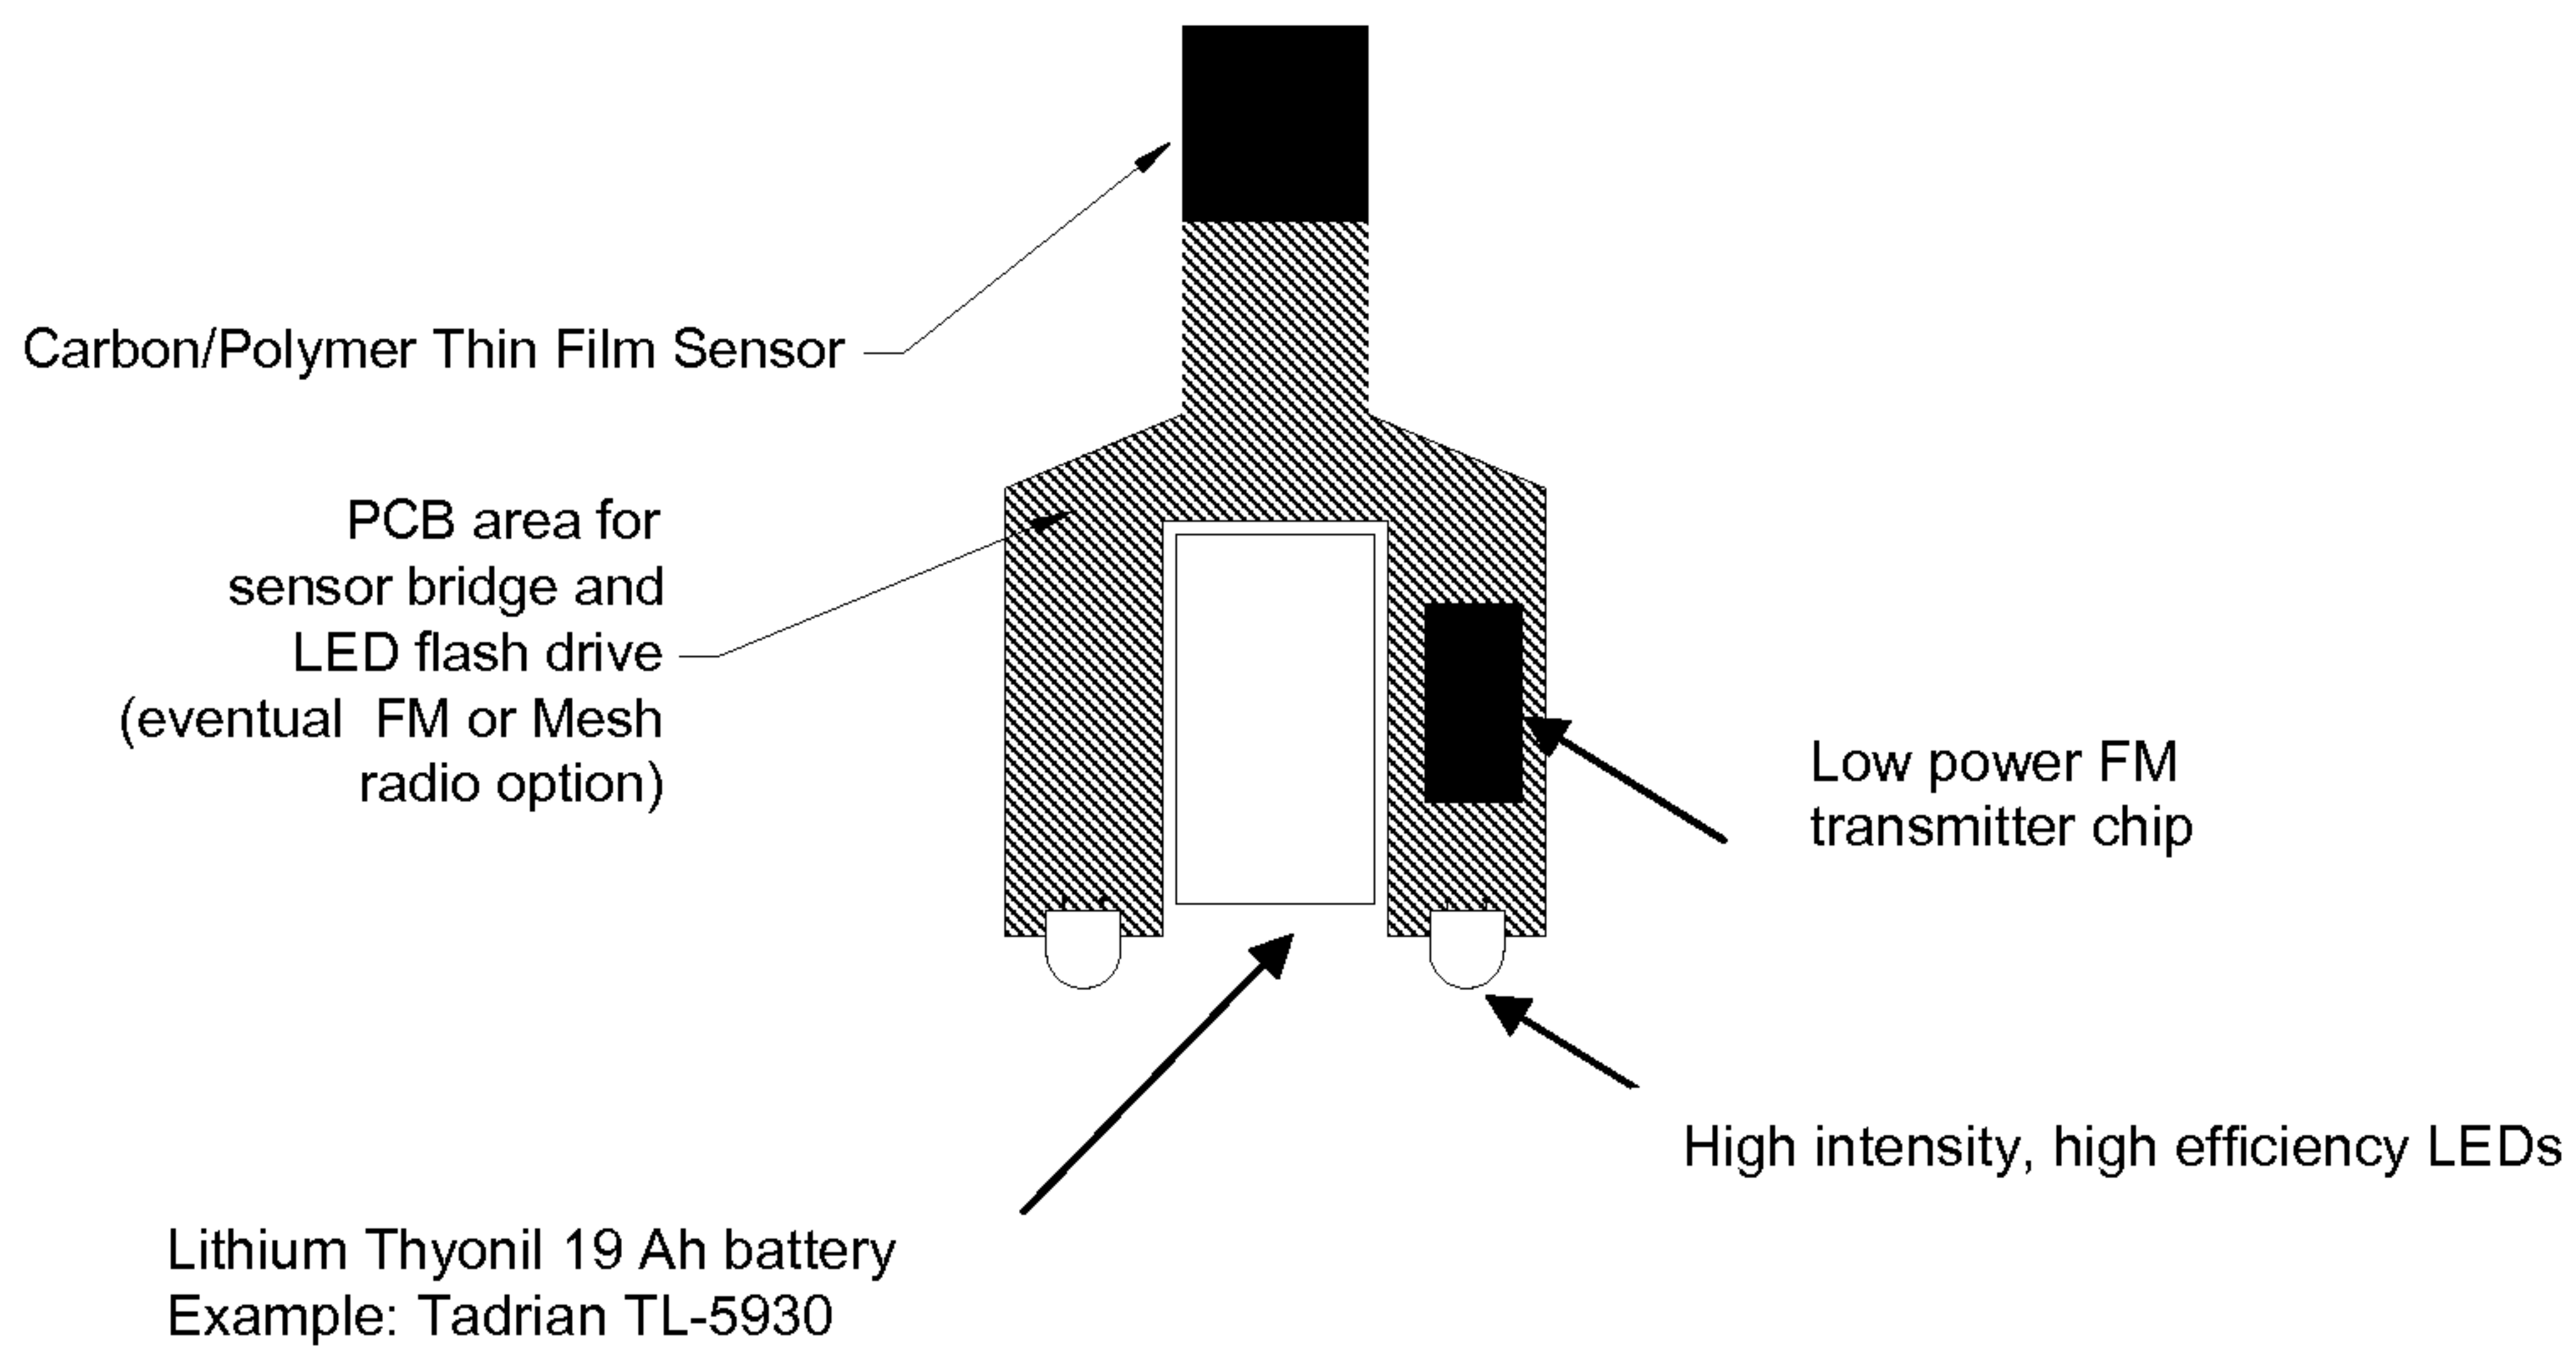


Fig. 4a

Cross section view of initial embodiment:

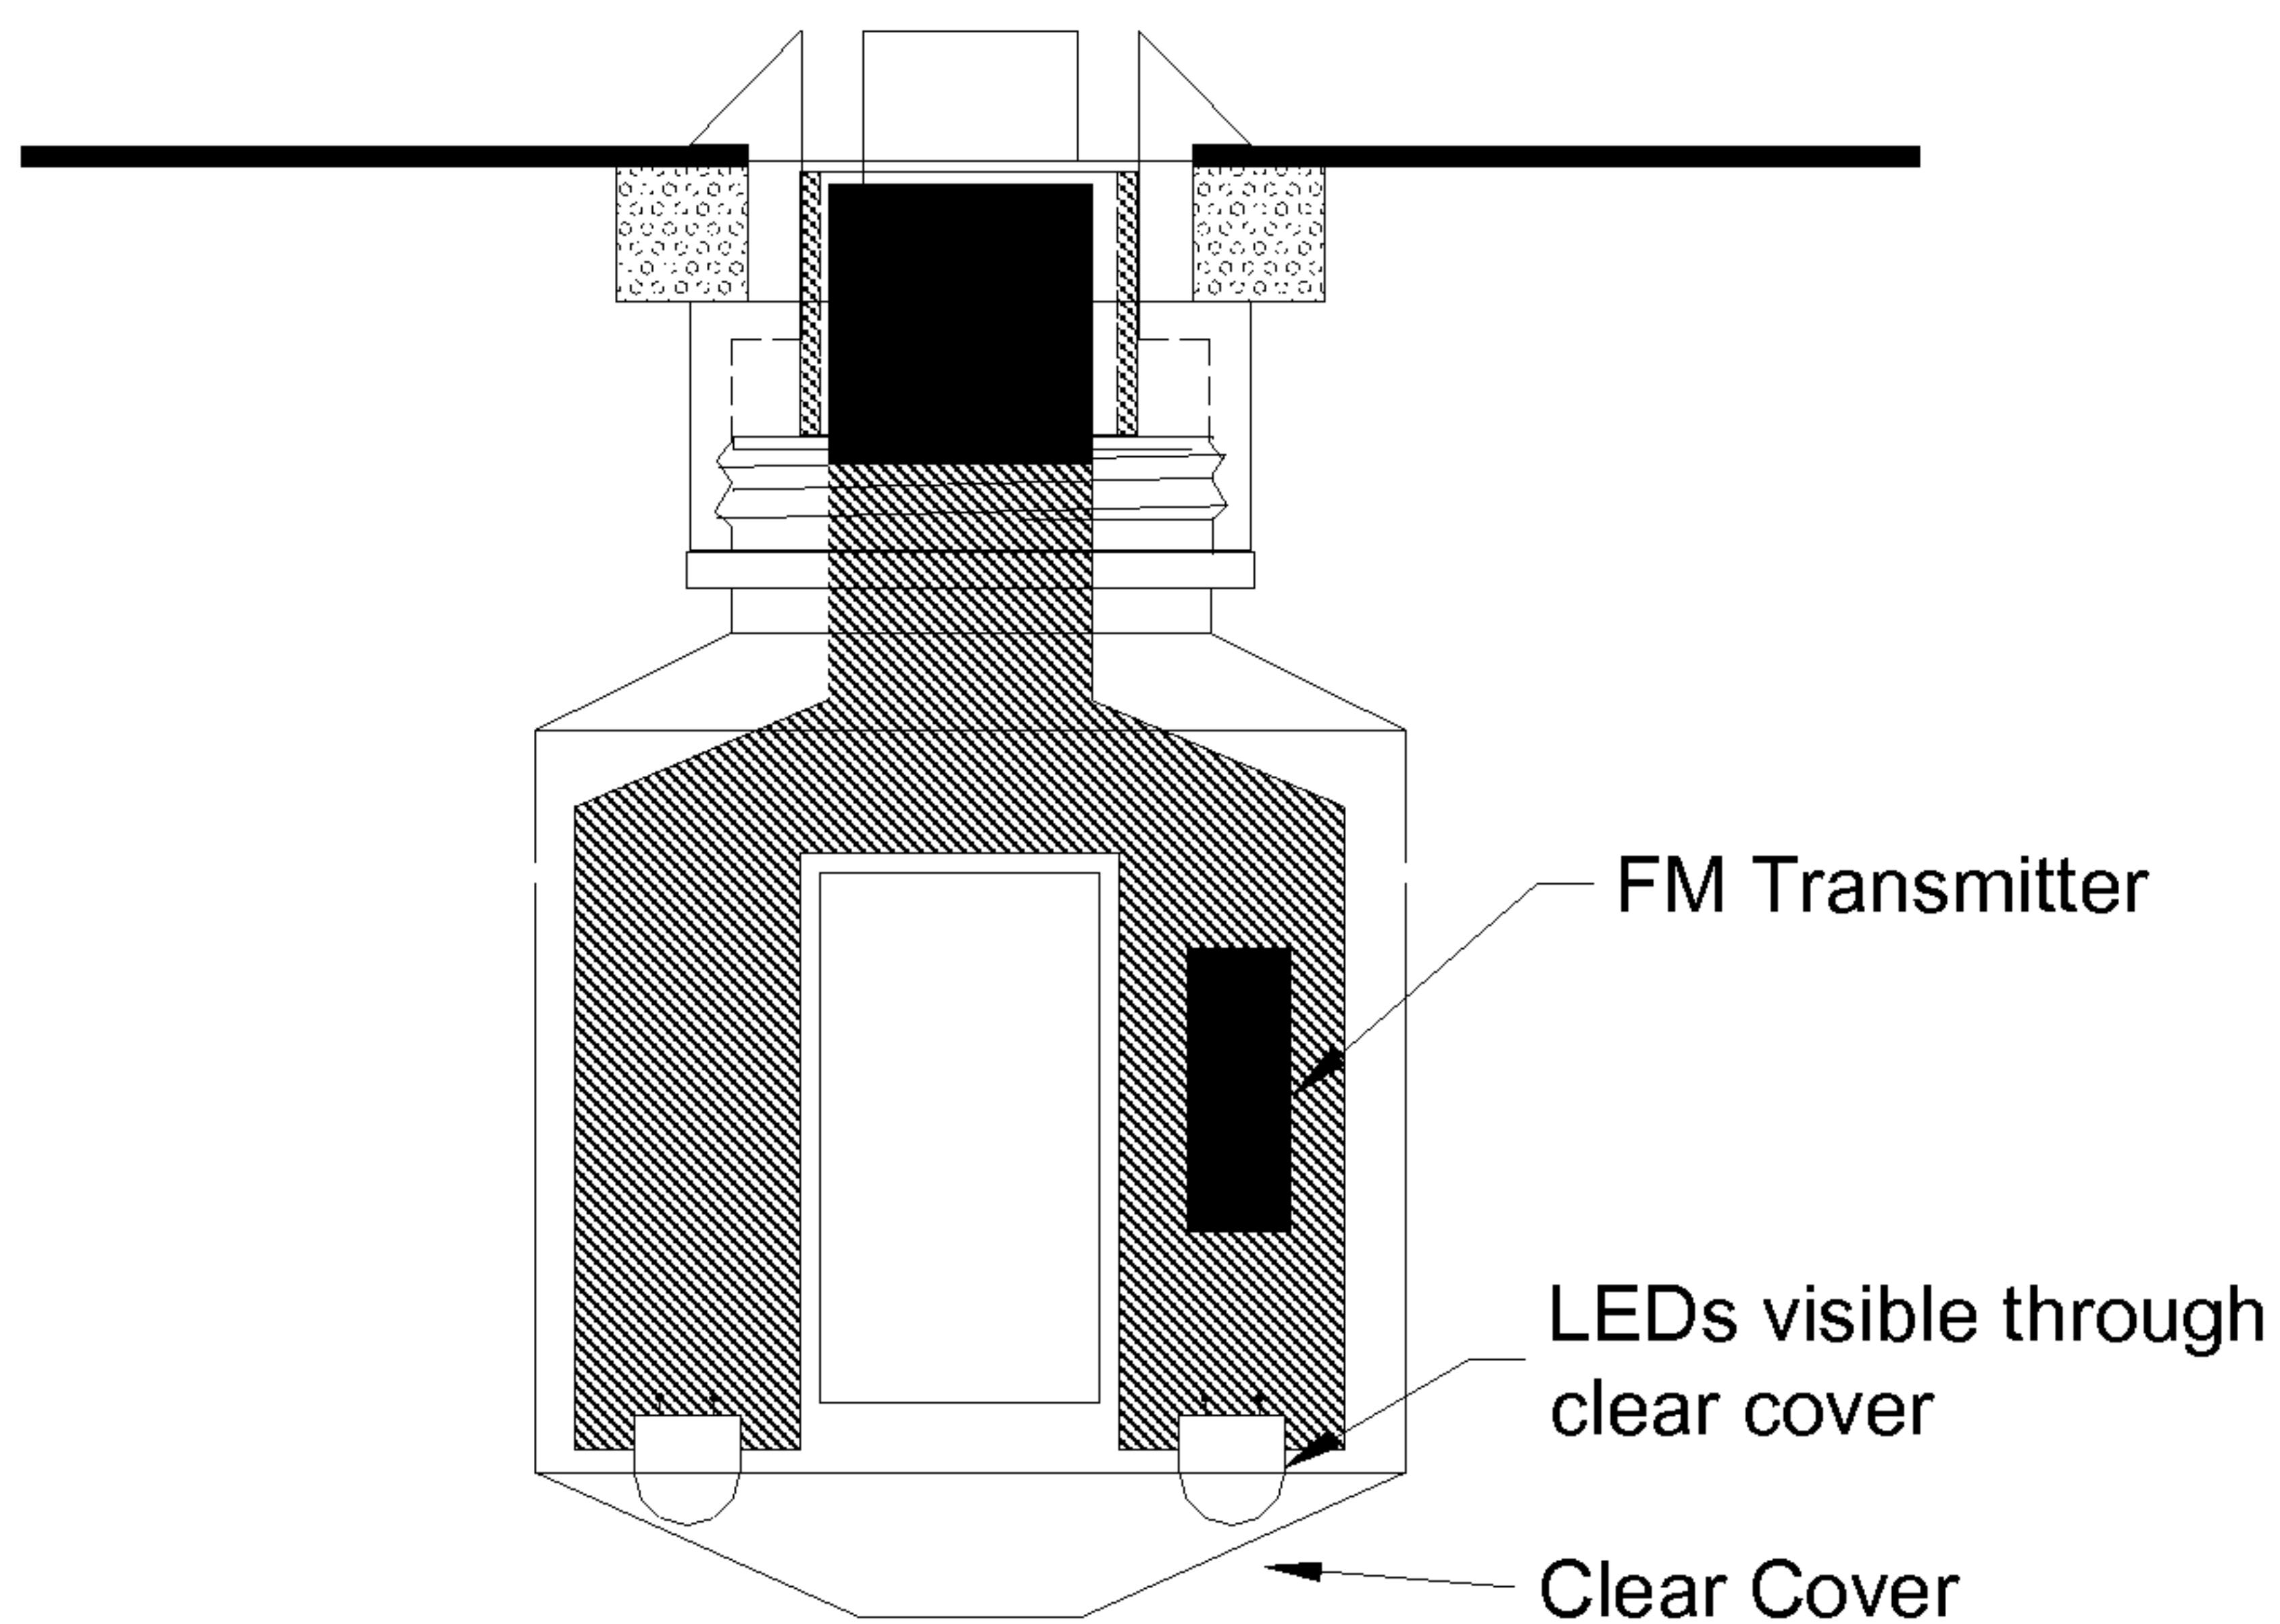


Fig. 4B

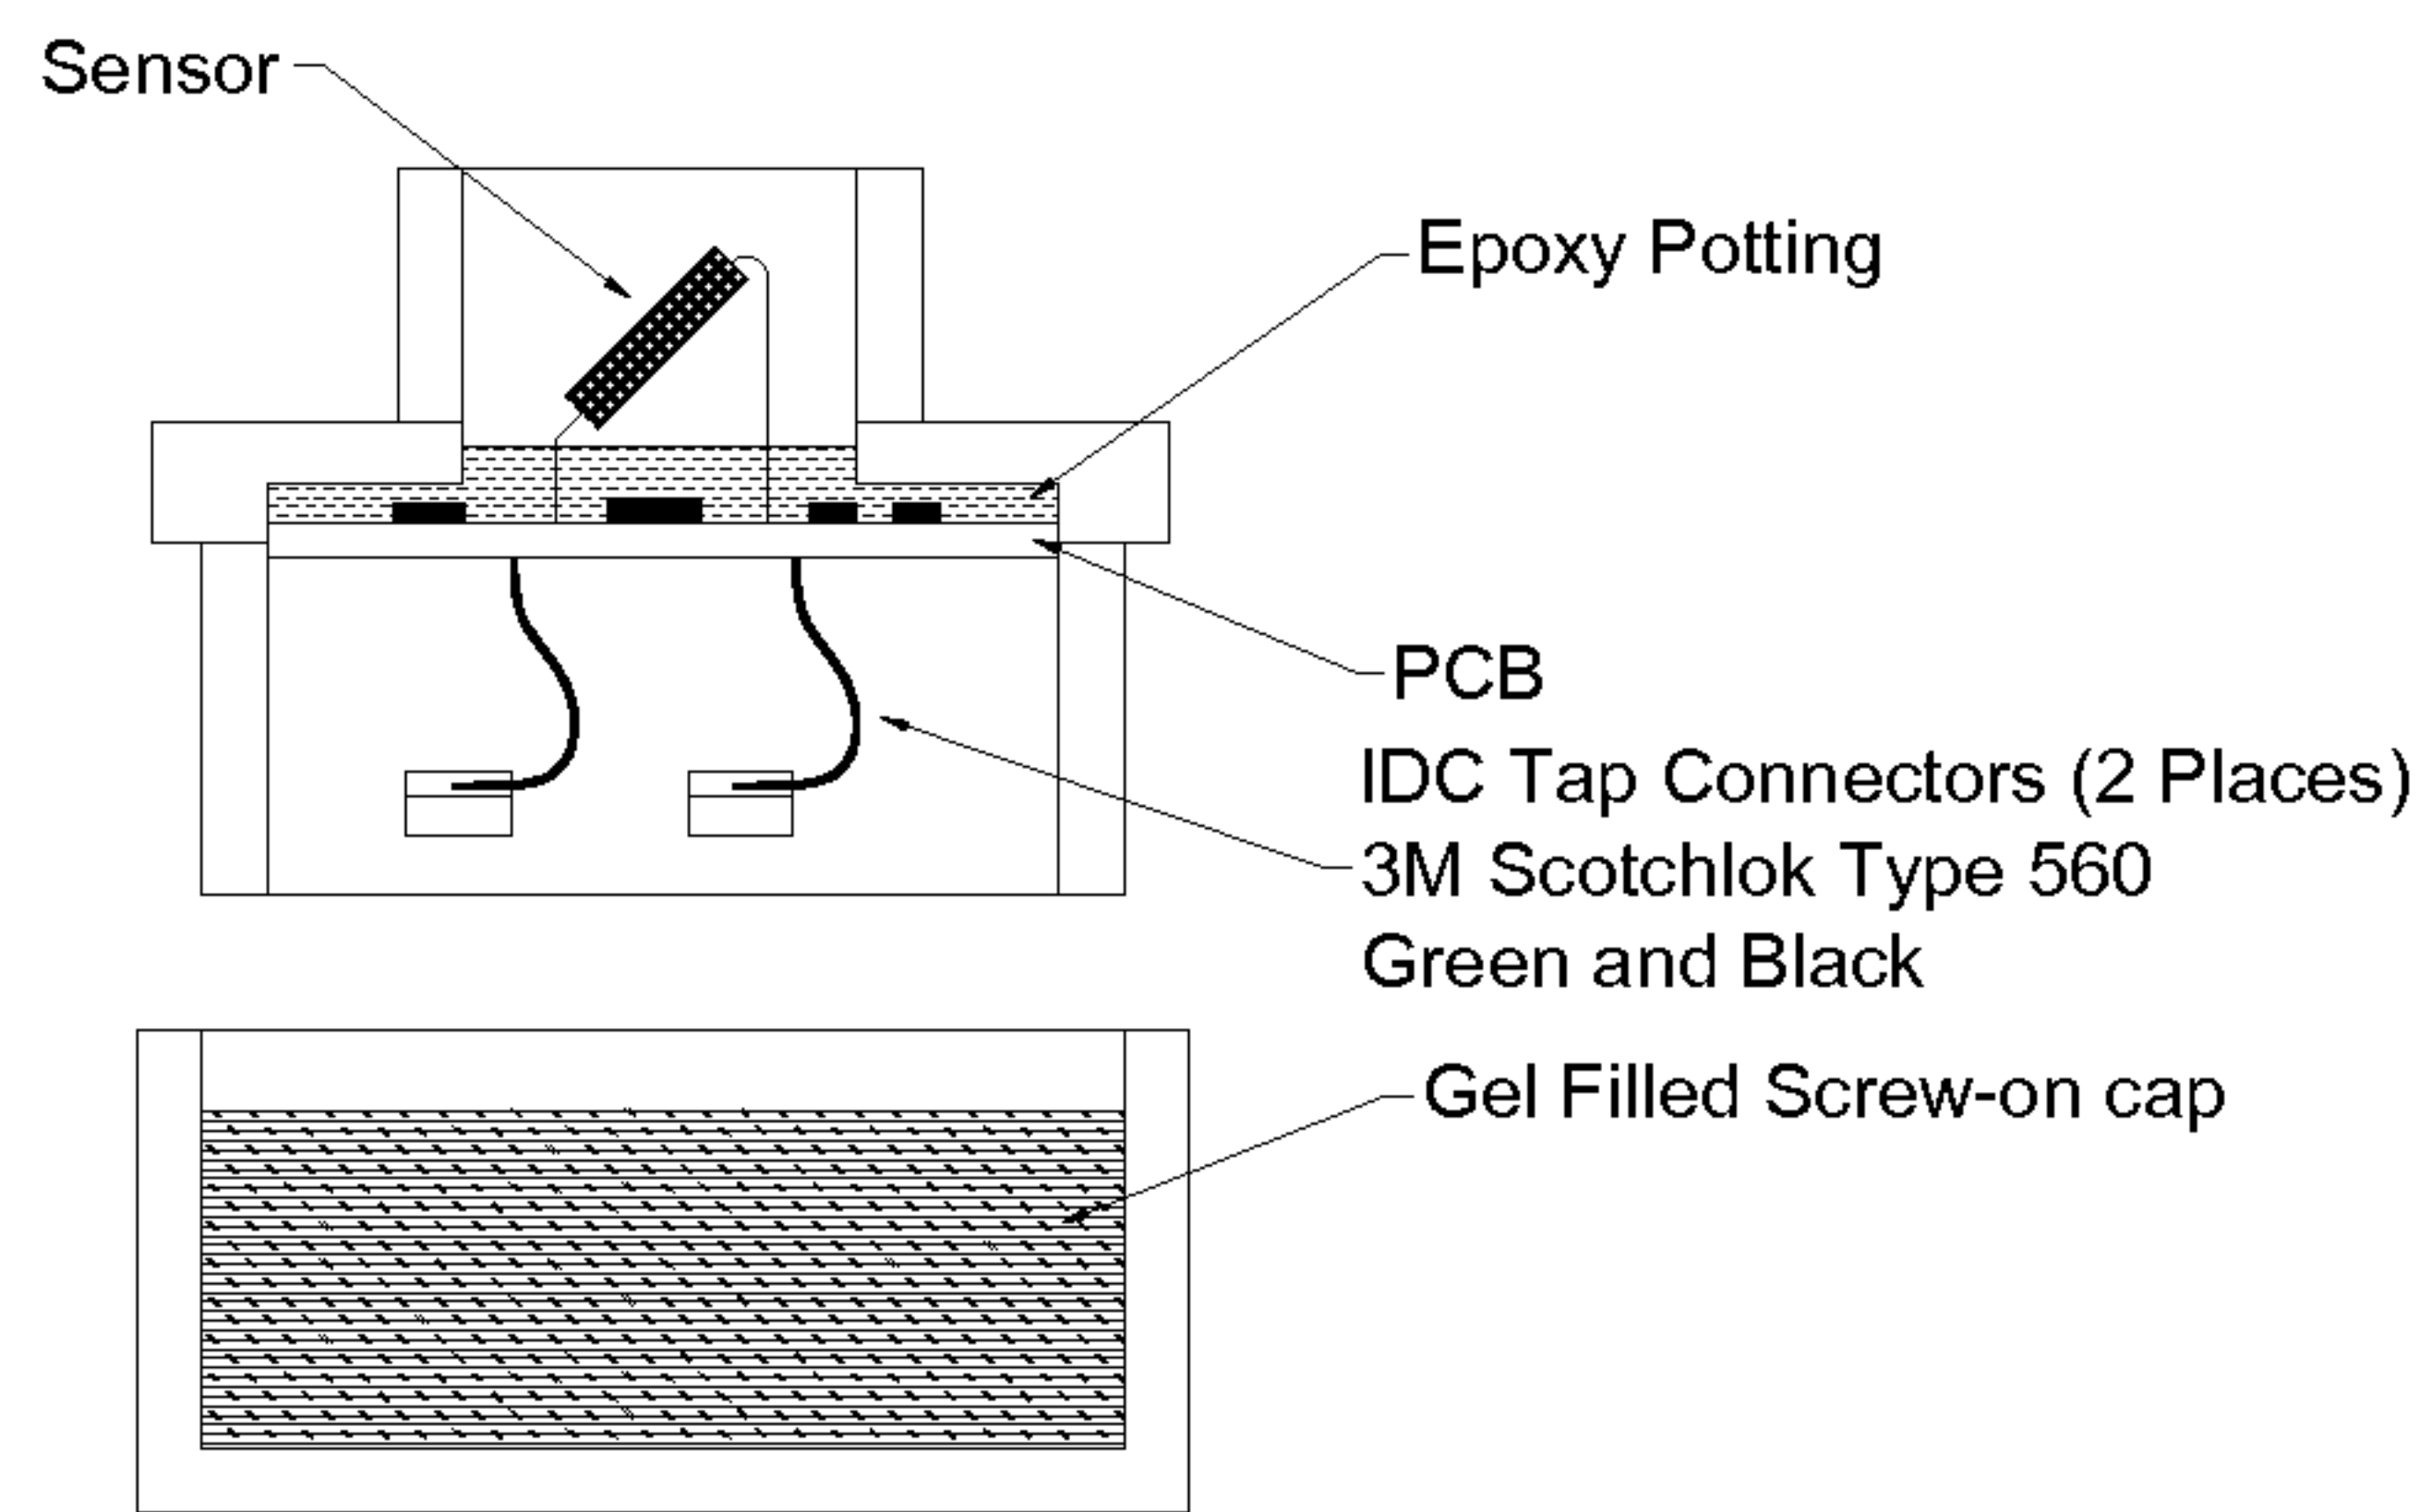


Fig. 5A


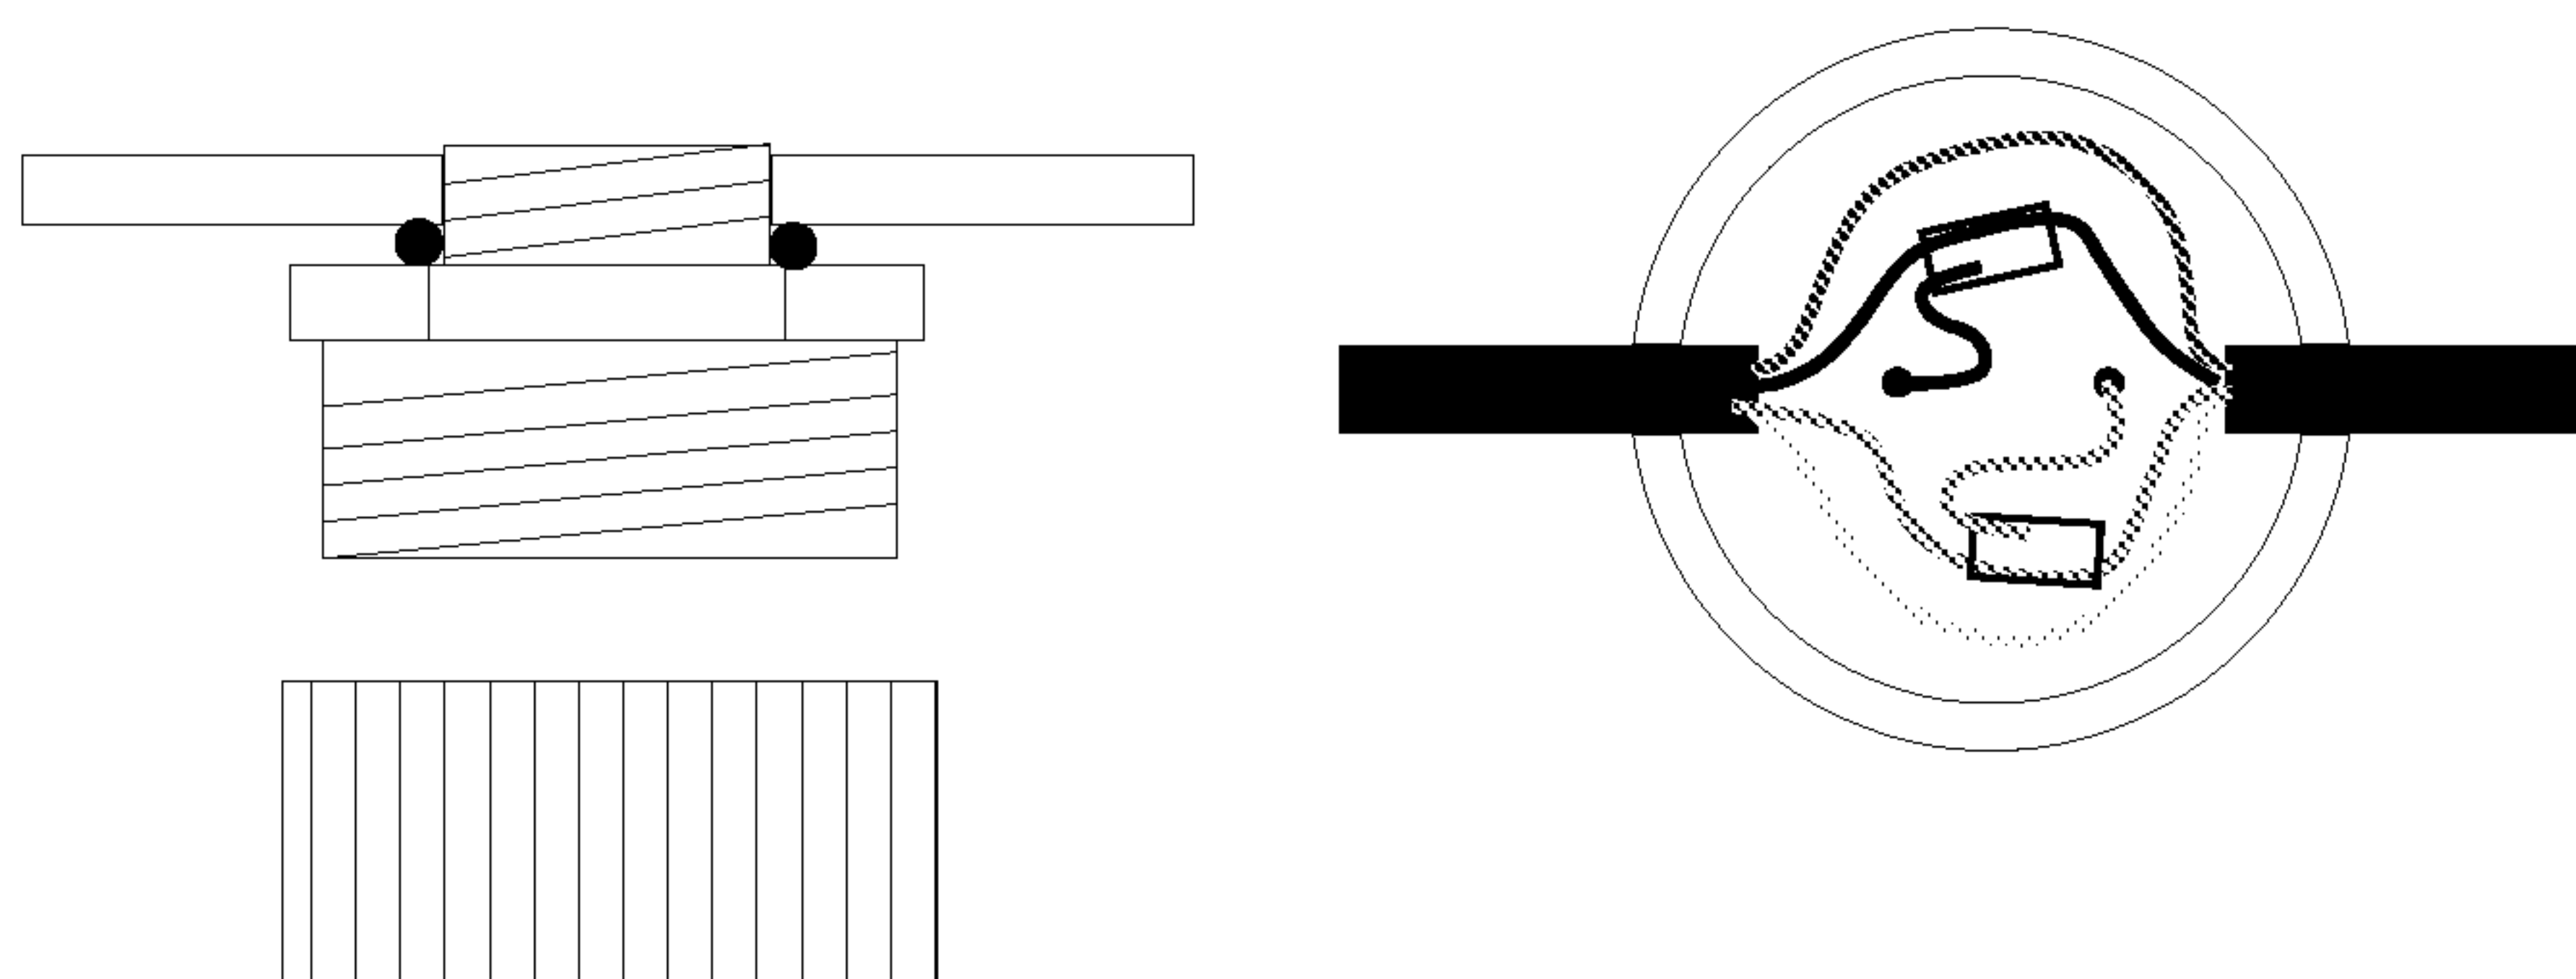



Fig. 5B

Fig. 5C


Sheet metal

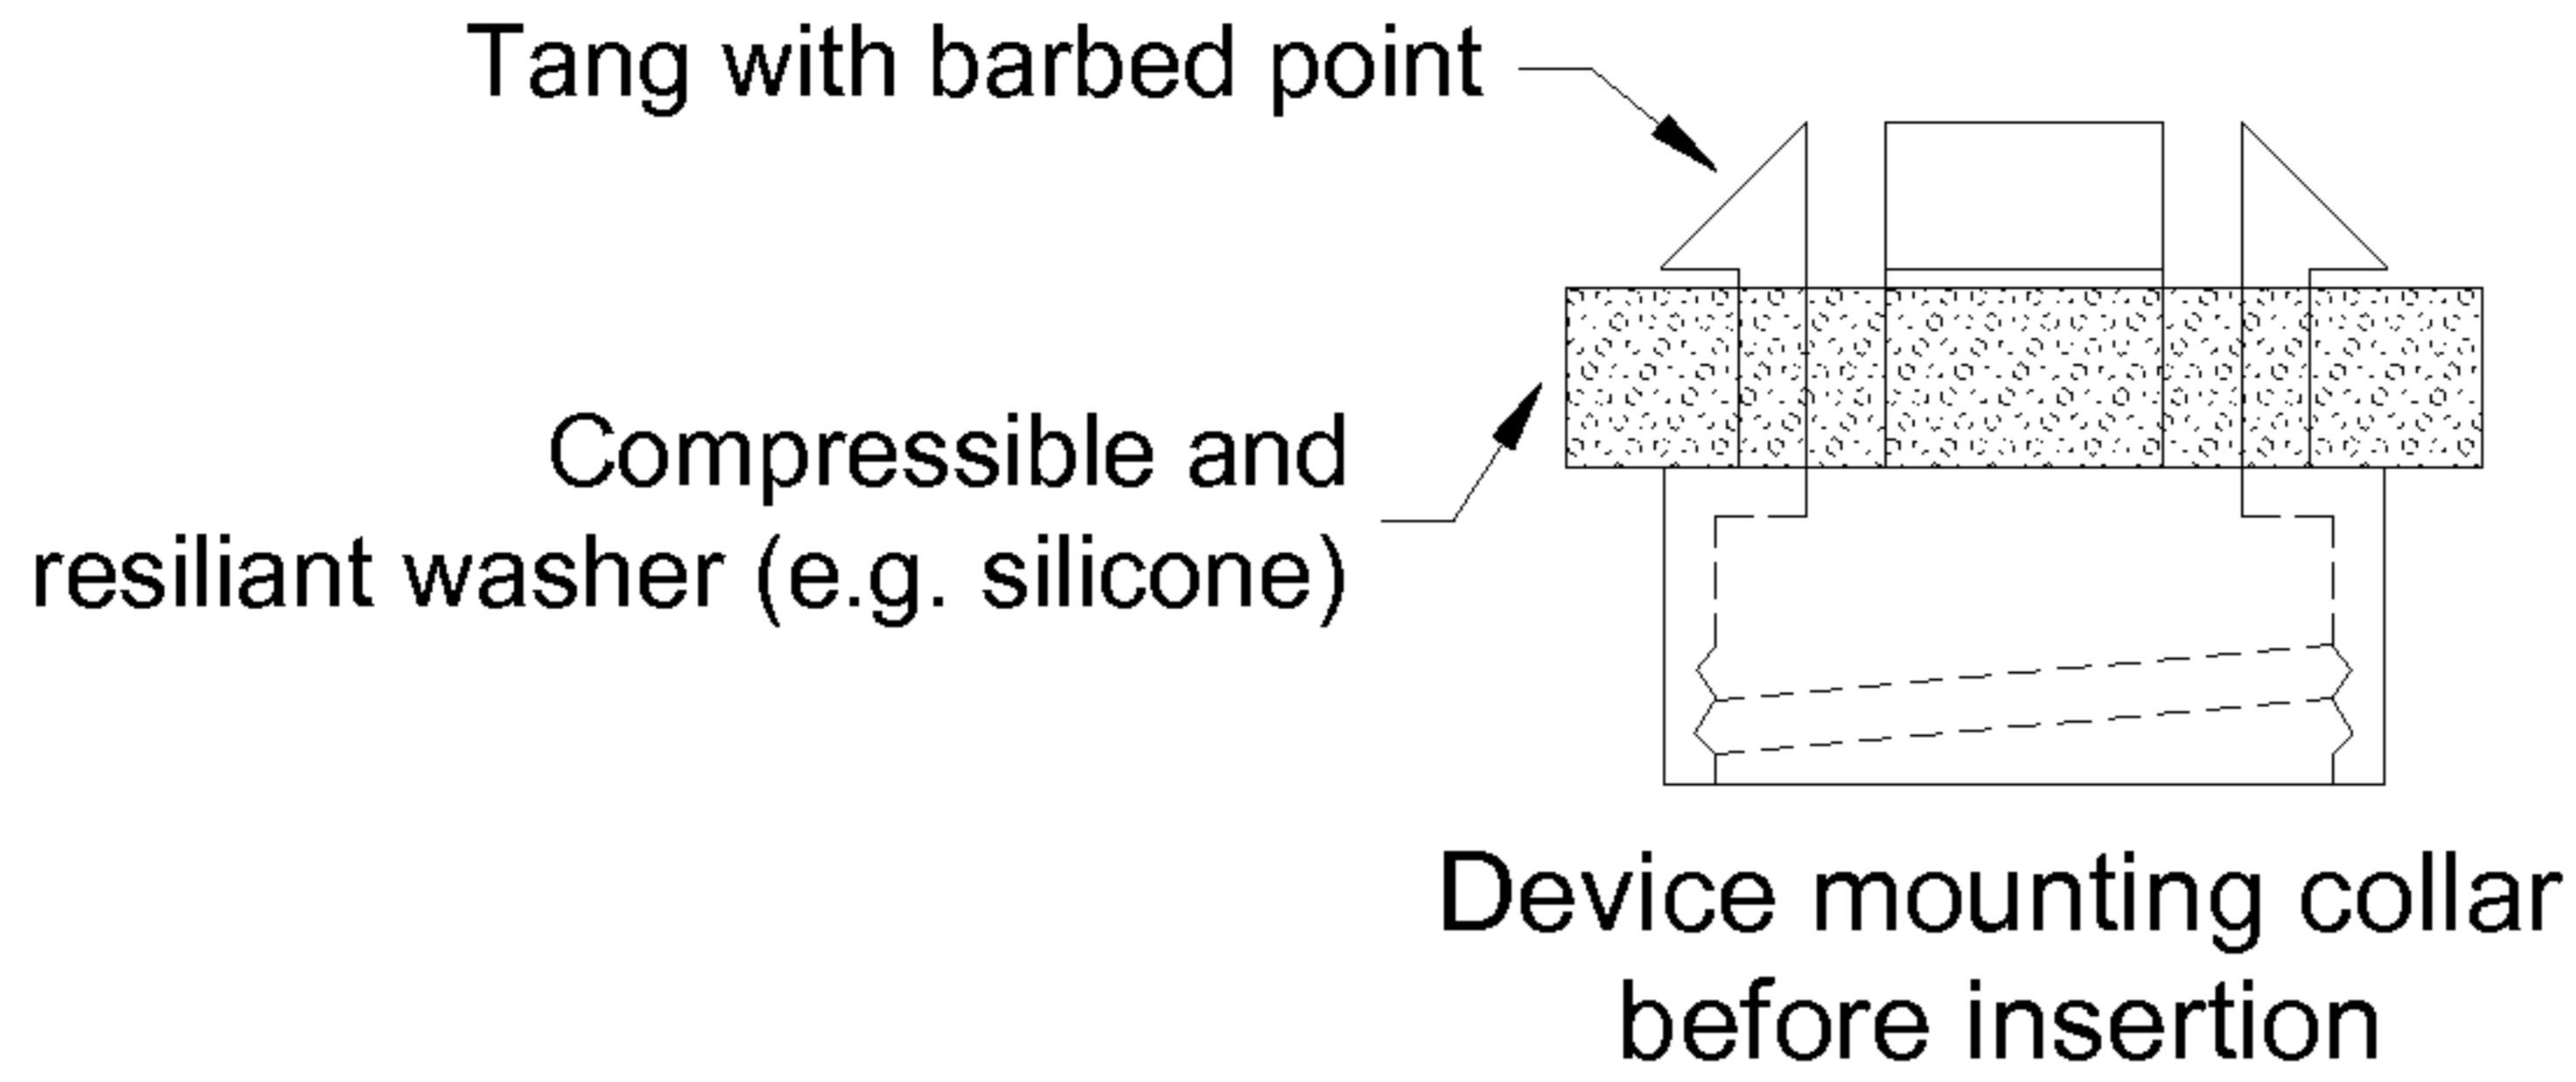


A

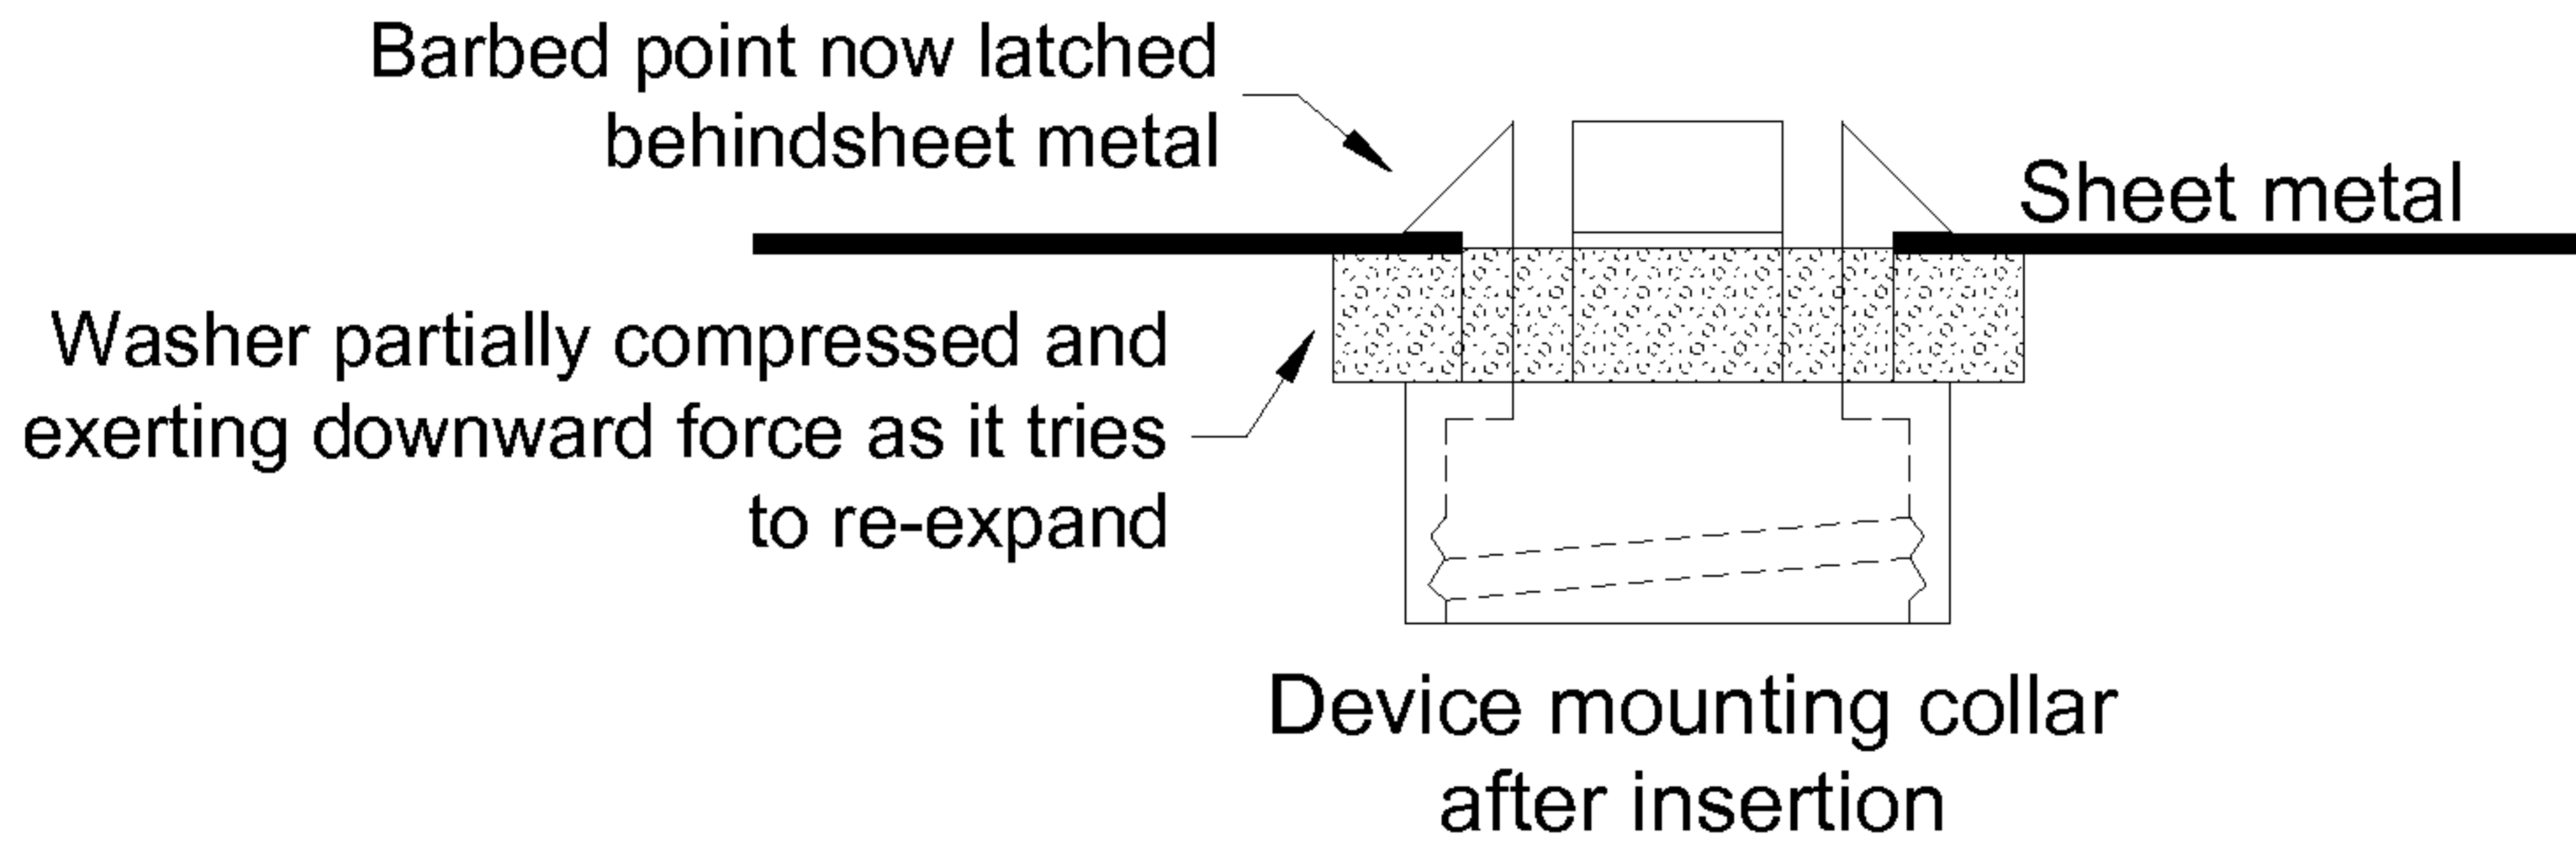

B

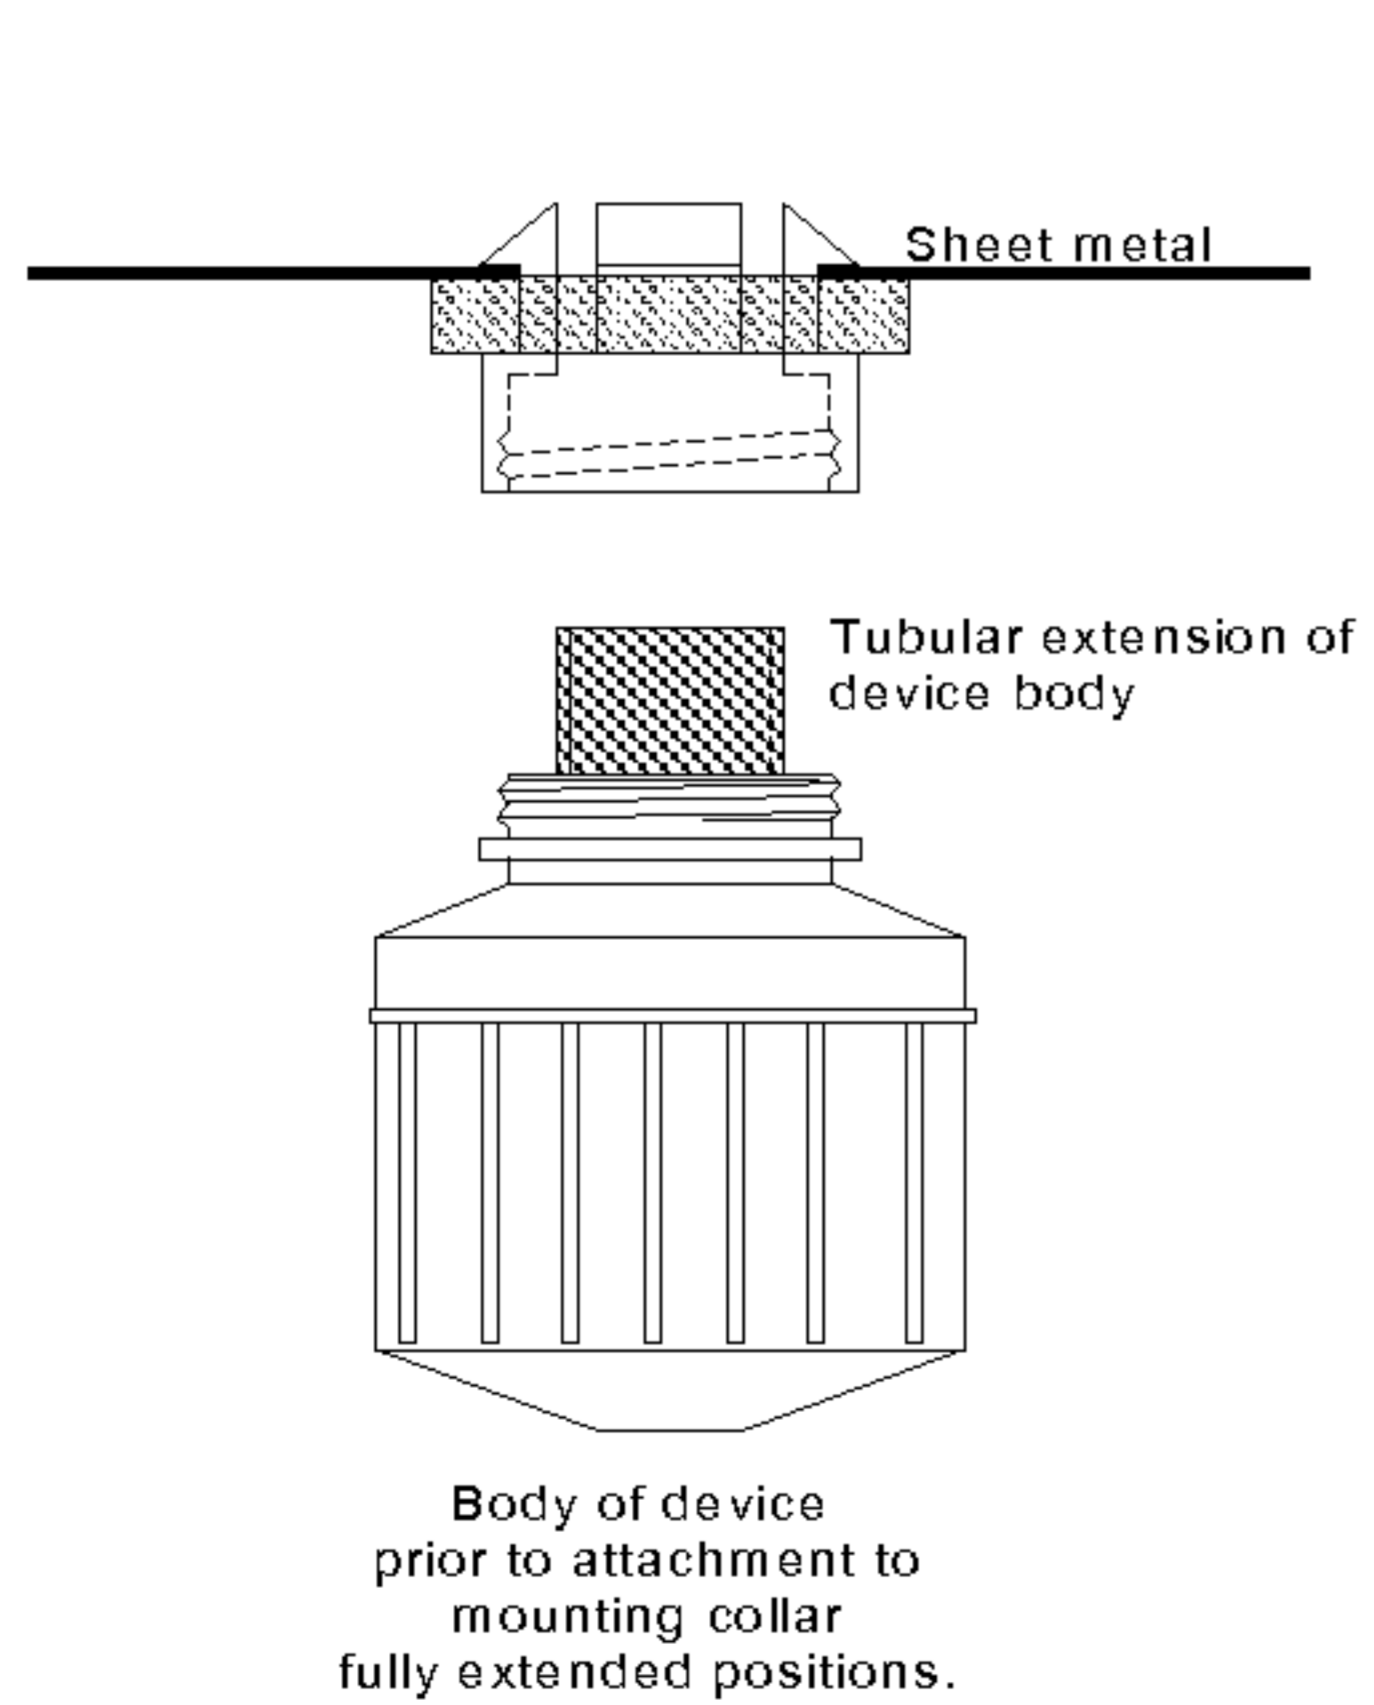

C

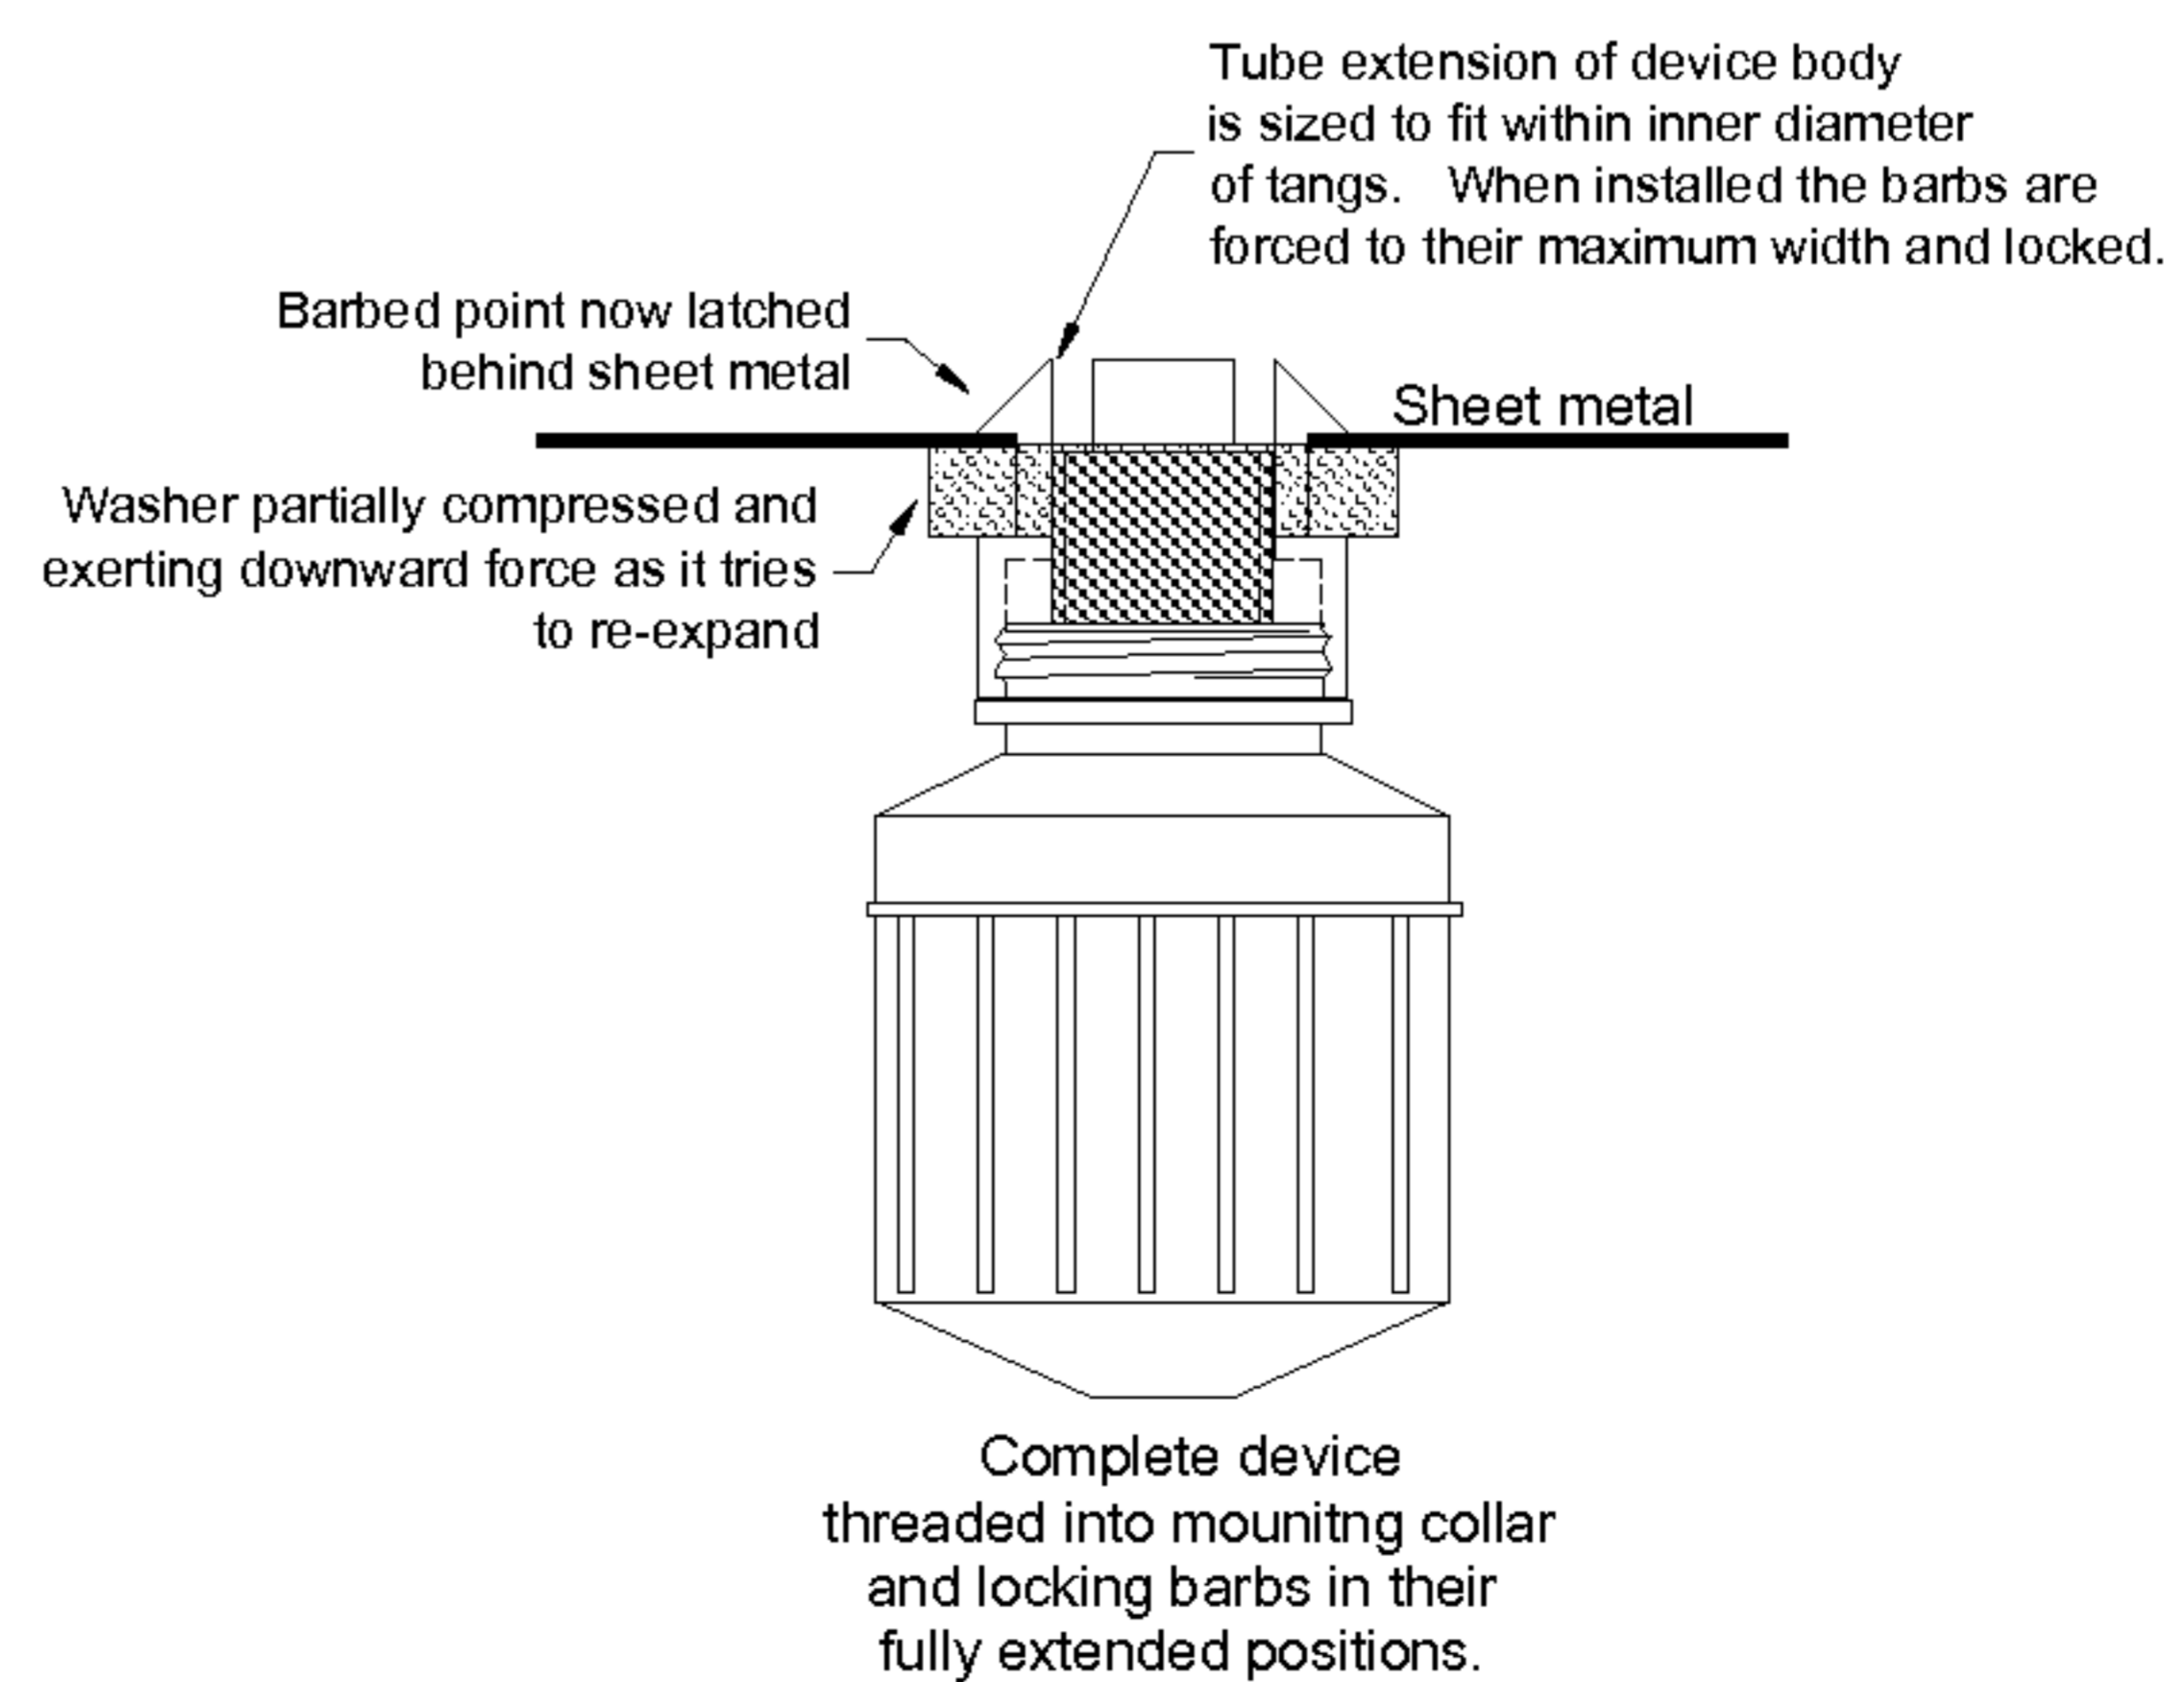

D