



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 7/26, H04L 12/56	A1	(11) International Publication Number: WO 00/21220 (43) International Publication Date: 13 April 2000 (13.04.00)		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> (21) International Application Number: PCT/EP98/06362 (22) International Filing Date: 6 October 1998 (06.10.98) (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): RINNE, Mikko, J. [FI/FI]; Tallbergin puistotie 1 C 25, FIN-00200 Helsinki (FI). VIRTANEN, Terhi [FI/FI]; Näretie 7 F 21, FIN-90650 Oulu (FI). (74) Agent: PELLMANN, Hans-Bernd; Tiedtke-Bühling-Kinne, Bavarianring 4, D-80336 München (DE). </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> </td> </tr> </table>			(21) International Application Number: PCT/EP98/06362 (22) International Filing Date: 6 October 1998 (06.10.98) (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): RINNE, Mikko, J. [FI/FI]; Tallbergin puistotie 1 C 25, FIN-00200 Helsinki (FI). VIRTANEN, Terhi [FI/FI]; Näretie 7 F 21, FIN-90650 Oulu (FI). (74) Agent: PELLMANN, Hans-Bernd; Tiedtke-Bühling-Kinne, Bavarianring 4, D-80336 München (DE).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(21) International Application Number: PCT/EP98/06362 (22) International Filing Date: 6 October 1998 (06.10.98) (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; P.O. Box 300, FIN-00045 Nokia Group (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): RINNE, Mikko, J. [FI/FI]; Tallbergin puistotie 1 C 25, FIN-00200 Helsinki (FI). VIRTANEN, Terhi [FI/FI]; Näretie 7 F 21, FIN-90650 Oulu (FI). (74) Agent: PELLMANN, Hans-Bernd; Tiedtke-Bühling-Kinne, Bavarianring 4, D-80336 München (DE).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>			
(54) Title: RADIO LINK PROTOCOL WITH REDUCED SIGNALING OVERHEAD				
<p>max. 320 bit</p>				
(57) Abstract <p>A signaling method for a link protocol used for transmitting a data unit in a telecommunication system and a network element using the signaling method are described, wherein a predetermined number of a sequence number field provided in a protocol data unit is used for signaling a control function of the link protocol, such as a protocol reset function. Thereby, a separate control PDU-type is no longer required for signaling the respective control function, such that transmission overhead can be reduced.</p>				

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

RADIO LINK PROTOCOL WITH REDUCED SIGNALING OVERHEAD

5

Field of the invention

10 The present invention relates to signaling method for a link protocol used for transmitting a data unit in a telecommuni-cation system such as the GSM system, and to a network element, transmitter and receiver using the signaling method.

15

BACKGROUND OF THE INVENTION

20 In telecommunication systems, protocol layers are provided in order to define an architecture of a signaling system for exchanging an information. A protocol layer is a logical unit in a communication element such as a mobile station (MS), a base station (BS) or a mobile switching center (MSC). Each protocol layer has specific tasks and means or tools for achieving its tasks.

25 In the GSM system, a Radio Link Protocol (RLP) is used for data transmission and covers the layer 2 functionality of the ISO OSI Reference Model (IS 7498). The RLP has been tailored to the special needs of digital radio transmission and provides to its users the OSI Data Link Service (IS
30 8886).

The RLP spans from the MS to an interworking function (IWF) located at the nearest MSC, or beyond. Depending on the exact location of the IWF, handover of the MS may result in
35 a link-reset or even total loss of connection. The RLP is used to balance configuration, employing asynchronous operation, i.e. either station has the right to set-up, reset or disconnect a link at any time. The RLP is full-duplex in the sense that it allows for information to be
40 transferred in both directions simultaneously.

Between the two endpoints of an RLP-connection, there exists a flow control function specified by a queue model, wherein packet data units (PDUs) comprising a protocol
5 header portion and transmission data are placed in a queue for subsequent transmission.

The RLP has a separate set of control PDUs including a reset PDU for signaling a reset of peer entities of the
10 RLP. The control PDU-type is indicated in the header portion of the PDU. The reset PDU is placed in the queue in order to signal a reset. Thus, extra control PDU-types are required for control functions such as resetting an RLP connection.

15 In upcoming third generation telecommunication systems such as the Universal Mobile Telecommunication System (UMTS), a Radio Link Control (RLC) protocol will be used, which is intended for high data rates. This means that extra
20 overhead for control purposes should be avoided.

However, defining control PDU-types adds overhead to the protocol header and the use of a very high number of control messages adds undesirable complexity in the
25 protocol.

SUMMARY OF THE INVENTION

30 It is therefore an object of the present invention to provide a signaling method for a link protocol and a network element using the same, by means of which overhead and complexity can be reduced.

35 This object is achieved by a signaling method for a link protocol used for transmitting a data unit in a telecommunication system, comprising the steps of:

- 3 -

encapsulating the data unit in a protocol data unit having a field for a sequence number of the data unit; and using a predetermined sequence number for signaling a control function of the link protocol.

5 Furthermore, the above object is achieved by a transmitter for transmitting a data unit in a telecommunication system, wherein the transmitted data unit is encapsulated in a protocol data unit having a field for a sequence number, comprising:

10 signaling transmitting means for signaling a control function; and
sequence numbering means, responsive to said signaling transmitting means, for indicating said control function using said sequence number field.

15 Additionally, the above object is achieved by a receiver for receiving a data unit in a telecommunication system, wherein the received data unit is encapsulated in a protocol data unit having a field for a sequence number,

20 comprising:
sequence number reading means for reading a sequence number in said sequence number field; and
signaling receiving means, responsive to the sequence number reading means, for interpreting a predefined
25 sequence number as a request for a control function.

Accordingly, a predetermined number in the address space of the data unit sequence number is reserved for signaling a control function of the link protocol. Thereby, a separate
30 control PDU-type is no longer required for signaling the control function, such that the overhead in the PDU header portion can be reduced.

Preferably, the control function is a reset function of the
35 link protocol. Thus, if the reset function is the only control signal needed in the forward direction, a PDU-type indicator would no longer be required.

- 4 -

The predetermined sequence number may be the number "0". In this case, the sequence numbering of the protocol data units simply can be changed by continuing with the number "1" after the maximum sequence number has been reached.

- 5 This may easily be achieved by a corresponding sequence counter reset function.

Alternatively, the predetermined sequence number may be one of the numbers having the highest values addressable in the sequence number field. In this case, the sequence numbering of the protocol data units may continue with the number "0" after reaching a maximum number defined to be less than the predetermined sequence number.

15

BRIEF DESCRIPTION OF THE DRAWINGS

In the following the present invention will be described in greater detail on the bases of a preferred embodiment with reference to the accompanying drawings in which:

20 Fig. 1 shows a principle diagram of a queue model used for specifying a flow control function of an RLC connection,

25 Fig. 2 shows a principle frame structure of an RLC protocol data unit, and

30 Fig. 3 shows a principle block diagram of a transmitter and a receiver of respective network elements according to the preferred embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

35 The following preferred embodiment relates to a signaling method used in an RLC PDU of the UMTS.

- 5 -

Fig. 1 shows a principle diagram of a queue model specifying a flow control function of an RLC connection. According to Fig. 1, a user A and a user B are connected via access points to a service provider, i.e. the UMTS. The RLC protocol establishes a first queue A → B including data units transmitted from the user A to the user B, and a second queue B → A including data units transmitted from the user B to the user A.

10 The data units are encapsulated in respective PDUs of the RLC protocol, wherein a sequence of the PDUs in the queue is specified by a sequence number provided in a corresponding field of a header portion of each PDU. Based on the sequence number of the PDUs, a receiver may confirm that all PDUs have been received properly. A maximum number (window size) of outstanding PDUs in the queue at any time is defined by the maximum sequence number. Usually, PDUs are transmitted in numerical order of their sequence number. A normal information transfer is halted, when the number of outstanding, unacknowledged PDUs is equal to the established window size. The window size, i.e. address space of the sequence number, should be as large as possible to enable an adequate window for efficient transmission.

25

Fig. 2 shows a principle structure of an RLC protocol frame structure of a PDU. RLC frames are sent in strict alignment with the radio transmission and have a maximum size of 320 bits. Whenever such an RLC frame is to be sent, the RLC entity has to provide the necessary protocol information to be contained therein.

According to the upper portion of Fig. 2, the RLC frame basically comprises a header and an information field. As indicated in the lower portion of Fig. 2, the RLC header carries a control information including a sequence number field N(S) which includes a sequence number of the RLC frame.

- 6 -

According to the preferred embodiment, one number of the address space of the sequence number field N(S) is used for signaling a control function such as a protocol reset of the RLC. When such a protocol reset information is issued, the RLC entity has set to zero its internal variables for sending and receiving numbered information. The other RLC entity, when receiving the reset information, will either confirm it by setting to zero its internal variables for sending and receiving numbered information and then issuing an acknowledgement or reject it by sending a corresponding response.

The predetermined number for signaling the protocol reset may be zero. In this case, a predetermined rule for both RLP entities, i.e. the transmitter and the receiver, has to be established, such that the sequence numbering does not follow a strict modulo n rule, when reaching the maximum number. Instead, the transmission continues with the number "1". The sequence number "0" is dedicated to resetting the link in both the transmitter and the receiver. If a resumed sequence number is needed, it can be defined to be included in the body of the message.

Alternatively, one of the highest sequence numbers addressable in the sequence number field N(S) can be used for signaling the protocol reset. In this case, the sequence numbering is adapted by defining a maximum sequence number which is less than the predetermined sequence number, i.e. less than the total sequence number address space. The sequence numbering is then continued with the number "0", i.e. the lowest number of the address space, after the defined maximum sequence number has been reached.

Of course, any other sequence number could be dedicated to the resetting function, provided the dedicated sequence number is skipped in the sequence numbering.

If there is no need for other control-PDUs than reset, the invention removes the need for a separate protocol control PDU type, which saves transmission overhead.

5

Moreover, even a plurality of sequence numbers could be dedicated to respective other control functions, as long as the sequence numbering would be adapted so as to skip the corresponding sequence numbers.

10

Fig 3. shows a principle block diagram of a transmitter Tx and a receiver Rx, connected to each other, which may be provided in a network element of the UMTS.

15 The transmitter Tx comprises a signaling transmitter 1 for signaling a control function such as the reset function of the link protocol. The signaling transmitter 1 is connected to a transmitter control means 3 which controls the signaling transmitter 1 so as to signal a required control
20 function. Furthermore, a sequence number generator 2 is provided, to which data (i.e. PDUs) is supplied from a data generating portion (not shown) and which successively generates the required sequence numbers, incorporates them into the sequence number field N(S) of the header portion
25 of the PDUs and transmits the PDUs to the network element at the other transmission end.

According to the preferred embodiment, the signaling transmitter 1 is connected to the sequence number generator
30 2 so as to control the sequence number generator 2 in such a manner that the predetermined sequence number indicating a control function is inserted into the sequence number field N(S), when the control function is to be signaled.

35 The transmitted PDU is transmitted to a sequence number reader 11 provided in a receiver Rx of the network element at the other transmission end. The sequence number reader 11 is arranged to read the sequence number of the received

- 8 -

PDU and to supply the data of the PDU to a data receiving portion (not shown) of the receiver Rx. The read sequence number is supplied by the sequence number reader 11 to a signaling receiver 12 which interprets the read sequence number. If the read sequence number corresponds to a predetermined sequence number indicating a control function, the signaling receiver 12 determines a request for this control function and performs a corresponding signaling to a receiver control means 13 so as to initiate the requested control function, such as the protocol reset.

Thus, a control function such as the protocol reset can be signaled to the other network element by inserting the predetermined sequence number.

In summary, a signaling method for a link protocol used for transmitting a data unit in a telecommunication system and a network element is described, wherein a predetermined number of a sequence number field provided in a protocol data unit is used for signaling a control function of the link protocol, such as a protocol reset function. Thereby, a separate control PDU-type is no longer required for signaling the respective control function, such that transmission overhead can be reduced.

It should be understood that the above description and accompanying drawings are only intending to illustrate the present invention. Thus, the signaling method according to the present invention may also be used in other communications systems having a link protocol which defines a sequence number of data units. The preferred embodiment of the invention may vary within the scope of the attached claims.

35

Claims

1. A signaling method for a link protocol used for
5 transmitting a data unit in a telecommunication system,
comprising the steps of:
 - a) encapsulating said data unit in a protocol data unit
having a field for a sequence number of said data unit; and
 - b) using a predetermined sequence number for signaling a
10 control function of said link protocol.
2. A method according to claim 1, wherein said control
function is a protocol reset function.
- 15 3. A method according to claim 1 or 2, wherein said
protocol data unit is an RLC protocol data unit of a UMTS
system.
4. A method according to any one of the preceding claims,
20 wherein said predetermined sequence number is the number
"0".
5. A method according to claim 4, wherein a sequence
numbering of said protocol data unit is continued with the
25 number "1" after reaching a maximum number.
6. A method according to any one of claims 1 to 3,
wherein said predetermined sequence number is one of the
numbers having the highest values addressable in said
30 sequence number field.
7. A method according to claim 6, wherein a sequence
numbering of said protocol data unit is continued with the
number "0" after reaching a maximum number defined to be
35 less than said predetermined sequence number.
8. A communication element using a link protocol for
transmitting a data unit in a telecommunication system,

wherein a control function for controlling said communication element is signaled by a signaling method according to any one of claims 1 to 7.

5 9. A communication element according to claim 8, wherein said communication element is a base station or a radio network controller.

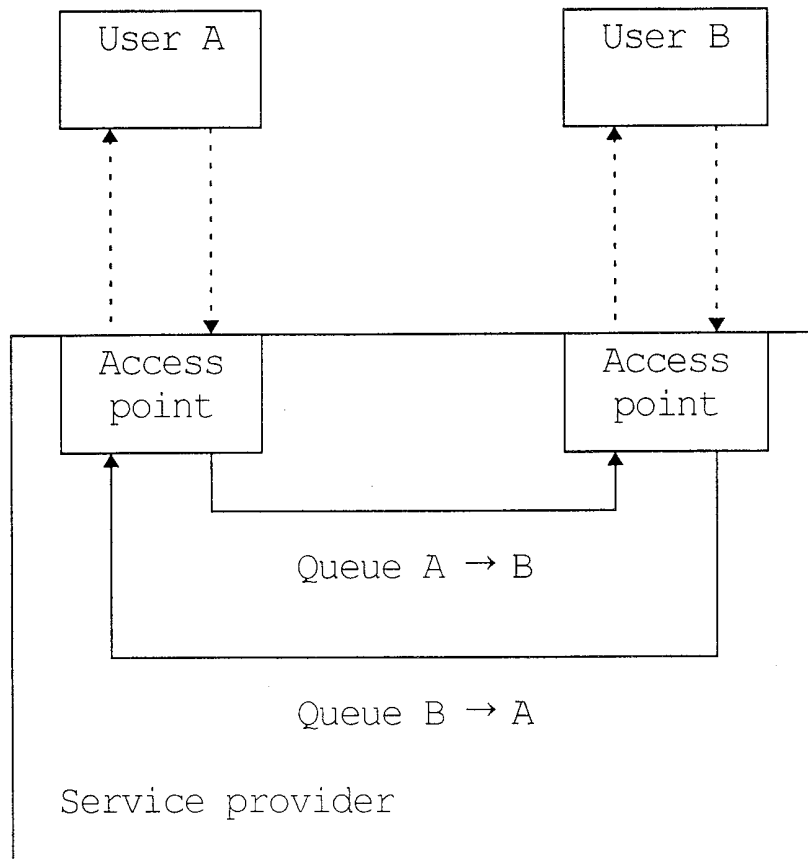
10 10. A communication element according to claim 8, wherein said communication element is a mobile station.

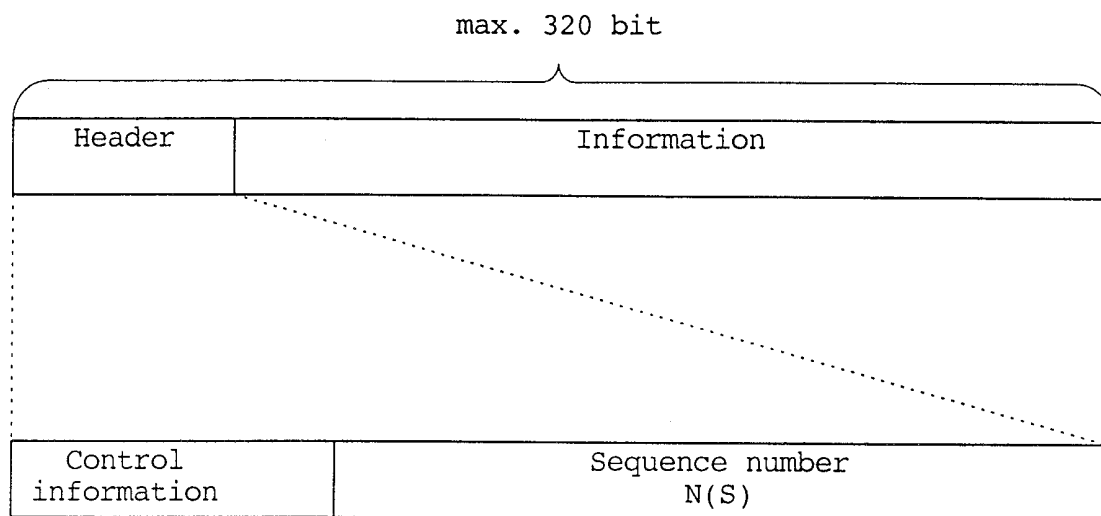
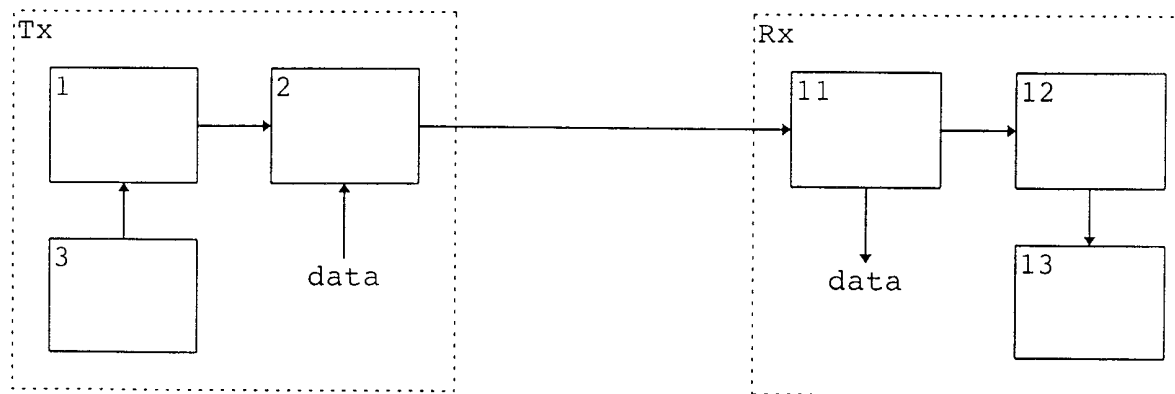
11. A transmitter for transmitting a data unit in a telecommunication system, wherein the transmitted data unit is encapsulated in a protocol data unit having a field for a sequence number, comprising:

15 a) signaling transmitting means **(1)** for signaling a control function; and
b) sequence numbering means **(2)**, responsive to said signaling transmitting means **(1)**, for indicating said
20 control function using said sequence number field.

12. A receiver for receiving a data unit in a telecommunication system, wherein the received data unit is encapsulated in a protocol data unit having a field for a sequence number, comprising:

25 a) sequence number reading means **(11)** for reading a sequence number in said sequence number field; and
b) signaling receiving means **(12)**, responsive to the sequence number reading means, for interpreting a
30 predetermined sequence number as a request for a control function.

**Fig. 1**

**Fig. 2****Fig. 3**

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 98/06362

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04B7/26 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04B H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 721 733 A (WANG ET AL) 24 February 1998 see column 9, line 44 - line 65 see column 10, line 66 - column 13, line 35; claims 1,10-13; figures 1,6A,6B,7A,7B ---	1-4,6, 8-12
X	US 5 610 595 A (GARRABRANT ET AL) 11 March 1997 see column 9, line 9 - line 32; claims 1-3,7-9,12,13; figures 7A,13 --- -/--	1-3,8, 11,12

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 March 1999

Date of mailing of the international search report

31/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bianchi, L

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 98/06362

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 5 673 252 A (JOHNSON ET AL) 30 September 1997 see column 1, line 25 - line 33 see column 3, line 39 - line 44 see column 4, line 64 - line 66 see column 35, line 32 - column 37, line 35 see column 38, line 27 - column 40, line 15 see figures 9-12, 25-33 -----</p>	1,8-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/06362

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5721733 A	24-02-1998	NONE	
US 5610595 A	11-03-1997	NONE	
US 5673252 A	30-09-1997	US 5056107 A AU 700310 B AU 7737094 A BR 9408595 A CA 2190836 A WO 9532595 A EP 0761070 A JP 10500814 T NZ 273897 A US 5553094 A CA 2108978 A WO 9302515 A DE 69226958 D DE 69226958 T EP 0596913 A ES 2121860 T GB 2272614 A,B	08-10-1991 24-12-1998 18-12-1995 19-08-1997 30-11-1995 30-11-1995 12-03-1997 20-01-1998 26-02-1998 03-09-1996 20-01-1993 04-02-1993 15-10-1998 04-03-1999 18-05-1994 16-12-1998 18-05-1994