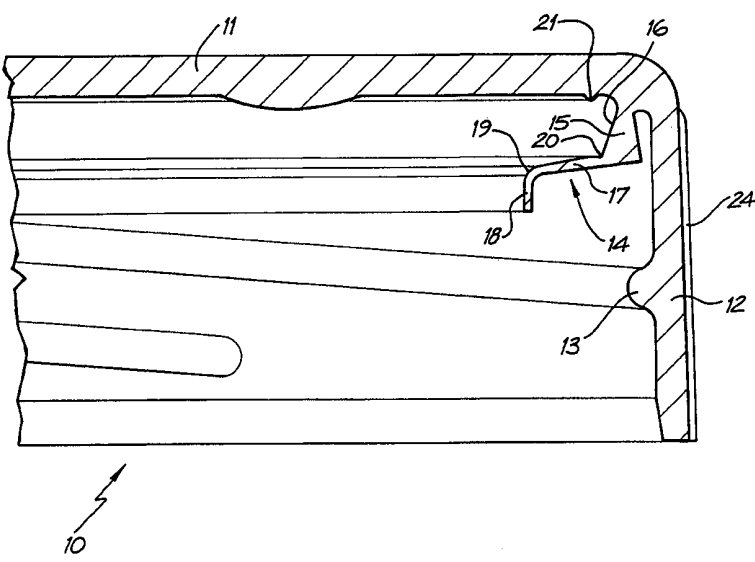


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : B65D 41/02, 41/32</p>	A1	<p>(11) International Publication Number: WO 99/03746</p> <p>(43) International Publication Date: 28 January 1999 (28.01.99)</p>		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(21) International Application Number: PCT/AU98/00510</p> <p>(22) International Filing Date: 3 July 1998 (03.07.98)</p> <p>(30) Priority Data: PO 7885 14 July 1997 (14.07.97) AU</p> <p>(71) Applicant (for all designated States except US): CLOSURES AND PACKAGING SERVICES LIMITED [-/-]; Commerce House, P.O. Box 119, St. Peter Port, Guernsey GY1 3HB (GB).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): DRUITT, Rodney, Malcolm [AU/GB]; The Old Bakery, Arlington Green, Bibury, Cirencester, Gloucestershire GL7 5NE (GB).</p> <p>(74) Agent: F. B. RICE & CO.; 605 Darling Street, Balmain, NSW 2041 (AU).</p> </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p> </td> </tr> </table>			<p>(21) International Application Number: PCT/AU98/00510</p> <p>(22) International Filing Date: 3 July 1998 (03.07.98)</p> <p>(30) Priority Data: PO 7885 14 July 1997 (14.07.97) AU</p> <p>(71) Applicant (for all designated States except US): CLOSURES AND PACKAGING SERVICES LIMITED [-/-]; Commerce House, P.O. Box 119, St. Peter Port, Guernsey GY1 3HB (GB).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): DRUITT, Rodney, Malcolm [AU/GB]; The Old Bakery, Arlington Green, Bibury, Cirencester, Gloucestershire GL7 5NE (GB).</p> <p>(74) Agent: F. B. RICE & CO.; 605 Darling Street, Balmain, NSW 2041 (AU).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(21) International Application Number: PCT/AU98/00510</p> <p>(22) International Filing Date: 3 July 1998 (03.07.98)</p> <p>(30) Priority Data: PO 7885 14 July 1997 (14.07.97) AU</p> <p>(71) Applicant (for all designated States except US): CLOSURES AND PACKAGING SERVICES LIMITED [-/-]; Commerce House, P.O. Box 119, St. Peter Port, Guernsey GY1 3HB (GB).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): DRUITT, Rodney, Malcolm [AU/GB]; The Old Bakery, Arlington Green, Bibury, Cirencester, Gloucestershire GL7 5NE (GB).</p> <p>(74) Agent: F. B. RICE & CO.; 605 Darling Street, Balmain, NSW 2041 (AU).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>			
<p>(54) Title: CLOSURE WITH EXTENDED SEAL MEMBER</p> <div style="text-align: center; margin: 20px 0;">  </div>				
<p>(57) Abstract</p> <p>A closure (10) having a sealing rib (14) projecting downwardly from the underside of its top portion (11). The first portion (15) of the sealing rib (14) increases in thickness as it extends away from the top portion (11). In another aspect, the invention relates to a closure (10) in which the sealing rib (14) has a third portion (18) that is substantially no thicker than the second portion (17) of the rib (14) and has a length longer, and preferably substantially longer, than its thickness. In the second aspect, the third portion (18) of the rib (14) is connected to the second portion (17) at or adjacent its free edge and extends generally in a direction away from the top portion (11). Upon attachment of the closure (10) with the neck (22) of a container, the third portion (18) will be displaced to lie between the end portion (23) of the neck (22) of the container and the top portion (11) of the closure (10).</p>				

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

"Closure with extended seal member"Technical Field

The present invention relates to linerless closures for containers including, but not limited to, carbonated beverage containers. More particularly, the invention relates to such closures that are formed of a synthetic plastics material and, preferably, in one piece.

Background Art

United States patent specification 5,423,444 discloses a plastic closure for a container having an externally screw threaded neck, the closure including a top portion and an internally threaded skirt. The closure has an annular sealing rib which projects downwardly from the underside of the top portion. The rib includes a first, substantially cylindrical portion contiguous with the underside of the top portion and lying adjacent to or abutting with the skirt, and a second, frusto-conical, portion contiguous with the end of the first portion distal to the underside of the top portion and extending radially inwardly to a circular free edge. During threaded attachment of the closure with the neck, the second, frusto-conical, portion will be engaged by a free end of the neck and folded back against the first, substantially cylindrical portion of the rib to form a gas tight seal between the neck of the container and the closure.

United States patent specification 5,609,263 discloses a variant of the above closure in which there is at the free end of the second portion of the rib a thick seal ring of substantially circular cross-sectional shape. The rib and the seal ring are dimensioned to engage the free end of the neck when the closure is threaded onto the neck such that when the neck is fully screwed into the closure its free end crushes the seal ring directly against the inside surface of the top portion of the closure.

The present invention is directed to two arrangements of closure that improve the sealing ability of closures of the type identified in the abovementioned prior art.

Disclosure of Invention

The present invention relates to a closure suitable for mounting onto a container having an opening defined by an end portion of the container, the closure being moulded from a synthetic plastics material and including a top portion and a skirt portion depending from the top portion, an annular sealing rib projecting downwardly from an underside of the top portion, the

rib including a first portion which is contiguous with the top portion and having an inner surface, which inner surface lies radially inwardly of the skirt portion, and a second, frusto-conical, portion contiguous with the first portion and separated from the top portion by the inner surface of the first portion, the second portion extending radially inwardly to terminate in a circular edge, the first portion having an internal diameter relative to the external diameter of the end portion of the container such that during attachment of the closure with the end portion of the container, the second frusto-conical portion of the sealing rib will be engaged by a free end of said end portion of the container and folded back at least adjacent the inner surface of the first portion of the rib, the closure being characterised in that the first portion of the rib increases in thickness as it extends away from the top portion of the closure.

In a second aspect, the present invention relates to a closure suitable for mounting onto a container having an opening defined by an end portion of the container, the closure being moulded from a synthetic plastics material and including a top portion and a skirt portion depending from the top portion, an annular sealing rib projecting downwardly from an underside of the top portion, the rib including a first portion which is contiguous with the top portion and having an inner surface, which inner surface lies radially inwardly of the skirt portion, and a second, frusto-conical, portion contiguous with the first portion and separated from the top portion by the inner surface of the first portion, the second portion extending radially inwardly to terminate in a circular edge, the closure being characterised in that the sealing rib has a third portion connected to the second portion at or adjacent the circular edge and extending generally in a direction away from the top portion, the third portion being substantially no thicker than the second portion and having a length longer than its thickness, the first portion having an internal diameter relative to the external diameter of the end portion of the container such that during attachment of the closure with the end portion of the container, the second frusto-conical portion of the sealing rib will be engaged by a free end of said end portion of the container and folded back at least adjacent the inner surface of the first portion of the rib, and with the third portion of the rib positioned between the neck of the container and the top portion of the closure.

The closures are preferably provided with a screw thread on the inside surface of the skirt portion adapted to engage with a corresponding thread on an external surface of the end portion of the container. It is, however, possible for the container and the closure to be formed with other
5 complementary attachment means. Such an arrangement could, for instance, comprise snap-on attachment means having a rib on the inside surface of the closure and a corresponding groove on the outside surface of the end portion of the container.

The first portion of the rib is preferably formed radially inwardly of the skirt with an annular space therebetween. It is, however, possible in other
10 embodiments to form the first portion of the rib in abutment with the skirt in the sense that they are continuous. In one embodiment of the above aspects of the invention, the first portion of the rib is observed as a thickening of the skirt portion so that the root of the second portion of the rib is moved
15 inwardly of the part of the skirt portion carrying the screw thread or other attachment means.

In each aspect, the first portion serves to form an abutment towards which the second portion is folded during attachment of the closure with the end portion of a container. Preferably, the second portion will be folded back
20 against the first portion such that it bears against the inner surface of the first portion. This will cause the second portion to bear more strongly against the outside surface of the end portion of the container and so form a better seal with the end portion.

The first aspect of the present invention is directed to the first portion
25 of the rib having a thickness that increases in a direction away from the top portion of the closure. This thickening of the first portion will increase the force of the pressure of the rib against the outside surface of the end portion of the closure. The thickness of the first portion preferably increases at a uniform rate along the length of the first portion however it could do so in a
30 non-uniform manner. The increase in the thickness of the first portion means that the inside and outside surfaces of the first portion will not necessarily be exactly cylindrical. They may respectively taper slightly inwardly and outwardly relative to the axis of the closure in a direction away from the top portion of the closure.

35 In the second aspect of the present invention, the rib includes a third portion. This third portion is preferably contiguous with the free edge of the

second portion, though it may be spaced slightly radially outwardly from it. The third portion projects generally away from the top of the closure. It may join the second portion in an angular disjunction or it may join it in a smooth angular transition from the generally radially inward direction of the second portion to a generally axial direction.

It is of the essence of this second aspect of the present invention that the third portion of the rib be substantially no thicker than the second portion and also be relatively longer in relation to its thickness. It has been found that the sealing qualities of the closure are best improved by providing a thin extension to the second portion of the rib that will wrap around the free end of the end portion of the container from a position on a cylindrical outer surface of the end portion at least to the apex of the free end of the end portion. It has also been found that this construction also reduces the torque needed to unscrew a closure from a corresponding container to which it has been attached.

The closures according to the present invention may be made of any suitable synthetic plastics material, however it is preferred to form them from a suitable grade of polyethylene or polypropylene. It is also preferred to form the closure in one piece by injection or rotary moulding. The closures could, however, be formed in two parts with the sealing rib formed separately from the top portion and the skirt portion.

It will be apparent to persons skilled in the art that numerous modifications may be made to the closures described in this specification without departing from the scope of the invention as earlier defined. The closure may, for instance, be provided with a tamper evident band, for example a band such as is described in Australian patent specifications 668197 and 683598, the contents whereof are incorporated herein by reference.

Where the closure has a screw thread on the inner surface of the skirt, the thread can be continuous or formed of a series of thread segments. If formed from a series of thread segments, the thread segments can be arranged, starting from a first thread segment distal to the top, along a helical thread locus, as is described in Australian patent specification 668197. Each of the thread segments except the first can be formed with two substantially planar end surfaces that are inclined to the axis of the closure and face away from the top of the closure, that is they face in the direction that a mould

core used to mould the closure was withdrawn. In this specification, the term "substantially planar surface" is used to describe a surface that is nearly actually planar or that is curved provided that it all faces in the defined direction. The first of the thread segments is preferably pointed at its end distal to its one adjacent thread segment to assist in mating the thread on the closure with a complementary thread on the neck of a container.

The substantially planar ends of the thread segments can also be inclined to a notional radial plane of the closure extending from the longitudinal axis of the closure to the end of the respective thread segment such that the ends are inclined to the cylindrical skirt by an angle that is less than the angle that the respective notional plane makes with that skirt.

To assist in the venting of gas that may be present in the container, the spaces between the thread segments in adjacent turns of the thread can be aligned. A groove may also be provided on the inside surface of the skirt of the closure extending longitudinally thereof through the aligned spaces.

There also can be at the line of meeting of the first and second portions of the sealing rib, a weakened zone or annular region of weakness to assist even deformation of the second portion relative to the first as the closure is applied to a container as is described in Australian patent specification 637706, the contents whereof are incorporated herein by reference.

The underside of the top portion of the closure can also have a continuous or segmented annular ridge radially inside of the sealing rib. The upper surface of the second portion of the rib may also be formed with an engagement means comprising a segmented or continuous annular ridge as described in Australian patent specification 74544/94, the contents whereof are incorporated herein by reference. On attachment of the closure with the neck of a container, the engagement means engage with the underside of the top portion.

In accordance with the above, the closure can have a tamper evident band adapted to provide an indication of removal or attempted removal of the closure from a container. The tamper evident band can extend from the skirt portion by connection through a plurality of frangible bridges.

The band can also comprise a generally cylindrical body portion and a segmented rib extending inwardly of the body portion and adapted to provide a lip having an inner free edge to engage under a retaining flange extending outwardly from the end portion of the container, characterised in that the

combined length of the segmented ribs is equal to at least 50% of the internal circumference of the band and the segmented ribs are separated from each other by a gap, the rib segments each having an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, the inner surface of the band having a plurality of radially inward projections extending from above the free edge of the band and not extending beyond the inner free edge of the lip.

The band can also comprise a generally cylindrical body portion and a segmented rib extending inwardly of the body portion and adapted to provide a lip having an inner free edge to engage under a retaining flange extending outwardly from the end portion of the container, the rib segments each having an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, characterised in that the upper surface of each rib comprises a first surface contiguous with the body portion of the band, which surface slopes inwardly and downwardly away from the top portion, and a second surface which extends radially inwardly from the inner terminus of the first surface and has a slope angle substantially normal to the skirt portion of the closure.

Brief Description of Drawings

The following description of a preferred embodiment of the present invention is provided as an example of the invention and is described with reference to the accompanying drawings, in which:-

Fig. 1 is a diametrical sectional view through a part of a closure according to the first and the second aspects of the present invention;

Fig. 2 is a diametrical sectional view through a part of another embodiment of a closure according to the second aspect of the present invention;

Fig. 2a is a diametrical sectional view through a part of another embodiment of a closure according to the second aspect of the present invention;

Fig. 3 is a diametrical sectional view of a part of the closure of Fig. 2 when applied to the end portion of a container;

Fig. 4 is a vertical sectional view through a part of an embodiment of a closure according to the first aspect of the present invention; and

Fig. 5 is a vertical sectional view through a part of another embodiment of a closure according to the second aspect of the present invention.

Best Mode for Carrying Out the Invention

The closure 10 shown in Fig. 1 comprises a circular top 11 and a depending skirt 12. The radially inner surface of the skirt 12 is provided with a non-segmented screw thread 13 adapted to mate with a corresponding
5 thread on the neck of a bottle to which the closure 10 is adapted to be attached. While the embodiments of the closure depicted in Figs. 1 to 4 are depicted with non-segmented screw threads, other suitable means for attaching the closure to the container would be immediately apparent to a person skilled in the art. The segmented screw thread on the embodiment of
10 the closure depicted in Fig. 5 can also readily be envisaged as being used, if required, on the embodiments of the closure depicted in Figs. 1-4. The radially outer surface of the skirt 12 carries a series of fine vertical ribs 24. The fine ribs 24 can terminate at the lower edge of the skirt 12 in a narrow circumferential rib 25 as, for example, depicted on the closure of Fig. 5.

15 A sealing rib 14 is provided on the underside of the top 11 of the closure 10. The rib 14 is continuous and annular. Seen in cross-section the rib 14 has three portions 15, 17 and 18. The first portion 15 is contiguous with the top 11 and is substantially cylindrical in shape. The thickness of the first portion 15 increases as the first portion 15 progresses away from the
20 top 11. The inside surface 16 of the first portion is thus not exactly cylindrical, at least until the closure has been applied to the neck of a bottle. The second portion 17 of the rib 14 is frusto-conical in form and tapers slightly in thickness as it extends radially inwardly from its outer edge which is contiguous with the lower end of the first portion 15. A sharp edge 20 is
25 formed between the first portion 15 and the second portion 17. This sharp edge 20 defines a line of weakness between the two parts for a purpose that will be described later in this specification. The third portion 18 is contiguous with the radially inner end of the second portion 17, the two joining in a curved transition zone 19. The transition zone 19 changes the
30 direction of the third portion 18 so that it projects substantially in an axial direction away from the top 11.

A short downwardly extending ridge 21 is also provided on the underside of the top 11 radially inside the rib 14.

35 The arrangement shown in Figs. 2 and 3 is essentially similar to that described in Fig. 1 with the exception that the first portion 15 of the rib 14 is of constant thickness along its length and the second portion 17 and the third

portion 18 join in a sharp angular disjunction rather than the smoothly curved transition zone 19 seen in Fig. 1. As is seen in Fig. 3 when the closure 10 is applied to the neck 22 of a bottle, a free end 23 of the neck 22 engages the radially outer side of the third portion 18 and starts to push it towards the inside surface of the top 11. The second portion 17 is also pushed upwardly towards the top 11. As the second portion 17 is pushed upwardly it bends relative to the first portion 15 along the line of weakness defined by the sharp edge 20. This ensures that the folding back of the second portion 17 relative to the first portion 15 takes place evenly around the whole circumference of the rib 14. The folding back of the second portion 17, and with it the third portion 18, continues until the third portion 18 is trapped between the free end 23 of the neck 22 and the inside surface of the top 11. When this happens the second portion 15 will normally be folded back adjacent to or in contact with the inside surface 16 of the first portion 15. In the embodiment depicted in Fig. 3, the first portion 15 is pushed radially outwardly and bears against the radially inner surface of the skirt 12. A seal will then be formed between the closure 10 and the neck 22 extending from a radially outer portion of the neck 22 around to the apex of the free end 23. While the arrangement shown in Fig. 3 has the first portion 15 of constant thickness it will be appreciated that if the first portion 15 were to taper outwardly in thickness towards its lower end (as is shown in Fig. 1) then this would have the effect of causing the first portion 15 to bear against the inside surface of the skirt 12 sooner and thus to apply more pressure to the radially outer surface of the neck 22 and thus further improve the seal between the closure 10 and the neck 22.

While the third portion 18 is contiguous with the radial inner end of the second portion 17 in Fig. 2, an alternative embodiment is depicted in Fig. 2a in which the third portion 18 extends downwardly from the second portion 17 adjacent its inner end. While the third portion 18 is in a slightly different position, the manner in which the second portion 17 of the sealing rib 14 will fold back towards the inner surface 16 of the first portion 15 is substantially identical to that depicted in Fig. 3.

Figs. 4 and 5 show respectively a part of a closure according to the first aspect of the present invention and a part of a closure according to the second aspect of the invention. In the case of Fig. 4 the closure 10 has a first portion 15 which increases in thickness away from the top 11 but without a

third portion 18. In Fig. 5 the closure 10 has a rib 14 in which there is a transition zone 19 between the second portion 17 and the third portion 18 that is of relatively large radius.

5 In Fig. 4, the closure also has a short downwardly extending ridge 21 provided on the underside of the top 11 radially inside the rib 14. On the upper surface of the second portion 17 of the sealing rib 14 and adjacent its inner end, there is also provided a continuous annular ridge 26. When the closure 10 is attached to the neck 22 of a container and the second portion 17 is folded back towards the first portion 15, the annular ridge 26 engages with
10 the underside of the top portion 11. In some cases, the annular ridge 26 can also interlock with the downwardly extending ridge 21 provided on the underside of the top 11 of the closure 10. While ridges 21, 26 are each depicted as continuous, the ridges can be readily envisaged as being comprised of a plurality of segments separated by short gaps.

15 As depicted in Fig. 5, the closure 10 includes a band 30 attached by frangible bridges 31 to the lower edge of the skirt 12. The band 30 includes a rib 32 about its inside surface being sized and shaped so as to provide an inwardly extending lip which will engage under the retaining flange 33 (see Fig. 3) of the neck 22 of the container once the closure 10 is fully closed onto
20 the neck 22.

The rib 32 is made up of a series of rib segments 37 separated by short breaks 38 and in the depicted embodiment constitutes about 85% of the circumference of the band 30. The short breaks 38 provide circumferential flexibility to the band 30 and allow the rib 32 to pass over the retaining
25 flange 33 without creating a stress sufficient to break the frangible bridges 31.

The rib 32 has an upper side directed towards the top 11 of the closure 10 and an under side directed away from it. The upper side includes a radially outer frusto-conical surface 34 and a radially inner annular surface 35. The annular surface 35 lies in a plane normal to a longitudinal axis of the
30 closure 10 while the frusto-conical surface 34 is inclined inwardly and downwardly away from the top portion 11 and makes an angle of about 20° with the plane normal to the longitudinal axis of the closure. The presence of the frusto-conical surface 34 assists in the moulding of the closure 10 as it prevents or at least substantially reduces the production of closures having
35 deformed ribs 32.

Below the rib 32 and still on the inside surface of the band 30 is an arrangement of a plurality of inward extending projections 36 each having a long axis generally aligned with the longitudinal axis of the closure 10. The projections 36 serve to help prevent a person from introducing a device such as a knife blade radially inwardly of the body portion 12 of the band 30 and progressively moving the device circumferentially around the band in an effort to gradually prise the rib 32 up and over the flange 33 on the container.

In Fig. 5, the thread 13 is made up of a plurality of thread segments 39 arranged in spaced apart array along the locus of the thread. Each thread segment, except the first segment 40, is bounded at each end by a planar surface 41. Each of the planar surfaces 41 are inclined to the longitudinal axis of the closure 10 so that it faces away from the top 11. Each planar surface 41 is also inclined relative to a notional radial plane extending from the axis of the closure 10 to the planar surface 41 in question such that the minimum included angle between the planar surface 41 and the skirt 12 is acute and is less than the angle that a notional radial plane makes with the skirt 12.

The first thread segment 40 is formed with a planar surface 41 on its trailing edge, however, it is formed with a point 42 on its leading edge to assist in mating the thread with a corresponding thread on the neck 22 of a container.

The thread segments 39 in each turn of the thread are aligned as are the spaces between them. A groove 43 is formed on the inside surface of the skirt 12 in each of the aligned spaces between adjacent thread segments 39. The grooves 43 serve to assist in venting any gas that may be present in the container and, in particular, gases from carbonated beverages as the closure 10 is unscrewed from the container.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

CLAIMS:

1. A closure suitable for attachment to a container having an opening defined by an end portion of the container, the closure being moulded from a synthetic plastics material and including a top portion and a skirt portion
5 depending from the top portion, an annular sealing rib projecting downwardly from an underside of the top portion, the rib including a first portion which is contiguous with the top portion and having an inner surface, which inner surface lies radially inwardly of the skirt portion, and a second, frusto-conical, portion contiguous with the first portion and
10 separated from the top portion by the inner surface of the first portion, the second portion extending radially inwardly to terminate in a circular edge, the first portion having an internal diameter relative to the external diameter of the end portion of the container such that during attachment of the closure with the end portion of the container, the second frusto-conical portion of the
15 sealing rib will be engaged by a free end of said end portion of the container and folded back at least adjacent the inner surface of the first portion of the rib, the closure being characterised in that the first portion of the rib increases in thickness as it extends away from the top portion of the closure.
2. The closure of claim 1 wherein the skirt portion has an inner surface
20 having a screw thread adapted to engage with a corresponding thread on the external surface of the end portion of the container.
3. The closure of claim 1 wherein the skirt portion has an inner surface having a rib adapted to engage with a corresponding groove on the external surface of the end portion of the container.
- 25 4. The closure of any one of the preceding claims wherein the first portion of the rib is formed radially inwardly of the skirt portion with an annular space therebetween.
5. The closure of any one of claims 1-3 wherein the first portion of the rib is in continuous abutment with the skirt portion.
- 30 6. The closure of claim 5 wherein the first portion of the rib comprises a thickening of the skirt portion adjacent the top portion.
7. The closure of any one of the preceding claims wherein the first portion serves to form an abutment towards which the second portion is folded during attachment of the closure with the neck of a container.
- 35 8. The closure of any one of the preceding claims wherein during attachment of the closure with the neck of the container, the second portion

is folded back against the first portion so that it bears against the inner surface of the first portion.

9. The closure of any one of the preceding claims wherein the thickness of the first portion increases at a uniform rate along the length of the first portion away from the underside of the top portion.
10. The closure of any one of claims 1-8 wherein the thickness of the first portion increases in a non-uniform manner along the length of the first portion away from the underside of the top portion.
11. The closure of any one of the preceding claims wherein the closure is made from polyethylene.
12. The closure of any one of the preceding claims wherein the closure is formed in one piece.
13. The closure of any one of claims 1-11 wherein the closure is formed in two parts with the sealing rib formed separately from the top portion and the skirt portion.
14. The closure of any one of the preceding claims wherein the closure has a tamper evident band adapted to provide an indication of removal or attempted removal of the closure from a container.
15. The closure of claim 14 wherein the tamper evident band extends from the skirt portion by connection through a plurality of frangible bridges.
16. The tamper evident band of claim 15 wherein the band comprises a generally cylindrical body portion and a segmented rib extending inwardly of the body portion and adapted to provide a lip having an inner free edge to engage under a retaining flange extending outwardly from the end portion of the container, characterised in that the combined length of the segmented ribs is equal to at least 50% of the internal circumference of the band and the segmented ribs are separated from each other by a gap, the rib segments each having an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, the inner surface of the band having a plurality of radially inward projections extending from above the free edge of the band and not extending beyond the inner free edge of the lip.
17. The closure of claim 15 wherein the band comprises a generally cylindrical body portion and a segmented rib extending inwardly of the body portion and adapted to provide a lip having an inner free edge to engage under a retaining flange extending outwardly from the end portion of the

container, the rib segments each having an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, characterised in that the upper surface of each rib comprises a first surface contiguous with the body portion of the band, which surface slopes inwardly and downwardly away from the top portion, and a second surface which extends radially inwardly from the inner terminus of the first surface and has a slope angle substantially normal to the skirt portion of the closure.

18. The closure of claim 16 and further wherein the rib segments each have an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, characterised in that the upper surface of each rib comprises a first surface contiguous with the body portion of the band, which surface slopes inwardly and downwardly away from the top portion, and a second surface which extends radially inwardly from the inner terminus of the first surface and has a slope angle substantially normal to the skirt portion of the closure.

19. The closure of any one of the preceding claims wherein the sealing rib includes a substantially annular region of weakness formed around an inside surface of the sealing rib approximately at the join between the first and second portions of the sealing rib.

20. The closure of any one of the preceding claims wherein there is formed on the upper surface of the second portion of the sealing rib and proximate its free edge, engagement means so arranged that during attachment of the closure with the end portion of the container, the engagement means engages with the underside of the top portion.

21. The closure of claim 20 wherein the engagement means on the upper surface of the second portion of the sealing rib is a segmented annular ridge.

22. The closure of claim 20 wherein the engagement means on the upper surface of the second portion of the sealing rib is a continuous annular ridge.

23. The closure of any one of the preceding claims wherein the underside of the top portion of the closure is provided with a segmented annular ridge positioned inwardly and adjacent the first portion of the sealing rib.

24. The closure of any one of claims 1-22 wherein the underside of the top portion of the closure is provided with a continuous annular ridge positioned inwardly and adjacent the first portion of the sealing rib.

25. A closure suitable for mounting onto a container having an opening defined by an end portion of the container, the closure being moulded from a synthetic plastics material and including a top portion and a skirt portion depending from the top portion, an annular sealing rib projecting
5 downwardly from an underside of the top portion, the rib including a first portion which is contiguous with the top portion and having an inner surface, which inner surface lies radially inwardly of the skirt portion, and a second, frusto-conical, portion contiguous with the first portion and separated from the top portion by the inner surface of the first portion, the
10 second portion extending radially inwardly to terminate in a circular edge, the closure being characterised in that the sealing rib has a third portion connected to the second portion at or adjacent the circular edge and extending generally in a direction away from the top portion, the third portion being substantially no thicker than the second portion and having a
15 length longer than its thickness, the first portion having an internal diameter relative to the external diameter of the end portion of the container such that during attachment of the closure with the end portion of the container, the second frusto-conical portion of the sealing rib will be engaged by a free end of said end portion of the container and folded back at least adjacent the
20 inner surface of the first portion of the rib, and with the third portion of the rib positioned between the neck of the container and the top portion of the closure.

26. The closure of claim 25 wherein the third portion is contiguous with the free edge of the second portion.

25 27. The closure of claim 25 wherein the third portion is contiguous with the second portion but spaced slightly radially outwardly from the free edge of the second portion

28. The closure of any one of claims 25-27 wherein the third portion joins the second portion in an angular disjunction.

30 29. The closure of any one of claims 25-27 wherein the third portion joins the second portion in a smooth angular transition from the generally radially inward direction of the second portion to a generally axial direction.

30. The closure of any one of claims 25-29 wherein the skirt portion has an inner surface having a screw thread adapted to engage with a corresponding
35 thread on the external surface of the end portion of the container.

31. The closure of any one of claims 25-29 wherein the skirt portion has an inner surface having a rib adapted to engage with a corresponding groove on the external surface of the end portion of the container.

5 32. The closure of any one of claims 25-31 wherein the first portion of the rib is formed radially inwardly of the skirt portion with an annular space therebetween.

33. The closure of any one of claims 25-31 wherein the first portion of the rib is in continuous abutment with the skirt portion.

10 34. The closure of claim 33 wherein the first portion of the rib comprises a thickening of the skirt portion adjacent the top portion.

35. The closure of any one of claims 25-34 wherein the first portion serves to form an abutment towards which the second portion is folded during attachment of the closure with the neck of a container.

15 36. The closure of any one of claims 25-35 wherein during attachment of the closure with the neck of the container, the second portion is folded back against the first portion so that it bears against the inner surface of the first portion.

37. The closure of any one of claims 25-36 wherein the closure is made from polyethylene.

20 38. The closure of any one of claims 25-37 wherein the closure is formed in one piece.

39. The closure of any one of claims 25-37 wherein the closure is formed in two parts with the sealing rib formed separately from the top portion and the skirt portion.

25 40. The closure of any one of claims 25-39 wherein the closure has a tamper evident band adapted to provide an indication of removal or attempted removal of the closure from a container.

41. The closure of claim 40 wherein the tamper evident band extends from the skirt portion by connection through a plurality of frangible bridges.

30 42. The closure of claim 41 wherein the band comprises a generally cylindrical body portion and a segmented rib extending inwardly of the body portion and adapted to provide a lip having an inner free edge to engage under a retaining flange extending outwardly from the end portion of the container, characterised in that the combined length of the segmented ribs is equal to at least 50% of the internal circumference of the band and the
35 segmented ribs are separated from each other by a gap, the rib segments each

having an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, the inner surface of the band having a plurality of radially inward projections extending from above the free edge of the band and not extending beyond the inner free edge of the lip.

43. The closure of claim 41 wherein the band comprises a generally cylindrical body portion and a segmented rib extending inwardly of the body portion and adapted to provide a lip having an inner free edge to engage under a retaining flange extending outwardly from the end portion of the container, the rib segments each having an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, characterised in that the upper surface of each rib comprises a first surface contiguous with the body portion of the band, which surface slopes inwardly and downwardly away from the top portion, and a second surface which extends radially inwardly from the inner terminus of the first surface and has a slope angle substantially normal to the skirt portion of the closure.

44. The closure of claim 42 and further wherein the rib segments each have an upper surface facing generally towards the top portion of the closure and an underside facing generally away from the top portion, characterised in that the upper surface of each rib comprises a first surface contiguous with the body portion of the band, which surface slopes inwardly and downwardly away from the top portion, and a second surface which extends radially inwardly from the inner terminus of the first surface and has a slope angle substantially normal to the skirt portion of the closure.

45. The closure of any one of claims 25-44 wherein the sealing rib includes a substantially annular region of weakness formed around an inside surface of the sealing rib approximately at the join between the first and second portions of the sealing rib.

46. The closure of any one of claims 25-45 wherein there is formed on the upper surface of the second portion of the sealing rib and proximate its free edge, engagement means so arranged that during attachment of the closure with the end portion of the container, the engagement means engages with the underside of the top portion.

47. The closure of claim 46 wherein the engagement means on the upper surface of the second portion of the sealing rib is a segmented annular ridge.

48. The closure of claim 46 wherein the engagement means on the upper surface of the second portion of the sealing rib is a continuous annular ridge.

49. The closure of any one of claims 25-48 wherein the underside of the top portion of the closure is provided with a segmented annular ridge positioned inwardly and adjacent the first portion of the sealing rib.

50. The closure of any one of claims 25-48 wherein the underside of the top portion of the closure is provided with a continuous annular ridge positioned inwardly and adjacent the first portion of the sealing rib.

51. The closure of any one of claims 25-50 wherein the first portion of the rib increases in thickness as it extends away from the top portion of the closure.

52. The closure of claim 51 wherein the thickness of the first portion increases at a uniform rate along the length of the first portion away from the underside of the top portion.

53. The closure of claim 51 wherein the thickness of the first portion increases in a non-uniform manner along the length of the first portion away from the underside of the top portion.






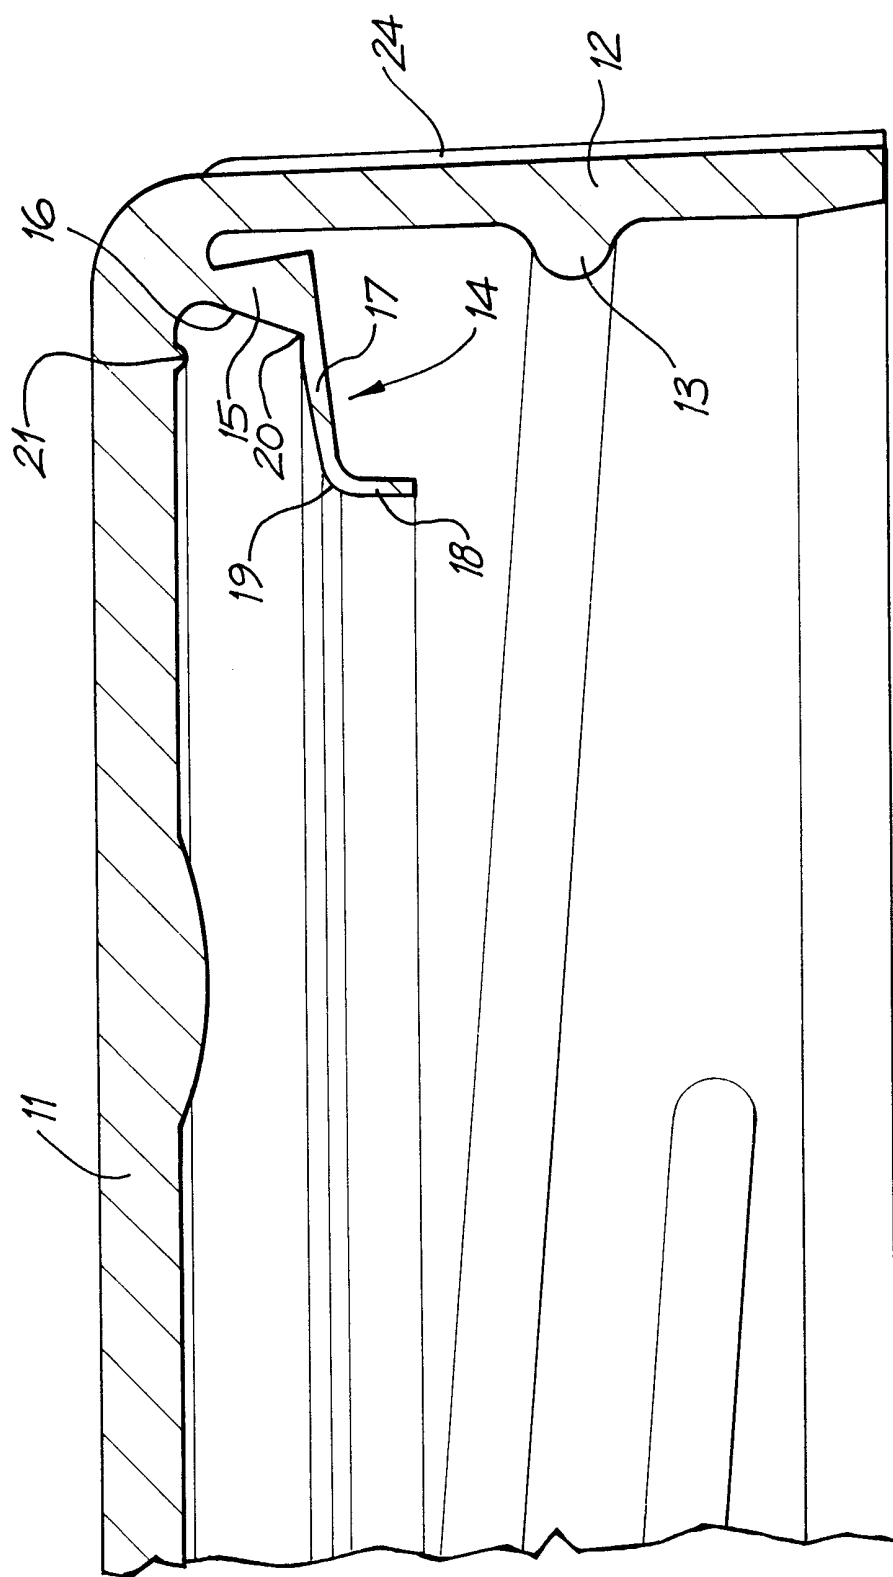


FIG. 1





*FIG. 3*

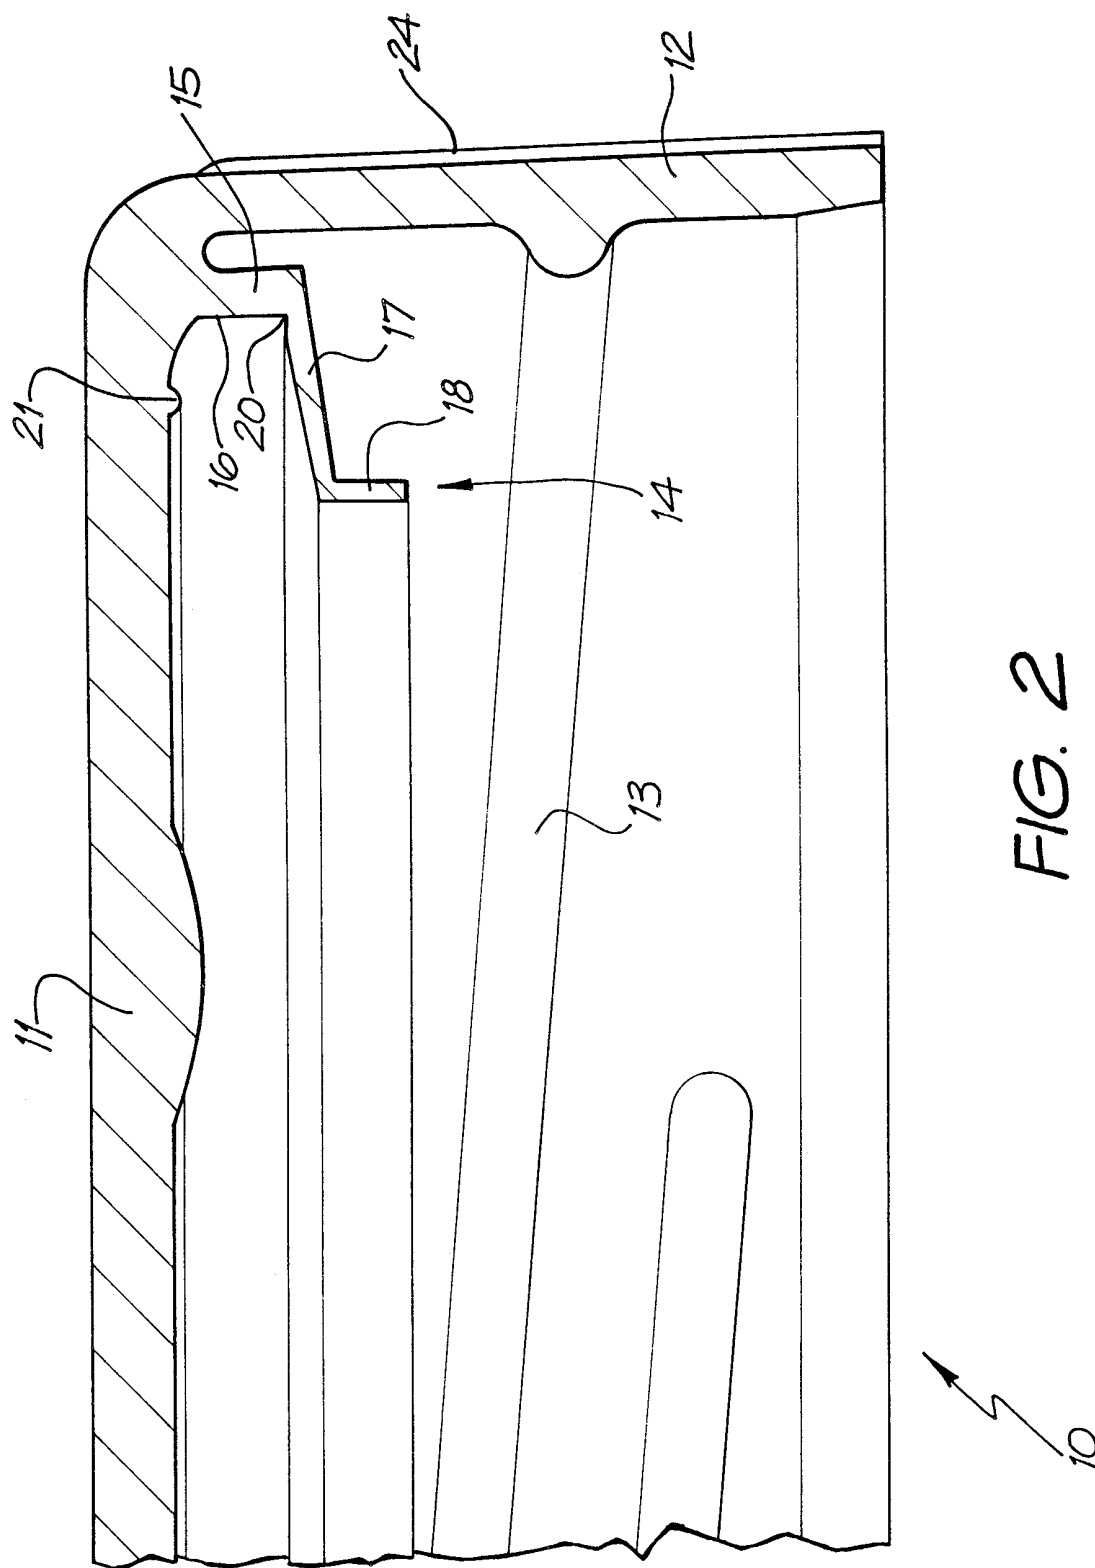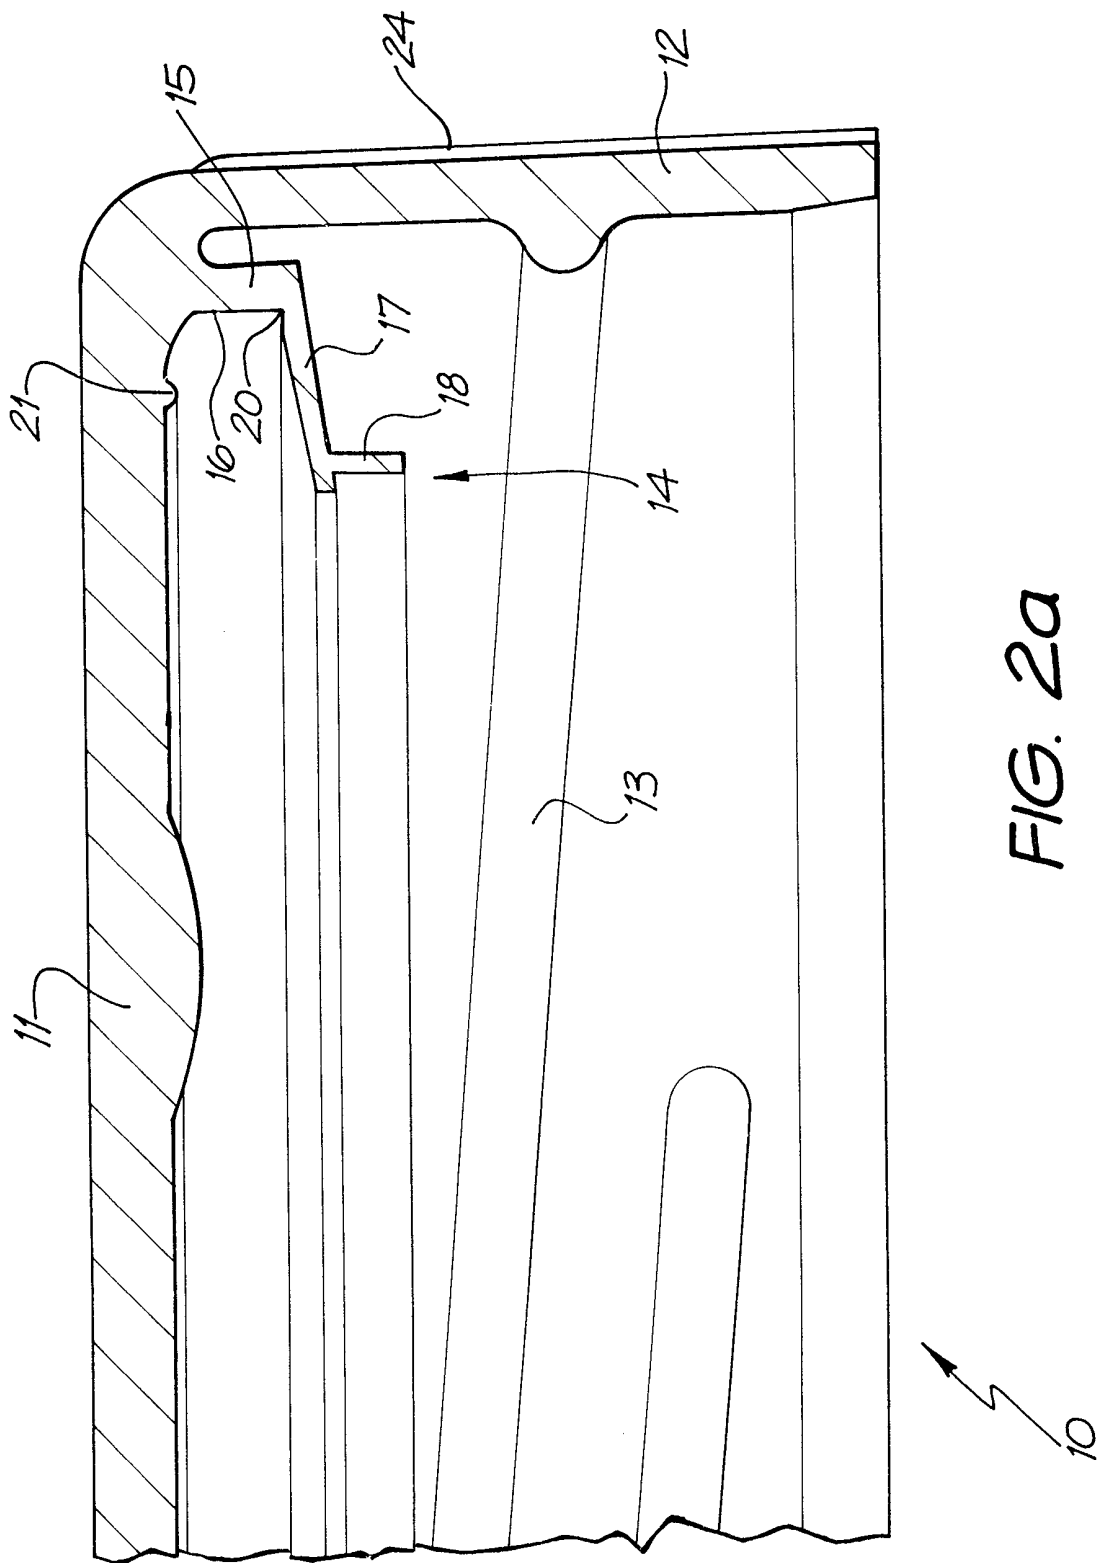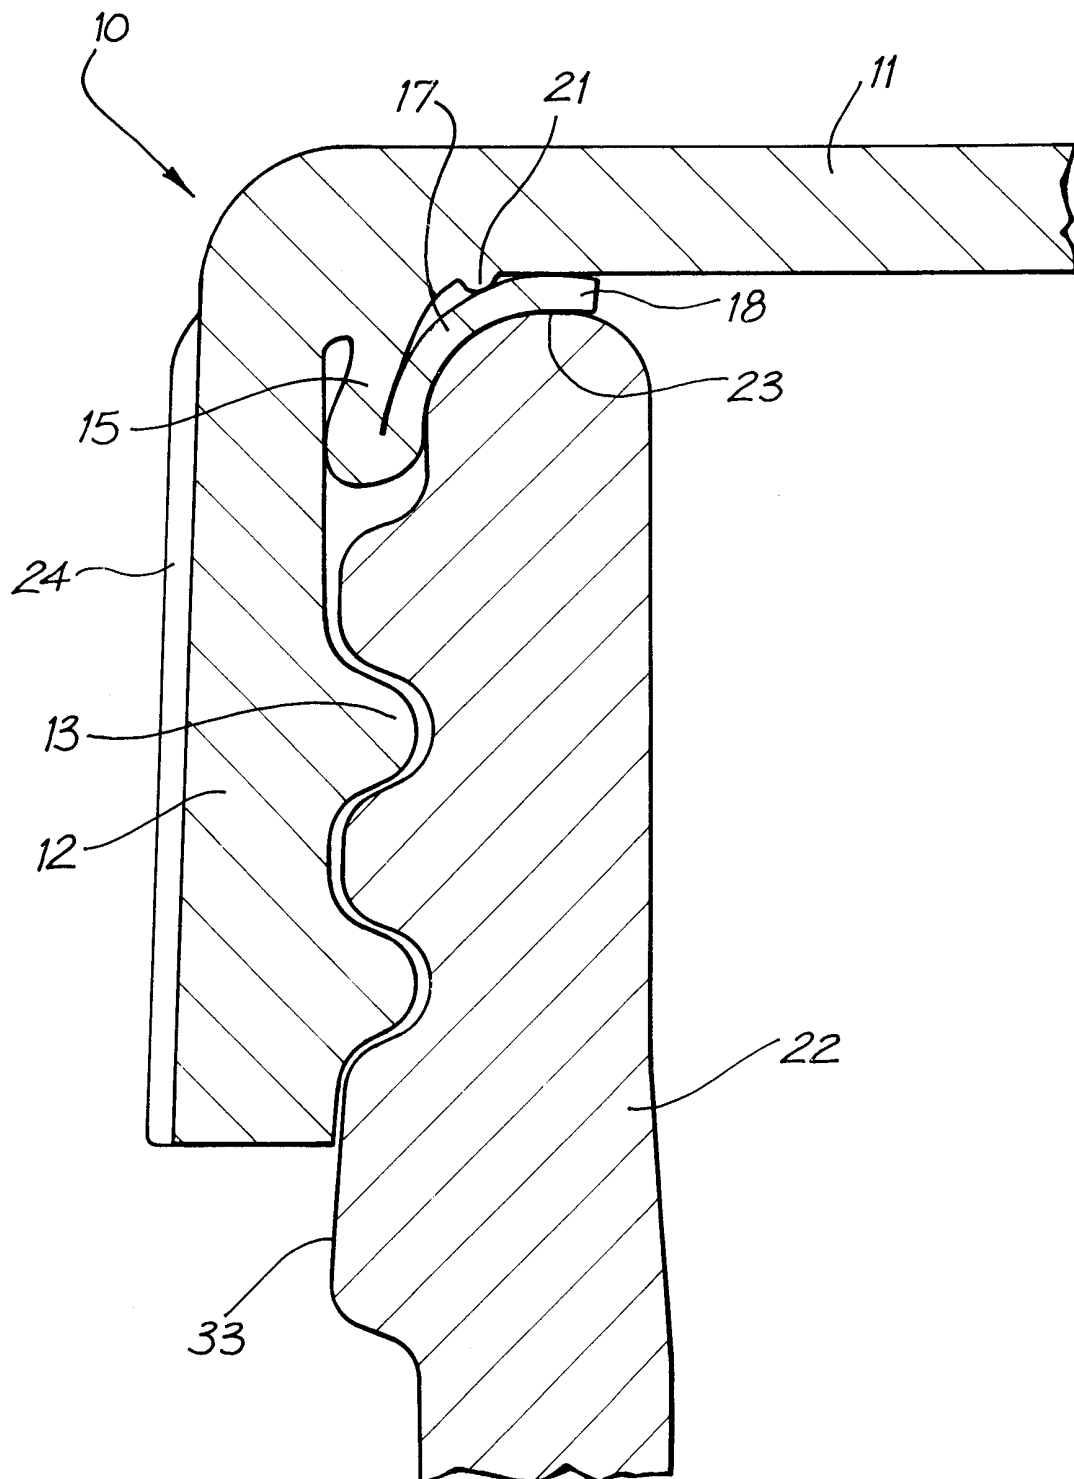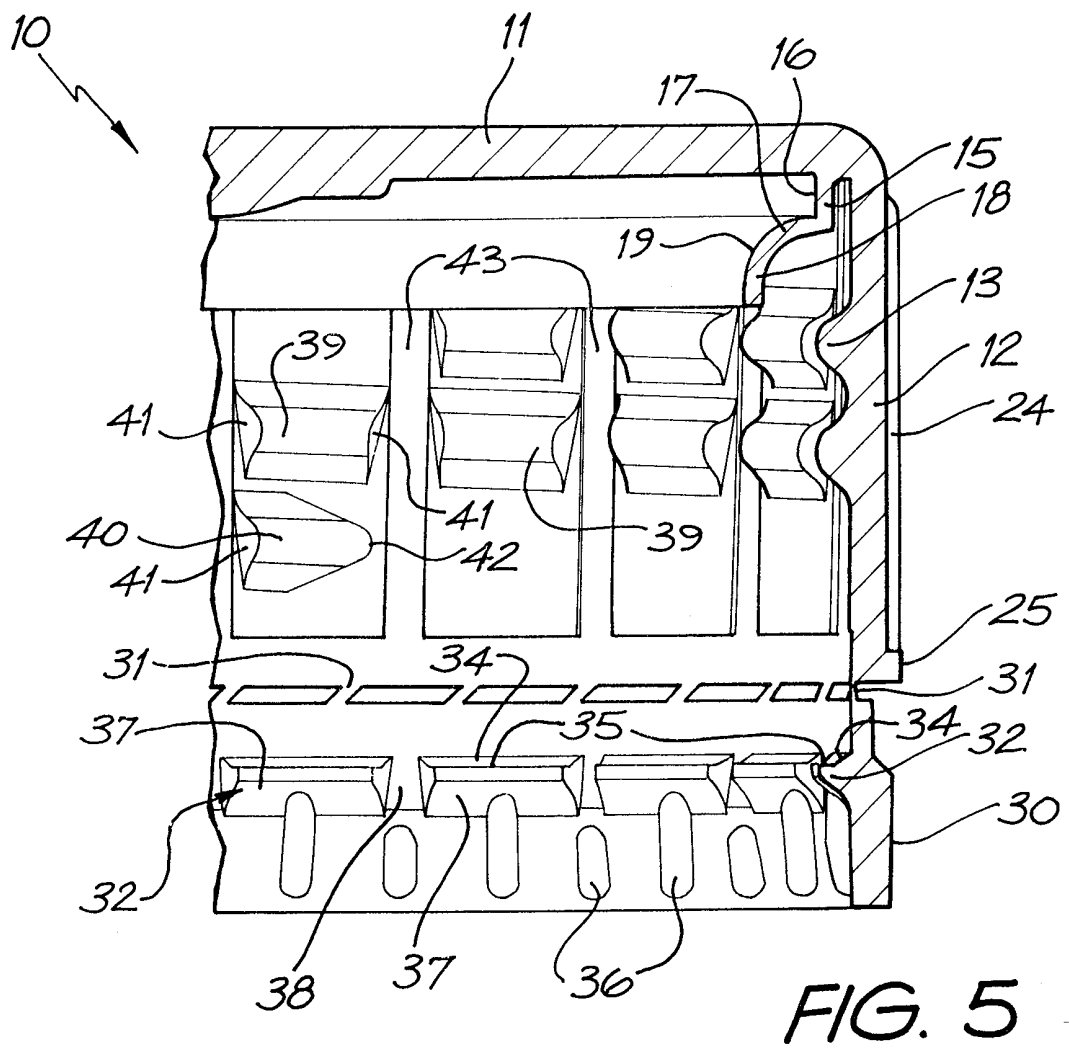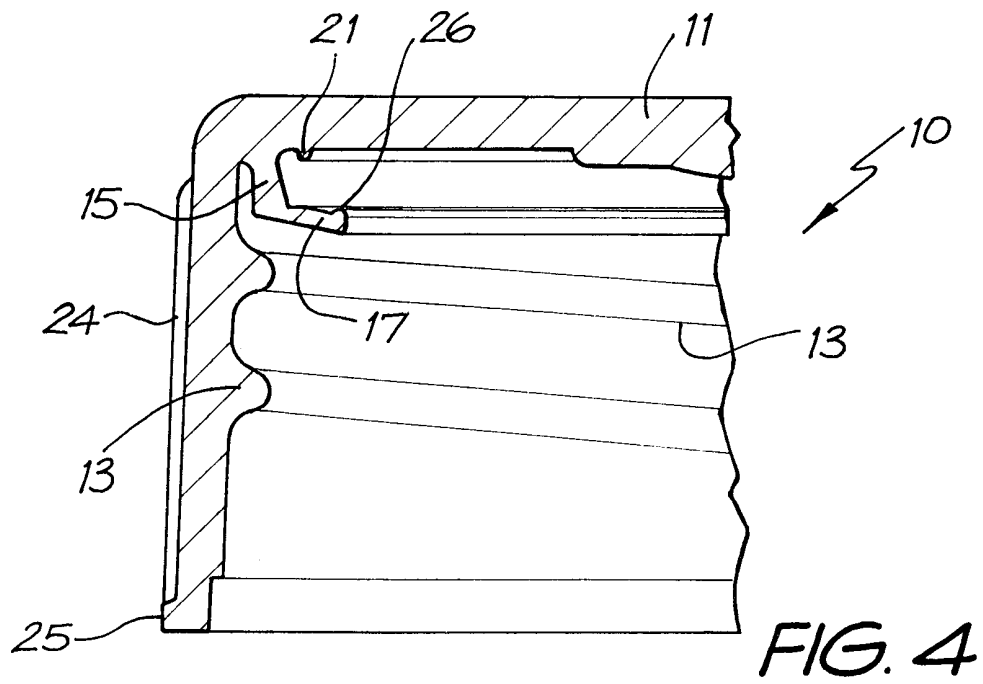

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/AU 98/00510

A. CLASSIFICATION OF SUBJECT MATTER

Int Cl⁶: B65D 41/02, 41/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B65D 41/IC

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT: IPC + Keywords

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5423444 A (DRUITT) 13 June 1995 Whole document	1-24
A,P	US 5676269 A (BLAKE et al) 14 October 1997 Whole document	1-24
A	AU 74544/94 A (PRECISION VALVE AUSTRALIA PTY LTD) 23 February 1995 Figures 7, 9, 10	25-50

☐

Further documents are listed in the
continuation of Box C

☒

See patent family annex

* Special categories of cited documents:

"A" Document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search

30 July 1998

Date of mailing of the international search report

11 AUG 1998

Name and mailing address of the ISA/AU
AUSTRALIAN PATENT OFFICE
PO BOX 200
WODEN ACT 2606
AUSTRALIA
Facsimile No.: (02) 6285 3929

Authorized officer

A. ALI

Telephone No.: (02) 6283 2607

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.
PCT/AU 98/00510

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
US	5423444	AU	37737/89	BR	8907495	CA	1322187
		DK	2984/90	EP	481981	HK	419/95
		HU	56782	NO	905371	NZ	229579
		SG	232/95	US	5638972	WO	89/12584
US	5676269	AU	52584/96	CA	2215927	CN	1131635
		EP	815028	NO	974201	PL	322173
		WO	96/29257				
AU	74544/94	WO	95/05321	BR	9407354	EP	714367
		PL	313035	CA	2169725	CN	1104167
		HU	74492	IL	110654	NZ	271041
		SG	43080	ZA	9406320		
END OF ANNEX							