(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
8 September 2017 (08.09.2017)

WIPO | PCT

(10) International Publication Number
WO 2017/151439 A1

(51) International Patent Classification:
F28F 5/04 (2006.01) *F25B 3/00* (2006.01)
F28D 11/02 (2006.01)

(21) International Application Number:
PCT/US2017/019501

(22) International Filing Date:
24 February 2017 (24.02.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/301,494 29 February 2016 (29.02.2016) US

(71) Applicant: **NATIVUS, INC.** [US/US]; 316 California Ave., #142, Reno, NV 89509 (US).

(72) Inventor: **MILLIER, Matthew, C.**; 316 California Ave., #142, Reno, NV 89509 (US).

(74) Agent: **MALLON, Joseph, J.**; Knobbe, Martens, Olson & Bear, LLP, 2040 Main Street, 14th Floor, Irvine, CA 92614 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

WO 2017/151439 A1

(54) Title: ROTARY HEAT EXCHANGER

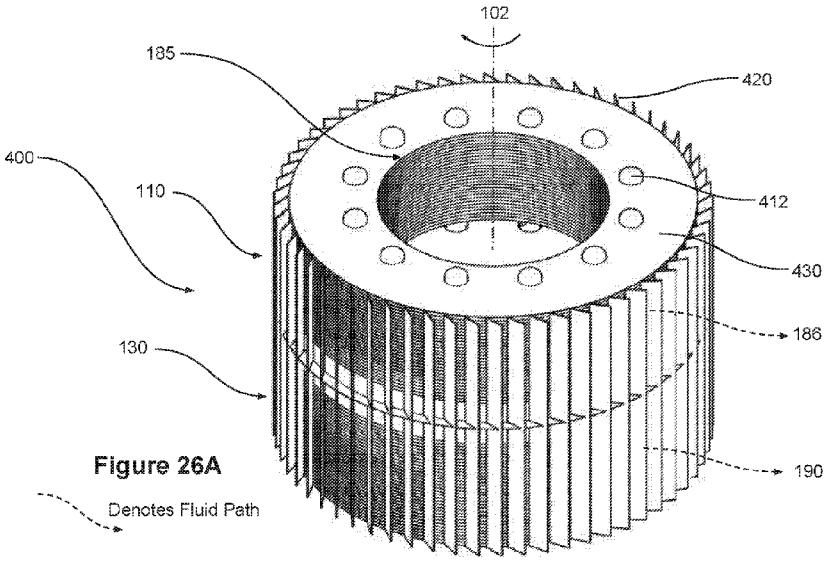


Figure 26A

(57) Abstract: Rotary heat exchangers can include a ride-along compressor, at least a portion of which can be rotated along with the heat exchanger. By rotating at least a portion of the compressor along with the heat exchanger, a sealed fluid circuit containing a two-phase working fluid can be provided. A rotary heat pump or heat engine can include an evaporator and a condenser in the form of back-to-back centrifugal fans. The centrifugal fan blades or other portions of the evaporator and condenser may include internal cavities where the working fluid undergoes a phase change.

ROTARY HEAT EXCHANGER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 62/301,494, filed February 29, 2016, the disclosure of which is hereby incorporated by reference in its entirety.

BACKGROUND

Field of the Invention

[0002] Innovations described herein relate to devices which can be operated as heat exchangers, and in particular to devices which can be operated as rotary heat exchangers.

Description of the Related Art

[0003] Rotary heat exchangers can utilize a rotating component as part of the heat exchanger, to move air and/or facilitate heat exchange separate air streams on either side of the heat exchanger.

SUMMARY

[0004] Some embodiments relate to a heat exchanger, including a first rotary heat exchanger, a second rotary heat exchanger configured to rotate in the same direction as the first rotary heat exchanger, and a fluid circuit extending through at least a portion of the first rotary heat exchanger and at least a portion of the second rotary heat exchanger and configured to permit passage of a working fluid between the first and second rotary heat exchangers.

[0005] The first rotary heat exchanger can include a first centrifugal fan and the second rotary heat exchanger can include a second centrifugal fan axially aligned with the first centrifugal fan and oriented in the opposite direction as the first centrifugal fan. The first and second centrifugal fans can include a plurality of fan blades.

[0006] The first heat exchanger can include a first plurality of thermal transfer components in thermal communication with the fluid circuit and the second heat exchanger can include a plurality of thermal transfer components in thermal communication with the

fluid circuit. The first plurality of thermal transfer components can include generally planar structures oriented parallel to one another, and the second plurality of thermal transfer components can include generally planar structures oriented parallel to one another. The the plurality of fan blades of the first centrifugal fans can extend generally orthogonal to the planes of the first plurality of thermal transfer components, and the plurality of fan blades of the second centrifugal fan can extend generally orthogonal to the planes of the second plurality of thermal transfer components.

[0007] The first and second pluralities of thermal transfer components can include evaporator fins oriented generally normal to an axis of rotation of the heat exchanger. The fluid circuit can include a plurality of tubes extending through one of the first and second plurality of evaporator fins. The the plurality of tubes can include sections which extend generally parallel to an axis of rotation of the heat exchanger, where the sections which extend generally parallel to an axis of rotation of the heat exchanger extend through one of the first and second plurality of evaporator fins.

[0008] Each of the plurality of fan blades can include a fan blade cavity, an inlet in fluid communication with the fan blade cavity, and an outlet in fluid communication with the cavity, where the fluid circuit includes fan blade cavities. The plurality of fan blades can be configured to induce a state change in a working fluid during operation of the heat exchanger, such that at least a portion of a working fluid entering the cavity through the inlet of a fan blade in a first state will exit the outlet of the fan blade in a second state. The heat exchanger can include a fluid distribution baseplate disposed between the first centrifugal fan and the second centrifugal fan, the fluid distribution baseplate including a first plurality of distribution channels, each of the first plurality of distribution channels in fluid communication with the inlet of at least one of the fan blades of the first centrifugal fan, and a second plurality of distribution channels, each of the second plurality of fluid distribution channels in fluid communication with the outlet of at least one the fan blades of the first centrifugal fan, where the fluid circuit includes the first and second pluralities of distribution channels.

[0009] The heat exchanger can include a compressor disposed along the fluid circuit and configured to rotate along with the first centrifugal fan and the second centrifugal

fan. The compressor can be a single-screw compressor. The first rotary heat exchanger and the second rotary heat exchanger can be configured to rotate at the same speed.

[0010] Some embodiments relate to a rotary heat exchanger, including a fluid distribution baseplate including a first baseplate surface, a second baseplate surface opposite the first baseplate surface, a plurality of fluid distribution channels disposed within the fluid distribution baseplate, and a central baseplate aperture, a first plurality of centrifugal fan blades secured relative to the first baseplate surface, each of the first plurality of centrifugal fan blades including at least one fluid conduit extending into the centrifugal fan blade from the side of the centrifugal fan blade adjacent the first baseplate surface, a second plurality of centrifugal fan blades secured relative to the second baseplate surface, each of the second plurality of centrifugal fan blades including at least one fluid conduit extending into the centrifugal fan blade from the side of the centrifugal fan blade adjacent the second baseplate surface, and a compressor extending through the central baseplate aperture and configured to rotate along with the fluid distribution baseplate, the compressor disposed along a fluid circuit passing through the compressor, at least one of the first plurality of centrifugal fan blades, and at least one of the second plurality of centrifugal fan blades.

[0011] Each of the first plurality of centrifugal fan blades can include a fan blade inlet aperture in fluid communication with the at least one fluid conduit and a baseplate inlet aperture extending through the first baseplate surface, and a fan blade outlet aperture in fluid communication with the at least one fluid conduit and a baseplate outlet aperture extending through the first baseplate surface, the fan blade outlet aperture located radially outward of the fan blade inlet aperture. The at least one fluid conduit extending into the centrifugal fan blade can include a plurality of cylindrical passages separated by support struts, the support struts including a plurality of apertures extending therethrough to place adjacent cylindrical passages of the plurality of cylindrical passages in fluid communication with one another.

[0012] The fan blades can have a substantially elliptical cross-sectional shape. The first plurality of fan blades can be configured to function as an evaporator, and the second plurality of fan blades can be configured to function as a condenser.

[0013] Some embodiments relate to a rotary heat exchanger apparatus, including a first heat exchanger disposed on the a first side of a baseplate, a second heat exchanger

disposed on a second side of the baseplate and configured to rotate with the first heat exchanger, and a sealed fluid circuit extending through portions of the baseplate and the first and second heat exchangers, the sealed fluid circuit having a working fluid disposed within.

[0014] The apparatus can also include a compressor, where the compressor is disposed along the sealed fluid circuit, and a motor configured to drive the compressor, where the first heat exchanger is configured to operate as an evaporator, and where the second heat exchanger is configured to operate as a condenser. The heat exchanger apparatus can be configured to transfer heat energy using a Reverse Carnot cycle. The motor can be an AC motor.

[0015] The apparatus can additionally include a turbine, where the turbine is disposed along the sealed fluid circuit, and a DC generator configured to be driven by the turbine to generate power, where the first heat exchanger is configured to operate as a condenser, and where the second heat exchanger is configured to operate as an evaporator. Portions of the second heat exchanger can be disposed radially outward of corresponding portions of the first heat exchanger. The turbine can include a single-screw turbine. The heat exchanger can be configured to generate power via an Organic Rankine cycle.

[0016] Some embodiments relate to a heat exchanger, including a first rotary heat exchanger, a second rotary heat exchanger configured to rotate in the same direction as the first rotary heat exchanger, a fluid circuit extending through at least a portion of the first rotary heat exchanger and at least a portion of the second rotary heat exchanger and configured to permit passage of a working fluid between the first and second rotary heat exchangers, and a support member supporting the first and second rotary heat exchangers and configured to separate a first airstream from a second airstream, the support member exposing the first rotary heat exchanger to a first airstream and exposing the second rotary heat exchanger to a second airstream.

[0017] The support member can include a cowling which can be moved to selectively expose the first rotary heat exchanger to one of the first or second airstream. The cowling can be moved between a first position in which the first rotary heat exchanger is exposed to the first airstream and the second rotary heat exchanger is exposed to the second airstream, and a second position in which the first rotary heat exchanger is exposed to the

second airstream and the second rotary heat exchanger is exposed to the first airstream. The support member can be configured to be installed in a window.

[0018] Some embodiments relate to a power generator configured to generate power using an Organic Rankine cycle, the power generator including a rotary compressor including a first plurality of centrifugal fan blades, a rotary evaporator including a second plurality of centrifugal fan blades and configured to rotate in the same direction as the rotary compressor, a working fluid circuit extending through at least a portion of the rotary compressor and at least a portion of the rotary evaporator, and a turbine in fluid communication with the working fluid circuit, at least a portion of the turbine configured to rotate along with the rotary compressor and the rotary evaporator.

[0019] The first plurality of centrifugal fan blades can include fewer centrifugal fan blades than the second plurality of centrifugal fan blades. The first plurality of centrifugal fan blades can be smaller than the second plurality of centrifugal fan blades. The rotary compressor can be axially aligned with the rotary evaporator, and portions of the rotary compressor can be located radially inward of corresponding portions of the rotary evaporator.

[0020] Some embodiments relate to a solar power generation system, including a rotary heat exchanger, including a rotary compressor including a first plurality of centrifugal fan blades, a rotary evaporator including a second plurality of centrifugal fan blades and configured to rotate in the same direction as the rotary compressor, and a working fluid circuit extending through at least a portion of the rotary compressor and at least a portion of the rotary heat exchanger, and a turbine in fluid communication with the working fluid circuit, and a solar collector configured to concentrate sunlight on the rotary heat exchanger.

[0021] Some embodiments relate to an atmospheric condensation device, including a first rotary heat exchanger including a first plurality of centrifugal fan blades, the first plurality of centrifugal fan blades including a hydrophobic coating, a second rotary heat exchanger including a second plurality of centrifugal fan blades and configured to rotate in the same direction as the first rotary heat exchanger, and a fluid circuit extending through at least a portion of the first rotary heat exchanger and at least a portion of the second rotary heat exchanger and configured to permit passage of a working fluid between the first and second rotary heat exchangers.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] **Figure 1A** is a perspective view of a rotary heat exchanger including two centrifugal fans oriented in opposite directions.

[0023] **Figure 1B** is a side view of the rotary heat exchanger of **Figure 1A**.

[0024] **Figure 2** is a perspective cross-sectional view of the rotary heat exchanger of **Figure 1A**, along a plane **2-2** of Figure **1B**, bisecting and parallel with the stator shaft.

[0025] **Figure 3** is a top cross-sectional view of the rotary heat exchanger of **Figure 1A**, taken along a plane **3-3** of **Figure 1B**, orthogonal to the stator shaft.

[0026] **Figure 4** is an exploded assembly view of the baseplate, motor, compressor and associated components of the rotary heat exchanger of **Figure 1A**.

[0027] **Figure 5A** is an exploded assembly view of the components of the fluid distribution baseplate of **Figure 1A**.

[0028] **Figure 5B** is another exploded assembly view of the components of **Figure 5A**.

[0029] **Figure 6A** is a top plan view of the upper baseplate component of **Figure 5A**.

[0030] **Figure 6B** is a bottom plan view of the upper baseplate component.

[0031] **Figure 7A** is a top plan view of the middle baseplate component of **Figure 5A**.

[0032] **Figure 7B** is a bottom plan view of the middle baseplate component.

[0033] **Figure 8A** is a top plan view of the lower baseplate component of **Figure 5A**.

[0034] **Figure 8B** is a bottom plan view of the middle baseplate component.

[0035] **Figure 9** is a perspective view of a first configuration of a fan blade of the rotary heat exchanger of **Figure 1A**, illustrating air flow over the fan blade.

[0036] **Figure 10** is a perspective exploded assembly view of the fan blade of **Figure 9**.

[0037] **Figure 11A** is a cross-sectional view of the fan blade of **Figure 9**, illustrating the flow of working fluid within the interior of the fan blade.

[0038] **Figure 11B** is a top plan view of the cross-section of **Figure 11A**.

[0039] **Figure 12** is a perspective view of a second configuration of a fan blade of the rotary heat exchanger of **Figure 1A**, illustrating air flow over the fan blade.

[0040] **Figure 13** is a perspective exploded assembly view of the fan blade of **Figure 12**.

[0041] **Figure 14A** is a cross-sectional view of the fan blade of **Figure 12**, illustrating the flow of working fluid within the interior of the fan blade.

[0042] **Figure 14B** is a top plan view of the cross-section of **Figure 14A**.

[0043] **Figure 15** is an exploded assembly view of the compressor of the rotary heat exchanger of **Figure 1A**.

[0044] **Figure 16** is a top cross-section of the compressor of **Figure 15**, along a plane orthogonal to the rotor shafts of the dual planetary gate rotors.

[0045] **Figure 17** is a schematic diagram illustrating a vapor compression refrigeration system.

[0046] **Figure 18** is a pressure-enthalpy diagram illustrating a Reverse Carnot cycle.

[0047] **Figure 19** is a schematic diagram illustrating a Organic Rankine Cycle (ORC).

[0048] **Figure 20** is a pressure-enthalpy diagram illustrating an Organic Rankine Cycle (ORC).

[0049] **Figure 21** is a perspective view of a heating/cooling apparatus utilizing a rotary heat exchanger such as the rotary heat exchanger of **Figure 1A**.

[0050] **Figure 22A** is a perspective view of a single-piece, hollow evaporator-side or condenser-side fan blade heat exchanger.

[0051] **Figure 22B** is a perspective cross-sectional view of a single-piece, hollow evaporator-side or condenser-side fan blade heat exchanger.

[0052] **Figure 23A** is a perspective view of a rotary heat exchanger including two centrifugal fans oriented in opposite directions in a configuration specific to the operation of the Organic Rankine Cycle.

[0053] **Figure 23B** is an alternate view of the rotary heat exchanger **Figure 23A**.

[0054] **Figure 24** is an exploded assembly view of the baseplate and turbine and associated components of the rotary heat exchanger of **Figure 23A**.

[0055] **Figure 25A** is a perspective exploded assembly view of an evaporator fan blade of the rotary heat exchanger of **Figure 23A**.

[0056] **Figure 25B** is a perspective cross-sectional view of the evaporator fan blade of the rotary heat exchanger **Figure 23A**.

[0057] **Figure 26A** is a top perspective view of an embodiment of a rotary heat exchanger in which the fluid circuit is separate from the fan blades.

[0058] **Figure 26B** is a top plan view of an embodiment of the rotary heat exchanger of **Figure 26A**, additionally illustrating two additional locations for fan blade placement.

[0059] **Figure 26C** is a side view of the rotary heat exchanger of **Figure 26A**. **Figure 26D** is a perspective cross-section view of the rotary heat exchanger of **Figure 26B** without the additional fan blade placement alternatives, taken along the line **B–B** of **Figure 26B**. **Figure 26E** is a detail perspective cross-section view of section E of **Figure 26D**.

[0060] **Figure 27A** is a perspective view of the working fluid routing system of the rotary heat exchanger of **Figure 26A**. **Figure 27B** is a radial section view of the working fluid routing system of **Figure 27A**. **Figure 27C** is a top plan of the working fluid routing system of **Figure 27A**, illustrating working fluid flow throughout the system and compressor.

[0061] **Figure 28A** is a cross-sectional view of a working fluid routing system such as the working fluid routing system of **Figure 27A**, taken along the radial line **B–B** of **Figure 27C**. **Figure 28B** is a cross-sectional detail view of the working fluid routing system of **Figure 28A**, illustrating the fluid passage between the condenser section and the evaporator section. **Figure 28C** is a detailed cross-sectional view of the working fluid routing system of **Figure 28A**, illustrating the evaporator side of a fluid passage between the condenser section and the evaporator section.

[0062] **Figure 29** is an exploded perspective assembly view of various components of the working fluid routing system of **Figure 27A**.

[0063] **Figure 30A** is a perspective view of the a fan and support assembly configured to incorporate a working fluid routing system, such as the working fluid routing system of **Figure 27A**. **Figure 30B** is a perspective view of a fan and support assembly configured to incorporate a working fluid routing system, such as the working fluid routing system of **Figure 27A**.

[0064] **Figure 31** is a top plan view of a heat exchange fin.

[0065] **Figure 32** is a detail of the heat exchange plate in **Figure 31**.

[0066] **Figure 33** is a is a top perspective view of an alternative embodiment of a rotary heat exchanger in which the working fluid is routed through a structure containing inlet and outlet axial fan blades.

[0067] **Figure 33A** is a side cross-section view of the rotary heat exchanger of **Figure 33**, taken along the line **B–B** of **Figure 33**. **Figure 33B** is a side cross-section detail view of the rotary heat exchanger of **Figure 33**, taken along the line **B–B** of **Figure 33**.

[0068] **Figure 34** is a top perspective view of an alternate embodiment of a rotary heat exchanger in which the individual heat exchange fins are attached to each fluid conduit individually.

[0069] Like reference numbers and designations in the various drawings indicate like elements. Note that the relative dimensions of the figures may not be drawn to scale.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0070] A ride-along compressor can be used in conjunction with a rotary heat exchanger to provide a sealed fluid circuit. Although certain embodiments are described herein as a heat pump, similar structures can be used in a wide variety of other applications.

[0071] **Figure 1A** is a perspective view of a rotary heat exchanger **100** including two centrifugal fans oriented in opposite directions. **Figure 1B** is a side view of the rotary heat exchanger of **Figure 1A**. The heat exchanger **100** includes an evaporator **110** on a first side of a baseplate **180**, and a condenser **130** on a second side of the baseplate **180**. A compressor **150** extends through a central aperture in the baseplate **180**. In contrast to a heat exchanger system which utilizes separate radiator and fan structures, the fan blades of

illustrated embodiment serve as both heat exchange surfaces and components of the fan. The centrifugal fan blades are in a constantly accelerating frame of reference with respect to the air they are moving, and therefore experience a turbulent heat exchange. The heat exchange fluid internal to the fan blades also experience turbulent effects improving their heat exchange potential. By not providing separate fan and heat exchanger structures, the heat exchange structure need not be disposed in the path of the airflow from the fan. The removal of a separate airflow-inhibiting structure can provide improved efficiency for the same amount of fan power. The radial disposition of the fan blades allows for a multi-parallel path into and out of the heat exchanger, increasing its capacity.

[0072] The evaporator **110** includes a plurality of evaporator fan blades **112** extending outward from a first surface **182** of the baseplate **180**, such that the evaporator **110** functions as a centrifugal fan. The evaporator fan blades **112** extend between the first surface **182** of baseplate **180** and the facing surface of evaporator endplate **184**. In the illustrated embodiment, the evaporator fan blades **112** of the evaporator **110** are elliptic cylinders, and the cross-sectional size of the evaporator fan blades **112** remains constant over the height of the fan blades.

[0073] In one embodiment, the rotary heat exchanger **100** is configured to rotate in a clockwise direction **104** (from the perspective of **Figure 1A**) about axis of rotation **102**. Air is pulled in along the axis of rotation **102** through the source air inlet **185** in the evaporator endplate **184** and then induced radially outward from the evaporator **110** by the evaporator fan blades **112**. A stator shaft (not shown in **Figure 1A**) extending along the axis of rotation **102** supports the rotary heat exchanger **100** and the connection between the stator shaft and components of the heat exchanger **100** permits rotation of the heat exchanger during operation.

[0074] The condenser **130** similarly functions as a centrifugal fan, with air drawn in along axis of rotation **102** through a sink inlet **189** in condenser endplate **188**, and then pushed out by the condenser fan blades **132** radially outward from the axis of rotation **102**. In the illustrated embodiment, the condenser fan blades **132** are also elliptic cylinders, and are similar in size and shape to the evaporator fan blades **112**. However, in other embodiments, design parameters such as the the size, shape, positioning, and number of the condenser fan

blades **112** relative to the the evaporator fan blades **132** can be modified. For instance, the capacity of the system can be altered by changing the size, quantity, length, and inclination of the fan blades on either the condenser or evaporator side of the system.

[0075] **Figure 2** is a perspective cross-sectional view of the rotary heat exchanger of **Figure 1A**, along a plane **2-2** of Figure **1B**, bisecting and parallel with the stator shaft. The compressor **150** can be a single-screw compressor or other appropriate compressor, and may include a main screw gear rotor which acts as a stator, referred to herein as a main screw stator **152**. The main screw stator **152** is connected to a main stator shaft **154**. Two planetary gate rotors **156** supported by planetary rotor shafts **157** are configured to rotate around the main screw stator **152** when the compressor **150** is driven. Casing **158** serves as a rotor, and is secured relative to the baseplate **180**, such that movement of the casing **158** induces rotation of the heat exchanger **100** and operation of the evaporator **110** and condenser **130** as centrifugal fans.

[0076] In some embodiments, other types of vapor compressors may be used, which may be hub-mounted in a similar fashion. These other compressor types may include, but are not limited to, twin-screw compressors, scroll compressors, or other non-positive displacement type compressors such as a turbine. In some embodiments, the compressor may be stationary and dislocated from the rotary heat exchanger, instead of being a ride-along or hub-mounted compressor. In such embodiments, fluid may be transferred to and from the rotating portions of the heat exchanger through a rotating union or other suitable structure for providing fluid communication between a first component rotating relative to a second component. In some particular embodiments, this rotating union could be of a double passage type, or two single-passage rotary unions could be used to transfer working fluid, such as return and supply vapor, to a compressor of any type.

[0077] A magnetic linkage **160** is made between an external stator **162** and an internal magnetic stator **164** which can be an extension of or rigidly coupled to the main stator shaft **154** or the main screw stator **152**. A portion of the casing **158** extends between the external stator **162** and the internal magnetic stator **164**, and is permitted to rotate freely during operation of the compressor **150**, as the magnetic linkage **160** does not require a direct mechanical connection between the external stator **162** and the internal magnetic stator **164**.

Other embodiments include passing stator shaft **154** seen later in **Figure 15** through a rotating or sliding seal to a fixed or mechanically-grounded support in order to hold the stator parts of the system stationary. In such embodiments, a magnetic stator linkage **160** may not be necessary.

[0078] A motor **170**, such as an AC or DC motor, includes a stator **172** and a rotor **174**. The motor **170** can be disposed on the opposite side of the main screw stator **152** as the magnetic linkage **160**, and can be driven to rotate the casing **158** along with the remainder of the rotary heat exchanger **100** relative to the main screw stator **152**. In an operation in which the rotary heat exchanger is used as part of a heating, ventilating, and air conditioning (HVAC) system, the motor **170** can be an AC motor, and can be operated in the range of 1,000 to 3,000 rpm, although higher or lower speeds may be used in other embodiments. For other purposes, such as when the heat exchanger **100** is being operated as a power generator converting heat energy to electric energy, a DC generator may be used, and can be operated at higher speeds, such as speeds in the range of 4,000 to 5,000 rpm.

[0079] Other embodiments may include an offset motor that drives the rotary heat exchanger in the same fashion, but is not mounted along axis **102** shown in **Figure 1**. Offset motors in such alternate embodiments could be linked to the heat exchanger through a drive belt, gears, magnetic, hydraulic, pneumatic or any other suitable linkage type.

[0080] It can also be seen in **Figure 2** that the evaporator blades **112** include at least one interior cavity **114**, and that the condenser blades **132** similarly include at least one interior cavity **134**. The interior cavities **114** and **134** of the evaporator blades **112** and the condenser blades **132** form a part of a fluid circuit extending through various components of the heat exchanger **100**. The interior cavities **114** of the evaporator blades **112** are in fluid communication with at least one of a plurality of evaporator distribution channels **192** in the baseplate **180**. Similarly, the interior cavities **134** of the condenser blades **132** are in fluid communication with at least one of a plurality of condenser distribution channels **194** in the baseplate **180**. In the illustrated embodiment, the baseplate may include at least three component plates, as described below in greater detail with respect to **Figures 5A** through **8B**, with the facing surfaces of one adjacent pair of component plates at least partially

defining the evaporator distribution channels **192** and the facing surfaces of another adjacent pair of component plates at least partially defining the condenser distribution channels **194**.

[0081] The fluid circuit extending throughout the rotary heat exchanger **100** also passes through the compressor **150**, and an expansion valve shown in **Figure 12**. Because a portion of the compressor **150** rotates along with the evaporator **110** and condenser **130** of the heat exchanger **100**, the fluid circuit may be completely sealed despite the rotation of the heat exchanger. The sealed fluid circuit can eliminate the need for sealed rotary unions or other fluid connections at points of relative motion between two components, which can often be points of wear and/or failure.

[0082] The fluid circuit may be filled with a two-phase working fluid which will undergo phase changes in the evaporator **110** and the condenser **130**, and which can be used to transfer heat from the evaporator **110** to the condenser **130**. Examples of suitable working fluids include, but are not limited to R-134a, R-550a, and R-513a , although a wide variety of other working fluids may also be used.

[0083] **Figure 3** is a top cross-sectional view of the rotary heat exchanger of **Figure 1A**, taken along a plane **3-3** of **Figure 1B**, orthogonal to the stator shaft. In particular, it can be seen that the interior cavities **114** of the evaporator blades **112** in the illustrated embodiment include a plurality of cylindrical bores **116** separated by perforated struts **118**. The perforated struts **118** provide rigidity to the hollow structure of the evaporator blades **112** while permitting the cylindrical bores to remain in fluid communication with one another. As discussed in greater detail below, the ends of certain of the cylindrical bores **116** may be plugged, leaving others open to serve as inlet and outlet apertures into the interior cavities **114** of the evaporator blades **112**.

[0084] In alternative embodiments include different methods of manufacture of the wing and/or any internal support structures may be used, including a single-piece single-piece evaporator or condenser fan blade such as a blade shown in **Figure 22A-22B**. In such embodiments, the fluid conduits along condenser wing vapor path **222** shown in **Figure 11A** or evaporator wing liquid/vapor path **202** shown in **Figure 14A** may be drilled or punched in a unitary wing structure. In some embodiments, the wing could contain no distinct internal support structures. In another embodiment, one or more internal wing support structures

could be formed or installed perpendicular to the support structures of the embodiment of **Figure 3**, along or parallel to a chord extending across the widest part of the fan blade cross-section.

[0085] **Figure 4** is an exploded assembly view of the baseplate, motor, compressor and associated components of the rotary heat exchanger of **Figure 1A**. In the illustrated embodiment, the baseplate **180** includes three plates joined together: an evaporator-side component plate **180a**, a central component plate **180b**, and a condenser-side component plate **180c**. The condenser-side component plate **180c** and the evaporator-side component plate **180a** include a plurality of apertures extending therethrough (see **Figures 5A–8B**) which are configured to be aligned with the inputs and outputs of the fan blades adjacent the condenser-side component plate **180c** and the evaporator-side component plate **180a**, respectively. Certain embodiments of the apertures will place the interior cavities of the fan blades in fluid communication with a distribution channel on the same side of the central component plate **180b** as those fan blades. In addition, apertures in central component plate **180b** can place the interior cavities of fan blades in fluid communication with distribution channels on the opposite side of the central component plate **180b** as those fan blades.

[0086] When assembled, the widest portion of the compressor casing **158** will extend through central apertures in the evaporator-side component plate **180a**, the central component plate **180b**, and the condenser-side component plate **180c**. The rotor **174** of motor **170** can be secured relative to the casing **158**, such that rotation of the rotor **174** induces movement of the casing **158** relative to the main screw stator **152** (not shown). The magnetic linkage **160** permits rotation of the casing **158** relative to the external stator **162** and the stator shaft extending therefrom. At least because the cross-sectional shape of the widest part of casing **158** is non-circular in the plane of the baseplate **180**, the rotation of the casing **158** induces rotation of the baseplate **180** and the evaporator **110** and condenser **130** (see **Figure 1A**) supported by the baseplate **180**, while the stator **172** of the motor **170** and the stator linkage **160** remain static.

[0087] **Figure 5A** is an exploded assembly view of the components of the fluid distribution baseplate of **Figure 1A**, showing an evaporator-side component plate **180a**, a

central component plate **180b**, and a condenser-side component plate **180c,** viewed from the evaporator-side. Baseplate **180** will be joined together by a plurality of plate joining pins **196** passing through a plurality of plate joining holes **198**. In other embodiments, other joining techniques could be used to join the three part baseplate together, including welding, bonding, brazing, threads, or other joining methods. Other embodiments may include a one-piece baseplate with internal fluid conduits made by other methods such as 3d printing, casting, molding, or other methods. The compressor casing return port **242**, in compressor **150**, will be in fluid communication with plate vapor return path **240**. Plate vapor return path **240** acts as a conduit for fluid transfer between evaporator-side wing conduit **117** shown later in **Figure 13**, and the suction side of the compressor, casing return port **242.** Plate vapor return path **240** is contained entirely between central component plate **180b** and evaporator component plate **180a**. Multiple fluid paths **240** combined with make up a plurality of vapor distribution channels **192**. In similar fashion, plate vapor supply path **246** transits a plurality of condenser distribution channels **194**. Plate liquid supply port **250** allows for the transfer of liquid-phase fluid through central component plate **180b**, from the condenser-side to the evaporator-side of the system. Other fluid distribution conduits and paths are possible in other embodiments that satisfy the same general fluid flow requirements of the system.

[0088] **Figure 5B** is another exploded assembly view of the components of **Figure 1A**, showing condenser-side component plate **180a**, a central component plate **180b**, and a condenser-side component plate **180c** viewed from the condenser-side. Compressor casing supply port **244**, in compressor **150**, will be in fluid communication with plate vapor supply paths **246**. Plate vapor supply path **246** is contained entirely between central component plate **180b** and condenser component plate **180c** and allows for fluid communication between compressor casing supply port **244** and condenser-side wing conduit **117** shown later in **Figure 10.** Plate liquid supply path **248** allows liquid-phase working fluid to flow through plate liquid supply port **250** and into plate liquid supply channel **252** on the evaporator side of the system. A plurality of evaporator distribution channels **192** allow for gas-phase working fluid to flow from the evaporator-side heat exchanger **110** into the compressor **150** through compressor casing return port **242**.

[0089] **Figure 9** is a perspective view of a first configuration of a condenser fan blade **132** of the rotary heat exchanger **130** of **Figure 1A**, illustrating inlet air flow **189** and outlet air flow **190** over the fan blade **132**. Given the five different internal cavities **134**, many different configurations are possible between wing mounts **119** and wing conduits **117** and wing plugs **115**. Wing mount **119** generates a clamping force between the baseplates **180a**, **180b**, and **180c** and also holds the wing itself into the baseplate, and may contain additionally either a wing conduit **117** or a wing plug **115**. This construction is beneficial in that by using the wing mount **119** as the female nut for the joining of the plates together instead of using an additional nut to provide the clamping force of the plate and an additional method to secure the wing to the plate itself. Wing conduit **117** may pass through a plate joining hole **198** and thus resist centrifugal forces, acting as a sort of wing mount, although containing no plate joining pins **196**. Air-side heat exchange takes place on the surface of condenser fan blade **132**, as air passes over the wing from fluid path **189** to **190**. The fan blade **132** includes an internal cavity **134** including plurality of cylindrical bores **136**. Each cylindrical bore **136 is** separated from the adjacent cylindrical bores **136** via perforated struts **118** (see **Figure 10**), which permit fluid communication between adjacent cylindrical bores **136**. In the illustrated embodiment, the fan blade **132** includes five cylindrical bores **136**, which are cylindrical in shape with increasing cross-sectional diameters nearer the thicker center portion of the blade. In other embodiments, other numbers, shapes, and sizes of internal cavities may also be used. In other embodiments, the wing may be secured to the plate using a bolt separate from the plate joining pins **196**, or by another joining method including brazing, welding, bonding, flaring, riveting, or any other method. Another embodiment includes securing the wings to the plate by method of flaring fluid conduit **117** after it is installed in the plate, effectively sealing the fluid conduit to fluid pressure and mechanically securing it to the plate. Sealing the fluid conduit **117**, seen in **Figure 10**, with respect to pressure to the baseplate **180** can be accomplished using an O-ring , a compression fitting, a flaring of the conduit itself as described above, brazing, bonding, shrink-fitting, or any other applicable method of pressure sealing.

[0090] **Figure 10** is an exploded view of a condenser-side hollow fan blade **132**, showing perforated struts **118**. Also visible are wing plugs **115**, wing mounts **119**, and wing

conduits **117**. Perforated struts **118** can be slid into condenser-side hollow fan blade **132** in order to structurally support the resultant pressure vessel. Perforated struts **118** may be bonded, brazed, welded, or otherwise joined to the fan blade **132**, or may simply be mated with corresponding slots in the fan blade **132** with no additional joining method. An angled surface provided by condenser ramp **136** aids liquid fluid transport out of the wing through wing conduit **117** toward fluid path **248** via centrifugal acceleration. In an alternate embodiment, the condenser fan blades or the cylindrical bores may be canted relative to the plane of the supporting baseplate to provide an angled surface for returning liquid fluid along path **224**, instead of using a discrete condenser ramp **136**, so that the trailing edge of the blade is inclined in the same direction as condenser ramp **136**.

[0091] As discussed above, this embodiment combines a heat exchange apparatus and a fan apparatus into the same component. With heat exchange taking place on the surface of the fan blades, there is no need for an additional heat exchanger, which would inhibit the air flow. Fan blade heat exchangers also reduce fouling, thus increasing the efficacy of the heat exchanger.

[0092] **Figure 11A** is a hollow condenser-side fan blade **132** and heat exchanger section view showing internal perforated struts **118** with fluid conduits. **Figure 11B** is a cross-section plan view of **Figure 9**. Also visible in **Figure 11A** are baseplate and end plate wing mounts **119**, wing plugs **115**, and wing conduits **117**. As heat exchanger is rotated and air flow is induced across condenser-side fan blade **132**, heat exchange occurs between the air and the fan blade **132**. Vapor fluid entering the wing through fluid path **220** will fill the wing across fluid path **222**. Heat exchange will occur between the working fluid along fluid path **222** and hollow condenser-side fan blade **132**, causing the vapor to condense into liquid. Working fluid in liquid form will then flow along path **222** due to centrifugal sorting and contact condenser ramp **136**. Centrifugal force will aid liquid flow along condenser ramp **136** and toward fluid path **248**, such that the liquid working fluid exits the condenser-side fan blade **132** at fluid path **224** and intersecting plate fluid supply path **248**.

[0093] **Figure 12** is a perspective view of a first configuration of a evaporator fan blade **112** of the rotary heat exchanger **110** of **Figure 1A**, illustrating inlet air flow **185** and outlet airflow **186** over the fan blade **112**. Given the multiple cylindrical bores **116** which

make up the internal cavity **114** of the fan blade **112**, many different configurations are possible by using a combination of wing mounts **119**, wing conduits **117**, and wing plugs **115** disposed at the ends of the cylindrical bores **113** Wing mount **119** generates a clamping force between the baseplates **180a**, **180b**, and **180c** and holds the wing itself into the baseplate, and may additionally contain either a wing conduit **117** or a wing plug **115**. Wing conduit **117** may pass through a plate joining hole **198** and thus resist centrifugal forces, acting as a sort of wing mount, although containing no plate joining pins **196**. Air-side heat exchange takes place on the surface of evaporator fan blade **112**, as air passes over the wing from fluid path **185** to **186**. In the cavity **114**, may be mounted an expansion valve **113.** The evaporator fan blades may differ from the condenser fan blades in the configuration of the fluid conduits and mounts to the baseplate.

[0094] **Figure 13** is an evaporator-side hollow fan blade **112**, exploded view, showing perforated struts **118**. Also visible are wing plugs **115**, wing mounts **119**, and wing conduits **117**. Perforated struts **118** are slid into evaporator-side hollow fan blade **112** to structurally support the resultant pressure vessel. Perforated struts **118** may either be bonded, brazed, or welded, or simply mated with no additional joining method.

[0095] **Figure 14A** is a hollow evaporator-side fan blade **112** and heat exchanger section view showing internal perforated struts **118** with fluid conduits. Also visible, baseplate and end plate wing mounts **119**, wing plugs **115**, and wing conduits **117**. **Figure 14B** is a cross-section plan view of **Figure 12**. As heat exchanger is rotated and air flow is induced across evaporator-side fan blade **112**, heat exchange occurs. Liquid working fluid entering the wing through fluid path **200** and expansion valve **113** transit radially outward along fluid path **201** due to centrifugal acceleration. As heat exchange occurs between fluid along path **201**, the working fluid undergoes a phase change and boiling occurs. Working fluid vapor then transits the wing along fluid path **202** due to the difference in density between the vapor and liquid phase of the working fluid while under centrifugal acceleration, hereafter called centrifugal sorting. Centrifugal sorting will separate the liquid and vapor phase of the working fluid due to the difference in density between the two phases. Vapor exits the evaporator-side fan blade **112** along fluid path **204** through wing conduit **117**

and toward vapor path **240**. Liquid is supplied to liquid fluid path **200** through common plate liquid supply channel **252.**

[0096] **Figure 15** shows a single-screw type vapor compressor. The relative motion between the casing **158** and the internal components create compression chambers and compress a given volume of gas in a shrinking chamber for discharge. In some embodiments, the casing of a fluid pump is stationary with respect to the ground, while the internal mechanisms create suction and discharge through their rotation or operation. However, this operation relies on the relative rotation of the stator and rotating sets of components, and does not require that specific components be held stationary. In the illustrated embodiment, the components which are sometimes described as stationary instead rotate relative to the components which are sometimes described as rotation, in order to create suction and discharge. Specifically, the compressor casing **158** which is rigidly mounted in baseplate **180** is rotating from an external point of view as the heat exchanger rotates. Planetary rotor shafts **157** mounted inside compressor casing **158** and able to rotate about planetary rotor shaft axis of rotation **155** via bearings, orbit in a planetary manner around main screw stator **152** and axis of rotation **102**. Planetary idler gate rotors **156** are driven in their orbital motion through direct contact with main screw stator **152** flutes.

[0097] The stationary components of the illustrated embodiment include main screw gear stator **152** which is held stationary by a direct connection to main stator shaft **154**, which is in turn held stationary through a direct connection to internal magnetic stator **164**. Internal magnetic stator **164** is held stationary by the external magnetic stator **162** through magnetic linkage. External magnetic stator **162** is mechanically grounded. The relative motion between aforementioned stationary, rotating, and orbiting components creates suction at compressor casing return port **242** and pressurized vapor at compressor casing supply port **244**.

[0098] The volume defined by the flutes of the main screw stator **152** begins large at the suction end of the compressor. As they are rotated relative to the gate rotors **156**, the low pressure vapor is compressed into higher pressure vapor due to the decrease in volume defined by the smaller flutes of the main screw stator **152** towards the discharge end of the compressor.

[0099] In other embodiments, the compressor shown in **Figure 15** can instead act as a turbine, converting pressurized vapor into kinetic rotational energy by expansion of said vapor operating an ORC (Organic Rankine Cycle) as shown in **Figure 19** later. In such an embodiment, high-pressure vapor would enter compressor casing supply port **244** and exit as an expanded, lower-pressure vapor through compressor casing return port **242**. Vapor compression is generated through the relative motion between the main screw stator **152** and the gate rotors **156**.

[0100] **Figure 16** is an assembled cross-section plan view of **Figure 15**. Shown are planetary gate rotors **156** in direct contact and meshed with main screw stator **152**.

[0101] **Figure 17** schematically illustrates a single-stage vapor compression refrigeration cycle system diagram showing a single-stage vapor compression refrigeration cycle. In an embodiment in which the rotary heat exchanger of **Figure 1** operates this single-stage vapor compression refrigeration cycle, the cycle begins with vapor generated in the evaporator fan blade **112** along evaporator wing vapor path **202** and exits the evaporator wing **112** along evaporator wing vapor outlet path **204**. The vapor enters the plate vapor return path **240** and subsequently the compressor casing return port **242**. Upon entering the compressor **150**, vapor is compressed and exits the compressor through compressor casing supply port **244** shown in **Figure 15**. The pressurized vapor continues along plate vapor supply path **246** toward the condenser wing vapor supply port **220** shown in **Figure 11A**.

[0102] The compressed wing vapor then enters the condenser **130** side of the system. Heat is rejected from the condenser **130** side of the system through the condenser air supply **190** shown in **Figure 9**. This heat rejection removes heat from the condenser as previously mentioned and shown in **Figure 11A**. The high pressure vapor entering along condenser wing vapor fluid path **220** and continuing along condenser wing vapor path **222** experiences heat rejection, condensing the vapor. Through centrifugal sorting and centrifugal acceleration, the condensed liquid is aided along condenser wing vapor path **222** toward condenser ramp **136**. Centrifugal acceleration forces condensed liquid down condenser ramp **136** and along condenser liquid supply path **224** out of the wing and toward plate liquid supply path **248** shown in **Figure 5B.** Liquid fluid passes through plate liquid supply port **250** aided by higher pressure on condenser side of the system. Liquid continues along plate

liquid supply channel **252** shown in **Figure 5A** toward evaporator wing liquid supply path **200** shown in **Figure 14A**.

[0103] Liquid enters the evaporator wing heat exchanger **112** along evaporator liquid supply path **200** and flows through expansion valve **113** shown in **Figure 13** and **Figure 14A**. Liquid enters evaporator fan blades **112** through the evaporator wing liquid supply path **200** shown in **Figure 14A**. Liquid fluid continues along evaporator liquid wing path **201** and is pulled radially outward due to centrifugal acceleration. As heat is added to the system through source air inlet path **185** shown in **Figure 12**, and heat enters the evaporator fan blades **112**, liquid is boiled and becomes vapor and transits along evaporator wing vapor inlet path **202** due to centrifugal sorting. Cold air is subsequently rejected along evaporator air outlet path **186** shown in **Figure 12**. Evaporator vapor transits from evaporator wing vapor path **202** and continues out of the wing through evaporator wing vapor outlet path **204** toward the plate vapor return path **240**, thus completing the thermodynamic cycle illustrated in **Figure 17**.

[0104] **Figure 22A** is a perspective view of a single-piece, hollow evaporator-side or condenser-side fan blade heat exchanger **120**, showing a plurality of channels and perforated struts. These fan blades differ from previously stated embodiments in that their single-piece construction which may be advantageous for simplicity sake. This may be advantageous as joining assembly of the support struts and the outer wing is not necessary. This embodiment would require perforation of the support struts while they are part of the wing, possibly requiring a specially designed punch, machining, or boring process.

[0105] **Figure 22B** is a perspective cross-sectional view of a single-piece, hollow evaporator-side or condenser-side fan blade heat exchanger **120**, showing a plurality of channels and perforated struts.

[0106] Although described herein as a heat exchanger, structures similar to the heat exchanger **100** can be used in a variety of other applications. For example, in some embodiments, a similar device may be operated as a condensation unit to condense atmospheric water vapor into liquid water for collection and use. In other embodiments, a similar device as seen in **Figure 19** and **Figure 20** may be operated as a rotary heat engine to generate power using a thermal input through the Organic Rankine Cycle.

[0107] In such alternative embodiments, structural changes can be made to the design shown in **Figure 1A** to tailor the structure towards a different use. For example, as discussed above, some embodiments utilize a similar structure as a rotary heat engine, with the evaporator side being exposed to heat to induce rotation of the heat exchanger, driving a generator to convert the heat energy into electrical power. Such embodiments may operate on an Organic Rankine Cycle (ORC). In embodiments in which the device is used as a heat engine, the structure of the evaporator fan blades may be substantially different from the structure of the condenser fan blades. For example, the evaporator blades may be taller than the condenser blades, and may be disposed radially-outward of the condenser blades. In some embodiments, the number of condenser blades and evaporator blades may be different.

[0108] The rotary heat exchanger may be located within an enclosure that aids the flow of air through the heat exchanger, as is commonly seen with a centrifugal fan. This cowling (or enclosure) will allow for the separation of the source and sink air streams **185**, **186**, **189** and **190**. This cowling **300**, seen in **Figure 21** may contain air inlet **189** or **185** ports as well as air outlet ports **186** or **190**. The cowling **300** containing the rotary heat exchanger may be supported by a cowling window mount **310** as seen in **Figure 21**, which may include or may be further supported by a window divider **312** to allow secure placement within an opened window **314**. It is possible to locate the heat exchanger and cowling in any opening or passageway that separates the source and sink air streams. Although depicted in a vertical orientation in **Figure 21**, other embodiments include other orientations other than vertical. The cowling and rotary heat exchanger composite units can be rotated 180 degrees around axis of rotation **102** shown in **Figure 1** in order to change the heat exchanger from heating mode to cooling mode and vice versa, by exposing the evaporator side to the other of the source or sink air stream.

[0109] In heating mode, the heat exchanger would be heating an inside space, such as a room in a house. The condenser section **130** would be in air communication with the air inside the house, cycling it through condenser sink inlet **189** and across the condenser fan blades **132** where the airstream would warm. The heated air would be ejected from the heat exchanger along condenser air outlet path **190** and enter the room again through the air cowling **300** seen in **Figure 21**. Still in heating mode, the evaporator side of the system **110** is

in air communication with an outside airstream, such as the outside air. Air transiting the evaporator heat exchanger would be cooled and rejected back to the outside air. By simply rotating the air cowling **300** 180 degrees around axis **102**, the same air streams are diverted across the opposite heat exchanger, thus changing the device from a heater into a cooler.

[0110] In some embodiments, a rotary heat engine may be used in conjunction with a solar collector to concentrate solar energy on the evaporator blades. Other heat sources may also be used to heat the evaporator side of the heat engine. The high pressure working fluid on the evaporator side is forced through the compressor, inducing rotation of the casing and planetary gate rotors relative to the main screw stator as the compressor functions as a turbine. This rotation of the casing induces movement of the rotor of an electric generator relative to the stator, such that the electric generator can generate electric power. This embodiment may or may not include a source air inlet given the thermal input to the system in order to lessen the heat rejection of the source side of the system due to air flow. The air flow across the evaporator side of the system would be stopped if the source inlet was capped, having the advantage of energy savings in not moving an air stream that does not need to be moved.

[0111] **Figure 23A** is a perspective view of a rotary heat exchanger including two centrifugal fans oriented in opposite directions in a configuration specific to the operation of the Organic Rankine Cycle seen in **Figure 19** and **20**. The device operates in a similar manner to the device in **Figure 1A** in that heat exchange takes place between an inner two-phase working fluid and an external heat source and heat sink. In this instance, the heat source entering the evaporator side heat exchanger **260** could be in the form of concentrated sunlight. It is also possible that the evaporator side air inlet **262** would be restricted by reducing the size of, or removing altogether the aperture in the evaporator end plate **261**. This would have the effect of restricting the airflow across the evaporator in order to force heat energy through the evaporator and not waste it into an unneeded air stream. The evaporator side of the system **260** has a greater number of shorter fan blades than the condenser side of the system **280**. The evaporator side of the system **260** also contains its heat exchanger fan blades at a greater radius than the condenser side of the system **280**. The condenser air inlet screen **282** is rigidly attached to and rotates with the condenser heat exchanger side of the

system **280** along with the baseplate **266** and the evaporator side of the system **260**. Air enters the condenser through fluid along fluid path **283** and exits the condenser after passing through the heat exchanger radially as before. There is no air cowling on either side of the system to direct air as this is not necessary. The stator support **270** is stationary with respect to the ground and is linked to the base plate **266** and the condenser air inlet through bearings, allowing them to rotate relative to each other. The generator stator **290** is rigidly attached to the stator support **270**.

[0112] **Figure 23B** is an alternate view of the rotary heat exchanger **Figure 23A**. The ORC generator rotor **292** is rigidly attached to, and rotates along with, the condenser side of the system **280** through a rigid perforated connection with the ORC condenser air inlet **282**. The ORC stator outer magnetic linkage **294** creates a stator force on the inner magnetic stator **164** in the ORC turbine **268** seen in **Figure 24**.

[0113] **Figure 24** is an exploded assembly view of the baseplate and turbine and associated components of the rotary heat exchanger of **Figure 23A**. Unique to the ORC embodiment of this rotary heat exchanger device is the need to create pumping force from the low pressure, condenser side of the system, to the high pressure, evaporator side of the system. This pumping force causes the pressure increase between points 1 and 2 in **Figure 20.** This pumping force is created by disposing a column of liquid along a path which is at least partially radially-aligned and subjecting that column to centrifugal forces along ORC liquid supply fluid path **284** via rotation of the rotary heat exchanger. In some embodiments, the fluid path may be radially aligned along a line which intersects the axis of rotation of the rotary heat exchanger, while in other embodiments, the fluid path may be along a line which does not interest the axis of rotation of the rotary heat exchanger, such that a projection of the fluid path is radially aligned.

[0114] Liquid working fluid will pass through a plurality of orifices **267** in plate **266b** in order to pass from the low pressure condenser side of the system to the high pressure evaporator side of the system. Orifices **267** may include a diaphragm style check valve to limit the flow of fluid opposite the direction of fluid path **284**, which may be especially necessary during system start-up when heat exchanger rotation may not be sufficient enough to produce the centrifugal force on fluid column along path **284** to overcome evaporator

pressure. Alternately, liquid pumping from the condenser to the evaporator could be accomplished through a pump that is either hub mounted to the rotating heat exchanger or is standalone, outside of the heat exchanger system with liquid exiting and entering the spinning device through a rotating union. A hub mounted liquid pump of this type would take advantage of the relative motion between the stator shaft and the rotating casing as described previously and similar to the operation of the compressor.

[0115] **Figure 25A** is a perspective exploded assembly view of the evaporator fan blade of **Figure 23A**. This fan heat exchanger blade is similar in construction to the fan blade in **Figure 13**, but differs in the placement of the ORC inlet liquid supply fluid path **284a**. The pressurized liquid will continue along the ORC Evaporator liquid and vapor fluid path **285**.

[0116] **Figure 25B** is a perspective cross-sectional view of a hollow evaporator-side fan blade heat exchanger of **Figure 23A**.

[0117] In other embodiments, the fluid circuit may be a structure distinct from the fan blades or other air moving structure. In addition, separate thermal exchange components may be provided in order to enhance heat transfer to or from portions of the fluid circuit. In some embodiments, the thermal exchange components may take the form of one or more heat exchange fins or similar structures.

[0118] In some embodiments, these heat exchange components may be configured to be low-profile or low-drag components. In some embodiments, these heat exchange fins may be oriented generally normal to the axis of rotation of the centrifugal fans, in order to minimize the drag of the heat exchange fins or other components as the centrifugal fan rotates, increasing airflow over the surfaces of the heat exchange fins. In some other embodiments, the heat exchange fins may be canted at an angle to a plane normal to the axis of rotation of the centrifugal fans.

[0119] **Figure 26A** is a top perspective view of an alternative embodiment of a rotary heat exchanger in which the working fluid is routed through a heat exchange structure combined with centrifugal fan blades **420**. Air is induced through source inlet **185** and over evaporator heat exchange fins **430** and along evaporator air outlet path **186** through rotation of the combined device around axis of rotation **102**. The evaporator tubes **412** are hollow

and contain a two-phase working fluid as before, and are in fluid communication with condenser tubes and a hub-mounted compressor as before (not shown in **Figure 26A**).

[0120] In the illustrated embodiment, the thermal transfer components or heat exchange components are a series of generally planar ring-shaped fin structures, each fin structure in contact with multiple tubes of the working fluid circuit. The fin structures **430** are discrete structures separated from each other. In other embodiments, however, the thermal transfer components may include a spiral fin. In such an embodiment, the individual fin sections in contact with a given tube may be different levels of a ramp-like fin structure that winds past the tubes of the working fluid circuit multiple times. The fins or other heat exchange components need not be thin layers of solid material as shown, but may instead be hollow, and may form part of the working fluid circuit.

[0121] **Figure 26B** is a top plan view of the rotary heat exchanger of **Figure 26A** including two additional radial positions of possible outer diameter centrifugal fan blade **420** placement with medial diameter **421** and inner diameter **422** centrifugal fan blades as alternate possible placement positions. Although only one fan blade placement region may be necessary to induce adequate air flow over the heat exchanger, fan blades deposited over multiple radial regions are possible and would have similar effect. The fan blades depicted could be forward-curved or backwards-curved as drawn depending on direction of rotation. Forward and or backwards curved fan blades could be used separately or together to induct centrifugal air flow. The fan blades may not be contiguous structures extending the height of the condenser or evaporator, but may instead be a plurality of individual structures arranged in any suitable fashion to induce the desired airflow.

[0122] **Figure 26C** is a side view of the rotary heat exchanger of **Figure 26A**. **Figure 26D** is a perspective cross-section view of the rotary heat exchanger of **Figure 26B**, taken along the line **B–B** of **Figure 26B**. **Figure 26E** is a detail perspective cross-section view of section **E** of **Figure 26D**. Evaporator **110** and condenser **130** sections are mounted back-to-back as before, and are rigidly mounted together combining a centrifugal fan **420**, evaporator tubes **412** and condenser tubes **452** which are joined in fluid connection by evaporator pipes **414** and condenser pipes **454**. In the illustrated embodiment, the evaporator tubes **412** and condenser tubes **452** extend generally parallel to the axis of rotation of the

rotary heat exchanger, and the evaporator pipes **414** and condenser pipes **454** extend between evaporator tubes **412** and condenser tubes **452** respectively, with the evaporator pipes **414** generally in a plane normal to the axis of rotation of the rotary heat exchanger and the condenser pipes **454** similarly within a plane normal to the axis of rotation of the rotary heat exchanger.

[0123] **Figure 27A** is a perspective view of the working fluid routing system of the rotary heat exchanger of **Figure 26A**. Evaporator pipe **414** allows for gas to return from the evaporator tubes **412** to the central compressor **150** along evaporator path **416**. Compressed gas leaves the compressor **150** via condenser pipes **454** into condenser tubes **452**. The flow of working fluid through the evaporator and condenser is similar to the flow of working fluid through other embodiments described above, except that the working fluid is not routed through hollow fan blades in the working fluid routing system of **Figure 27A**.

[0124] **Figure 27B** is a radial section view of the working fluid routing system of **Figure 27A**. Evaporator cap **413** divides the evaporator and condenser sections. This cap **413** could include a thermal barrier to insulate the two sections. Thus, an evaporator pipe **414** and a condenser pipe **454** may form part of a single structure extending in a direction parallel to the axis of rotation of the rotary heat exchanger. The thermostatic expansion valve (TXV) **417** joins the condenser and the evaporator in fluid communication. **Figure 27C** is a top plan of the working fluid routing system of **Figure 27A**, illustrating working fluid flow throughout the system and compressor.

[0125] **Figure 28A** is a cross-sectional view of a working fluid routing system such as the working fluid routing system of **Figure 27A**, taken along the radial line **B–B** of **Figure 27C**, illustrating a mechanism for placing the condenser section of the working fluid routing system in fluid communication with the evaporator section of the working fluid routing system.

[0126] **Figure 28B** is a cross-sectional detail view of the working fluid routing system of **Figure 28A**, illustrating the working fluid passage between the condenser section and the evaporator section. Vapor will enter condenser tube **413** via condenser fluid path **413**. Heat will be conducted out of the tube and into the heat exchange fins **413**. The loss of thermal energy will cause the vapor to condense to a liquid and be pulled outward radially

and form liquid reservoir **413**. Due to the pressure differential separated by evaporator cap **413**, liquid will travel along liquid flow path **413** into the TXV **417** and be forced through TXV orifice where it will the enter into the evaporator section. The TXV **417** passes through TXV port **466** into the evaporator tube **412**.

[0127] **Figure 28C** is a detailed cross-sectional view of the working fluid routing system of **Figure 28A**, illustrating the evaporator side of a fluid passage between the condenser section and the evaporator section. Working fluid entering evaporator tubes **412** will boil and exit the tube via evaporator fluid path **416**.

[0128] **Figure 29** is an exploded perspective assembly view of various components of the working fluid routing system of **Figure 27A**. Evaporator tubes **412** are necked to allow for mating of condenser tube **454**. Evaporator tube **412** has evaporator holes **415** to allow for mating of evaporator pipe **414**. Similarly, condenser tube **454** contains evaporator tube hole **455** to allow for mating of condenser pipes **454**. TXV **417** passes through TXV port **466** in evaporator cap **413** to allow for liquid fluid flow into the evaporator.

[0129] **Figure 30A** is a perspective view of the a fan and support assembly configured to incorporate a working fluid routing system, such as the working fluid routing system of **Figure 27A**. A multitude of fan blades mounted to the baseplate **180** combine to form a dual-sided centrifugal fan flowing at the same time air along evaporator air out fluid path **186** and condenser air out fluid path **190**. The baseplate contains base plate holes **432** to allow for the passage of the heat exchanger tubes **412** and **454**. The baseplate is rigidly mounted to the compressor **150**, and rotates as a single unit.

[0130] **Figure 30B** is a perspective view of a fan and support assembly configured to incorporate a working fluid routing system, such as the working fluid routing system of **Figure 27A**. A multitude of fan blades **422** combine to form a centrifugal fan whose fan blades are located radially closer the axis of rotation than the working fluid routing system that will mount in baseplate hole **432**.

[0131] **Figure 31** is a top plan view of a heat exchange fin. **Figure 32** is a detail of the heat exchange plate in **Figure 31** where a plurality of fluid carrying pipes would pass through a fin heat exchanger hole **431** in a multitude of heat exchange plates. Hole **431** may

be shallow drawn or otherwise formed to increase contact area with heat exchanger tube **412** and **454**. A centrifugal fan blade may be added to or formed into the heat exchange fin **430**. This would induce airflow without an a separate fan blade. A varying multitude of shapes may be formed into heat exchange fins **430** in order to induce airflow radially and optimize heat exchange. The generation of centrifugal fan blades in this manner may have the added benefit of turning the centrifugal fan blades into a heat exchange surface. Air deflector surface **467** extending around the outer periphery could be used to deflect air flow path **186** axially if desired. In other embodiments, a cowling or other structure located radially outward of the centrifugal fan blades can be used to deflect air flow path **186** axially, in place of or in addition to the curved air deflector surface **467.**

[0132] **Figure 33** is a is a top perspective view of an alternative embodiment of a rotary heat exchanger in which the working fluid is routed through a structure containing inlet and outlet axial fan blades. Inlet axial fan **460** could be used to induce air over the rotating heat exchange fins **430**. These could be in addition to, or instead of centrifugal fan blades. The axial inlet fan would be rigidly mounted to the rotating heat exchanger, thus inducing airflow radially.

[0133] **Figure 33A** is a side cross-section view of the rotary heat exchanger of **Figure 33**, taken along the line **B–B** of **Figure 33**. Multiple axial fans **460** could be rigidly mounted to the inlet to increase air flow. In addition to, or separate from other axial or centrifugal fan blades, an outlet axial fan **461** could be used to induce airflow over the rotating heat exchanger. These axial fans would induce airflow along axial fan air fluid path **465,** seen in **Figure 33B**.

[0134] **Figure 33B** is a side cross-section detail view of the rotary heat exchanger of **Figure 33**, taken along the line **B–B** of **Figure 33**. The outlet axial fan **461** could also include a multitude of stages oriented axially to increase the airflow. The fan blades and/or outlet axial fan stages and stator stages could differ in size, shape, orientation, and other attributes. Outlet stator vanes **462** would be rigidly mounted to the stationary and mechanically grounded casing to improve airflow, but are not necessary.

[0135] **Figure 34** is a top perspective view of an alternate embodiment of a rotary heat exchanger in which the individual heat exchange fins are attached to each fluid conduit

individually. Rather than providing heat exchange fins or other thermal transfer components which are in contact with multiple exchanger or condenser tubes, each tube may have a series of thermal transfer components such as the heat exchange fins depicted in **Figure 34**, which need not be in contact with adjacent heat exchange fins attached to adjacent tubes.

[0136] The heat exchangers and similar devices described herein can be used in conjunction with a wide variety of additional components for a wide variety of applications. Various design modifications of the types discussed herein can be made to improve the performance of the devices for specific applications. The size, shape, orientation and number of the various components may be varied to improve performance in different applications. As discussed above, while the above implementations discuss rotary heat exchangers, some or all of the components discussed above in the various implementations may be rotationally fixed relative to the other components of the heat exchanger or similar device.

[0137] In addition, features of various embodiments discussed separately herein may nevertheless be combined in any suitable fashion. By way of example, the fins or other heat transfer structures discussed with respect to some embodiments may be used in conjunction with the hollow fan blades of other embodiments which form part of the fluid circuit. In such an embodiment, the finned blades or blades with other thermal exchange structures may be used to enhance heat transfer to and from the blades and the working fluid flowing through them. A wide variety of other combinations of features may also be used in other embodiments.

[0138] As used herein, a phrase referring to "at least one of" a list of items refers to any combination of those items, including single members. As an example, "at least one of: a, b, or c" is intended to cover: a, b, c, a-b, a-c, b-c, and a-b-c.

[0139] Various modifications to the implementations described in this disclosure may be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other implementations without departing from the spirit or scope of this disclosure. Thus, the claims are not intended to be limited to the implementations shown herein, but are to be accorded the widest scope consistent with this disclosure, the principles and the novel features disclosed herein. Additionally, a person having ordinary skill in the art will readily appreciate, the terms "upper" and "lower" are sometimes used for ease of

describing the figures, and indicate relative positions corresponding to the orientation of the figure on a properly oriented page, and may not reflect the orientation of a heat exchanger as implemented.

[0140] Certain features that are described in this specification in the context of separate implementations also can be implemented in combination in a single implementation. Conversely, various features that are described in the context of a single implementation also can be implemented in multiple implementations separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a subcombination or variation of a subcombination.

[0141] Similarly, while operations are depicted in the drawings in a particular order, a person having ordinary skill in the art will readily recognize that such operations need not be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. Further, the drawings may schematically depict one more example processes in the form of a flow diagram. However, other operations that are not depicted can be incorporated in the example processes that are schematically illustrated. For example, one or more additional operations can be performed before, after, simultaneously, or between any of the illustrated operations. In some cases, the actions recited in the claims can be performed in a different order and still achieve desirable results.

WHAT IS CLAIMED IS:

1. A heat exchanger, comprising:

a first rotary heat exchanger;

a second rotary heat exchanger configured to rotate in the same direction as the first rotary heat exchanger; and

a fluid circuit extending through at least a portion of the first rotary heat exchanger and at least a portion of the second rotary heat exchanger and configured to permit passage of a working fluid between the first and second rotary heat exchangers.

2. The heat exchanger of Claim 1, wherein the first rotary heat exchanger comprises a first centrifugal fan and the second rotary heat exchanger comprises a second centrifugal fan axially aligned with the first centrifugal fan and oriented in the opposite direction as the first centrifugal fan.

3. The heat exchanger of Claim 2, wherein the first and second centrifugal fans comprise a plurality of fan blades.

4. The heat exchanger of Claim 3, wherein:

the first heat exchanger comprises a first plurality of thermal transfer components in thermal communication with the fluid circuit; and

the second heat exchanger comprises a plurality of thermal transfer components in thermal communication with the fluid circuit.

5. The heat exchanger of Claim 4, wherein the first plurality of thermal transfer components comprise generally planar structures oriented parallel to one another, and the second plurality of thermal transfer components comprise generally planar structures oriented parallel to one another.

6. The heat exchanger of Claim 5, wherein the plurality of fan blade of the first centrifugal fans extend generally orthogonal to the planes of the first plurality of thermal transfer components, and wherein the plurality of fan blades of the second centrifugal fan extend generally orthogonal to the planes of the second plurality of thermal transfer components.

7. The heat exchanger of Claim 3, wherein the first and second pluralities of thermal transfer components comprise evaporator fins oriented generally normal to an axis of rotation of the heat exchanger.

8. The heat exchanger of Claim 4, wherein the fluid circuit comprises a plurality of tubes extending through one of the first and second plurality of evaporator fins.

9. The heat exchanger of Claim 8, wherein the plurality of tubes comprise sections which extend generally parallel to an axis of rotation of the heat exchanger, wherein the sections which extend generally parallel to an axis of rotation of the heat exchanger extend through one of the first and second plurality of evaporator fins.

10. The heat exchanger of Claim 3, each of the plurality of fan blades including a fan blade cavity, an inlet in fluid communication with the fan blade cavity, and an outlet in fluid communication with the cavity, wherein the fluid circuit includes fan blade cavities.

11. The heat exchanger of Claim 10, wherein the plurality of fan blades are configured to induce a state change in a working fluid during operation of the heat exchanger, such that at least a portion of a working fluid entering the cavity through the inlet of a fan blade in a first state will exit the outlet of the fan blade in a second state.

12. The heat exchanger of Claim 10, additionally comprising a fluid distribution baseplate disposed between the first centrifugal fan and the second centrifugal fan, the fluid distribution baseplate comprising:

a first plurality of distribution channels, each of the first plurality of distribution channels in fluid communication with the inlet of at least one of the fan blades of the first centrifugal fan; and

a second plurality of distribution channels, each of the second plurality of fluid distribution channels in fluid communication with the outlet of at least one the fan blades of the first centrifugal fan, wherein the fluid circuit includes the first and second pluralities of distribution channels.

13. The heat exchanger of any of Claims 2 to 12, additionally comprising a compressor disposed along the fluid circuit and configured to rotate along with the first centrifugal fan and the second centrifugal fan.

14. The heat exchanger of Claim 13, wherein the compressor is a single-screw compressor.

15. The heat exchanger of any of Claims 1 to 14, wherein the first rotary heat exchanger and the second rotary heat exchanger are configured to rotate at the same speed.

16. A rotary heat exchanger, comprising:

a fluid distribution baseplate comprising:

a first baseplate surface;

a second baseplate surface opposite the first baseplate surface;

a plurality of fluid distribution channels disposed within the fluid distribution baseplate; and

a central baseplate aperture;

a first plurality of centrifugal fan blades secured relative to the first baseplate surface, each of the first plurality of centrifugal fan blades including at least one fluid conduit extending into the centrifugal fan blade from the side of the centrifugal fan blade adjacent the first baseplate surface;

a second plurality of centrifugal fan blades secured relative to the second baseplate surface, each of the second plurality of centrifugal fan blades including at least one fluid conduit extending into the centrifugal fan blade from the side of the centrifugal fan blade adjacent the second baseplate surface; and

a compressor extending through the central baseplate aperture and configured to rotate along with the fluid distribution baseplate, the compressor disposed along a fluid circuit passing through the compressor, at least one of the first plurality of centrifugal fan blades, and at least one of the second plurality of centrifugal fan blades.

17. The heat exchanger of Claim 16, wherein each of the first plurality of centrifugal fan blades includes:

a fan blade inlet aperture in fluid communication with the at least one fluid conduit and a baseplate inlet aperture extending through the first baseplate surface; and

a fan blade outlet aperture in fluid communication with the at least one fluid conduit and a baseplate outlet aperture extending through the first baseplate surface, the fan blade outlet aperture located radially outward of the fan blade inlet aperture.

18. The heat exchanger of Claim 17, wherein the at least one fluid conduit extending into the centrifugal fan blade comprises a plurality of cylindrical passages separated by support struts, the support struts including a plurality of apertures extending therethrough to place adjacent cylindrical passages of the plurality of cylindrical passages in fluid communication with one another.

19. The heat exchanger of any of Claims 16 to 18, wherein the fan blades have a substantially elliptical cross-sectional shape.

20. The heat exchanger of any of Claims 16 to 19, wherein the first plurality of fan blades are configured to function as an evaporator, and wherein the second plurality of fan blades are configured to function as a condenser.

21. A rotary heat exchanger apparatus, comprising:

a first heat exchanger disposed on the a first side of a baseplate;

a second heat exchanger disposed on a second side of the baseplate and configured to rotate with the first heat exchanger;

a sealed fluid circuit extending through portions of the baseplate and the first and second heat exchangers, the sealed fluid circuit having a working fluid disposed within.

22. The apparatus of Claim 21, additionally comprising:

a compressor, wherein the compressor is disposed along the sealed fluid circuit; and

a motor configured to drive the compressor, wherein the first heat exchanger is configured to operate as an evaporator, and wherein the second heat exchanger is configured to operate as a condenser.

23. The apparatus of Claim 22, wherein the heat exchanger apparatus is configured to transfer heat energy using a Reverse Carnot cycle.

24. The apparatus of Claim 22 or 23, wherein the motor is an AC motor.

25. The apparatus of Claim 21, additionally comprising:

a turbine, wherein the turbine is disposed along the sealed fluid circuit; and

a DC generator configured to be driven by the turbine to generate power, wherein the first heat exchanger is configured to operate as a condenser, and wherein the second heat exchanger is configured to operate as an evaporator.

26. The apparatus of Claim 25, wherein portions of the second heat exchanger are disposed radially outward of corresponding portions of the first heat exchanger.

27. The apparatus of Claim 25 or 26, wherein the turbine comprises a single-screw turbine.

28. The apparatus of any of Claims 25 to 27, wherein the heat exchanger is configured to generate power via an Organic Rankine cycle.

29. A heat exchanger, comprising:

a first rotary heat exchanger;

a second rotary heat exchanger configured to rotate in the same direction as the first rotary heat exchanger;

a fluid circuit extending through at least a portion of the first rotary heat exchanger and at least a portion of the second rotary heat exchanger and configured to permit passage of a working fluid between the first and second rotary heat exchangers; and

a support member supporting the first and second rotary heat exchangers and configured to separate a first airstream from a second airstream, the support member exposing the first rotary heat exchanger to a first airstream and exposing the second rotary heat exchanger to a second airstream.

30. The heat exchanger of Claim 29, wherein the support member comprises a cowling which can be moved to selectively expose the first rotary heat exchanger to one of the first or second airstream.

31. The heat exchanger of Claim 30, wherein the cowling can be moved between a first position in which the first rotary heat exchanger is exposed to the first airstream and the second rotary heat exchanger is exposed to the second airstream, and a second position in which the first rotary heat exchanger is exposed to the second airstream and the second rotary heat exchanger is exposed to the first airstream.

32. The heat exchanger of any of Claims 29 to 31, wherein the support member is configured to be installed in a window.

33. A power generator configured to generate power using an Organic Rankine cycle, the power generator comprising:

a rotary compressor comprising a first plurality of centrifugal fan blades;

a rotary evaporator comprising a second plurality of centrifugal fan blades and configured to rotate in the same direction as the rotary compressor;

a working fluid circuit extending through at least a portion of the rotary compressor and at least a portion of the rotary evaporator; and

a turbine in fluid communication with the working fluid circuit, at least a portion of the turbine configured to rotate along with the rotary compressor and the rotary evaporator.

34. The power generator of Claim 33, wherein the first plurality of centrifugal fan blades includes fewer centrifugal fan blades than the second plurality of centrifugal fan blades.

35. The power generator of Claim 33 or 34, wherein the first plurality of centrifugal fan blades are smaller than the second plurality of centrifugal fan blades.

36. The power generator of any of Claims 33 to 35, wherein the rotary compressor is axially aligned with the rotary evaporator, and portions of the rotary compressor are located radially inward of corresponding portions of the rotary evaporator.

37. A solar power generation system, comprising:

a rotary heat exchanger, comprising:

a rotary compressor comprising a first plurality of centrifugal fan blades;

a rotary evaporator comprising a second plurality of centrifugal fan blades and configured to rotate in the same direction as the rotary compressor; and

a working fluid circuit extending through at least a portion of the rotary compressor and at least a portion of the rotary heat exchanger; and

a turbine in fluid communication with the working fluid circuit; and

a solar collector configured to concentrate sunlight on the rotary heat exchanger.

38. An atmospheric condensation device, comprising:

a first rotary heat exchanger including a first plurality of centrifugal fan blades, the first plurality of centrifugal fan blades including a hydrophobic coating;

a second rotary heat exchanger including a second plurality of centrifugal fan blades and configured to rotate in the same direction as the first rotary heat exchanger; and

a fluid circuit extending through at least a portion of the first rotary heat exchanger and at least a portion of the second rotary heat exchanger and configured to permit passage of a working fluid between the first and second rotary heat exchangers.

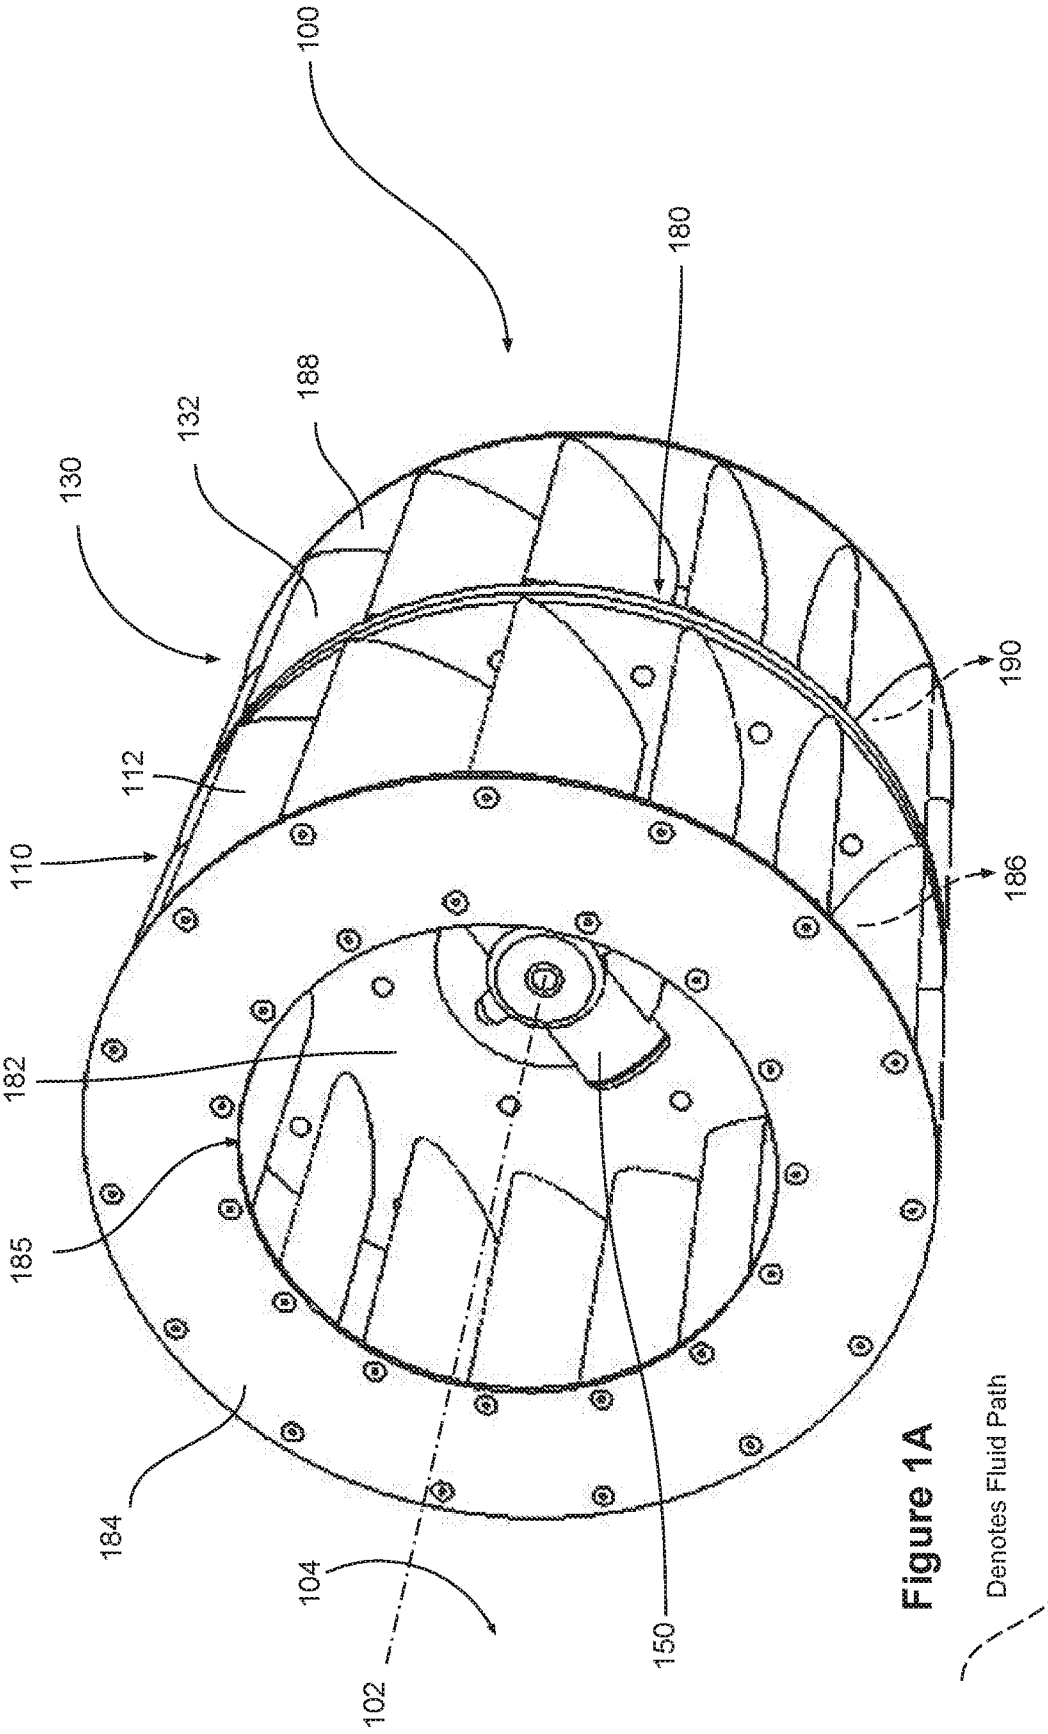

100
180
188
132
130
190
112
110
186
182
185
184
104
102
150
Denotes Fluid Path

Figure 1A

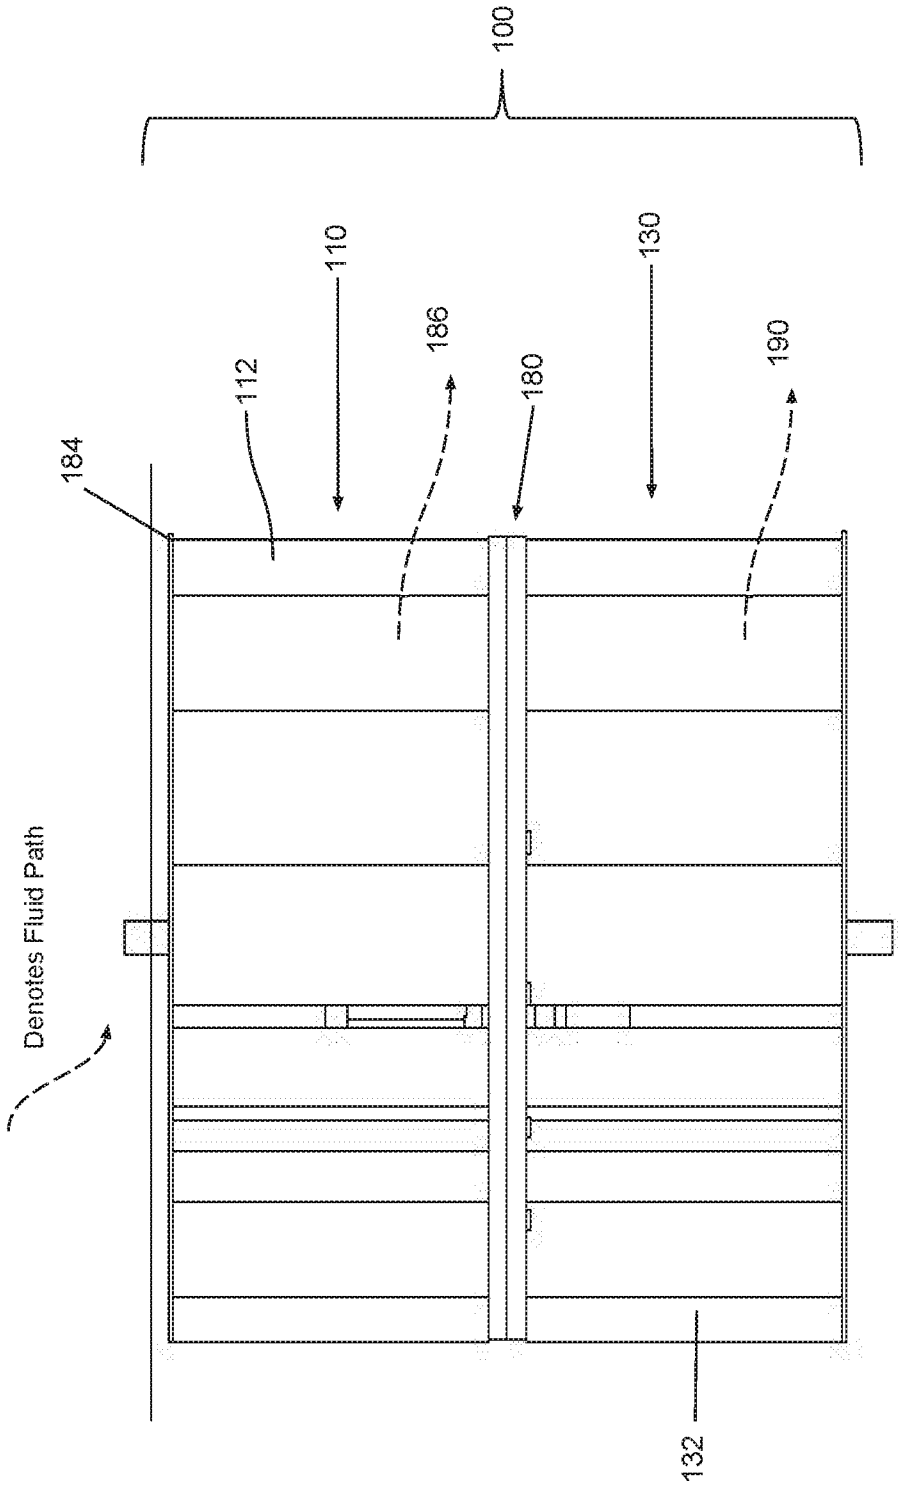


Figure 1B

Figure 2

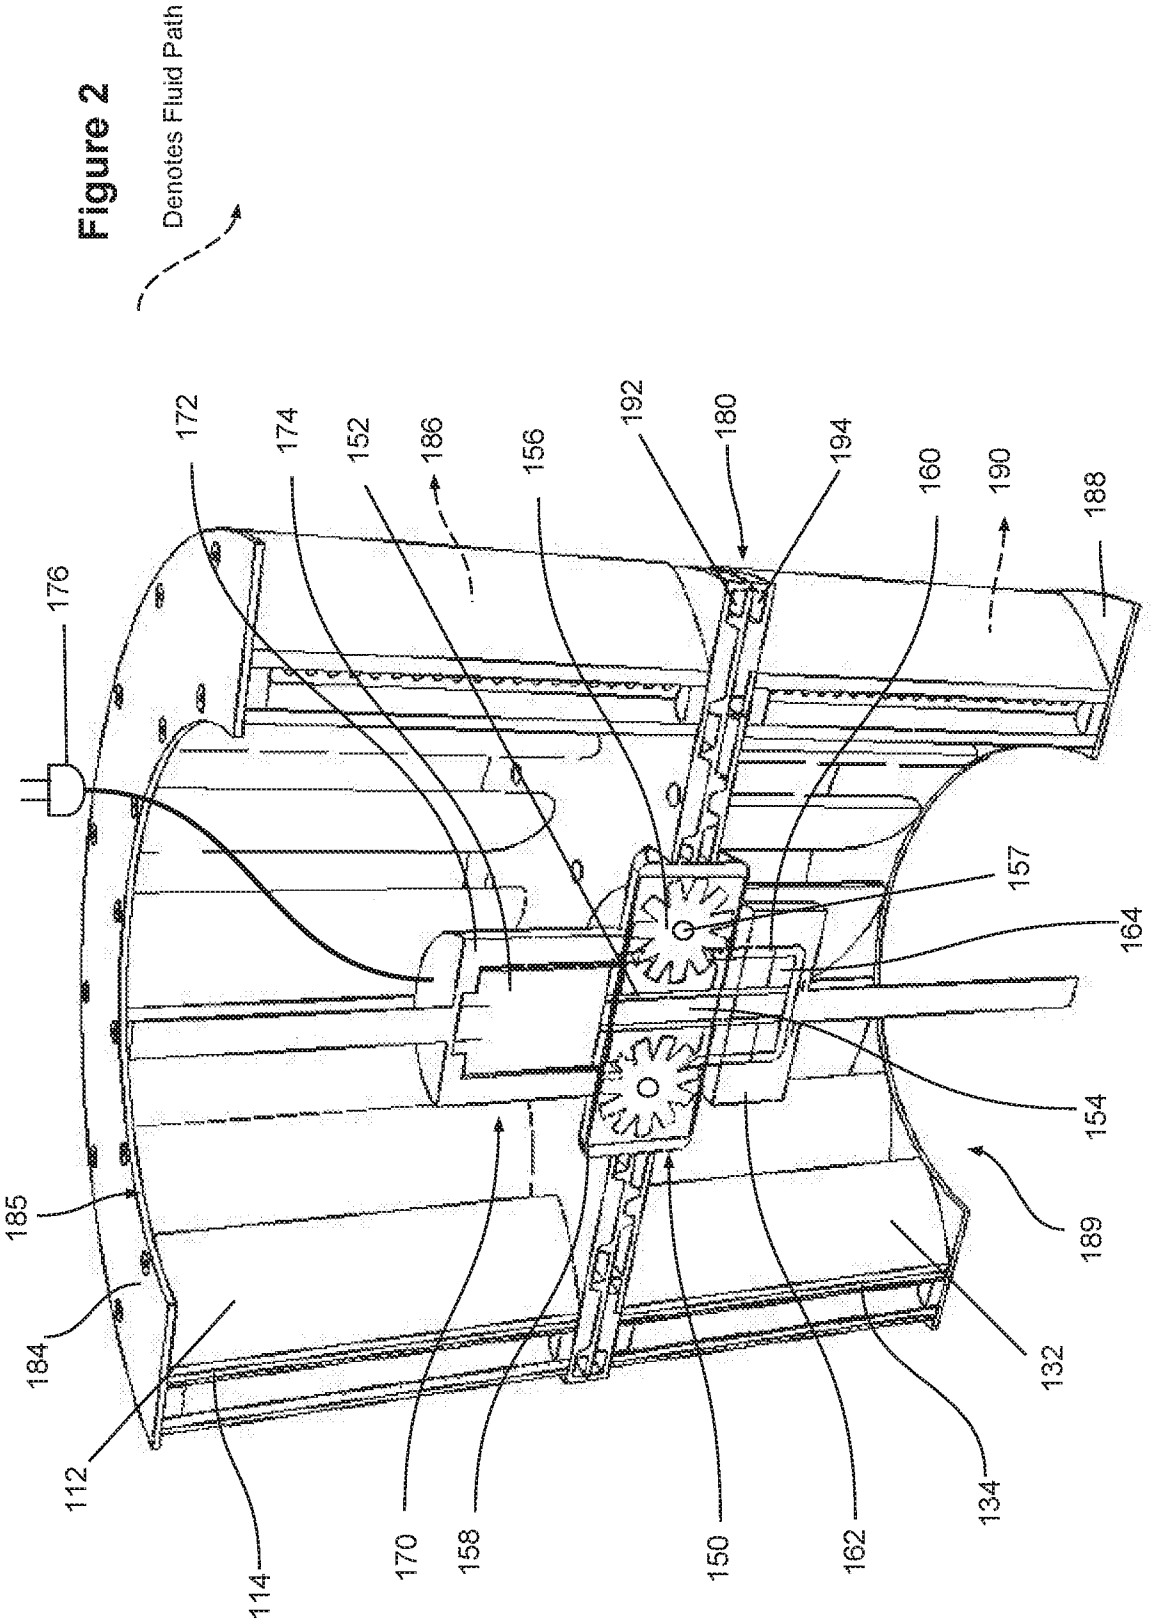
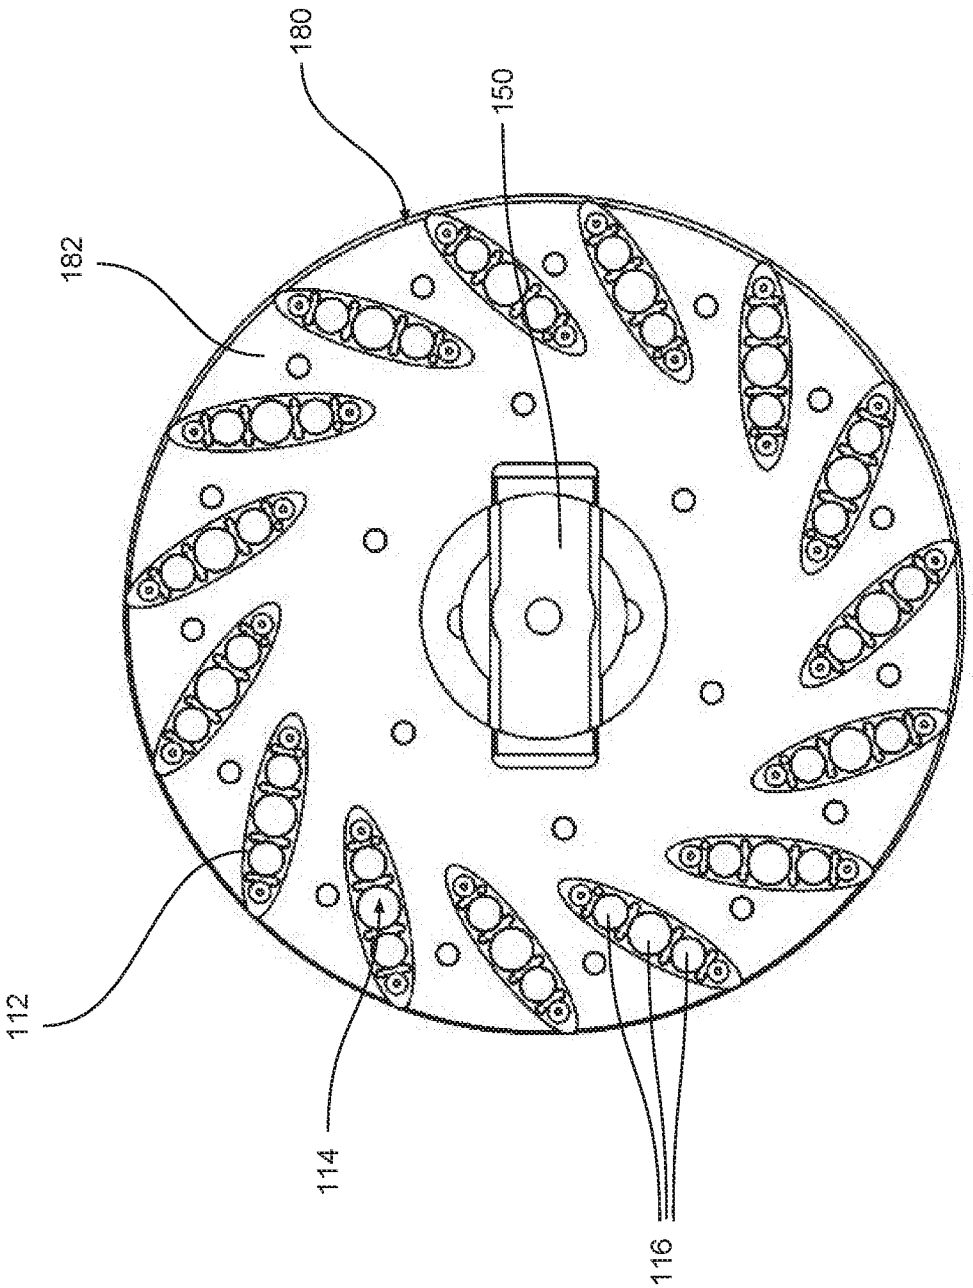

Denotes Fluid Path
172
174
152
186
156
192
180
194
160
190
188
176
157
164
154
185
189
184
132
112
134
114
170
158
150
162

Figure 3



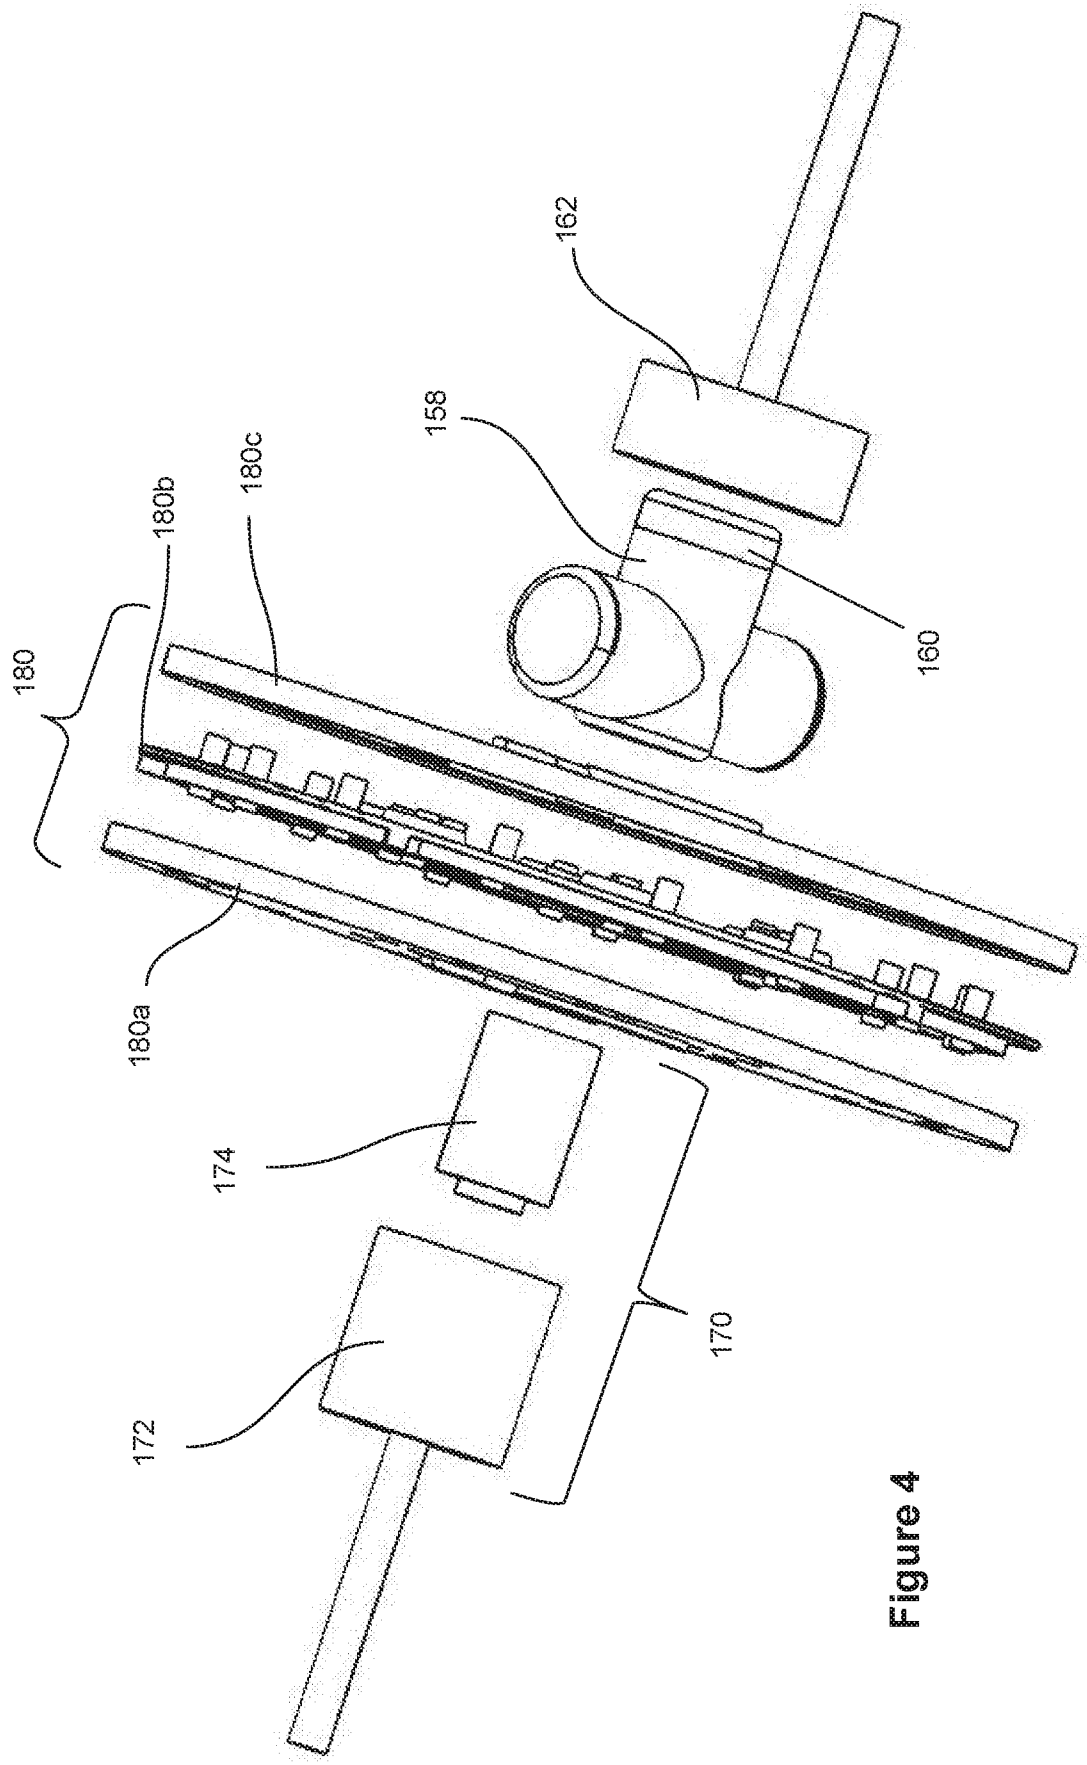


Figure 4

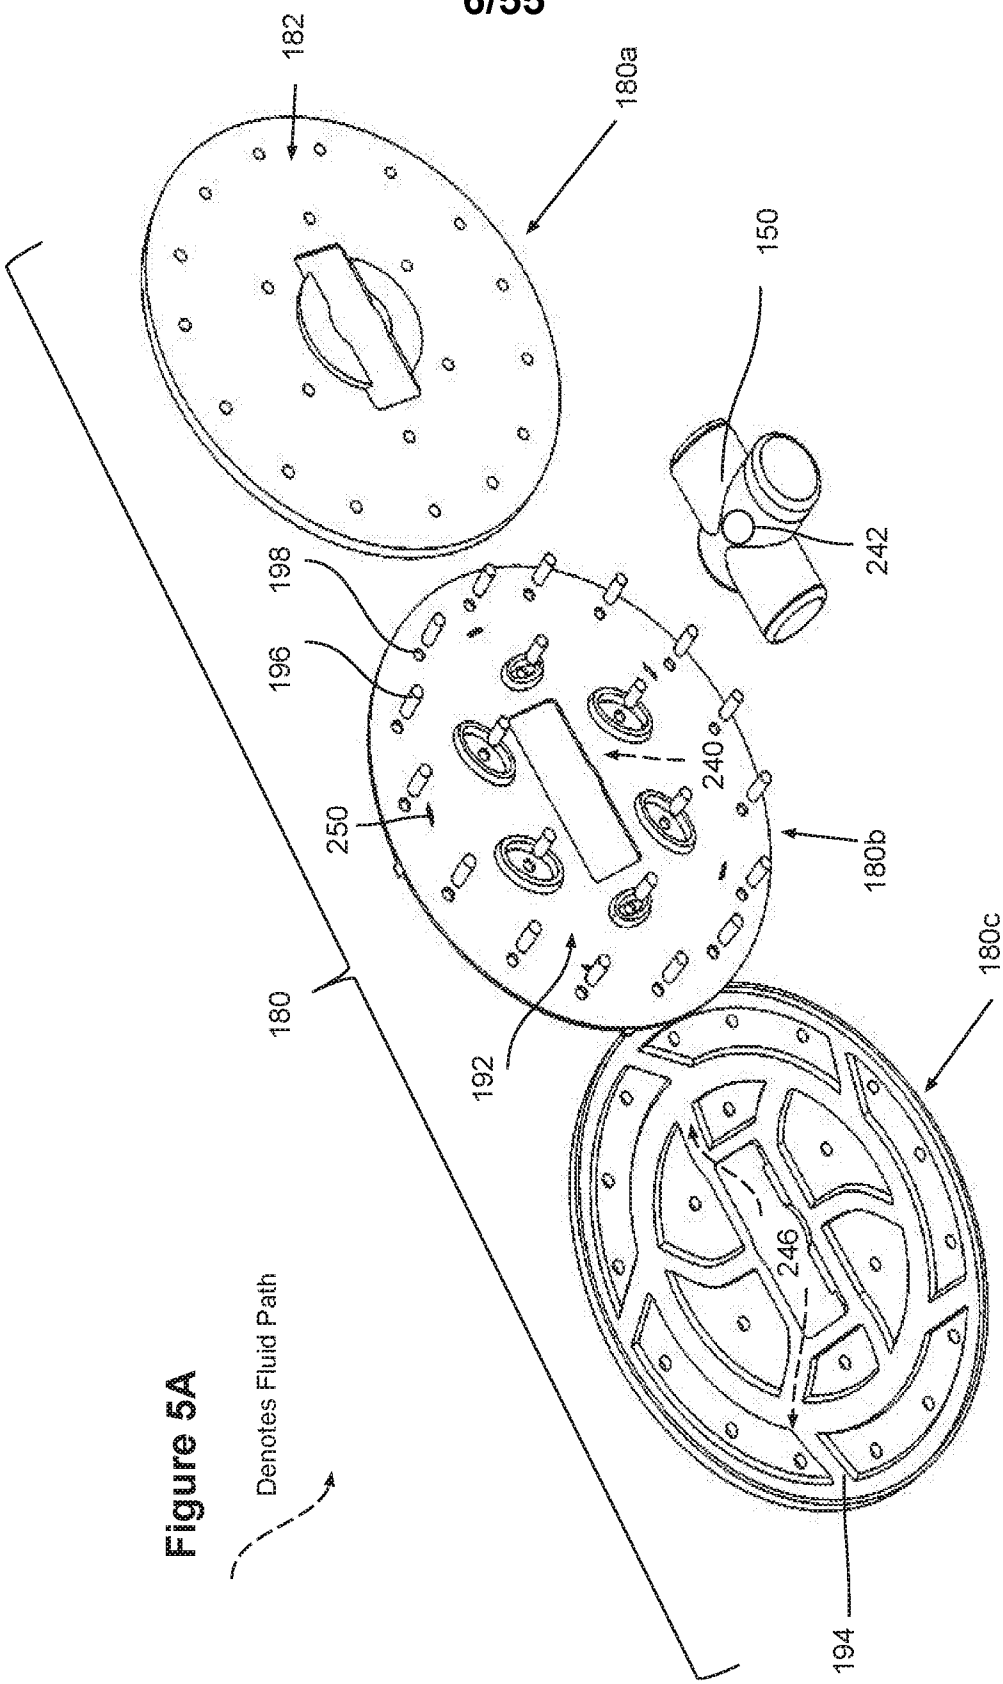

182
180a
150
242
198
196
240
250
180b
180
192
180c
246
194
Denotes Fluid Path

Figure 5A

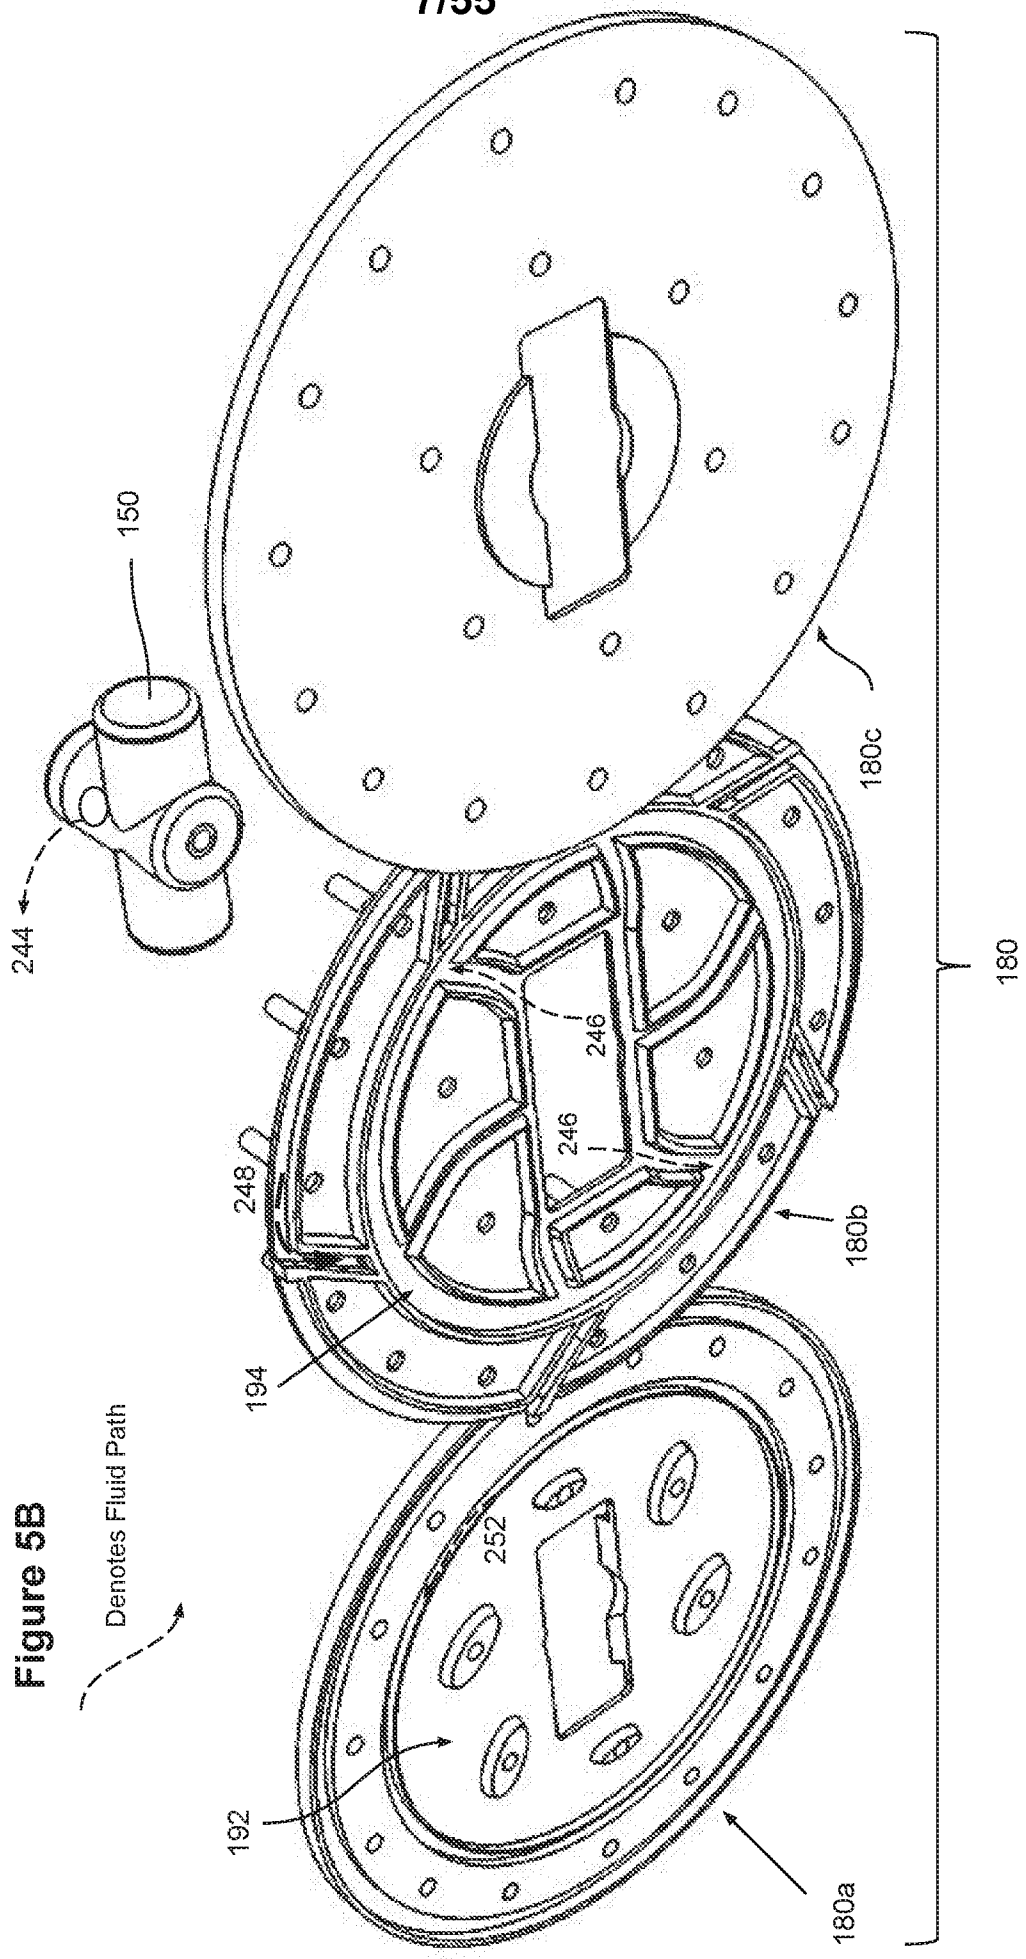

150
244
180c
180
246
246
248
180b
194
252
192
180a
Denotes Fluid Path

Figure 5B

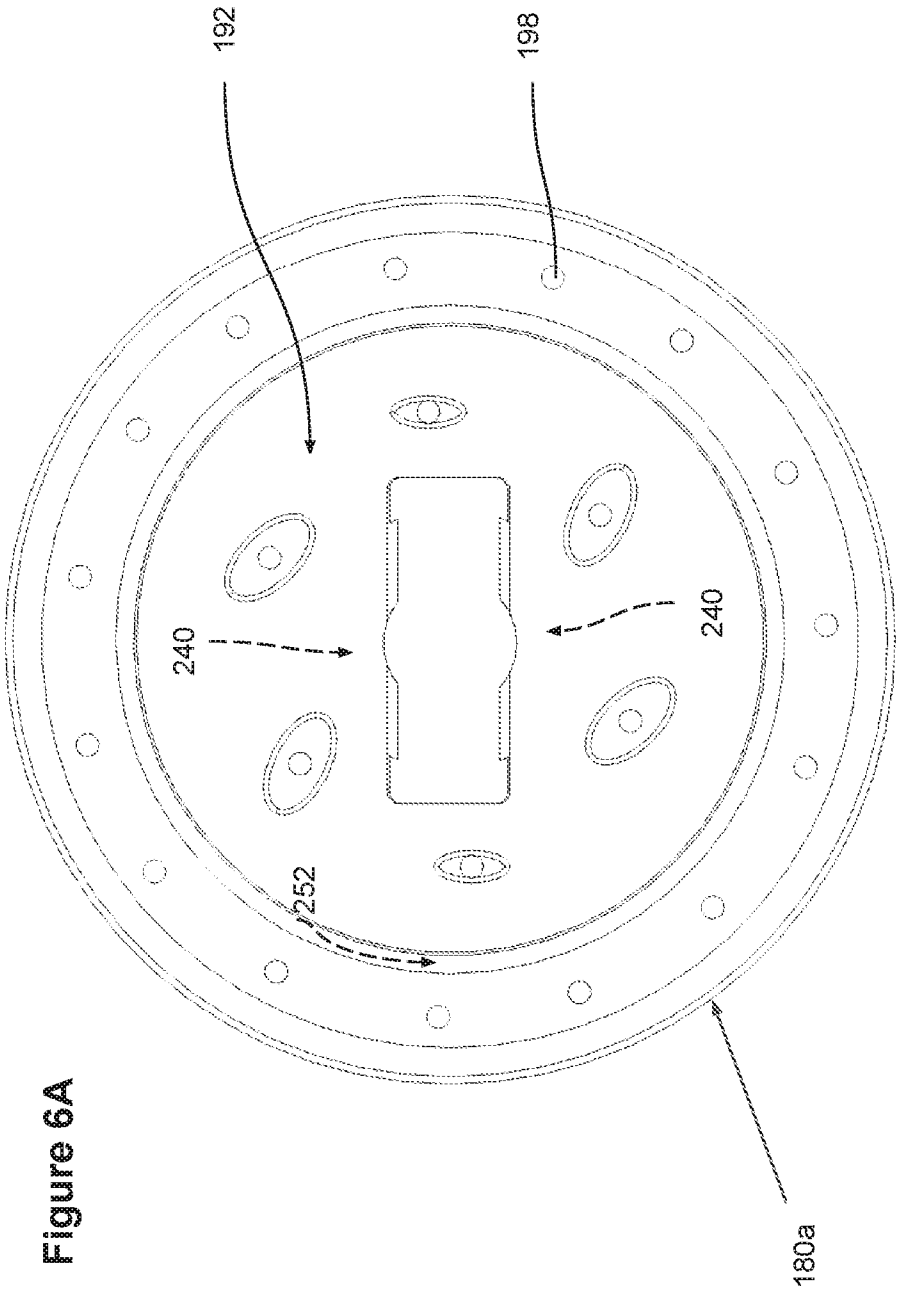


Figure 6A

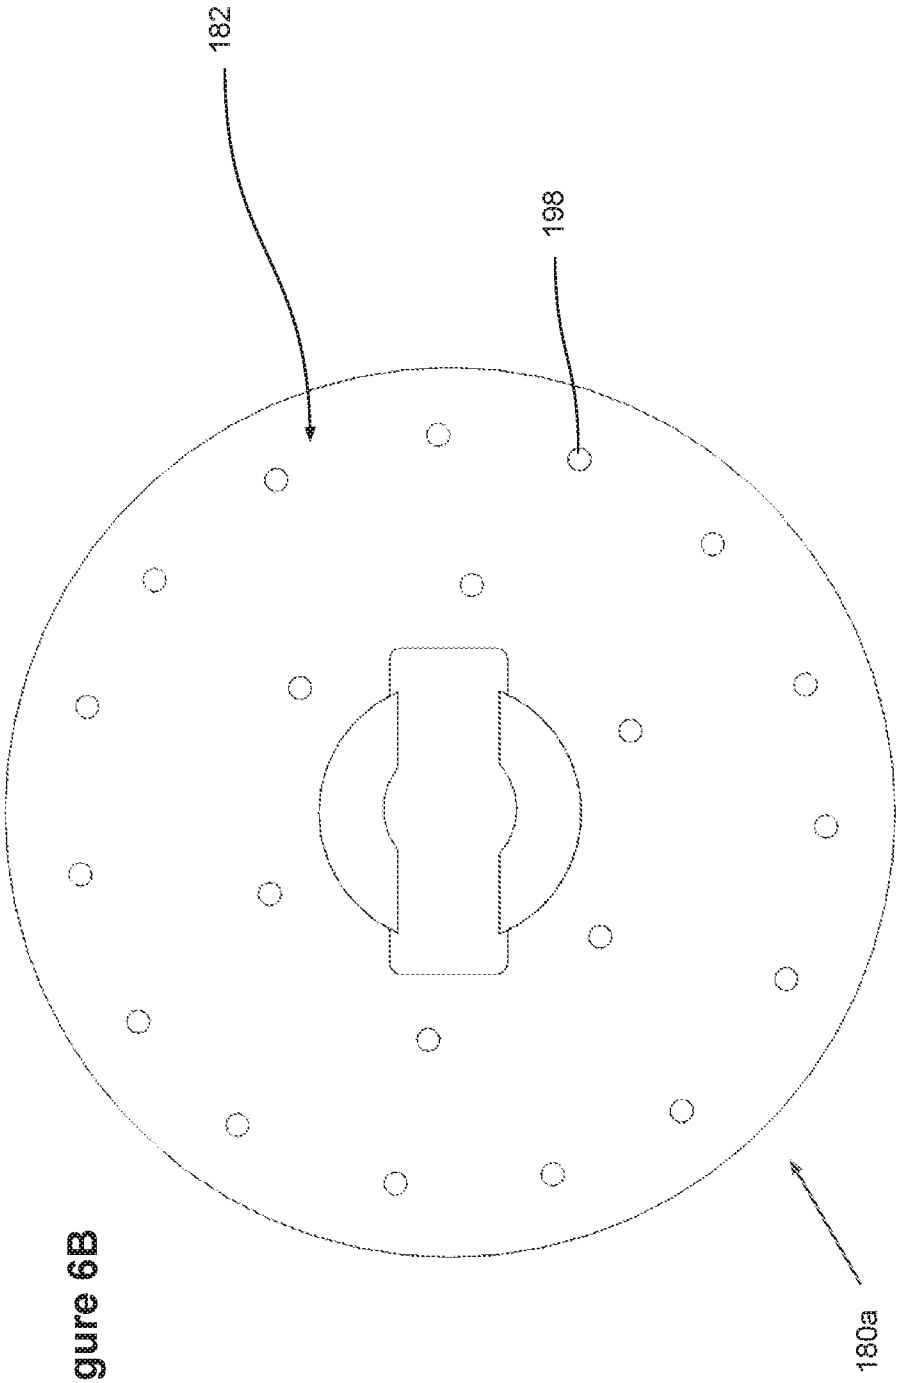


Figure 6B

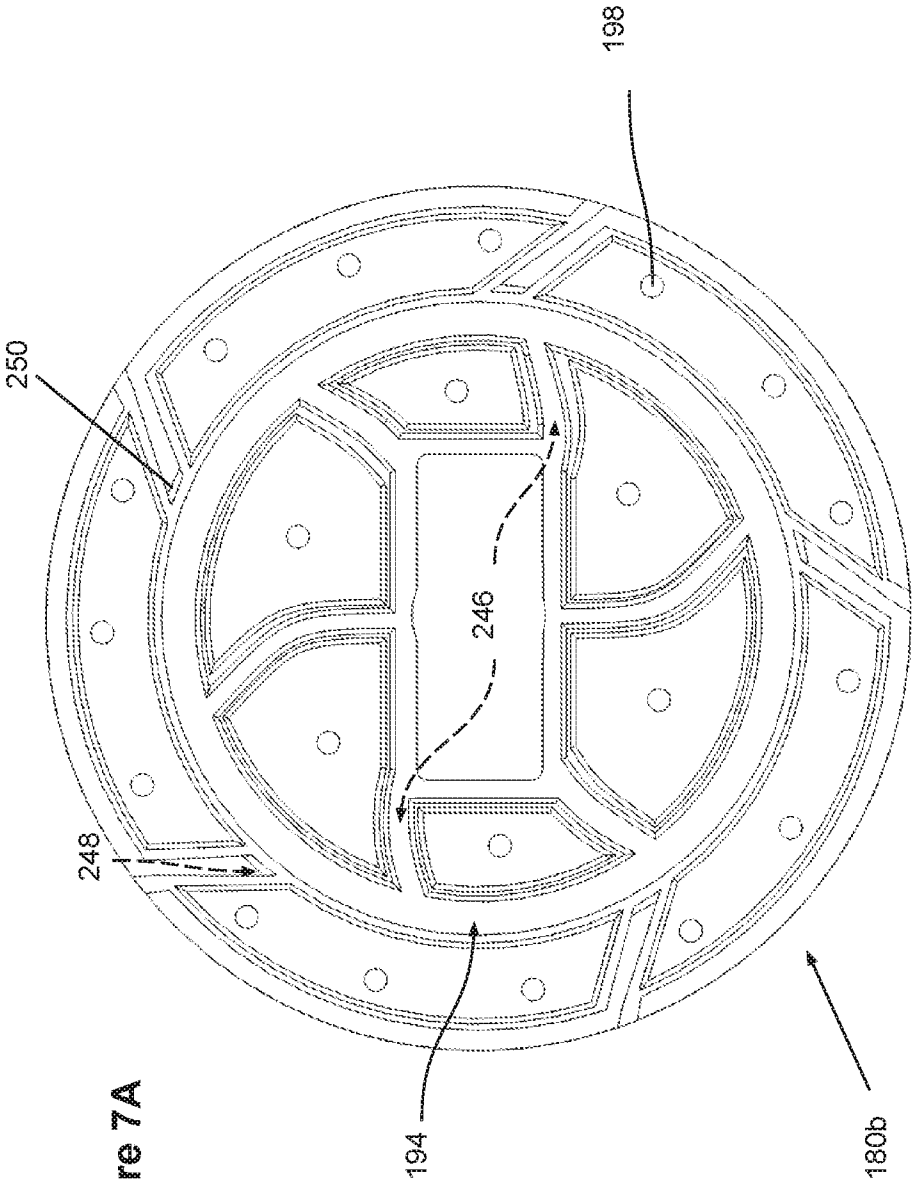


Figure 7A

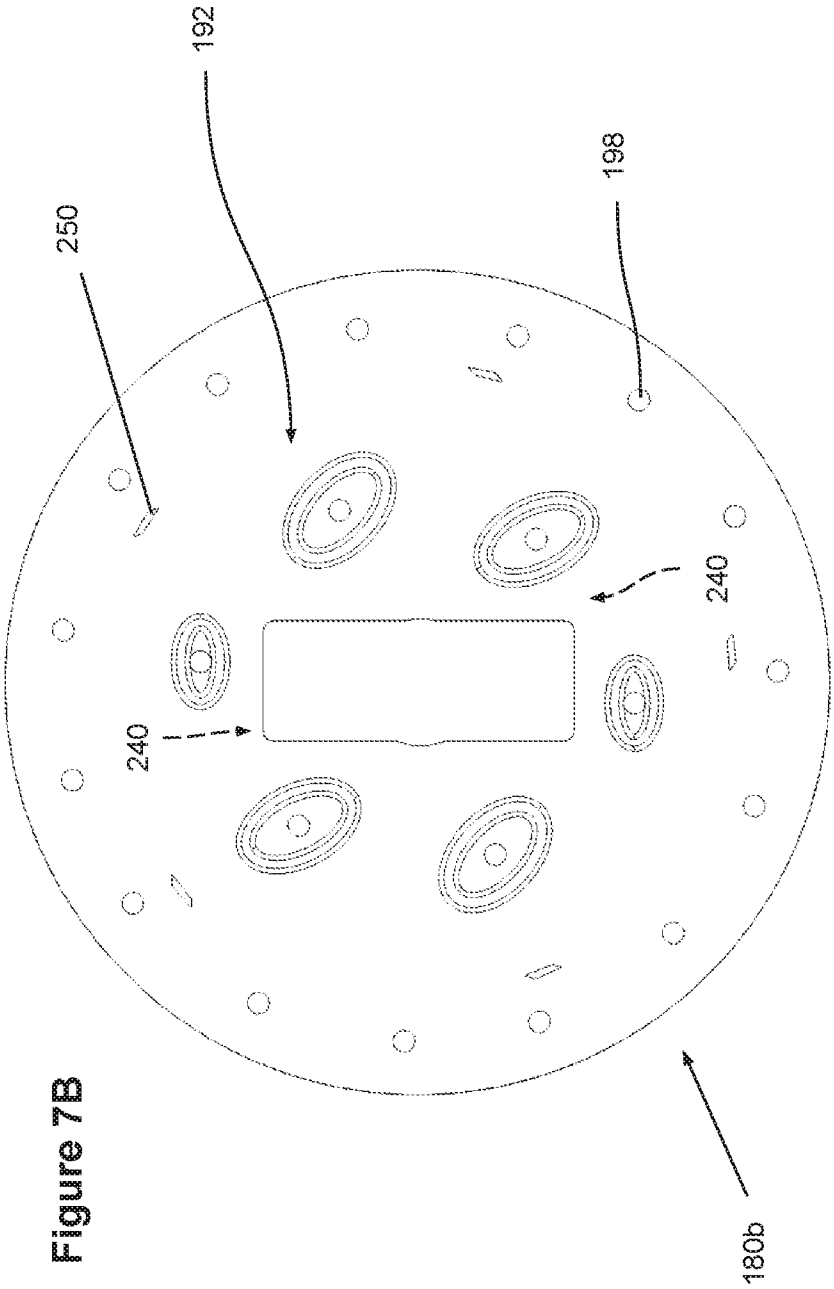


Figure 7B

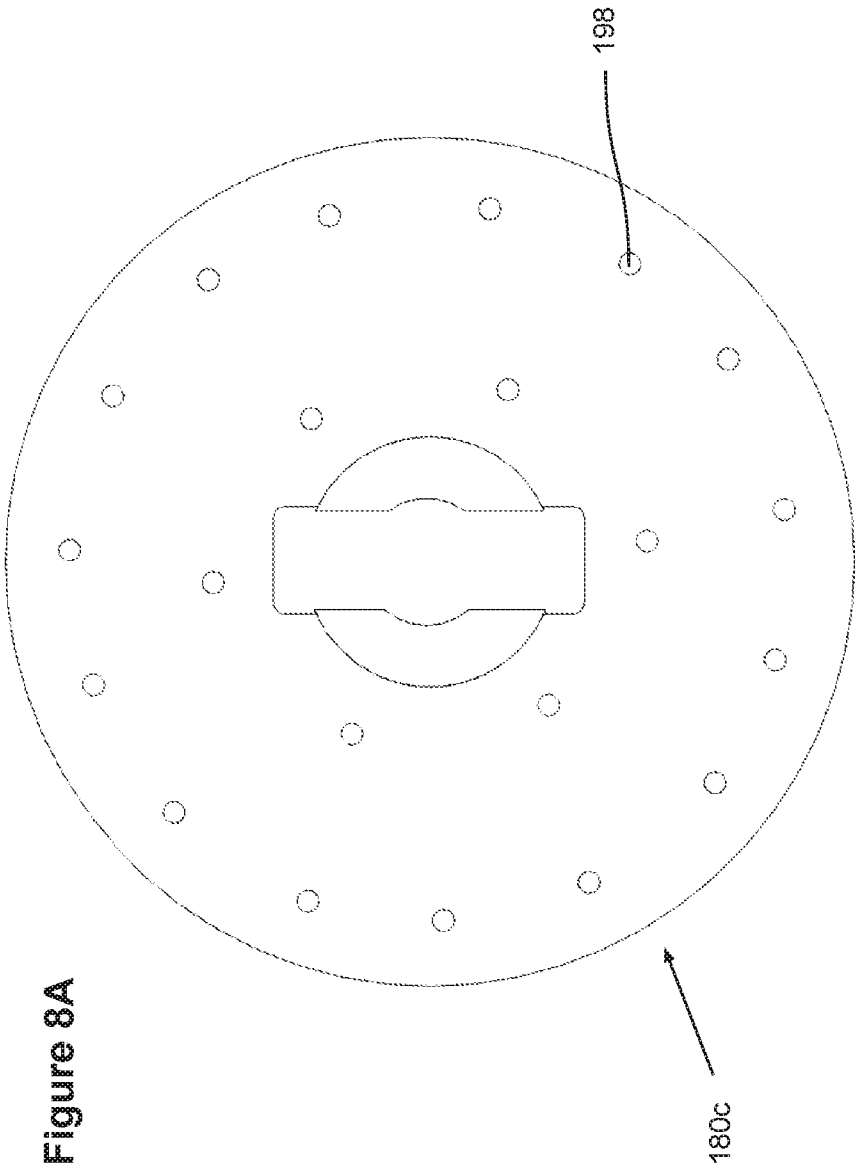


Figure 8A

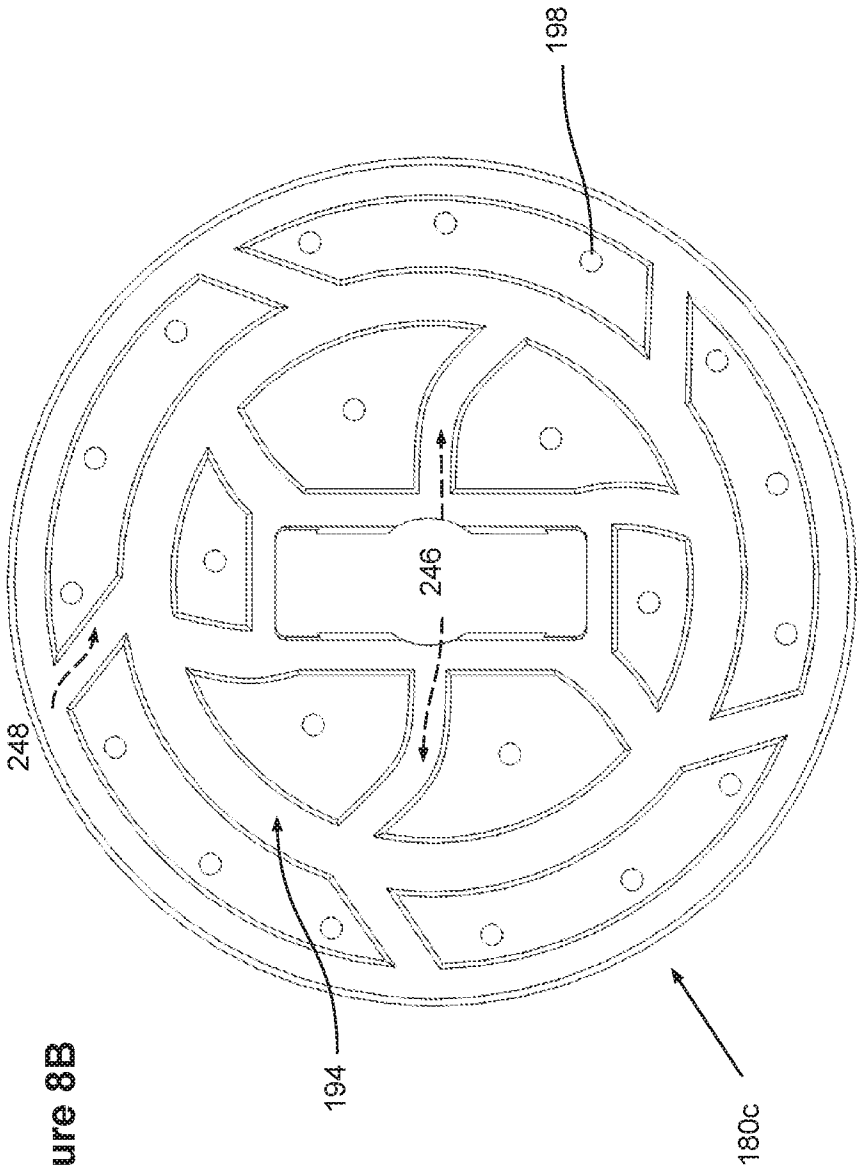


Figure 8B

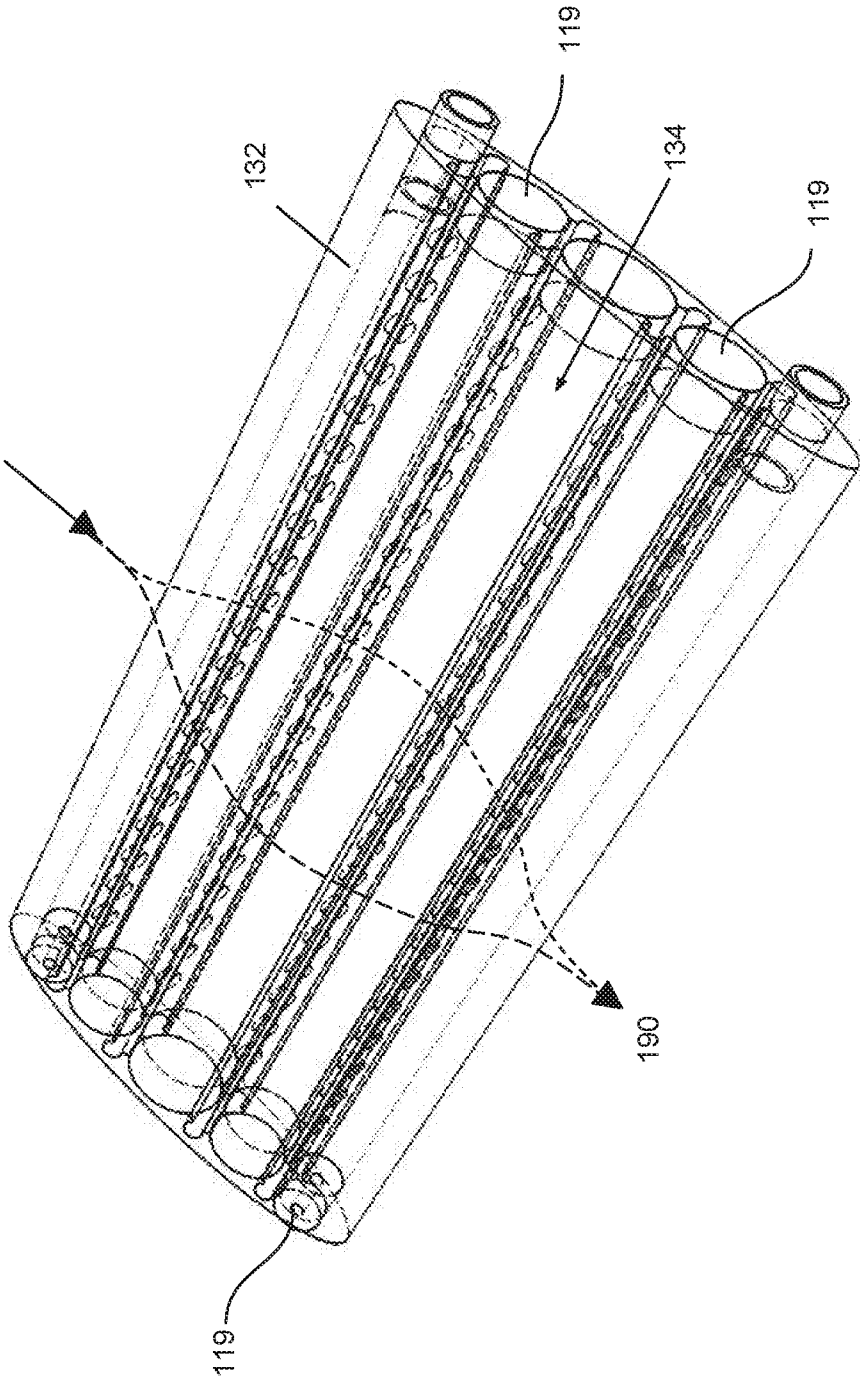


Figure 9

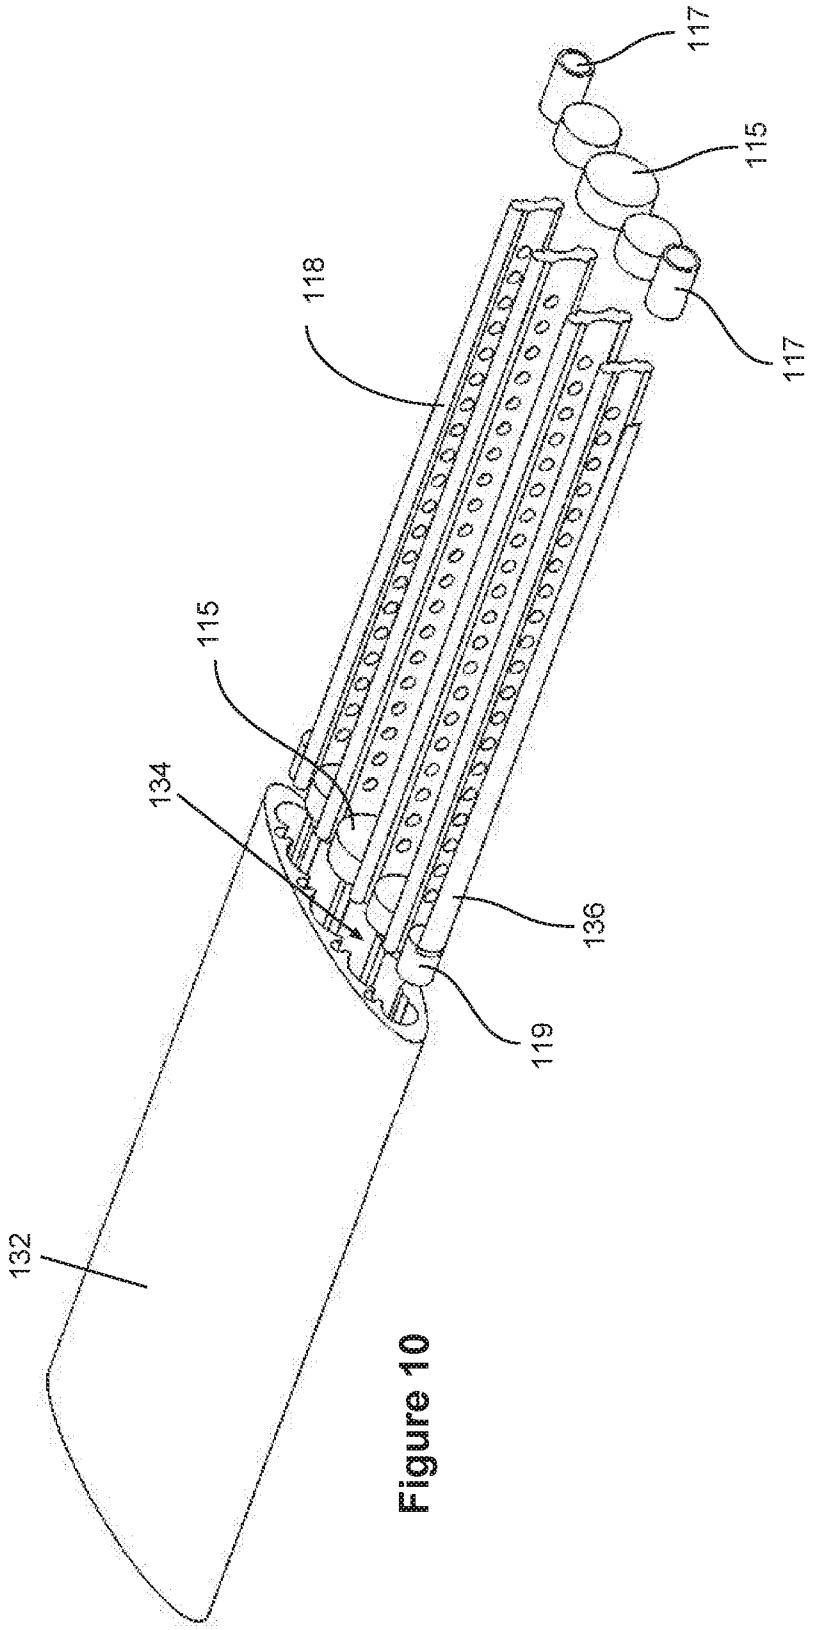


Figure 10

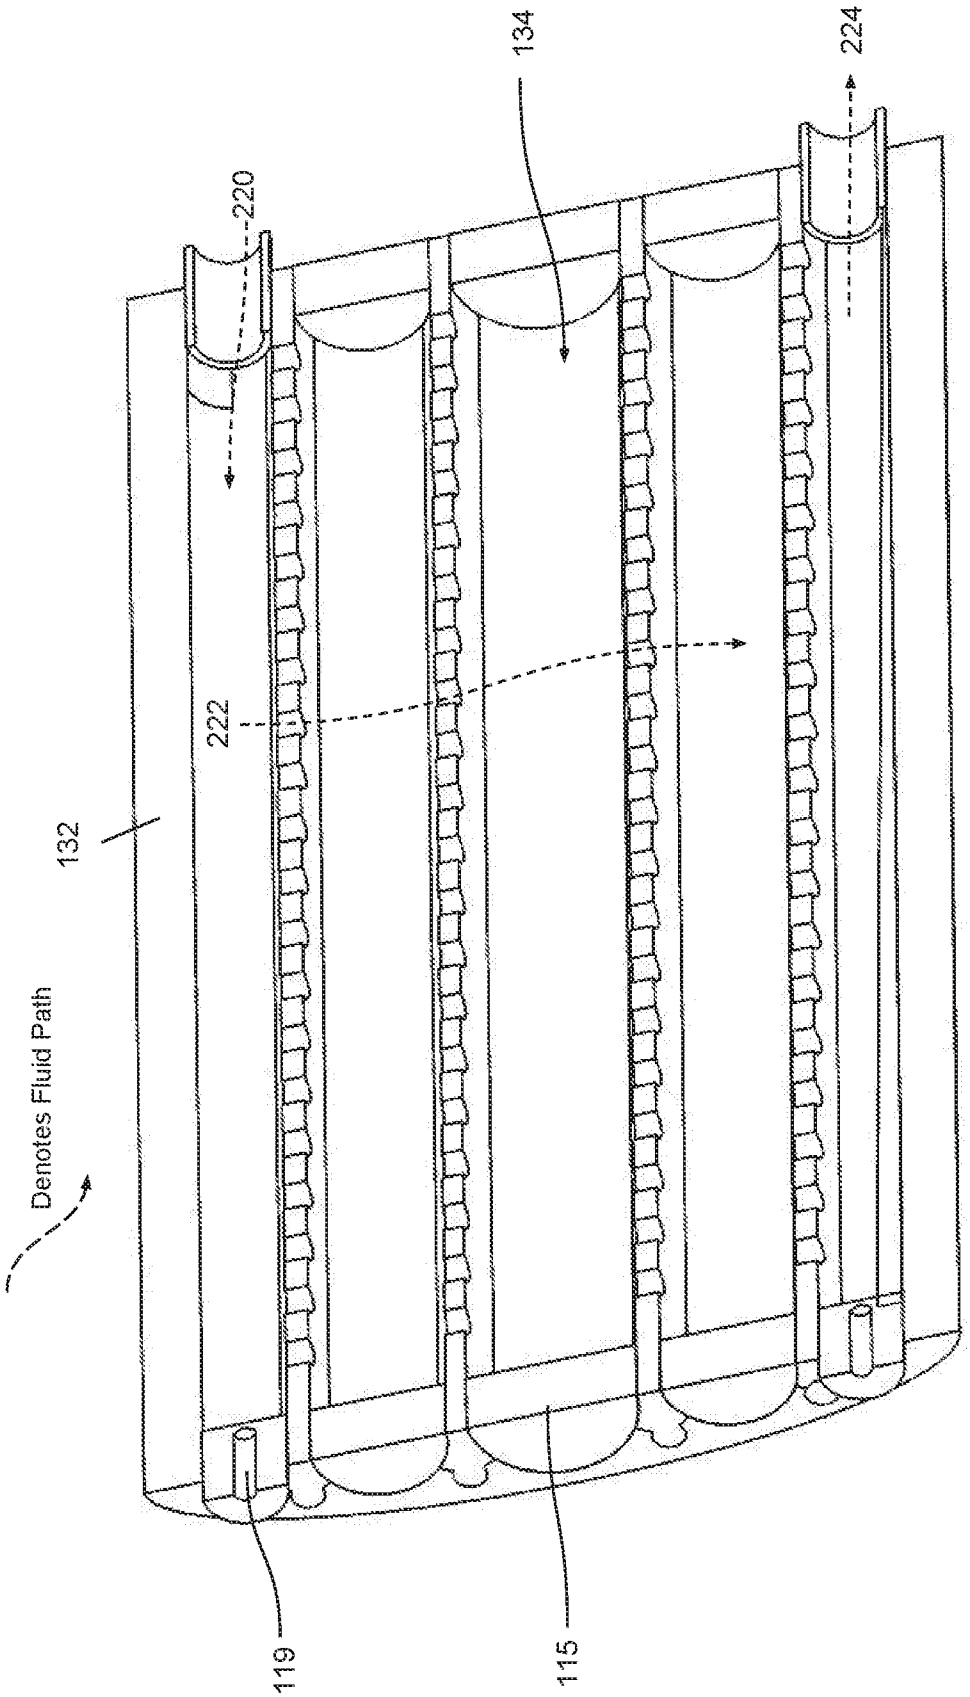


Figure 11A

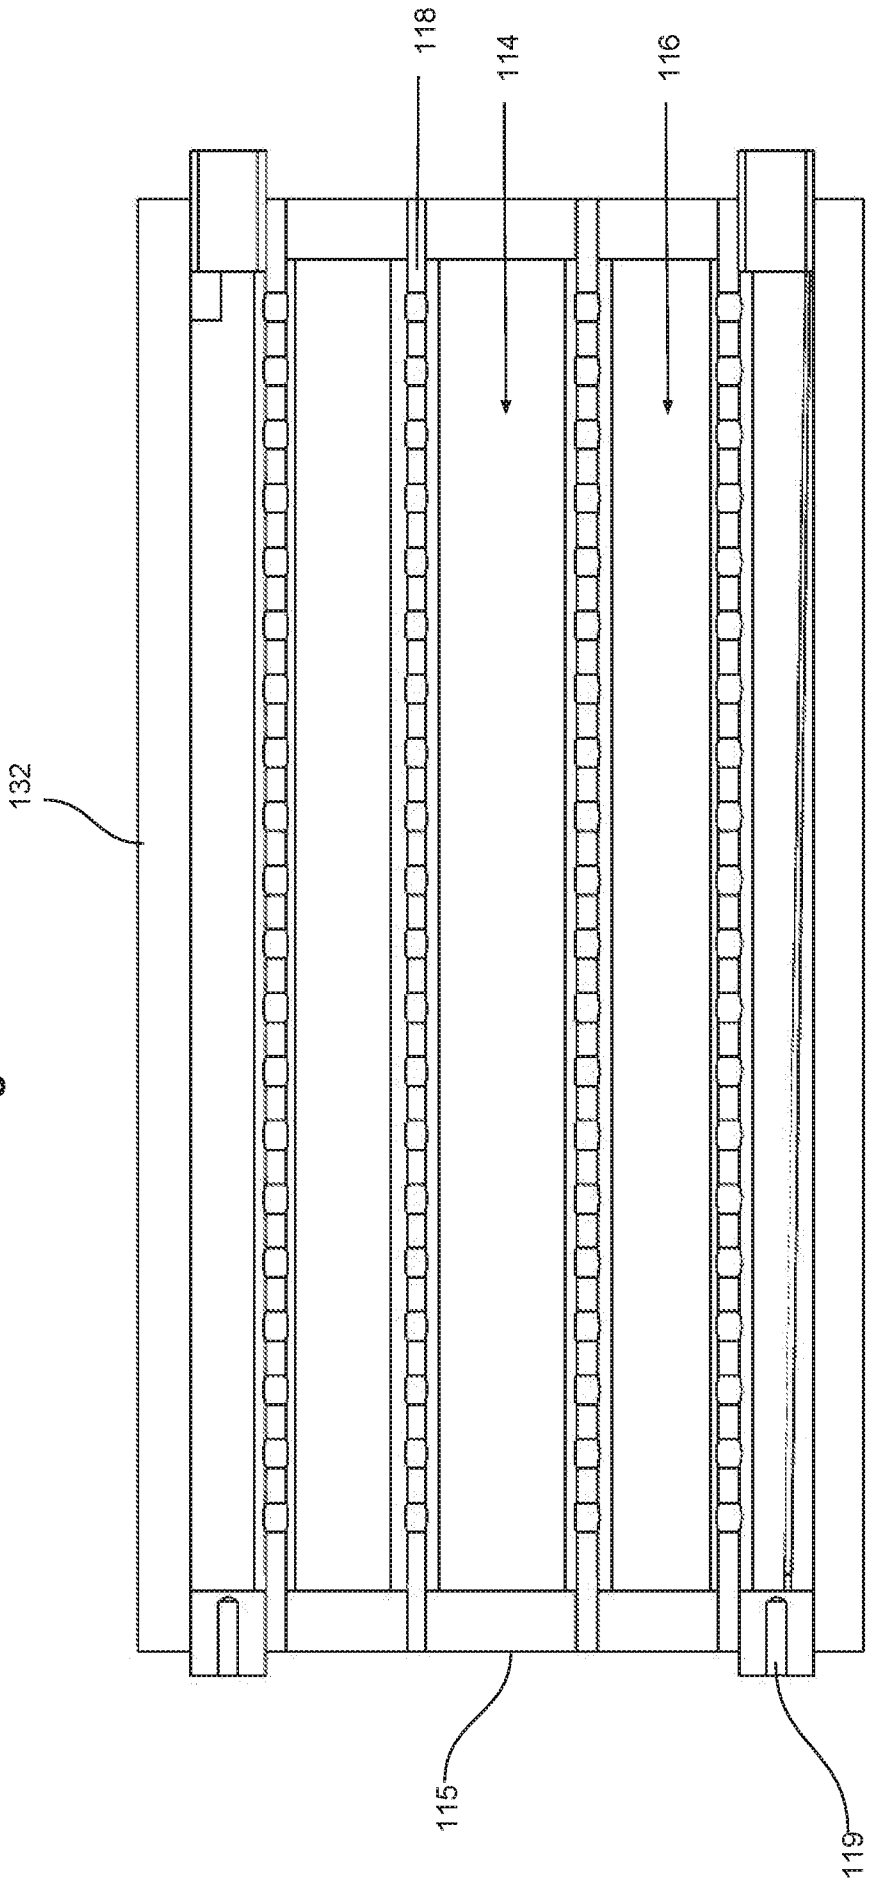


Figure 11B

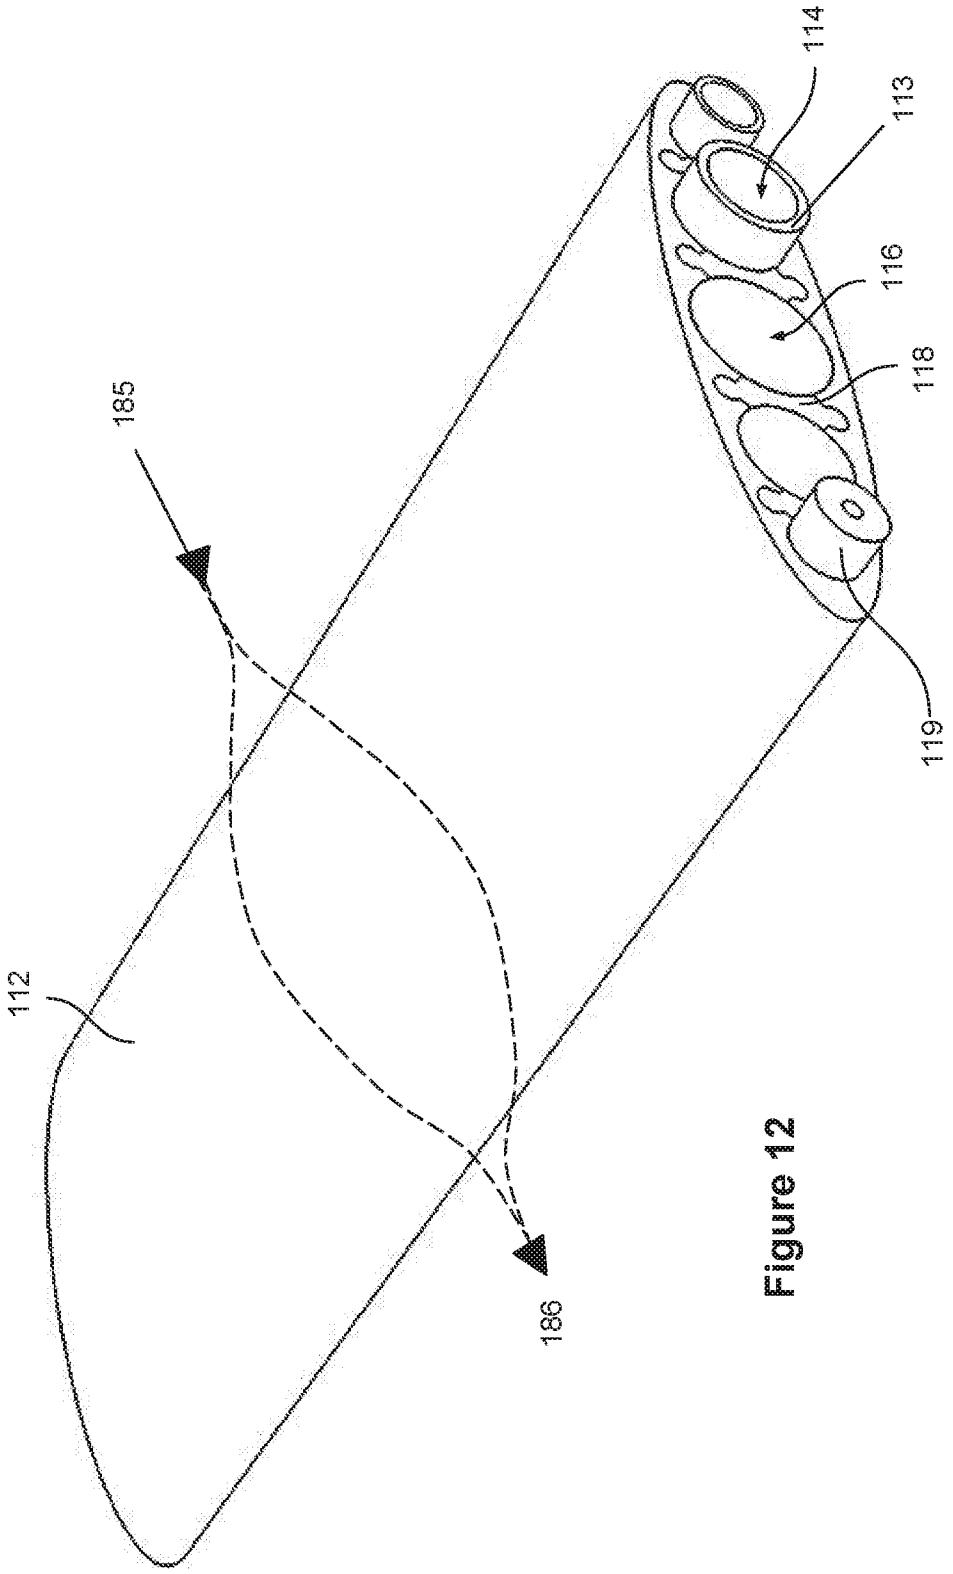


Figure 12

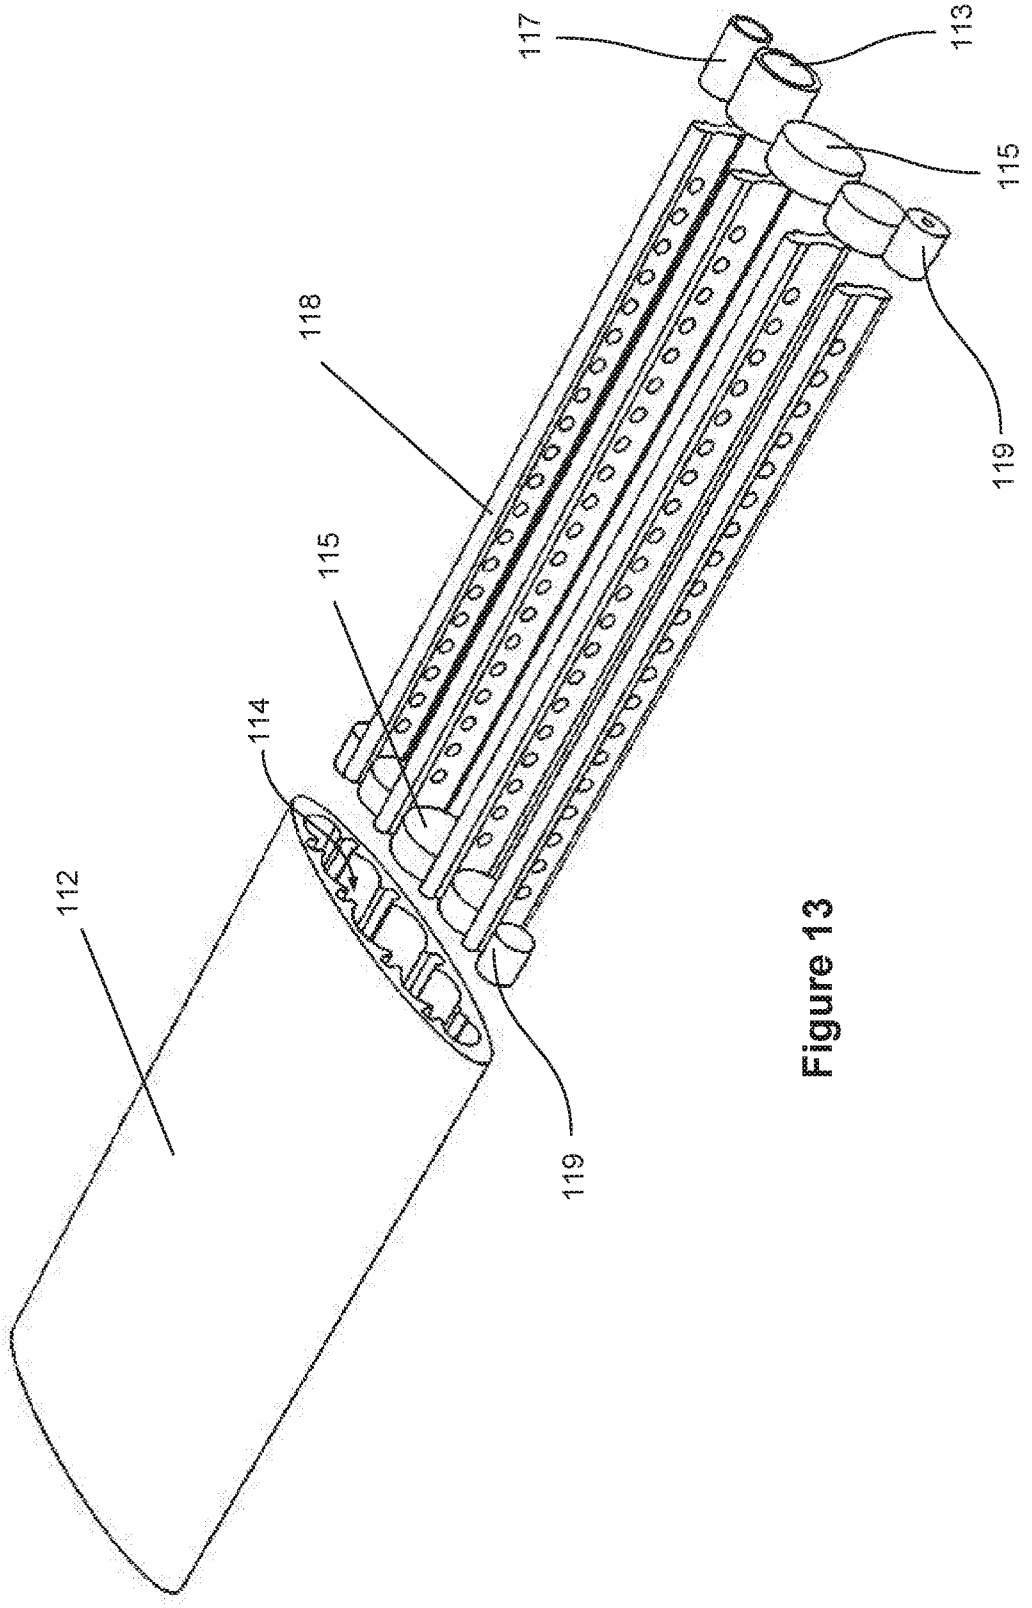


Figure 13

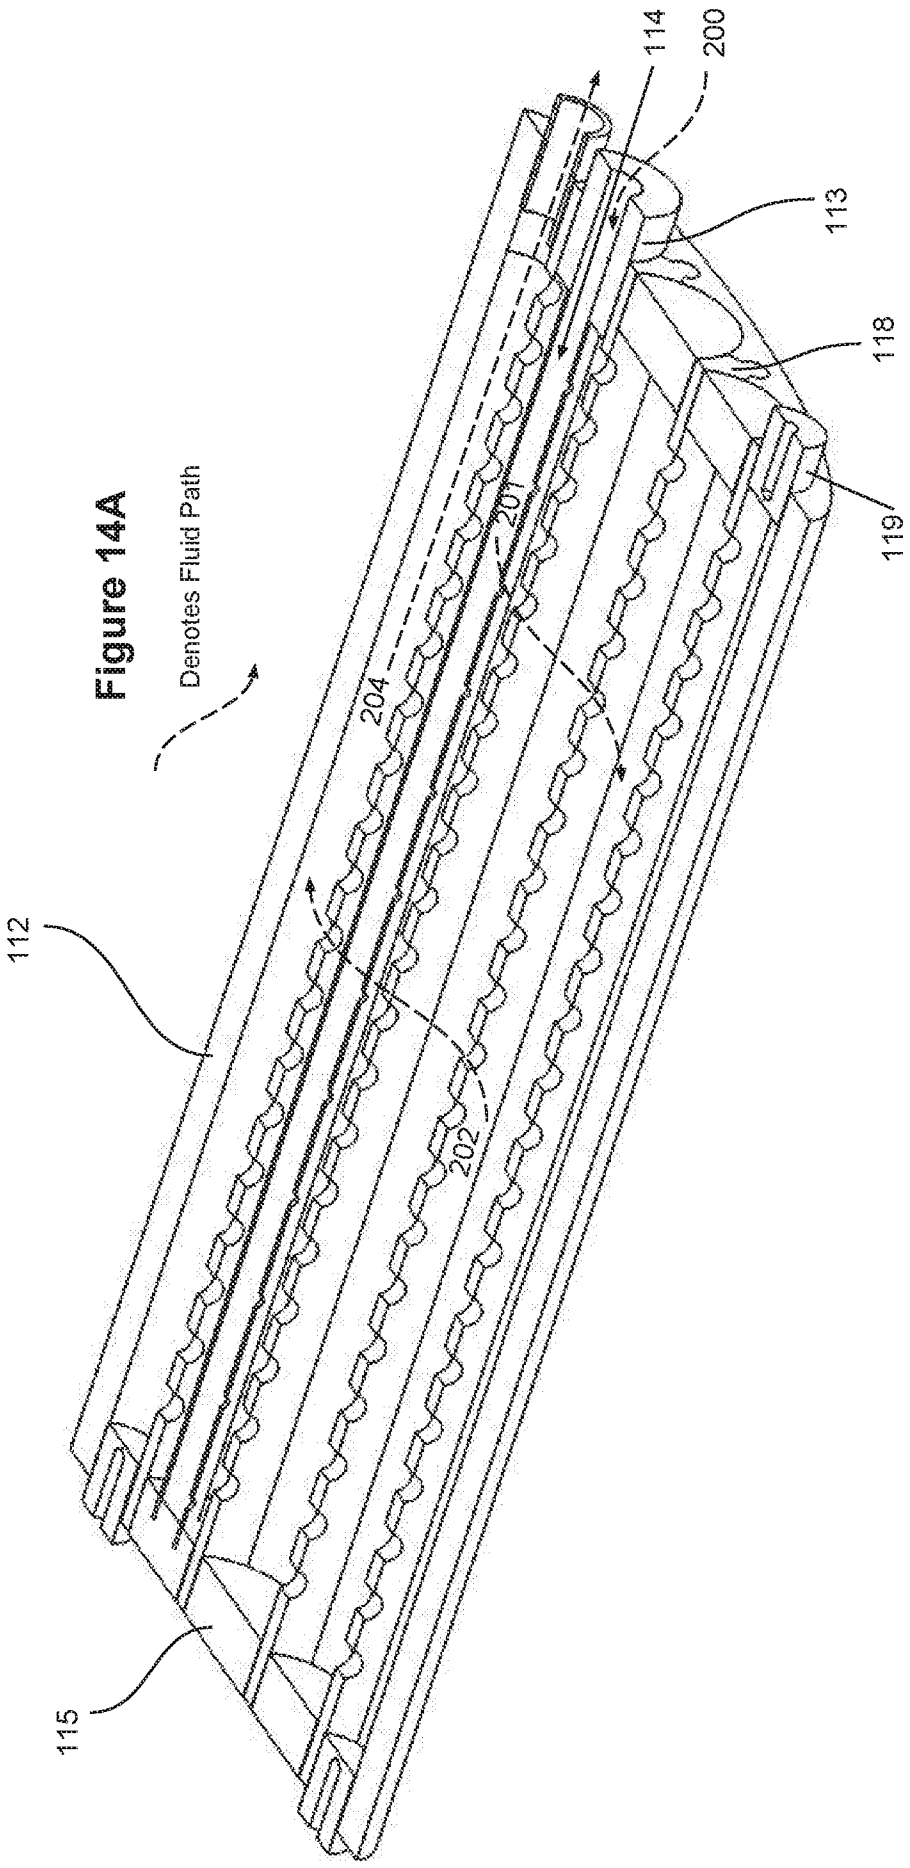
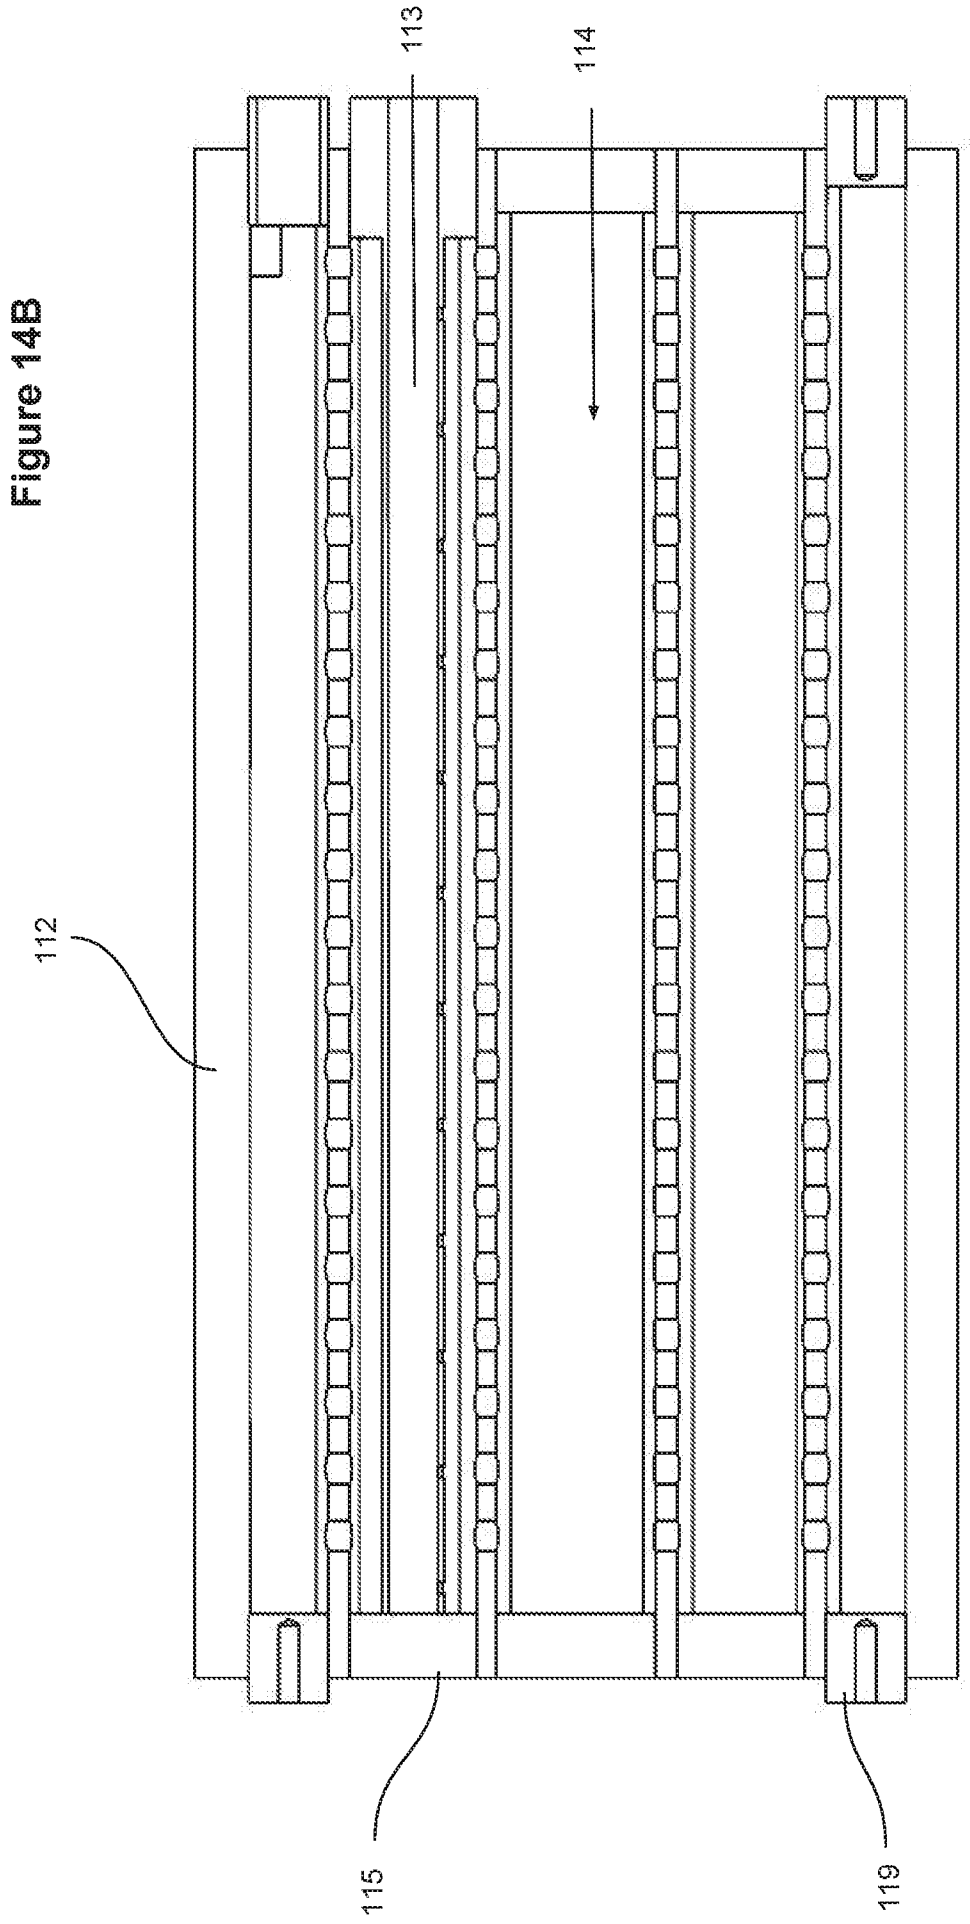


Figure 14A

Figure 14B



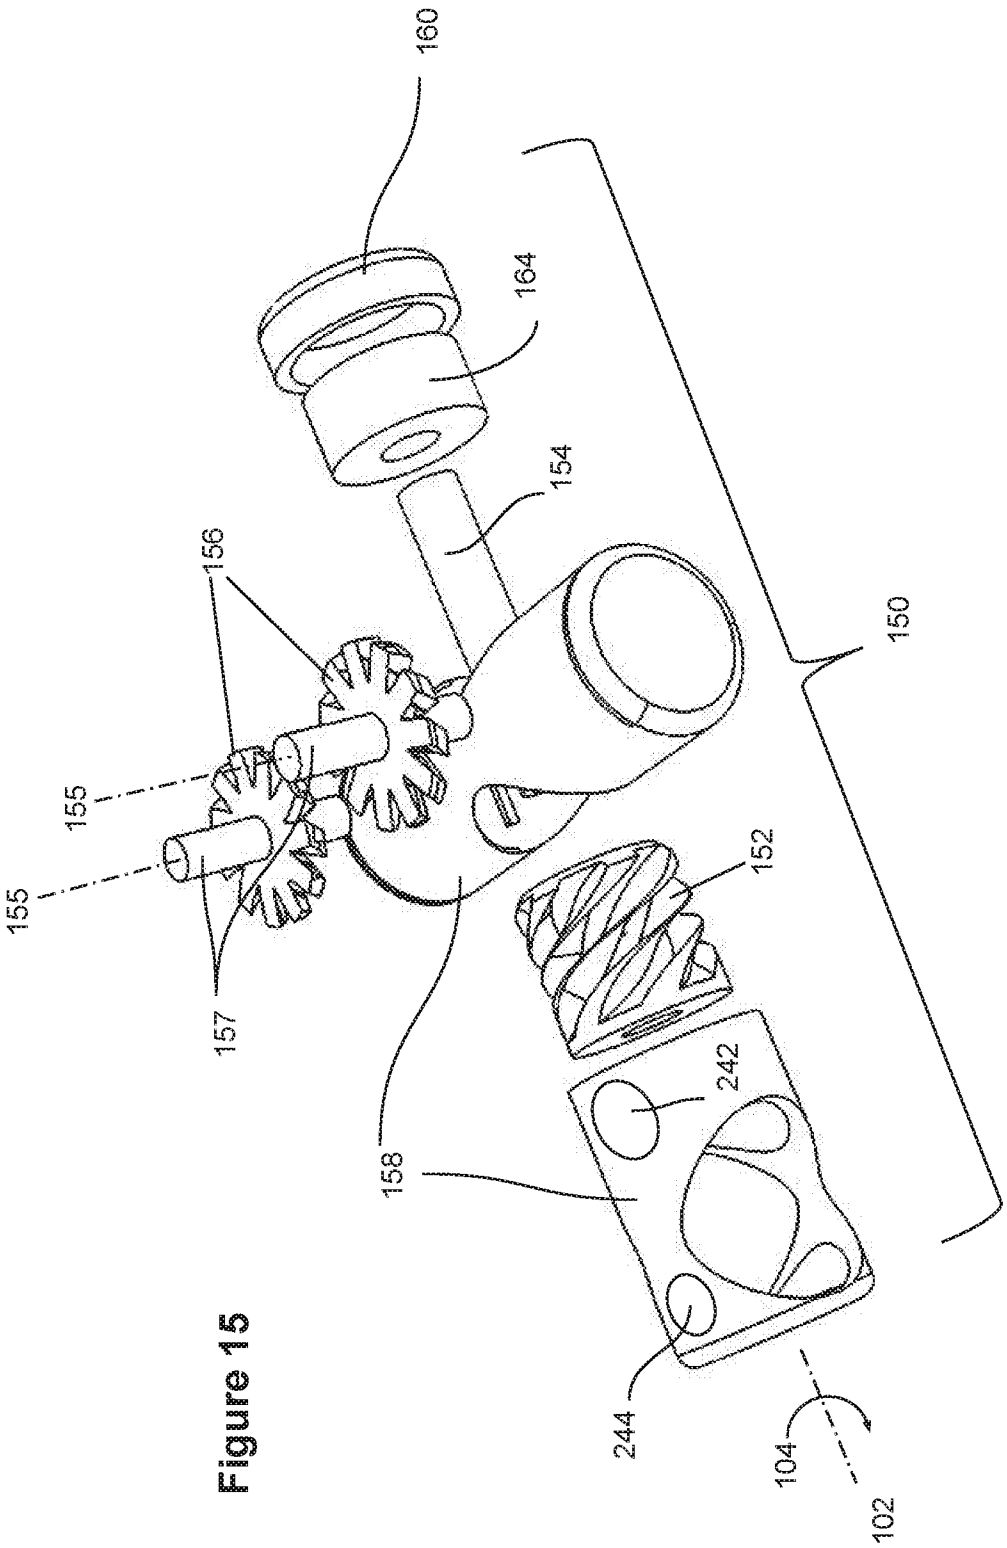


Figure 15

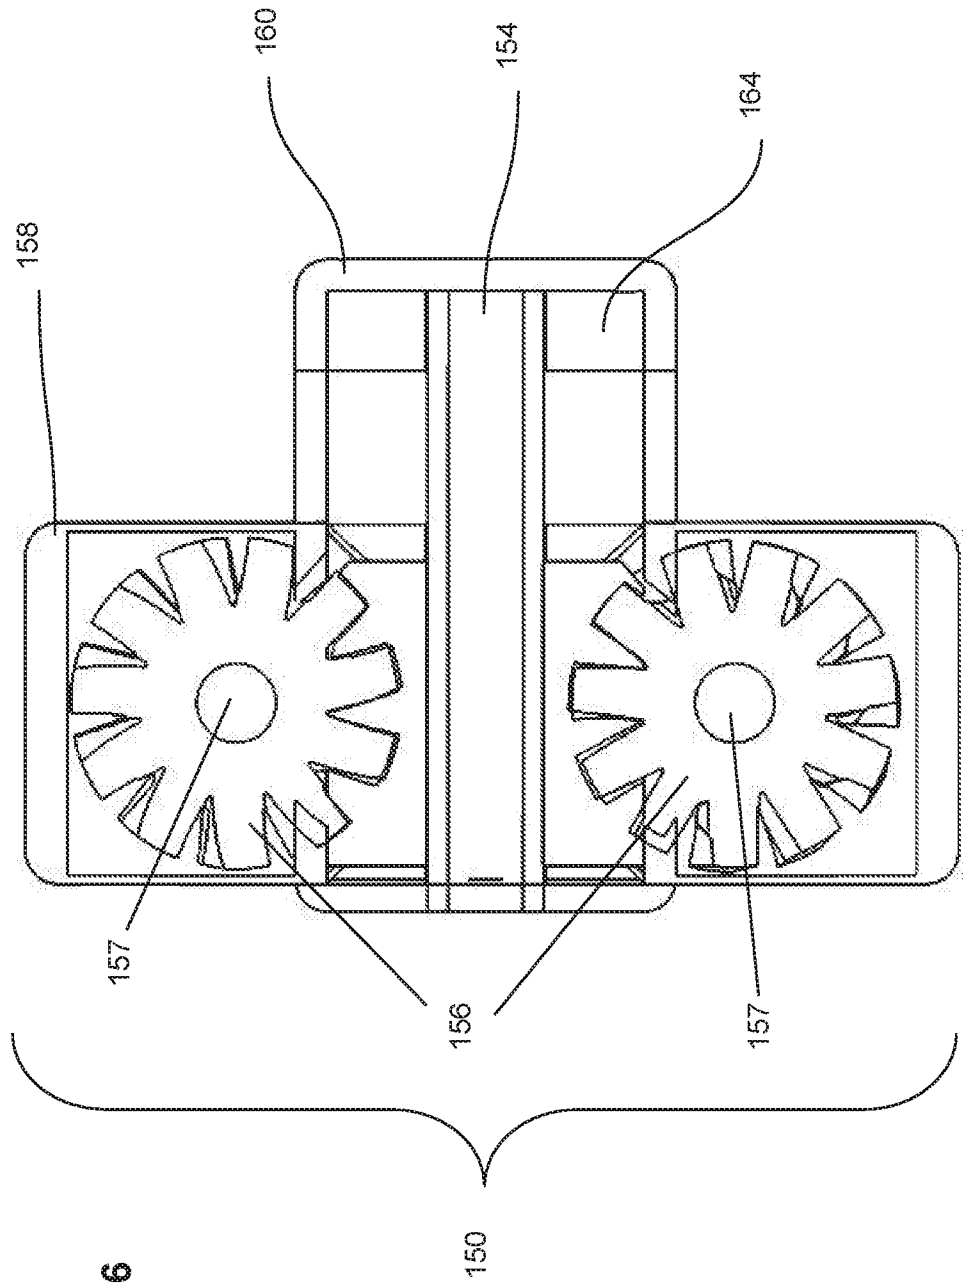


Figure 16

Figure 17

Embodied single-stage vapor compression refrigeration cycle system diagram.

202,204,240,242.....Vapor
150.....Compressor
244,246,220.....Vapor
130.....Condenser Section
189.....Cold Air
130/170.....Fan
130.....Heat exchanger
190.....Warm Air
222,224,248,250,252,200....Liquid
113.....Expansion Valve
201.....Liquid + Vapor
110.....Evaporator Section
185.....Warm Air
110/170.....Fan
110.....Heat Exchanger
186.....Cold Air
170.....Motor
176.....Electrical Plug

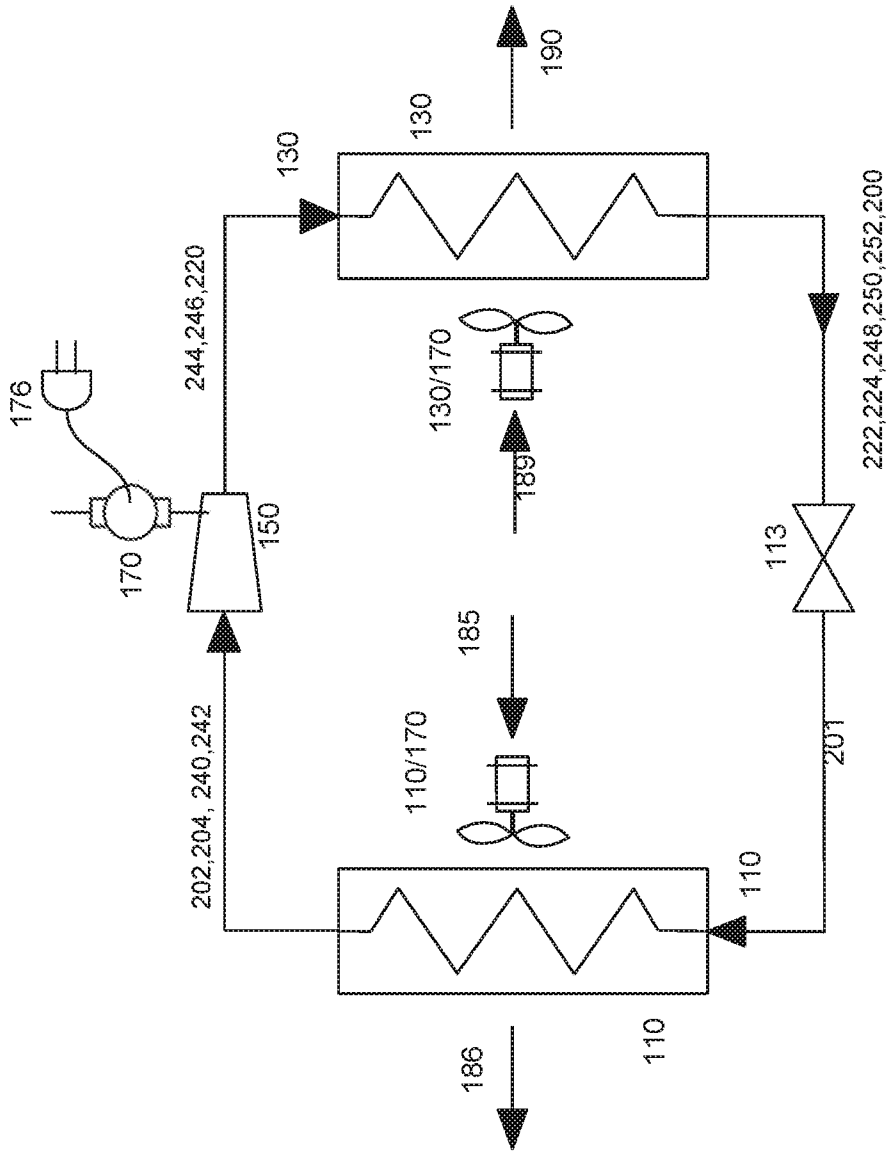


Figure 18

Pressure-Enthalpy Curve,
Reverse Carnot Cycle

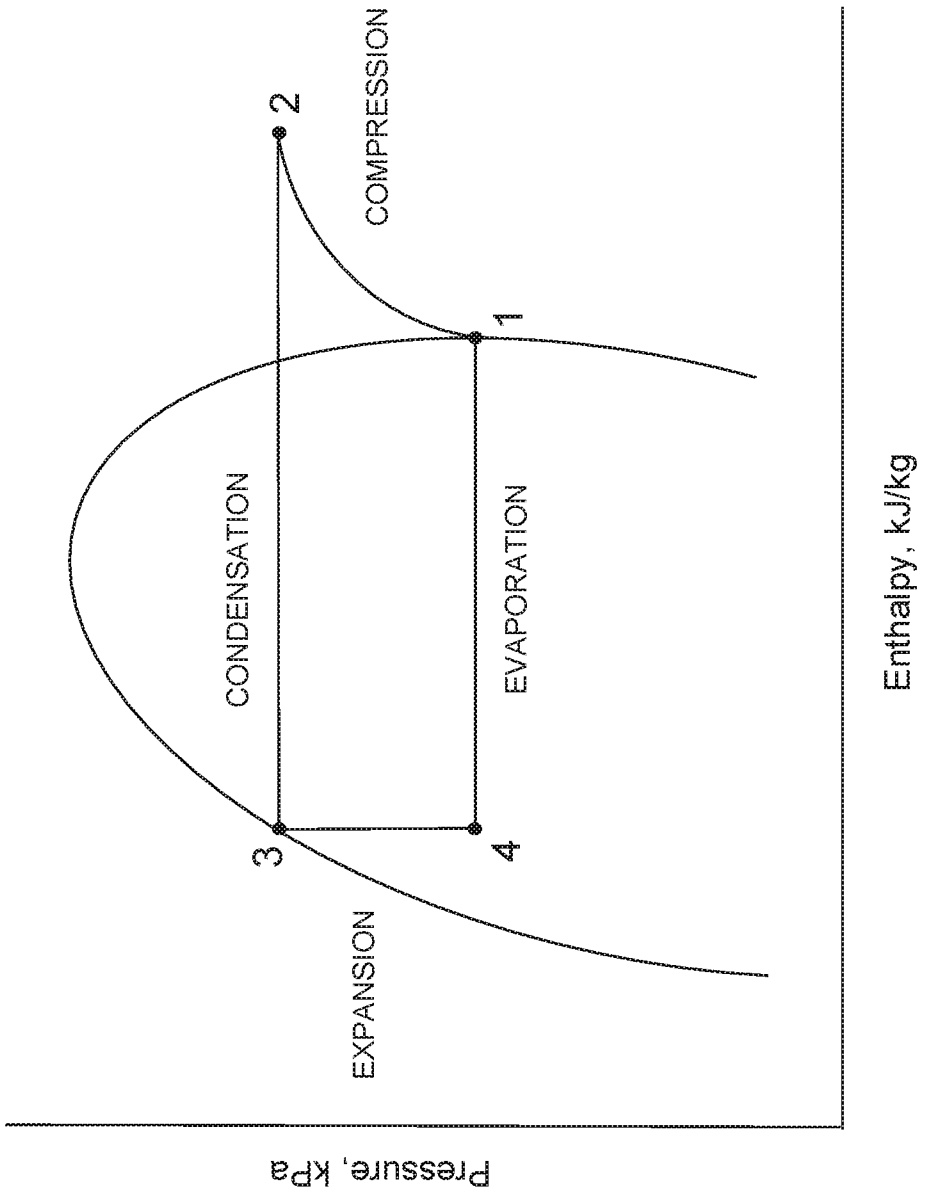


Figure 19

Typical Organic Rankine Cycle (ORC) system diagram.

1.....Liquid Pump
2..... Liquid
3.....Evaporator Section
4.....Heat input
5.....N/A
6.....Heat Exchanger
7.....Waste heat
8.....Vapor
9.....Turbine
10.....Generator
11.....Electric Load
12.....Vapor
13.....Condenser Section
14.....Cold Air
15.....Fan
16.....Heat Exchanger
17.....Warm Air
18.....Liquid

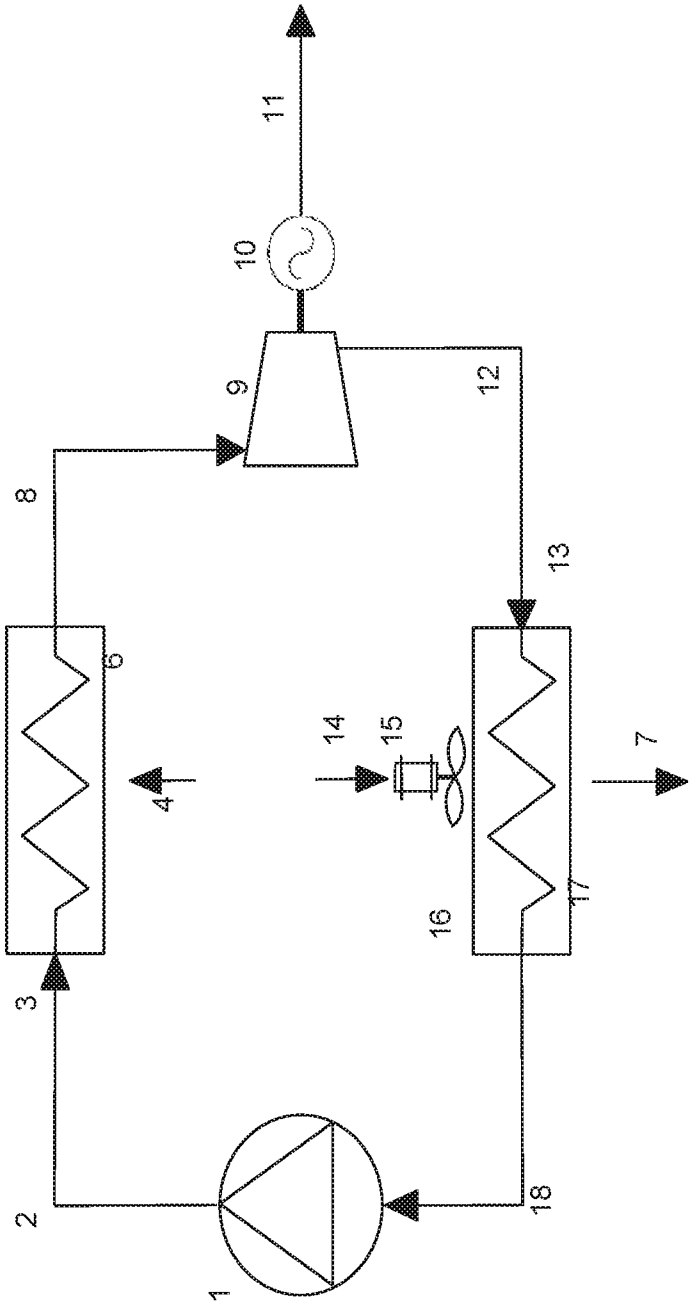
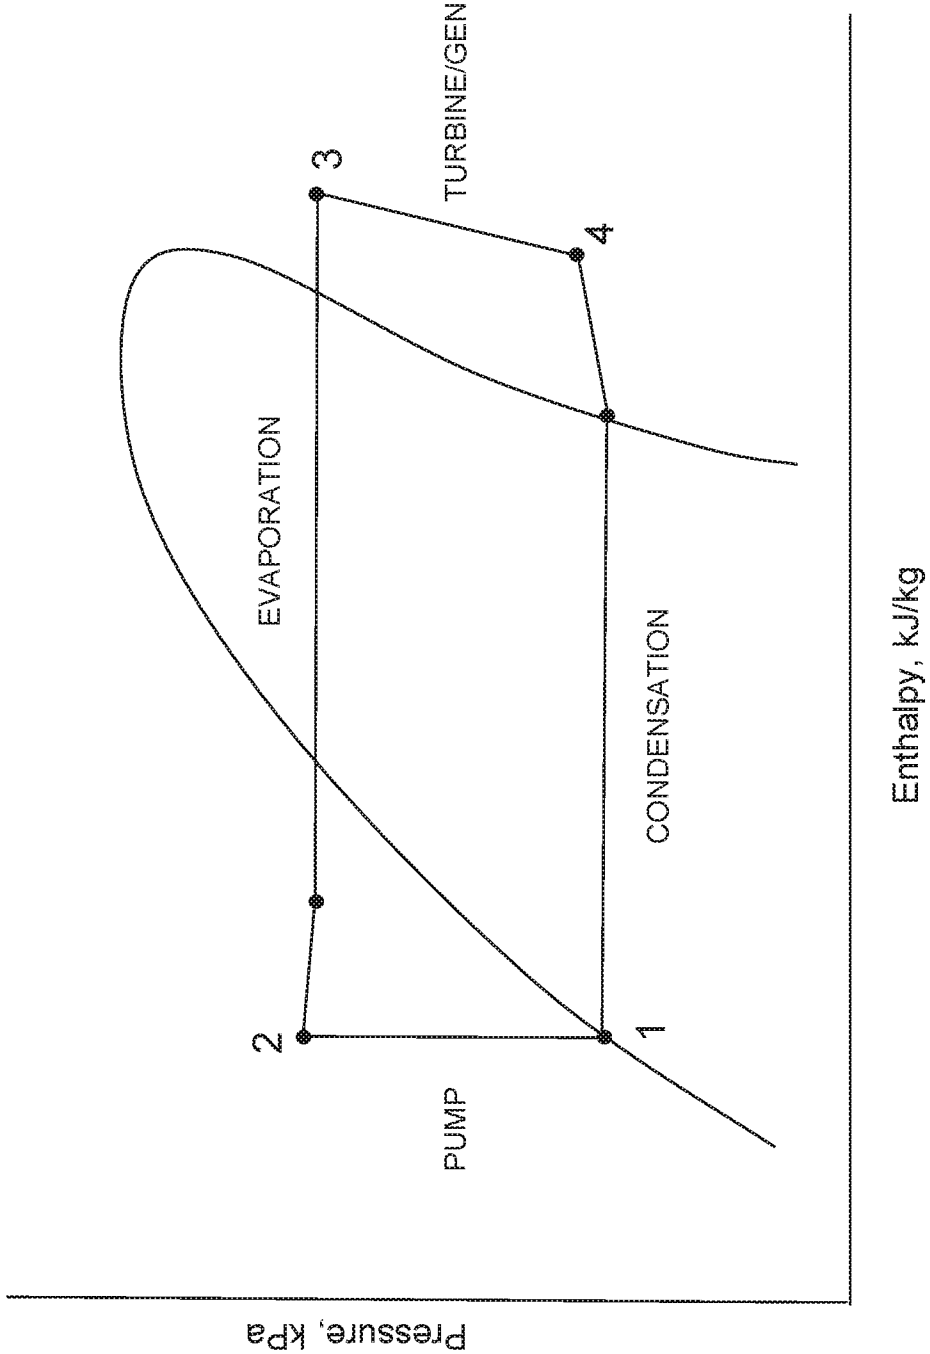


Figure 20

Pressure-Enthalpy Curve,
Organic Rankine Cycle



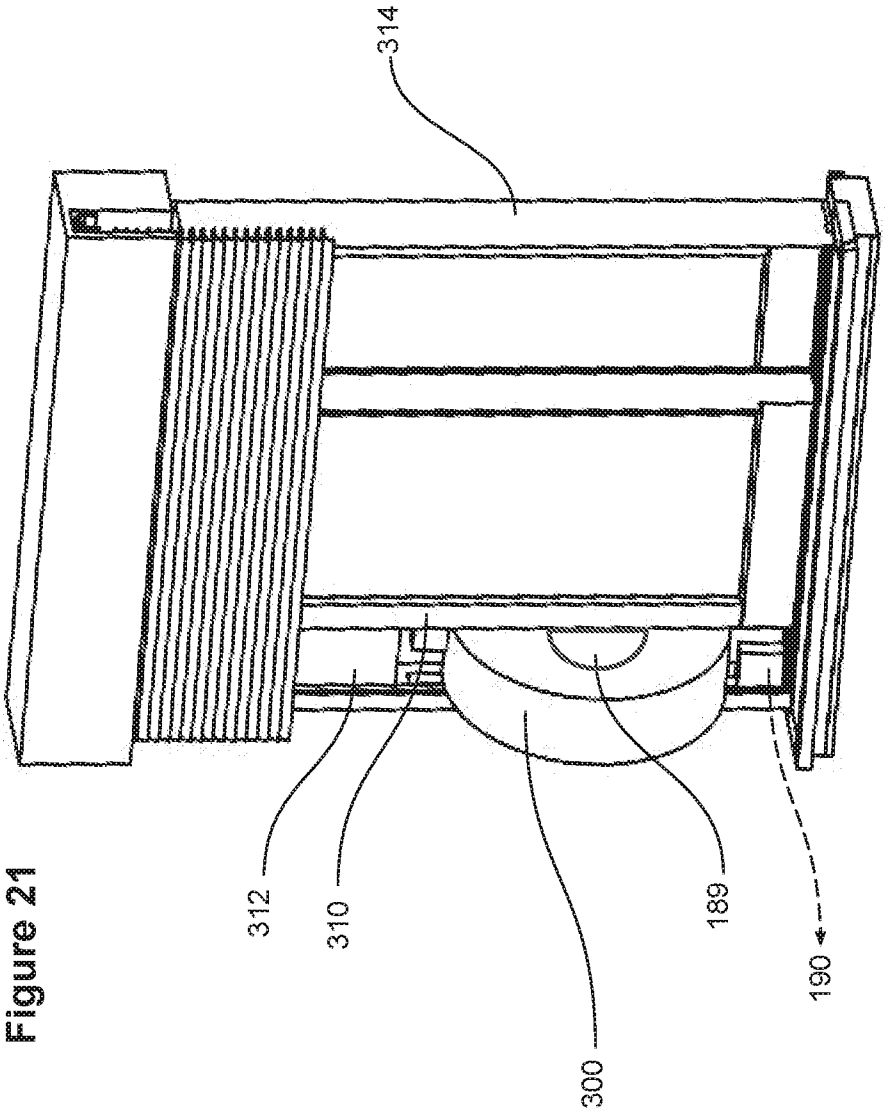


Figure 21

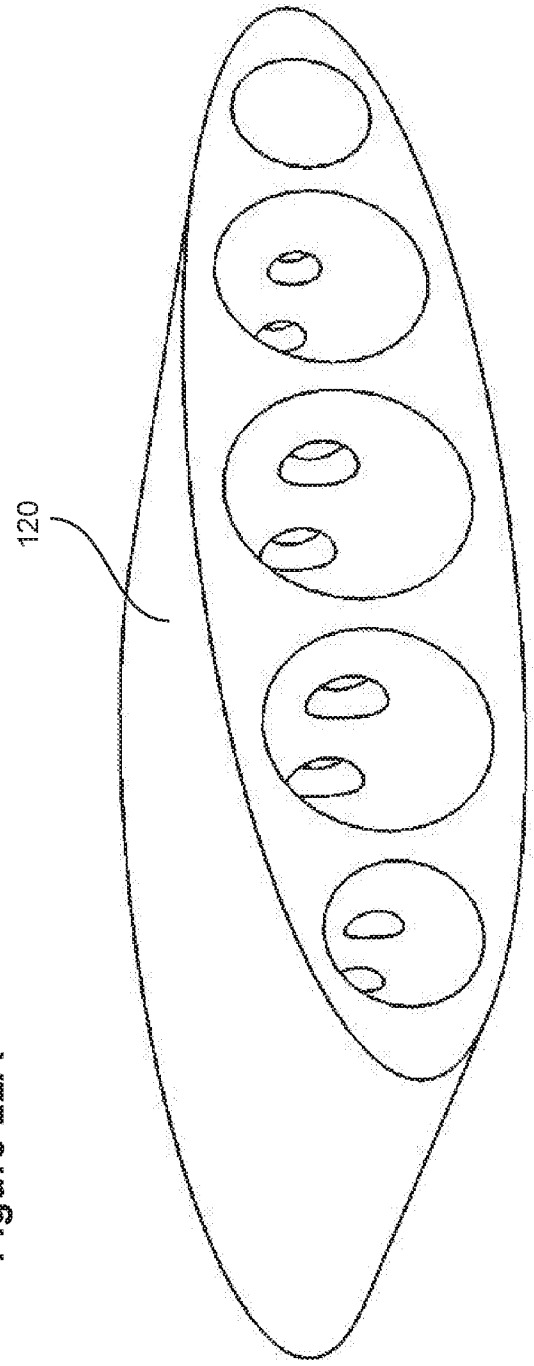


Figure 22A

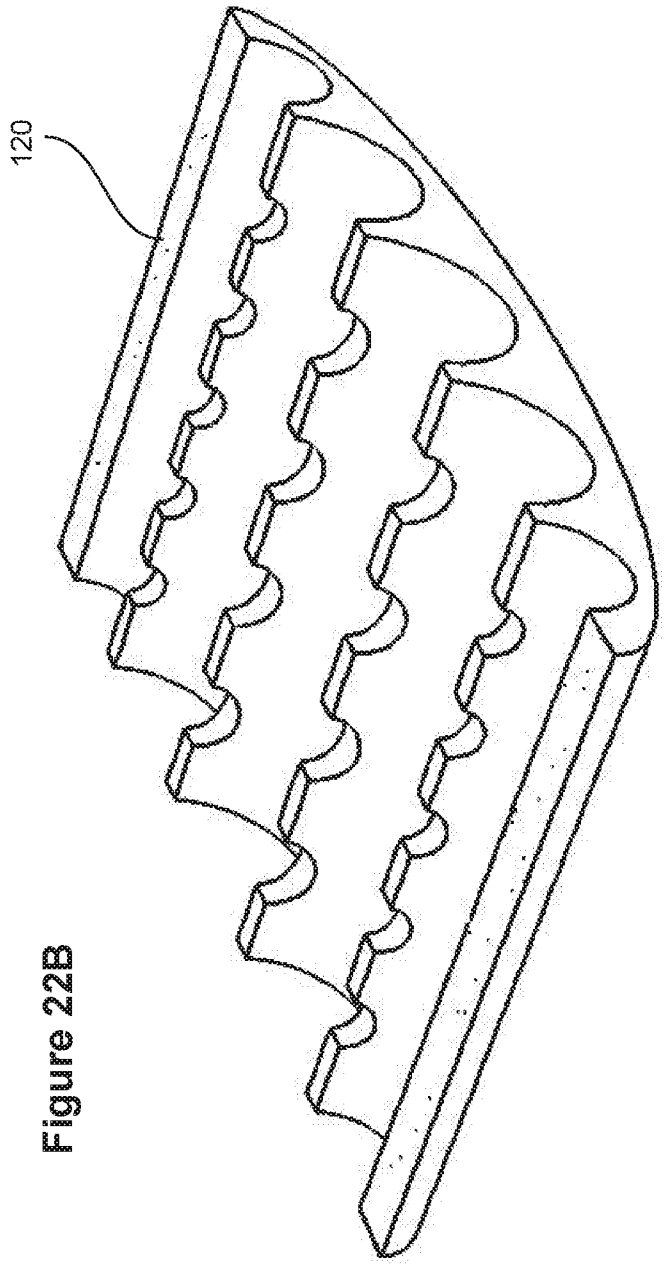


Figure 22B

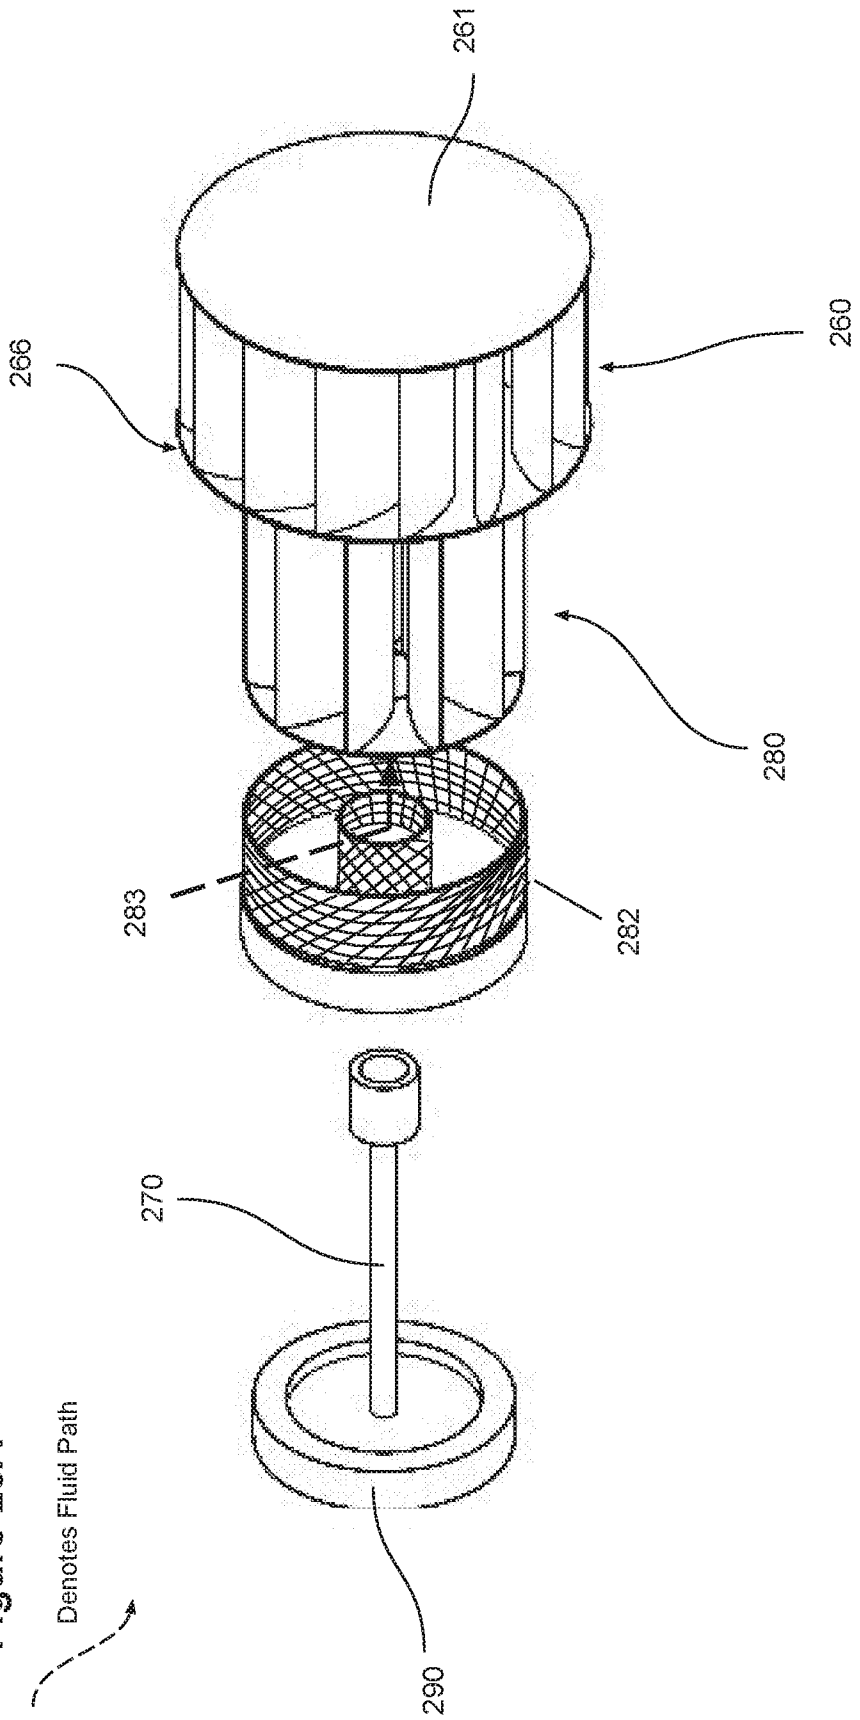


Figure 23A

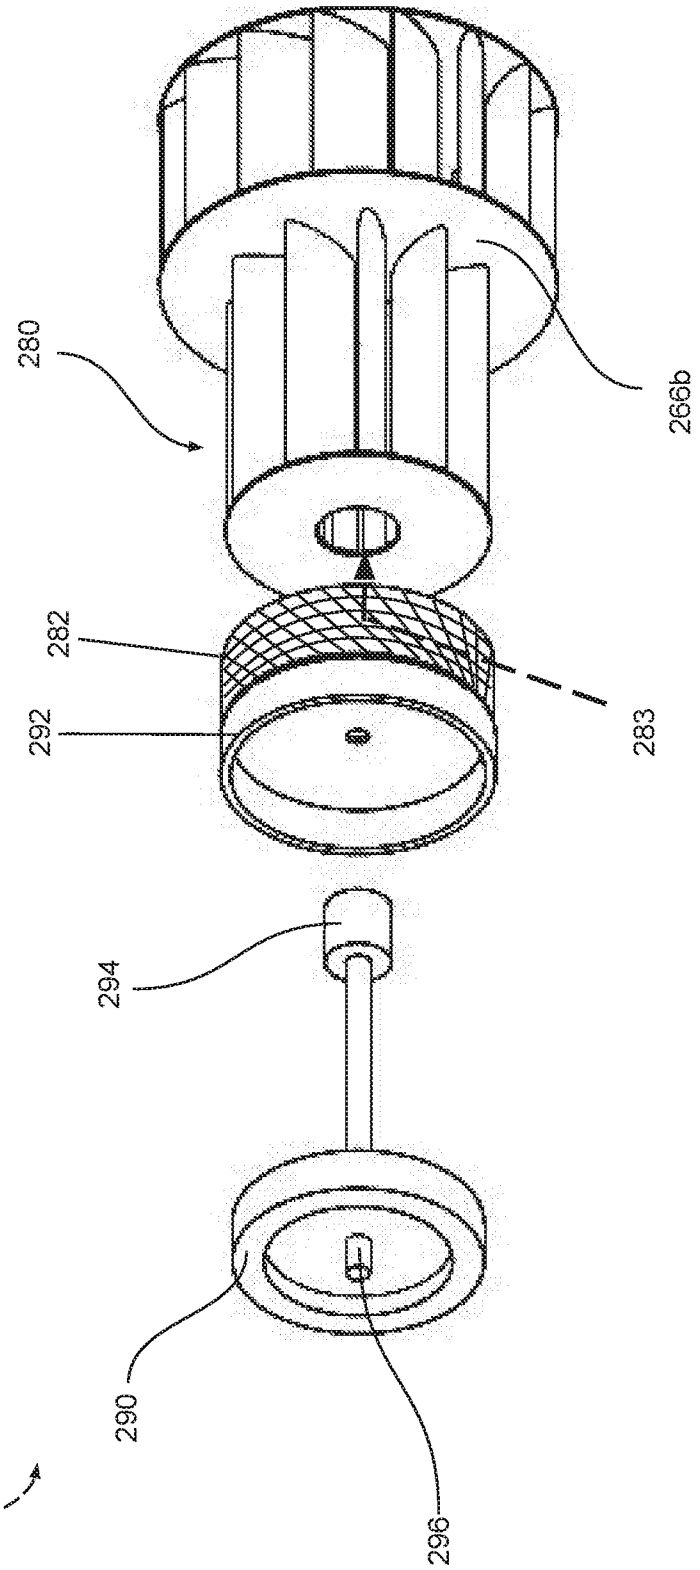
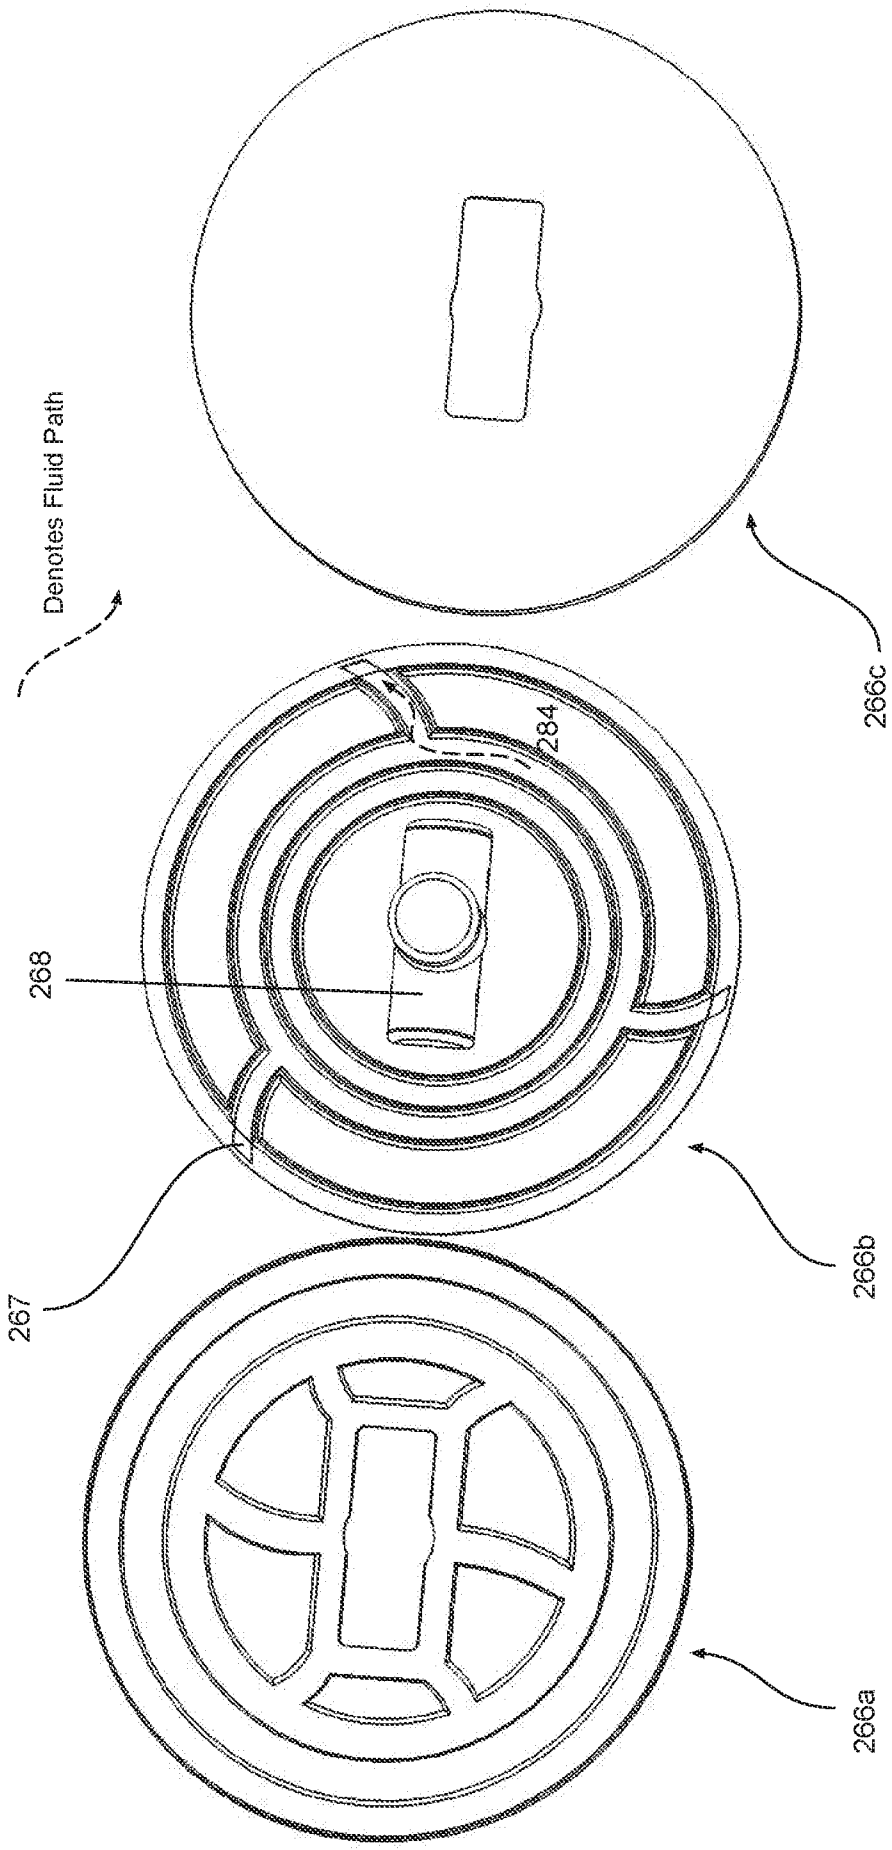


Figure 23B

Figure 24



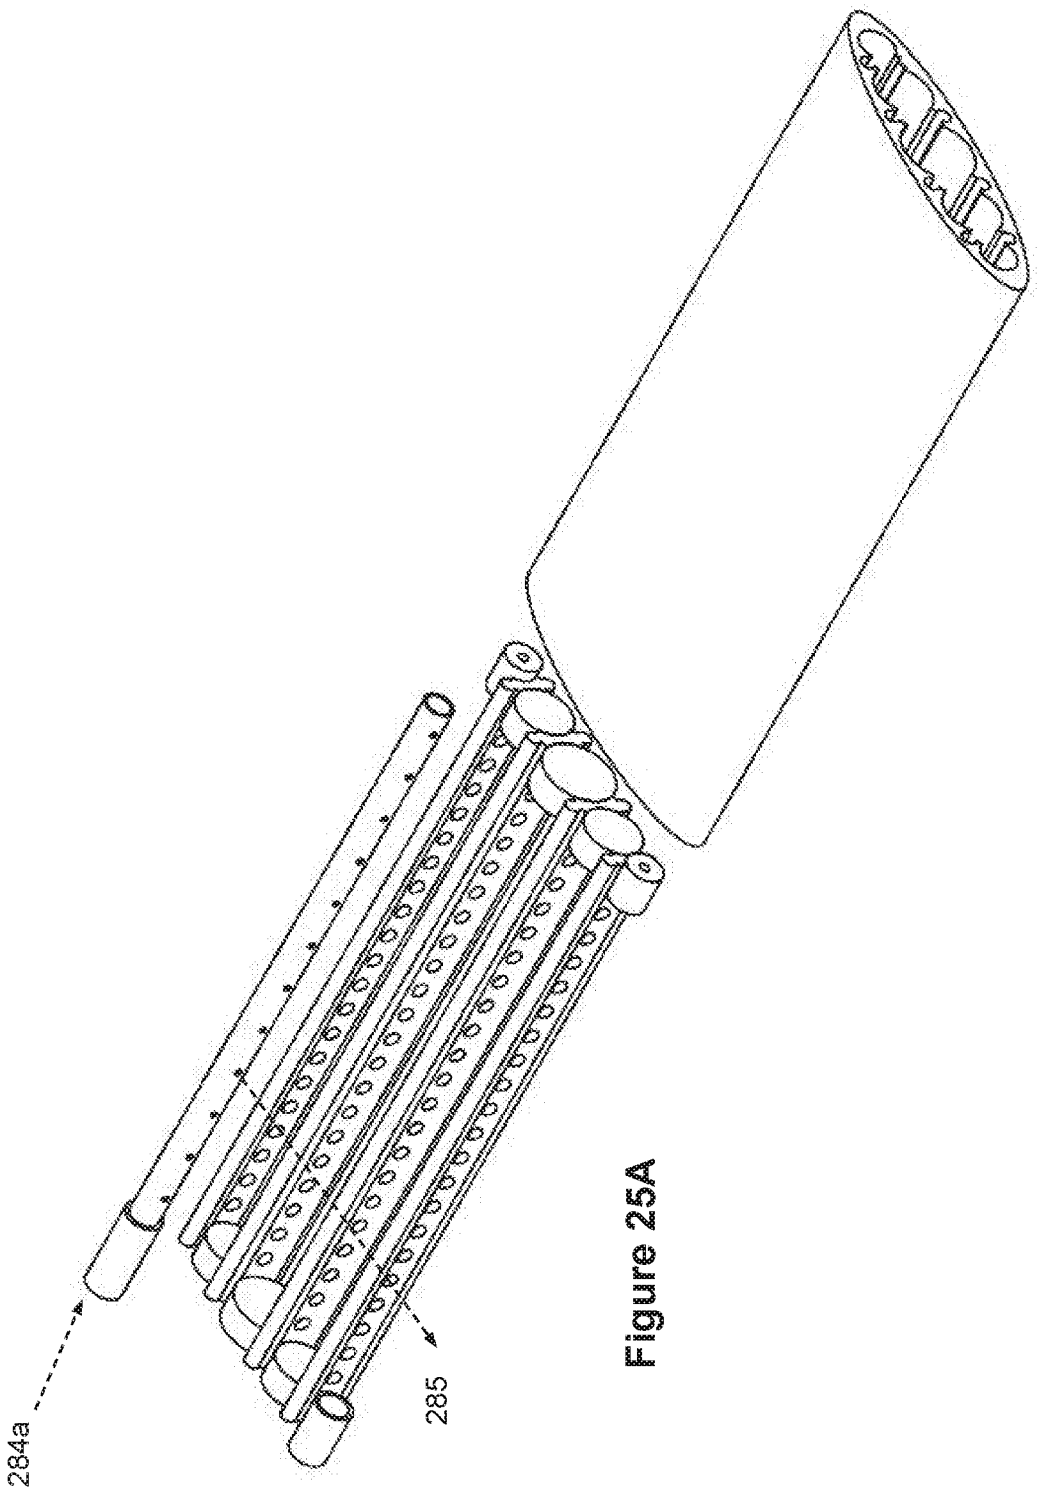


Figure 25A

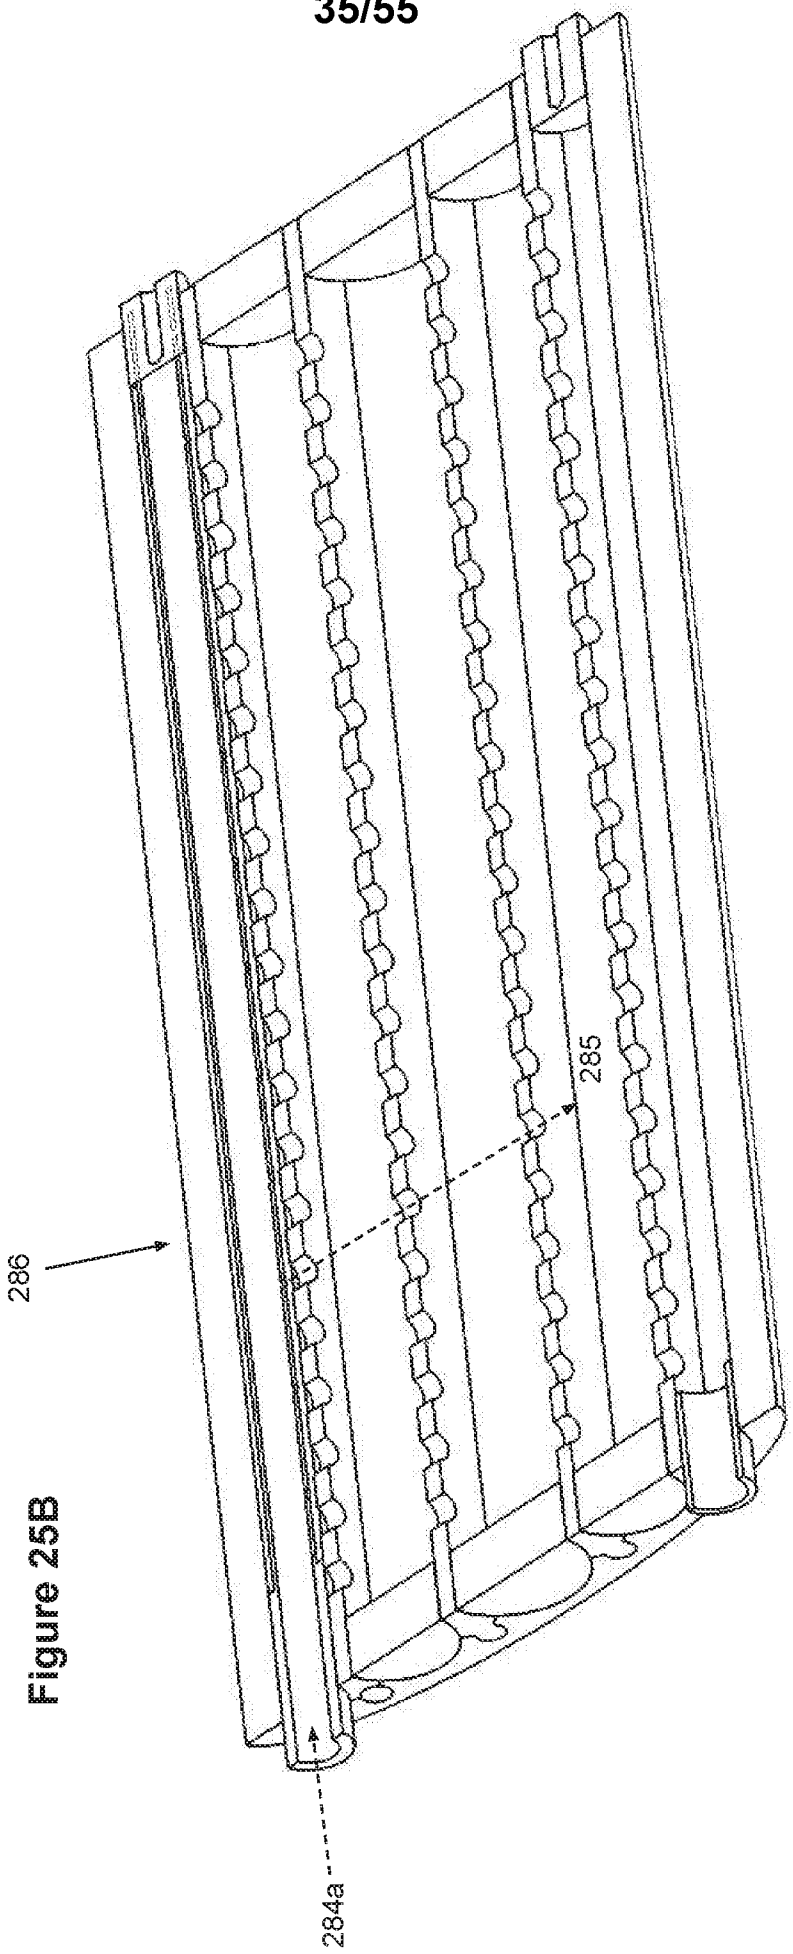


Figure 25B

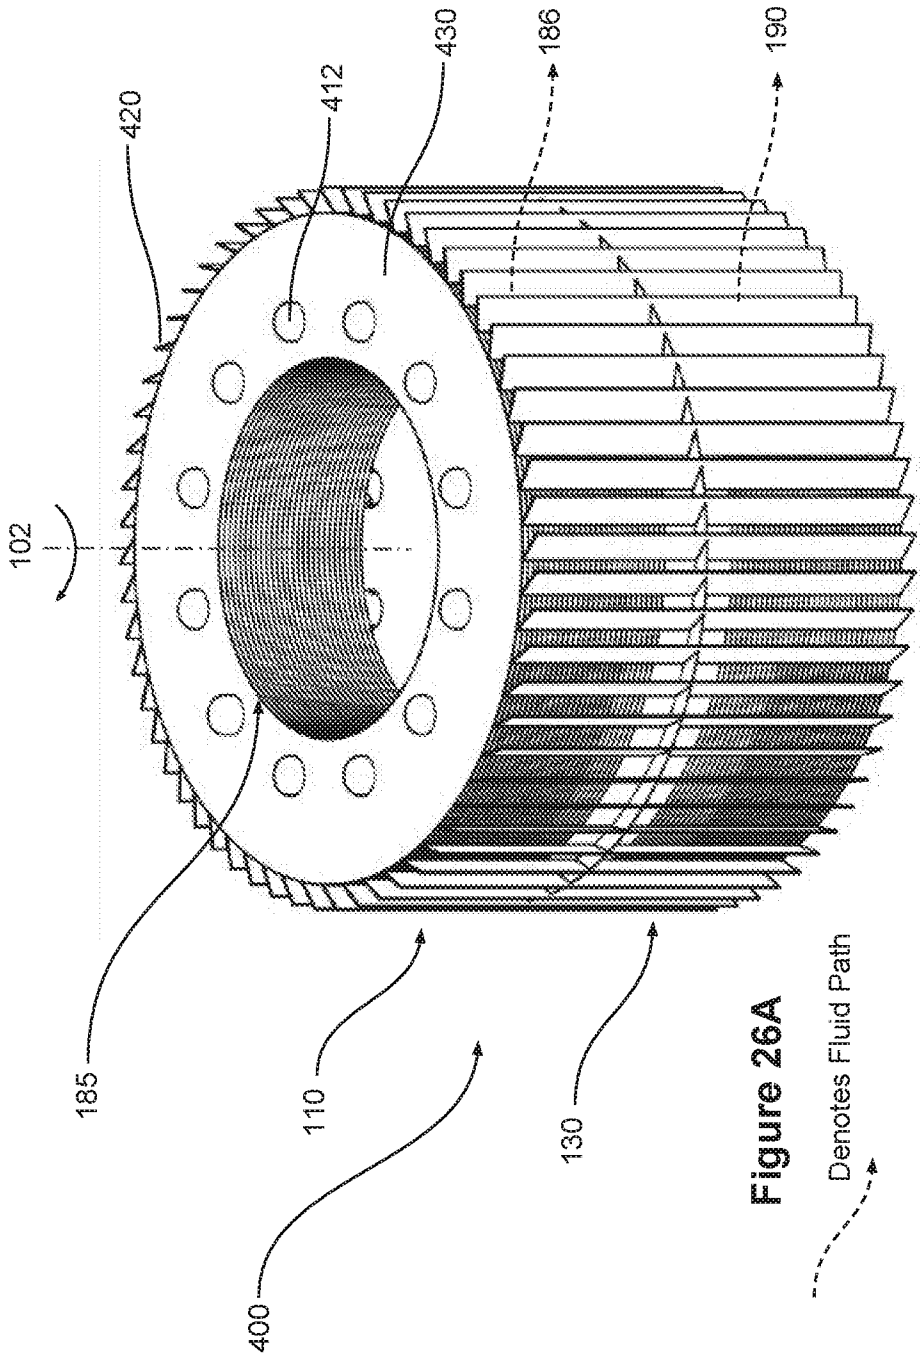


Figure 26A

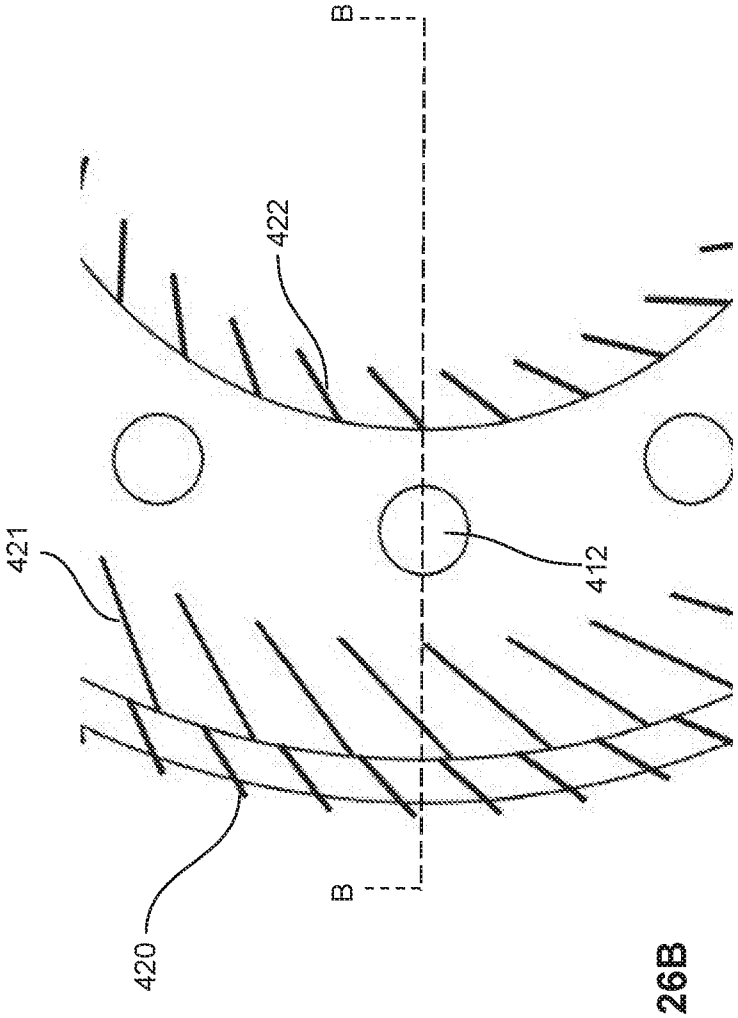


Figure 26B

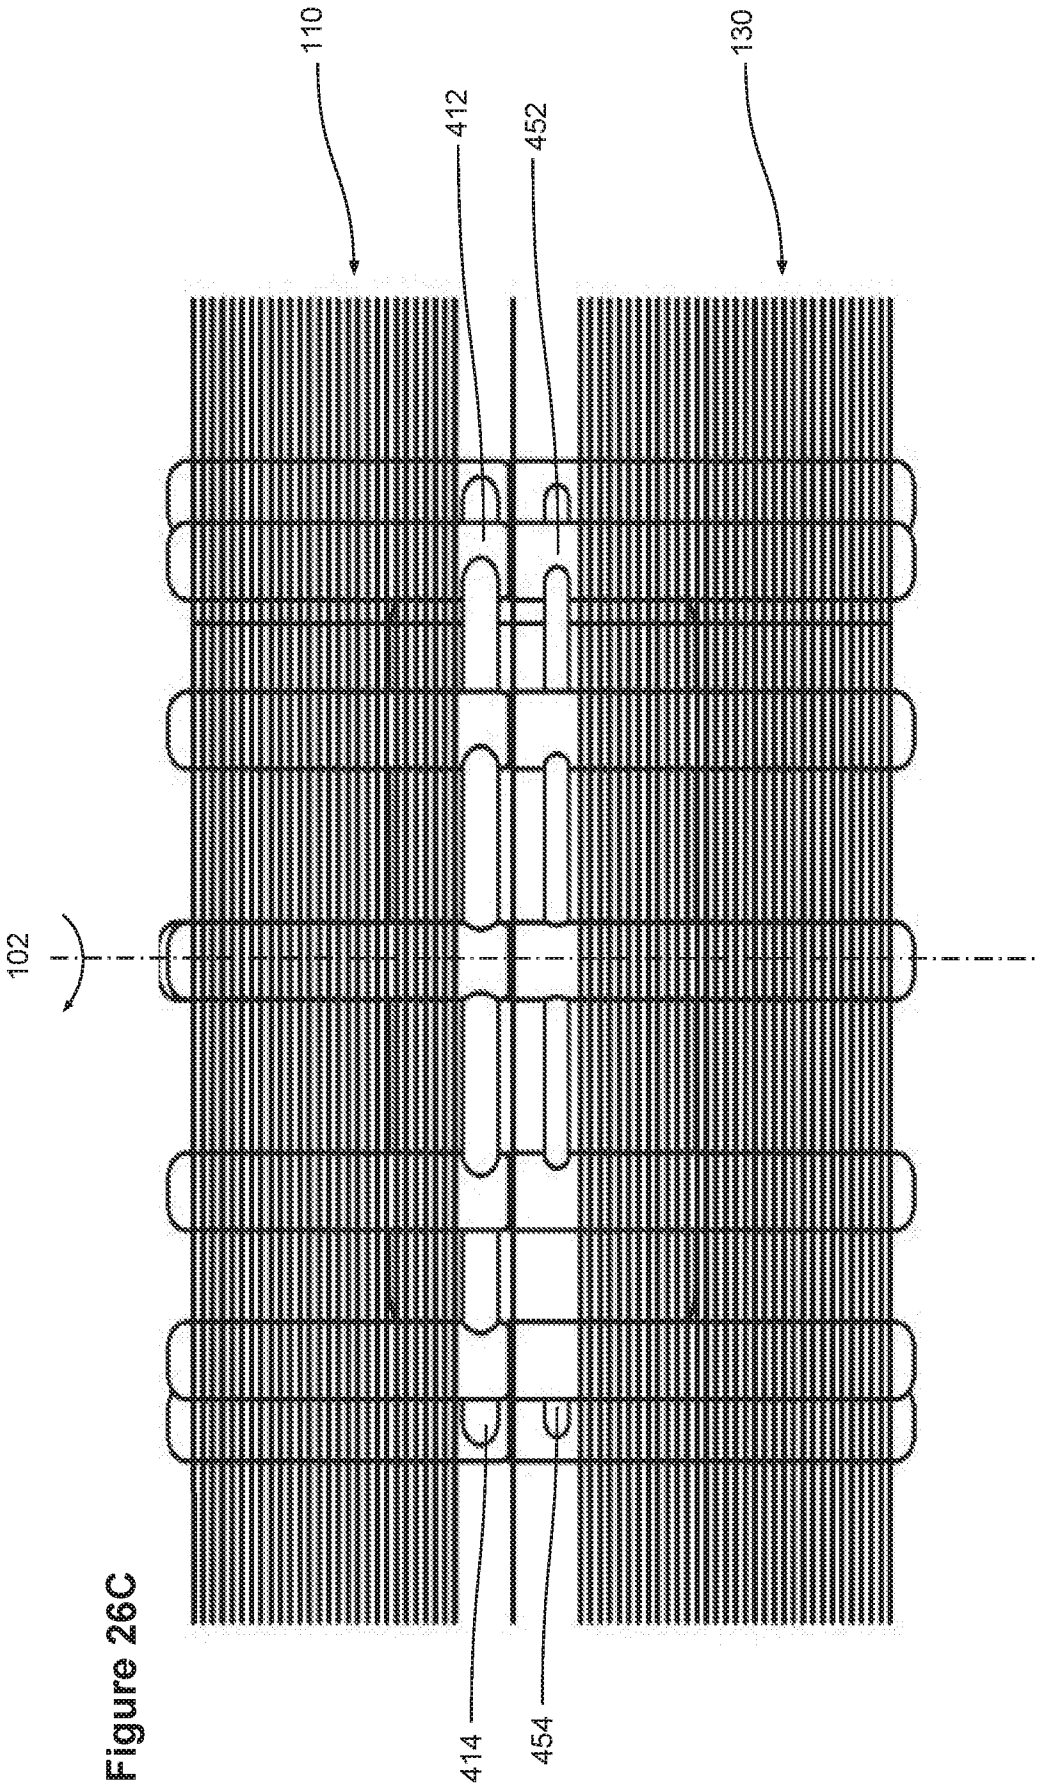


Figure 26C

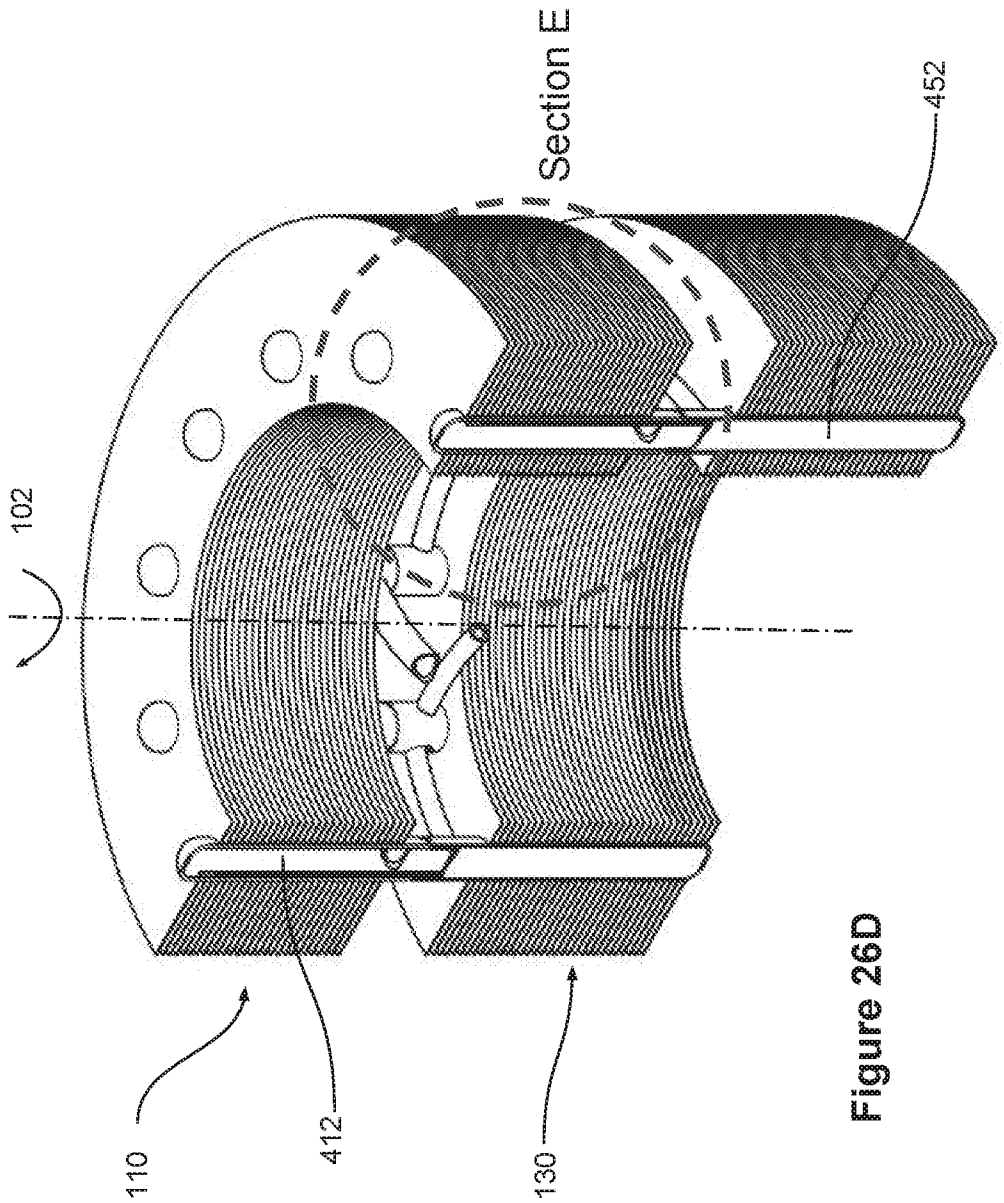


Figure 26D

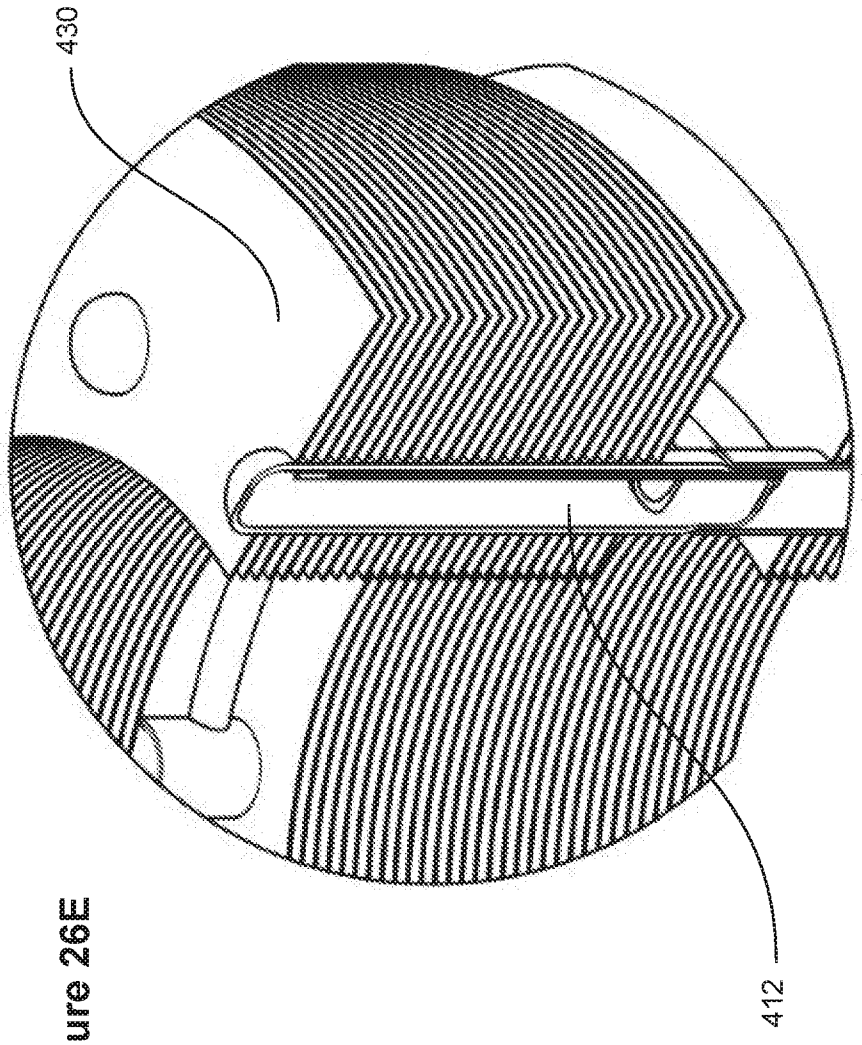


Figure 26E

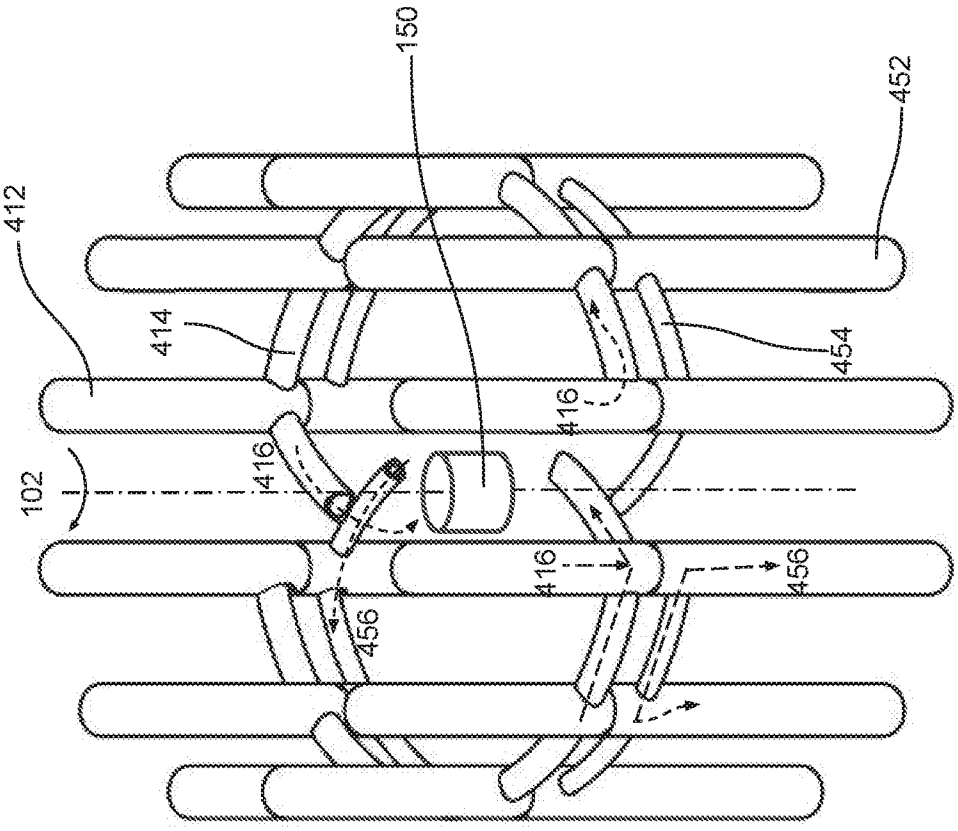


Figure 27A

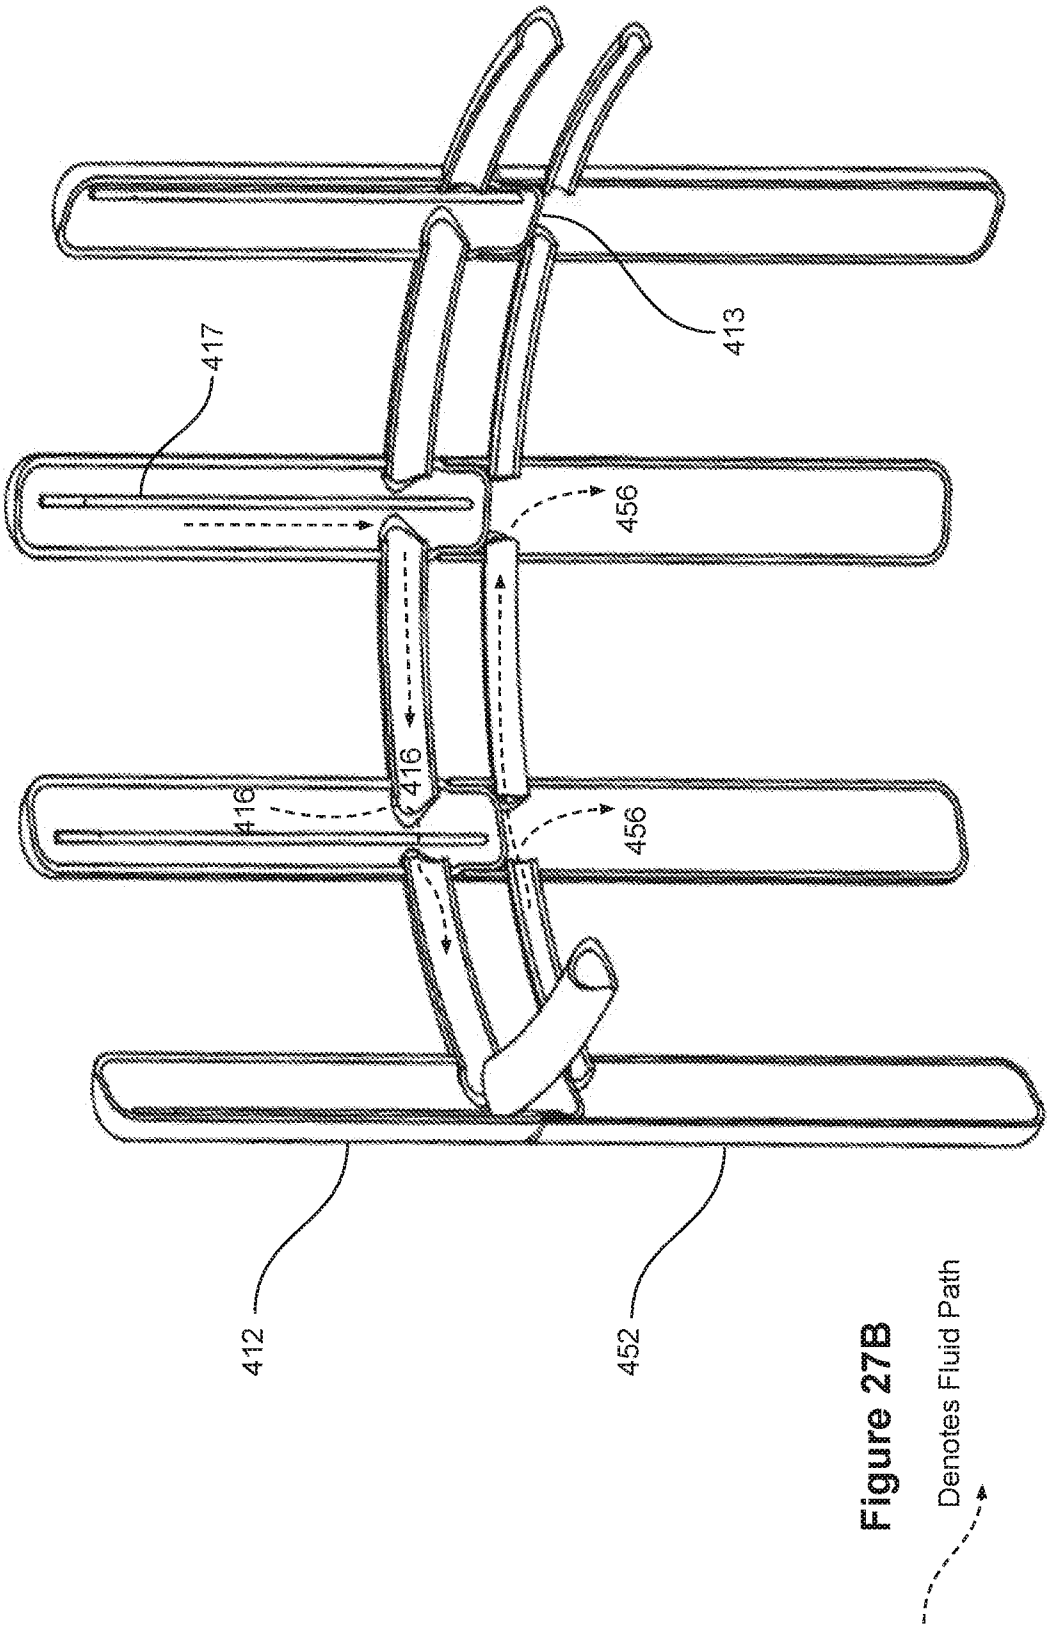


Figure 27B

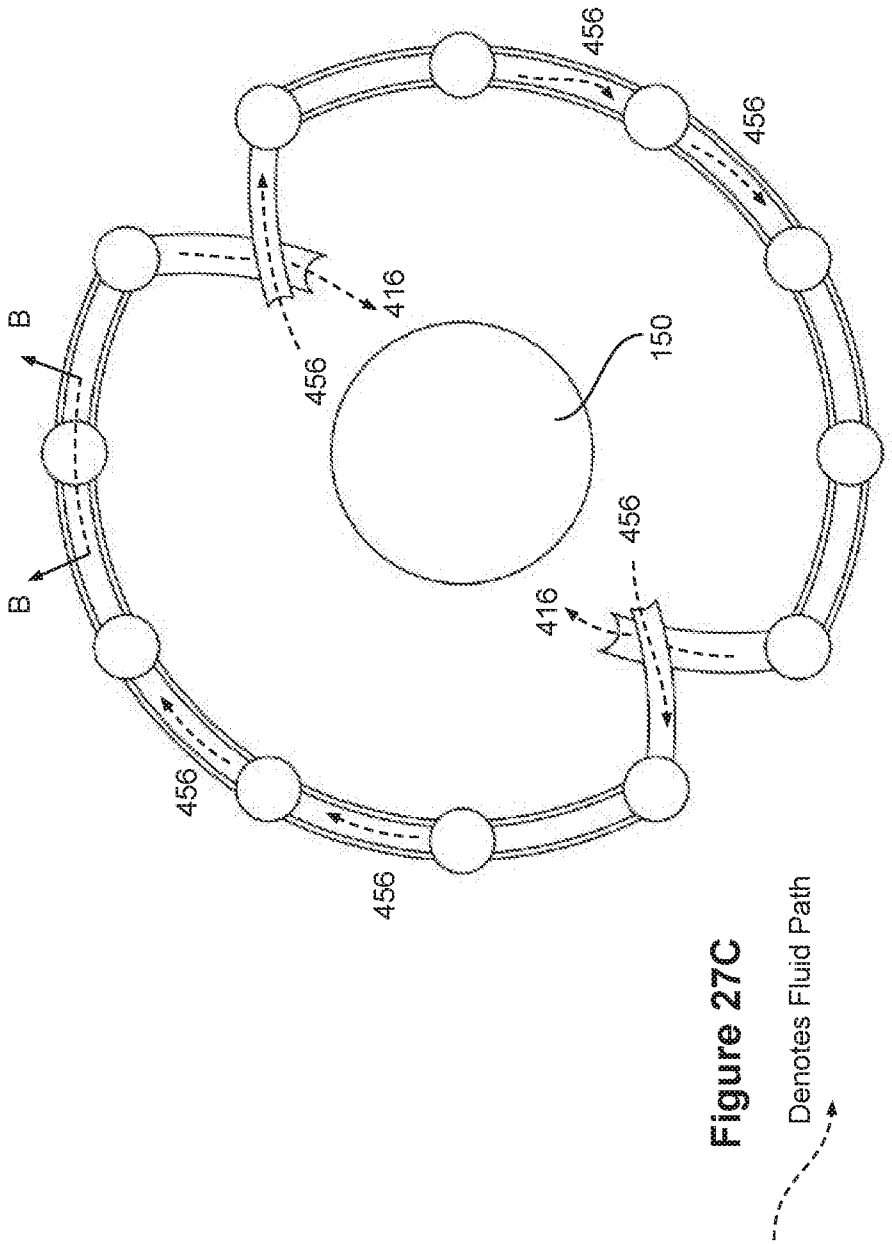


Figure 27C

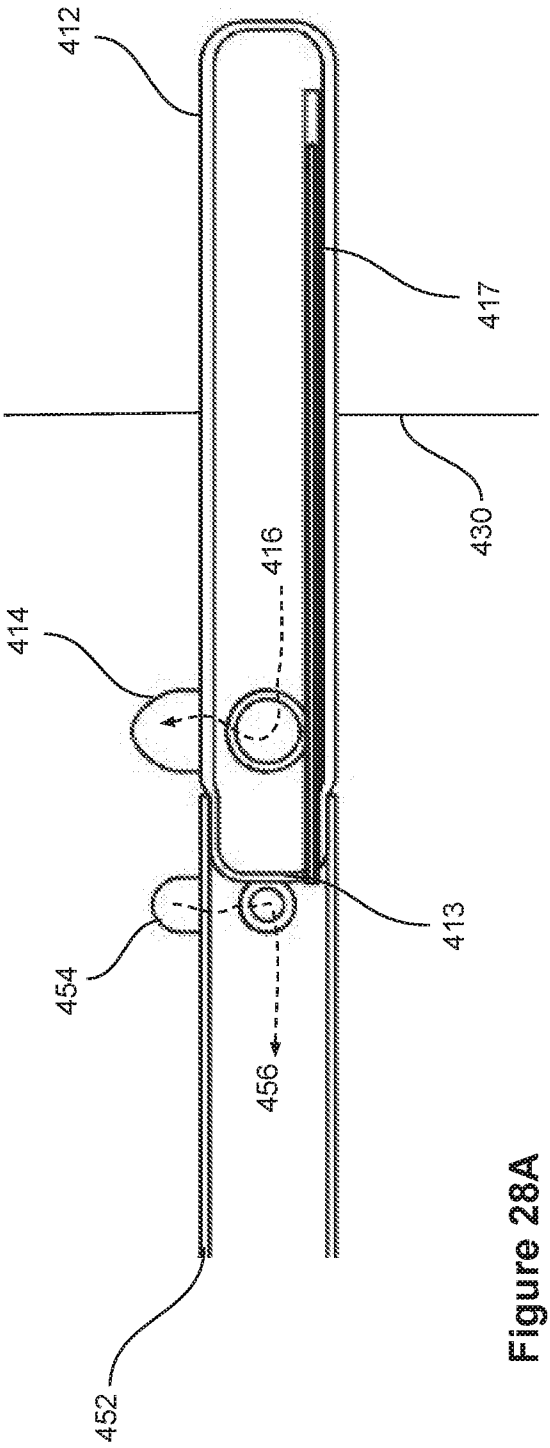


Figure 28A

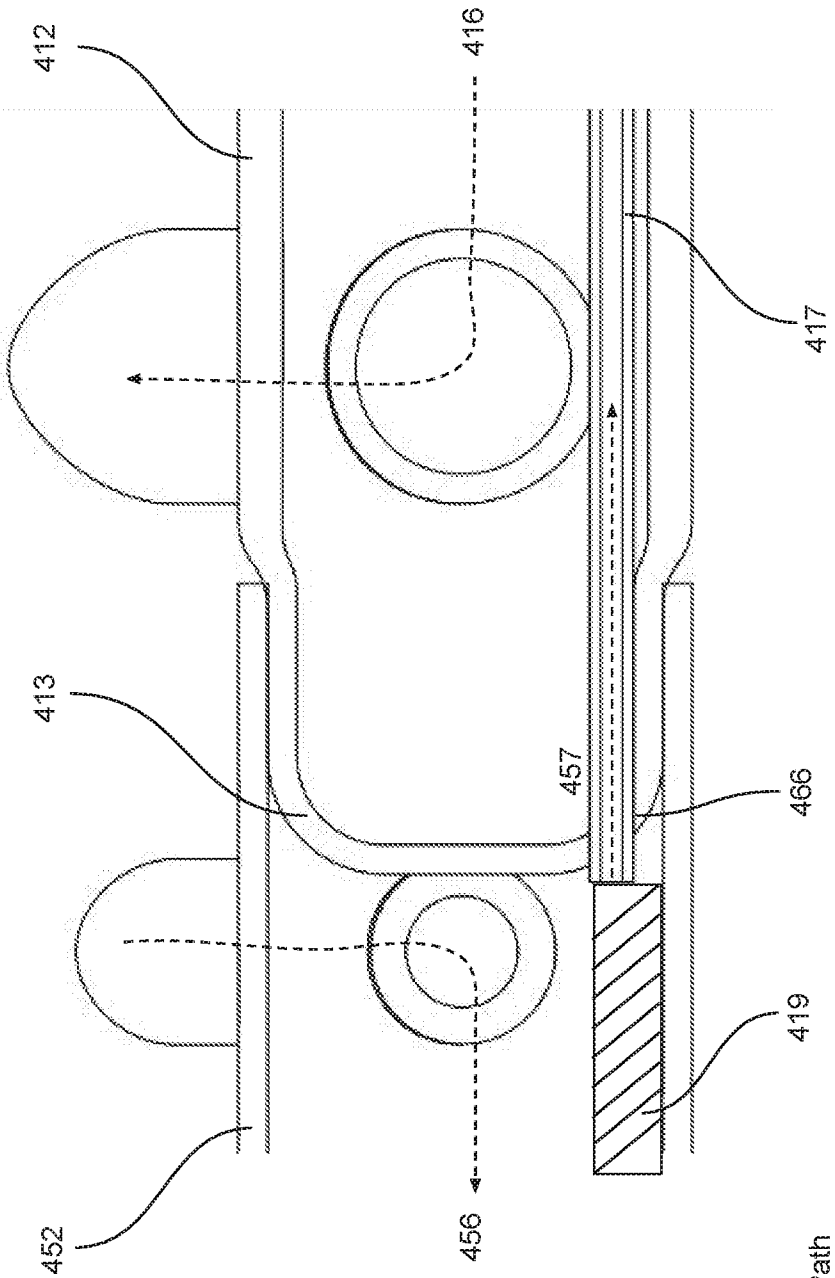


Figure 28B

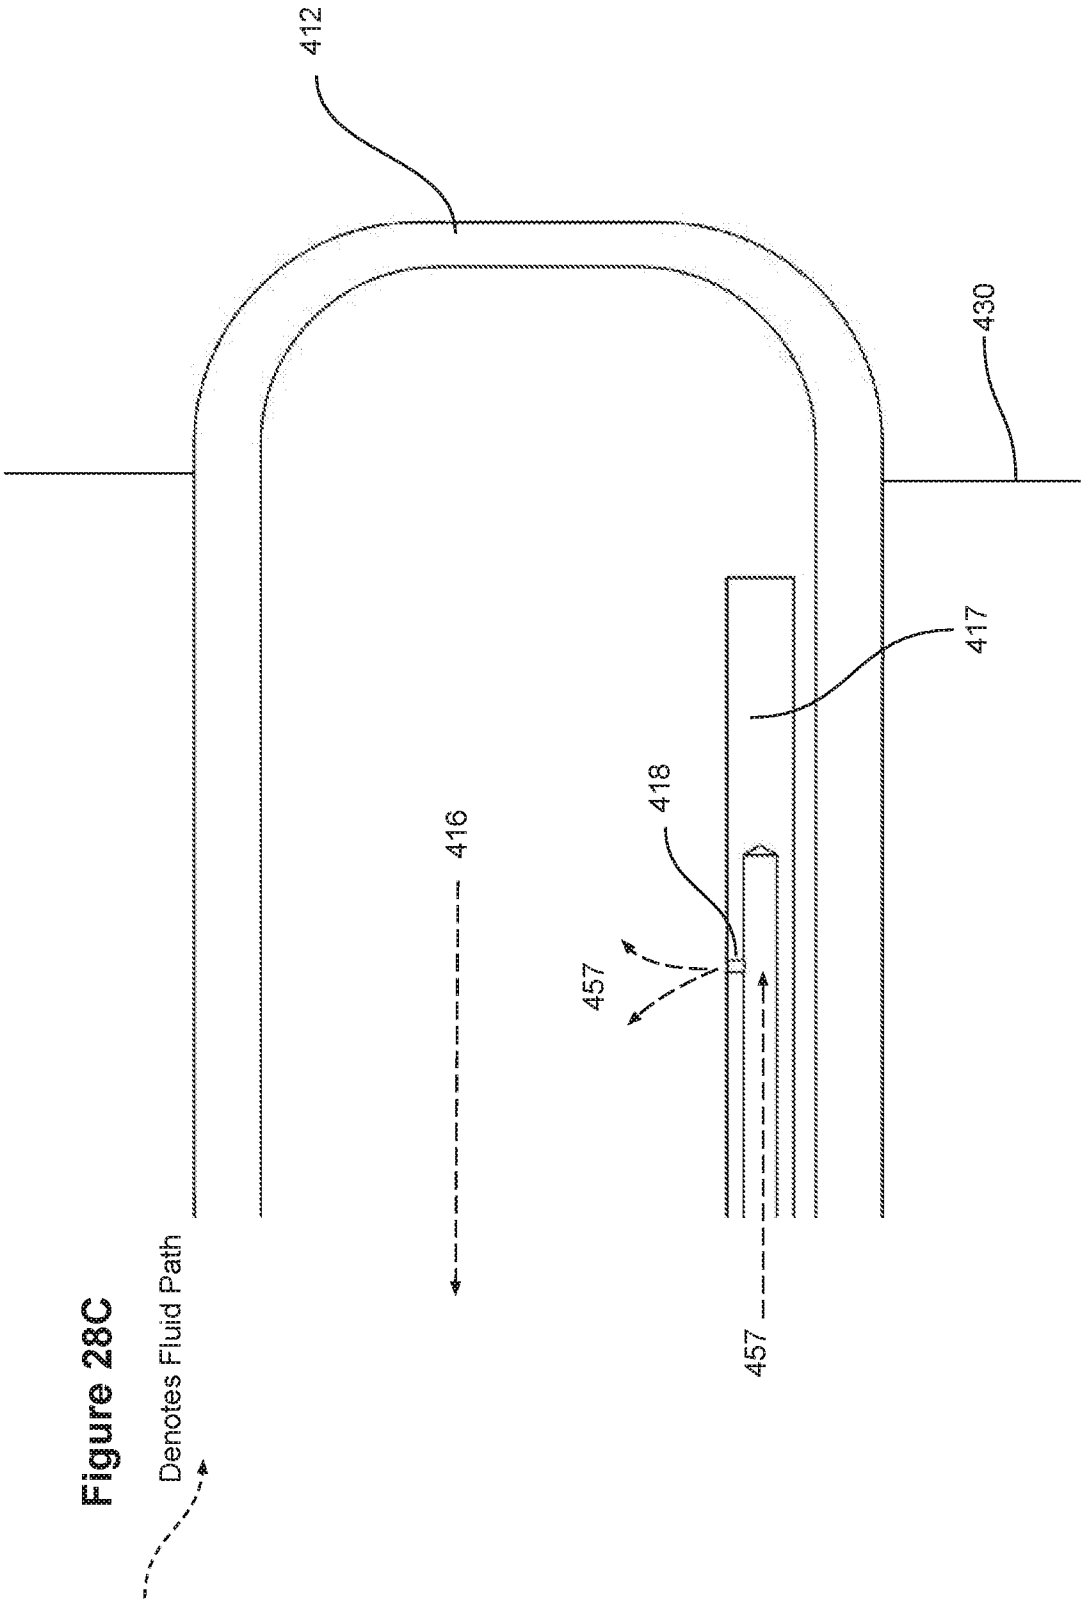


Figure 28C

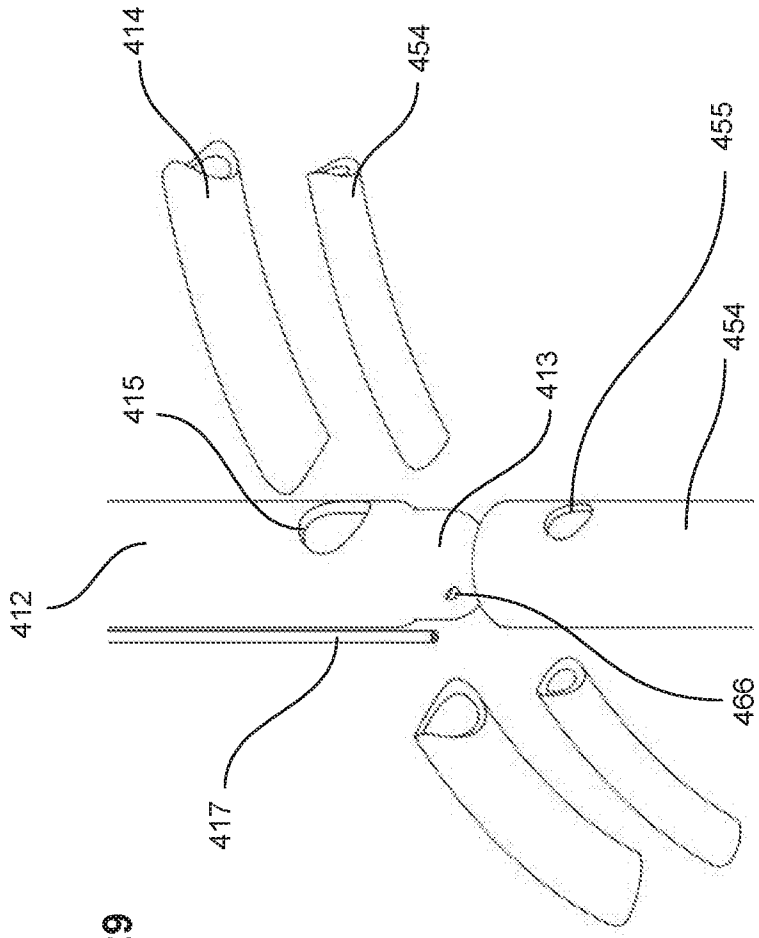


Figure 29

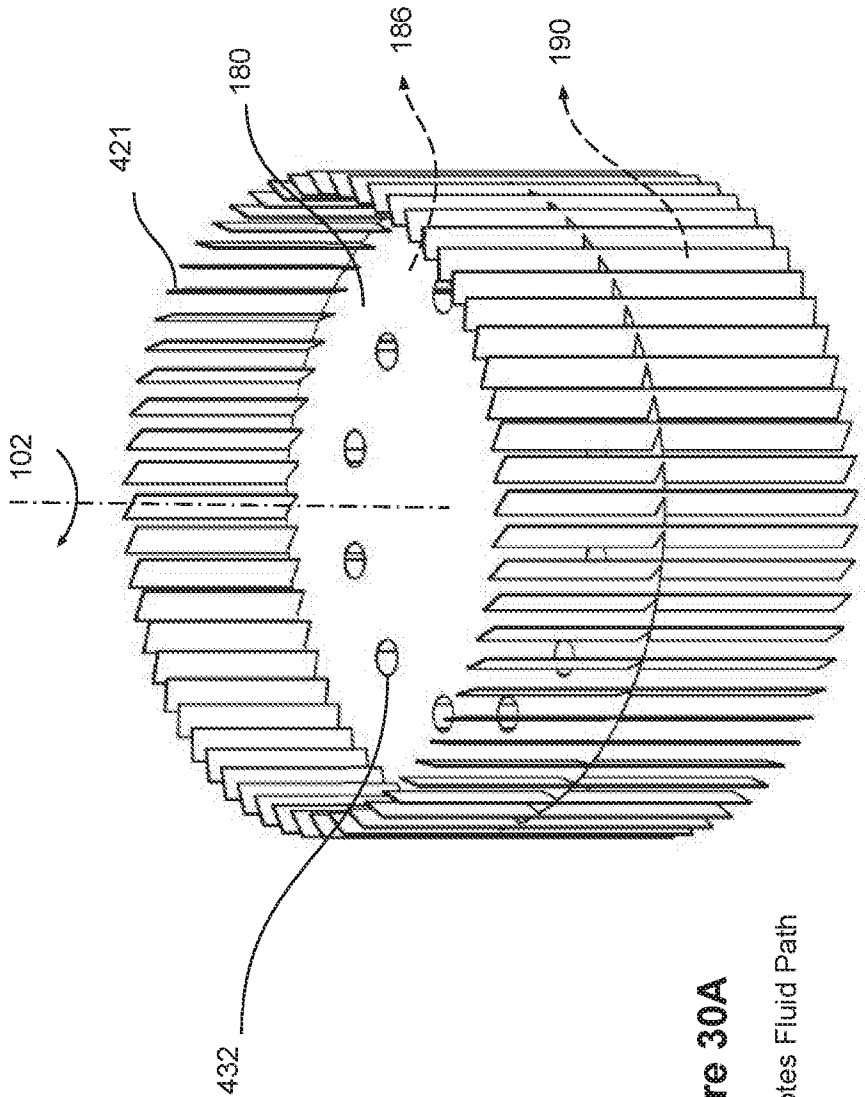


Figure 30A

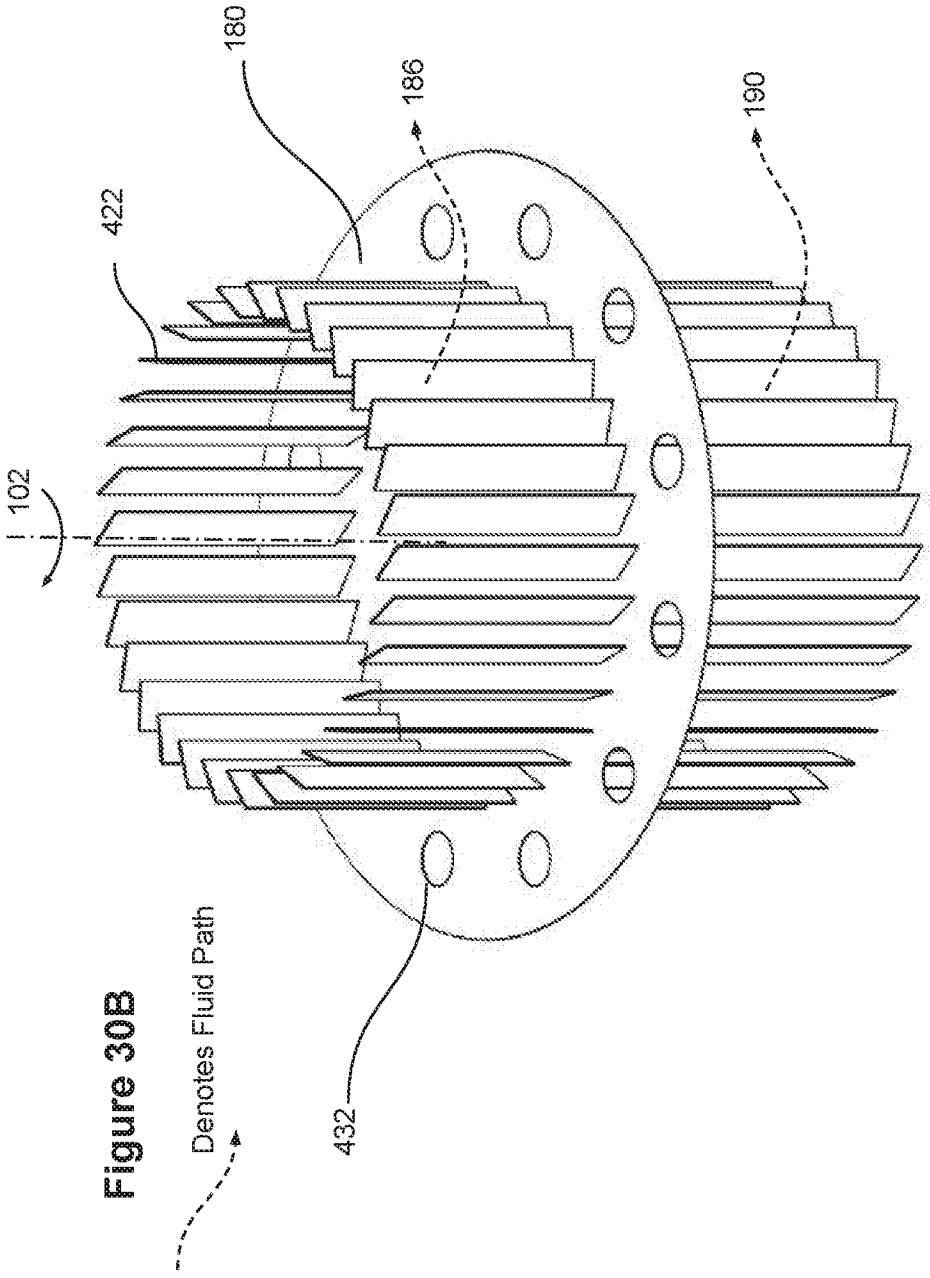


Figure 30B

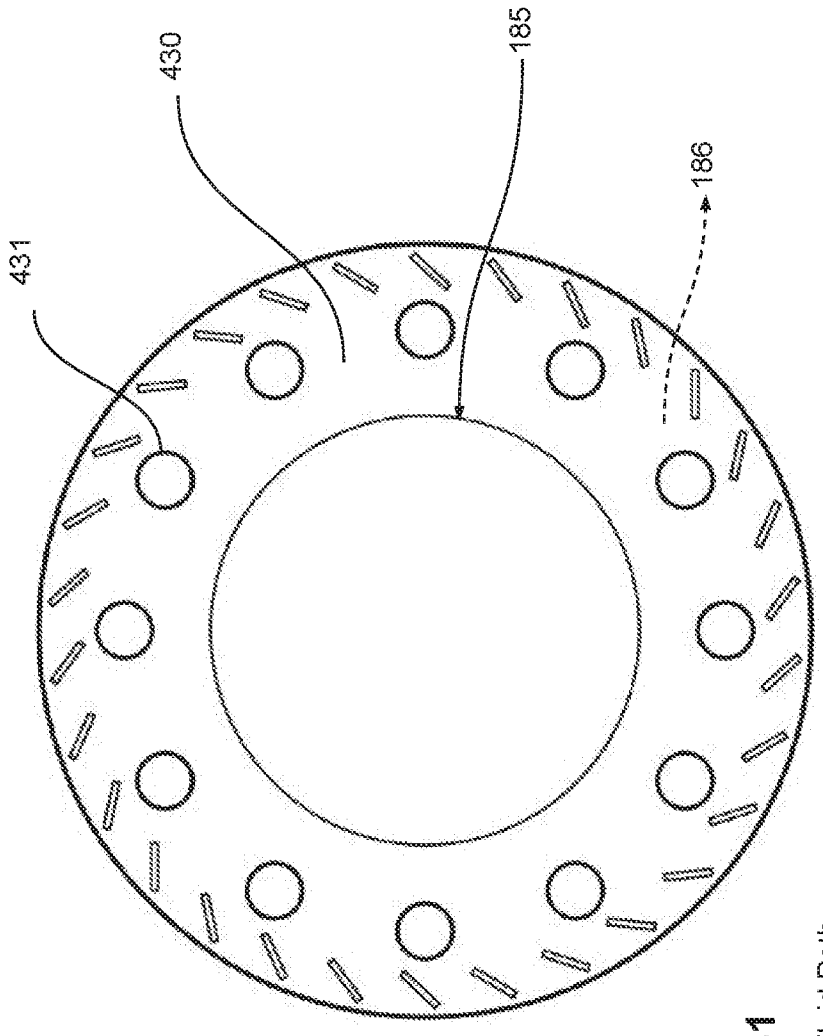


Figure 31

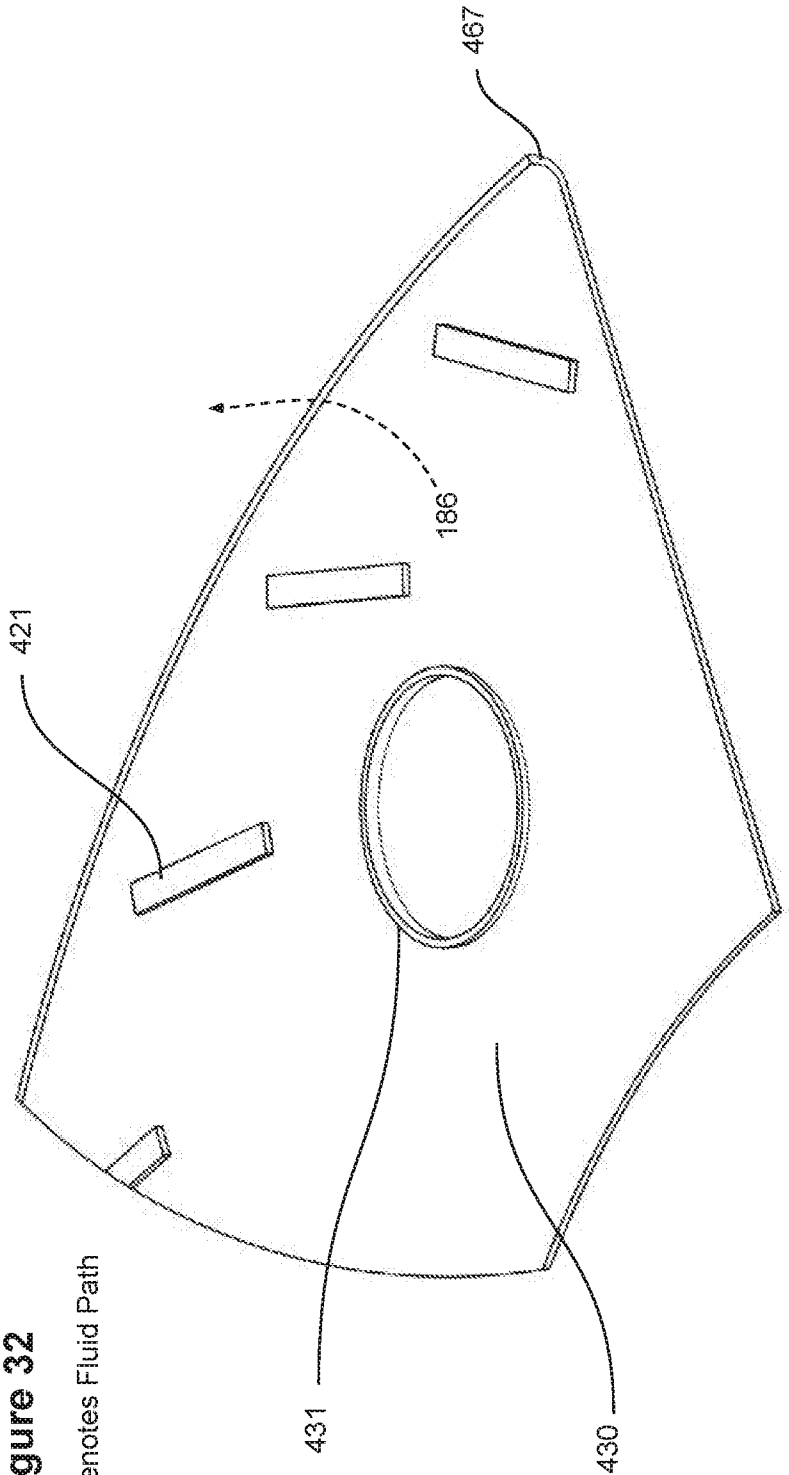


Figure 32

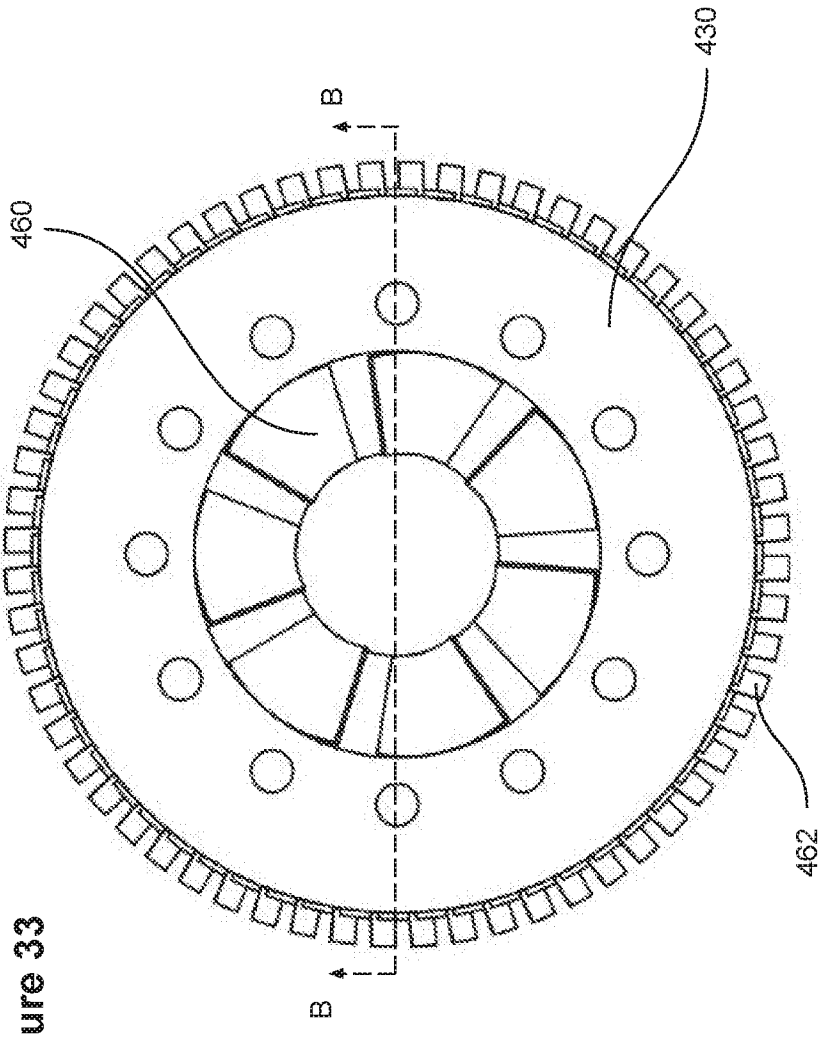


Figure 33

Figure 33A

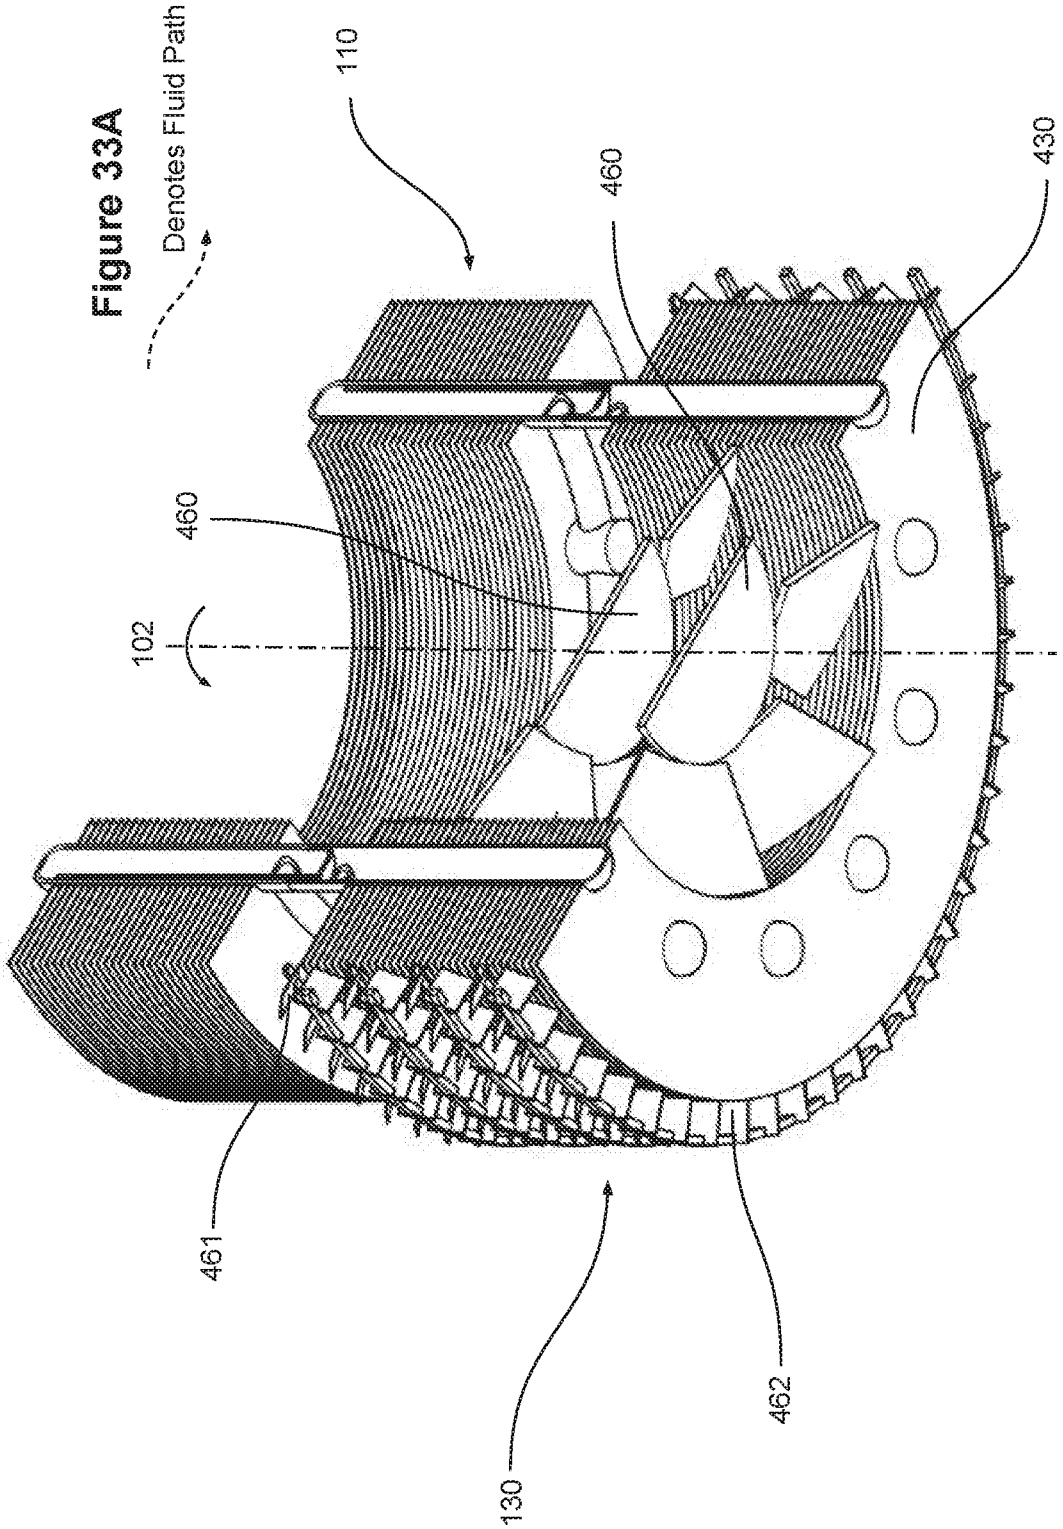
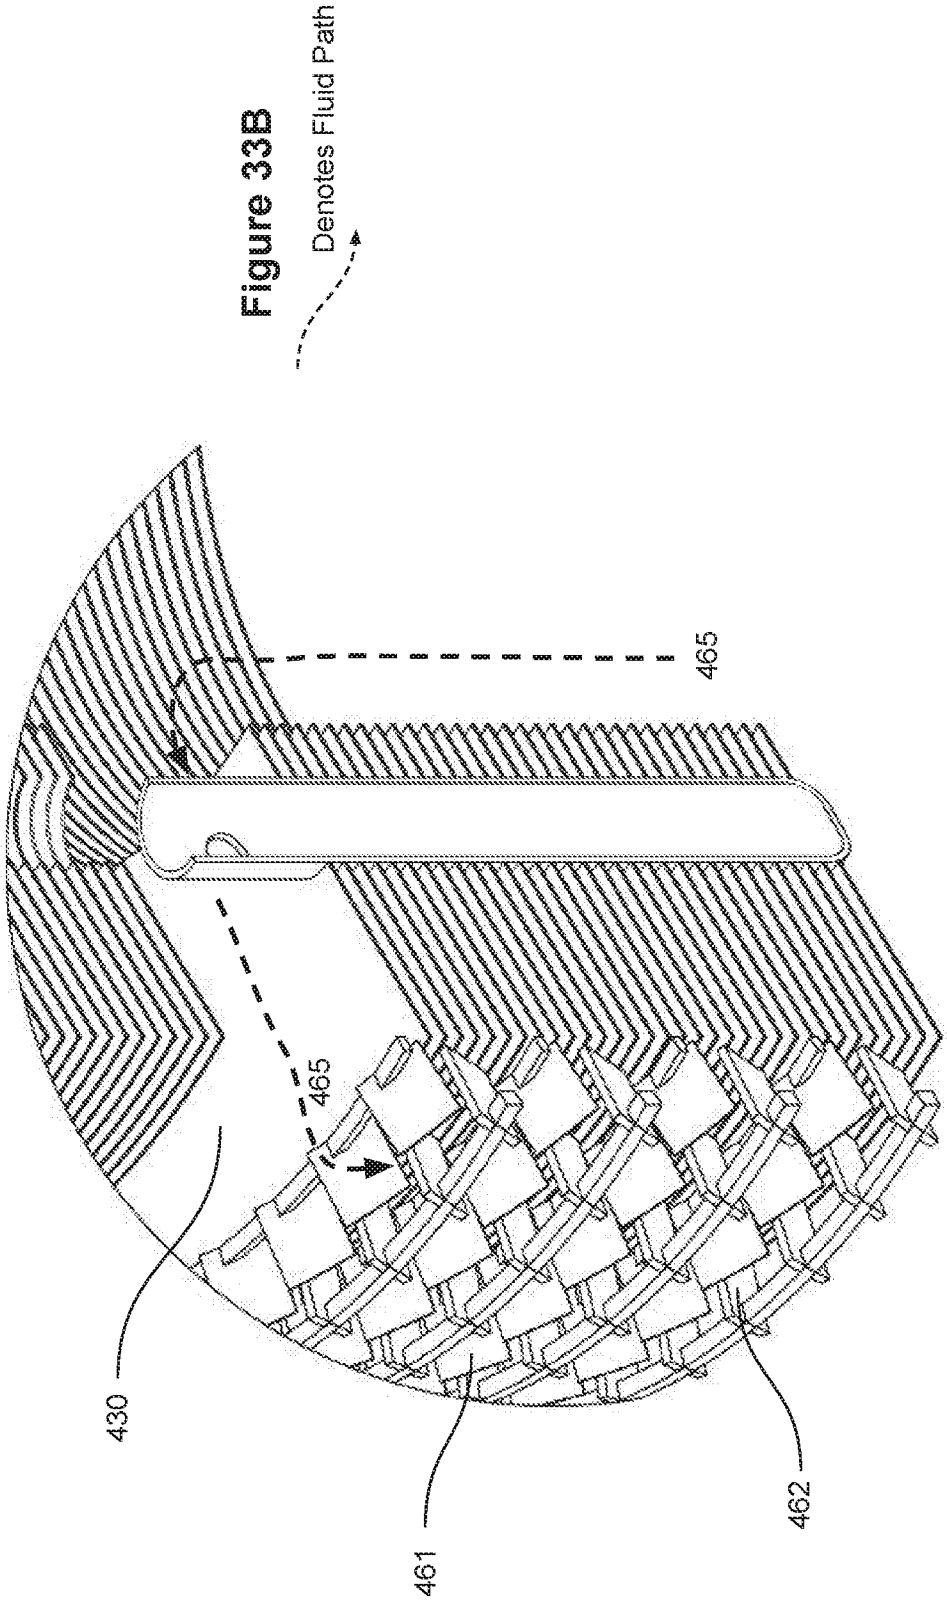


Figure 33B



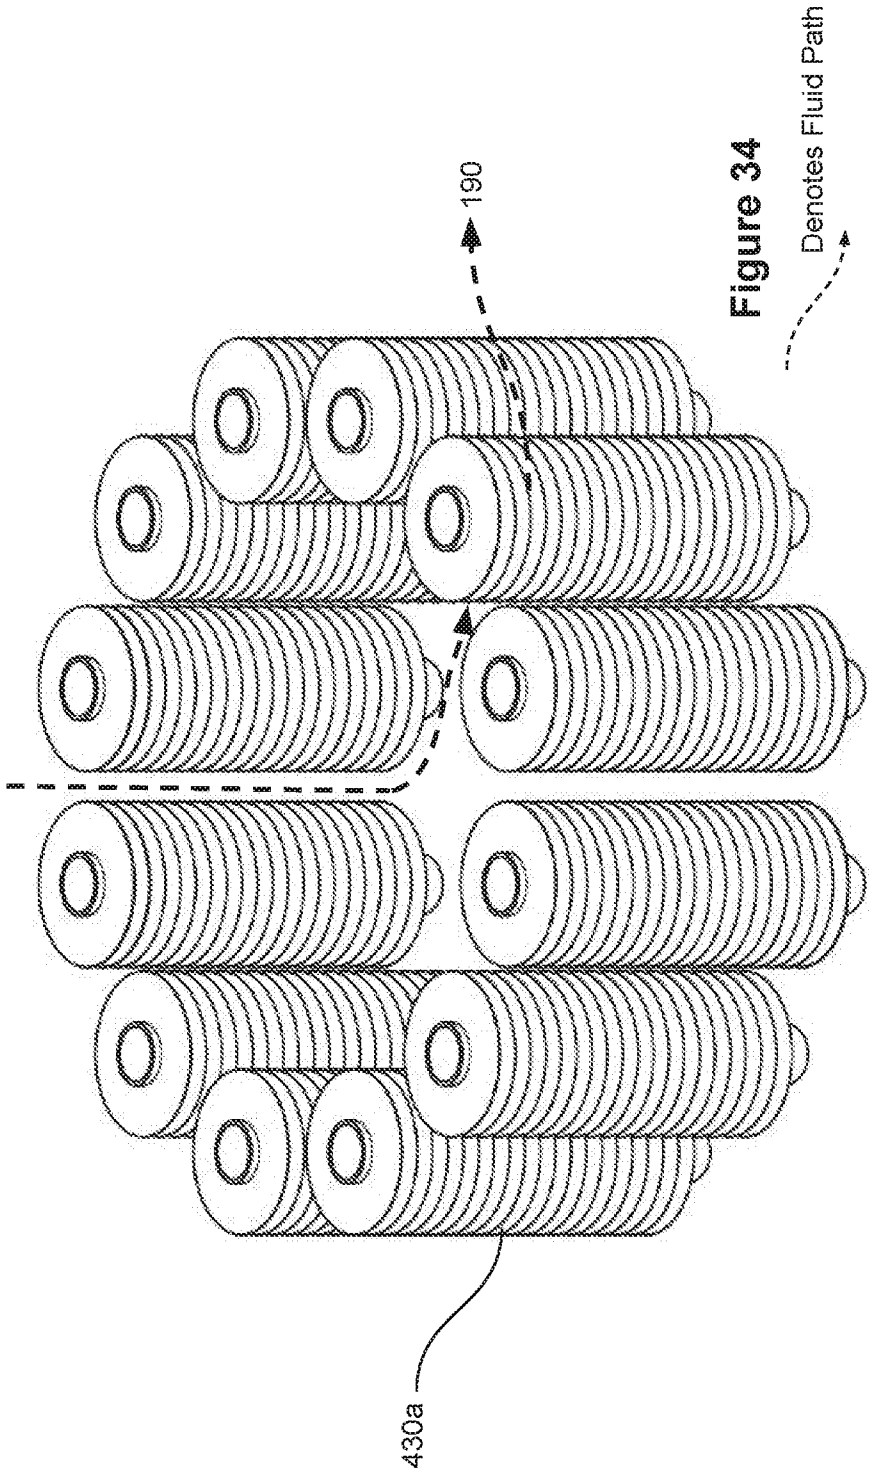


Figure 34

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/019501

A. CLASSIFICATION OF SUBJECT MATTER
INV. F28F5/04 F28D11/02 F25B3/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F28F F28D F25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 347 059 A (NIKOLAUS LAING) 17 October 1967 (1967-10-17)	1-15, 21-24, 29-32
Y A	column 2, line 3 - column 3, line 18; figures 1-7	16,19,20 17,18

Y	US 3 986 852 A (DOERNER WILLIAM A ET AL) 19 October 1976 (1976-10-19) abstract; figures 1,2	16,19,20

X A	DE 17 51 580 A1 (LAING NIKOLAUS) 23 December 1971 (1971-12-23) the whole document	1-11,15, 29-32 12-14, 16-21

	-/--	

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
11 May 2017	20/07/2017

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Leclaire, Thomas

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/019501

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 877 515 A (LAING NIKOLAUS) 15 April 1975 (1975-04-15)	1-11,15, 29
A	column 3, line 51 - column 10, line 24; figures 1-20	12,16,21

X	US 3 888 304 A (LAING NIKOLAUS) 10 June 1975 (1975-06-10)	1-6,10, 15,29
A	column 2, line 8 - column 3, line 17; figures 1-2	12,16,21

X	US 3 972 203 A (ESKELI MICHAEL) 3 August 1976 (1976-08-03)	1-5,7,8, 13,15
A	column 2, line 45 - column 3, line 12; figures 3,4	12,16

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/019501

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-24, 29-32

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-24, 29-32

   rotary heat exchanger / rotary heat pump

   ---

2. claims: 25-28, 33-37

   rotary heat exchanger apparatus with turbine and generator, power generator using an ORC with rotary heat pump, and solar power generation system comprising a rotary heat pump and a turbine

   ---

3. claim: 38

   atmospheric condensation device with a rotary heat exchanger including a hydrophobic coating

   ---

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2017/019501

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3347059 A	17-10-1967	CH 446410 A	15-11-1967
		FR 1424068 A	07-01-1966
		GB 1110721 A	24-04-1968
		US 3347059 A	17-10-1967
US 3986852 A	19-10-1976	NONE	
DE 1751580 A1	23-12-1971	DE 1426976 A1	30-10-1969
		DE 1751580 A1	23-12-1971
US 3877515 A	15-04-1975	NONE	
US 3888304 A	10-06-1975	NONE	
US 3972203 A	03-08-1976	NONE	