



US 20190141196A1

(19) **United States**(12) **Patent Application Publication**  
**Cheatham, III et al.**(10) **Pub. No.: US 2019/0141196 A1**(43) **Pub. Date: May 9, 2019**(54) **SYSTEMS AND METHODS FOR  
POSITIONING A USER****Publication Classification**(71) Applicant: **Elwha LLC**, Bellevue, WA (US)(72) Inventors: **Jesse R. Cheatham, III**, Seattle, WA (US); **Roderick A. Hyde**, Redmond, WA (US); **Muriel Y. Ishikawa**, Livermore, CA (US); **Jordin T. Kare**, San Jose, CA (US); **Craig J. Mundie**, Seattle, WA (US); **Nathan P. Myhrvold**, Bellevue, WA (US); **Robert C. Petroski**, Seattle, WA (US); **Eric D. Rudder**, Mercer Island, WA (US); **Desney S. Tan**, Kirkland, WA (US); **Clarence T. Tegreene**, Mercer Island, WA (US); **Charles Whitmer**, North Bend, WA (US); **Andrew Wilson**, Seattle, WA (US); **Jeannette M. Wing**, Bellevue, WA (US); **Lowell L. Wood, JR.**, Bellevue, WA (US); **Victoria Y.H. Wood**, Livermore, CA (US)(51) **Int. Cl.**

**H04M 11/02** (2006.01)  
**H04R 27/00** (2006.01)  
**H04M 3/56** (2006.01)  
**H04M 3/436** (2006.01)  
**H04M 3/42** (2006.01)  
**H04M 3/20** (2006.01)  
**H04M 1/60** (2006.01)  
**H04L 12/28** (2006.01)  
**G06F 3/01** (2006.01)  
**H04R 1/32** (2006.01)  
**G10K 11/178** (2006.01)  
**H04W 4/33** (2006.01)  
**H04S 7/00** (2006.01)

(52) **U.S. Cl.**

CPC ..... **H04M 11/025** (2013.01); **G06F 3/167** (2013.01); **H04M 3/56** (2013.01); **H04M 3/436** (2013.01); **H04M 3/42348** (2013.01); **H04M 3/205** (2013.01); **H04M 1/6033** (2013.01); **H04L 12/282** (2013.01); **G06F 3/017** (2013.01); **H04R 1/326** (2013.01); **G10K 11/178** (2013.01); **H04W 4/33** (2018.02); **H04S 7/00** (2013.01); **H04R 1/323** (2013.01); **G06F 3/011** (2013.01); **H04M 2203/60** (2013.01); **H04S 2420/01** (2013.01); **H04R 2499/11** (2013.01); **H04M 2203/2072** (2013.01); **H04R 27/00** (2013.01)


(21) Appl. No.: **16/175,600**(22) Filed: **Oct. 30, 2018****Related U.S. Application Data**

(63) Continuation of application No. 14/848,177, filed on Sep. 8, 2015, now Pat. No. 10,116,804, which is a continuation of application No. 14/522,452, filed on Oct. 23, 2014, now abandoned, which is a continuation-in-part of application No. 14/461,106, filed on Aug. 15, 2014, now Pat. No. 9,779,593, which is a continuation-in-part of application No. 14/280,466, filed on May 16, 2014, now abandoned, which is a continuation-in-part of application No. 14/254,704, filed on Apr. 16, 2014, now Pat. No. 9,565,284, which is a continuation-in-part of application No. 14/174,650, filed on Feb. 6, 2014, now Pat. No. 9,131,068.

(57)

**ABSTRACT**

A hands-free intercom may include a user-tracking sensor, a directional microphone, a directional sound emitter, a display device, and/or a communication interface. The user-tracking sensor may determine a location of a user so the directional microphone can measure vocal emissions by the user and the directional sound emitter can deliver audio to the user. The hands-free intercom may provide privacy to the user. The hands-free intercom may prevent an eavesdropper from hearing the user's vocal emissions, for example, by canceling the vocal emissions at the eavesdropper's ear. The directional sound emitter may deliver out-of-phase sound to cancel the vocal emissions. The hands-free intercom may also, or instead, cancel ambient noise at the user's ear. The hands-free intercom may measure or predict a filtration of the sound to be canceled and compensate for the filtration when canceling the sound.

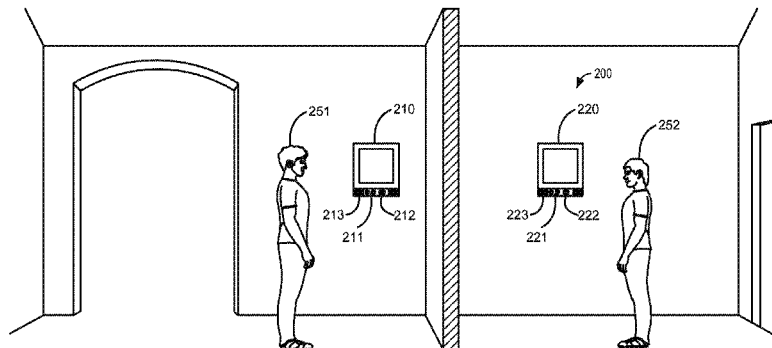

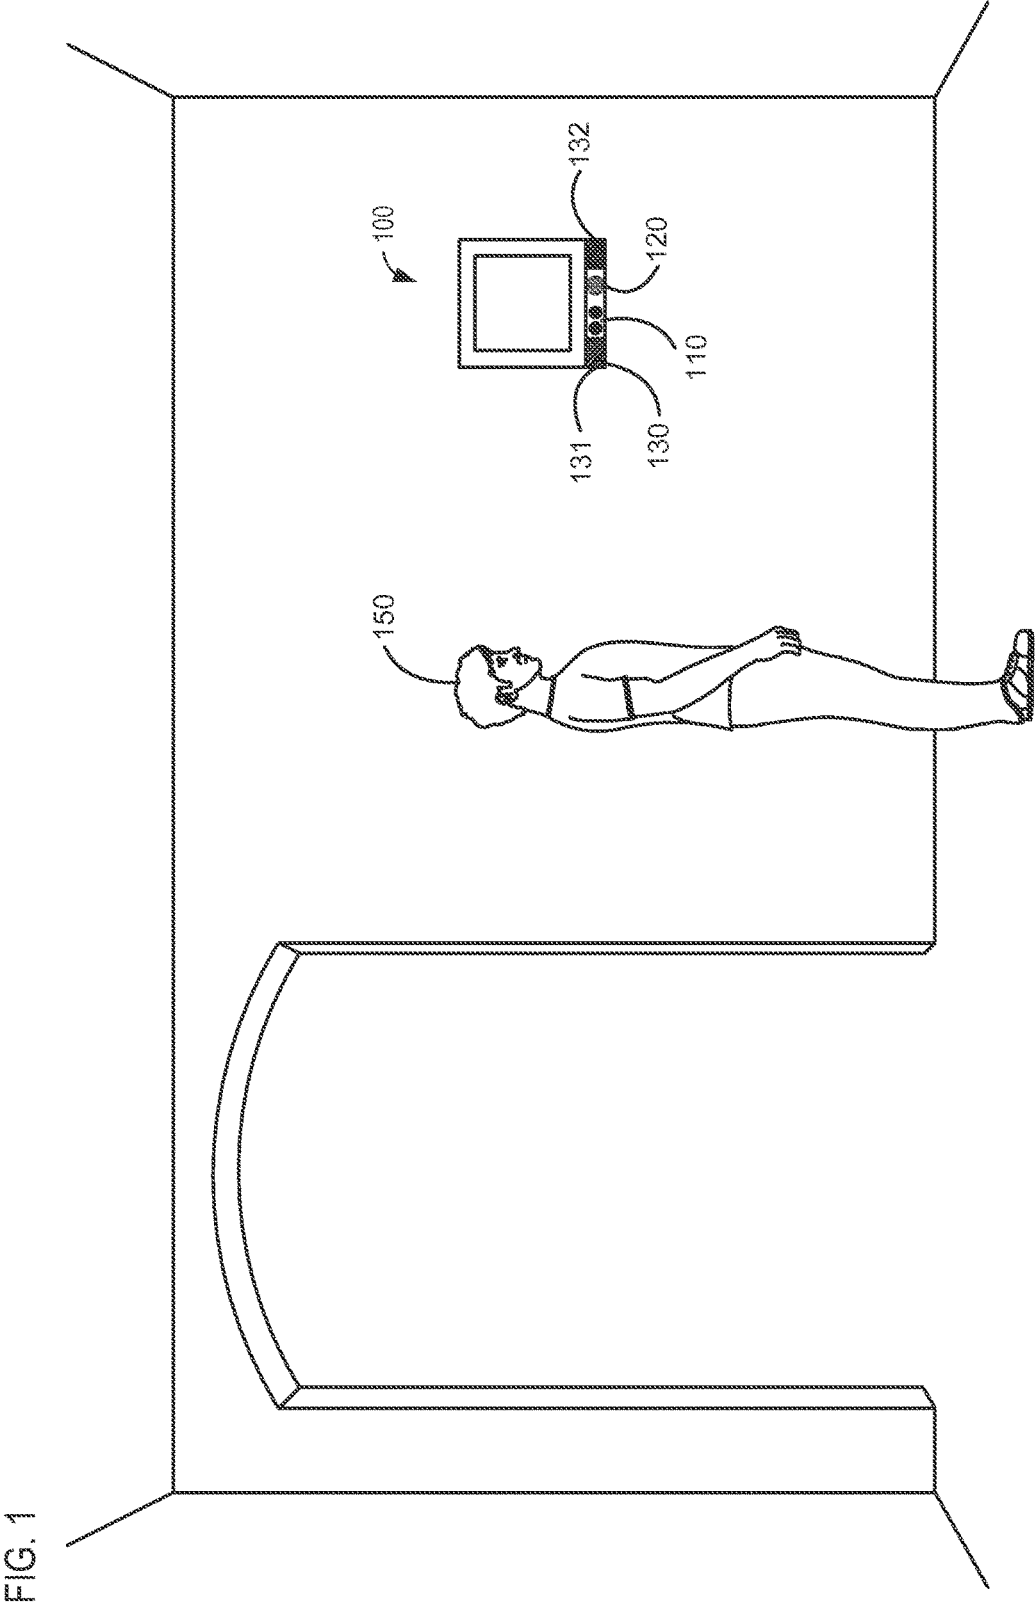
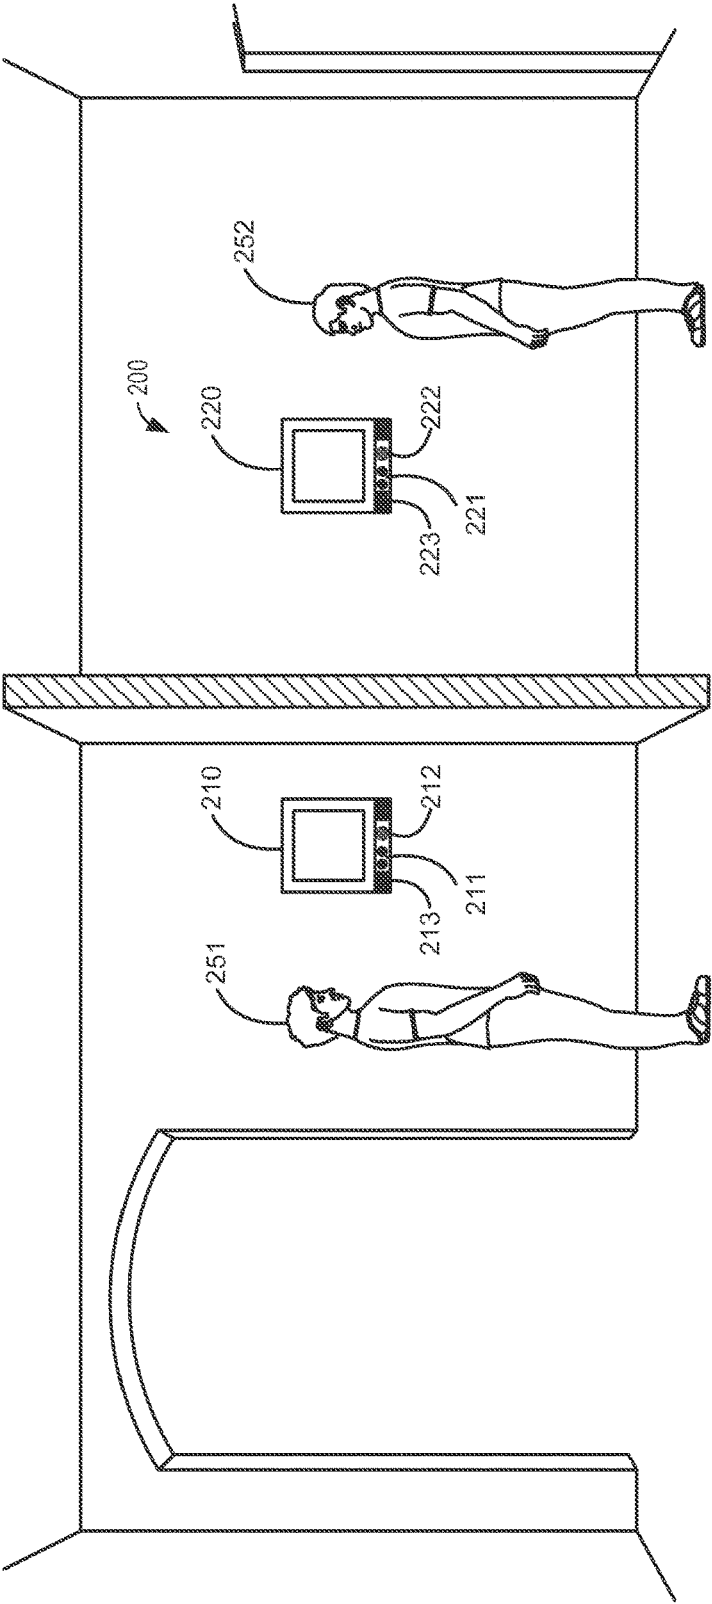


FIG. 2



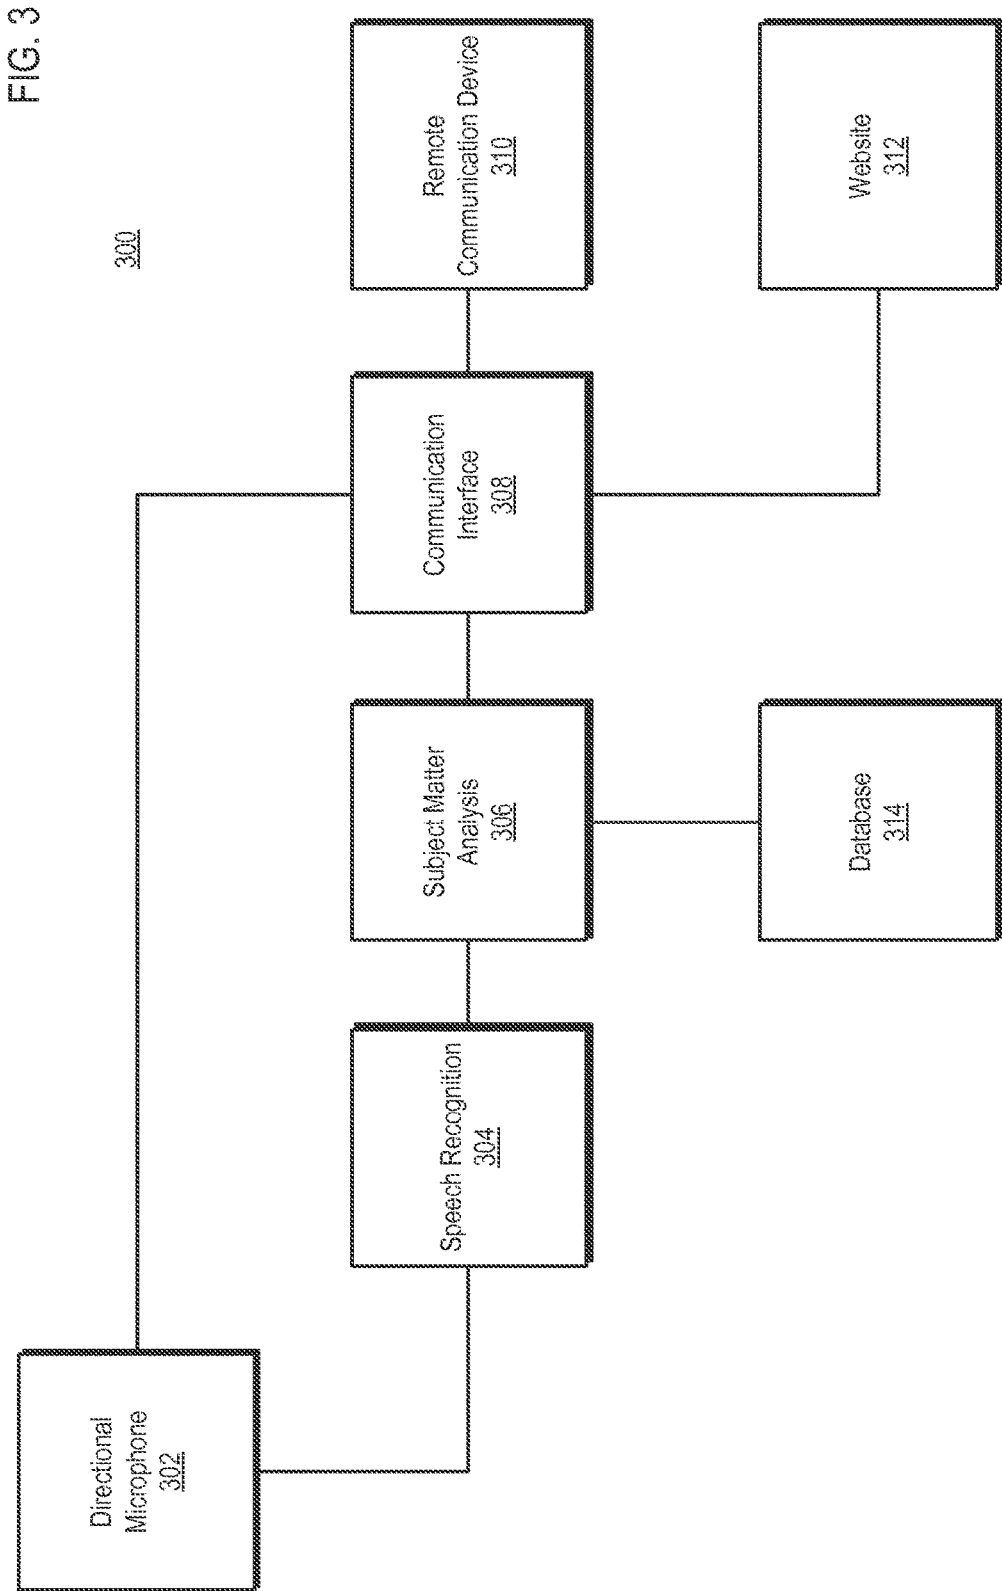


FIG. 4

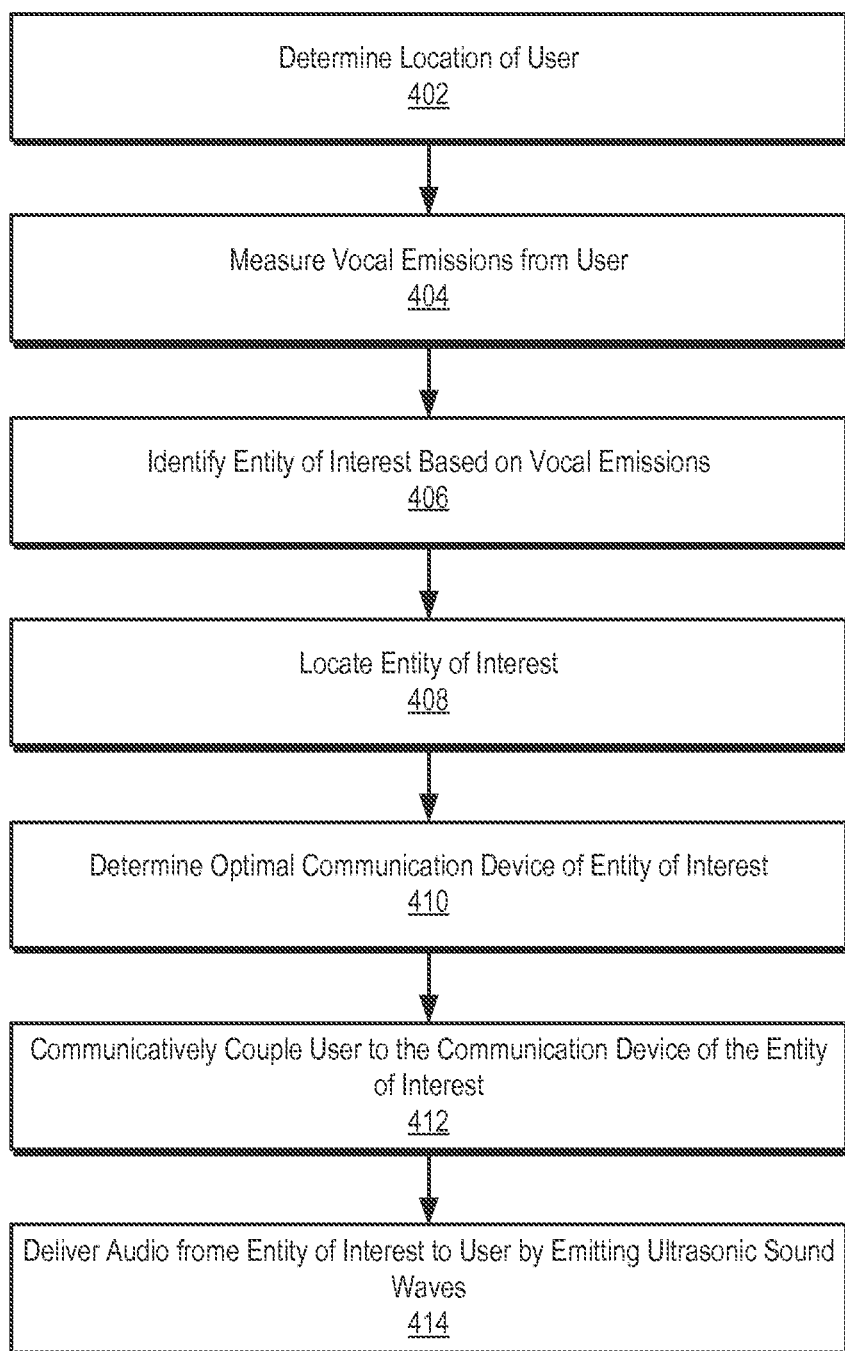
400

FIG. 5

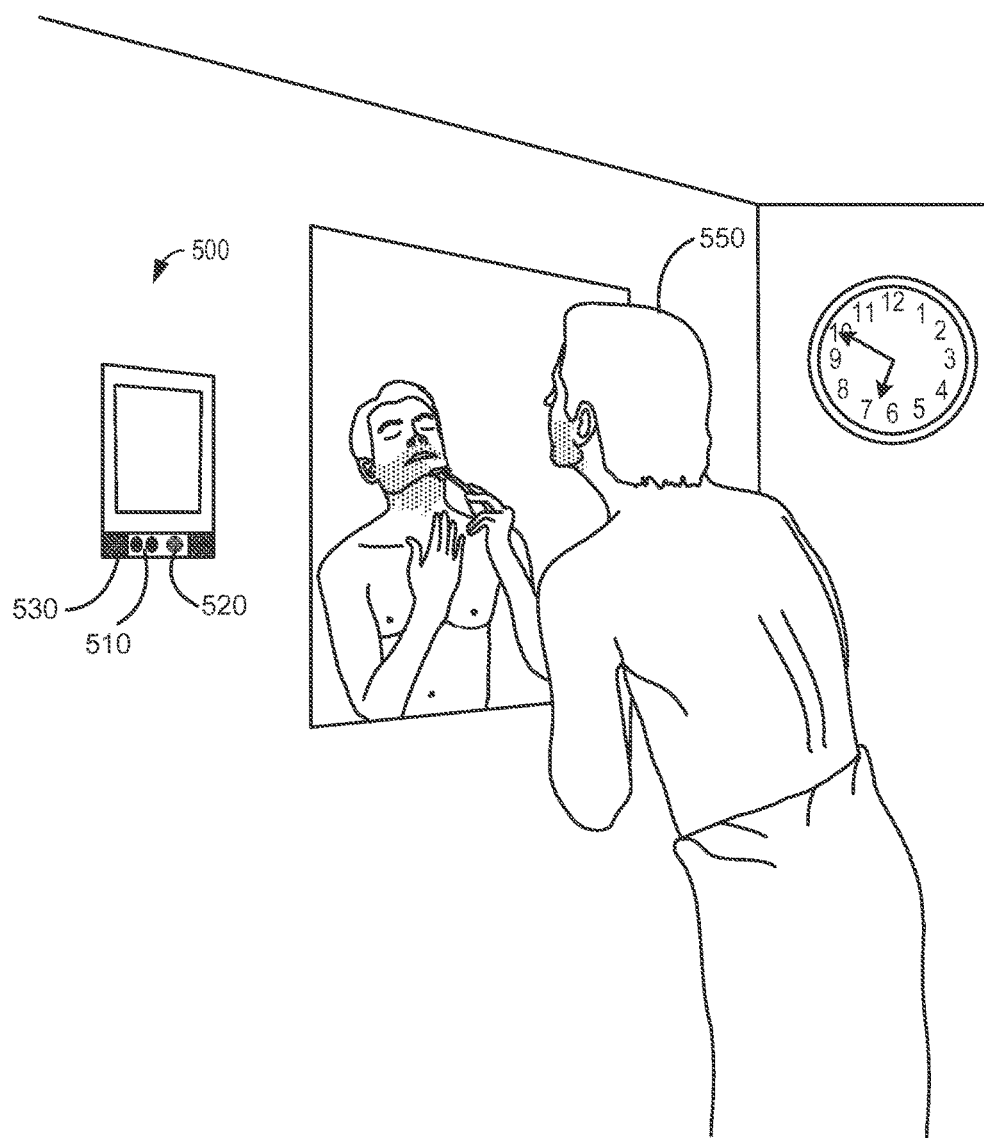


FIG. 6

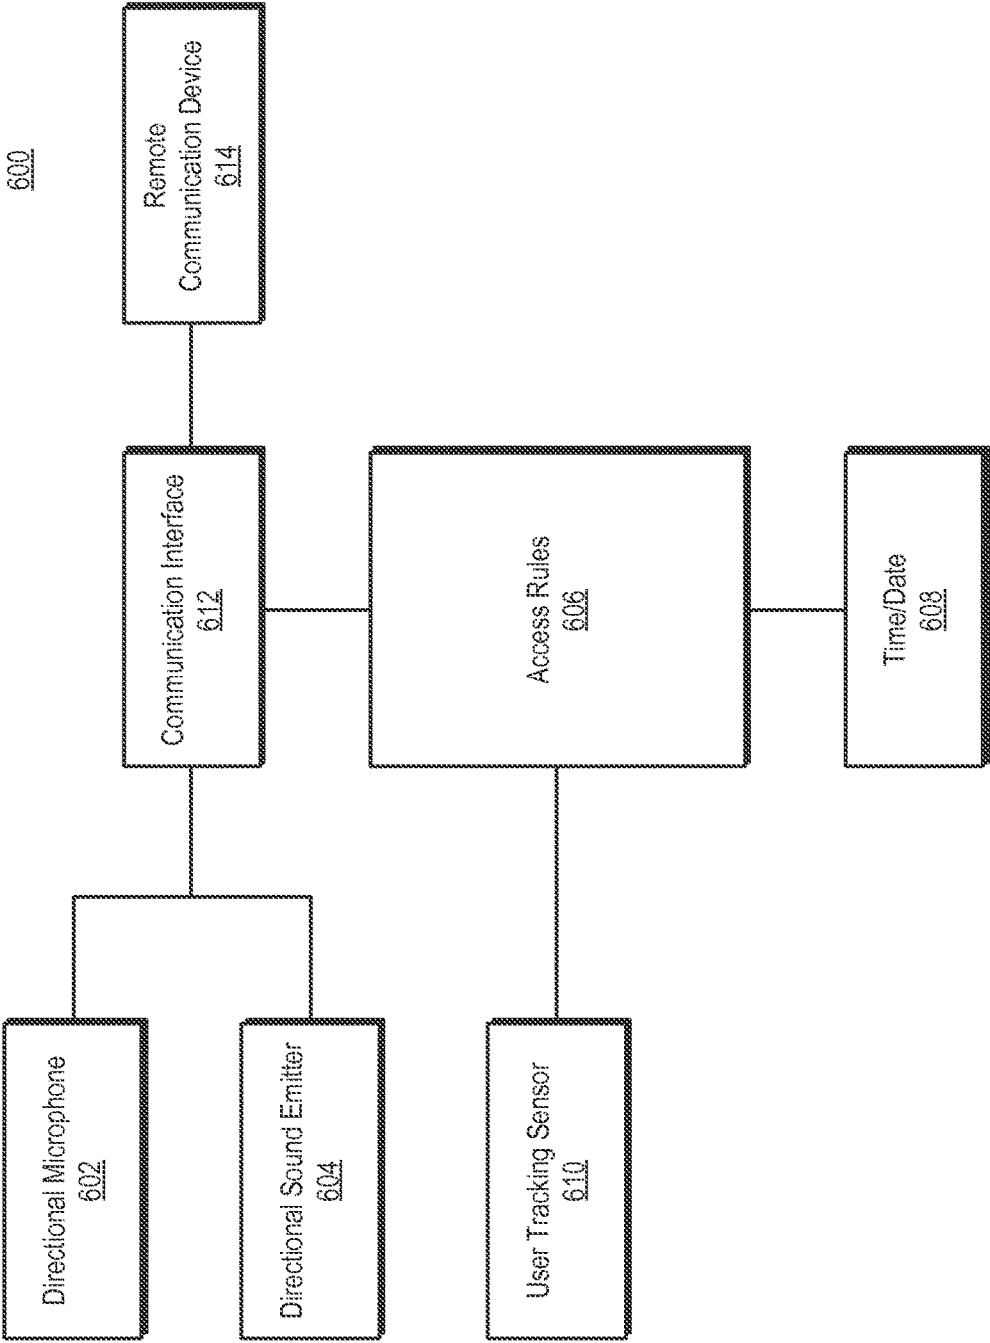


FIG. 7

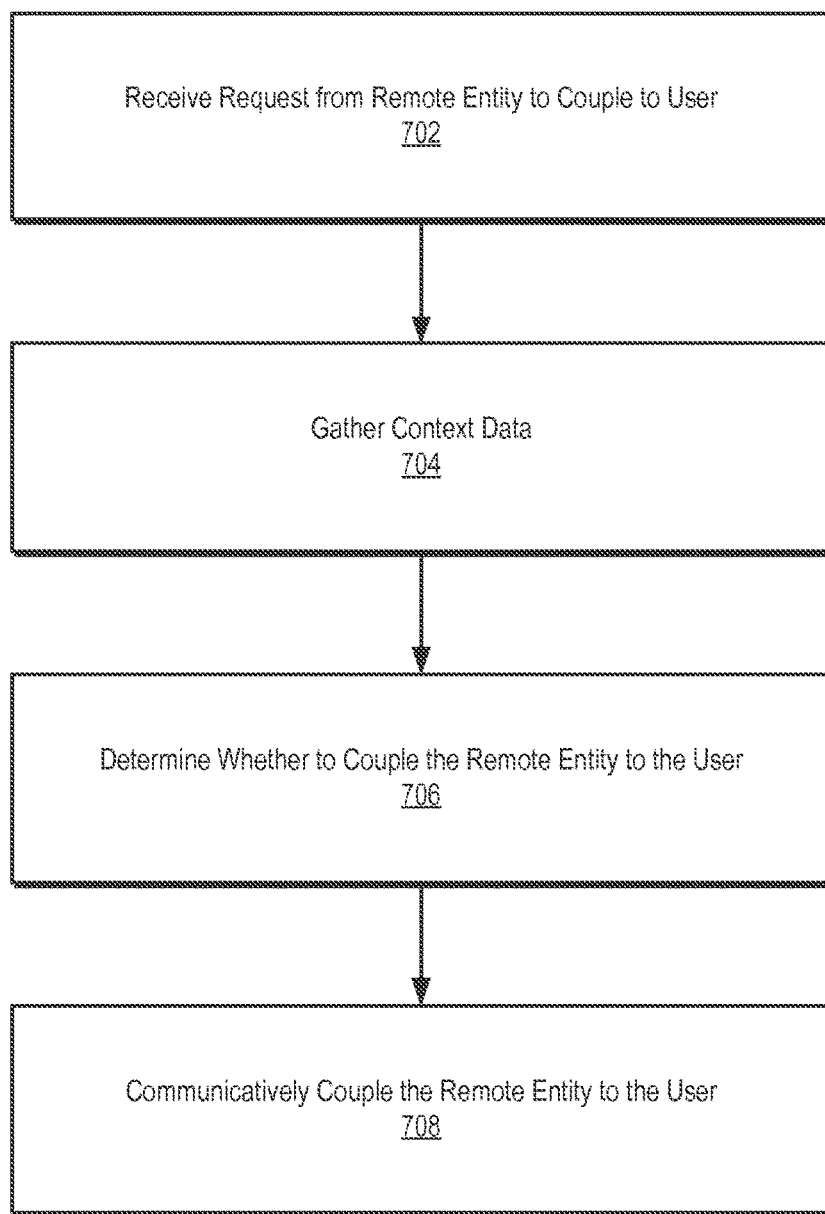
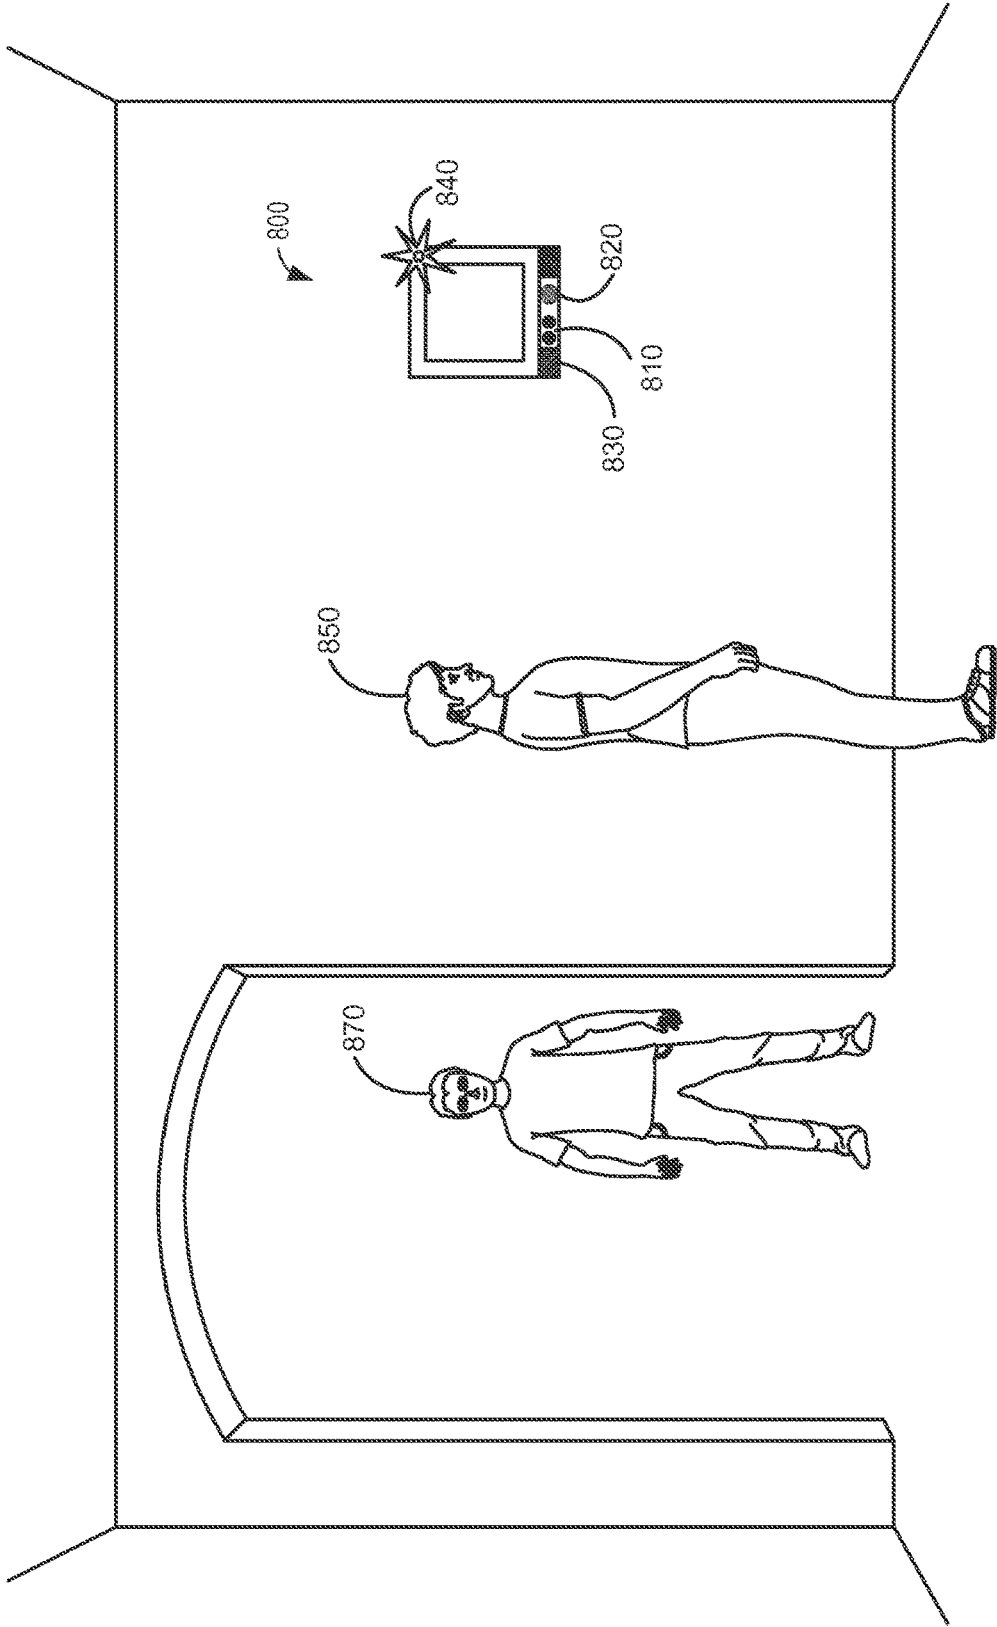
700



FIG. 8



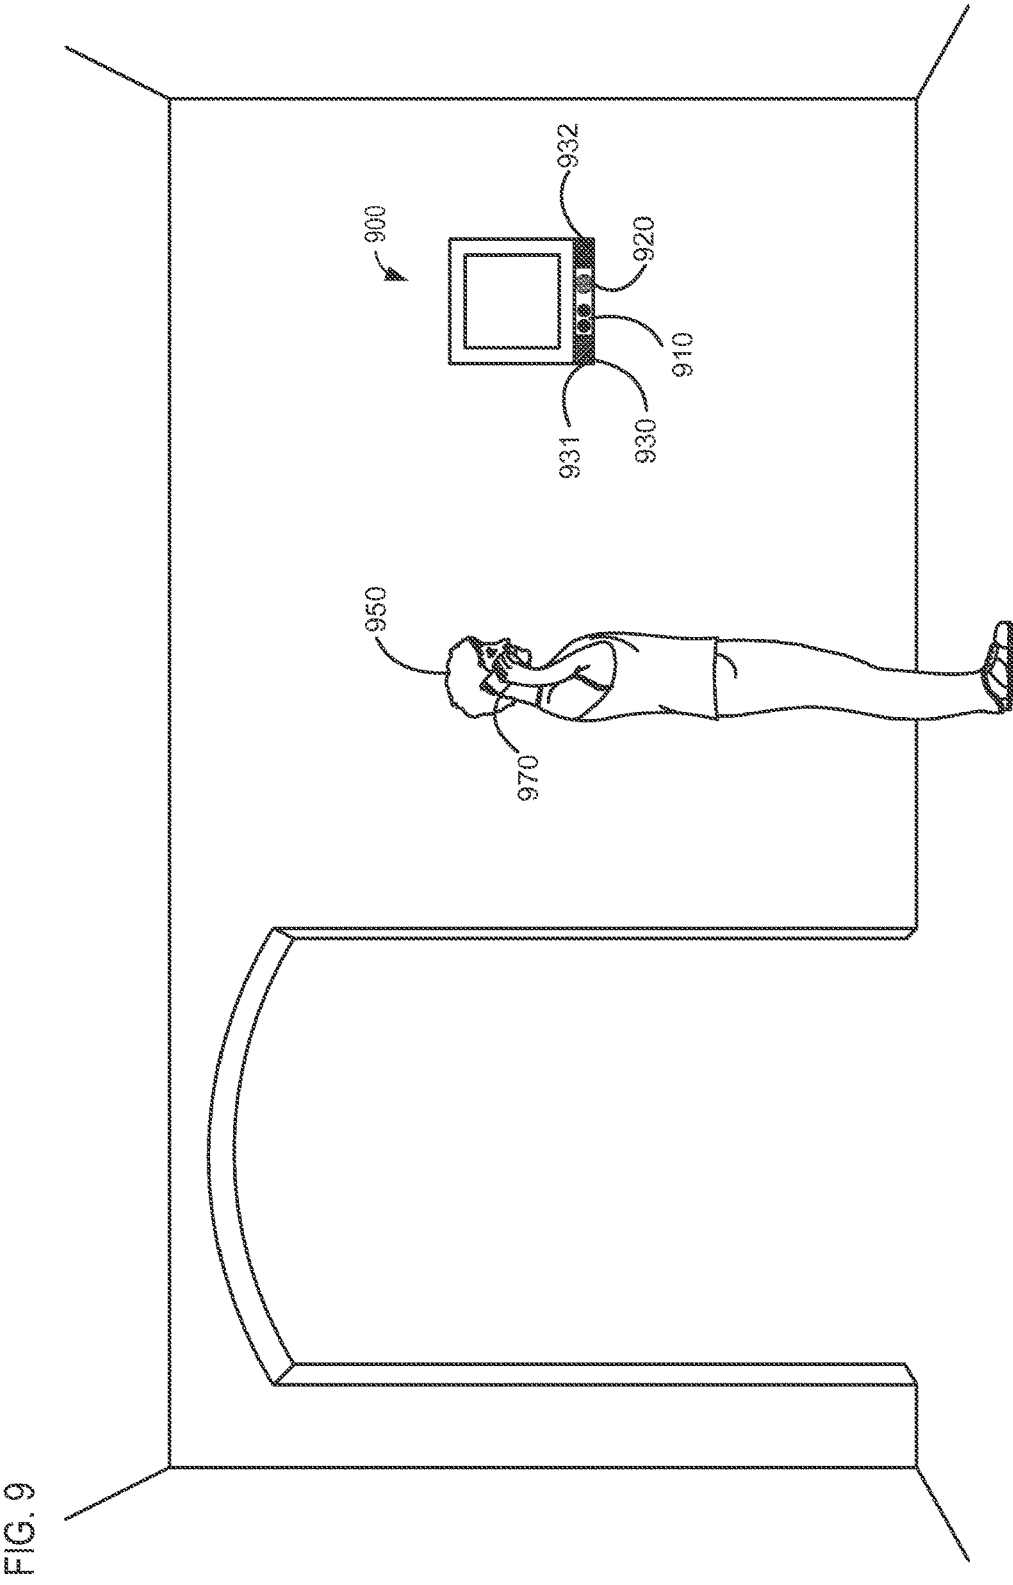


FIG. 10

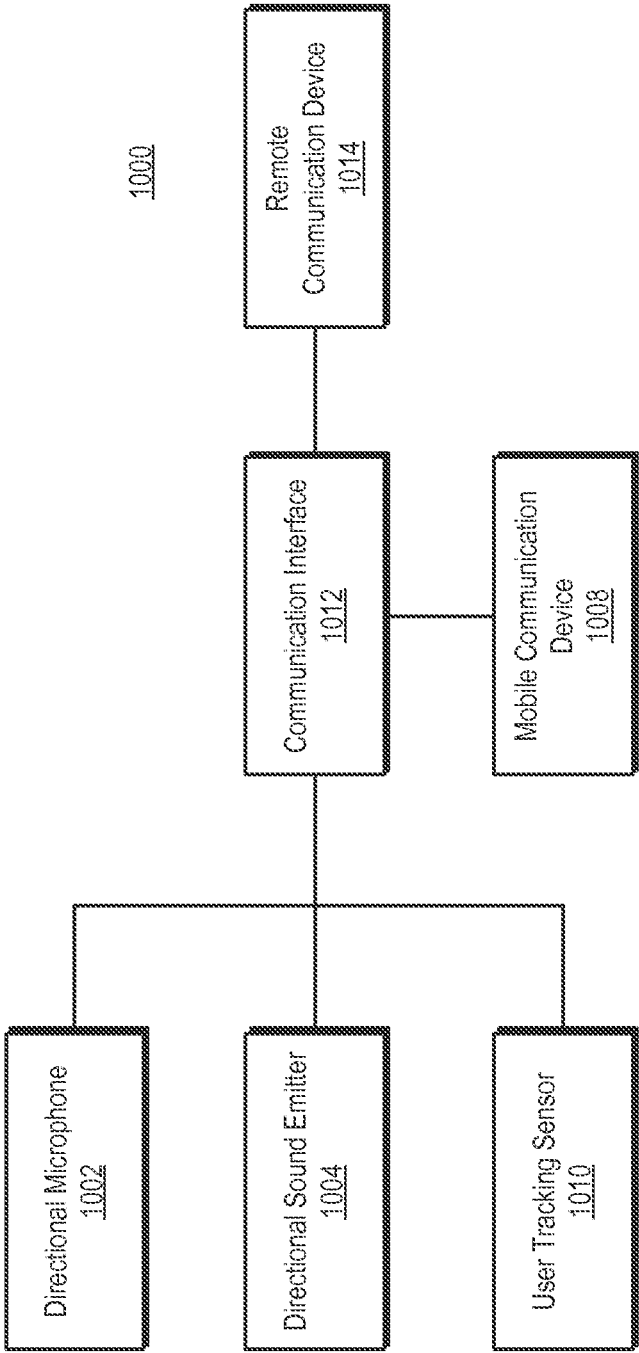
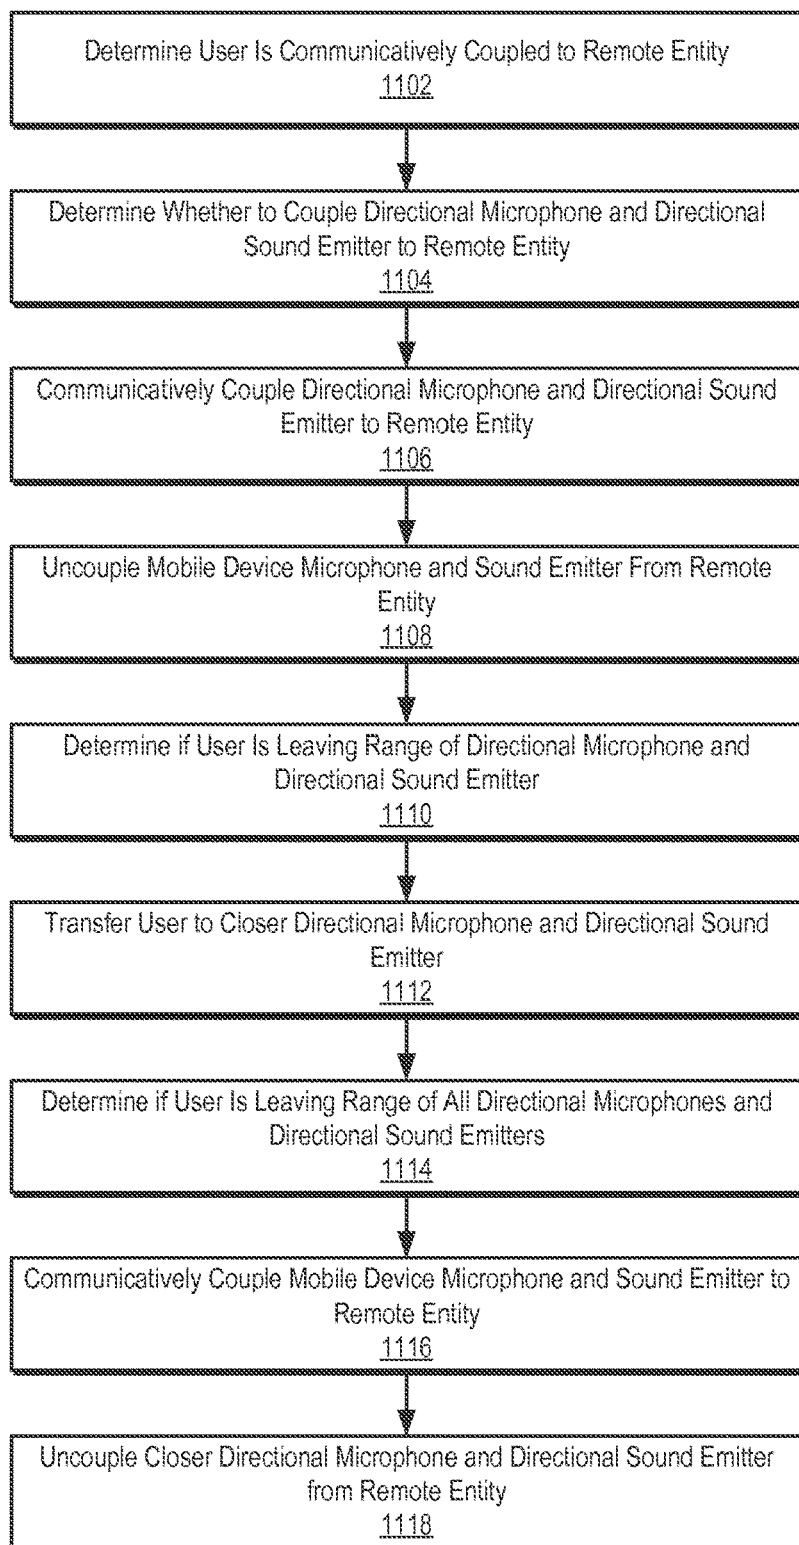


FIG. 11

1100

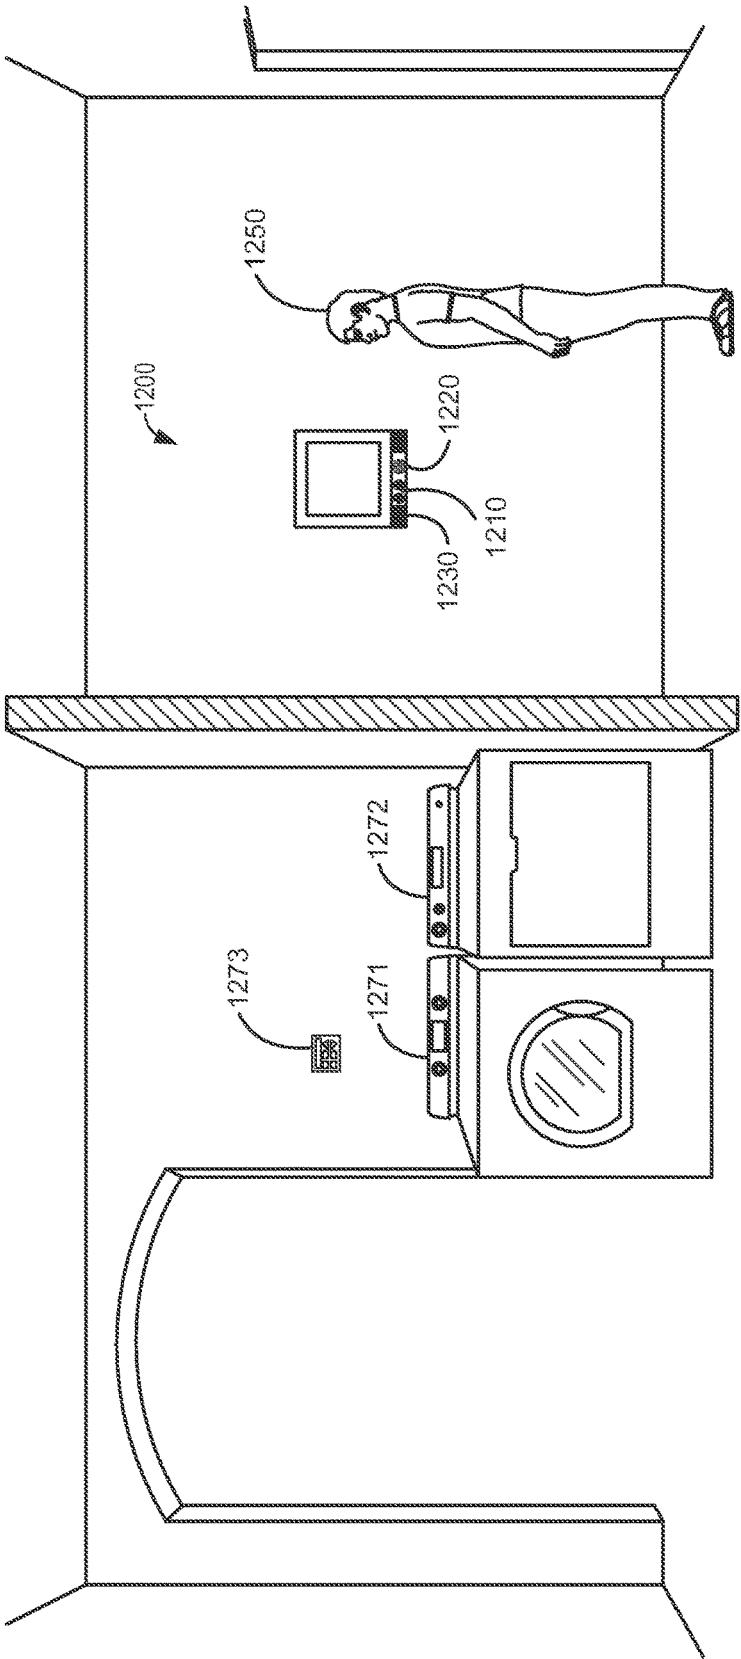


FIG. 12

FIG. 13

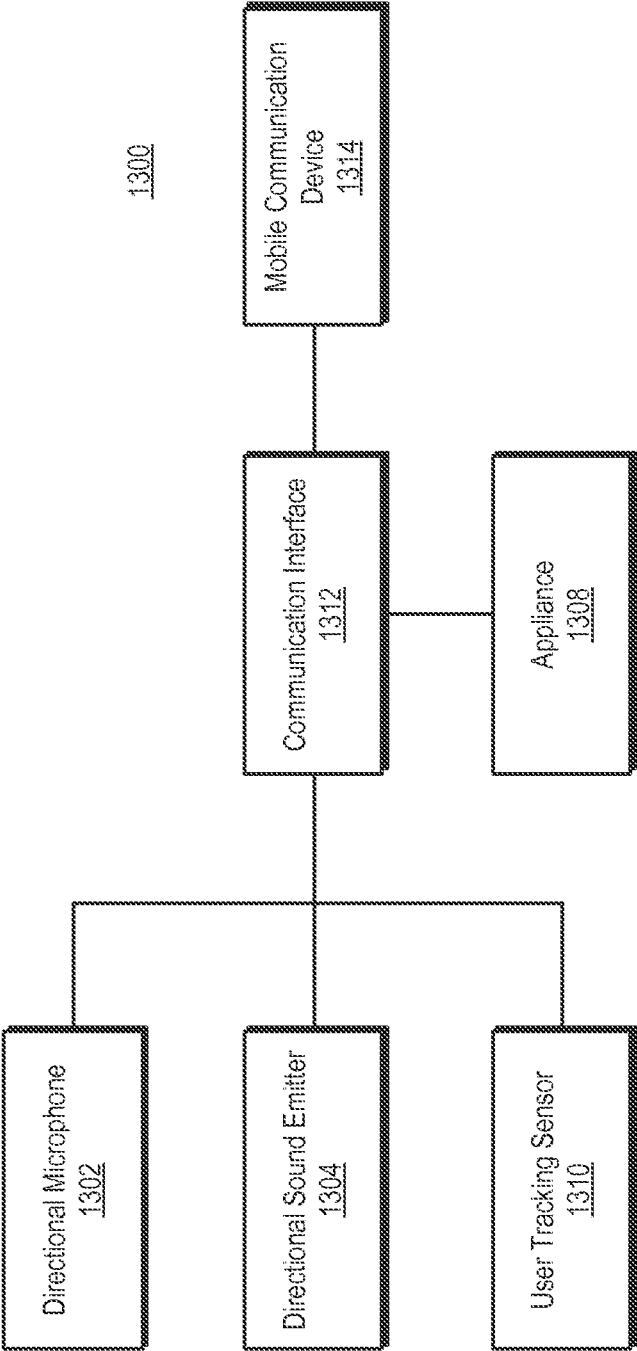


FIG. 14

1400

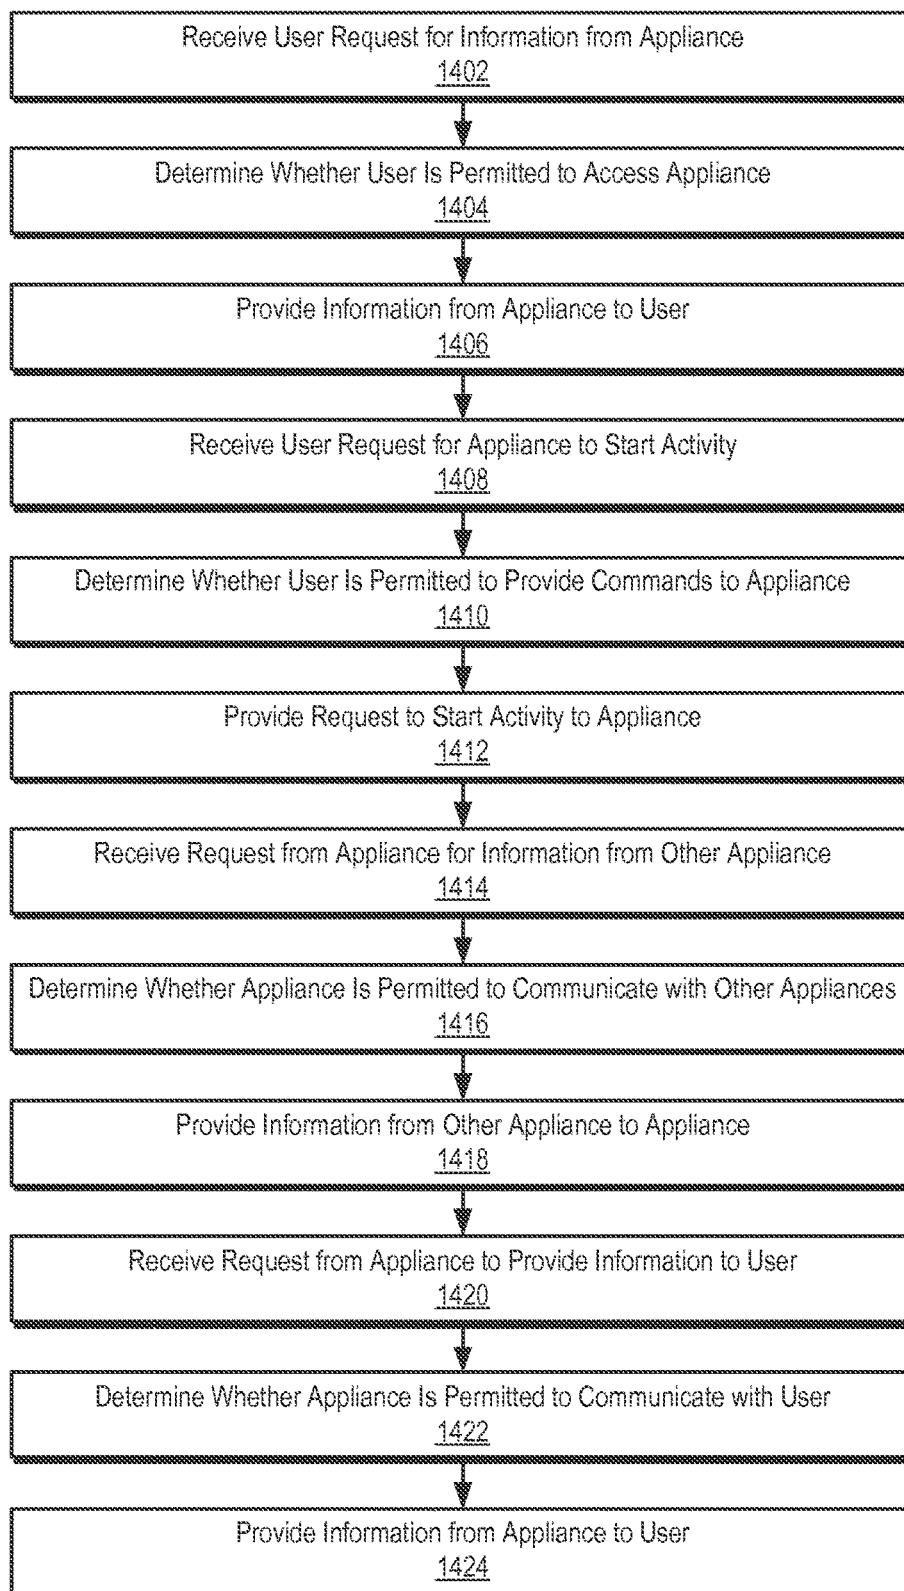
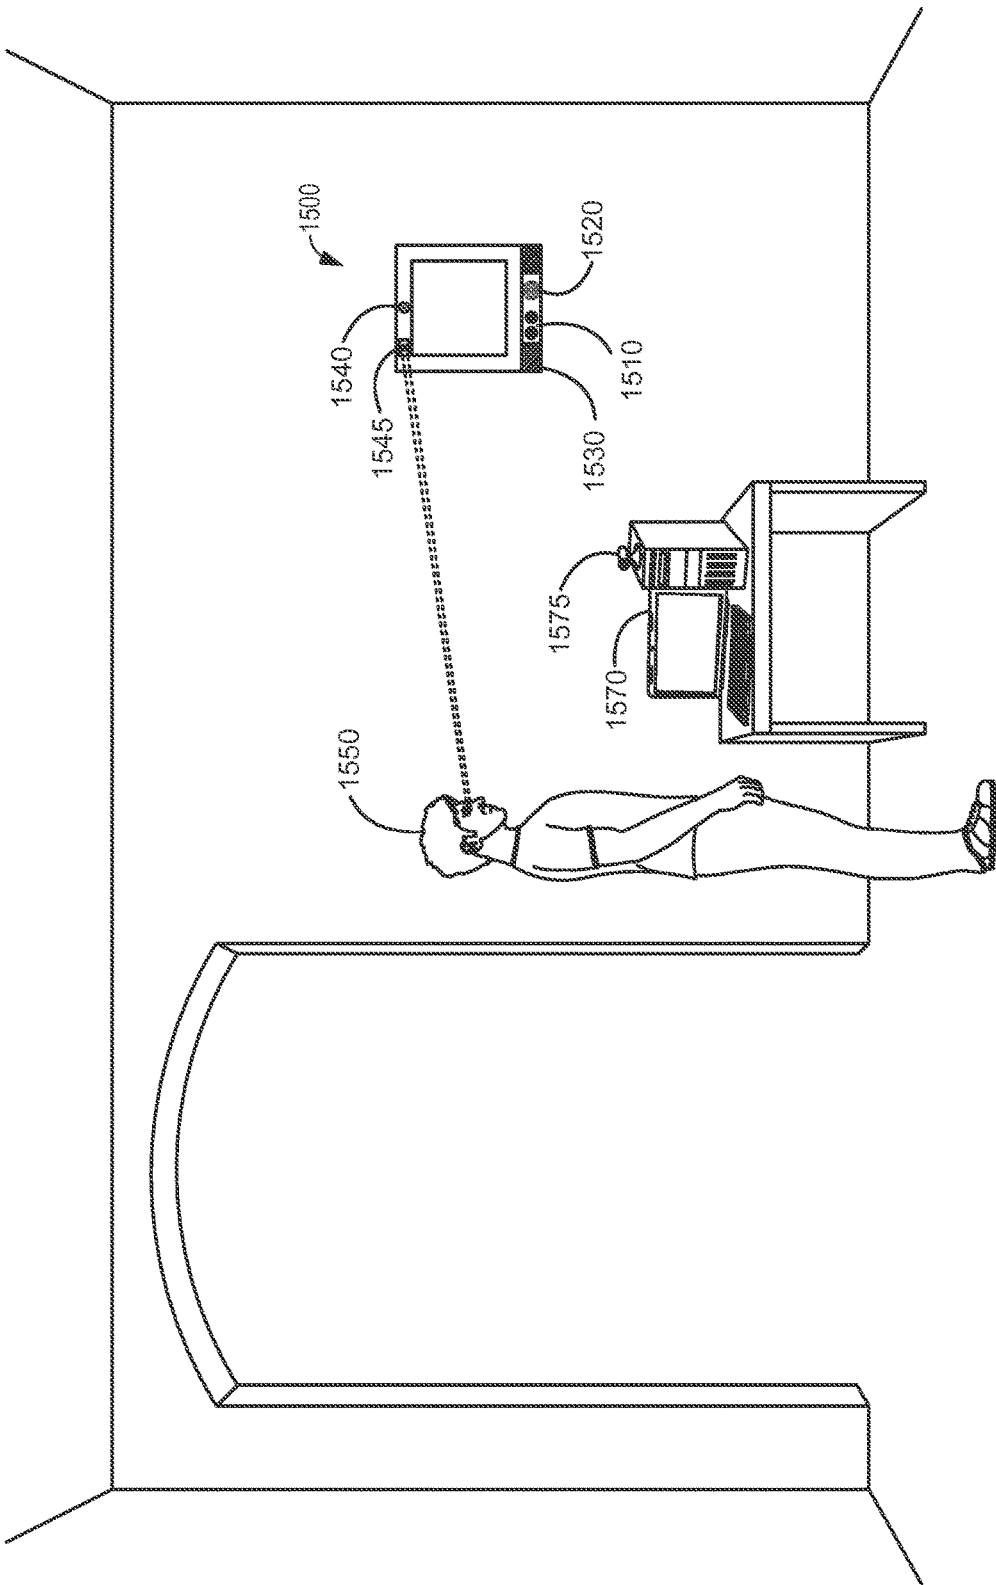


FIG. 15





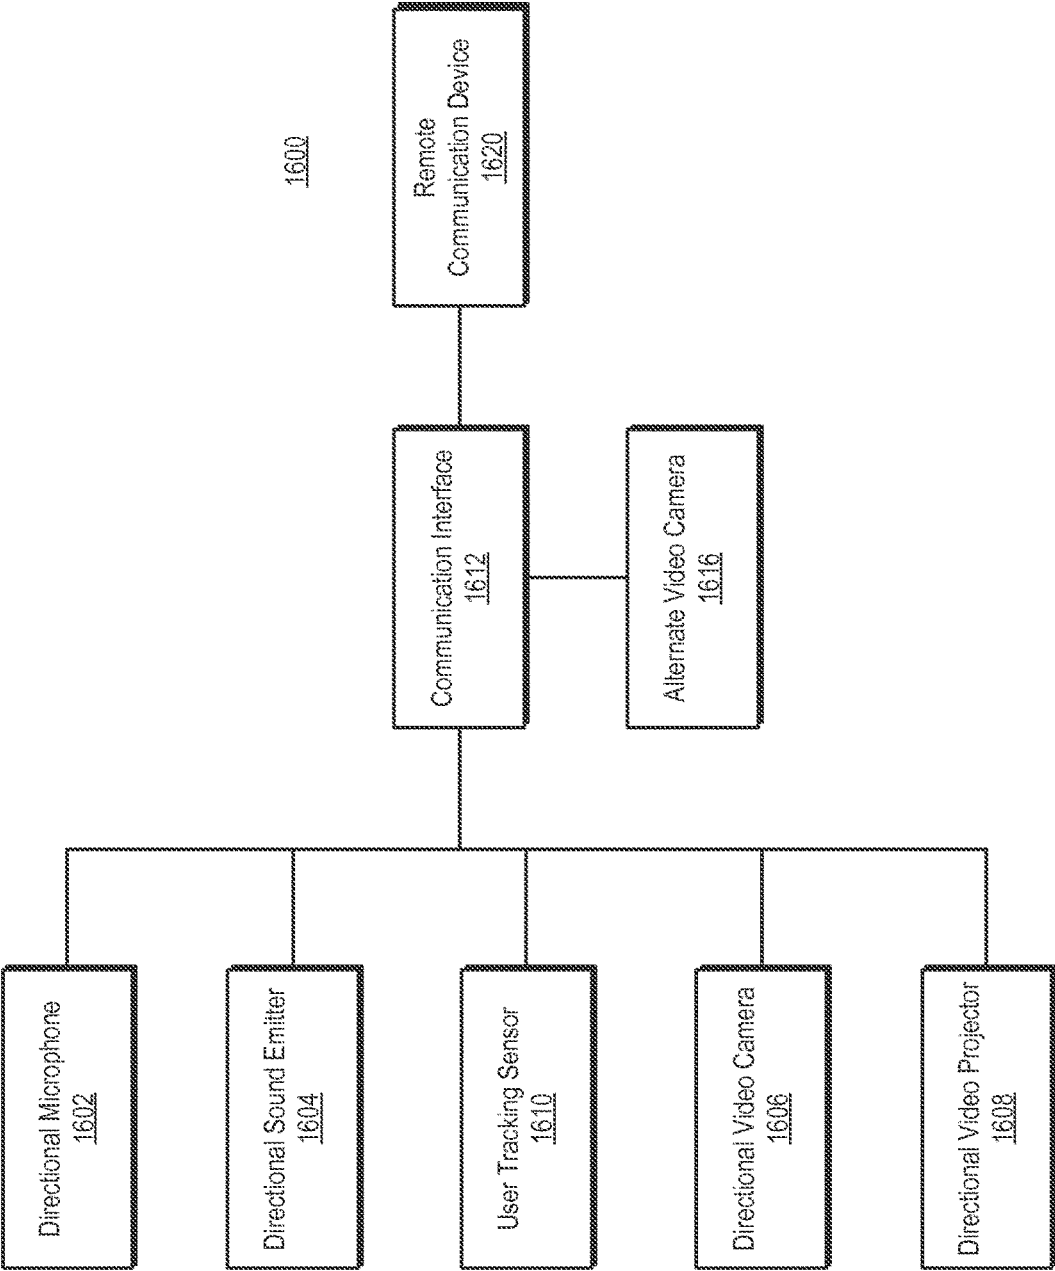
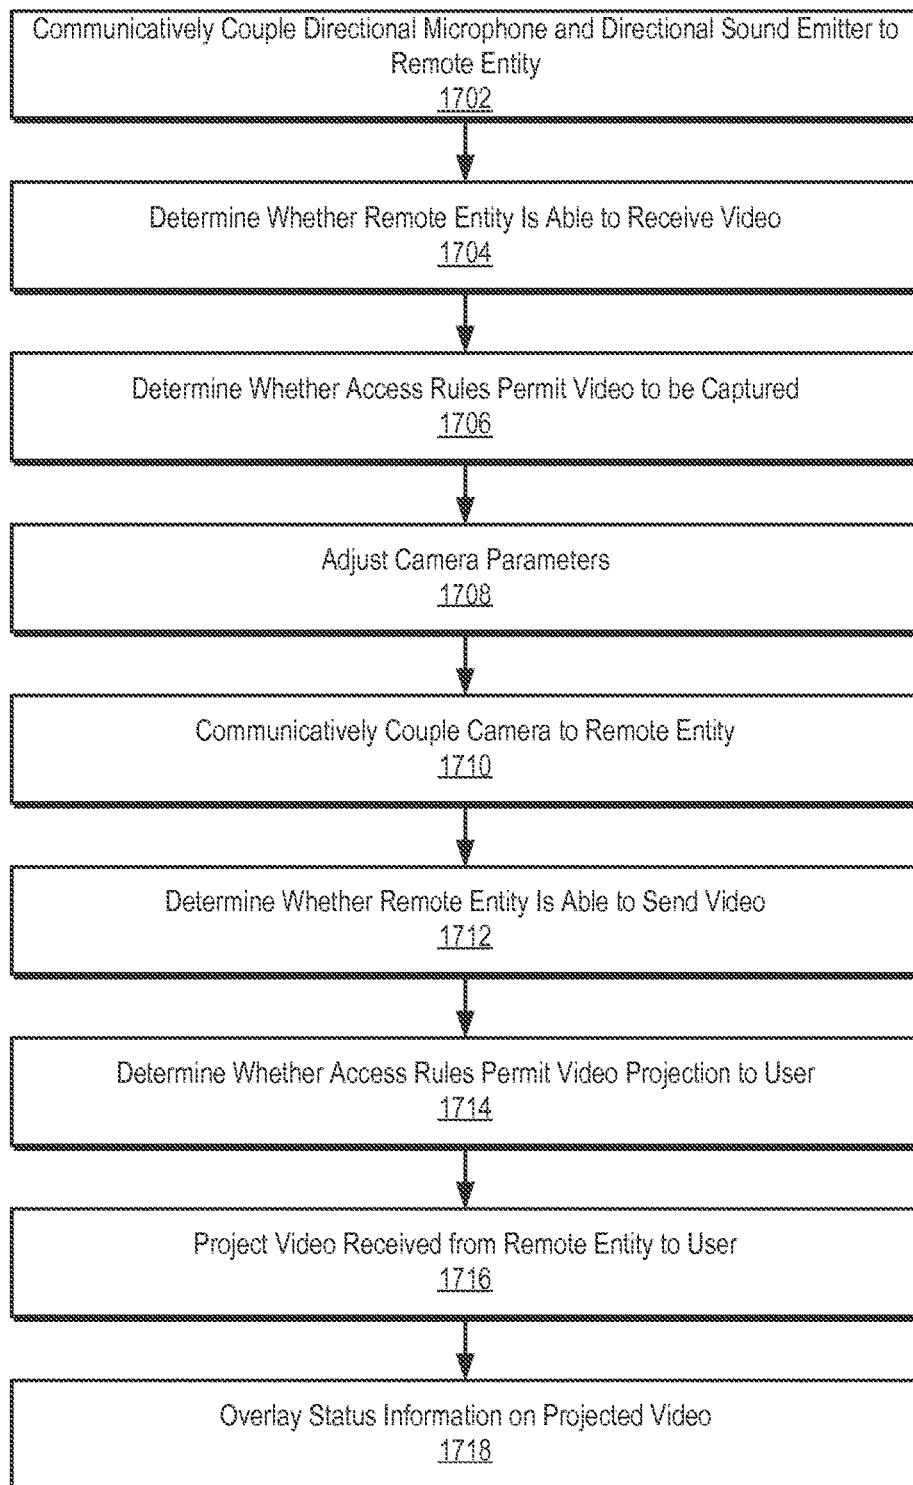


FIG. 16

FIG. 17

1700



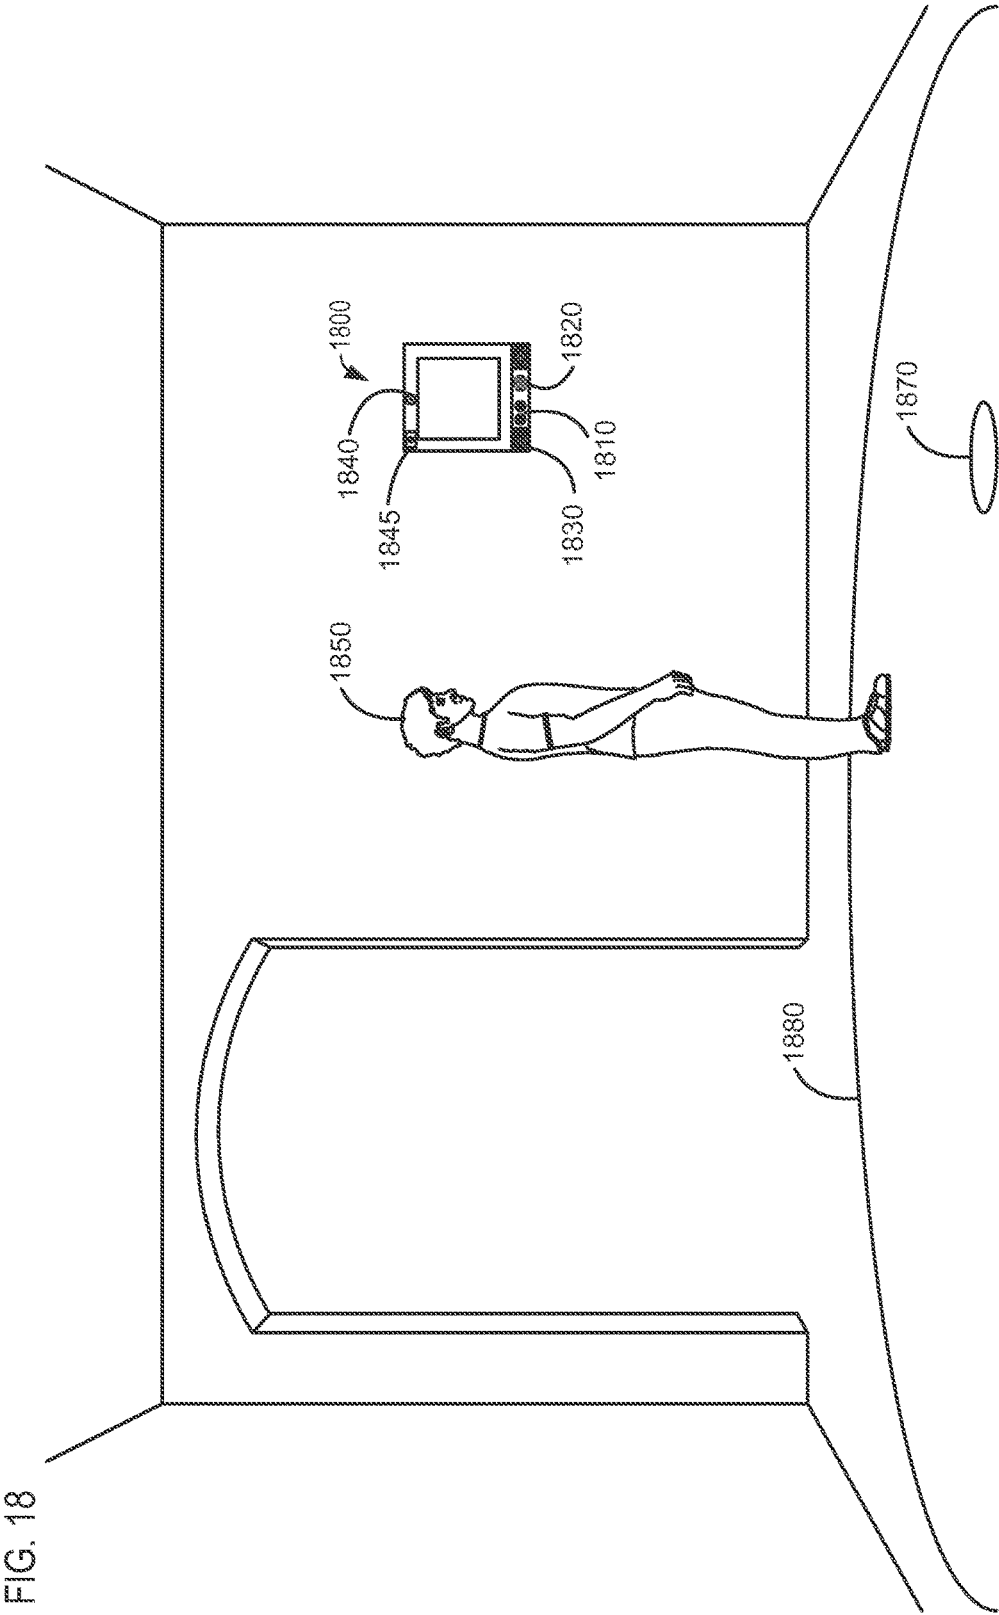


FIG. 19

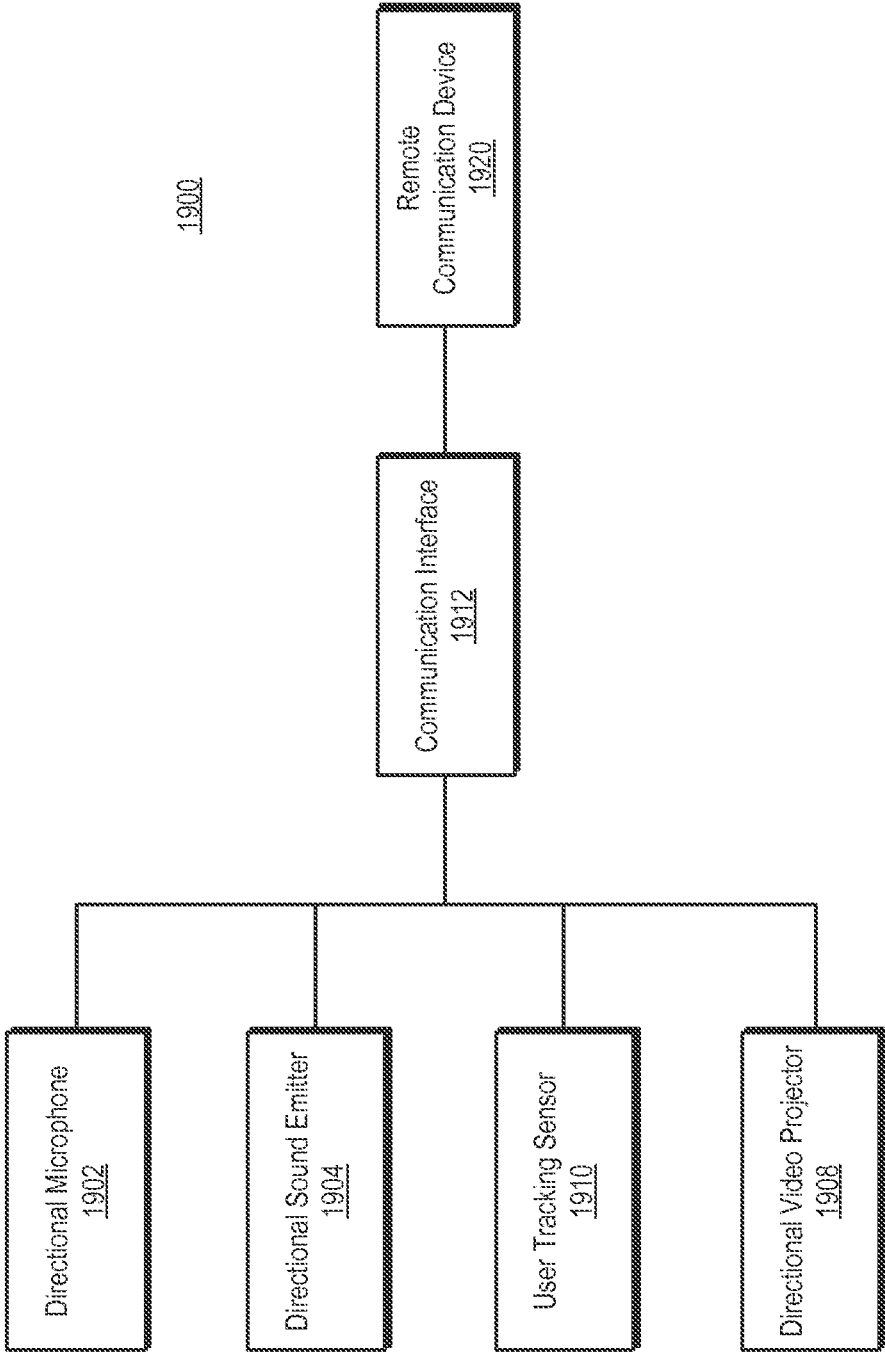


FIG. 20

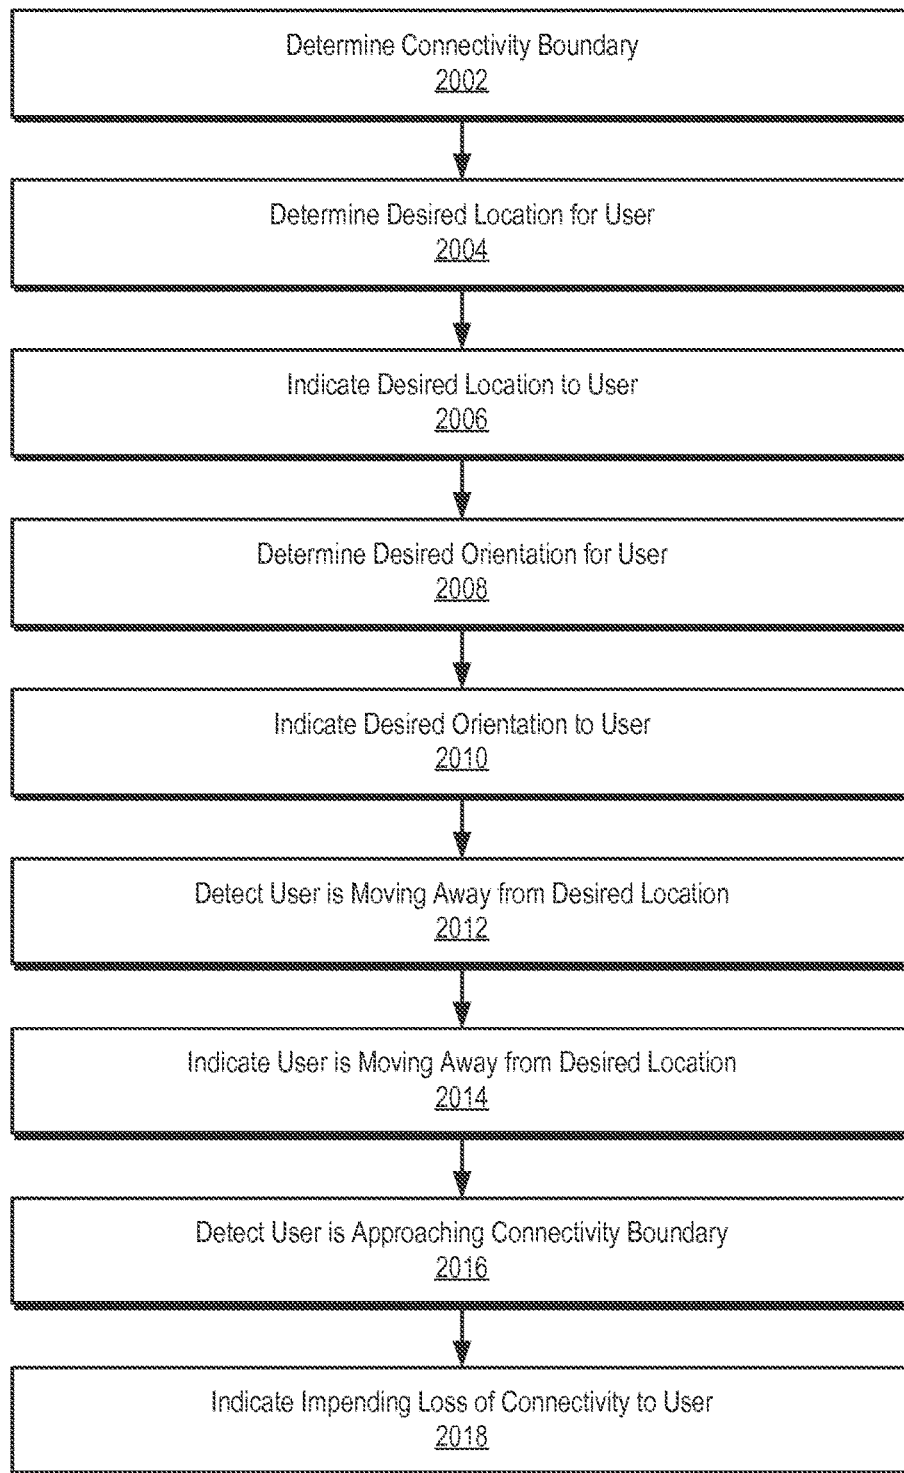
2000

FIG. 21

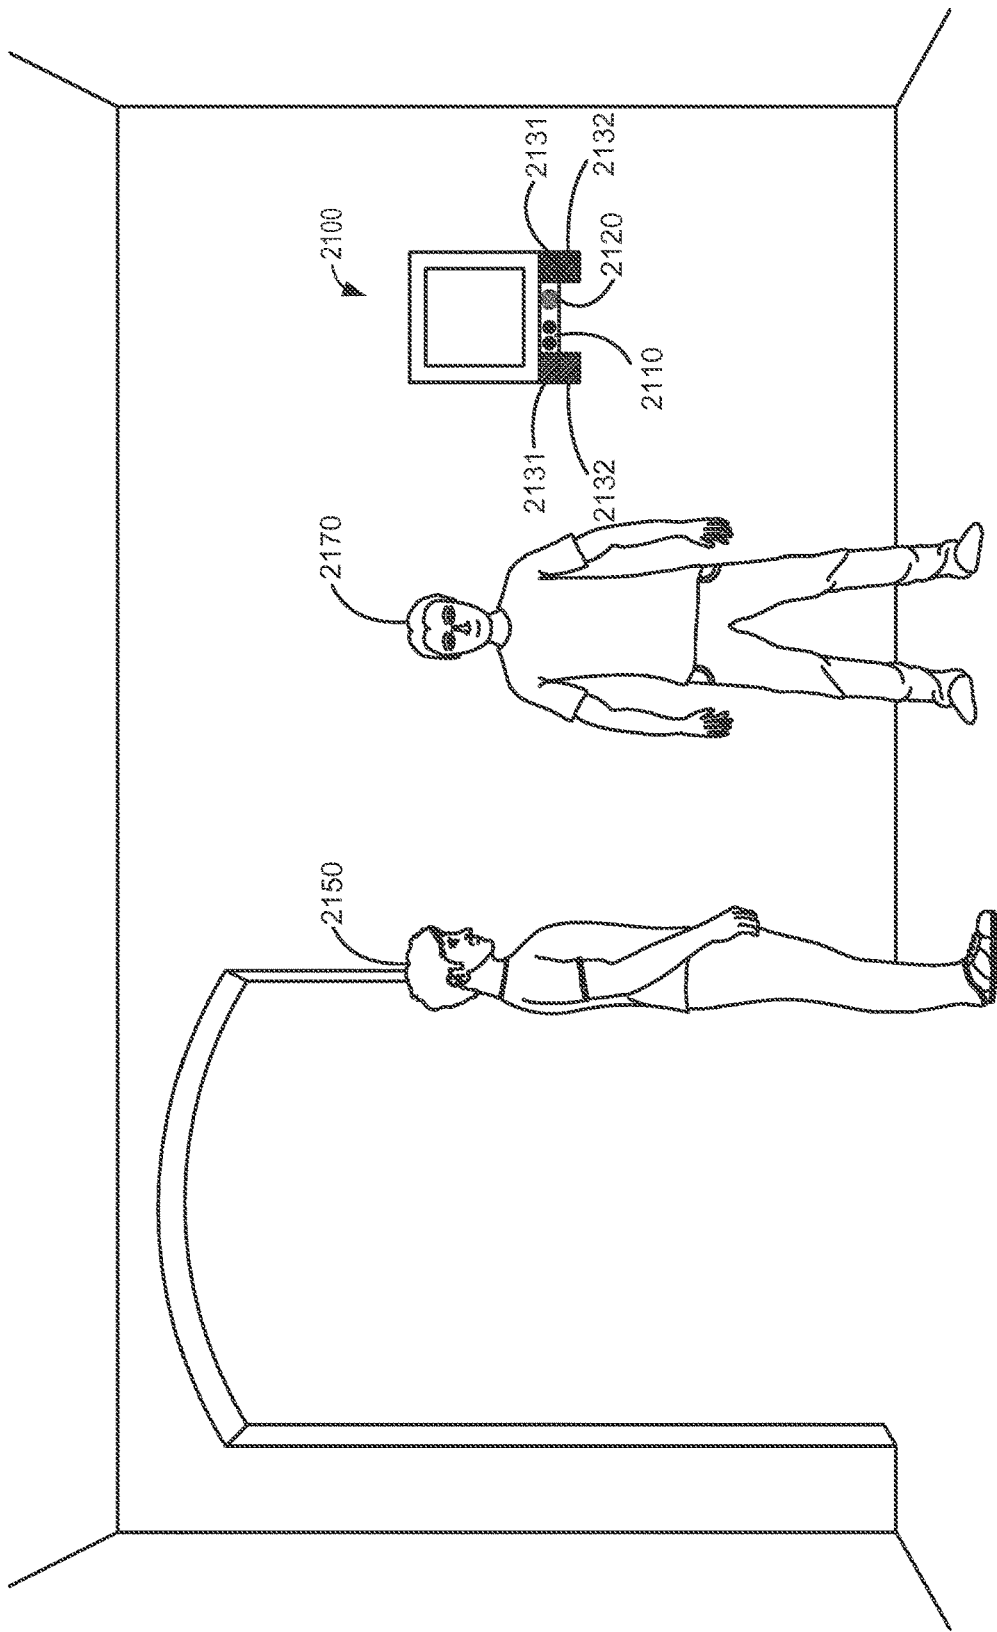
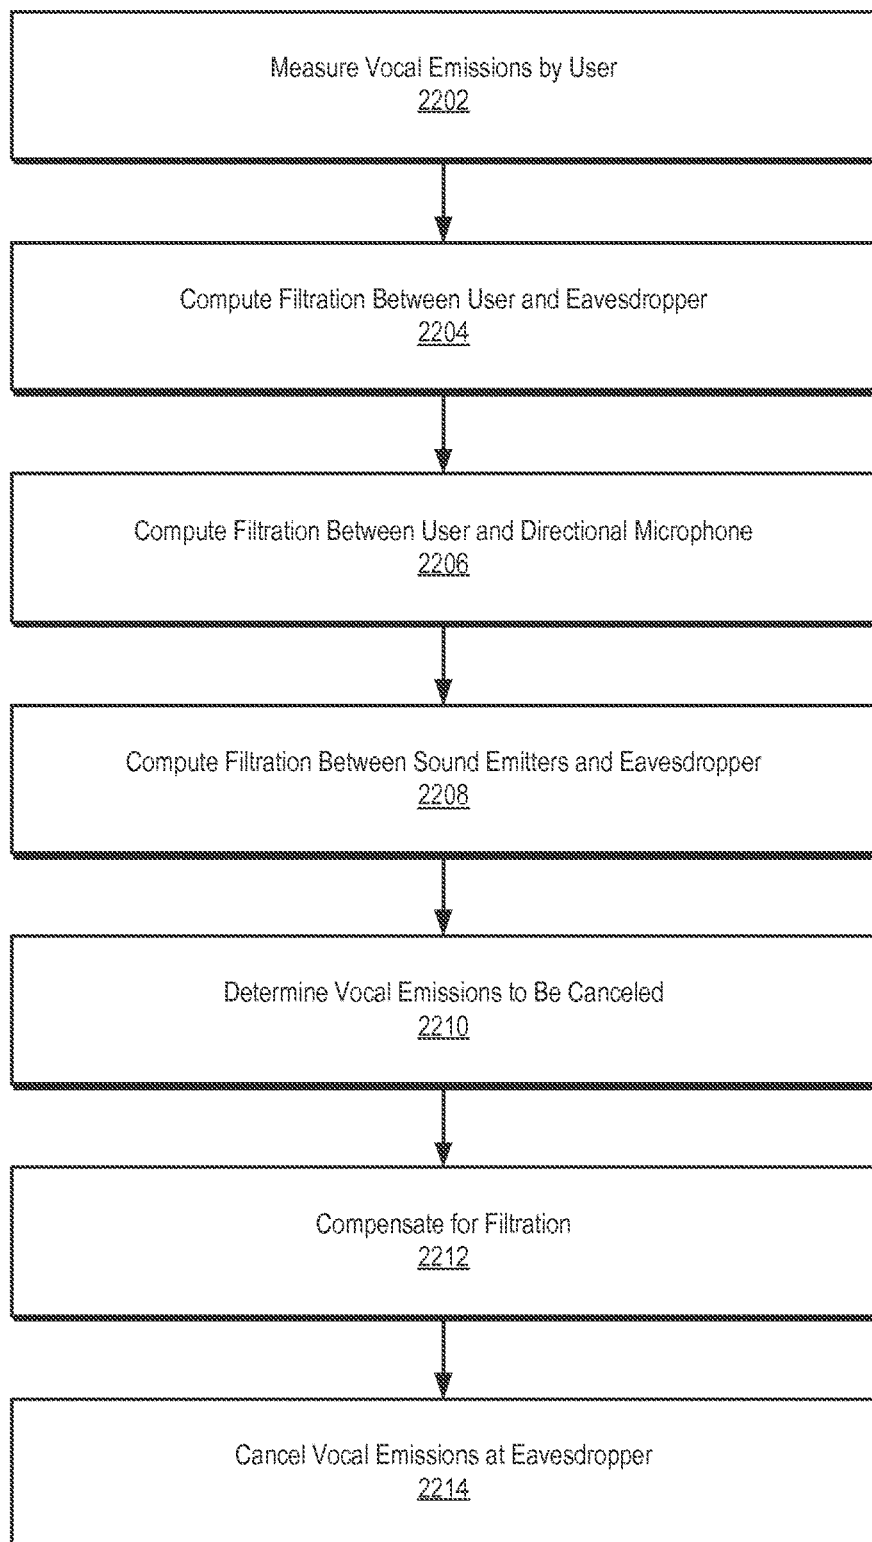


FIG. 22

2200

## SYSTEMS AND METHODS FOR POSITIONING A USER

**[0001]** If an Application Data Sheet (“ADS”) has been filed on the filing date of this application, it is incorporated by reference herein. Any applications claimed on the ADS for priority under 35 U.S.C. §§ 119, 120, 121, or 365(c), and any and all parent, grandparent, great-grandparent, etc., applications of such applications, are also incorporated by reference, including any priority claims made in those applications and any material incorporated by reference, to the extent such subject matter is not inconsistent herewith.

## CROSS-REFERENCE TO RELATED APPLICATIONS

**[0002]** The present application claims the benefit of the earliest available effective filing date(s) from the following listed application(s) (the “Priority Applications”), if any, listed below (e.g., claims earliest available priority dates for other than provisional patent applications or claims benefits under 35 USC § 119(e) for provisional patent applications, for any and all parent, grandparent, great-grandparent, etc. applications of the Priority Application(s)).

### Priority Applications

**[0003]** This application is a Continuation of U.S. patent application Ser. No. 14/848,177 filed on Sep. 8, 2015 and titled SYSTEMS AND METHODS FOR POSITIONING A USER OF A HANDS-FREE INTERCOMMUNICATION SYSTEM, a Continuation of U.S. patent application Ser. No. 14/522,452 filed on Oct. 23, 2014 and titled SYSTEMS AND METHODS FOR POSITIONING A USER OF A HANDS-FREE INTERCOMMUNICATION SYSTEM, a Continuation in Part of U.S. patent application Ser. No. 14/461,106 filed on Aug. 15, 2014 and titled SYSTEMS AND METHODS FOR POSITIONING A USER OF A HANDS-FREE INTERCOMMUNICATION SYSTEM, a Continuation in Part of U.S. patent application Ser. No. 14/280,466 filed on May 16, 2014 and titled SYSTEMS AND METHODS FOR AUTOMATICALLY CONNECTING A USER OF A HANDS-FREE INTERCOMMUNICATION SYSTEM, a Continuation in Part of U.S. patent application Ser. No. 14/254,704 filed on Apr. 16, 2014 and titled SYSTEMS AND METHODS FOR AUTOMATICALLY CONNECTING A USER OF A HANDS-FREE INTERCOMMUNICATION SYSTEM, a Continuation in Part of U.S. patent application Ser. No. 14/174,650 filed on Feb. 6, 2014 and titled SYSTEMS AND METHODS FOR AUTOMATICALLY CONNECTING A USER OF A HANDS-FREE INTERCOMMUNICATION SYSTEM, all of which applications are incorporated by reference in their entireties.

**[0004]** If the listings of applications provided above are inconsistent with the listings provided via an ADS, it is the intent of the Applicant to claim priority to each application that appears in the Domestic Benefit/National Stage Information section of the ADS and to each application that appears in the Priority Applications section of this application.

**[0005]** All subject matter of the Priority Applications and of any and all applications related to the Priority Applications by priority claims (directly or indirectly), including any priority claims made and subject matter incorporated by reference therein as of the filing date of the instant applica-

tion, is incorporated herein by reference to the extent such subject matter is not inconsistent herewith.

## TECHNICAL FIELD

**[0006]** This application relates to systems and methods for automatically handing off calls to a hands-free intercommunication system.

## SUMMARY

**[0007]** A hands-free intercommunication system (“hands-free intercom”) may be able to communicatively couple a user to an entity of interest without requiring a tactile input and/or a specific verbal phrase. The hands-free intercom may be able to determine from gestures and/or vocal emissions with whom the user wishes to speak. For example, the hands-free intercom may determine the entity of interest from the subject matter of the vocal emissions, a tone of voice, an uttered name, a spoken command, and/or the like. A communication interface may be configured to communicatively couple the user to a communication device of the entity of interest. The communication interface may determine an optimal communication device of the entity of interest with which to communicatively couple.

**[0008]** The hands-free intercom may include a directional microphone to receive vocal emissions from the user and a directional sound emitter to deliver audio to the user. The communication interface may communicatively couple the directional microphone and directional sound emitter to the communication device of the entity of interest to allow the user and entity of interest to communicate. The hands-free intercom may also include a user-tracking sensor configured to determine the location of the user. The directional microphone and directional sound emitter may target the user based on the location determined by the user-tracking sensor. The directional microphone may include a phased array and/or a metamaterial array to permit gain to be maximized in the direction of the user without any moving parts. The directional sound emitter may be configured to emit ultrasonic sound waves towards the user. The emitted ultrasonic sound waves may be configured to frequency convert to produce audio that is audible by the user. The frequency conversion may be produced by beating a plurality of ultrasonic sound waves together, by downshifting the ultrasonic sound waves in the air and/or in or on a material on the user, and/or the like.

**[0009]** The hands-free intercom may determine whether a remote entity requesting to communicatively couple with the user should be allowed to do so. The hands-free intercom may apply access rules based on context data, which may include data about the remote entity, sensing of the user, data from one or more computer systems, and/or the like. The hands-free intercom may decide whether to automatically couple the remote entity, automatically refuse to couple the remote entity, prompt the user about the remote entity, and/or the like. The hands-free intercom may refuse connections, for example, if the user is sleeping, if another person is present with the user, and/or the like. The hands-free intercom may monitor for eavesdroppers and may warn the user of an eavesdropper and/or refuse to communicatively couple the user while the eavesdropper is present.

**[0010]** The hands-free intercom may be able to determine from gestures, facial expressions, eye tracking, and/or vocal emissions with whom the user wishes to speak. For example,



the hands-free intercom may determine the entity of interest from the subject matter of the vocal emissions, a tone of voice, an uttered name, a spoken command, a prosody, an amplitude, and/or the like. A communication interface may be configured to communicatively couple the user to a communication device of the entity of interest. The communication interface may determine an optimal communication device of the entity of interest with which to communicatively couple.

**[0011]** The hands-free intercom may include a directional microphone to receive vocal emissions from the user and a directional sound emitter to deliver audio to the user. The communication interface may communicatively couple the directional microphone and directional sound emitter to the communication device of the entity of interest to allow the user and entity of interest to communicate. The hands-free intercom may also include a user-tracking sensor configured to determine the location of the user. The directional microphone and directional sound emitter may target the user based on the location determined by the user-tracking sensor. The directional microphone may include a phased array and/or a metamaterial array to permit gain to be maximized in the direction of the user without any moving parts. The directional sound emitter may be configured to emit ultrasonic sound waves towards the user. The emitted ultrasonic sound waves may be configured to frequency convert to produce audio that is audible by the user. The frequency conversion may be produced by beating a plurality of ultrasonic sound waves together, by downshifting the ultrasonic sound waves in the air and/or in or on a material on the user, and/or the like.

**[0012]** The hands-free intercom may determine whether a remote entity requesting to communicatively couple with the user should be allowed to do so. The hands-free intercom may apply access rules based on context data, which may include data about the remote entity, sensing of the user, data from one or more computer systems, and/or the like. The hands-free intercom may decide whether to automatically couple the remote entity, automatically refuse to couple the remote entity, prompt the user about the remote entity, and/or the like. The hands-free intercom may refuse connections, for example, if the user is sleeping, if another person is present with the user, and/or the like. The hands-free intercom may monitor for eavesdroppers and may warn the user of an eavesdropper and/or refuse to communicatively couple the user while the eavesdropper is present.

**[0013]** The hands-free intercom may be configured to automatically receive call handoffs from mobile communication devices. A user may be communicatively coupled to a remote entity via a mobile communication device of the user. To hand off the call, the directional microphone and/or directional sound emitter may be communicatively coupled to a communication device of the remote entity. The directional microphone and/or directional sound emitter may be communicatively coupled to the mobile communication device of the user, which may remain coupled to the remote entity. Alternatively, the communication interface may communicatively couple with the remote entity without sending communications via the mobile communication device of the user. The user may indicate through vocal emissions, gestures, facial expressions, and/or eye movements that the communicative coupling should be handed off; the mobile communication device may indicate the communicative coupling should be handed off; the communication interface

may automatically determine that the communicative coupling should be handed off (e.g., anytime the user is in range); and/or the like.

**[0014]** The hands-free intercom may be configured to automatically communicatively couple a user to an appliance. The communication interface may be configured to communicatively couple the directional microphone and/or the directional sound emitter to the user. The user may indicate that the user would like to be communicatively coupled with the appliance through vocal emissions, gestures, facial expressions, eye movements, and/or the like. The communication interface may deliver notifications from the appliance to the user. The communication interface may allow the user to send and/or receive communications via a mobile communication device. The communication interface may translate communications from appliances to be understandable by users and/or from user to be understandable by appliances. The communication interface may communicatively couple appliances with one another.

**[0015]** The communication interface may manage access rights between users and/or appliances. The communication interface may determine which users may access the appliances and what privileges they have when access is permitted. The communication interface may determine when and/or if an appliance is permitted to send notifications to the user. The communication interface may determine when communication between an appliance and a mobile communication device are permitted. The communication interface may determine whether appliances are permitted to communicate with one another.

**[0016]** The hands-free intercom may be configured to provide video aided communicative coupling. The hands-free intercom may include a directional camera and/or a directional video projector. Alternatively, or in addition, the communication interface may be configured to leverage the cameras of one or more other devices. The directional and/or other cameras may be configured to capture video of the user, which may be provided to a remote entity and/or may be used to track eye-movement and/or to identify vocal emissions, gestures, and/or facial expressions from the user. The directional video projector may be configured to deliver video to the user. For example, the video may be projected into and/or onto the eye of the user. The projected video may be received from the remote user and/or may include status information. The captured video and/or the projected video may be stereoscopic video. The communication interface may be configured to determine whether to provide captured video to the remote entity and received video to the user based on access rules.

**[0017]** The hands-free intercom may be configured to induce the user to move to a desired location and/or to stay within a connectivity boundary. Alternatively, or in addition, the hands-free intercom may be configured to induce the user to face in a desired orientation. The desired location and/or orientation may be a location or orientation where performance by and/or connectivity with one or more components of the hands-free intercom is best. The connectivity boundary may be one or more locations where connectivity is lost with a component of the hands-free intercom or performance is below a predetermined threshold. In some embodiments, the directional sound emitter and/or a display may provide the inducement to the user. For example, the directional sound emitter and/or the display may explicitly indicate the desired location, desired orientation, and/or

connectivity boundary; may degrade audio or video quality based on user position or orientation; may manipulate the apparent source of the audio or video; may produce irritating audio and/or video; and/or the like. Alternatively, or in addition, the inducement may be adjusted based on changes in the position and/or orientation of the user.

**[0018]** The hands-free intercom may be configured to provide privacy to a user. In an embodiment, providing privacy may include preventing an eavesdropper from hearing vocal emissions by the user. The directional sound emitter may obfuscate the vocal emissions, produce fake vocal emissions, and/or cancel the vocal emissions (e.g., by delivering a canceling sound 180 degrees out of phase with the vocal emissions). The hands-free intercom may measure and/or predict the vocal emissions to be canceled. Alternatively, or in addition, providing privacy may include canceling ambient noise at the user's ear. The ambient noise may be from a point source and/or may be general background noise. The hands-free intercom may measure and/or predict a filtration for a sound to be canceled (e.g., a vocal emission and/or a noise). The filtration may be between the sound source and the recipient, between the sound source and the hands-free intercom, and/or between the hands-free intercom and the recipient. The hands-free intercom may compensate for the filtration by applying the filtration or an inverse of the filtration to the sound to be canceled.

**[0019]** The foregoing summary is illustrative only and is not intended to be in any way limiting. In addition to the illustrative aspects, embodiments, and features described above, further aspects, embodiments, and features will become apparent by reference to the drawings and the following detailed description.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0020]** FIG. 1 is a perspective view of a user interacting with a hands-free intercom.

**[0021]** FIG. 2 is a perspective view of a pair of users communicating using a hands-free intercom.

**[0022]** FIG. 3 is a block diagram of a system for analyzing vocal emissions to determine an entity of interest.

**[0023]** FIG. 4 is a flow diagram of a method for a user of a hands-free intercom to communicatively couple to an entity of interest.

**[0024]** FIG. 5 is a perspective view of a hands-free intercom configured to apply access rules when determining whether to couple a remote entity to a user.

**[0025]** FIG. 6 is a block diagram of a system for determining whether to couple a remote entity according to access rules.

**[0026]** FIG. 7 is a flow diagram of a method for determining whether to couple a remote entity to a user.

**[0027]** FIG. 8 is a perspective view of a hands-free intercom configured to warn a user about an eavesdropper.

**[0028]** FIG. 9 is a perspective view of a hands-free intercom configured to automatically receive call handoffs from mobile communication devices.

**[0029]** FIG. 10 is a block diagram of a system for automatically receiving call handoffs from mobile communication devices.

**[0030]** FIG. 11 is a flow diagram of a method for receiving a handoff of a communicative coupling from a mobile device.

**[0031]** FIG. 12 is a perspective view of a hands-free intercom configured to automatically communicatively couple a user with one or more appliances.

**[0032]** FIG. 13 is a block diagram of a system for automatically communicatively coupling users with appliances.

**[0033]** FIG. 14 is a flow diagram of a method for automatically communicatively coupling users with appliances.

**[0034]** FIG. 15 is a perspective view of a hands-free intercom configured to provide video aided communication to a user.

**[0035]** FIG. 16 is a block diagram of a system for providing video aided communication to a user.

**[0036]** FIG. 17 is a flow diagram of a method for providing video enable communication to a user.

**[0037]** FIG. 18 is a perspective view of a hands-free intercom configured to induce a user to move to a desired location.

**[0038]** FIG. 19 is a block diagram of a system for inducing a user to move to a desired location.

**[0039]** FIG. 20 is a flow diagram of a method for inducing a user to move to a desired location.

**[0040]** FIG. 21 is a perspective view of a hands-free intercom configured to provide privacy to a user.

**[0041]** FIG. 22 is a flow diagram of a method for providing private communications to a user.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

**[0042]** In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented here.

**[0043]** A conventional intercom may be able to communicatively couple users (e.g., occupants of a building, occupants of a vehicle, etc.) to each other via a plurality of user interfaces. Unfortunately, the intercom may require a tactile input to specify a desired interface rather than being able to determine a desired user based on a non-tactile input, such as a gesture, facial expression, eye movement, or a verbal input. The intercom may require the user to wear or carry communication equipment, such as a microphone, a speaker, or a wireless transceiver. The intercom may also be unable to interact with other systems, such as cell phone networks, computer networks, local appliances, local computers, and/or the like, and thus may only be able to interact with entities via the user interfaces. The intercom may also require the user to select which device to communicate with rather than the intercom automatically selecting the communication device based on the user to be contacted. The intercom may lack access and privacy control. For example, the intercom may connect a remote entity to the user regardless of the time, who is with the user, the identity of the remote entity, etc. The intercom may not protect against eavesdroppers or keep conversations private from others near the user. Therefore, there is a need for an improved intercom that remedies these deficiencies.

**[0044]** A hands-free intercom may include a user-tracking sensor to determine a location of a user, a directional microphone configured to target the user and measure vocal

emissions by the user, a directional sound emitter configured to target the user and deliver audio to the user, and a communication interface configured to communicatively couple the user to an entity of interest (e.g., by communicatively coupling the directional microphone and directional sound emitter to a communication device of the entity of interest). The directional microphone and directional sound emitter may be located remotely from the user. The directional microphone and directional sound emitter may be wirelessly coupled to the communication interface, wired to the communication interface, and/or the like. The directional microphone may include a phased array, a metamaterial array (e.g., an acoustic analog of metamaterial surface antenna technology), and/or the like. The directional microphone and the directional sound emitter may receive an indication of the location of the user from the user-tracking sensor and may target the indicated location for measurement of vocal emissions and delivery of audio. The user-tracking sensor may include a plurality of cameras to track user location, user gestures, and/or the like. The directional microphone and/or directional sound emitter may move focal direction as the user moves to track the user. The directional sound emitter may be configured to emit ultrasonic sound waves configured to frequency convert to produce desired sounds that are audible to the user. The ultrasonic waves, by virtue of their short wavelengths, can be selectively directed and focused to the user without spreading to other regions; in some embodiments, different ultrasonic waves can be directed to the left and right ears of the user. For example, the ultrasonic sound waves may be premodulated with audible-frequency signals and then be nonlinearly frequency downshifted in the air and/or frequency downshifted in a nonlinear acoustic material in or on the user (e.g., natural tissue near the ear, or nonlinear material in an earpiece) so as to produce audible sounds. The premodulation can be selected such that the audible sounds produced following the nonlinear frequency downshifting form desired sounds, e.g., intelligible human speech. Alternatively, or in addition, a plurality of ultrasonic sound waves may be beat together to frequency convert to the desired frequency. For instance, a 100 kHz wave can be beat together in a nonlinear material (e.g., air, tissue, or an earpiece) with a modulated beam having frequencies of 102-120 kHz to generate audible sounds with frequencies between 2 kHz and 20 kHz.

**[0045]** The communication interface may identify the entity of interest based on a non-tactile input received from the user. In an embodiment, the user-tracking sensor and/or an associated camera may detect a gesture by the user indicative of the entity of interest. For instance, the user may employ eight different gestures to identify eight different entities of interest. In one embodiment, the user may use fingers or other gestures to display numbers or letters which identify the entities of interest (e.g., from a list). In another embodiment, the user may simply use a pointing gesture to identify a nearby entity of interest. The gestures may include purposely employed eye movements or facial expressions, such as a blink, a purposely raised eyebrow, etc. For example, a user with a disability may be able to use a facial gesture rather than an arm or hand gesture.

**[0046]** Alternatively, or in addition, the directional microphone may receive vocal emissions from which the communication interface identifies the entity of interest. For example, the vocal emissions may include a spoken com-

mand, a name of the entity of interest, and/or the like, and/or the communication interface may identify the entity of interest based on a tone of voice, a subject matter of the vocal emission, a prosody, an amplitude, and/or the like. Such identifiers need not be by themselves globally unique, but can serve to identify the entity of interest from a limited list of likely entities of interest. For example, if the user has only one acquaintance named Sam, he can identify him by Sam rather than by Samuel James Tyler. Or, if he has 5 acquaintances named William, the phrase “Bill, what did you think of yesterday’s meeting” may be sufficient to identify the specific entity of interest, based on the partial name and the joint attendance at a defined meeting. The communication interface may be configured to add additional participants based on vocal emissions, gestures, facial expressions, and/or eye movements by the user, which may be used with any or all of the previous discussed methods of identifying the entity of interest. The entities of interest may be located in the room with the user and/or may be remotely located.

**[0047]** The communication interface may perform one or more speech recognition algorithms on the vocal emissions to identify the subject matter of the vocal emissions. The communication interface may track one or more previous subject matters of one or more previous conversations and/or may store one or more keywords from one or more previous conversations, which may then be used to identify the entity of interest. There may be one or more than one subject matter and/or keyword per conversation, and/or a subject matter and/or keyword may be associated with multiple conversations. The communication interface may gather information from an external source (e.g., a website, such as a social media site, and/or the like) to identify the entity of interest. The communication interface may identify the entity of interest based on a recency in time of a previous conversation. The communication interface may simply select a most recent conversation, may weight conversations based on recency and relevance, and/or the like. The communication interface may select the entity of interest based on a single most relevant and/or recent conversation and/or based on a plurality of conversations with the entity of interest. The communication interface may identify the entity of interest based on a physical proximity to the user (e.g., the entity of interest is in an adjacent room, a location of the entity of interest determined by a satellite positioning system, etc.). The communication interface may identify the entity of interest based upon a calendar of the user, e.g., based on the time of a scheduled conversation, the relative order of several scheduled conversations, or the like.

**[0048]** The communication interface may analyze the subject matter of the vocal emissions and/or previous conversations using a language analysis algorithm. In an embodiment, the communication interface may weight the results from a plurality of language analysis algorithms to determine the subject matter of the vocal emissions and/or previous conversations. The communication interface may reject an identification of the entity of interest if a confidence score is below a predetermined threshold. If the identification is rejected, the communication interface may prompt the user to specify the entity of interest. The communication interface may suggest a most likely candidate (e.g., one with a highest confidence score) when prompting the user. In an

embodiment, the communication interface may use the language of the vocal emissions to help identify the entity of interest.

**[0049]** The communication interface may be configured to identify the entity of interest solely in response to the vocal emissions without the hands-free intercom first receiving a tactile input. Alternatively, or in addition, the communication interface may determine whether the user would like to communicate using the hands-free intercom without first receiving a predetermined phrase. The communication interface may determine whether the user is talking to an entity other than the user's self, e.g., based on the subject matter, prosody, amplitude, etc. of the user's utterances. The communication interface may determine whether the user is talking to a nonresponsive object, such as a plant.

**[0050]** The communication interface may be configured to determine whether or not the entity of interest is within listening range of the user and may communicatively couple the user to the entity of interest if the entity of interest is not within listening range. The communication interface may determine whether the entity of interest is within listening range based on responsive vocal emissions and/or the lack thereof by the entity of interest. The communication interface may determine whether the entity of interest is within listening range based on responsive motion from the entity of interest (e.g., head motion, body motion, eye motion, etc.). The communication interface may determine whether the entity of interest is within listening range based on a measured volume of the vocal emissions (e.g., a volume measured by a directional microphone near the user, a volume measured by a directional microphone near the entity of interest, etc.). The communication interface may determine whether the entity of interest is within listening range based on whether entities of interest were able to hear vocal emissions by the user in previous instances under similar circumstances.

**[0051]** The communication interface may select the entity of interest from among one or more entities being tracked by the user-tracking sensor and/or a plurality of user-tracking sensors. The user-tracking sensor and/or plurality of user-tracking sensors may occupy a plurality of locations and/or structures. The communication interface may select the entity of interest from among one or more entities that nominally occupy a structure, such as a structure containing the hands-free interface. The communication interface may select the entity of interest from among one or more entities on a contact list, such as a cell phone contact list, a member/employee list for an organization, and/or the like, and/or from among a user-identified set of entities from the contact list (e.g., a set smaller than the entire contact list). The communication interface may select the entity of interest from among family members of the user. In some embodiments, the entity of interest may be a domesticated animal, such as a pet. The communication interface may select the entity of interest from among frequently contacted entities. The communication interface may identify the entity of interest, for example, based on a spoken name, vocal characteristics, a code phrase, facial recognition, and/or the like. The entity of interest may be identified based on which user is using the hands-free intercom.

**[0052]** The communication interface may be configured to determine the communication device to which to couple based on an identity of the entity of interest, a location of the entity of interest, and/or the like. The communication inter-

face may be configured to determine whether the entity of interest is located in a structure containing the hands-free intercom, a structure containing another hands-free intercom, a home, a workplace, a vehicle, and/or the like. The communication interface may be configured to determine whether the entity of interest is accessible via a computer system, such as if the entity of interest is logged into a computer communication service. The communication interface may be configured to determine whether a mobile communication device of the entity of interest (e.g., a cell phone, tablet, etc.) is communicatively coupled to a wireless network. If the communication device is external to the hands-free intercom, external to a structure in which the user is located, and/or the like, the communication interface may encrypt the communicative coupling.

**[0053]** The communication device of the entity of interest may be part of the hands-free intercom. For example, another directional microphone and another directional sound emitter may couple the entity of interest to the user. The communication interface may locate the entity of interest using the user-tracking sensor. For example, the user-tracking sensor may identify the entity of interest based on a gait, a breathing sound, a breathing rate, facial recognition, and/or the like. The communication interface may locate the entity of interest based on a location of a mobile communication device of the entity of interest, for example, by detecting the location of wireless transmission by the mobile communication device, by receiving the location from the mobile communication device, by using a phone number of the mobile communications device, and/or the like. The communication interface may locate the entity of interest based on a beacon coupled to the entity of interest, such as a beacon configured to transmit a signal (e.g., a radio frequency signal, an infrared signal, an electromagnetic signal, an ultrasonic signal, etc.), a beacon configured to distinctively reflect a signal, and/or the like. The communication interface may locate the entity of interest by tracking which doorways the entity of interest has traversed (e.g., by tracking the last doorway traversed by the entity of interest). The hands-free intercom may include sensors configured to detect passage of the entity of interest through doorways. Once the entity of interest is located, the communication interface may couple the user to a directional microphone and directional sound emitter closest to the entity of interest. Alternatively, the communication interface may couple the user to a cell phone, work phone, internet phone or communication service, and/or the like, for example, if the entity of interest is not near a user interface of the hands-free intercom. Accordingly, the communications interface may connect to the entity of interest's communication device via an existing communications network, such as a cellular network, a Wi-Fi network, the internet, a wired network, a wireless network, etc. In an embodiment, the communication device of the entity of interest can interact with the user's communication interface without consideration that the user is employing a hands-free intercom, e.g., just as it would interact with a wired or wireless phone.

**[0054]** The communication interface may be configured to summon the entity of interest to a nearest communication device. The communication interface may summon the entity of interest by playing a loud, undirected sound (such as a name, a vocal emission from the user, a tone, etc.) from a sound emitter nearest the entity of interest, by transmitting a text message, by transmitting an email, and/or the like. The

communication device may receive a communications request from the communications interface and may summon the entity of interest via summoning signals from the device, such as ringtones, vibrations, lights, etc. The communication device may include a mobile communication device, the hands-free intercom, another hands-free intercom, a computer system, and/or the like.

**[0055]** The communication interface may be configured to determine the availability of the entity of interest. The communication interface may report the determined availability to the user (e.g., using a visual indication, an audible indication, etc.). In some embodiments, the determined availability may be reported only if the entity of interest is unavailable. The availability may include available, occupied, in a call, and/or the like. The communication interface may update the user on the availability of the entity of interest when the availability changes.

**[0056]** The communication interface may be configured to record vocal emissions from the user (e.g., the vocal emissions used to identify the entity of interest) and deliver the recorded vocal emissions after identification of the entity of interest. In some embodiments, the communication interface may strip-out identification phrases before delivering the body of the message. In other embodiments, the identification material forms part of the body of the message and can be analyzed, used to identify and connect to the entity of interest, and then delivered to him. The communication interface may disguise a connection delay from being observable by the entity of interest. The communication interface may deliver an audio indication to the user prior to delivery of the recorded vocal emissions to the entity of interest. The audio indication may include a contact status indicator associated with the communication device, such as a ringing a sound, a busy sound, and/or the like. The communication interface may be configured to mute, pause, terminate, etc. the communicative coupling responsive to a vocal command by the user, a gesture by the user (e.g., a facial gesture, an arm gesture, a hand gesture, etc.), eye movements by the user, and/or the like. The communication interface may also, or instead, be configured to mute, pause, terminate, etc. the communicative coupling responsive to a command from the entity of interest, such as a vocal command, an electronic signal from the communication device, and/or the like. The hands-free intercom may indicate to the user when the communicative coupling is paused and/or terminated.

**[0057]** The communication interface may receive a request from a remote entity to communicatively couple to the user. The communication interface may determine whether to couple the remote entity to the user, for example, based on one or more access rules. The communication interface may determine whether to couple the remote entity to the user based on which room the user is occupying (e.g., a bedroom, a bathroom, an office, a kitchen, etc.), based on an activity of the user (e.g., an activity determined by the user-tracking sensor), based on a time of day, based on a day of the week, and/or the like. In an embodiment, the access rules may include room-specific time restrictions. The communication interface may be configured to determine whether to couple the remote entity to the user based on an identity of the remote entity. For example, the communication interface may connect the remote entity without prompting, refuse the request to couple, prompt the user on whether to couple, and/or the like depending on the identity

of the remote entity. The communication interface may determine whether to couple the remote entity to the user based on an identity of the user.

**[0058]** The communication interface may determine whether to couple the remote entity by prompting the user, and/or the communication interface may determine whether to prompt the user based on access rules. The user may accept the communicative coupling with a vocal command, a gesture (e.g., a facial gesture, an arm gesture, a hand gesture, etc.), eye movements, and/or the like. The user may be able to accept a communication without speaking or even responding to the communication. For example, the remote entity may deliver a communication without expecting a response, and/or the user may be unable to respond to communications. In an embodiment, the user may be an appliance, and the communication interface may determine whether the remote entity can couple to the appliance. In an embodiment, the remote entity may be an appliance, and the communication interface may determine whether the user can couple to the appliance (e.g., whether he is authorized to do so).

**[0059]** The communication interface may be configured to determine whether to couple the remote entity to the user based on a subject matter of the request, an urgency level, a user status received from an electronic calendar, an indication of user availability received from the user, and/or the like. The communication interface may be configured to prompt the user periodically to update the indication of user availability when the user has indicated unavailability. The communication interface may receive an indication of a user-specified period for prompting at the time the user indicates unavailability. The communication interface may determine whether to couple the remote entity to the user based on whether the user is alone, based on an identity of a person near the user, based on a relationship between the remote entity and the person near the user, based on a relationship between a subject matter and the person near the user, and/or the like. The communication interface may be configured to determine whether to forward the request to a user device when the user is out of range of the sound emitter. The communication interface may determine whether to forward the request based on the user device to which the request would be forwarded, based on an identity of the remote entity, and/or the like.

**[0060]** The user-tracking sensor may be configured to detect an eavesdropper. The hands-free intercom may warn the user when an eavesdropper is present. The hands-free intercom may produce an audio indication that an eavesdropper is present (e.g., a tone, a buzz, a vocal indication, etc.), a visual indication that an eavesdropper is present (e.g., a light, etc.), and/or the like. The communication interface may refuse to communicatively couple when an eavesdropper is present. The user-tracking sensor may be configured to detect eavesdroppers in the same room as the user, to detect eavesdroppers within a listening range of the user (e.g., to detect eavesdroppers outside a doorway of a room with the user), and/or the like. The user-tracking sensor may be configured to continuously monitor for eavesdroppers during communicative coupling.

**[0061]** The hands-free intercom may be configured to automatically receive call handoffs, for example, from mobile communication devices. The communication interface may be configured to determine the user is communicatively coupled to a remote entity via a mobile communi-

cation device of the user. The communication interface may be configured to communicatively couple the directional microphone and/or the directional sound emitter to a communication device of the remote entity. Alternatively, or in addition, the hands-free intercom may receive calls intended for the mobile communication device rather than the mobile communication device receiving those calls.

**[0062]** In an embodiment, the communication interface may be configured to communicatively couple the directional microphone and/or the directional sound emitter to the user's mobile communication device to communicatively couple them with the remote entity. For example, the directional microphone and/or directional sound emitter may be configured to act as peripherals for the user's mobile communication device, and the user's mobile communication device may treat them as such. The communication interface may be configured to communicatively couple the directional microphone and/or directional sound emitter to the user's mobile communication device using a short distance wireless protocol, such as Bluetooth, Wi-Fi, etc. The communication interface may be configured to pair with the mobile communication device prior to coupling.

**[0063]** The communication interface may instruct the user's mobile communication device to disable a local microphone and/or a local sound emitter before, during, or after coupling. The communication interface may instruct the user's mobile communication device to perform one or more actions to save power. The one or more actions may include dimming a display, turning off a display, reducing communication with a service provider, and/or the like. The communication interface may compare the quality of the communicative coupling of the directional microphone and/or directional sound emitter with the remote entity's communication device to the quality of the communicative coupling of the user's mobile communication device with the remote entity's communication device. The communication interface may perform the comparison before terminating the communicative coupling between the user's mobile communication device and the remote entity's communication device and/or before instructing the user's mobile communication device to disable the local microphone and/or local sound emitter.

**[0064]** In some embodiments, the communication interface may be configured to communicatively couple the directional microphone and/or the directional sound emitter to the remote entity's communication device over a communication network without routing communications through the mobile communication device of the user. The communication interface may transmit a request to the user's mobile communication device to transfer the communicative coupling with the remote entity. The user's mobile communication device may provide the request to a service provider. Alternatively, or in addition, the communication interface may transmit the request to transfer the communicative coupling directly and/or indirectly to the service provider. The communication interface may verify with the service provider that the user's mobile communication device is proximate to the communication interface and/or may verify that the user's mobile communication device has provided permission to hand off the coupling. The service provider may also, or instead, verify proximity and/or permission to hand off directly with the user's mobile communication device.

**[0065]** The communication interface may be configured to communicatively couple with the user's mobile communication device and route communications between the user's mobile communication device and the remote entity's communication device (e.g., while the user is still interfacing with the local microphone and/or local sound emitter of the user's mobile communication device). The communication interface may next communicatively couple the directional microphone and/or directional sound emitter to the communication device of the remote entity. The communication interface may then disconnect the user's mobile communication device from the remote entity's communication device. The communication interface may communicatively couple with the user's mobile communication device using a wireless network protocol (e.g., Wi-Fi, etc.), a mobile communication device protocol (e.g., a cellular protocol, such as Wi-MAX, LTE, etc.), and/or the like. In an embodiment, the communication interface may act as a cellular base station for the user's mobile communication device. Alternatively, the communication interface may initially couple the directional microphone and/or directional sound emitter with the mobile communication device prior to directly coupling with the remote entity.

**[0066]** The communication interface may determine the user is communicatively coupled to the remote entity by detecting vocal emissions by the user (e.g., using the directional microphone). For example, the communication interface may determine the user is communicatively coupled to the remote entity based on the content of the vocal emissions. Alternatively, or in addition, the communication interface may determine the user is communicatively coupled to the remote entity by receiving an indication from the user-tracking sensor that the remote entity is outside of listening distance of the user, by receiving an indication from the user-tracking sensor of the position of the user's mobile communication device (e.g., next the user's ear), by prompting the user's mobile communication device for a status, by receiving a notification from the user's mobile communication device, and/or the like. The notification may be transmitted by the user's mobile communication device in response to a transmission by the communication interface of its availability to couple. The transmission by the communication interface may be sent directly to the user's mobile communication device, may be sent indirectly (e.g., via a service provider) to the user's mobile communication device, may be broadcast to a plurality of devices within listening range, may be transmitted directionally to the user's mobile communication device, and/or the like.

**[0067]** The communication interface may be coupled, paired, and/or the like with the user's mobile communication device prior to the user coupling with the remote entity and/or a decision to hand off a coupling. The communication interface may be configured to determine the user is communicatively coupled to the remote entity by receiving a wake-up notification from the user's mobile communication device, by receiving a notification from the user's mobile communication device without prompting, by receiving data intended for the directional sound emitter from the user's mobile communication device, by receiving a request from the user's mobile communication device for data (e.g., vocal emissions) from the directional microphone, and/or the like.

**[0068]** The communication interface may determine the directional microphone and/or directional sound emitter should be communicatively coupled to the remote entity's

communication device based on a user gesture, facial expression, and/or eye movement detected by the user-tracking sensor. The communication interface may determine the directional microphone and/or directional sound emitter should be communicatively coupled to the remote entity based on vocal emissions received by the directional microphone and/or the local microphone. The vocal emissions may indicate that the directional microphone and/or directional sound emitter should be communicatively coupled to the remote entity. Alternatively, or in addition, the user's mobile communication device may be configured to determine when to communicatively couple the directional microphone and/or directional sound emitter to the remote entity. For example, the user's mobile communication device may receive a user input and/or may automatically determine the directional microphone and/or directional sound emitter should be communicatively coupled to the remote entity.

**[0069]** The communication interface may update the user's mobile communication device and/or a service provider with a status of a communicative coupling of the directional microphone and/or directional sound emitter with the user and/or the remote entity. The communication interface may transmit a notification to the user's mobile communication device and/or the service provider that the directional microphone and/or the directional sound emitter are or are not communicatively coupled to the user. The communication interface may transmit a notification to the user's mobile communication device and/or the service provider that the directional microphone and/or the directional sound emitter are not available to be communicatively coupled to the user (e.g., to inform the user's mobile communication device and/or the service provider not to attempt a hand-off). A record of communications using the hands-free intercom may be saved to a log of the user's mobile communication device.

**[0070]** The communication interface may terminate the communicative coupling between the remote entity and the directional microphone and/or directional sound emitter, may hand off the communicative coupling to another directional microphone and/or another directional sound emitter, and/or may hand off the communicative coupling back to the user's mobile communication device under certain circumstances. For example, the communication interface may determine that the user is leaving the range of the directional microphone and/or the directional sound emitter (e.g., by using the user-tracking sensor, by analyzing the amplitude of vocal emissions, and/or the like). The communication interface and/or the user-tracking sensor may be configured to predict a likelihood that the user will leave the range, to predict a time at which the user will leave the range, and/or the like. The communication interface and/or the user-tracking sensor may determine the user is leaving the range based on at least one of a location of the user, a direction of motion of the user, a velocity of the user, and/or the like. The communication interface and/or the directional microphone may be configured to determine the user is leaving the range based on a sound quality received by the directional microphone.

**[0071]** The communication interface may also, or instead, determine that the user's mobile communication device is leaving the range of a communicative coupling between the communication interface and the user's mobile communication device and/or that another cellular base station would

provide a stronger cellular signal. The user may indicate that the communicative coupling between the directional microphone and/or the directional sound emitter and remote entity's communication device should be terminated and/or handed off. For example, the user-tracking sensor may be configured to receive a user gesture and/or detect a facial expression and/or eye movement and/or the directional microphone may be configured to receive vocal emissions indicating the communicative coupling should be terminated and/or handed off.

**[0072]** The directional sound emitter may alert the user prior to terminating the communicative coupling between the directional microphone and/or directional sound emitter and the remote entity. The communication interface may be configured to determine whether the user stays within the range of the directional microphone, directional sound emitter, and/or communication interface in response to the alert (e.g., by using the user-tracking sensor, by analyzing the amplitude of vocal emissions, by monitoring signal strength, and/or the like). The communication interface may be configured to indicate to the user's mobile communication device and/or a service provider that the communicative coupling between the directional microphone and/or directional sound emitter and the remote entity's communication device is being terminated. The communication interface may be configured to indicate to the user's mobile communication device and/or a service provider that a communicative coupling should be established between the user's mobile communication device and the remote entity's communication device. The communication interface may be configured to forward communications to the mobile communication device when the user is out of range of the hands-free intercom when the communications are received.

**[0073]** The user's mobile communication device may be configured to determine that the communicative coupling between the directional microphone and/or the directional sound emitter and the remote entity should be terminated and/or handed off. The user's mobile communication device may notify the communication interface to terminate and/or hand off the communicative coupling, and/or the user's mobile communication device may terminate and/or recover the communicative coupling itself. The user's mobile communication device may be configured to determine the communication interface is out of range and/or out of communicative contact, to determine a cellular signal from another cellular base station is stronger than the signal from the communication interface, to determine a sound quality of the communicative coupling between the directional microphone and/or directional sound emitter and the remote entity's communication device is below a predetermined threshold, to receive a user indication that the communicative coupling should be terminated and/or handed off, and/or the like.

**[0074]** The communication interface may be configured to determine whether the user has rights to use the directional microphone and/or the directional sound emitter. The communication interface may determine whether the user has rights based on an identifier received from the user's mobile communication device; based on a previous coupling with the user's mobile communication device; based on whether the communication interface and the user's mobile communication device are paired; based on an identity of the user; based on facial recognition of the user performed by, e.g., the user-tracking sensor; based on vocal emissions from the

user (e.g., based on voice recognition performed on the vocal emissions, based on a code phrase in the vocal emissions, etc.); based on a gesture, facial expression, and/or eye movement detected by, e.g., the user-tracking sensor; and/or the like.

**[0075]** The hands-free intercom may be configured to automatically connect a user to an appliance. The communication interface may be configured to communicatively couple the directional microphone and/or directional sound emitter to the appliance. The user may indicate to which appliance the communication interface should couple. For example, the user-tracking sensor may detect a user gesture, facial expression and/or eye movement indicating an appliance, the directional microphone may detect a vocal emission including a vocal identification of an appliance (e.g., a vocal identification preceded by vocalized keyword), and/or the like. The communication interface may communicatively couple the user to the appliance in response to the indication of which appliance.

**[0076]** The appliance may include a laundry washing machine, a laundry drying machine, a dish washing machine, a refrigerator, a freezer, a water heater, a thermostat, a furnace, an air conditioner, an oven, a range, a microwave oven, a coffee machine, a rice cooker, a bathtub, a shower, an alarm clock, a pill dispenser, a home control center, an outdoor sprinkler system, an electrical energy storage system, an electrical charging system, a security control system, a door lock, a room light, a window covering, a water softener, and/or the like. The appliance may include a television, a radio, a stereo, a projector, a DVD player, a video game console, a digital video recorder, a home theater system, a home entertainment system, and/or the like. The appliance may include a printer, a copy machine, a fax machine, a computer, a message center, an answering machine, and/or the like.

**[0077]** The directional microphone may receive vocal emissions from the user intended for the appliance. The vocal emissions may include a request to change a setting of the appliance. The vocal emissions may include a request for the appliance to start an activity, such as preheating an oven, washing a plurality of objects, drying a plurality of objects, changing a temperature of a room, turning on a television, playing a song, recording a television program, starting to fill a bathtub, locking a door, sending an email, printing a document, playing answering machine messages, and/or the like. The request may indicate the appliance should notify the user when the activity is completed (e.g., notify the user via the directional sound emitter). The request may indicate a time period for which the activity should be performed.

**[0078]** The vocal emissions from the user may include a request for a status of the appliance. The status may include a current activity being performed by the appliance, a time to complete an activity, a time to complete all activities, and/or the like. One appliance may request information from another appliance to determine the time to complete an activity and/or all activities. For example, the appliance may be a laundry washing machine, and the laundry washing machine may request a drying time from a laundry drying machine. Alternatively, or in addition, the appliance may be a water heater, and the water heater may request a room temperature from a thermostat. The information may be requested via the communication interface and/or directly from the other appliance.

**[0079]** The vocal emissions from the user may include a request to change settings of the appliance. The request may include a request to repeat an activity an additional time (e.g., repeating a wash cycle, a rinse cycle, a spin cycle, a drying cycle, etc.). The request may include a request to minimize a time to completion. The appliance may shorten one or more activities to complete task faster. The communication interface may automatically instruct the appliance to change settings, for example, based on an activity of the user (e.g., an activity determined by a user-tracking sensor), a location of the user, and/or the like. The communication interface may instruct a thermostat to change one or more room temperatures based on the location of the user, instruct a water heater to change water temperature based on a location of the user, instruct a dish and/or laundry washing and/or drying machine to target a particular completion time based on a location of the user, and/or the like. The vocal emissions from the user may include a request to stop an activity.

**[0080]** The appliance may be configured to report information to the user via the communication interface and/or the directional sound emitter. The user may respond to the reported information (e.g., vocally) by, inter alia, requesting a reminder after an indicated time, request a reminder when the user changes rooms, and/or the like. The reported information may include that an activity and/or task has been completed, a notification that a timer has expired and/or that it is predetermined time (e.g., an alarm clock may alert a user that it is time to wake up, a pill dispenser may alert a user to take medication, etc.), and/or the like. The reported information may include that a consumable substance is low. The consumable substance may include soap, bleach, drying agent, static removing agent, fuel, salt, paper, ink, etc. The reported information may include a reminder of current settings, such as an indication that an oven is on, that a door is locked, etc. Alternatively, or in addition, the communication interface may determine the information to report to the user. The communication interface and/or directional sound emitter may deliver a notification of a change in activity, such as an indication a thermostat is changing a target temperature according to a predetermined schedule, an indication that a current appliance cycle has changed, and/or the like.

**[0081]** The communication interface and/or directional sound emitter may deliver a request for permission to change settings. The request may be from the communication interface, the appliance, another user, and/or the like. For example, the appliance and/or communication interface may determine that the settings should be changed based on a sensor measurement. The appliance and/or communication interface may determine that an additional activity is needed (e.g., an extra wash cycle, rinse cycle, spin cycle, drying cycle, extra drying time, etc.). The communication interface and/or directional sound emitter may indicate an additional time required to complete an activity and/or task if settings are changed, for example, by the user, the other user, the appliance, the communication interface, etc. The appliance, communication interface, and/or directional sound emitter may be configured to deliver a report of an error with the appliance. The vocal emissions from the user may include a user command to the appliance in response to the reported error. The appliance, communication interface, and/or directional sound emitter may deliver a request for permission to



contact a maintenance provider. The user may respond (e.g., vocally) to indicate whether permission is granted or not.

**[0082]** The communication interface may be configured to determine whether the appliance is permitted to communicate with the user. The communication interface may evaluate user settings to determine whether the appliance is permitted to communicate with the user. The communication interface may determine whether the appliance is permitted to communicate with the user based on time of day, user location (e.g., a location determined by the user-tracking sensor), a user indication of availability, whether another person is with the user, an identity of the appliance, an identity of the user, and/or the like. The communication interface may determine that the user is accessible via a mobile user device and may determine whether the appliance is permitted to have communications forwarded to a mobile user device.

**[0083]** The communication interface may determine based on context whether the appliance is permitted to communicate with the user. The communication interface may determine whether the user requested the communication from the appliance, may determine historical user behavior in similar situations, and/or the like. The communication interface may determine whether the appliance is permitted to communicate with the user based on user activity (e.g., an activity determined by the user-tracking sensor). For example, the user-tracking sensor may determine whether the user is sleeping, and the communication interface may determine whether communication is permitted based on whether the user is sleeping. The user-tracking sensor may determine whether the appliance is permitted to communicate with the user based on a type of communication from the appliance. The communication interface may allow certain types of communications, such as urgent maintenance requests, notifications of activity and/or task complete, etc., despite other factors weighing against permitting communication. The communication interface may decide to notify the user of a detected and/or suspected leak despite the user sleeping, the time being 3:00 AM, and/or the like.

**[0084]** The communication interface may determine whether the user is permitted to communicate with the appliance. The communication interface may determine whether communication is permitted based on settings by a primary user, based on an identity of the user, based on whether the user instructed the appliance to begin its current activity, and/or the like. The communication interface may identify the user by performing voice recognition on vocal emissions received by the directional microphone and/or communication interface. The communication interface may determine whether communication is permitted based on security information provided by the user (e.g., a passcode, a password, a passphrase, a gesture, a facial expression, an eye movement, etc.). The communication interface may determine whether communication is permitted based on a location of the user. For example, a remotely located user may be prevented from communicating with the appliance, and/or only some users may be permitted to communicate with appliances while remotely located. The communication interface may determine whether communication is permitted based on a type of communication. Certain users may be able to request and receive status information but may be prevented from delivering commands, e.g., to perform an activity and/or task, change a setting, etc.

**[0085]** The communication interface may determine whether a first appliance is permitted to communicate with a second appliance. The communication interface may evaluate user settings to determine whether inter-appliance communication is permitted. The communication interface may determine whether communication is permitted based on a type of communication. For example, appliances may be able to request and receive status information but may be prevented from delivering commands and/or prevented from making updates or changes to software and/or firmware. The communication interface may determine whether communication is permitted based on an identity of the first appliance and/or an identity of the second appliance. The communication interface may be configured to record and store copies of communications between the appliance and the user of the hands-free intercom; such recordings may include metadata, such as time of day, appliance settings, location and/or activity of the user, etc. The communication interface may record communications between appliances.

**[0086]** Various divisions of labor between the appliance and the communication interface are contemplated. In an embodiment, the communication interface may transmit all communications it receives to the appliance, and the appliance may determine access rights for the communications. The communication interface may be configured to convert vocal emissions (e.g., audio representations thereof) into messages understood by the appliance. Alternatively, or in addition, the communication interface may deliver vocal emissions (e.g., audio representations thereof) to the appliance, and the appliance may be configured to decipher the vocal emissions (e.g., audio representations thereof). The communication interface may be configured to convert messages from the appliance into an audible and/or user-interpretable form, and/or the appliance may be configured to deliver audible and/or user-interpretable messages to the communication interface. The appliance may be configured to receive and respond to communications from the communication interface. Alternatively, or in addition, the communication interface may directly retrieve information from and/or write information to a non-transitory computer readable storage medium of the appliance, and/or the communication interface may be configured to request and deliver information via an application programming interface (API) of the appliance.

**[0087]** The hands-free intercom may be configured to provide video-aided communication to the user. The hands-free intercom may include a directional camera configured to capture video of the user, and/or the communication interface may communicatively couple to a camera of another system to capture video of the user. The other system may be a computer system, a mobile communication device, a surveillance system (e.g., a system including a camera for news gathering, web viewing, traffic, etc.), a security system, and/or the like. The directional and/or other camera may be part of the user-tracking sensor. The hands-free intercom may include a directional video projector configured to deliver video to the user by projecting video into the user's eye(s) (e.g., by projecting video onto the user's retina(s)). The directional camera and/or the camera of the other system may be configured to capture stereoscopic video of the user, and/or the directional video projector may be configured to deliver video stereoscopic video to the user. The directional camera, the camera of the other system, and/or the directional video projector may be configured to

track the user when the user moves. The directional microphone and/or sound emitter may be controlled based on the tracking of the user by the directional camera, the camera of the other system, and/or the directional video projector. Alternatively, or in addition, the directional sound emitter, directional camera, the camera of the other system, and/or the directional video projector may be controlled based on tracking by the directional microphone. The communication interface may be configured to provide a location of the user to a controller of one or more video cameras.

**[0088]** In some embodiments, there may be multiple directional cameras (e.g., as part of a plurality of interfaces of the hands-free intercom), and/or the communication interface may be communicatively coupled to a plurality of video cameras (e.g., of a plurality of other systems). The communication interface may be configured to select one or the plurality of cameras from which to receive video of the user based on a location and/or orientation of the user and/or based on an orientation, a location, a resolution, an imaging capability, an ownership, an availability, a price for supplied video, and/or the like for one or more of the cameras. The communication interface may be configured to deliver a request to capture video and/or a request for video already being captured to a controller of the video camera.

**[0089]** The communication interface may be configured to provide captured video from the directional camera and/or the camera of the other system to a remote entity. The communication interface may be configured to edit the captured video before providing it to the remote entity. Editing may include replacing the user with an avatar, blurring one or more features of the user, masking unclothed portions of the user, replacing the user with a silhouette, and/or the like. In an embodiment, the communication interface may receive a hand off of a communicative coupling with the remote entity from a mobile communication device, and the communication interface may provide video to the remote entity after the communicative coupling has been handed off.

**[0090]** The communication interface may be configured to identify a gesture from the user, facial expression of the user, and/or eye movement of the user based on the captured video. For example, the gesture, facial expression, and/or eye movement from the user may be a command for the hands-free intercom. The communication interface may use the captured video to assist in speech recognition of vocal commands from the user. The communication interface may be configured to instruct the directional camera and/or the camera of the other system to adjust a camera parameter (e.g., zoom, focus, illumination, pan, etc.), and/or the directional camera and/or the camera of the other system may be configured to automatically adjust a camera parameter (e.g., zoom, focus, illumination, pan, etc.). For example, the communication interface, directional camera, and/or camera of the other system may detect the presence of a face in the video and may adjust the zoom, focus, illumination, pan, etc. to locate the face in a predetermined location in the video. Alternatively, or in addition, the directional camera, camera of the other system, and/or communication interface may instruct a remote light source to adjust illumination.

**[0091]** The directional video projector may be configured to deliver video of the remote entity, to deliver video including status information for the communicative coupling (e.g., an identity of the remote entity, a location of the remote entity, a time that the communicative coupling has

been active, a quality of the communicative coupling, whether the communicative coupling is being recorded, whether an eavesdropper is present, etc.), to deliver video indicating one or more commands that can be delivered by the user, to deliver video indicating a command received from the user, to deliver video including status information from an appliance, and/or the like. The directional video projector may be configured to deliver video including status information about an incoming or outgoing communicative coupling before the incoming or outgoing communicative coupling is established. The directional video projector may be configured to project the video in the user's field of view at a location proximate to the camera capturing video of the user. For example, the directional video projector may project the video so the eyes of a person in the video are at a location proximate to the camera. Accordingly, it may appear to the remote entity like the user is making eye contact when the user looks at the eyes of the person in the video.

**[0092]** The communication interface may be configured to determine whether to provide the captured video to the remote entity based on one or more access rules. Alternatively, or in addition, the directional camera and/or the camera of the other system may be configured to determine whether to capture video based on one or more access rules. The access rules may include rules pertaining to an activity of the user, a location of the user, a clothing status of the user, an identity of the user, an identity of the remote entity, an identity of a person with the user, a capability of the remote entity, a time, a date, and/or the like. The communication interface may be configured to prompt the user about whether to capture video and/or provide the captured video to the remote entity. The directional camera may be configured to determine whether to capture video and/or the communication interface may be configured to determine whether to provide the captured video based on an indication received from the user (e.g., with or without prompting). The indication may include a vocal emission, a gesture, a facial expression, an eye movement, and/or the like. The directional camera may be configured to determine whether to capture video based on an operational state of the directional microphone and/or the directional sound emitter (e.g., whether or not they are turned on, whether they are currently communicating with the user, etc.).

**[0093]** The hands-free intercom may be configured to induce the user to move to a desired location. The hands-free intercom may use the directional sound emitter, a display (e.g., a monitor, a video projector, etc.), and/or the like to induce the user to move to the desired location. Alternatively, or in addition, the hands-free intercom may induce the user to remain within a connectivity boundary. The connectivity boundary may be a boundary where the directional microphone, the directional sound emitter, the communication interface, the directional camera, and/or the display loses connectivity with the user. The directional sound emitter and/or the display may also, or instead, induce the user to face in a desired orientation (e.g., an orientation facing a camera).

**[0094]** The desired location and/or the desired orientation may be a location and/or an orientation where performance of the hands-free intercom is best. The directional microphone may have a high sensitivity for the desired location and/or orientation; the camera may be able to produce high quality images of the desired location and/or orientation; the

directional sound emitter may be able to deliver high quality sound to the desired location and/or orientation; the display may be able to deliver high quality video to the desired location and/or orientation; the communication interface may be able to receive strong signals from wireless devices at the desired location and/or orientation; and/or the like.

**[0095]** The directional sound emitter may induce the user to move to the desired location and/or face in the desired orientation by degrading sound quality, decreasing an audio bit rate, adding overlaid distortion, adding frequency distortion, decreasing sound volume, increasing sound volume (e.g., increasing the volume to an uncomfortable level), playing an unpleasant sound (e.g., a buzzing sound, a screeching sound, an audio feedback sound, etc.), playing a user selected sound, and/or the like. The directional sound emitter may provide the inducement when the user is outside the desired location, moving away from the desired location, near the connectivity boundary, facing away from the desired orientation, turning away from the desired orientation, etc. The amount of inducement may be determined based on a loss in quality of, for example, measured vocal emissions, captured video, and/or signal strength of a wireless device. The amount of inducement may be determined based on a distance of the user from the desired location. For example, the inducement may be maximized near the connectivity boundary.

**[0096]** The directional sound emitter may induce the user to move to the desired location and/or face in the desired orientation by causing the audio to appear as though it is coming from the desired location and/or orientation. The directional sound emitter may adjust the relative volume of the audio delivered to each ear, adjust the relative time delay of the audio delivered to each ear, and/or the like to cause the audio to appear as though it is coming from the desired location and/or orientation. The directional sound emitter may provide a vocal indication to the user to induce the user to move to the desired location and/or to face in the desired orientation. The vocal indication may indicate the desired location, that the user is outside the desired location, a time and/or distance until the user reaches the connectivity boundary (e.g., heading away from the desired location), the desired orientation, that the user is facing away from the desired orientation, etc. The vocal indication may indicate that the user is inside the desired location, a time and/or distance until the user reaches the connectivity boundary (e.g., heading toward the desired location), that the user is facing toward the desired orientation, etc. The directional sound emitter may provide one of a plurality of vocal emissions, and the vocal emission may be selected based on a distance of the user from the desired location.

**[0097]** The display may induce the user to move to the desired location and/or face in the desired orientation by adjusting video delivered to the user. The display may adjust the video by moving its position in the user's field of vision. The display may be configured to project the video into the eyes of the user and may induce the user to move and/or turn by adjusting the video projected into the user's eyes. The display may provide an indication of the desired location, the connectivity boundary, and/or the desired orientation to the user. A projective display may project light onto the floor so as to directly display the desired location, the connectivity boundary, and/or the desired orientation to the user. The indication may include text, one or more arrows, a map (e.g., an orthographic-view map, a scene-view map, etc.), and/or

the like. The display may provide an indication of a time and/or distance until the user reaches the connectivity boundary (either heading toward the desired location or away from it). The display may display boundary lines for the desired location and/or the connectivity boundary. The display may provide an indication that the user is moving away from the desired location and/or turning away from the desired orientation. The display may provide an indication that the user is moving toward the desired location and/or turning toward the desired orientation.

**[0098]** The display may provide visual stimuli indicating the user is outside the desired location, moving towards and/or away from the desired location, facing away from the desired orientation, turning away from the desired orientation, and/or the like. The visual stimuli may include flashing. The frequency of the flashing may be increased as the user moves farther away from the desired location. The display may induce the user to move and/or turn by degrading video quality, decreasing the frame rate of the video, decreasing the number of pixels per frame, decreasing the frame size, decreasing the contrast, decreasing the brightness, increasing the brightness (e.g., to an uncomfortable level), and/or the like. The display may provide the inducement when the user is outside the desired location, moving away from the desired location, near the connectivity boundary, facing away from the desired orientation, turning away from the desired orientation, etc. The amount of inducement may be determined based on a loss in quality of, for example, measured vocal emissions, captured video, and/or signal strength of a wireless device. The amount of inducement may be determined based on a distance of the user from the desired location.

**[0099]** The directional sound emitter may be configured to prevent an eavesdropper from hearing vocal emissions from the user. A tracking sensor may determine the presence of the eavesdropper and/or locate the eavesdropper. For example, the tracking sensor may receive a user indication of the eavesdropper and/or may identify the eavesdropper based on user body language. The directional sound emitter may deliver sound waves to the eavesdropper's ear and/or the user's mouth to prevent the eavesdropper from hearing the vocal emissions. In some embodiments, the directional sound emitter may cancel the sound waves at the user's mouth but may reproduce the sound waves for an intended or desired recipient near the user.

**[0100]** The vocal emissions to be canceled may be measured (e.g., by the directional microphone) and/or predicted. The directional sound emitter may prevent the eavesdropper from hearing the predicted and/or measured vocal emissions. The directional sound emitter may predict a filtration for predicted future vocal emissions to be canceled. The filtration may include an attenuation, a delay, and/or the like. The predicted filtration may be applied to the predicted future vocal emissions, and an inverse of the filtered result may be delivered to the eavesdropper's ear. The future vocal emissions may be predicted based on previous measurements of a filtration between the user and the eavesdropper. For example, the directional microphone may acquire the previous measurements filtration by measuring at the eavesdropper's ear. The directional microphone may distinguish speech from background noise when acquiring the previous measurements of the filtration (e.g., by comparing measurements at the eavesdropper's ear with measurements at the user's mouth). The future vocal emissions may be predicted

based on a prediction of a phoneme being uttered by the user, based on stored characteristics of previous phonemes uttered by the user, based on a predication of a word being uttered by the user, and/or the like.

**[0101]** The vocal emissions to be canceled may be measured, for example, at the eavesdropper's ear, at the user's mouth, and/or the like. The directional microphone may be configured to use electromagnetic radiation to measure the vocal emissions. A filtration between the user's mouth and the eavesdropper's ear may be computed based on the measured vocal emissions. The computed filtration may be applied to the measured vocal emissions, and an inverse of the filtered result may be delivered to the eavesdropper's ear. The filtration may include an attenuation, a delay, and/or the like. A filtration may be computed by comparing sound from the directional sound emitter to measured sound at the eavesdropper's ear. The computed filtration may be applied to the sound from the directional sound emitter, and an inverse of the filtered result may be delivered to the eavesdropper's ear.

**[0102]** The directional sound emitter may be configured to prevent the eavesdropper from hearing the vocal emissions by delivering out-of-phase sound. The out-of-phase sound may be based on measurements of the vocal emissions and may be delivered to the vicinity of the user's mouth. The out-of-phase sound may be based on a prediction of future vocal emissions and may be delivered to the vicinity of the user's mouth. A filtration between the directional sound emitter and the eavesdropper's ear may be measured (e.g., with the directional microphone) and/or predicted, and the directional sound emitter may compensate for the filtration when delivering the out-of-phase sound. A filtration between the user's mouth and the eavesdropper's ear may be measured (e.g., with the directional microphone) and/or predicted, and the directional sound emitter may compensate for the filtration when delivering the out-of-phase sound. Alternatively, or in addition, the directional sound emitter may prevent the eavesdropper from hearing the vocal emissions by delivering obfuscating noise and/or spoofed vocal emissions.

**[0103]** The directional sound emitter may be configured to cancel background noise at the user's ear. The directional microphone may measure background noise at the user's ear, from a point source, omnidirectionally, and/or the like. For example, the directional microphone may compute the background noise by subtracting sound previously delivered to the user by the directional sound emitter from measured sound at the user's ear and/or may compute the background noise at times when no sound is arriving at the user's ear from the directional sound emitter. The directional sound emitter may cancel the background noise by delivering out-of-phase sound. The directional sound emitter may add background canceling sound to audio being delivered to the user. Alternatively, or in addition, the directional sound emitter may cancel ambient noise during an in-person conversation.

**[0104]** The directional sound emitter may be configured to selectively cancel the background noise. For example, the directional sound emitter may allow vocal emissions to reach the user. In an embodiment, the directional sound emitter may be configured to allow (e.g., only allow) vocal emissions directed at the user to reach the user. The vocal emissions directed at the user may be identified based on tone, subject matter, prosody, amplitude, spoken name,

spoken command, etc. The directional sound emitter may allow an alarm to reach the user. The alarm may be a smoke alarm, carbon monoxide alarm, timer alarm, appliance alarm, and/or the like. The user may indicate which sounds should be allowed and/or disallowed.

**[0105]** The hands-free intercom may occupy one or more houses, apartments, office buildings, warehouses, restaurants, stores, malls, outdoor facilities, transportation facilities, hospitals, and/or the like. The hands-free intercom may be located indoors and/or outdoors. The hands-free intercom may include a persistent storage device for automatically recording a conversation between the user and the entity of interest. Alternatively, or in addition, the persistent storage device may store a transcription of the conversation. The communication interface may automatically transmit the recording to the participants. The entity of interest and/or remote entity may include a person, an appliance, a computer system, and/or the like. The user may include a person, an appliance, a computer system, and/or the like.

**[0106]** Embodiments may include various steps, which may be embodied in machine-executable instructions to be executed by a computer system. A computer system includes one or more general-purpose or special-purpose computers (or other electronic devices). The computer system may include hardware components that include specific logic for performing the steps or may include a combination of hardware, software, and/or firmware.

**[0107]** Embodiments may also be provided as a computer program product including a computer-readable medium having stored thereon instructions that may be used to program a computer system or other electronic device to perform the processes described herein. The computer-readable medium may include, but is not limited to: hard drives, floppy diskettes, optical disks, CD ROMs, DVD ROMs, ROMs, RAMs, EPROMs, EEPROMs, magnetic or optical cards, solid-state memory devices, or other types of media/computer-readable media suitable for storing electronic instructions.

**[0108]** Computer systems and the computers in a computer system may be connected via a network. Suitable networks for configuration and/or use as described herein include one or more local area networks, wide area networks, metropolitan area networks, and/or "Internet" or IP networks, such as the World Wide Web, a private Internet, a secure Internet, a value-added network, a virtual private network, an extranet, an intranet, or even standalone machines which communicate with other machines by physical transport of media (a so-called "sneakernet"). In particular, a suitable network may be formed from parts or entireties of two or more other networks, including networks using disparate hardware and network communication technologies.

**[0109]** One suitable network includes a server and several clients; other suitable networks may contain other combinations of servers, clients, and/or peer-to-peer nodes, and a given computer system may function both as a client and as a server. Each network includes at least two computers or computer systems, such as the server and/or clients. A computer system may include a workstation, laptop computer, disconnectable mobile computer, server, mainframe, cluster, so-called "network computer" or "thin client," tablet, smart phone, personal digital assistant or other handheld computing device, "smart" consumer electronics device or appliance, medical device, or a combination thereof.

[0110] The network may include communications or networking software, such as the software available from Novell, Microsoft, Artisoft, and other vendors, and may operate using TCP/IP, SPX, IPX, and other protocols over twisted pair, coaxial, or optical fiber cables, telephone lines, radio waves, satellites, microwave relays, modulated AC power lines, physical media transfer, and/or other data transmission “wires” known to those of skill in the art. The network may encompass smaller networks and/or be connectable to other networks through a gateway or similar mechanism.

[0111] Each computer system includes at least a processor and a memory; computer systems may also include various input devices and/or output devices. The processor may include a general purpose device, such as an Intel®, AMD®, or other “off-the-shelf” microprocessor. The processor may include a special purpose processing device, such as an ASIC, SoC, SiP, FPGA, PAL, PLA, FPLA, PLD, or other customized or programmable device. The memory may include static RAM, dynamic RAM, flash memory, one or more flip-flops, ROM, CD-ROM, disk, tape, magnetic, optical, or other computer storage medium. The input device(s) may include a keyboard, mouse, touch screen, light pen, tablet, microphone, sensor, or other hardware with accompanying firmware and/or software. The output device(s) may include a monitor or other display, printer, speech or text synthesizer, switch, signal line, or other hardware with accompanying firmware and/or software.

[0112] The computer systems may be capable of using a floppy drive, tape drive, optical drive, magneto-optical drive, or other means to read a storage medium. A suitable storage medium includes a magnetic, optical, or other computer-readable storage device having a specific physical configuration. Suitable storage devices include floppy disks, hard disks, tape, CD-ROMs, DVDs, PROMS, random access memory, flash memory, and other computer system storage devices. The physical configuration represents data and instructions which cause the computer system to operate in a specific and predefined manner as described herein.

[0113] Suitable software to assist in implementing the invention is readily provided by those of skill in the pertinent art(s) using the teachings presented here and programming languages and tools, such as Java, Pascal, C++, C, database languages, APIs, SDKs, assembly, firmware, microcode, and/or other languages and tools. Suitable signal formats may be embodied in analog or digital form, with or without error detection and/or correction bits, packet headers, network addresses in a specific format, and/or other supporting data readily provided by those of skill in the pertinent art(s).

[0114] Several aspects of the embodiments described will be illustrated as software modules or components. As used herein, a software module or component may include any type of computer instruction or computer executable code located within a memory device. A software module may, for instance, include one or more physical or logical blocks of computer instructions, which may be organized as a routine, program, object, component, data structure, etc., that perform one or more tasks or implement particular abstract data types.

[0115] In certain embodiments, a particular software module may include disparate instructions stored in different locations of a memory device, different memory devices, or different computers, which together implement the described functionality of the module. Indeed, a module may

include a single instruction or many instructions, and may be distributed over several different code segments, among different programs, and across several memory devices. Some embodiments may be practiced in a distributed computing environment where tasks are performed by a remote processing device linked through a communications network. In a distributed computing environment, software modules may be located in local and/or remote memory storage devices. In addition, data being tied or rendered together in a database record may be resident in the same memory device, or across several memory devices, and may be linked together in fields of a record in a database across a network.

[0116] Much of the infrastructure that can be used according to the present invention is already available, such as: general purpose computers; computer programming tools and techniques; computer networks and networking technologies; digital storage media; authentication; access control; and other security tools and techniques provided by public keys, encryption, firewalls, and/or other means.

[0117] FIG. 1 is a perspective view of a user 150 interacting with a hands-free intercom 100. The hands-free intercom 100 may include a user-tracking sensor 110, a directional microphone 120, and a directional sound emitter 130. The directional sound emitter 130 may include a plurality of ultrasonic speakers 131, 132. The user-tracking sensor 110 may determine the location of the user 150. In some embodiments, the user-tracking sensor 110 may also determine the identity of the user 150. The user-tracking sensor 110 may comprise one or more cameras, one or more microphones (which may include directional microphone 120), a radar sensor, an ultrasonic sonar sensor (which may include elements of directional sound emitter 130), or the like. The directional microphone 120 and directional sound emitter 130 may target the user 150 based on location information received from the user-tracking sensor 110. The directional microphone 120 may maximize reception of audio from the direction of the user 150 and/or the user's mouth while minimizing reception of audio from other directions. The directional microphone 120 may be steered mechanically and/or may include a phased array and/or metamaterial array to produce the directional reception.

[0118] The directional sound emitter 130 may emit ultrasonic sound waves from the plurality of ultrasonic speakers 131, 132. The plurality of ultrasonic speakers 131, 132 may be aimed so that the ultrasonic sound waves frequency convert to audible frequencies at or near the user's ears. For example, the ultrasonic sound waves may be modulated so as to produce audio of interest in the beat frequency created when the waves interfere. Alternatively, or in addition, the ultrasonic sound waves may be downshifted in the air and/or in a material in or on the user 150. The directional sound emitter 130 may be configured to maximize the volume of audible sound waves at or near the user 150 while minimizing the volume of audible sound waves in other locations. If the user 150 moves, the hands-free intercom 100 may reorient the directional microphone 120 and directional sound emitter 130 towards the user's new position. The directional sound emitter 130 or individual ultrasonic speakers 131, 132 may be steered mechanically and/or may include a phased array and/or metamaterial array to produce the directional emission.

[0119] FIG. 2 is a perspective view of a pair of users 251, 252 communicating using a hands-free intercom 200. A first

user **251** may make a gesture, a facial expression, an eye movement, and/or vocal emissions that indicate he wishes to speak with the second user **252**. A first user interface **210** including a first user-tracking sensor **211**, a first directional microphone **212**, and a first directional sound emitter **213** may detect the gesture, facial expression, eye movement, and/or vocal emissions. The hands-free intercom **200** may analyze the gesture, facial expression, eye movement, and/or vocal emissions to determine to whom the first user **251** is interested in speaking. For example, the first user **251** may say, "Have you heard back about your job interview?" and the hands-free intercom **200** may determine that the second user **252** had discussed a job interview with the first user **251** two days prior. Accordingly, the hands-free intercom **200** may decide to couple the first user **251** to the second user **252** and/or may prompt the first user **251** as to whether the second user **252** is the desired recipient.

[0120] Once the hands-free intercom **200** has determined that the first user **251** wishes to speak to the second user **252**, the hands-free intercom **200** may locate the second user **252**. The hands-free intercom **200** may locate the second user **252**, for example, with user-tracking sensors **221** on one or more user interfaces **210**, **220**. The hands-free intercom **200** may then couple the directional microphone **222** and directional sound emitter **223** of the second user interface **220** to the directional microphone **212** and directional sound emitter **213** of the first user interface **210** so the users **251**, **252** are able to communicate. There may be some delay while the hands-free intercom **200** analyzes the vocal emissions of the first user **251**, identifies the second user **252**, locates the second user **252**, and communicatively couples the first user **251** to the second user **252**. This delay may be hidden from the second user **252** (e.g., by delivering the vocal emissions offset by the delay), so the conversation appears to happen in real time. The first user **251** may be aware of the delay, so the hands-free intercom **200** may alert the first user **251** when the vocal emissions are delivered (e.g., by playing a ringing sound until the vocal emissions are delivered, by playing a tone once the vocal emissions are delivered, by playing the vocal emissions for the first user **251** as they are delivered to the second user **252**, etc.). Remaining vocal emissions by the first and second users **251**, **252** may be delivered in substantially real time (e.g., only delayed by any inherent delays in the hands-free intercom **200**). The first user **251** and/or the second user **251** may be able to control the communicative coupling (e.g., pause, terminate, mute, etc.) using gestures, facial expressions, eye movements, vocal emissions, and/or the like.

[0121] FIG. 3 is a block diagram of a system **300** for analyzing vocal emissions to determine an entity of interest. The system **300** may include a directional microphone **302** configured to receive vocal emissions from a user. The measured vocal emissions may be provided to a speech recognition block **304**, which may convert the vocal emissions into a form recognizable by the computer (e.g., text, etc.). The results from the speech recognition block **304** may be provided to a subject matter analysis block **306**. The subject matter analysis block **306** may determine a subject matter of the vocal emissions. For example, the subject matter analysis block **306** may be coupled to an internal and/or external database **314**, which may contain keywords associated with users, subject matters of one or more previous conversations, and/or the like. Alternatively, or in addition, the subject matter analysis block **306** may be

coupled to a website **312**, such as a social media site, by a communication interface **308**. The subject matter analysis block **308** may use one or more language analysis algorithms in combination with data from the database **314** and/or website **312** to identify the entity of interest. The subject matter analysis block **306** may indicate the identified entity of interest to the communication interface **308**. The communication interface **308** may be configured to determine a remote communication device **310** of the entity of interest. The communication interface **308** may couple the user to the remote communication device **310** determined.

[0122] FIG. 4 is a flow diagram of a method **400** for a user of a hands-free intercom to communicatively couple to an entity of interest. The method **400** may begin when a user comes within range of the hands-free intercom. The hands-free intercom may determine **402** a location of the user. The hands-free intercom may orient a directional microphone and a directional sound emitter towards the determined location.

[0123] The hands-free intercom may measure **404** vocal emissions from the user if the user says something. Based on the vocal emissions, the hands-free intercom may identify **406** the entity of interest to whom the user wishes to speak. The hands-free intercom may also be configured to determine from the vocal emissions if the user is not interested in using the hands-free intercom. In which case, the hands-free intercom may continue to measure **404** vocal emissions until it determines that the user is interested in communicating to an entity of interest using the hands-free intercom.

[0124] Once an entity of interest has been identified, the entity of interest may be located **408** by the hands-free intercom. In some embodiments, the hands-free intercom may prelocate potential entities of interest (e.g., the user's family members, the last five entities he's communicated with, entities identified by his calendar or schedule, etc.) so that the specific entity of interest may be rapidly connected to once identified by the user. The hands-free intercom may locate **408** the entity of interest using a user-tracking sensor, based on a cell phone of the user, based on a beacon, and/or the like. The hands-free intercom may determine **410** an optimal communication device of the entity of interest based on the location of the entity of interest. The hands-free intercom may communicatively couple **412** the user to the optimal communication device of the entity of interest determined in step **410**. During communicative coupling, the hands-free intercom may deliver **414** audio received from the entity of interest to the user emitting ultrasonic sound waves to the user. When the communicative coupling is terminated, the method may end.

[0125] FIG. 5 is a perspective view of a hands-free intercom **500** configured to apply access rules when determining whether to couple a remote entity to a user **550**. The hands-free intercom **500** may include a user-tracking sensor **510**, a microphone **520**, and a directional sound emitter **530**. The hands-free intercom **500** may be configured to determine whether to couple a remote entity to the user based on a time, a day, a location of the user **550**, an activity of the user **550**, an identity of the remote entity, and/or the like. For example, the user **550** may be in a bathroom prior to 7:00 AM, so the hands-free intercom **500** may determine that a remote entity should not be communicatively coupled to the user **550**. Alternatively, or in addition, the hands-free intercom **500** may determine that the user **550** is shaving, so the remote entity may not be coupled until the user **550** has

finished shaving. The hands-free intercom **500** may allow an immediate family member to contact the user **500** despite the fact the user **550** is shaving but may prevent other remote entities from contacting the user.

[0126] The user **550** may be able to provide verbal instructions to the hands-free intercom **500** requesting privacy. The user **550** may be able to specify a predetermined time for the privacy, criteria for ending the privacy period, who or what subject matters may be allowed to couple despite the privacy request, and/or the like. The access rules and/or privacy request may specify entities and/or subject matters that should be rejected outright, entities and/or subject matters that should result in the user being prompted to connect, and entities and/or subject matters that should be automatically connected without prompting. In an embodiment, the hands-free intercom **500** may notify the user **550** of any attempted connections once the access rules no longer prohibit coupling and/or any period of requested privacy has ended. Alternatively, or in addition, the remote entity may record a message, be instructed to call back, and/or the like.

[0127] FIG. 6 is a block diagram of a system **600** for determining whether to couple a remote entity according to access rules. A communication interface **612** may be configured to receive a request from a remote communication device **614** to couple to a user. The communication interface **612** may be able to determine from the remote communication device **614** an identity of the remote entity and/or an intended subject matter for the coupling. For example, the communication interface **612** may prompt the communication device **614**/remote entity for the subject matter; the communication device **614** may have determined the subject matter from vocal emissions from the remote entity and/or provided the vocal emissions to the communication interface **612**; and/or the like.

[0128] The communication interface **612** may inform an access rules block **606** of the request to couple. The access rules block **606** may analyze the identity and/or subject matter of the request to determine whether to couple. The access rules block **606** may be coupled to one or more user-tracking sensors **610**, which may be used to determine which room the user is occupying and/or an activity of the user. Based on the room and/or activity, the access rules block **606** may determine whether to couple the remote entity to the user. The access rules block **606** may be further coupled to a time/date block **608** configured to provide the time, date, day of the week, a user calendar, and/or the like to the access rules block **606** for use in determining whether to couple. The time/date block **608** may be an internal clock, an external time source, a calendar program operating on a user device, and/or the like.

[0129] The access rules block **606** may use any combination of data available to it to determine whether to couple the remote entity. The access rules block **606** may use default rules, user-specified rules, rules learned from past user behavior, and/or the like when analyzing the available data to determine whether to couple the remote entity to the user. The communication interface **612** may communicatively couple a directional microphone **602** and a directional sound emitter **604** to the remote communication device **614** if the access rules block **606** determines that coupling should be allowed.

[0130] FIG. 7 is a flow diagram of a method **700** for determining whether to couple a remote entity to a user. The method **700** may begin when a request is received **702** from

a remote entity desiring to communicatively couple with the user. In response to receiving **702** the request, context data may be gathered **704**. The context data may include the identity of the remote entity, a subject matter for the communicative coupling, a time, a day of the week, a user activity, a room being occupied by the user, an activity scheduled on a user calendar, and/or the like. The hands-free intercom may decide based on the access rules what context data should be gathered **704**, and unnecessary context data may not be gathered. Gathering **704** context data may include periodically acquiring the context data and loading the previously acquired context data when a request is received **702**.

[0131] Based on the context data, the hands-free intercom may determine **706** whether to couple the remote entity to the user. In an embodiment, access rules may be used to determine **706** whether to couple the remote entity to the user. The access rules may include a user-specified and/or default set of conditions contingent on elements of the context data. Alternatively, or in addition, the hands-free intercom may compare the context data to user behavior when previous requests were received to determine **706** whether to couple the remote entity to the user. The hands-free intercom may communicatively couple **708** the remote entity to the user if it determines that coupling should be performed. The method may end until another request is received.

[0132] FIG. 8 is a perspective view of a hands-free intercom **800** configured to warn a user **850** about an eavesdropper **870**. The hands-free intercom **800** may include a user-tracking sensor **810**, a directional microphone **820**, a directional sound emitter **830**, and an eavesdropper warning light **840**. The user **850** may wish to keep some conversations private from eavesdroppers. Accordingly, the hands-free intercom **800** may monitor for eavesdroppers and alert the user **850** when an eavesdropper **870** is detected.

[0133] The hands-free intercom **800** may use the user-tracking sensor **810** and/or user-tracking sensors from additional interfaces (not shown) to detect the presence of the eavesdropper **870**. Alternatively, or in addition, the user-tracking sensor **810** may detect the presence of the eavesdropper **870** based on the location of a mobile communication device of the eavesdropper **870**, by tracking passage of the eavesdropper **870** through one or more doorways, and/or the like. The hands-free intercom **800** may warn of an eavesdropper **870** in a room other than that of the user **850** if it determines that the eavesdropper **870** is still within a listening range. Accordingly, the hands-free intercom **800** may be configured to sense the presence of the eavesdropper **870** in rooms other than the room occupied by the user **850** (e.g., using user-tracking sensors, doorway sensors, sensing of mobile communication devices, etc.).

[0134] The hands-free intercom **800** may warn the user **850** of the eavesdropper **870** using the eavesdropper warning light **840**. Alternatively, or in addition, the hands-free intercom **800** may produce an audio indication that the eavesdropper **870** is present. The audio indication may be a noise, a tone, speech (e.g., computer-synthesized speech), and/or the like. The directional sound emitter **830** may emit the audio indication so it is only audible by the user **850**. In an embodiment, the hands-free intercom **800** may refuse to complete a communicative coupling and/or may pause or terminate a communicative coupling when an eavesdropper

870 is detected. The refusal to complete the communicative coupling may be in addition to or instead of the warning to the user 850.

[0135] FIG. 9 is a perspective view of a hands-free intercom 900 configured to automatically receive call handoffs from mobile communication devices. The hands-free intercom 900 may include a user-tracking sensor 910, a directional microphone 920, and a directional sound emitter 930. The directional sound emitter 930 may include a plurality of ultrasonic speakers 931, 932. A user 950 may be communicating with a remote entity (not shown) using a mobile phone 970. For example, the mobile phone 970 may be wirelessly coupled to a cellular base station, which may communicatively couple the mobile phone 970 to the remote entity's communication device.

[0136] It may be more convenient and/or more comfortable for the user 950 to communicate with the remote entity via the hands-free intercom 900. However, the user 950 may have initiated the call with the remote entity using the mobile phone 970, for example, because the user 950 was initially out of range of the hands-free intercom 900. The hands-free intercom 900 may detect that the user 950 is within range of the hands-free intercom 900 and/or may detect that the user 950 is coupled to the remote entity. For example, the user 950 may be within range if audible emissions from the user 950 can be detected by the directional microphone 920, if audio can be delivered to the user by the directional sound emitter 930, if the hands-free intercom 900 can wirelessly communicate with the mobile phone 970, and/or the like. The hands-free intercom 900 may detect the user 950 is coupled to the remote entity by detecting a position of the mobile phone 970 (e.g., near the user's ear, near the user's mouth, etc.) with the user-tracking sensor 910, by receiving vocal emissions (e.g., when no other person is present) using the directional microphone, by communicating with the mobile phone 970, and/or the like.

[0137] The mobile phone 970 may hand off the communicative coupling with the remote entity to the hands-free intercom 900. The mobile phone 970 may act as an intermediary that communicatively couples the hands-free intercom 900 to the remote entity, and/or the hands-free intercom 900 may communicatively couple to the remote entity without assistance from the mobile phone 970 after the hand-off is completed. In an embodiment, the hands-free intercom 900 may act like a peripheral device coupled to the mobile phone 970 by, for example, a Bluetooth protocol. In another embodiment, the hands-free intercom 900 may request the hand-off from a service provider. Alternatively, or in addition, the hands-free intercom 900 may act as a base station, such as a cellular base station, a Voice over Internet Protocol (VOIP) base station, etc., for the mobile phone 970 in order to perform a gradual hand-off.

[0138] The hands-free intercom 900 may transition from the directional microphone 920 and directional sound emitter 930 to other directional microphones and directional sound emitters (not shown) as the user 950 moves from one room to another. The communicative coupling may be returned to the mobile phone 970 if the user 950 leaves the range of the hands-free intercom 900. While the hands-free intercom 900 remains coupled to the remote entity, the hands-free intercom 900 may provide some or all of its functionality to the user 950, such as adding and/or removing parties, recording conversation, storing keywords, terminating the communicative coupling, etc., and may

respond to user commands (e.g., gestures, facial expressions, eye movements, voice commands, etc.).

[0139] FIG. 10 is a block diagram of a system 1000 for automatically receiving call handoffs from mobile communication devices. The system 1000 may include a communication interface 1012, which may be communicatively coupled to a user-tracking sensor 1010. The communication interface 1012 and/or the user-tracking sensor 1010 may determine that a mobile communication device 1008 of a user is communicatively coupled to a remote communication device 1014 of a remote entity. The communication interface 1012 may be configured to communicatively couple a directional microphone 1002 and a directional sound emitter 1004 to the remote communication device 1014. Thus, the user may communicate with the remote entity without having to continue to hold or use the mobile communication device 1008, which may free their hands for other tasks, save on service charges, and/or the like.

[0140] In the illustrated embodiment, the communication interface 1012 couples the directional microphone 1002 and directional sound emitter 1004 to the remote communication device 1014 without sending communications to the mobile communication device 1008. For example, the communication interface 1012 may use plain old telephone service (POTS), the Internet, a mobile telephone service provider, and/or the like to communicate with the remote communication device 1014. The communication interface 1012 may be communicatively coupled with the mobile communication device 1008 to coordinate handing off of the communicative coupling. For example, the communication interface 1012 may inform the mobile communication device 1008 when it is available to receive communicative couplings, when a communicative coupling has been received, when a communicative coupling is being returned, etc. Similarly, the mobile communication device 1008 may inform the communication interface 1012 when it is coupled to a remote entity, when it handing off a communicative coupling, when it has received a returned communicative coupling, etc.

[0141] FIG. 11 is a flow diagram of a method 1100 for receiving a handoff of a communicative coupling from a mobile device. The method 1100 may begin by determining 1102 a user is communicatively coupled to a remote entity. Whether a user is interacting with the mobile device and/or whether the mobile device is communicatively coupled to the remote entity may be continuously monitored. It may be determined 1104 whether a directional microphone and/or directional sound emitter should be coupled to the remote entity. For example, the user may indicate with a user gesture, facial expression, eye movement, or vocal emission that the directional microphone and/or directional sound emitter should be coupled to the remote entity, and/or the mobile device may indicate that the directional microphone and/or directional sound emitter should be coupled to the remote entity.

[0142] The directional microphone and/or directional sound emitter may be communicatively coupled 1106 to the remote entity, if it is determined 1104 that they should be. For example, the directional microphone and/or directional sound emitter may be communicatively coupled to the mobile device, which may remain coupled to the remote entity. In an embodiment, a request to communicatively couple may be sent to a service provider, which may transfer the communicative coupling with the remote entity from the



mobile device to the directional microphone and/or directional sound emitter. Alternatively, or in addition, a communicative coupling may be established with the remote entity, and the communicative coupling may be distinct and/or separate from the communicative coupling between the remote entity and the mobile device. Before, during, or after communicatively coupling **1106** to the remote entity, a mobile device microphone and/or mobile device sound emitter may be uncoupled **1108** from the remote entity. The mobile device microphone and/or mobile device sound emitter may be disabled; the mobile device may be uncoupled from the remote entity; and/or the like.

[0143] The user may then communicate hands-free with the remote entity using the directional microphone and/or directional sound emitter. The user may move around while communicating via the directional microphone and directional sound emitter. At some point, it may be determined **1110** that the user is leaving the range of the directional microphone and/or directional sound emitter (e.g., the user has gone into a different room). A user-tracking sensor, the quality of audio received by the directional microphone, a location of the mobile device, and/or the like may be used to determine **1110** that the user is leaving the range of the directional microphone and/or directional sound emitter. If a directional microphone and/or directional sound emitter closer to the user is available, the user may be transferred **1112** to the closer directional microphone and/or directional sound emitter. The closer directional microphone and/or directional sound emitter may be determined based on a direction being travelled by the user, a location of a mobile device, detection of the user by the closer directional microphone and/or directional sound emitter and/or a user-tracking sensor associated with the closer directional microphone and/or directional sound emitter, and/or the like.

[0144] The user may leave the range of every directional microphone and/or directional sound emitter (e.g., by leaving a building and/or an area containing the directional microphones and/or directional sound emitters). Accordingly, it may be determined **1114** if the user is leaving the range of all directional microphones and/or directional sound emitters. For example, the user-tracking sensor, the audio quality detected by the closer directional microphone, the location of the mobile device, and/or the like may be used to determine **1114** that the user is leaving the range of all directional microphones and/or directional sound emitters. A warning may be sent to the user if the user is leaving the range. The mobile device microphone and/or sound emitter may be communicatively coupled **1116** if the user is leaving the range. In an embodiment, step **1116** may include doing the reverse of one or more of the actions taken in step **1108**. The closer directional microphone and/or directional sound emitter may be uncoupled **1118** from the remote entity. Step **1118** may include doing the reverse of one or more of the actions taken in step **1106**. Once the communicative coupling has been returned to the mobile device and/or terminated, the method **1100** may end.

[0145] FIG. 12 is a perspective view of a hands-free intercom **1200** configured to automatically communicatively couple a user **1250** with one or more appliances **1271**, **1272**, **1273**. The hands-free intercom **1200** may include a user-tracking sensor **1210**, a directional microphone **1220**, and a directional sound emitter **1230**. The hands-free intercom **1200** may be able to communicatively couple to the one or

more appliances **1271**, **1272**, **1273**. For example, the appliances **1271**, **1272**, **1273** may be “smart” devices able to send and receive communications.

[0146] The hands-free intercom **1200** may allow the user **1250** to communicate with the appliances **1271**, **1272**, **1273** using the directional microphone **1220**, the directional sound emitter **1230**, and/or a mobile device (not shown). The user **1250** may request a status, change settings, request that an activity be commenced, and/or the like. The hands-free intercom **1200** may also, or instead, allow the appliances **1271**, **1272**, **1273** to communicate with the user **1250**, e.g., via the directional microphone **1220**, directional sound emitter **1230**, and/or mobile device. The appliance **1271**, **1272**, **1273** may report changes in activity, status updates, and/or the like. In some embodiments, the hands-free intercom **1200** may communicatively couple the appliances **1271**, **1272**, **1273** to each other. For example, a clothes washing machine **1271** may communicate with a clothes drying machine **1272** to determine how long it will take for clothes to be washed and dried and/or to attempt to align completion times. Similarly, the clothes drying machine **1272** may communicate with a thermostat **1273** and adjust setting based on an ambient temperature and/or humidity.

[0147] The hands-free intercom **1200** may manage which entities have rights to communicate with each other. The user-tracking sensor **1210** may be configured to identify the user **1250** and/or determine whether the user **1250** provides a gesture, facial expression, eye movement, or vocal command required for access. The hands-free intercom **1200** may determine which communications from the appliances **1271**, **1272**, **1273** should be forwarded to a mobile device and/or may prevent unauthorized mobile devices and/or remote users from accessing the appliances **1271**, **1272**, **1273**. Users may have different rights, for example, depending on identity, location, and/or the like. Similarly, the appliances **1271**, **1272**, **1273** may have various rights for accessing the user **1250**, as well as having various rights for accessing one another. The hands-free intercom **1200** may authenticate entities to determine what rights they have.

[0148] FIG. 13 is a block diagram of a system **1300** for automatically communicatively coupling users with appliances. The system **1300** may include a communication interface **1312**. The communication interface **1312** may be communicatively coupled with a directional microphone **1302**, a directional sound emitter **1304**, and a user-tracking sensor **1310**. A user may indicate, e.g., via vocal emissions detected by the directional microphone **1302**, via a gesture, a facial expression, and/or an eye movement detected by the user-tracking sensor **1310**, and/or the like that the user wishes to be communicatively coupled with an appliance **1308**. The communication interface **1312** may authenticate the user and communicatively couple the user with the appliance **1308**. The communication interface **1312** may be configured to translate vocal emissions from the user into communications, such as messages, understandable to the appliance **1308** and vice versa.

[0149] The appliance **1308** may be able to send communications to the user when authorized by the communication interface **1312**. The communication interface **1312** may locate the user and deliver the communications. A user accessible via the directional sound emitter **1304** and/or directional microphone **1302** may receive the communication via the directional sound emitter **1304**. If a user is not accessible via the directional sound emitter **1304** and/or

directional microphone **1302**, the communications interface may attempt to deliver the communication to a mobile communication device **1314** to which the communication interface **1321** is coupled. Alternatively, or in addition, communications may be sent to a computer, an e-mail address, etc. The communication interface **1312** may also, or instead, deliver incoming communications from the mobile communication device **1314** to the appliance **1308** if the incoming communications are authorized.

[0150] FIG. **14** is a flow diagram of a method **1400** for automatically communicatively coupling users with appliances. A user request for information from an appliance may be received **1402** from a user. The user request may be for a current value of a setting, a current status, and/or the like. It may be determined **1404** whether the user is permitted to access the appliance in order to obtain the requested information (e.g., based on an identity of the user, a location of the user, access information provided by the user, etc.). The information may be provided **1406** from the appliance to the user if the user is permitted to obtain the requested information.

[0151] The user may wish to have the appliance begin and/or change an activity and/or task. A user request for the appliance to start an activity may be received **1408** from the user. It may be determined **1410** whether the user is permitted to provide commands to the appliance. The right to provide commands to the appliance may be distinct from the right to receive information from the appliance. For example, a repair company and/or manufacturer may be able to access information but unable to send commands. If the user is permitted to provide commands, the request to start the activity may be provided **1412** to the appliance.

[0152] The appliance may decide that it would like to receive information from another appliance. For example, the appliance may be planning to adjust its settings based on the received information and/or may plan on including the information in a report provided to the user. A request for information from the other appliance may be received from the appliance **1414**. It may be determined **1416** whether the appliance is permitted to communicate with the other appliance, for example, based on the identity of the appliance, the identity of the other appliance, user settings, and/or the like. The request may be delivered to the other appliance, and the requested information from the other appliance may be provided **1418** to the appliance if communication is permitted. By restricting access, malicious attacks on appliances may be prevented. If a malicious attack is successful, restricting access may prevent any harm from spreading among appliances.

[0153] The appliance may decide to provide information to the user. For example, the appliance may alert the user to a change in activity, remind the user of a current status, and/or the like. A request may be received **1420** from the appliance to provide information to the user. It may be determined **1422** whether the appliance is permitted to communicate with the user. For example, the time of day, activity of the user, location of the user, identity of the user, urgency of the information to be provided, and/or the like may be considered when determining **1422** whether the appliance is permitted to communicate with the user. If the appliance is permitted to communicate with the user, the information may be provided **1424** to the user. The information may be provided **1424** via a directional sound emitter, via a mobile communication device, etc. Once any

received communications have been routed to the appropriate location and/or denied, the method **1400** may enter a standby state until another communication is received and/or may end.

[0154] FIG. **15** is a perspective view of a hands-free intercom **1500** configured to provide video aided communication to a user **1550**. The hands-free intercom **1500** may include a user-tracking sensor **1510**, a directional microphone **1520**, and a directional sound emitter **1530**. The hands-free intercom **1500** may also include a directional camera **1540** and/or a directional projector **1545**. In the illustrated embodiment, the hands-free intercom **1500** is communicatively coupled to an alternate camera **1575** of a personal computer system **1570**. In some embodiments, the hands-free intercom **1500** may include one of the directional camera **1540** and the alternate camera **1575** rather than both and/or may include multiple alternate cameras **1575**. The illustrated embodiment shows the directional camera **1540** as being distinct from the user-tracking sensor **1510**, but the directional camera **1540** may be part of the user-tracking sensor **1510**.

[0155] The directional camera **1540** and/or the alternate camera **1575** may capture video of the user **1550**. The directional camera **1540** and/or the alternate camera **1575** may be configured to track the user **1550** through, e.g., mechanical, optical, and/or digital adjustment of camera parameters, such as zoom, pan, focus, etc. The hands-free intercom **1500** may use the captured video to identify gestures, such as arm gestures, hand gestures, facial expressions, eye movements, etc., and/or to identify speech, for example, based on lip and/or mouth movements. The hands-free intercom **1500** may use the captured video in combination with captured vocal emissions to identify speech. The captured video may also, or instead, be sent to a remote entity (not shown).

[0156] The directional projector **1545** may be configured to deliver video to the user **1550**. The directional projector **1545** may be configured to deliver the video directly to the user **1550**, for example, by projecting the video onto and/or into the user's face or eyes (as illustrated by the dotted lines). In an embodiment, the directional projector **1545** may project the video onto the user's retina. The delivered video may include status information, which may be displayed as heads-up information in the user's field of vision. The delivered video may be of the remote entity. The directional projector **1545** may project the delivered video in a manner that encourages the user **1550** to look in a particular direction and/or to allow for more natural interaction between the user **1550** and the remote entity. The directional projector **1545** may project the video at a location in the user's field of vision proximate to the directional and/or alternate camera **1540**, **1575** so that it appears like the user **1550** is looking into the camera **1540**, **1575** when the user **1550** looks at the video. Specifically, the directional projector **1545** may project the eyes of a person in the video proximate to the camera **1540**, **1575** so the user **1550** appears to make eye contact when the user **1550** attempts to make eye contact.

[0157] FIG. **16** is a block diagram of a system **1600** for providing video aided communication to a user. The system **1600** may include a communication interface **1612**, which may be communicatively coupled to a directional microphone **1602**, a directional sound emitter **1604**, a directional video camera **1606**, a directional projector **1608**, and/or a user-tracking sensor **1610**. The user-tracking sensor **1610**

may provide information about the user's location to the directional microphone **1602**, directional sound emitter **1604**, directional video camera **1606**, and/or directional projector **1608** for tracking the user. The communication interface **1612** may be communicatively coupled to an alternate video camera **1616**, which may be part of another system. The directional video camera **1606** and/or the alternate video camera **1616** may be part or the entire user-tracking sensor **1610**.

[0158] The communication interface **1612** may be communicatively coupled to a remote entity **1620**. The communication interface **1612** may communicatively couple the directional microphone **1602**, directional sound emitter **1604**, directional video camera **1606**, and/or directional projector **1608** to the remote entity **1620**. The communication interface **1612** may manage the transfer of video and/or voice to and from the remote entity **1620**. The communication interface **1612** may manage access of the remote entity **1620** to the user (e.g., access to voice data, video data, etc.). The communication interface **1612** may be configured to receive and react to commands received from the user (e.g., vocal commands, gestures, facial expressions, eye movements, etc.). For example, the communication interface **1612** may receive a command from the user to reconfigure the communicative coupling (e.g., start video, stop video, adjust a camera, pause the coupling, mute the coupling, terminate the coupling, etc.) and may reconfigure the communicative coupling accordingly.

[0159] FIG. 17 is a flow diagram of a method **1700** for providing video enabled communication to a user of a hands-free intercom. A directional microphone and directional sound emitter may be communicatively coupled **1702** to a remote entity to allow the user to communicate with the remote entity. For example, the directional microphone and directional sound emitter may be communicatively coupled **1702** according to a previously discussed method. The hands-free intercom may determine **1704** whether the remote entity is able to receive video. The hands-free intercom may request information about the capabilities of the remote entity, and/or the remote entity may voluntarily provide information about its capabilities.

[0160] If the remote entity is able to receive video, the hands-free intercom may determine **1706** whether access rules permit video to be captured of the user. For example, the user may have specified that video should not be captured of the user in certain locations, during certain activities, at certain times and/or days, when certain people are present with the user, and/or the like. Each user may have specified which remote entities may receive video. The user may have specified that video may be captured only after prompting the user, only in response to a user command, etc. Camera parameters for at least one camera may be adjusted **1708**, for example, to allow video to be captured of the user. The camera parameters may be adjusted **1708** to capture video of a user-specified portion of the user (e.g., from the shoulders up, from the chest up, from the waist up, etc.). Focus and/or illumination may be adjusted to improve visibility of the user. The at least one camera may be communicatively coupled **1710** to the remote entity to provide video of the user to the remote entity. The video may be stereoscopic video if it has been determined (e.g., as part of step **1704**) that the remote entity is able to receive stereoscopic video.

[0161] The hands-free intercom may determine **1712** whether the remote entity is able to send video. The ability of the remote entity to send video may be requested at the same or a different time as the request for the ability of the remote entity to receive video. Alternatively, or in addition, the remote entity may voluntarily provide information on its ability to send video at the same or a different time as it voluntarily provides information on its ability to receive video. The hands-free intercom may determine **1714** whether access rules permit video projection to the user. For example, the user may specify that video should not be received when the user is in certain locations, when the user is doing certain activities, at certain times and/or days, from certain remote entities, and/or the like.

[0162] If the remote entity is able to send video and the access rules permit video projection, video received from the remote entity may be projected **1716** to the user. The video may be projected into and/or onto the user's eye(s) and/or face. For example, the video may be projected onto the user's retina(s). In some embodiments, each image in a stereoscopic pair may be projected onto each of the user's retinas. The projected video may be configured to appear at a location within the user's field of vision that promotes eye contact. Status information may be overlaid **1718** onto the projected video. The status information may include an identity of the remote entity, a time that the communicative coupling has been active, a quality of the communicative coupling, whether the communicative coupling is being recorded, whether an eavesdropper is present, one or more commands that may be delivered by the user, a command received from the user, and/or the like. As would be recognized by those of skill in the art, the steps of the method **1700** may be performed in various possible orders and/or may overlap in time.

[0163] FIG. 18 is a perspective view of a hands-free intercom **1800** configured to induce a user **1850** to move to a desired location **1870**. The hands-free intercom **1800** may also, or instead, be configured to induce the user **1850** to face in a desired orientation. The hands-free intercom **1800** may include a user-tracking sensor **1810**, a directional microphone **1820**, and a directional sound emitter **1830**. In some embodiments, the directional microphone **1820** may be configured to be most sensitive to sounds coming from the desired location **1870**, and/or the directional sound emitter **1830** may be configured to deliver a best sound quality to the desired location **1870**. The hands-free intercom **1800** may also include a directional camera **1840** and/or a directional projector **1845**. In some embodiments, the directional camera **1840** may be configured to capture images having a highest image quality when capturing the desired location **1870**, and/or the directional projector **1845** may be able to deliver a best video quality to the desired location **1870**.

[0164] The hands-free intercom **1800** may have a connectivity boundary **1880** where connectivity may be lost with one or more components of the hands-free intercom **1800**. For example, connectivity may be lost with the directional microphone **1820**, the directional sound emitter **1830**, the directional camera **1840**, and/or the directional projector **1845**. Alternatively, or in addition, the connectivity boundary **1880** may be where a wireless device will lose connectivity with the hands-free intercom **1800**. Different components may lose connectivity at different points along the connectivity boundary **1880**. For example, the connectivity

boundary **1880** may be where any component loses connectivity, and/or where predetermined sets of components lose connectivity.

[**0165**] The hands-free intercom **1800** may be configured to indicate the desired location **1870** and/or the connectivity boundary **1880** to the user **1850**. For example, the directional sound emitter **1830** and/or the directional projector **1845** may indicate the desired location **1870** and/or the connectivity boundary **1880** to the user **1850**. Alternatively, or in addition, the hands-free intercom **1800** may indicate the relative position of the user (e.g., whether the user is outside the desired location **1870**, whether the user is moving towards or away from the desired location **1870**, whether the user is near the connectivity boundary **1880**, etc.). In some embodiments, the hands-free intercom **1800** may induce the user to move to the desired location **1870** and/or away from the connectivity boundary **1880** without explicitly indicating the desired location **1870** and/or the connectivity boundary **1880**. For example, the directional sound emitter **1830** and/or the directional projector **1845** may degrade the quality of provided audio and/or video and/or may adjust the apparent location of the audio and/or video to draw the user towards the desired location **1870**.

[**0166**] FIG. **19** is a block diagram of a system **1900** for inducing a user to move to a desired location. The system **1900** may include a communication interface **1912**, which may be communicatively coupled to a directional microphone **1902**, a directional sound emitter **1904**, a directional projector **1908**, and/or a user-tracking sensor **1910**. The communication interface **1912** may be communicatively coupled with a remote communication device **1920** and may attempt to position the user to maximize communication quality between the user and the remote communication device **1920**. The user-tracking sensor **1910** may determine the location and/or orientation of the user. The communication interface **1912** may receive the determined location and/or orientation from the user-tracking sensor **1910**. The communication interface **1912** may determine how the desired location, connectivity boundary, and/or desired orientation relate to the determined location and/or orientation from the user-tracking sensor **1910**.

[**0167**] Based on the relative location and/or orientation of the user, the communication interface **1912** may determine whether to induce the user to move. The communication interface **1912** may indicate the desired location and/or orientation to the directional sound emitter **1904** and/or the directional projector **1908**, which may induce the user to move to the desired location and/or turn to the desired orientation. Alternatively, or in addition, the communication interface **1912** may modify data being delivered to the directional sound emitter **1904** and/or the directional projector **1908** so that modified data is configured to induce the user to move to the desired location and/or turn to the desired orientation. For example, the communication interface **1912** may add additional signals to the data, may degrade the data, may alternate information for portions of the data, and/or the like.

[**0168**] FIG. **20** is a flow diagram of a method **2000** for inducing a user to move to a desired location. The method **2000** may be performed while the user is connected to a remote communication device. The method **2000** may begin by determining **2002** a connectivity boundary. The connectivity boundary may be determined **2002** based on historical experience, based on a user indication, based on known

characteristics of components of a hands-free intercom, based on detected features of a room, and/or the like. The location of the connectivity boundary may be stored for later comparison. In some embodiments, the connectivity boundary may not need to be known and thus may not be determined.

[**0169**] The method **2000** may include determining **2004** the desired location for the user. The desired location may be determined **2004** based on historical experience, based on a user indication, based on known characteristics of components of the hands-free intercom, based on detected features of the room, and/or the like. The desired location may be any size or shape. For example, the desired location may be a circle, a square, a triangle, etc. and may be 0.5 ft<sup>2</sup>, 1 ft<sup>2</sup>, 2 ft<sup>2</sup>, 5 ft<sup>2</sup>, etc. The desired location may be stored for later comparison.

[**0170**] The desired location may be indicated **2006** to the user. For example, a directional sound emitter may provide a vocal indication of the desired location, and/or a display may provide a visual indication of the desired location. The directional sound emitter and/or the display may indicate the position of the desired location relative to the room and/or relative to the user's position. The directional sound emitter and/or the display may convey the advantages of the desired location to the user. In alternate embodiments, the desired location may not be explicitly indicated **2006** to the user, but rather the user may be guided to the desired location by implicit indications or through semi- or subconscious manipulation of the user.

[**0171**] In some embodiments, a desired orientation may be determined **2008** for the user. The desired orientation may be determined **2008** based on historical experience, based on a user indication, based on known characteristics of components of the hands-free intercom, based on detected features of the room, and/or the like. The desired orientation may be indicated **2010** to the user (e.g., using the directional sound emitter, using the display, etc.). Alternatively, or in addition, the user may be informed that the user is facing away from and/or turning away from the desired orientation.

[**0172**] The user may move away from the desired location, and it may be detected **2012** that the user is moving away from the desired location. For example, a user-tracking sensor and/or a camera may determine a position of the user, and the position of the user may be compared to a stored indication of the desired location. Alternatively, or in addition, a decrease in connection quality with the user may be detected and it may be inferred the user is moving away. In some embodiments, it may be detected that the user is outside the desired location rather than that the user is moving away from the desired location.

[**0173**] The method **2000** may include indicating **2014** to the user that the user is moving away from the desired location. The directional sound emitter and/or the display may indicate **2014** to the user that the user is moving away from the desired location. The indication may include an explicit sound (e.g., a vocal indication, a predetermined sound, etc.) or visual indication (e.g., text, arrows, a predetermined image, etc.). The indication may include an implicit indication and/or modifications to delivered sound and/or video to induce the user to return to the desired location. For example, the quality of the sound and/or video may be degraded, the apparent source and/or location of the sound and/or video may be modified, an unpleasant stimulus may be added to the sound and/or video, and/or the like.

[0174] The user may continue to move away from the desired location and may approach a connectivity boundary. The method 2000 may include detecting 2016 the user is approaching and/or near the connectivity boundary. The proximity of the user to the connectivity boundary may be detected by the user-tracking sensor, by the camera, by the connection quality, and/or the like. For example, a detected position of the user may be compared to a saved indication of the connectivity boundary. The impending loss of connectivity may be indicated 2018 to the user. The directional sound emitter and/or the display may indicate the impending loss of connectivity to the user. The connectivity boundary may be indicated explicitly. Alternatively, or in addition, an implicit indication or other inducement may be adjusted to a maximum intensity as the user nears the connectivity boundary. In some embodiments, the level of inducement may be varied in intensity based on the position of the user relative to the desired location and the connectivity boundary and/or based on the actual loss in quality of the connection. Elements 2006-2018 of the method 2000 may be performed continuously and/or repeatedly while the user remains coupled to the remote communication device.

[0175] FIG. 21 is a perspective view of a hands-free intercom 2100 configured to provide privacy to a user 2150. The user 2150 may want privacy from another person 2170, and/or the user 2150 may be speaking with the other person 2170 and want ambient noise to be blocked. Accordingly, the hands-free intercom 2100 may prevent the other person 2170 from hearing vocal emissions from the user 2150 and/or may prevent the user 2150 from hearing ambient noise. Accordingly, the hands-free intercom 2100 may provide privacy to the user 2150 and/or enhance the clarity of sounds received by the user 2150 from directional sound emitter(s) 2131, 2132 and/or another person (e.g., the person 2170).

[0176] The hands-free intercom 2100 may include one or more directional microphones 2120 to detect the vocal emissions by the user 2150 and/or the ambient noise. The vocal emissions may be detected at the user's mouth and/or at the eavesdropper's ear. Similarly, the ambient noise may be detected at a source of the noise, at the user's ear, omnidirectionally, and/or the like. A filtration may be computed from the measured vocal emissions. For example, the vocal emissions may be measured at the user's mouth, at the eavesdropper's ear, and/or the like and compared to determine the filtration. The one or more directional microphones 2120 may distinguish speech from background noise when determining filtration by comparing measurements at the user's mouth to measurements at other locations, such as the eavesdropper's ear. The filtration may include attenuation, delay, multi-path, etc. for specific frequencies and/or for the entire frequency range of the vocal emissions. In alternate embodiments, the intercom 2100 may predict the vocal emissions and/or the filtration. For example, the intercom 2100 may use speech recognition to identify a word or phoneme being uttered by the user and to predict a next word or phoneme that will be uttered.

[0177] A first directional sound emitter 2131 may deliver sound to the user 2150. In an embodiment, a second directional sound emitter 2132 may deliver canceling sound to the user's and/or eavesdropper's ear to prevent the user 2150 and/or eavesdropper 2170 from hearing ambient noise and/or the user's vocal emissions. Alternatively, or in addition, there may be a single directional sound emitter, and/or the

first directional sound emitter 2131 may deliver sound to the user 2150 as well as delivering canceling sound. When delivering canceling sound, the first or second directional sound emitter 2131, 2132 may compensate for a measured and/or predicted filtration (e.g., by applying the filtration or an inverse of the filtration to the sound to be canceled and/or to the canceling sound to be delivered). In some embodiments, the first or second directional sound emitter 2131, 2132 may deliver out-of-phase sound (e.g., 180 degree out-of-phase sound), obfuscating noise, spoofed vocal emissions, and/or the like to prevent the eavesdropper 2170 from hearing the vocal emissions from the user 2150. For example, the canceling sound may be an inverse of measured and/or predicted vocal emissions from the user.

[0178] The intercom 2100 may include a user tracking sensor 2110. The user tracking sensor 2110 may detect the presence and/or location of the eavesdropper 2170. The user 2150 may indicate to the user tracking sensor 2110 that the eavesdropper 2170 is present, and/or the user tracking sensor 2110 may detect the eavesdropper 2170 based on user or eavesdropper body language. The user tracking sensor 2110 may also, or instead, determine the location of the user 2150. The user tracking sensor 2110 may indicate a location of the user's mouth to the directional microphone 2120 and/or a location of the eavesdropper's ear and/or user's ear to the first and/or second directional sound emitters 2131, 2132.

[0179] FIG. 22 is a flow diagram of a method 2200 for providing private communications to a user. The method 2200 may be performed while the user is communicating with a remote communication device and/or while the user is having an in-person conversation with a nearby person. The method 2200 may begin by measuring 2202 vocal emissions from the user. The vocal emissions may be measured 2202 at the user's mouth, for example, using a directional microphone and/or a microphone that uses electromagnetic radiation to measure sound.

[0180] A filtration between the user and the eavesdropper may be computed 2204. The filtration may be computed 2204 by measuring the filtration and/or by predicting the filtration. The filtration may be measured by comparing vocal emissions from the user measured at the user's mouth with vocal emissions from the user measured at the eavesdropper's ear. The filtration may be predicted based on the location of the user and the eavesdropper (e.g., as determined by the user tracking sensor), based on the room shape or wall location, and/or the like.

[0181] A filtration between the user and the directional microphone may be computed 2206. The filtration may be predicted, for example, based on the distance of the user from the directional microphone, the user's location within a room, etc. Alternatively, or in addition, the filtration may be measured, for example, by comparing the measurements from microphones at multiple disparate locations. The filtration between the user and the directional microphone may be estimated based on the filtration between the microphones. In some embodiments, it may be assumed that the filtration is de minimis or has no effect on the vocal emissions.

[0182] A filtration between a directional sound emitter and the eavesdropper may be computed 2208. The filtration may be computed 2208 by measuring (e.g., using the directional microphone) the sound received by the eavesdropper's ear and comparing it to the sound produced by the directional

sound emitter. Indications of the sound produced by the directional sound emitter may be stored before the sound is transmitted so that the indications can be compared to the measured sound. Alternatively, or in addition, the filtration may be predicted, for example, based on the location of the eavesdropper, a distance of the eavesdropper from the directional sound emitter, etc.

**[0183]** Vocal emissions to be canceled may be determined **2210**. The vocal emissions to be canceled may be predicted based on the measured vocal emissions. For example, a next phoneme, next word, etc. may be predicted based on previous vocal emissions, a conversation subject matter, etc. In some embodiments, the vocal emissions to be canceled may be the measured vocal emissions, and/or the method **2200** may not explicitly include determining **2210** the vocal emissions to be canceled.

**[0184]** The vocal emissions to be canceled may be modified to compensate **2212** for the filtration. For the filtration between the eavesdropper and the directional sound emitter and/or the filtration between the directional microphone and the user, the vocal emissions may be compensated **2212** for by applying an inverse of the filtration to cancel out the effects of the filtration. For the filtration between the user and the eavesdropper, the vocal emissions may be compensated **2212** for by applying the filtration to the vocal emissions to be canceled. Accordingly, the vocal emissions to be canceled may include the effects of filtration between the user and the eavesdropper but not include and/or cancel the effects of filtration between the user and the directional microphone and/or between the directional sound emitter and the eavesdropper.

**[0185]** The vocal emissions from the user may be canceled **2214** at the eavesdropper. For example, sound that is **180** degrees out of phase with the vocal emissions may be delivered to the eavesdropper's ear using the directional sound emitter. The elements of the method **2200** may be performed in various orders. For example, the vocal emissions may be adjusted to be **180** degrees out of phase before the filtration is compensated **2212** for. The filtrations may be computed **2204**, **2206**, **2208** before or after the vocal emissions from the user are measured **2202** and/or determined **2210**. Some and/or all of the filtration computations **2204**, **2206**, **2208** may be omitted in some embodiments. The method **2200** may also be modified to cancel ambient and/or point source noise for one or more users. To do so, the noise source may be substituted for the user and the user(s) may be substituted for the eavesdropper in each element of the method **2200**.

**[0186]** While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

What is claimed is:

1. (canceled)
2. A system for inducing a user to move to a predetermined location, the system comprising:
  - one or more tracking devices that track a location of the user; and
  - a directional sound emitter that, in response to the one or more tracking devices determining that the tracked location of the user is different from the predetermined location, delivers ultrasonic waves to the user that

frequency convert at the tracked location to induce the user to move to the predetermined location.

3. The system of claim 2, wherein the ultrasonic waves frequency convert at the predetermined location to generate first audible sound waves.

4. The system of claim 3, wherein the first audible sound waves are a modified version of second audible sound waves to be delivered to the user via the directional sound emitter when the user is at the predetermined location.

5. The system of claim 4, wherein the first audible sound waves have a degraded sound quality compared to the second audible sound waves.

6. The system of claim 5, wherein the first audible sound waves have a decreased audio bit rate compared to the second audible sound waves.

7. The system of claim 4, wherein the first audible sound waves include distortion overlaid upon the first audible sound waves.

8. The system of claim 7, wherein the overlaid distortion comprises frequency distortion.

9. The system of claim 4, wherein the first audible sound waves have a decreased volume compared to the second audible sound waves.

10. The system of claim 4, wherein the first audible sound waves have an increased volume compared to the second audible sound waves.

11. The system of claim 3, wherein the first audible sound waves include vocalized directions that direct the user to the predetermined location.

12. The system of claim 3, wherein the first audible sound waves include one or more unpleasant sounds selected from the group consisting of buzzing, screeching, and audio feed back.

13. The system of claim 3, wherein the first audible sound waves include a user selected sound.

14. The system of claim 3, wherein a level of inducement produced by the first audible sound waves is based on a distance of the tracked location from the predetermined location.

15. The system of claim 3, wherein the directional sound emitter causes the first audible sound waves to appear to originate from the predetermined location by adjusting one or more of a relative volume or relative time delay of audio delivered to each ear of the user.

16. The system of claim 3, wherein a level of inducement produced by the first audible sound waves is based on a measured loss of quality in one or more of vocal emissions, captured video, or signal strength of a wireless device.

17. The system of claim 2, wherein the directional sound emitter, in response to the one or more tracking devices determining that the user is moving away from the predetermined location, delivers ultrasonic waves to the user that frequency convert at the tracked location to induce the user to move to the predetermined location.

18. The system of claim 2, wherein the directional sound emitter, in response to the one or more tracking devices determining that the user is near a wireless connectivity boundary, delivers ultrasonic waves to the user that frequency convert at the tracked location of the user to induce the user to move to the predetermined location.

19. The system of claim 2, wherein the predetermined location is a location at which a camera captures a determined quality level of images of the user.

**20.** The system of claim **2**, wherein the predetermined location is a location at which a microphone captures a determined quality level of audio of the user.

**21.** The system of claim **2**, wherein the predetermined location is a location at which the directional sound emitter delivers a determined quality level of audio to the user.

**22.** A system for inducing a change in a user's orientation, the system comprising:

one or more tracking devices that track a location and orientation of the user; and

a directional sound emitter that, in response to the one or more tracking devices determining that the tracked orientation of the user is different from a predetermined orientation, delivers ultrasonic waves to the user that frequency convert at the tracked location to induce the user to change the user's orientation to the predetermined orientation.

**23.** The system of claim **22**, wherein the ultrasonic waves frequency convert at the predetermined location to generate first audible sound waves.

**24.** The system of claim **23**, wherein the first audible sound waves are a modified version of second audible sound waves to be delivered to the user via the directional sound emitter when the user is in the predetermined orientation.

**25.** The system of claim **24**, wherein the first audible sound waves have a degraded sound quality compared to the second audible sound waves.

**26.** The system of claim **25**, wherein the first audible sound waves have a decreased audio bit rate compared to the second audible sound waves.

**27.** The system of claim **24**, wherein the first audible sound waves include distortion overlaid upon the first audible sound waves.

**28.** The system of claim **27**, wherein the overlaid distortion comprises frequency distortion.

**29.** The system of claim **24**, wherein the first audible sound waves have a decreased volume compared to the second audible sound waves.

**30.** The system of claim **24**, wherein the first audible sound waves have an increased volume compared to the second audible sound waves.

**31.** The system of claim **23**, wherein the first audible sound waves include vocalized directions that direct the user to the predetermined orientation.

**32.** The system of claim **23**, wherein the first audible sound waves include one or more unpleasant sounds selected from the group consisting of buzzing, screeching, and audio feed back.

**33.** The system of claim **23**, wherein the first audible sound waves include a user selected sound.

**34.** The system of claim **23**, wherein a level of inducement produced by the first audible sound waves is based on a degree of deviation of the tracked orientation from the predetermined orientation.

**35.** The system of claim **23**, wherein the directional sound emitter causes the first audible sound waves to appear to originate from the predetermined orientation by adjusting one or more of a relative volume or relative time delay of audio delivered to each ear of the user.

**36.** The system of claim **23**, wherein a level of inducement produced by the first audible sound waves is based on a measured loss of quality in one or more of vocal emissions, captured video, or signal strength of a wireless device.

**37.** The system of claim **22**, wherein the directional sound emitter, in response to the one or more tracking devices determining that the user is moving away from the predetermined orientation, delivers ultrasonic waves to the user that frequency convert at the tracked location of the user to induce the user to change to the predetermined orientation.

**39.** The system of claim **22**, wherein the predetermined orientation is an orientation at which a camera captures a determined quality level of images of the user.

**40.** The system of claim **22**, wherein the predetermined orientation is an orientation at which a microphone captures a determined quality level of audio of the user.

**41.** The system of claim **22**, wherein the predetermined orientation is an orientation at which the directional sound emitter delivers a determined quality level of audio to the user.

\* \* \* \* \*