




US 20160110065A1

(19) **United States**(12) **Patent Application Publication**
Krueger et al.(10) **Pub. No.: US 2016/0110065 A1**(43) **Pub. Date: Apr. 21, 2016**(54) **SUGGESTING ACTIVITIES**(71) Applicant: **Blackwerks LLC**, Glen Ellyn, IL (US)(72) Inventors: **Brett A. Krueger**, Rochester Hills, MI (US); **Kraig T. Krueger**, Glen Ellyn, IL (US)(73) Assignee: **Blackwerks LLC**, Glen Ellyn, IL (US)(21) Appl. No.: **14/739,044**(22) Filed: **Jun. 15, 2015****Related U.S. Application Data**

(63) Continuation of application No. 14/514,869, filed on Oct. 15, 2014, now Pat. No. 9,058,563.

Publication Classification(51) **Int. Cl.**
G06F 3/0484 (2006.01)
G06F 3/0482 (2006.01)(52) **U.S. Cl.**CPC **G06F 3/04842** (2013.01); **G06F 3/0482** (2013.01)(57) **ABSTRACT**

A method includes receiving inputs indicative of a user state of a user. The inputs include sensor inputs from one or more sensors, application inputs received from one or more software applications, and user inputs received from a graphical user interface. The method includes determining possible information for the user based on the received inputs and executing behaviors having corresponding objectives. Each behavior is configured to evaluate the possible information based on whether the possible information is related to the corresponding objective. The method further includes selecting suggested information from the possible information based on evaluations of one or more behaviors for presentation to the user.

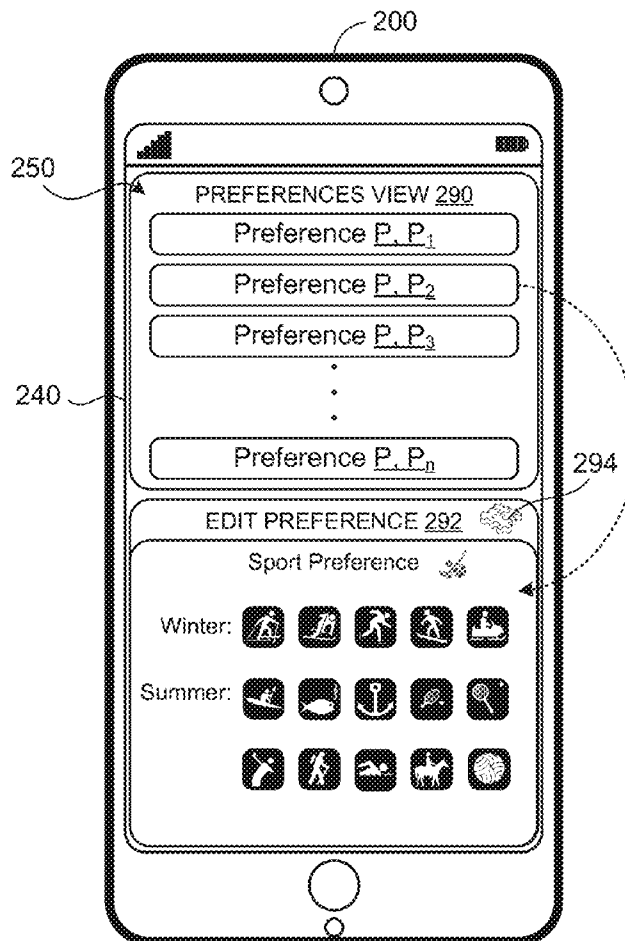

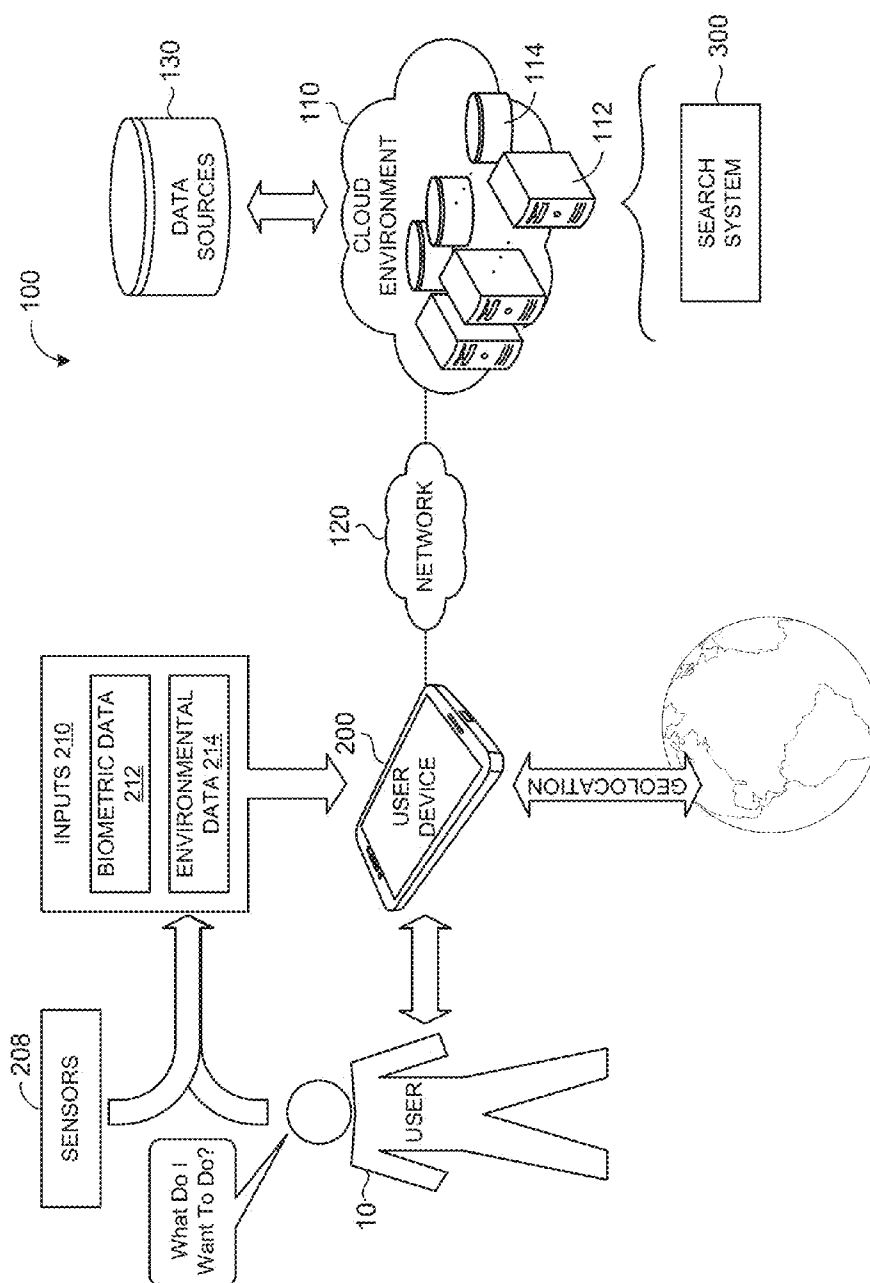


FIG. 1A

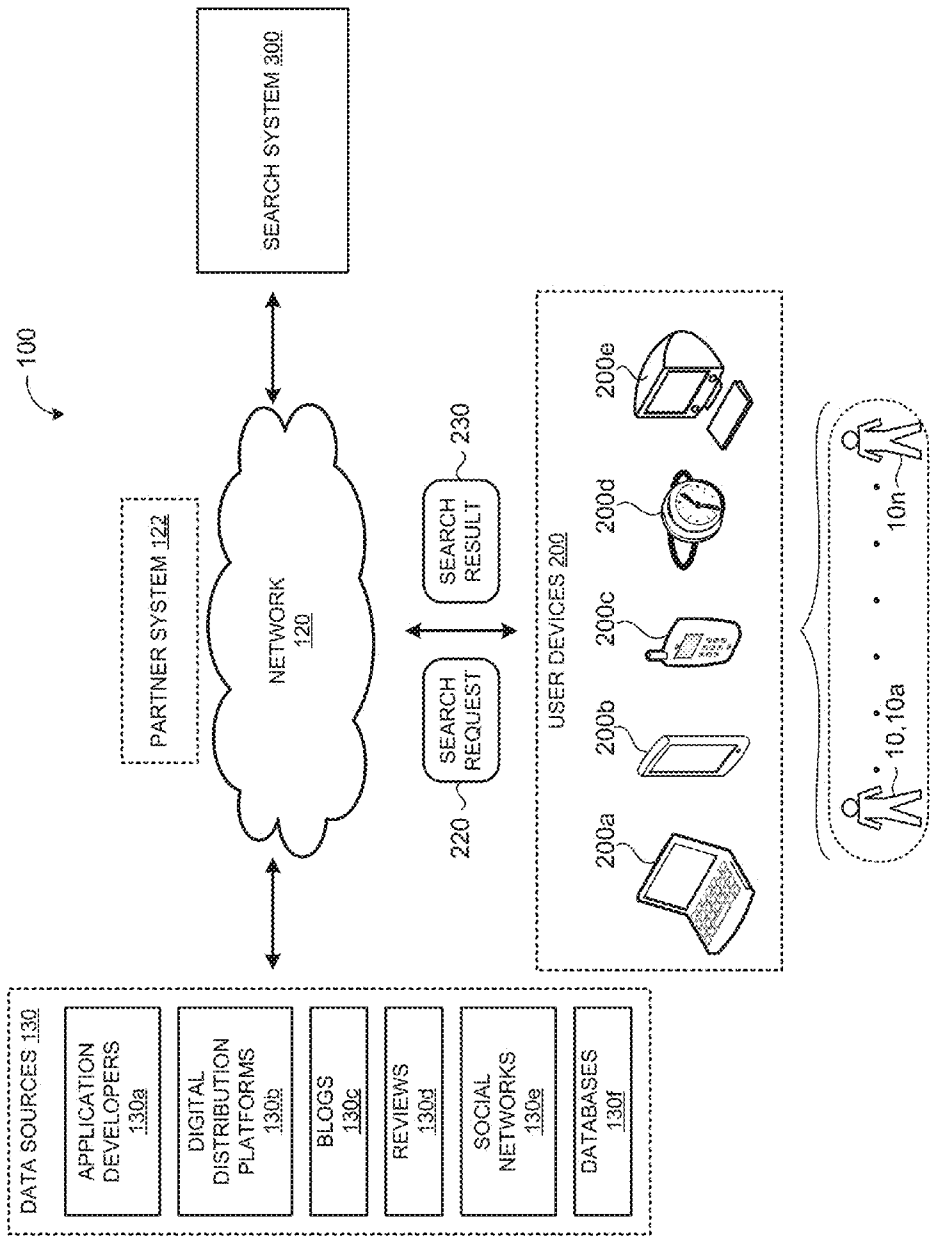


FIG. 1B

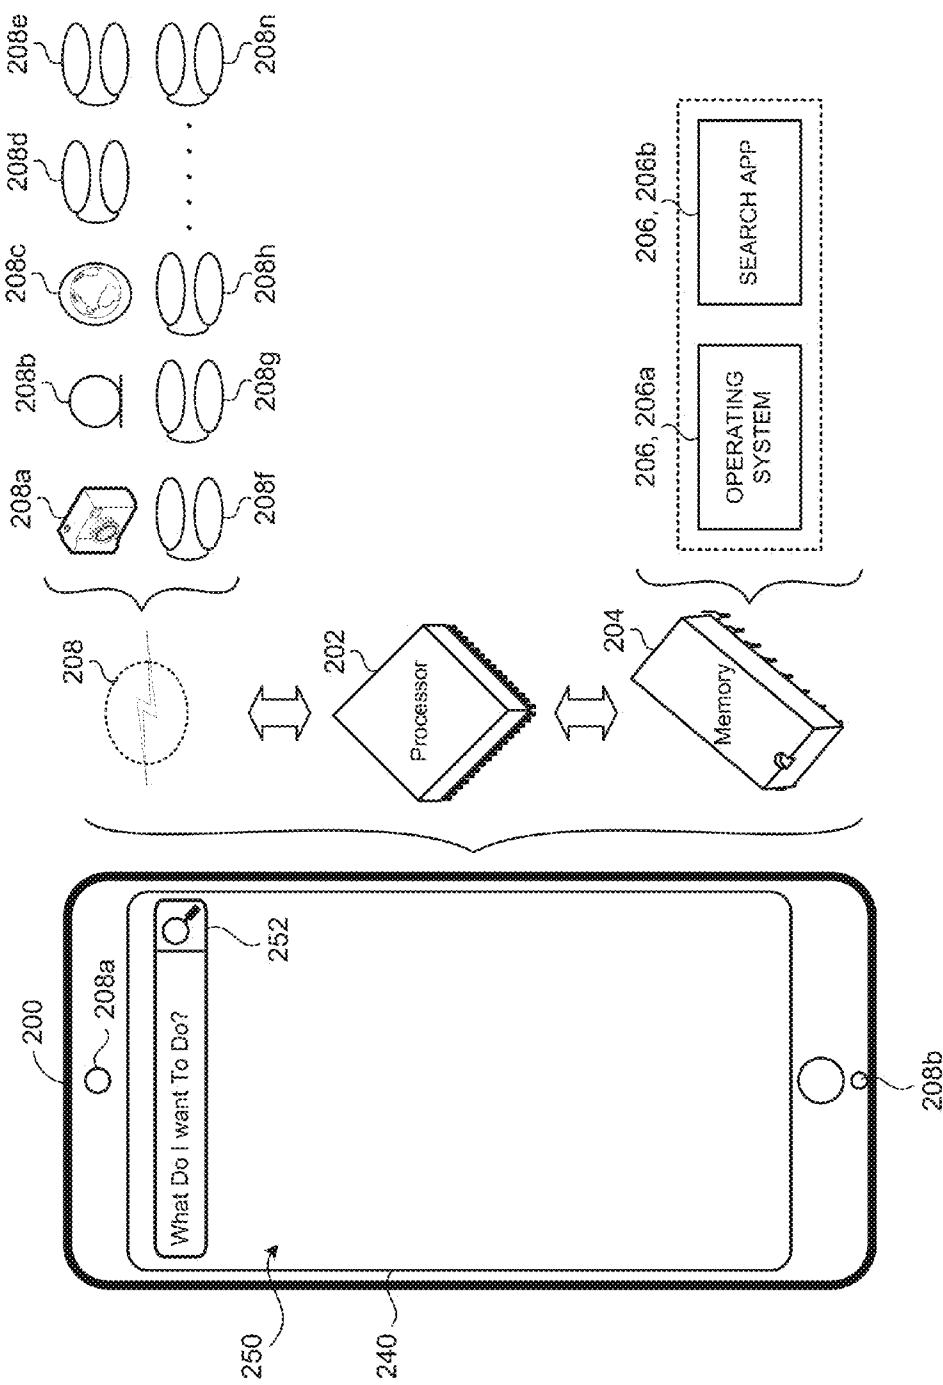


FIG. 2A

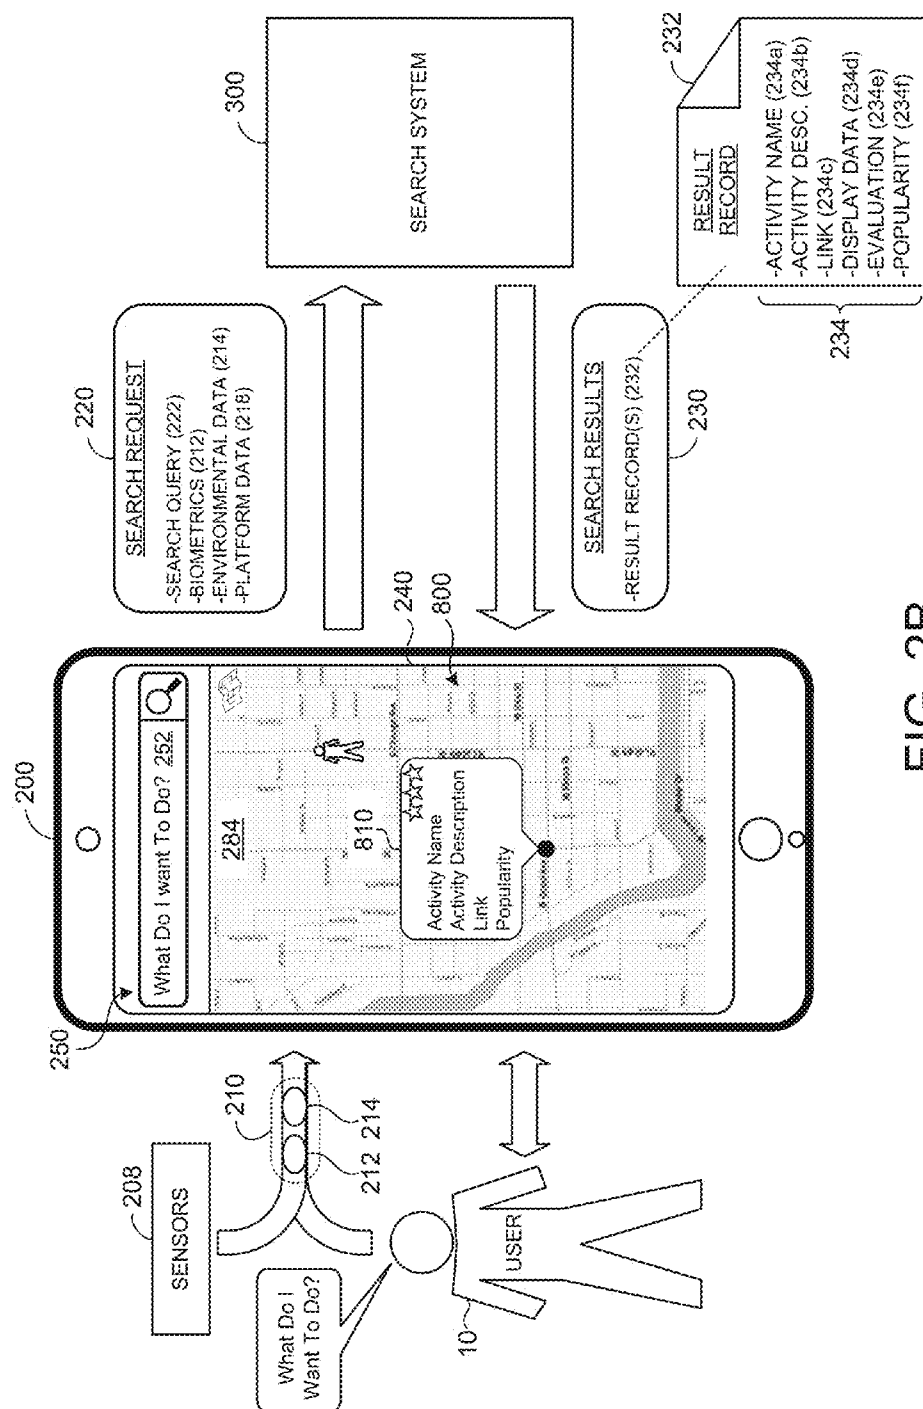


FIG. 2B

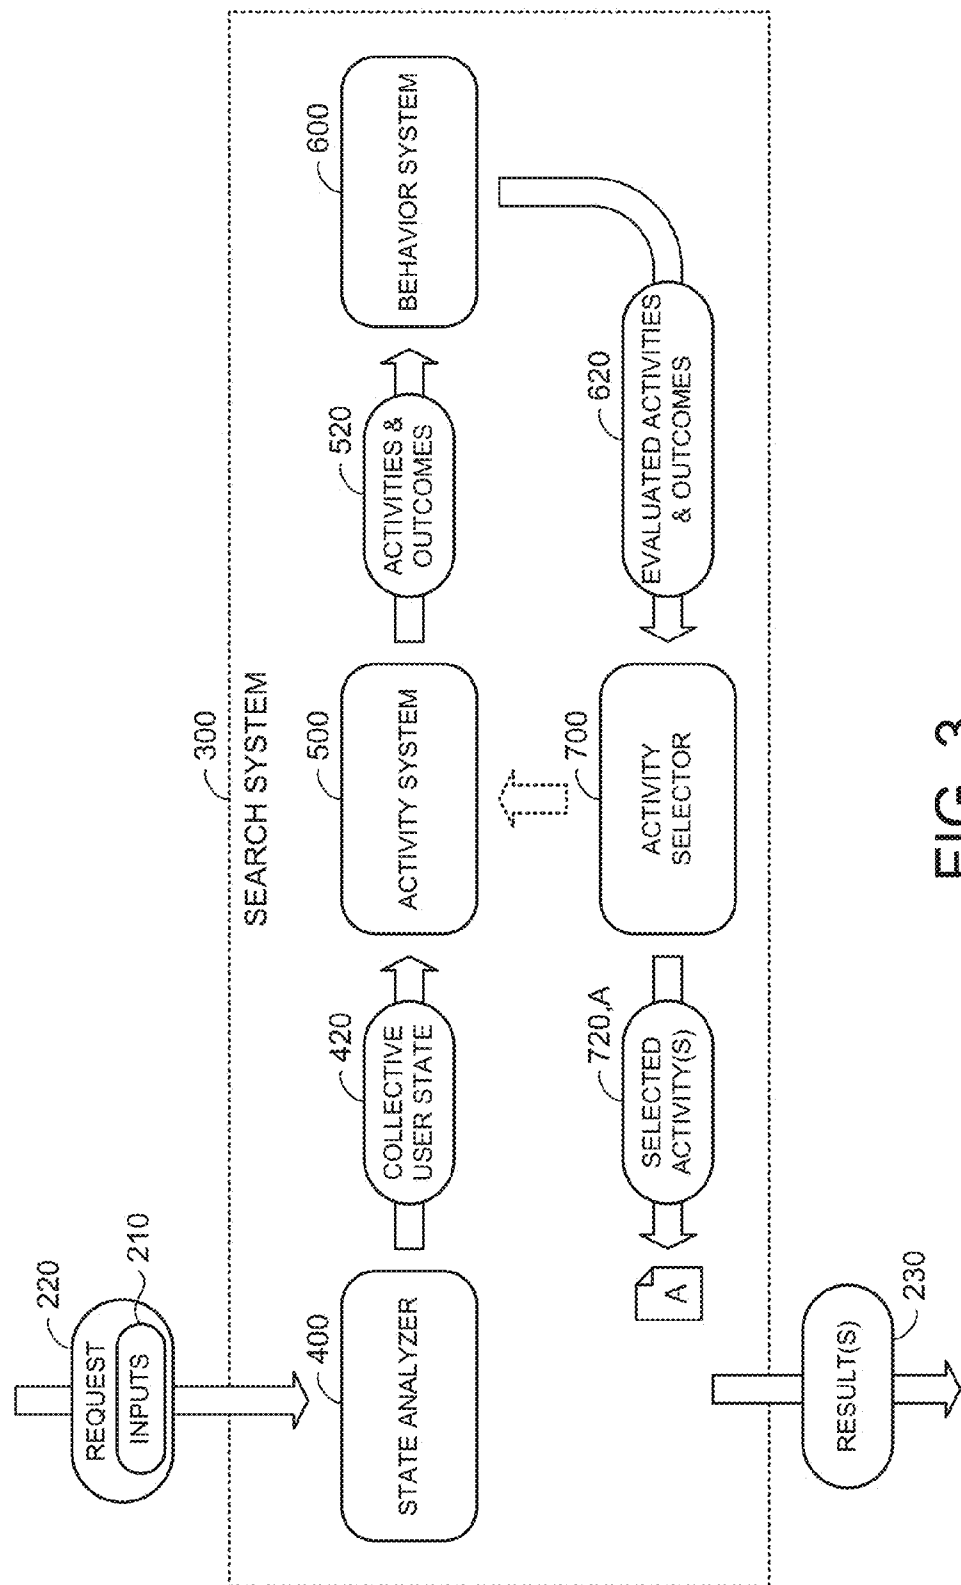
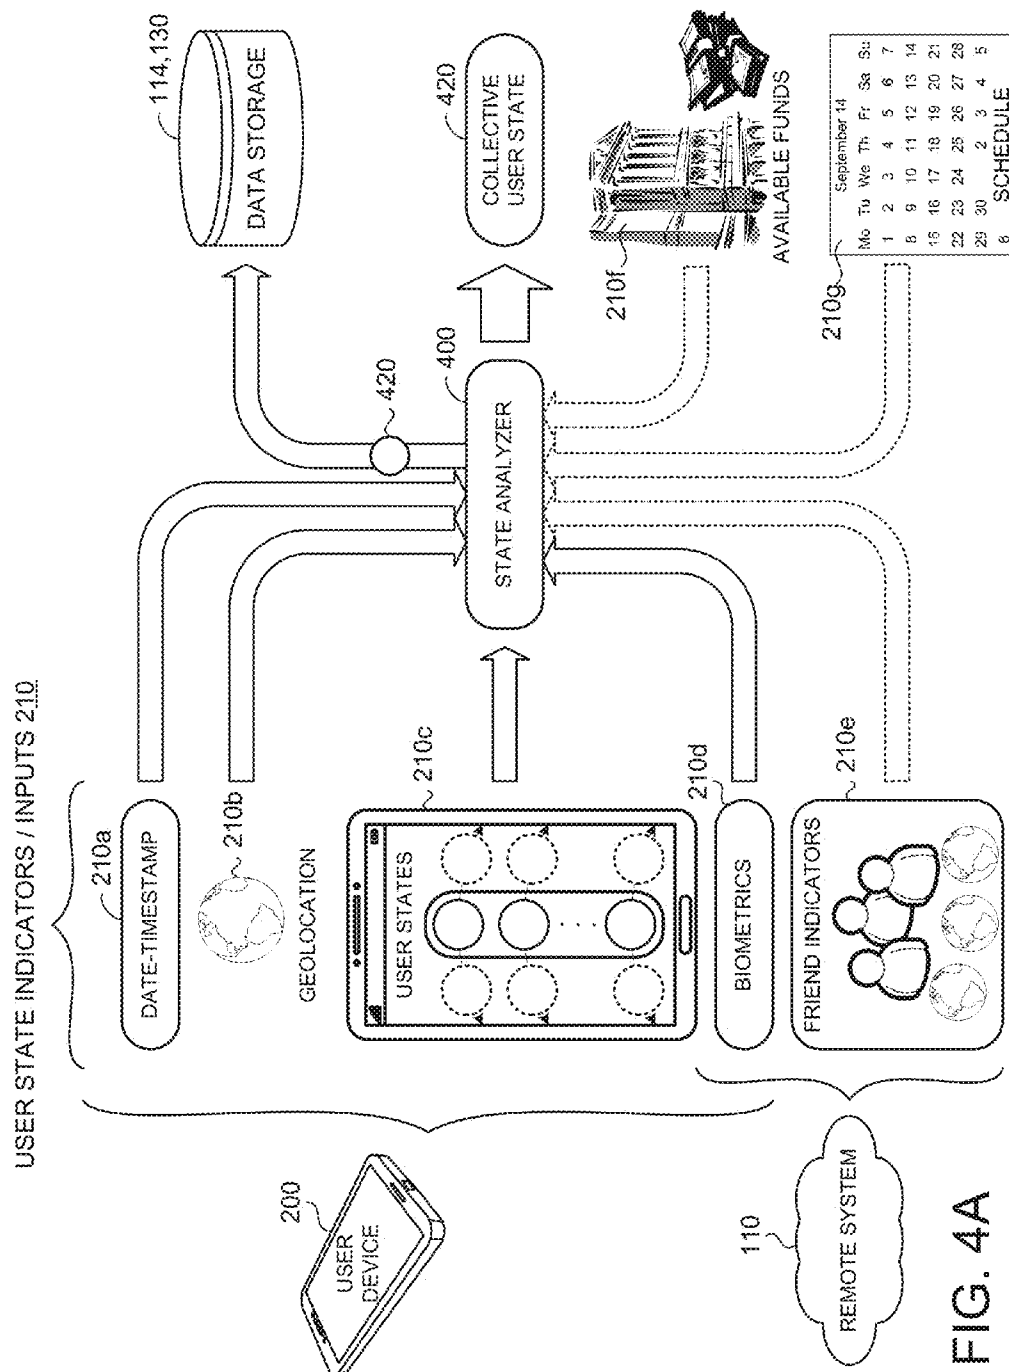


FIG. 3



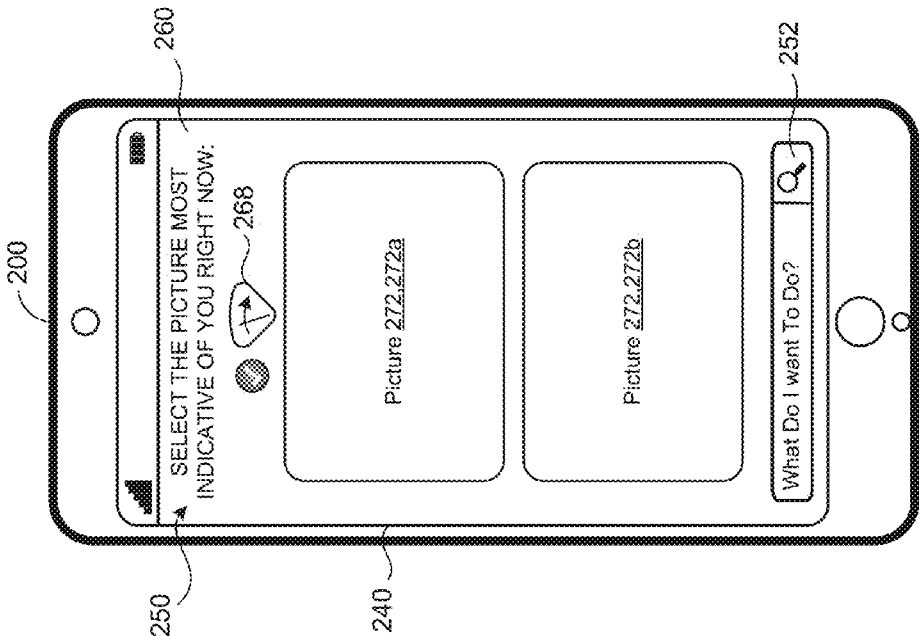


FIG. 4C

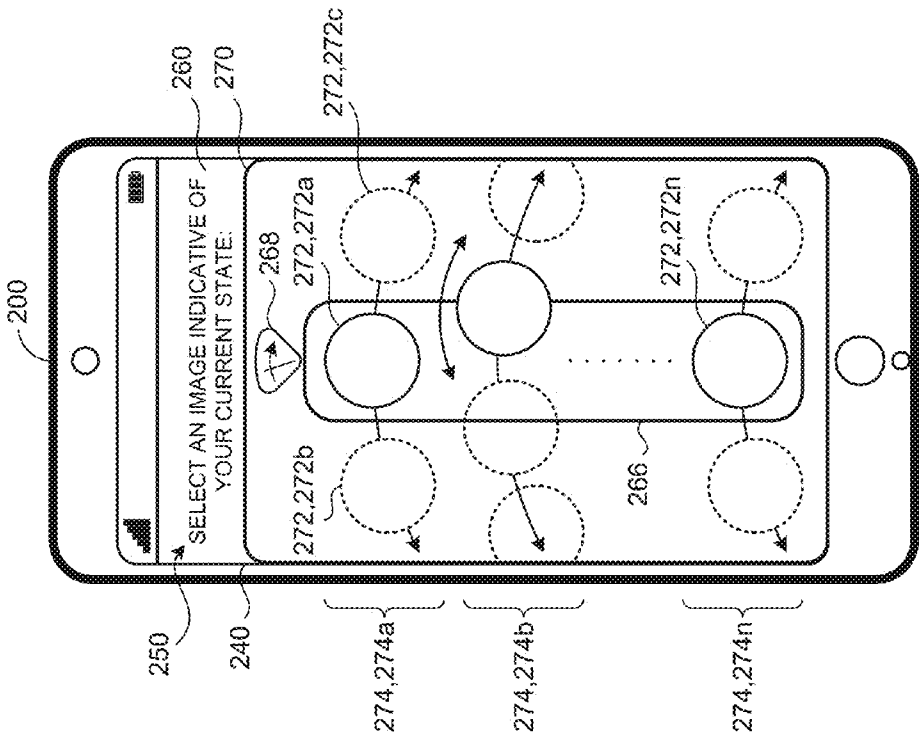


FIG. 4B

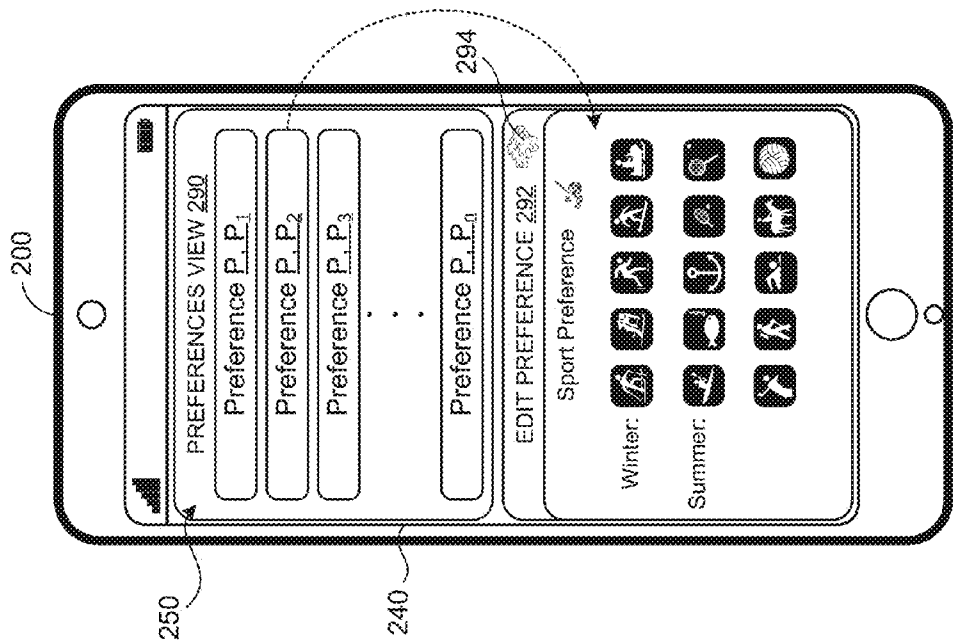


FIG. 4E

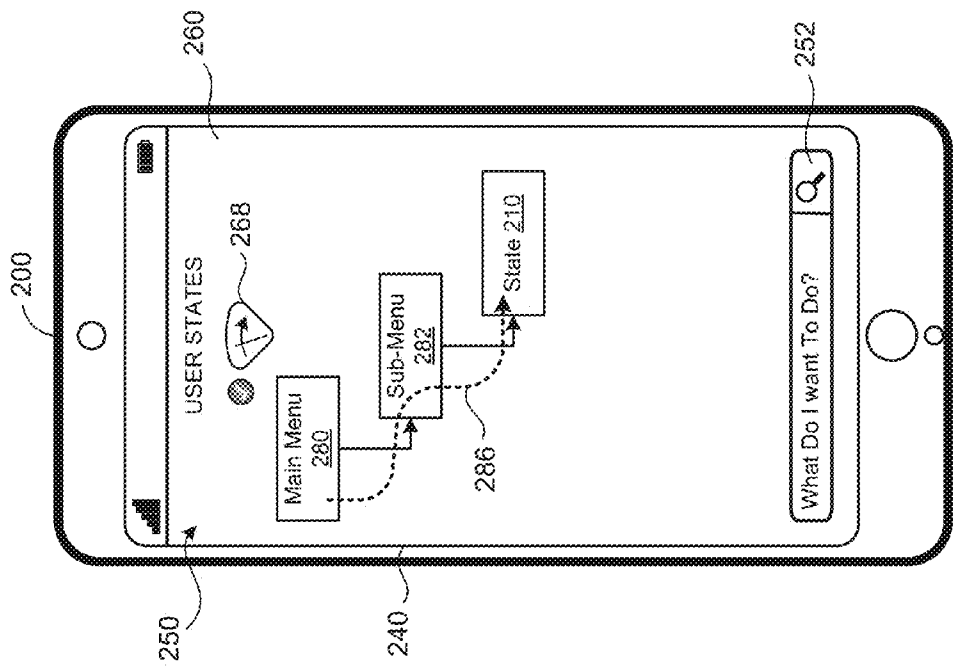
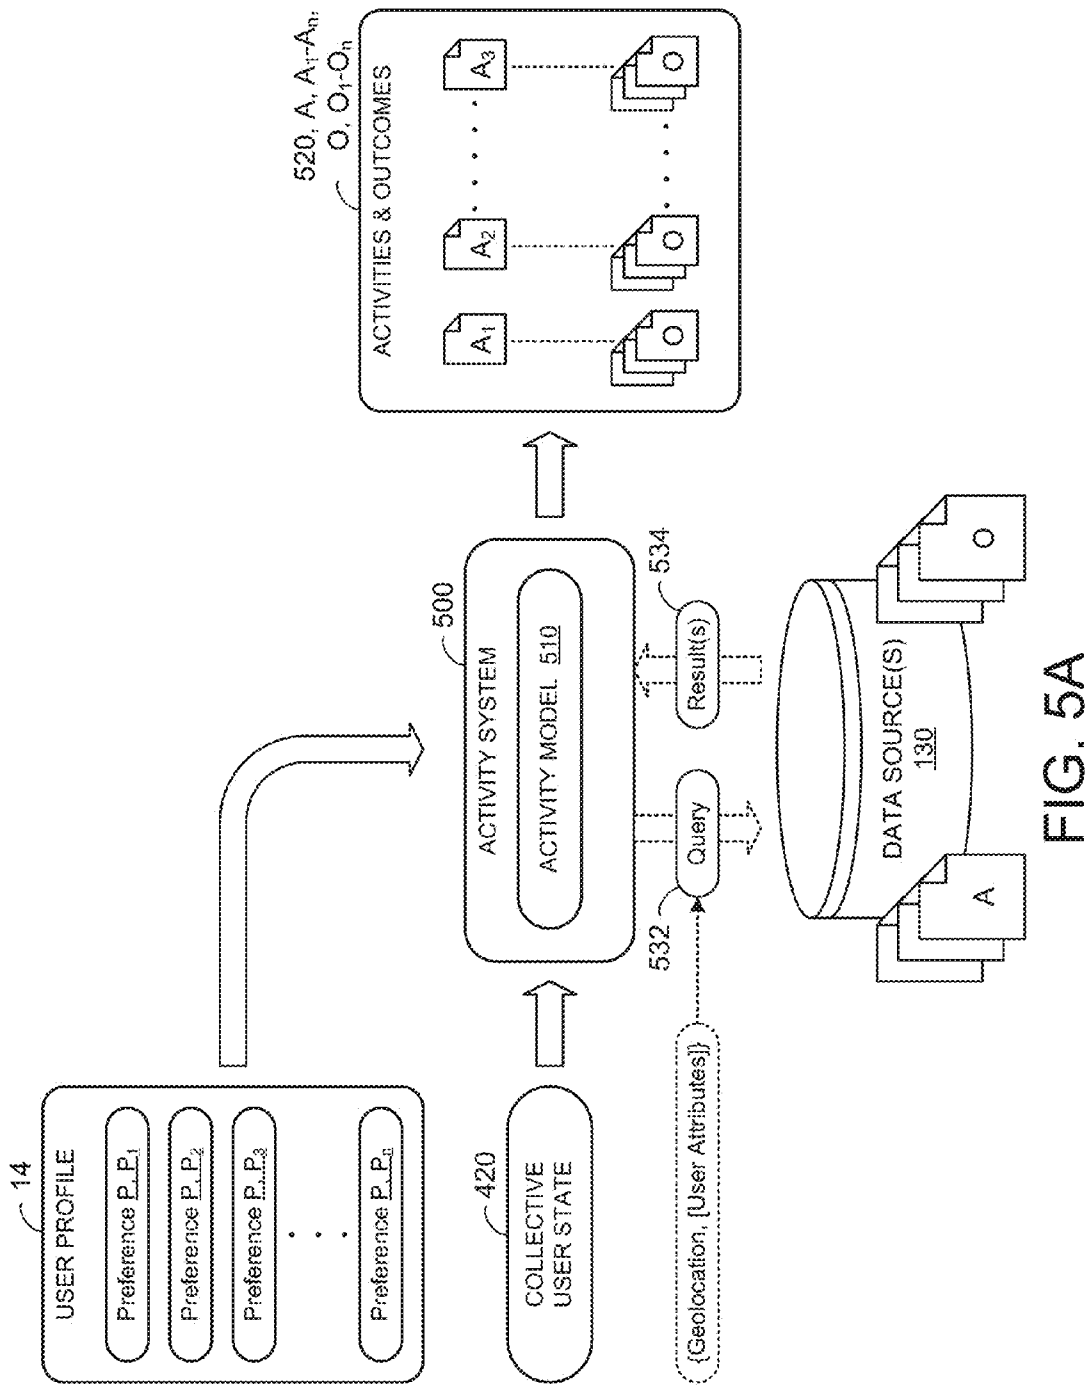


FIG. 4D



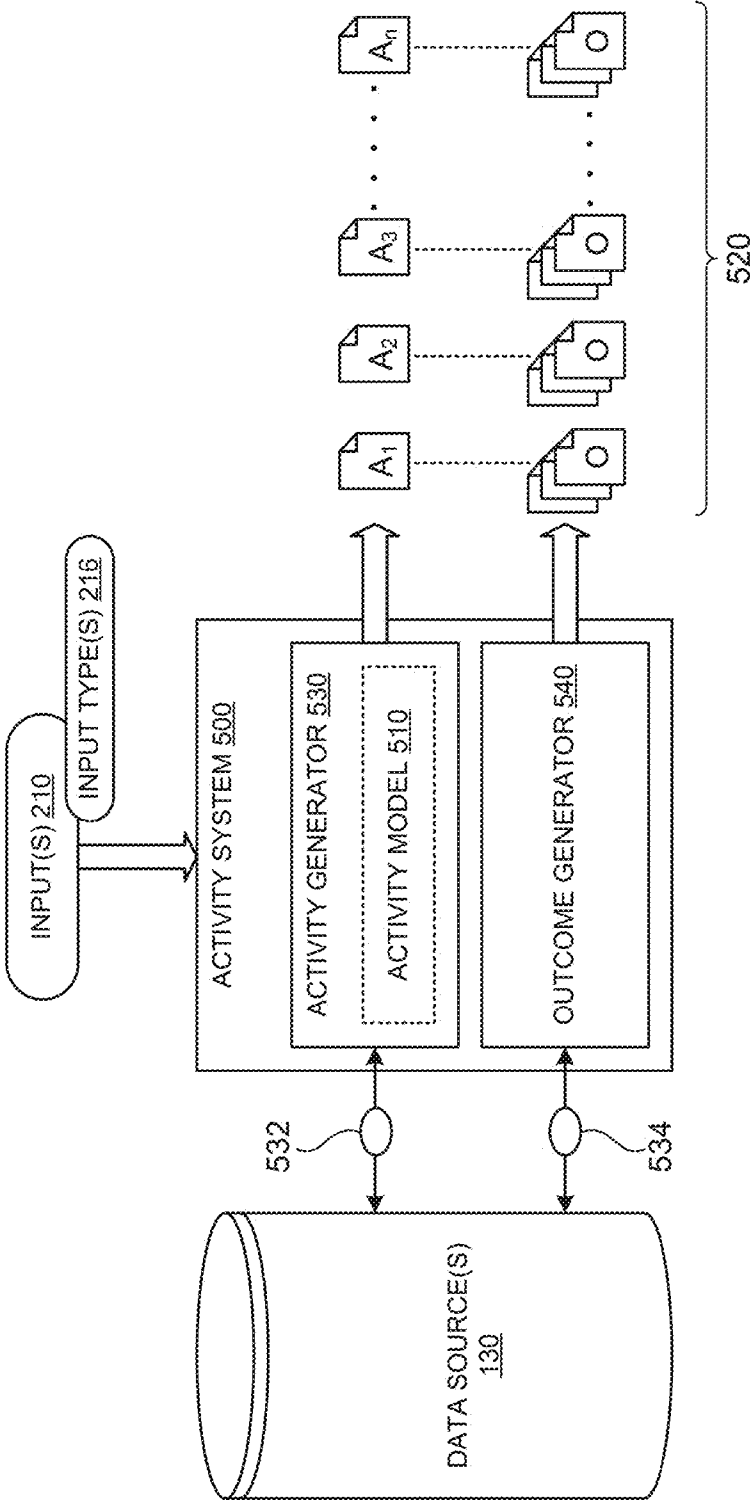


FIG. 5B

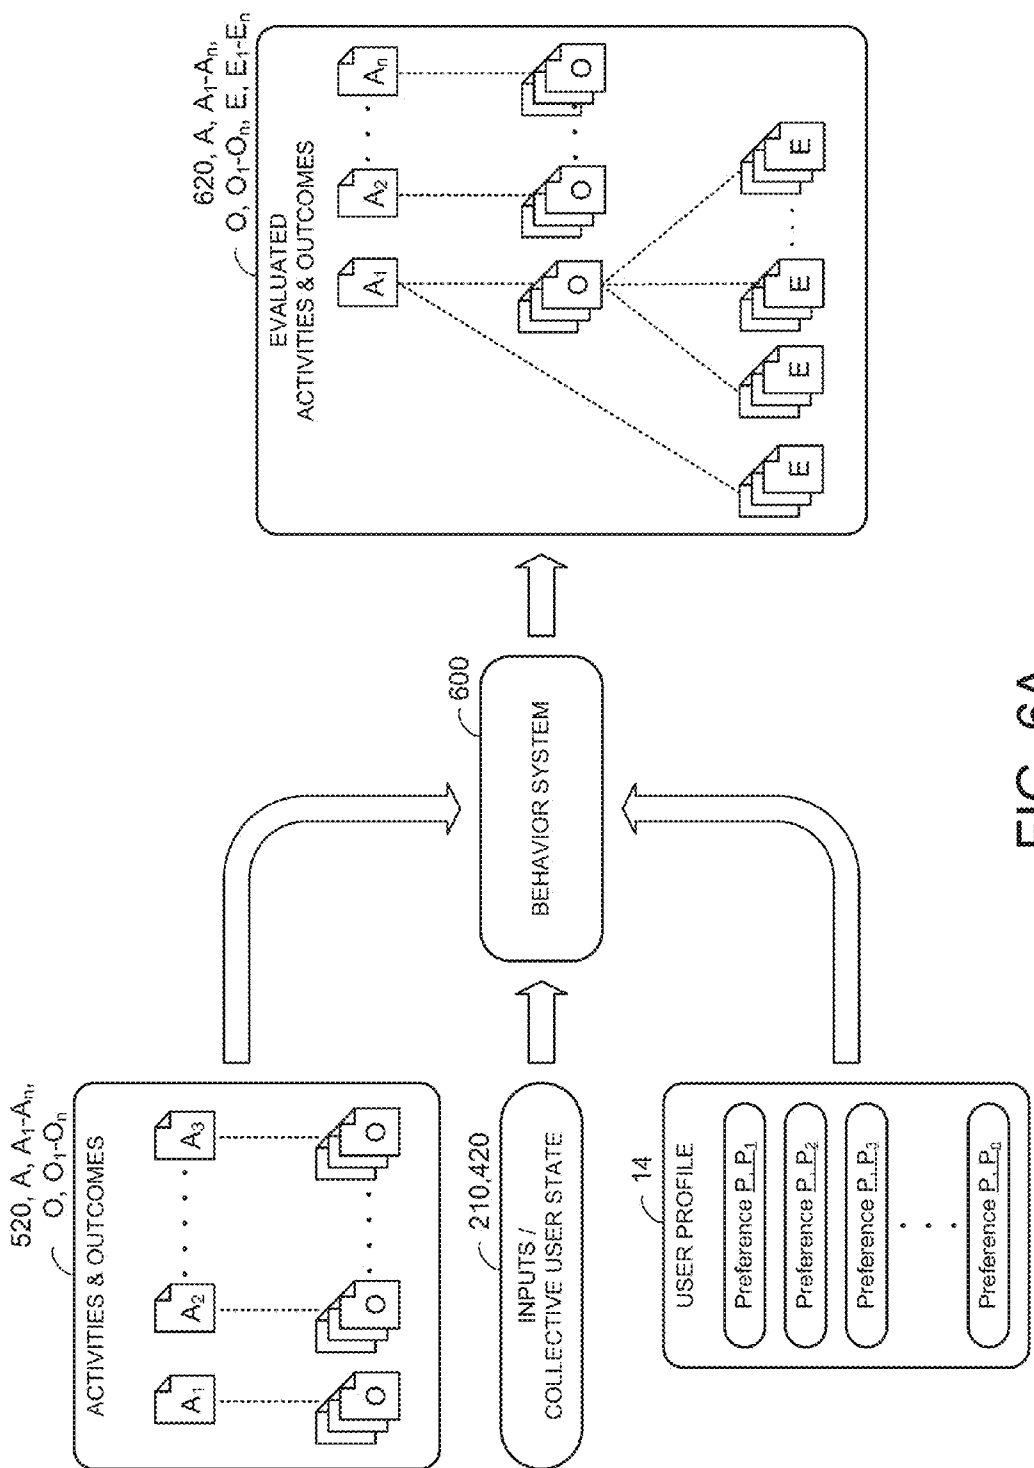


FIG. 6A

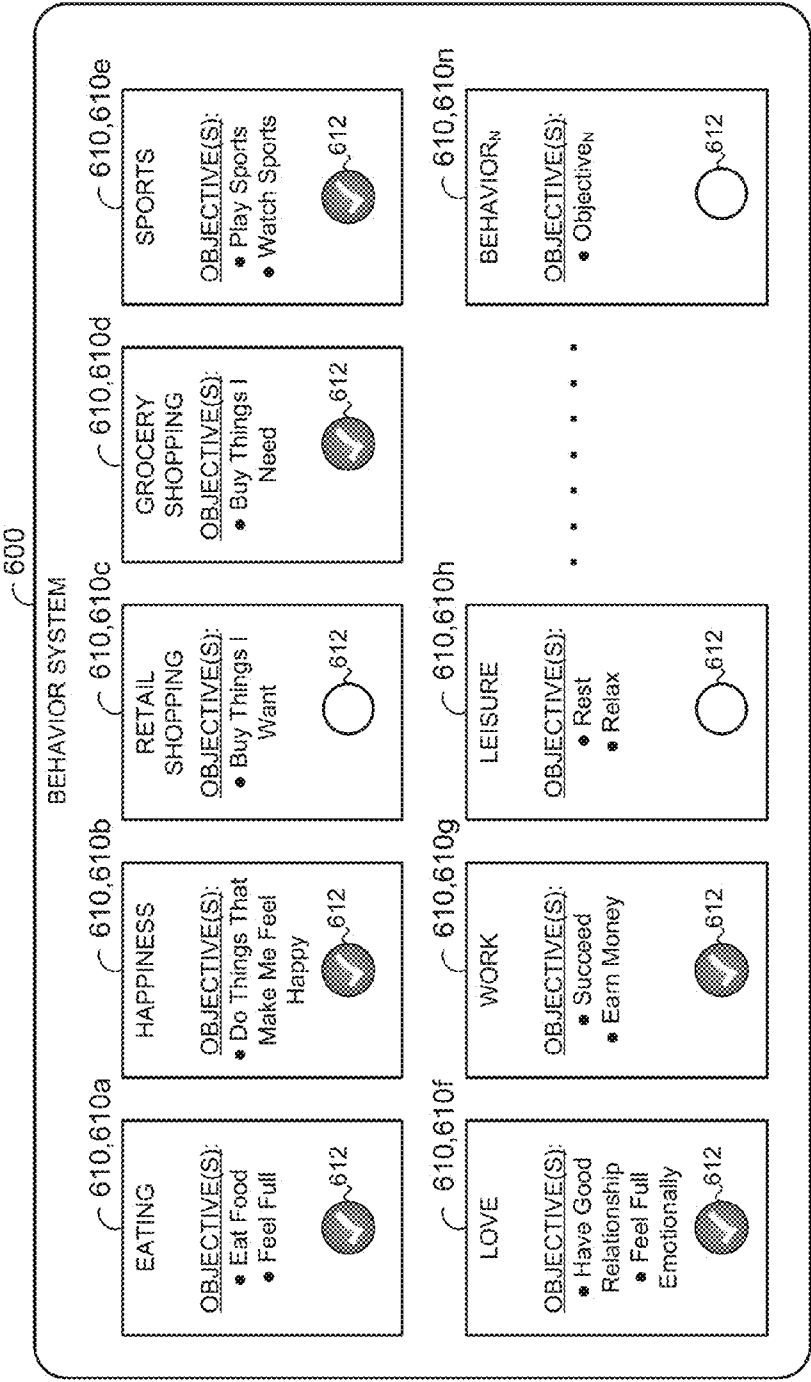
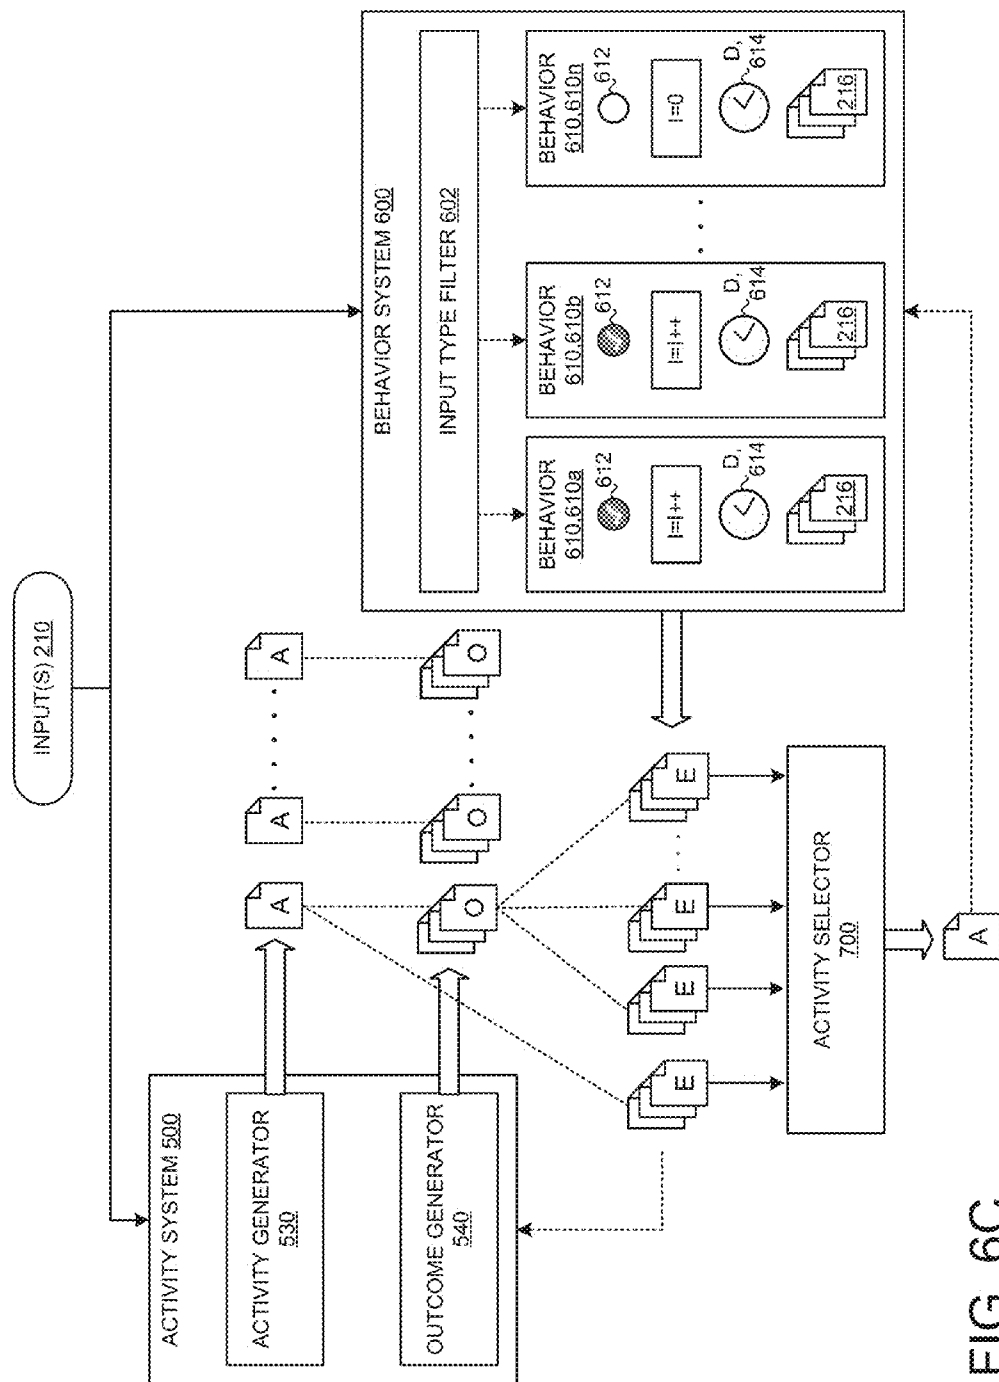


FIG. 6B



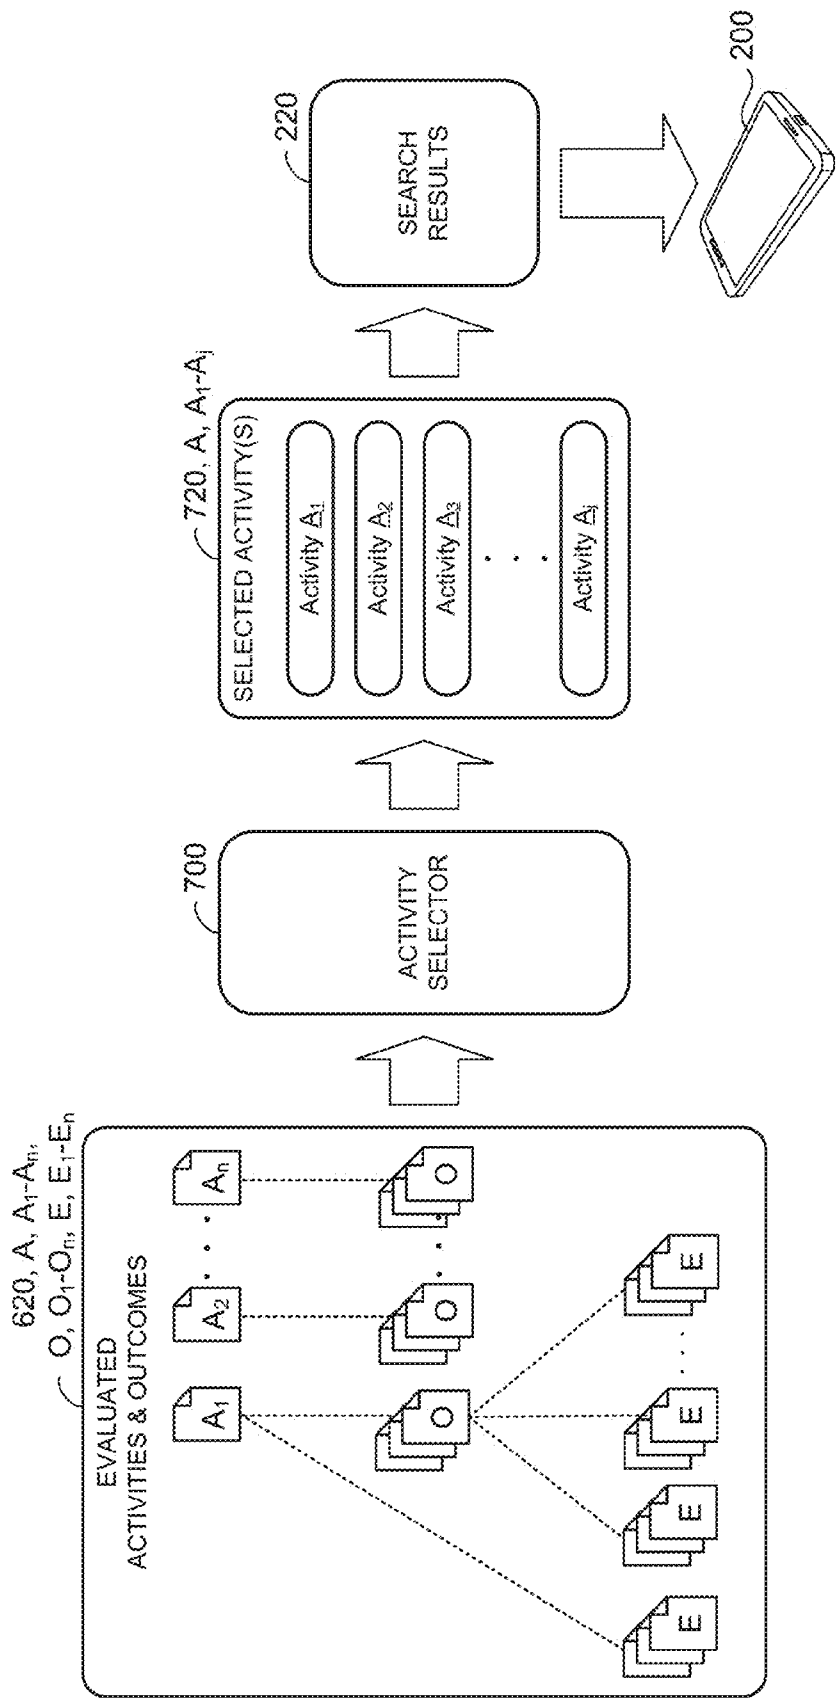


FIG. 7

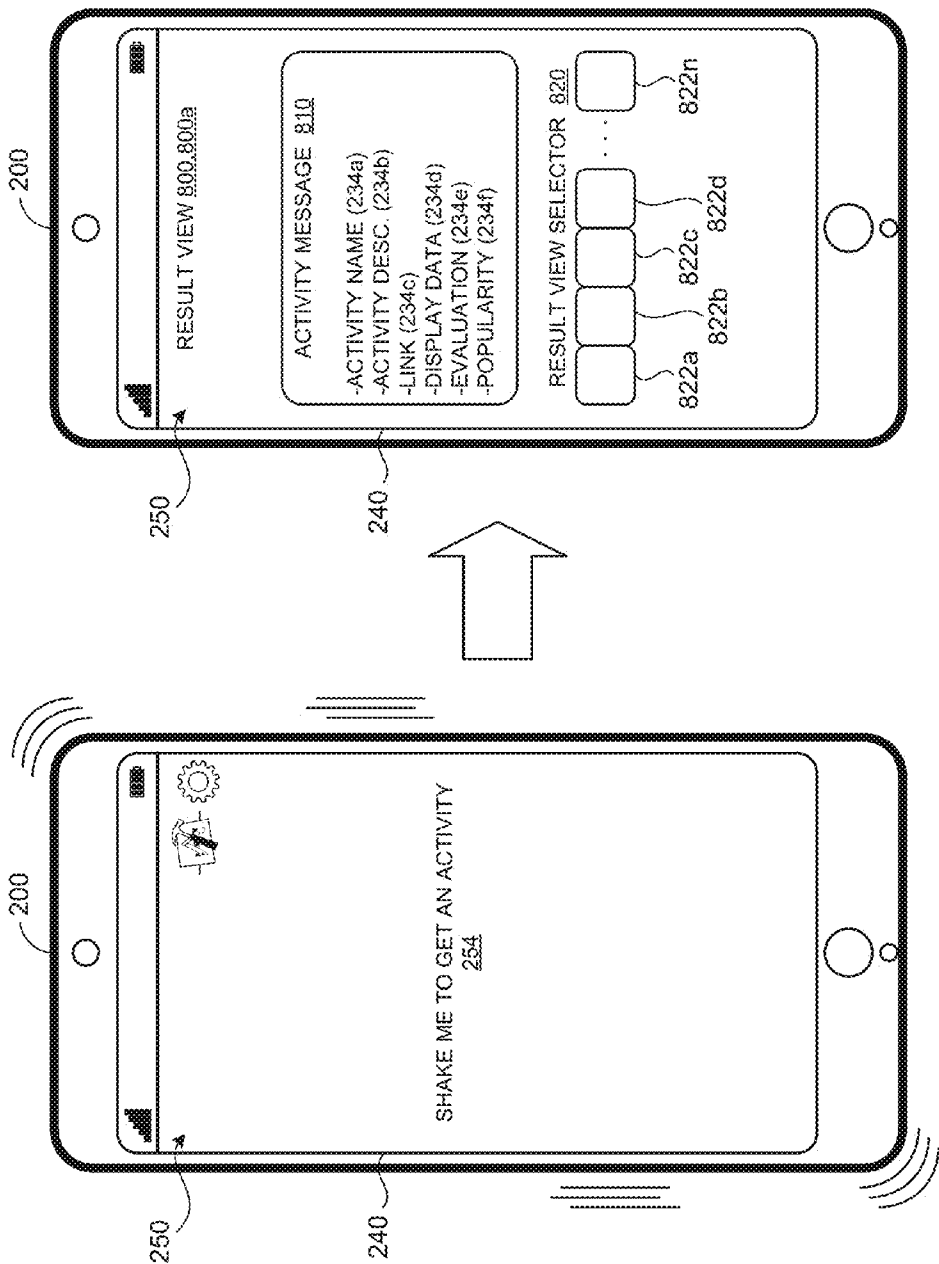


FIG. 8A

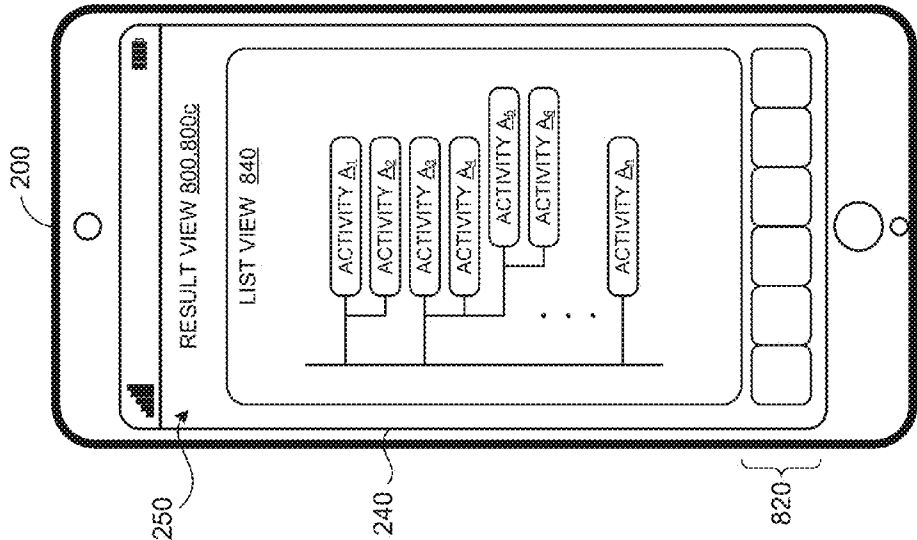


FIG. 8C

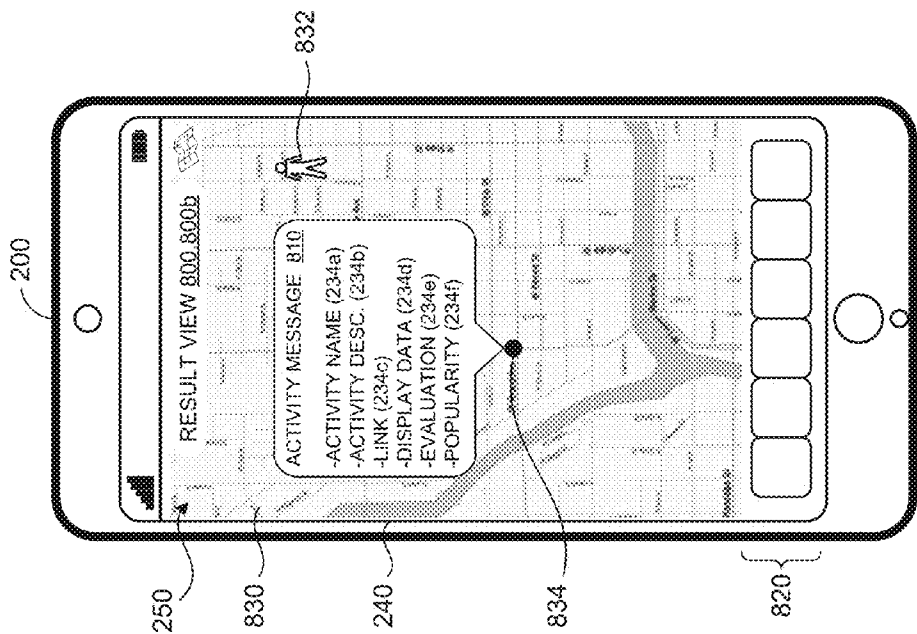


FIG. 8B

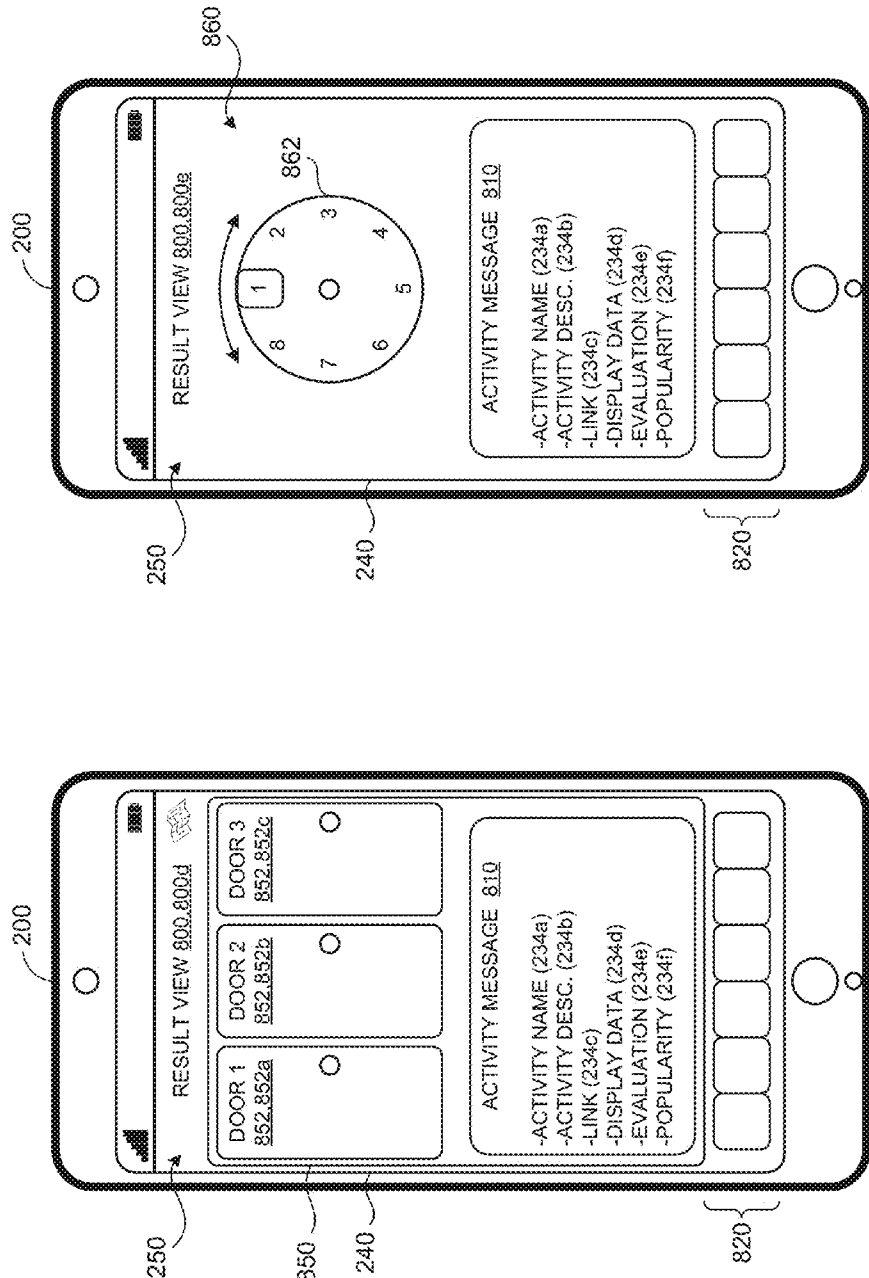


FIG. 8E

FIG. 8D


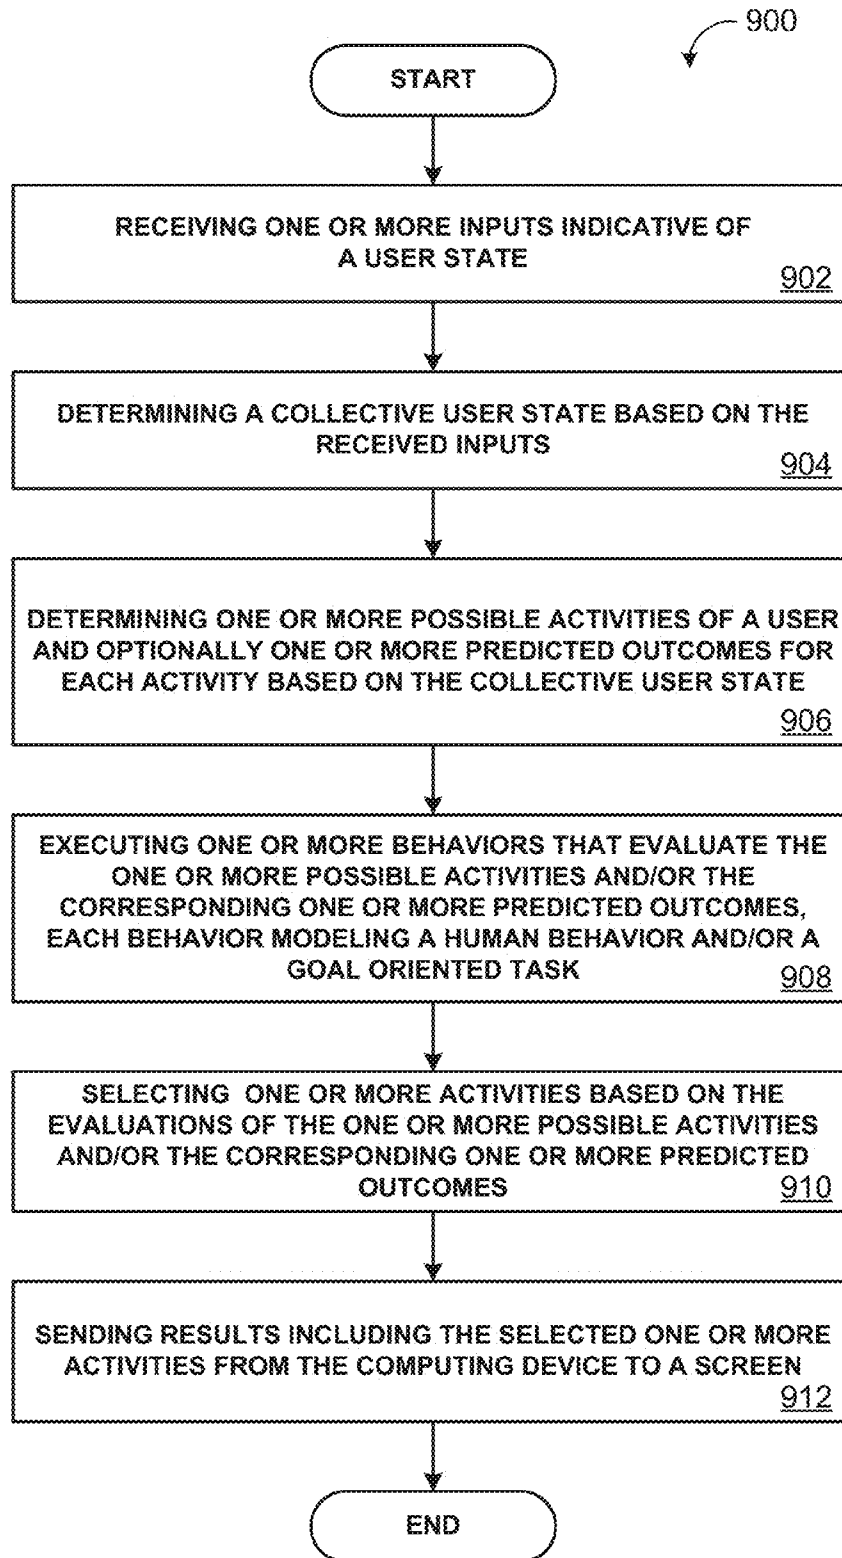


FIG. 9

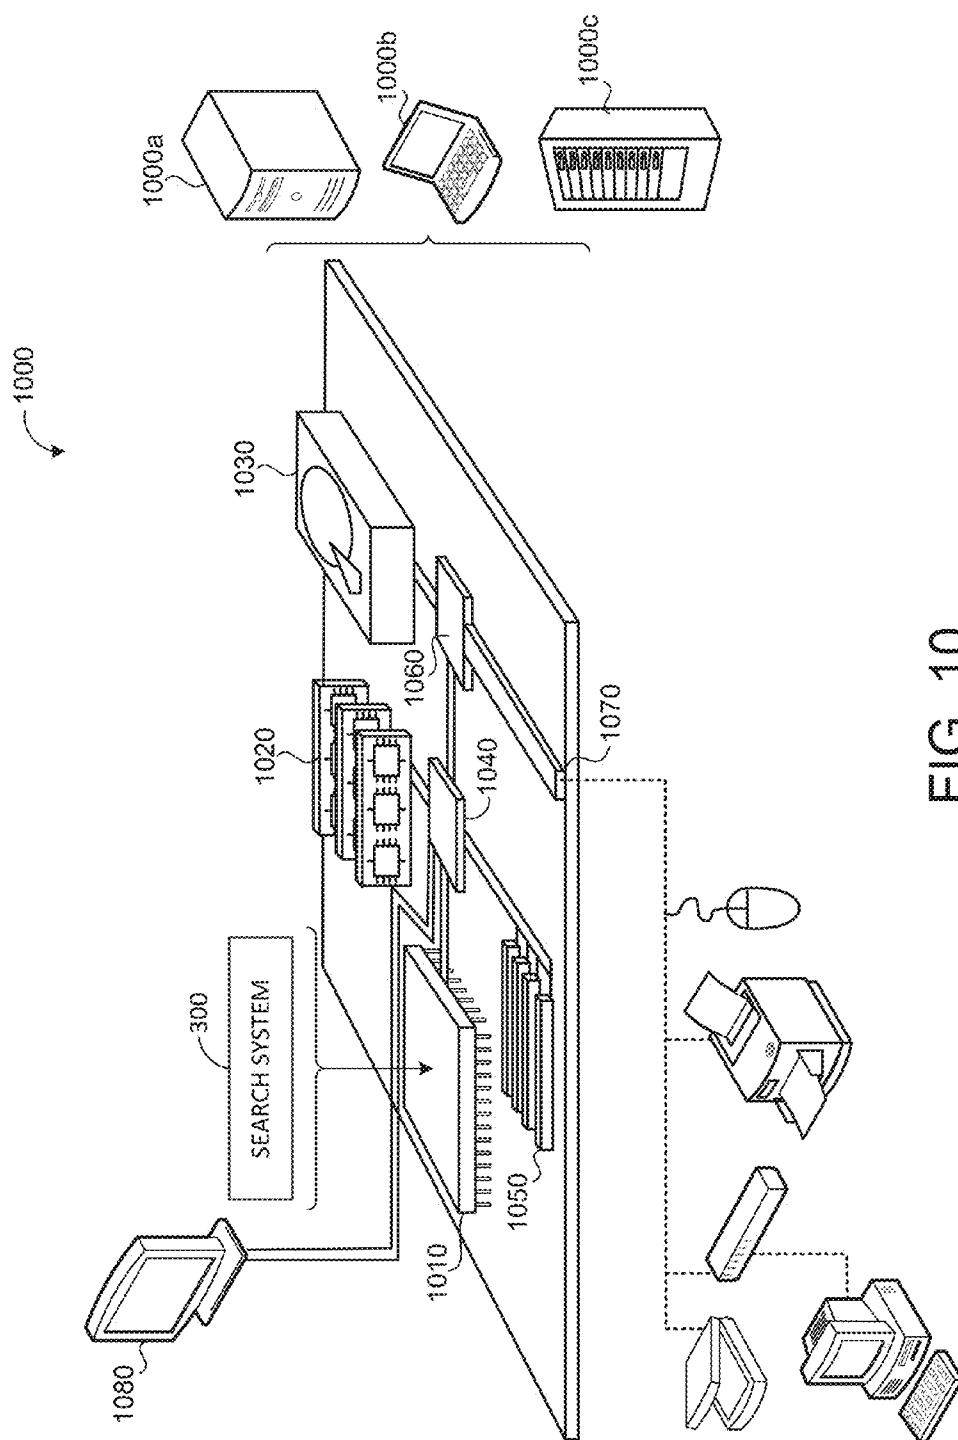

SUGGESTING ACTIVITIES

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This U.S. patent application is a continuation of, and claims priority under 35 U.S.C. §120 from, U.S. patent application Ser. No. 14/514,869, filed on Oct. 15, 2014 (to issue as U.S. Pat. No. 9,058,563 on Jun. 16, 2015), which is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] This disclosure relates to suggesting information to a user based on an assessment of the user's current state.

BACKGROUND

[0003] The use of mobile devices, such as smartphones, tablet PCs, cellular telephones, or portable digital assistants, has become widespread. At their inception, mobile devices were mainly used for voice communication, but recently they have become a reliable source for performing a range of business and personal tasks. Mobile devices are useful to obtain information by using a data connection to access the World Wide Web. The user may input a search query on a search engine website, using the mobile device, to obtain requested information. The information may relate to a location of a restaurant, hotel, shopping center, or other information. Users may use mobile devices for social media, which allows the users to create, share, or exchange information and ideas in virtual communities or networks. Social media depends on mobile and web-based technologies to allow people to share, co-create, collaborate on, discuss, and modify user-generated content.

SUMMARY

[0004] One aspect of the disclosure provides a method that includes receiving, at a computing device, inputs indicative of a user state of a user. The inputs include sensor inputs from one or more sensors in communication with the computing device and/or user inputs received from a graphical user interface displayed on a screen in communication with the computing device. The method includes determining, using the computing device, a collective user state based on the received inputs and determining one or more possible activities for the user and one or more predicted outcomes for each activity based on the collective user state. The method includes executing, at the computing device, one or more behaviors that evaluate the one or more possible activities and/or the corresponding one or more predicted outcomes. Each behavior models a human behavior and/or a goal oriented task. The method further includes selecting, using the computing device, one or more activities based on the evaluations of the one or more possible activities and/or the corresponding one or more predicted outcomes and sending results including the selected one or more activities from the computing device to the screen for display on the screen.

[0005] Implementations of the disclosure may include one or more of the following optional features. In some implementations, the inputs include biometric data of the user and environmental data regarding a surrounding of the user. The one or more sensors may include at least one of a global positioning system, a temperature sensor, a camera, a three dimensional volumetric point cloud imaging sensor, a fingerprint reader, a blood glucose monitor, a skin PH meter, an

inertial measurement unit, a microphone, a blood oxygen meter, a humidistat, or a barometer. Other sensors are possible as well.

[0006] In some implementations, the method includes querying one or more remote data sources in communication with the computing device to identify possible activities and/or predicted outcomes. The method may include determining, using the computing device, the one or more possible activities and the one or more predicted outcomes for each activity based on one or more preferences of the user. Each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves an objective of the behavior. Moreover, each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves a user preference stored non-transitory memory in communication with the computing device. In some examples, a first behavior evaluates an activity or a corresponding outcome based on an evaluation by a second behavior of the activity or the corresponding outcome. Each behavior may elect to participate or not participate in evaluating the one or more activities and/or the one or more predicted outcomes for each activity based on the collective user state.

[0007] When an input is related to a behavior, the method may include incrementing an influence value associated with the behavior. The input is related to the behavior when the input is of an input type associated with the behavior. In some implementations, the evaluations of each behavior can be weighted based on the influence value of the corresponding behavior. The method may include decrementing the influence value of each behavior after a threshold period of time. When an influence value equals zero, the method may include deactivating the corresponding behavior. Any behaviors having an influence value greater than zero may participate in evaluating the activities or the corresponding outcomes; and any behaviors having an influence value equal to zero may not participate in evaluating the activities or the corresponding outcomes.

[0008] In some implementations, the method includes selecting for the results a threshold number of activities having the highest evaluations or a threshold number of activities having corresponding predicted outcomes that have the highest evaluations. The method may include combining selected activities and sending a combined activity in the results.

[0009] The computing device may include a user computer processor of a user device including the screen and/or one or more remote computer processors in communication with the user computer processor. For example, the computer device can be the computer processor of a mobile device, a computer processor of an elastically scalable cloud resource, or a combination thereof.

[0010] Another aspect of the disclosure provides a system that includes one or more computing devices and non-transitory memory in communication with the one or more computing devices. The non-transitory memory stores instructions that, when executed by the one or more computing devices, cause the one or more computing devices to perform operations that include receiving inputs indicative of a user state of a user. The inputs include sensor inputs from one or more sensors in communication with the one or more computing devices and/or user inputs received from a graphical user interface displayed on a screen in communication with the one or more computing devices. The operations include

determining a collective user state based on the received inputs, determining one or more possible activities for the user and one or more predicted outcomes for each activity based on the collective user state, and executing one or more behaviors that evaluate the one or more possible activities and/or the corresponding one or more predicted outcomes. Each behavior models a human behavior and/or a goal oriented task. The operations further include selecting one or more activities based on the evaluations of the one or more possible activities and/or the corresponding one or more predicted outcomes and sending results including the selected one or more activities to the screen for display on the screen.

[0011] In some implementations, the inputs include biometric data of the user and environmental data regarding a surrounding of the user. The one or more sensors may include at least one of a global positioning system, a temperature sensor, a camera, a three dimensional volumetric point cloud imaging sensor, a fingerprint reader, a blood glucose monitor, a skin PH meter, an inertial measurement unit, a microphone, a blood oxygen meter, a humidistat, or a barometer. Other sensors are possible as well.

[0012] In some implementations, the operations include querying one or more remote data sources in communication with the computing device to identify possible activities and/or predicted outcomes. The operations may include determining, using the computing device, the one or more possible activities and the one or more predicted outcomes for each activity based on one or more preferences of the user. Each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves an objective of the behavior. Moreover, each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves a user preference stored in non-transitory memory in communication with the computing device. In some examples, a first behavior evaluates an activity or a corresponding outcome based on an evaluation by a second behavior of the activity or the corresponding outcome. Each behavior may elect to participate or not participate in evaluating the one or more activities and/or the one or more predicted outcomes for each activity based on the collective user state.

[0013] When an input is related to a behavior, the operations may include incrementing an influence value associated with the behavior. The input is related to the behavior when the input is of an input type associated with the behavior. In some implementations, the evaluations of each behavior can be weighted based on the influence value of the corresponding behavior. The operations may include decrementing the influence value of each behavior after a threshold period of time. When an influence value equals zero, the operations may include deactivating the corresponding behavior. Any behaviors having an influence value greater than zero may participate in evaluating the activities or the corresponding outcomes; and any behaviors having an influence value equal to zero may not participate in evaluating the activities or the corresponding outcomes.

[0014] In some implementations, the operations include selecting for the results a threshold number of activities having the highest evaluations or a threshold number of activities having corresponding predicted outcomes that have the highest evaluations. The operations may include combining selected activities and sending a combined activity in the results.

[0015] The computing device may include a user computer processor of a user device including the screen and/or one or more remote computer processors in communication with the user computer processor. For example, the computer device can be the computer processor of a mobile device, a computer processor of an elastically scalable cloud resource, or a combination thereof.

[0016] Another aspect of the disclosure provides a method that includes receiving, at a computing device, inputs indicative of a user state of each user of a group of users. The inputs include sensor inputs from one or more sensors in communication with the computing device and/or user inputs received from a graphical user interface displayed on one or more screens in communication with the computing device. The method includes determining, using the computing device, a collective user state for each user based on the received inputs (e.g., inputs of that user and/or inputs associated with other users in the group) and determining one or more possible activities for group of users and one or more predicted outcomes for each activity based on the collective user states. The method includes executing, at the computing device, one or more behaviors that evaluate the one or more possible activities and/or the corresponding one or more predicted outcomes. Each behavior models a human behavior and/or a goal oriented task. The method further includes selecting, using the computing device, one or more activities based on the evaluations of the one or more possible activities and/or the corresponding one or more predicted outcomes and sending results including the selected one or more activities from the computing device to the one or more screens for display on the one or more screens.

[0017] Implementations of the disclosure may include one or more of the following optional features. In some implementations, the inputs include biometric data of at least one user and environmental data regarding a surrounding of the at least one user. The one or more sensors may include at least one of a global positioning system, a temperature sensor, a camera, a three dimensional volumetric point cloud imaging sensor, a fingerprint reader, a blood glucose monitor, a skin PH meter, an inertial measurement unit, a microphone, a blood oxygen meter, a humidistat, or a barometer. Other sensors are possible as well.

[0018] In some implementations, the method includes querying one or more remote data sources in communication with the computing device to identify possible activities and/or predicted outcomes. The method may include determining, using the computing device, the one or more possible activities and the one or more predicted outcomes for each activity based on one or more preferences of the user. Each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves an objective of the behavior. Moreover, each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves a user preference stored in non-transitory memory in communication with the computing device. In some examples, a first behavior evaluates an activity or a corresponding outcome based on an evaluation by a second behavior of the activity or the corresponding outcome. Each behavior may elect to participate or not participate in evaluating the one or more activities and/or the one or more predicted outcomes for each activity based on the collective user state.

[0019] When an input is related to a behavior, the method may include incrementing an influence value associated with the behavior. The input is related to the behavior when the input is of an input type associated with the behavior. In some implementations, the evaluations of each behavior can be weighted based on the influence value of the corresponding behavior. The method may include decrementing the influence value of each behavior after a threshold period of time. When an influence value equals zero, the method may include deactivating the corresponding behavior. Any behaviors having an influence value greater than zero may participate in evaluating the activities or the corresponding outcomes; and any behaviors having an influence value equal to zero may not participate in evaluating the activities or the corresponding outcomes.

[0020] In some implementations, the method includes selecting for the results a threshold number of activities having the highest evaluations or a threshold number of activities having corresponding predicted outcomes that have the highest evaluations. The method may include combining selected activities and sending a combined activity in the results.

[0021] The computing device may include a user computer processor of a user device including the screen and/or one or more remote computer processors in communication with the user computer processor. For example, the computer device can be the computer processor of a mobile device, a computer processor of an elastically scalable cloud resource, or a combination thereof.

[0022] Another aspect of the disclosure provides a system that includes one or more computing devices and non-transitory memory in communication with the one or more computing devices. The non-transitory memory stores instructions that, when executed by the one or more computing devices, cause the one or more computing devices to perform operations that include receiving inputs indicative of a user state of each user of a group of users. The inputs include sensor inputs from one or more sensors in communication with the one or more computing devices and/or user inputs received from a graphical user interface displayed on one or more screens in communication with the one or more computing devices. The operations include determining a collective user state for each user based on the received inputs (e.g., inputs of that user and/or inputs associated with other users in the group), determining one or more possible activities for the group of users and one or more predicted outcomes for each activity based on the collective user states, and executing one or more behaviors that evaluate the one or more possible activities and/or the corresponding one or more predicted outcomes. Each behavior models a human behavior and/or a goal oriented task. The operations further include selecting one or more activities based on the evaluations of the one or more possible activities and/or the corresponding one or more predicted outcomes and sending results including the selected one or more activities to the one or more screens for display on the one or more screens.

[0023] In some implementations, the inputs include biometric data of at least one user and environmental data regarding a surrounding of at least one user. The one or more sensors may include at least one of a global positioning system, a temperature sensor, a camera, a three dimensional volumetric point cloud imaging sensor, a fingerprint reader, a blood glucose monitor, a skin PH meter, an inertial measurement unit, a microphone, a blood oxygen meter, a humidistat, or a barometer. Other sensors are possible as well.

[0024] In some implementations, the operations include querying one or more remote data sources in communication with the computing device to identify possible activities and/or predicted outcomes. The operations may include determining, using the computing device, the one or more possible activities and the one or more predicted outcomes for each activity based on one or more preferences of the user. Each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves an Objective of the behavior. Moreover, each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves a user preference stored in non-transitory memory in communication with the computing device. In some examples, a first behavior evaluates an activity or a corresponding outcome based on an evaluation by a second behavior of the activity or the corresponding outcome. Each behavior may elect to participate or not participate in evaluating the one or more activities and/or the one or more predicted outcomes for each activity based on the collective user state.

[0025] When an input is related to a behavior, the operations may include incrementing an influence value associated with the behavior. The input is related to the behavior when the input is of an input type associated with the behavior. In some implementations, the evaluations of each behavior can be weighted based on the influence value of the corresponding behavior. The operations may include decrementing the influence value of each behavior after a threshold period of time. When an influence value equals zero, the operations may include deactivating the corresponding behavior. Any behaviors having an influence value greater than zero may participate in evaluating the activities or the corresponding outcomes; and any behaviors having an influence value equal to zero may not participate in evaluating the activities or the corresponding outcomes.

[0026] In some implementations, the operations include selecting for the results a threshold number of activities having the highest evaluations or a threshold number of activities having corresponding predicted outcomes that have the highest evaluations. The operations may include combining selected activities and sending a combined activity in the results.

[0027] The computing device may include a user computer processor of a user device including the screen and/or one or more remote computer processors in communication with the user computer processor. For example, the computer device can be the computer processor of a mobile device, a computer processor of an elastically scalable cloud resource, or a combination thereof.

[0028] Yet another aspect of the disclosure provides a method that includes receiving, at a computing device, inputs indicative of a user state of a user. The inputs include sensor inputs from one or more sensors in communication with the computing device and/or user inputs received from a graphical user interface displayed on a screen in communication with the computing device. In response to receiving a trigger sensor input, the method includes determining, using the computing device, a collective user state based on the received inputs and determining one or more possible activities for the user and one or more predicted outcomes for each activity based on the collective user state. The method includes executing, at the computing device, one or more behaviors that evaluate the one or more possible activities

and/or the corresponding one or more predicted outcomes. Each behavior models a human behavior and/or a goal oriented task. The method further includes selecting, using the computing device, one or more activities based on the evaluations of the one or more possible activities and/or the corresponding one or more predicted outcomes and sending results including the selected one or more activities from the computing device to the screen for display on the screen.

[0029] Implementations of the disclosure may include one or more of the following optional features. In some implementations, the inputs include biometric data of the user and environmental data regarding a surrounding of the user. The one or more sensors may include at least one of a global positioning system, a temperature sensor, a camera, a three dimensional volumetric point cloud imaging sensor, a fingerprint reader, a blood glucose monitor, a skin PH meter, an inertial measurement unit, a microphone, a blood oxygen meter, a humidistat, or a barometer. Other sensors are possible as well. The trigger sensor input may be from the inertial measurement unit, indicating a threshold amount of shaking of the inertial measurement unit (e.g., indicating that a user is shaking a mobile device).

[0030] In some implementations, the method includes querying one or more remote data sources in communication with the computing device to identify possible activities and/or predicted outcomes. The method may include determining, using the computing device, the one or more possible activities and the one or more predicted outcomes for each activity based on one or more preferences of the user. Each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves an objective of the behavior. Moreover, each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves a user preference stored in non-transitory memory in communication with the computing device. In some examples, a first behavior evaluates an activity or a corresponding outcome based on an evaluation by a second behavior of the activity or the corresponding outcome. Each behavior may elect to participate or not participate in evaluating the one or more activities and/or the one or more predicted outcomes for each activity based on the collective user state.

[0031] When an input is related to a behavior, the method may include incrementing an influence value associated with the behavior. The input is related to the behavior when the input is of an input type associated with the behavior. In some implementations, the evaluations of each behavior can be weighted based on the influence value of the corresponding behavior. The method may include decrementing the influence value of each behavior after a threshold period of time. When an influence value equals zero, the method may include deactivating the corresponding behavior. Any behaviors having an influence value greater than zero may participate in evaluating the activities or the corresponding outcomes; and any behaviors having an influence value equal to zero may not participate in evaluating the activities or the corresponding outcomes.

[0032] In some implementations, the method includes selecting for the results a threshold number of activities having the highest evaluations or a threshold number of activities having corresponding predicted outcomes that have the highest evaluations. The method may include combining selected activities and sending a combined activity in the results. The

results may include one or more activity records, where each activity record includes an activity description and an activity location. The method may include displaying on the screen a map, and for each activity record, displaying the activity location on the map and the activity description.

[0033] The computing device may include a user computer processor of a user device including the screen and/or one or more remote computer processors in communication with the user computer processor. For example, the computer device can be the computer processor of a mobile device, a computer processor of an elastically scalable cloud resource, or a combination thereof.

[0034] Another aspect of the disclosure provides a system that includes one or more computing devices and non-transitory memory in communication with the one or more computing devices. The non-transitory memory stores instructions that, when executed by the one or more computing devices, cause the one or more computing devices to perform operations that include receiving inputs indicative of a user state of a user. The inputs include sensor inputs from one or more sensors in communication with the one or more computing devices and/or user inputs received from a graphical user interface displayed on a screen in communication with the one or more computing devices. In response to receiving a trigger sensor input, the operations include determining a collective user state based on the received inputs, determining one or more possible activities for the user and one or more predicted outcomes for each activity based on the collective user state, and executing one or more behaviors that evaluate the one or more possible activities and/or the corresponding one or more predicted outcomes. Each behavior models a human behavior and/or a goal oriented task. The operations further include selecting one or more activities based on the evaluations of the one or more possible activities and/or the corresponding one or more predicted outcomes and sending results including the selected one or more activities to the screen for display on the screen.

[0035] In some implementations, the inputs include biometric data of the user and environmental data regarding a surrounding of the user. The one or more sensors may include at least one of a global positioning system, a temperature sensor, a camera, a three dimensional volumetric point cloud imaging sensor, a fingerprint reader, a blood glucose monitor, a skin PH meter, an inertial measurement unit, a microphone, a blood oxygen meter, a humidistat, or a barometer. Other sensors are possible as well. The trigger sensor input may be from the inertial measurement unit, indicating a threshold amount of shaking of the inertial measurement unit (e.g., indicating that a user is shaking a mobile device).

[0036] In some implementations, the operations include querying one or more remote data sources in communication with the computing device to identify possible activities and/or predicted outcomes. The operations may include determining, using the computing device, the one or more possible activities and the one or more predicted outcomes for each activity based on one or more preferences of the user. Each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves an objective of the behavior.

[0037] Moreover, each behavior may evaluate an activity or a corresponding outcome positively when the activity or the corresponding outcome at least partially achieves a user preference stored in non-transitory memory in communication with the computing device. In some examples, a first behavior

evaluates an activity or a corresponding outcome based on an evaluation by a second behavior of the activity or the corresponding outcome. Each behavior may elect to participate or not participate in evaluating the one or more activities and/or the one or more predicted outcomes for each activity based on the collective user state.

[0038] When an input is related to a behavior, the operations may include incrementing an influence value associated with the behavior. The input is related to the behavior when the input is of an input type associated with the behavior. In some implementations, the evaluations of each behavior can be weighted based on the influence value of the corresponding behavior. The operations may include decrementing the influence value of each behavior after a threshold period of time. When an influence value equals zero, the operations may include deactivating the corresponding behavior. Any behaviors having an influence value greater than zero may participate in evaluating the activities or the corresponding outcomes; and any behaviors having an influence value equal to zero may not participate in evaluating the activities or the correspond outcomes.

[0039] In some implementations, the operations include selecting for the results a threshold number of activities having the highest evaluations or a threshold number of activities having corresponding predicted outcomes that have the highest evaluations. The operations may include combining selected activities and sending a combined activity in the results. The results may include one or more activity records, where each activity record includes an activity description and an activity location. The method may include displaying on the screen a map, and for each activity record, displaying the activity location on the map and the activity description.

[0040] The computing device may include a user computer processor of a user device including the screen and/or one or more remote computer processors in communication with the user computer processor. For example, the computer device can be the computer processor of a mobile device, a computer processor of an elastically scalable cloud resource, or a combination thereof.

[0041] The details of one or more implementations of the disclosure are set forth in the accompanying drawings and the description below. Other aspects, features, and advantages will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

[0042] FIG. 1A is a schematic view of an example environment including a user device in communication with a search system.

[0043] FIG. 1B is a schematic view of an example environment including a user device in communication with a search system and data sources.

[0044] FIG. 2A is a schematic view of an example user device having one or more sensors.

[0045] FIG. 2B is a schematic view of an example user device in communication with a search system.

[0046] FIG. 3 is a schematic view of an example search system.

[0047] FIG. 4A is a schematic view of an example state analyzer receiving inputs from various sources.

[0048] FIG. 4B is a schematic view of an example user device displaying an example state acquisition view having multiple images grouped by categories for selection by the user.

[0049] FIG. 4C is a schematic view of an example user device displaying an example state acquisition view having two images and allowing the user to select one of the images.

[0050] FIG. 4D is a schematic view of an example user device displaying an example state acquisition view having menus and allowing the user to select one or more user state indicators.

[0051] FIG. 4E is a schematic view of an example user device displaying an example user preferences view.

[0052] FIGS. 5A and 5B are schematic views of an example activity system that generates possible activities and optionally predicted outcomes of those activities.

[0053] FIG. 6A is a schematic view of an example behavior system that evaluates activities and optionally predicted outcomes of those activities.

[0054] FIG. 6B is a schematic view of an example behavior system having several behaviors.

[0055] FIG. 6C is a schematic view of an example behavior system interacting with the activity system and an activity selector.

[0056] FIG. 7 is a schematic view of an example activity selector.

[0057] FIG. 8A is a schematic view of an example user device being shaken to initiate retrieval of a suggest activity for the user.

[0058] FIG. 8B is a schematic view of an example user device displaying an example result view having a map.

[0059] FIG. 8C is a schematic view of an example user device displaying an example result view having a tree-grid view.

[0060] FIG. 8D is a schematic view of an example user device displaying an example result view having a select-a-door view.

[0061] FIG. 8E is a schematic view of an example user device displaying an example result view having a spin-the-wheel view.

[0062] FIG. 9 is a schematic view of an exemplary arrangement of operations for suggesting an activity to one or more users.

[0063] FIG. 10 is schematic view of an example computing device that may be used to implement the systems and methods described in this document.

[0064] Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0065] FIG. 1A illustrates an example system 100 that includes a user device 200 associated with a user 10 in communication with a remote system 110 via a network 120. The remote system 110 may be a distributed system (e.g., cloud environment) having scalable/elastic computing resources 112 and/or storage resources 114. The user device 200 and/or the remote system 110 may execute a search system 300 and optionally receive data from one or more data sources 130. In some implementations, the search system 300 communicates with one or more user devices 200 and the data source(s) 130 via the network 120. The network 120 may include various types of networks, such as a local area network (LAN), wide area network (WAN), and/or the Internet.

[0066] Referring to FIG. 19, in some implementations, user devices 200 communicate with the search system 300 via the network 120 or a partner computing system 122. The partner computing system 122 may be a computing system of a third party that may leverage the search functionality of the search

system 300. The partner computing system 122 may belong to a company or organization other than that which operates the search system 300. Example third parties which may leverage the functionality of the search system 300 may include, but are not limited to, internet search providers and wireless communications service providers. The user devices 200 may send search requests 220 to the search system 300 and receive search results 230 via the partner computing system 122. The partner computing system 122 may provide a user interface to the user devices 200 in some examples and/or modify the search experience provided on the user devices 200.

[0067] The search system 300 may use (e.g., query) the data sources 130 when generating search results 230. Data retrieved from the data sources 130 can include any type of data related to assessing a current state of the user 10. Moreover, the data retrieved from the data sources 130 may be used to create and/or update one or more databases, indices, tables (e.g., an access table), files, or other data structures of the search system 300.

[0068] The data sources 130 may include a variety of different data providers. The data sources 130 may include application developers 130a, such as application developers' websites and data feeds provided by developers and operators of digital distribution platforms 130b configured to distribute content to user devices 200. Example digital distribution platforms 130b include, but are not limited to, the GOOGLE PLAY® digital distribution platform by Google, Inc., the APP STORE® digital distribution platform by Apple, Inc., and WINDOWS PHONE® Store developed by Microsoft Corporation.

[0069] The data sources 130 may also include websites, such as websites that include web logs 130c (i.e., blogs), review websites 130d, or other websites including data related to assessing a state of the user 10. Additionally, the data sources 130 may include social networking sites 130e, such as "FACEBOOK®" by Facebook, Inc. (e.g., Facebook posts) and "TWITTER®" by Twitter Inc. (e.g., text from tweets). Data sources 130 may also include online databases 130f that include, but are not limited to, data related to movies, television programs, music, and restaurants. Data sources 130 may also include additional types of data sources in addition to the data sources described above. Different data sources 130 may have their own content and update rate.

[0070] FIG. 2A illustrates an example user device 200 including a computing device 202 (e.g., a computer processor or data processing hardware) and memory hardware 204 (e.g., non-transitory memory) in communication with the computing device 202. The memory hardware 204 may store instructions for one or more software applications 206 that can be executed on the computing device 202. A software application 206 may refer to computer software that, when executed by the computing device 202, causes the computing device 202 to perform a task or operation. In some examples, a software application 206 may be referred to as an "application", an "app", or a "program". When the computing device 202 executes a software application 206, the software application 206 may cause the computing device 202 to control the user device 200 to effectuate functionality of the software application 206. Therefore, the software application 206 transforms the user device 200 into a special purpose device that carries out functionality instructed by the software application 206, functionality not otherwise available to a user 10 without the software application 206. Example software

applications 206 include, but are not limited to, an operating system 206a, a search application 206b, word processing applications, spreadsheet applications, messaging applications, media streaming applications, social networking applications, and games. Applications 206 can be executed on a variety of different user devices 200. In some examples, applications 206 are installed on a user device 200 prior to a user 10 purchasing the user device 200. In other examples, the user downloads and installs applications 206 on the user device 200.

[0071] User devices 200 can be any computing devices capable of communicating with the search system 300. User devices 200 include, but are not limited to, mobile computing devices, such as laptops, tablets, smart phones, and wearable computing devices (e.g., headsets and/or watches). User devices 200 may also include other computing devices having other form factors, such as desktop computers, vehicles, gaming devices, televisions, or other appliances (e.g., networked home automation devices and home appliances).

[0072] The user device 200 may use any of a variety of different operating systems 206a. In examples where a user device 200 is a mobile device, the user device 200 may run an operating system including, but not limited to, ANDROID® developed by Google Inc., IOS® developed by Apple Inc., or WINDOWS PHONE® developed by Microsoft Corporation. Accordingly, the operating system 206a running on the user device 200 may include, but is not limited to, one of ANDROID®, IOS®, or WINDOWS PHONE®. In an example where a user device is a laptop or desktop computing device, the user device may run an operating system including, but not limited to, MICROSOFT WINDOWS® by Microsoft Corporation, MAC OS® by Apple, Inc., or Linux. User devices 200 may also access the search system 300 while running operating systems 206a other than those operating systems 206a described above, whether presently available or developed in the future.

[0073] In some implementations, a user device 200 includes one or more sensors 208 in communication with the computing device 202 and capable of measuring a quality, such as a biometric quality, of the user 10. The sensor(s) 208 may be part of the user device 200 (e.g., integrally attached) and/or external from (e.g., separate and remote from, but in communication with) the user device 200. Sensors 208 separate and remote from the user device may communicate with the user device 200 through the network 120, wireless communication, such as Bluetooth or Wi-Fi, wired communication, or some other form of communication. The computing device 202 receives biometric data 212 (e.g., sensor signals or bioinformatics) and/or environmental data 214 (e.g., sensor signals, data structures, data objects, etc.) from one or more sensors 208. Examples of biometric data 212 may include, but are not limited to, a temperature of the user 10, an image (e.g., 2D image, 3D image, infrared image, etc.) of the user 10, a fingerprint of the user 10, a sound of the user 10, a blood oxygen concentration of the user 10, a blood glucose level of the user 10, a skin PH of the user 10, a blood alcohol level of the user 10, an activity level of the user 10 (e.g., walking step count or other movement indicator), a wake-up time of the user 10, asleep time of the user 10, eating times, eating duration, eating type (e.g., meal vs. snack), etc. Examples of environmental data 214 may include, but are not limited to, a geolocation of the user device 200, a temperature, humidity, and/or barometric pressure about the user device 200, a weather forecast for a location of the user device 200, an

image (e.g., 2D image, 3D image, infrared image, etc.) of a surrounding of the user device 200, a sound about the user 10, etc.

[0074] Example sensors 208 that may be included with the user device 200 include, but are not limited to, a camera 208a (e.g., digital camera, video recorder, infrared imaging sensor, 3D volumetric point cloud imaging sensor, stereo imaging sensor, etc.), a microphone 208b, geolocation device 208c, an inertial measurement unit (IMU) 208d (e.g., 3-axis accelerometer), a fingerprint reader 208e, a blood oxygen meter 208f, a PH meter 208g, etc. The camera 208a may capture image data indicative of an appearance of the user 10 and/or an environment or scene about the user 10. The microphone 208b may sense audio of the user 10 and/or an environment or scene about the user 10. Example sensors 208 that may be separate from the user device 200 include a camera 208a, a temperature sensor 208h, a humidistat 208i, a barometer 208j, or any sensing device 208n capable of delivering a signal to the user device 200 that is indicative of the user 10, a surrounding of the user 10, or something that can affect the user 10.

[0075] If the user device 200 does not include a geolocation device 208c, the user device 200 may provide location data as an input 210 in the form of an internet protocol (IP) address, which the search system 300 may use to determine a location of the user device 200. Any of the sensors 208 described as being included in the user device 200 may be separate from the user device 200, and any of the sensors 208 described as being separate from the user device 200 may be included with the user device 200.

[0076] FIG. 2B illustrates an example user device 200 in communication with the search system 300. In general, the user device 200 may communicate with the search system 300 using any software application 206 that can transmit a search request 220 to the search system 300 and receive search results 230 therefrom for display on a display 240 (e.g., screen or touch screen) in communication with the computing device 202 of the user device 200. In some examples, the user device 200 runs a native application 206 dedicated to interfacing with the search system 300; while in other examples, the user device 200 communicates with the search system 300 using a general application 206, such as a web-browser application 206 accessed using a web browser.

[0077] In some implementations, the search application 206b receives one or more inputs 210, such as biometric data 212 or environmental data 214 from the sensor(s) 208 and/or the user 10 via a graphical user interface (GUI) 250 and transmits a search request 220 based on the received inputs 210 to the search system 300. The search application 206b may also receive platform data 218 from the user device 200 (e.g., version of the operating system 206a, device type, and web-browser version), an identity of the user 10 of the user device 200 (e.g., a username), partner specific data, and/or other data and include that information in the search request 220 as well. The search application 206b receives a search result set 230 from the search system 300, in response to submitting the search request 220, and optionally displays one or more result records 232 of the search results set 230 on the display 240 of the user device 200. In some implementations, the search request 220 includes a search query 222 containing a user specified selection a category, genre, or string). The search application 206b may display a graphical user interface (GUI) 250 on the display 240 that may provide

a structured environment to receive inputs 210 and display the search results 230, 232. In some implementations, the search application 206b is a client-side application and the search system 300 executes on the remote system 110 as a server-side system.

[0078] FIG. 3 illustrates a function block diagram of the search system 300. The search system 300 includes a state analyzer 400 in communication with an activity system 500, which is in communication with a behavior system 600. The behavior system 600 is in communication with an activity selector 700. Each sub-system 400, 500, 600, 700 of the search system 300 can be in communication with each other. The state analyzer 400 receives one or more inputs 210 (also referred to as user state indicators) that are indicative of a state of the user 10 and determines a collective state 420 of the user 10 (referred to as the collective user state 420). The activity system 500 receives the inputs/user state indicators 210 and/or the collective user state 420 from the state analyzer 400 and determines a collection 520 of possible activities A, A₁-A_n and corresponding outcomes O, O₁-O_n for the user 10 (referred to as an activity-outcome set 520). In some examples, the activity system 500 receives the inputs 210 directly from the user device 200. Moreover, the activity system 500 may receive the inputs 210 from the user device 200 instead of the collective user state 420 from the state analyzer 400 or just the collective user state 420 from the state analyzer 400 and not the inputs 210 from the user device 200. The behavior system 600 receives the activity-outcome set 520 from the state analyzer 400, evaluates each activity A based on its corresponding predicted outcome O, and provides a collection 620 of evaluated activities A, A₁-A_n and optionally corresponding outcomes O, O₁-O_n (referred to as an evaluated activity-outcome set 620). The activity selector 700 receives the evaluated activity-outcome set 620 from the behavior system 600 and determines a collection 720 of one or more selected activities A, A₁-A_j (referred to as a selected activity set 720).

[0079] Referring to FIG. 4A, in some implementations, the state analyzer 400 receives one or more inputs/indicators 210 of the state of the user 10 (e.g., physical and/or emotional state) and determines the collective user state 420 of the user 10. The state analyzer 400 may combine the received user state indicators 210 to generate the collective user state 420. In additional implementations, the state analyzer 400 executes an algorithm on the received user state indicators 210 to generate the collective user state 420. The algorithm may logically group user state indicators 210 and select one or more groups of user state indicators 210 to generate the collective user state 420. Moreover, the state analyzer 400 may exclude user state indicators 210 logically opposed to other, more dominant user state indicators 210. For example, the state analyzer 400 may form a group of user state indicators 210 indicative of an emotional state of happiness and another on a state of hunger. For example, if the state analyzer 400 receives several user state indicators 210 (e.g., a majority) indicative of happiness and only a few or one (e.g., a minority) user state indicator 210 indicative of sadness, the state analyzer 400 may form a group of user state indicators 210 indicative of an emotional state of happiness, while excluding the minority user state indicators 210 indicative of an emotional state of sadness (since they're diametrically opposed).

[0080] In some implementations, the state analyzer 400 models the user 10 using the received user state indicator(s) 210 to generate the collective user state 420. Each received user state indicator 210 provides an aspect of the modeled

user **10** as the collective user state **420**. The state analyzer **400** may store the collective user state **420** in memory, such as the storage resources **11.4** of the remote system **110**. In some examples, the state analyzer **400** generates and/or stores the collective user state **420** as an object, such as a Java script object notation (JSON) object, a metadata data object, structured data, or unstructured data. Other methods of storing the collective user state **420** are possible as well.

[0081] The input/user state indicator **210** may include any information indicative of the user's state of being, in terms of a physical state of being and/or an emotional state of being. Optional examples of a physical state may include, but are not limited to, date and/or time stamp **210a** (e.g., from the computing device **202** of the user device **200**), a location **210b** of the user **10**, a user-identified state indicator **210c** of a physical well-being of the user **10**, and a sensed indicator **210d** of a physical well-being of the user **10** (e.g., biometrics). The location **210b** of the user **10** may be a geolocation (e.g., latitude and longitude coordinates) of the user device **200**, a description of the physical location of the user **10** in terms of landmarks and/or environmental descriptions, a description of a dwelling or building, a floor of the dwelling or building, a room of the dwelling or building, an altitude, etc. Examples of emotional states include, but are not limited to, user-identified state indicators **210c** of an emotional state of the user **10** and sensed indicators **210d** of a physical well-being of the user **10** (e.g., biometrics).

[0082] In some examples, the state analyzer **400** receives image inputs **210** of the user **10** from the camera **208a** and determines an emotional state of the user **10** based on the images **210** (and optionally other inputs **210**). The state analyzer **400** can gauge whether the user **10** is angry, happy, sad, surprised, eating, moving, etc. based on the image inputs **210**. The image inputs **210** may be considered as user-identified state indicators **210c** and/or sensed indicators **210d**.

[0083] The user device **200** may receive the user-identified state indicator **210c** from the user **10** through the GUI **250**. The user-identified state indicator **210c** may include one or more selections of images and/or description indicative of different states of physical or emotional well-being or states of the user **10**. In some examples, the user **10** can select one or more user-identified state indicators **210c** on the GUI **250** that correspond to a combination of different user state indicators **210**. The search application **206b** may execute logic that disallows inconsistent selections. For example, the search application **206b** may not allow the user **10** to select user-identified state indicators **210c** of happy and sad at the same time.

[0084] The user state indicator **210** may optionally include user state indicators **210** of friends (referred to as friend state indicator **210e**) from the remote system **110** or a data source. The friend state indicator **210e** may be from any person having an identified association with the user **10**. The user **10** may designate the associations of other people with their account and/or the state analyzer **400** may identify and designate other people as having an association with the user **10** based on the user state indicator **210** of other users **10** and/or authorized searching of email account(s), social networking account(s), or other online resources of the user **10**.

[0085] The user state indicator **210** may optionally include a partner metric **210f** (e.g., available funds from a banking institution) received from the user device **200** (e.g., as a user input) and/or from a remote data source **130** (e.g., a linked hack account). The partner entities may be data sources **130**

that provide information relative the user's state. For example, a mobile payment plan can provide mobile payment information, such as a purchase time, purchase location, store entity, goods purchased, purchase amount, and/or other information, which the search system **300** can use to determine the user collective state **420**. Moreover, the activity system **500** may use partner metrics **210f** to suggest activities **A** and predict outcomes **O**, the behavior system **600** may use partner metrics **210f** to evaluate the activities **A** and predicted outcomes **O**, and the activity selector **700** may use partner metrics **210f** to select one or more activities **A**.

[0086] Similarly, the user state indicator **210** may optionally include a user schedule **210g** received from the user device **200** (e.g., as a user input) and/or from a remote data source **130** (e.g., a linked scheduler or partner system **122**). The schedule may be related to eating, exercise, work, to-do list, etc.

[0087] Referring to FIGS. 4B-4C, in some implementations, the search application **206b** displays a state acquisition view **260** having a collection **270** of images **272**, **272a-n** (e.g., a tiling of pictures) in the GUI **250** and prompts the user **10** to select the image **272** most indicative of a current state of the user **10** (e.g., a user state indicator **210**). The images **272** may depict a variety of possible user states, such as happy or sad, hungry or full, energetic or lethargic, etc. The selected image **272** may be a user state indicator **210**. Additionally or alternatively, the GUI **250** may display one or more images **272**, **272a-n** and prompts the user **10** to tag the images **272**, **272a-n** with a corresponding user state. As the user **10** tags the images **272**, **272a-n**, the search system **300** learns the user's preferences and/or state.

[0088] In the example shown in FIG. 4B, the search application **206b** may group the images **272** (e.g., by a category) into one or more groups **274**, **274a-n** and display the one or more groups **274**, **274a-n** in the GUI **250**. The user **10** may scroll through the images **272** in each group **274** and select an image **272** most indicative of a current state of the user **10**. For example, the search application **206b** may display each group **274** of images **272** as a linear or curved progression (e.g., a dial), such that the user **10** can swipe across the screen **240** to move the linear progression or rotate the curve progression of images **272** onto and off the screen **240**. The user **10** may scroll through each group **274**, **274a-n** of images **272**, **272a-n** and position a selected image **272** in a selection area **266** (e.g., selection box). The search application **206b** may alter the selected image **272** or otherwise designate the selected image **272** as being selected. For example, the search application **206b** may change the image **272** into another related image **272** or animate the image **272** (e.g., video). The search application **206b** may highlight the selected image **272** or provide a visual or audio cue of the selection. In some examples, the search application **206b** displays a gauge **268** indicating a level of discernment of the user's current state based on the number and/or type of images **272**, **272a-n** currently selected in the collection **270** of images **272**, **272a-n**. The search application **206b** may indicate a threshold number of images **272**, **272a-n** that the user **10** should select before proceeding to obtain a suggested activity **A**.

[0089] In the example shown in FIG. 4C, the search application **206b** may display a state acquisition view **260** having first and second images **272a**, **272b** in the GUI **250** and prompt the user **10** to select the image **272** most indicative of a current state of the user **10** (e.g., a user state indicator **210**). When the user **10** selects one of the images **272a**, **272b**, the

search application 206b may display two more images 272 in the GUI 250 and prompt the user 10 to select the image 272 most indicative of his/her current state, and continue recursively for a threshold period of time or until the user 10 selects a threshold number of images 272. The search application 206b may display a gauge 268 indicating a level of discernment of the user's current state based on the number and/or type of images 272, 272a-n selected. Moreover, the search application 206b may, in some instances, not allow the user 10 to proceed to receive a suggested activity A until the search application 206b and/or the search system 300 has ascertained a threshold level of discernment of the user's current state based on the number and/or type of images 272, 272a-n selected. For example, the search application 206b may display a first image 272a showing a person eating to illustrate a hungry state and a second image 272b showing a person full with a finished dinner plate to illustrate a full or not hungry state. In other examples, the search application 206b may display a first image 272a showing a person running to illustrate an inkling to go running and a second image 272b showing a person sitting or resting to illustrate an inkling to sit and rest. The user 10 may continue to select one of two images 272 until the gauge 268 indicates a threshold level of discernment of the user's current state or until the user 10 selects a query element 252 displayed in the GUI 250, at which point the search application 206b sends the query request 220 to the search system 300 to receive search result(s) 230 for display in the GUI 250.

[0090] Referring to FIG. 4D, in some implementations, the search application 206b displays a state acquisition view 260 having one or more menus 280 (e.g., categories of user state indicators 210). Each menu 280 may have one or more sub-menus 282 that further group or categorize user state indicators 210. The user 10 may swipe across the screen 240 of the user device 200 in a non-linear path 286 (e.g., step like fashion) to navigation the menus 282, 284 to select a user state indicator 210 most indicative of the user's current state. The user 10 may continue to navigate the menus 282, 284 to select user state indicators 210 until the gauge 268 indicates a threshold level of discernment of the user's current state or until the user 10 selects the query element 252 displayed in the GUI 250, at which point the search application 206b sends the query request 220 to the search system 300 to receive search result(s) 230 for display in the GUI 250.

[0091] Referring to FIG. 4E, in some implementations, the search application 206b displays a preferences view 290 that allows the user 10 to set and modify user preferences P_1-P_n . The search system 300 may use the user preferences P_1-P_n for generating search results 230. For example, the activity system 500 may use the user preferences P_1-P_n for identifying possible activities A. Moreover, the behavior system 600 may use the user preferences P_1-P_n for evaluating the possible activities A (and optionally any corresponding predicted outcomes O). When the user 10 selects a preference P_1-P_n , the search application 206b may display an edit preference view 292 that allows the user 10 to modify the selected preference P_1-P_n . In the example shown, when the user 10 selects a second preference P_2 , corresponding to a sports preference, the search application 206b may display an edit preference view 292 customized to allow the user 10 to modify the selected preference P_1-P_n . Example preferences may include, but are not limited to, preferred eating times, eating duration, dining preferences (e.g., food types, restaurants, restaurant types, eating locations), leisure activities, cinema prefer-

ences, theaters, theater show types, to-do lists, sports activities, shopping preferences (e.g., stores, clothing types, price ranges), allowable purchase ranges for different types of goods or services, disposable income, personality type, etc. In some implementations, the user 10 may select an auto-populate preferences icon 294 to cause the search application 206b and/or the search system 300 to populate the preferences P_1-P_n based on previous inputs 210 and/or selected activities A of the user 10 (e.g., stored in non-transitory memory 114). After auto-populating the preferences P_1-P_n , the user 10 may further customize the preferences P_1-P_n using the preferences view 290.

[0092] Referring to FIG. 5A, in some implementations, the activity system 500 receives the collective user state 420 from the state analyzer 400, applies the collective user state 420 to an activity model 510 and determines the collection 520 of possible activities A, A_1-A_n , and corresponding outcomes O, O_1-O_n for the user 10 (i.e., the activity-outcome set 520). The activity system 500 may use a user profile 14 of the user 10 to determine the activity-outcome set 520. A data source 130 (e.g., data store, non-transitory memory, a database, etc) in communication with the activity system 500 may store the user profile 14, possible activities A, and/or possible outcomes O. For example, the activity system 500 may identify one or more preferences P_1-P_n of the user 10 from the user profile 14 for use with the activity model 510 to determine the activity-outcome set 520. The activity system 500 may optionally query one or more data sources 130 or the storage resources 114 of the remote system 110 for data on possible activities A and/or corresponding outcomes O. In some examples, the activity system 500 simulates each activity A, using the activity model 510, over a time horizon in the future to predict a corresponding outcome O, optionally using results 534 queried from the data source(s) 130.

[0093] Referring also to FIG. 5B, in some implementations, the activity system 500 includes an activity generator 530 that generates possible activities A based on the received inputs 210 (and/or collective user state 420) and an outcome generator 540 that generates the set 520 of possible outcomes O for each activity A. The activity generator 530 may generate an activity search query 532 based on the inputs 210 and a type 216 of each input 210 and query the data source(s) 130 to obtain results 534, which the activity generator 530 can use to determine one or more possible activities A. For example, an input 210 may be a global positioning system (GPS) coordinate having an input type 216 of location. The input type 216 may be strongly typed to accept coordinate values as the corresponding input 210. An activity search query 532 may include criteria to seek possible activities A within a threshold distance of the location. Moreover, the threshold distance may be based on the location.

[0094] In some implementations, the activity generator 530 seeks activities A relevant to active behaviors 610. The activity generator 530 may identify all or a sub-set of the active behaviors 610 and then seek activities A that each behavior 610 can evaluate positively. For example, if a sports behavior 610e is active, then the activity generator 530 may seek possible activities A related to sports.

[0095] After the activity generator 530 generates a collection of possible activities A, the outcome generator 540 generates a collection of one or more predicted outcomes O for each activity A. In some implementations, the outcome generator 540 retrieves possible outcomes O from a data store storing outcomes O for various activities A. For example, the

outcome generator **540** may query the data source(s) **130** for possible outcomes *O* matching a criteria indicative of the activity *A*. The data source(s) **130** may include databases, partner systems **122**, and other sources of information.

[0096] Referring to FIGS. 6A-6C, in some implementations, the behavior system **600** receives the activity-outcome set **520** from the activity system **500**, evaluates each activity *A* based on its corresponding predicted outcome *O*, and provides the collection **620** of evaluated activities *A* and outcomes *O* (i.e., the evaluated activity-outcome set **620**). The behavior system **600** includes behaviors **610** that provide predictive modeling of the user **10** and allows the behaviors **610** to collaboratively decide on the activities *A* by evaluating the activities *A* and/or the corresponding possible outcomes *O* of activities *A*. A behavior **610** may use the inputs **210**, the collective user state **420**, the preferences *P*, *P*₁-*P*_{*n*}, in the user profile **14** of the user **10**, any additional sensory feedback of the user **10**, and/or any relevant information from data sources **130** to evaluate each activity *A* and/or its predicted outcome (s) *O*, and therefore provide evaluation feedback on the allowable activities *A* of the user **10**. The behaviors **610** may be pluggable into the behavior system **600** (e.g., residing inside or outside of a software application), such that they can be added and removed without having to modify the behavior system **600**. Each behavior **610** is a standalone policy. To make behaviors **610** more powerful, it is possible to attach the output of one or more behaviors **610** together into the input of another behavior **610**.

[0097] A behavior **610** may model a human behavior and/or a goal oriented task. Example behaviors **610** include, but are not limited to, an eating behavior **610a**, a happiness behavior **610b** (e.g., a pursuit of happiness), a retail shopping behavior **610c**, a grocery shopping behavior **610d**, a sports behavior **610e**, a love behavior **610f**, a work behavior **610g**, a leisure behavior **610h**, etc.

[0098] Behaviors **610** may model psychological decision making of humans. Moreover, the behaviors **610** may be configurable. In some examples, the user **10** may set a preference *P* to configure or bias one or more behaviors **610** to evaluate activities *A* and/or outcomes *O* toward that bias. In some examples, the user **10** can set a preference *P* to have the search system **300** aid the user **10** in making better choices (e.g., choices toward a healthier lifestyle). For example, the user **10** may set a preference *P* to bias one or more behaviors **610** to evaluate activities *A* and/or outcomes *O* that help the user **10** live a healthier lifestyle (e.g., in terms of diet, exercise, relationships, work, etc.).

[0099] A behavior **610** may have one or more objectives that it uses when evaluating activities *A* and/or outcomes *O*. The behavior **610** may execute a scoring algorithm or model that evaluates outcomes *O* against the one or more objectives. The behavior **610** may score outcomes *O* fulfilling the objective(s) higher than other outcomes *O* that do not fulfill the objective(s). Moreover, the outcome evaluation may be weighted. For example, an eating behavior **610a** may evaluate an activity *A* based on whether the predicted outcome *O* will make the user **10** less hungry. Moreover, the outcome evaluation may be weighted based on a user state of hunger and on the likelihood of fulfilling the Objective of making the user **10** less hungry. For example, the eating behavior **610a** may evaluate a first activity *A*₁ of going to a restaurant to eat pizza more favorably than a second activity *A*₂ of going to the cinema, because a predicted first outcome *O*₁ of going to a restaurant to eat pizza will more likely have an outcome *O* of satisfying a

user state of hunger than going to the cinema, even though a predicted second outcome *O*₂ for the second activity *A*₂ of going to the cinema may include eating popcorn.

[0100] A behavior **610** may optionally base its evaluations *E* on preferences *P*, *P*₁-*P*_{*n*}, in the user profile **14** of the user **10**. For example, the eating behavior **610a** may evaluate a third activity *A*₃ of going to LOU MALNATIS® (a registered trademark of Lou Malnatis, Inc.) to eat pizza more favorably than the first activity *A*₁ of going to PIZZA HUT® (a registered trademark of Pizza Hut, Inc.) to eat pizza, when a first preference *P*₁ in the user profile **14** indicates that LOU MALNATIS pizza is the user's favorite brand of pizza. Therefore, a behavior **610** may use the one or more objectives of that behavior **610** in combination with one or more preferences *P*, *P*₁-*P*_{*n*}, of the user profile **14** of the user **10** to evaluate activities *A* and/or outcomes *O* of those activities *A*.

[0101] The activity-outcome evaluation *E* of one behavior **610** may be used by another behavior **610** when evaluating the corresponding activity *A* and/or outcome *O*. For example, a happiness behavior **610b** may evaluate the third activity *A*₃ of going to eat LOU MALNATIS pizza more favorably based the favorable evaluation of the eating behavior **610a** and on the corresponding predicted outcome *O*₃ that eating pizza will make the user **10** more happy (e.g., versus sad). Moreover, the collective user state **420** may indicate that the user **10** is cold, based on sensor data **212** of a sensor **208**, and the happiness behavior **610b** may evaluate the third activity *A*₃ of going to eat LOU MALNATIS pizza even more favorably based on the predicted outcome *O*₃ that eating pizza will make the user **10** warmer and therefore happier. Therefore, the behavior system **600** may execute many combinations of evaluations by behaviors **610** (some in parallel or some in series) based on prior evaluations, preferences *P*, etc.

[0102] Based on internal policy or external input (e.g., the collective user state **420** or other information), each behavior **610** may optionally decide whether or not it wants to participate in evaluating any activities *A* in the activity-outcome set **520**. In some examples, if the collective user state **420** indicates that the user **10** is full (i.e., not hungry), the eating behavior **610a** may opt out of evaluating the activities *A* and outcomes *O*. In other examples, if the collective user state **420** indicates that the user **10** is full (i.e., not hungry), the eating behavior **610a** may evaluate activities *A* having predicted outcomes *O* of making the user **10** more full as undesirable (e.g., a poor evaluation or a low score).

[0103] Different inputs/user state indicators **210** can trigger different behaviors **610**, **610a-n**. A behavior **610** may persist for a duration of time. In some examples, a behavior **610** has a state **612** and exists in an active state or an inactive state. Certain types of inputs **210** may pertain to certain types of behaviors **610**. One or more input types/user state indicator types **216** may be associated with each behavior **610**. In other words, each behavior **610** may have an associated collection of input types **216** that the behavior **610** finds pertinent to its operation. For example, an input type **216** of hunger level for a user-defined input **210** of hunger having a scale (e.g. 1-10) indicating a level of hunger can be related to an eating behavior **610a**. Another input type **216** that may be associated with the eating behavior **610a** is proximity (which may be strongly typed as a distance in miles) for an input **210** of distance to a nearest restaurant. When the search system **300** (e.g., in particular, the behavior system **600**) receives an input **210** of a type **216** associated with a behavior **610**, the receipt of that input **210** may trigger activation of the behavior **610**. The

receipt of the input **210** may cause a behavior **610** to change state **612** from an inactive state to an active state.

[0104] In addition to becoming active, upon the receipt of one or more inputs **210** having a type **216** associated with the behavior **610**, the number of those inputs **210**, in some implementations, has a direct correlation to an influence of the behavior **610**. In other words, the greater the number of received inputs **210** having a type **216** associated with the behavior **610**, the greater the influence *I* of that behavior **610**. Evaluations of predicted outcomes *O* of a behavior **610** may be weighted based on the influence *I* of the behavior **610**. For example, the evaluation *E* can be a number, which is multiplied by the influence *I* (e.g., a number). As a result, behaviors **610** with greater influence have a relatively greater influence on the selection of an activity *A*.

[0105] In some implementations, the influence *I* is a count. Each time the behavior system **600** receives an input **210**, the behavior system **600** increments a value of the influence *I* of each behavior **610** that has associated therewith the input type **216** of the received input **210**. The behavior system **600** may include an input type filter **602** that receives the inputs **210** identifies which behaviors **610**, if any, are associated with the input type **216** of the input **210** and increment the influence *I* of the affected behavior(s) **610**.

[0106] In some implementations, each behavior **610** has an associated duration *D*. Receipt of an input **210** having a type **216** associated with the behavior **610** commences an input timer **614** set for a duration of time associated with the input **210** or the input type **216**. When the input timer **614** expires, the behavior system **600** decrements the influence *I* of the behavior **610** (which was previously incremented for that input **210**). Alternatively or additionally, the behavior system **600** may decrement the influence *I* of each behavior **610** every threshold period of time. When the influence *I* of a behavior **610** is zero, the behavior **610** changes state **612** from the active state to the inactive state. If the behavior system **600** receives an input **210** having an input type **216** associated with an inactive behavior **610**, the behavior system **600** increments the influence *I* of that behavior **610**, causing the behavior **610** to have an influence *I* greater than zero, which causes the behavior **610** to change state **612** from the inactive state to the active state. Once in the active state, the behavior **610** can participate in evaluating predicted outcomes *O* of activities *A* and/or the activities *A* themselves.

[0107] Behaviors **610** may evaluate activities *A* and/or predicted outcomes *O* of activities *A*. By evaluating both an activity *A* and the predicted outcomes *O* of the activity *A*, the behavior **610** offers a multi-pronged evaluation *E*. For example, while the behavior **610** may positively evaluate an activity *A*, it may negatively evaluate one or more of the predicted outcomes *O* of that activity *A*. As an illustrative example, if the behavior system **600** receives inputs **210** indicating that the user **10** is outdoors and on a street, then a sports behavior **610e** may positively evaluate an activity *A* to ride a bicycle. If additional inputs **210** indicate that the user **10** is on a very busy street, then the sports behavior **610e** may negatively evaluate a predicted outcome *O* of getting hit by a car.

[0108] In some implementations, a behavior **610** evaluates activities *A* and/or predicted outcomes *O* of activities *A* positively when the activity *A* has a type associated with the behavior **610**, and negatively when the activity *A* has a type not associated with the behavior **610**. The behavior system **600** may reference behavior-activity associations stored in

non-transitory memory **130**. The behavior-activity associations may have several nested layers (e.g., associations in a nested arrangement).

[0109] Referring to FIG. 7, in some implementations, the activity selector **700** receives the evaluated activity-outcome set **620** from the behavior system **600** and determines the collection **720** of one or more selected activities *A*, *A*₁-*A*_{*j*} (i.e., the selected activity set **720**). The activity selector **700** executes an activity selection routine that searches for the best activity(s) *A*, *A*₁-*A*_{*j*} given the evaluations *E*₁-*E*_{*n*} of their corresponding outcomes *O*, *O*₁-*O*_{*n*} by all of the participating active behaviors **610**, **610a-n**. In some implementations, the activity selector **700** calculates one or more preferred outcomes *O*, *O*₁-*O*_{*n*}, based on the outcome evaluations *E*, *E*₁-*E*_{*n*}, of the behaviors **610** and selects one or more corresponding activities *A*, *A*₁-*A*_{*j*} for the selected activity set **720**. The activity selector **700** may optionally send the selected activity set **720** to the activities system **500** (e.g., to the activity model **510**) as feedback.

[0110] In some implementations, the activity selector **700** assesses the evaluations *E*, *E*₁-*E*_{*n*} of the possible outcomes *O*, *O*₁-*O*_{*n*} of the activities *A*, *A*₁-*A*_{*j*} and determines a combination of activities *A*, *A*₁-*A*_{*j*} that provides a combined outcome *O*. The combined outcome *O* may achieve higher user stratification than any single individual outcome *O*. The activity selector **700** may select the combination of activities *A*, *A*₁-*A*_{*j*} having the determined combined outcome *O* as the selected activity set **720**. For example, if the inputs **210** indicate that the user **10** is hungry and likely seeking entertainment, a combined outcome *O* of both eating and watching a show may be very favorable. Therefore, a combined action may be going to a dinner-theater event that includes eating and watching a show.

[0111] Referring again also to FIG. 2B, the search system **300** sends search results **230** to the user device **200**, in response to the search query **220**. In some implementations, the search results **230** include one or more result records **232**, which include information about or pertaining to the selected activity set **720**. For example, the search results **230** may be a recordset that includes a result record **232** for each selected activity *A*. Moreover, the result record **232** may include a description **234** of the corresponding selected activity *A* (referred to as an activity description) that identifies the activity *A* and how to experience the activity *A*. In some examples, the activity description **234** includes an activity name **234a**, an activity description **234b**, a link **234c** (e.g., a uniform resource locator (URL) or other type or resource locator for accessing a webpage, an application, etc.), display data **234d**, and/or other data related to the activity *A*, such as an evaluation score **234e** (e.g., by the activity selector **700**), a popularity score **234f** (e.g., retrieved from a data source **130**). The activity description **234b** may include a textual description of the activity *A* and/or location information (e.g., geolocation coordinates, a textual street location, etc.) for the activity *A*. In some examples, the activity description **234** may include information explaining why the search system **300** chose a particular activity *A*. For example, the activity description **234** may explain that the search system **300** chose an activity *A* related to eating, because a majority of the inputs **210** indicated that the user **10** was very hungry and close in proximity to a favorite restaurant (e.g., as indicated by a user preference *P*). In some implementations, the search application **206b**, executing on the user device **200**, generates a result view **800** based on the received search results **230** and dis-

plays the result view **800** in the GUI **250**. The result view **800** includes one or more activity messages **810** corresponding to each result record **232** in the search results **230**.

[0112] Referring to FIG. 8A, in some implementations, the search application **206b** displays a message **254** in the GUI **250** prompting the user **10** to shake the user device **200** to receive a suggested activity A. When the user **10** shakes the user device **200**, the search application **206b** receives an input **210** from the IMU **208d** of the user device **200** indicating that the user **10** is shaking the user device **200** back and forth. In response to the received input **210**, the search application **206b** may send the query request **220** to the search system **300** to receive search result(s) **230** for display in the **250**. The search application **206b** may display a result view **800** in the GUI **250** that shows one or more activity messages **810**.

[0113] In some implementations, the result view **800**, **800a** includes an activity message **810** that includes the activity name **234a**, the activity description **234b**, the link **234c**, the evaluation score **234e**, and/or the popularity score **234f** from the corresponding result record **232**. The result view **800** may also include a result view selector **820** having icons **822a-n** corresponding to alternative result views **800**, **800a-n**. When the user selects one of the icons **822a-n**, the search application **206b** displays the corresponding result view **800a-n**.

[0114] In response to selection of a link **234c**, the user device **200** may launch a corresponding software application **206** (e.g., a native application or a web-browser application) referenced by the link **234c** and perform one or more operations indicated in the link **234c** and/or the display data **234d**. For example, the link **234c** may include a URL, having query string containing data to be passed to the software application **206** or software running on a remote server **112** (e.g., the query string may contain name/value pairs separated by delimiters, such as ampersands). If the link **234c** is configured to access a native application **206**, the link **234c** may include a string (e.g., a query string) that includes a reference to the native application **206** and indicates one or more operations for the user device **200** to perform. When the user **10** selects the link **234c** for the native application **206**, the user device **200** launches the native application **206** referenced in the link **234c** and performs the one or more operations indicated in the link **234c**. If the references application **206** is not installed on the user device **200**, the link **234c** may direct the user **10** to a location (e.g., a digital distribution platform **130b**) where a native application **206** can be downloaded. If the link **234c** is configured to access a web-based application **206**, the link **234c** may include a string e.g., a query string) that includes a reference to a web resource (e.g., a page of a web application/website). For example, the link **234c** may include a URL (i.e., a web address) used with hypertext transfer protocol (HTTP). When the user **10** selects the link **234c**, the user device **200** launches a web browser application **206** and retrieves the web resource indicated in the resource identifier.

[0115] The search application **206b** may display the search results **230** to the user **10** in a variety of different ways, depending on what information is transmitted to the user device **200**. Moreover, the search application **206b** may display the search results **230** in the GUI **250** based on the display data **234d**. The display data **234d** may include text, images, layout information, a display template, a style guide (e.g., style sheet), etc.

[0116] In the example shown in FIG. 8B, a result view **800**, **800b** may include a map **830** having a user icon **832** indicating a current location of the user device **200** on the map **830**

and the one or more activity results **810** in their corresponding locations **834** on the map **830**. The user **10** can view information from the corresponding result record **232** displayed in the activity result **810** (e.g., the activity name **234a**, the activity description **234b**, the link **234c**, the evaluation score **234e**, and/or the popularity score **234f**). The link **234c** may include a link display name as well as the underlying resource locator.

[0117] Referring to FIG. 8C, in examples where the search results **230** include a recordset of results records **232**, the search application **206b** may display the search results **230** to the user **10** in a results view **800**, **800c** that includes a list view **840** of the result records **232** (e.g., in a tabular form). Moreover, the search application **206b** may arrange the result records **232** in order based on their evaluation score **234e** and/or the popularity score **234f**. In some examples, the search application **206b** displays the result records **232** in a table grid, and in other examples, the search application **206b** displays the result records **232** in a tree-grid (as shown), grouping result records **232** under separate parent nodes by a category or other grouping.

[0118] FIG. 8D is a schematic view of the user device **200** displaying a result view **800**, **800d** that includes a select-a-door view **850**. The select-a-door view **850** displays doors **852**, where each door **852** corresponds to a hidden result record **232**. In the example shown, the select-a-door view **850** includes first, second, and third doors **852a-c**, but any number of doors **852** may be shown. The search application **206b** allows the user **10** to select one door **852**. In response to selection of a door **852**, the search application **206b** displays an activity message **810** including information of the result record **232** (e.g., the activity name **234a**, the activity description **234b**, the link **234c**, the evaluation score **234e**, and/or the popularity score **234f**) corresponding to the selected door **852**.

[0119] FIG. 8E is a schematic view of the user device **200** displaying an example result view **800**, **800d** that includes a spin-the-wheel view **860**. The spin-the-wheel view **860** displays a wheel **862** having an enumeration of results records **232** from the search results **230**. In the example shown, the wheel **862** includes eight numbers corresponding to eight results records **232**, but any number of results records **232** can be enumerated using number, letters, pictures, or other identifiers. In response to the user spinning the wheel **862**, the search application **206b** randomly selects one of the enumerated result records **232** and displays an activity message **810** including information of the selected result record **232** (e.g., the activity name **234a**, the activity description **234b**, the link **234c**, the evaluation score **234e**, and/or the popularity score **234f**).

[0120] In some implementations, the user **10** can enter feedback in the GUI **250** of the search application **206b**, so that the search system **300** can learn whether the suggested activities A were well-received by the user **10**. The search system **300** can use the user feedback for future activity selections.

[0121] FIG. 9 provides example arrangements of operations for a method **900** of performing a search. The method **900** is described with respect to the user device **200** and the search system **300** as illustrated in FIG. 2B. At block **902**, the method **900** includes receiving, at a computing device **202**, **112**, inputs **210** indicative of a user state of the user **10**. The inputs **210** include sensor inputs from one or more sensors **208** in communication with the computing device **202**, **112** and/or user inputs received from a graphical user interface

250 displayed on a screen **240** in communication with the computing device **202**, **112**. Moreover, the inputs **210** may include biometric data **212** of the user **10** and environmental data **214** regarding a surrounding of the user **10**. At block **904**, the method **900** includes determining, using the computing device **112**, a collective user state **420** based on the received inputs **210**. At block **906**, the method **900** includes determining, using the computing device **202**, **112**, one or more possible activities A, A_1-A_j of a user **110** and optionally one or more predicted outcomes O, O_1-O_n for each activity A, A_1-A_j based on the collective user state **420**. The method **900** further includes, at block **908**, executing, at the computing device **202**, **112**, one or more behaviors **610** that evaluate the one or more possible activities A, A_1-A_j and/or optionally the corresponding one or more predicted outcomes O, O_1-O_n . Each behavior **610** models a human behavior and/or a goal oriented task. At block **910**, the method **900** includes selecting, using the computing device **202**, **112**, one or more activities A, A_1-A_j based on the evaluations E, E_1-E_n of the one or more possible activities A, A_1-A_j and/or the corresponding one or more predicted outcomes O, O_1-O_n ; and, at block **912**, the method **900** includes sending results **230** including the selected one or more activities A, A_1-A_j from the computing device **202**, **112** to the screen **240** for display on the screen **240**.

[0122] In some implementations, the method **900** includes querying one or more remote data sources **130** in communication with the computing device **202**, **112** to identify possible activities A, A_1-A_j and/or predicted outcomes O, O_1-O_n . The method **900** may include determining, using the computing device **202**, **112**, the one or more possible activities A, A_1-A_j and the one or more predicted outcomes O, O_1-O_n for each activity A based on one or more preferences P_1-P_n of the user **10**. Each behavior **610** may evaluate an activity A or a corresponding outcome O positively when the activity A or the corresponding outcome O at least partially achieves an objective of the behavior **610**. For example, the eating behavior **610a** may positively evaluate an eating activity; whereas the sports behavior **610e** may negatively evaluate the eating activity. Moreover, each behavior **610** may evaluate an activity A or a corresponding outcome O positively when the activity A or the corresponding outcome O at least partially achieves a user preference P_1-P_n . In some examples, a first behavior **610** evaluates an activity A or a corresponding outcome O based on an evaluation E by a second behavior **610** of the activity A or the corresponding outcome O . This allows evaluations E of one behavior **610** to be based on evaluations E of another behavior **610**. Each behavior **610** may elect to participate or not participate in evaluating the one or more activities A , and/or the one or more predicted outcomes O, O_1-O_n for each activity A based on the collective user state **420**.

[0123] When an input **210** is related to a behavior **610**, the method **900** may include incrementing an influence value I associated with the behavior **610**. The input **210** may be related to the behavior **610** when the input **210** is of an input type associated with the behavior **610**. In some implementations, the evaluations E of each behavior **610** can be weighted based on the influence value I of the corresponding behavior **610**. The method **900** may include decrementing the influence value I of each behavior **610** after a threshold period of time. When an influence value I equals zero, the method **900** may include deactivating the corresponding behavior **610**. Any behaviors **610** having an influence value I greater than zero

may participate in evaluating the activities A or the corresponding outcomes O ; and any behaviors **610** having an influence value I equal to zero may not participate in evaluating the activities A or the corresponding outcomes O .

[0124] In some implementations, the method **900** includes selecting for the results **230** a threshold number of activities A having the highest evaluations E or a threshold number of activities A having corresponding predicted outcomes O that have the highest evaluations. The method **900** may include combining selected activities A and sending a combined activity A in the results **230**.

[0125] The computing device **202**, **112** may include a user computer processor **202** of a user device **200** including the screen **240** and/or one or more remote computer processors **112** in communication with the user computer processor **202**. For example, the computer device can be the computer processor of a mobile device, a computer processor of an elastically scalable cloud resource, or a combination thereof.

[0126] FIG. **10** is schematic view of an example computing device **1000** that may be used to implement the systems and methods described in this document. The computing device **1000** is intended to represent various forms of digital computers, such as laptops, desktops, workstations, personal digital assistants, servers, blade servers, mainframes, and other appropriate computers. The components shown here, their connections and relationships, and their functions, are meant to be exemplary only, and are not meant to limit implementations of the inventions described and/or claimed in this document.

[0127] The computing device **1000** includes a processor **1010**, memory **1020**, a storage device **1030**, a high-speed interface/controller **1040** connecting to the memory **1020** and high-speed expansion ports **1050**, and a low speed interface/controller **1060** connecting to low speed bus **1070** and storage device **1030**. Each of the components **1010**, **1020**, **1030**, **1040**, **1050**, and **1060**, are interconnected using various buses, and may be mounted on a common motherboard or in other manners as appropriate. The processor **1010** can process instructions for execution within the computing device **1000**, including instructions stored in the memory **1020** or on the storage device **1030** to display graphical information for a graphical user interface (GUI) on an external input/output device, such as display **1080** coupled to high speed interface **1040**. In other implementations, multiple processors and/or multiple buses may be used, as appropriate, along with multiple memories and types of memory. Also, multiple computing devices **1000** may be connected, with each device providing portions of the necessary operations (e.g., as a server bank, a group of blade servers, or a multi-processor system).

[0128] The memory **1020** stores information non-transitorily within the computing device **1000**. The memory **1020** may be a computer-readable medium, a volatile memory unit(s), or non-volatile memory unit(s). The non-transitory memory **1020** may be physical devices used to store programs (e.g., sequences of instructions) or data (e.g., program state information) on a temporary or permanent basis for use by the computing device **1000**. Examples of non-volatile memory include, but are not limited to, flash memory and read-only memory (ROM)/programmable read-only memory (PROM)/erasable programmable read-only memory (EPROM)/electronically erasable programmable read-only memory (EEPROM) (e.g., typically used for firmware, such as boot programs). Examples of volatile memory include, but are not limited to, random access memory (RAM), dynamic random

access memory (DRAM), static random access memory (SRAM), phase change memory (PCM) as well as disks or tapes.

[0129] The storage device **1030** is capable of providing mass storage for the computing device **1000**. In some implementations, the storage device **1030** is a computer-readable medium. In various different implementations, the storage device **1030** may be a floppy disk device, a hard disk device, an optical disk device, or a tape device, a flash memory or other similar solid state memory device, or an array of devices, including devices in a storage area network or other configurations. In additional implementations, a computer program product is tangibly embodied in an information carrier. The computer program product contains instructions that, when executed, perform one or more methods, such as those described above. The information carrier is a computer- or machine-readable medium, such as the memory **1020**, the storage device **1030**, or memory on processor **1010**.

[0130] The high speed controller **1040** manages bandwidth-intensive operations for the computing device **1000**, while the low speed controller **1060** manages lower bandwidth-intensive operations. Such allocation of duties is exemplary only. In some implementations, the high-speed controller **1040** is coupled to the memory **1020**, the display **1080** (e.g., through a graphics processor or accelerator), and to the high-speed expansion ports **1050**, which may accept various expansion cards (not shown). In some implementations, the low-speed controller **1060** is coupled to the storage device **1030** and low-speed expansion port **1070**. The low-speed expansion port **1070**, which may include various communication ports (e.g., USB, Bluetooth, Ethernet, wireless Ethernet), may be coupled to one or more input/output devices, such as a keyboard, a pointing device, a scanner, or a networking device such as a switch or router, e.g., through a network adapter.

[0131] The computing device **1000** may be implemented in a number of different forms, as shown in the figure. For example, it may be implemented as a standard server **1000a**, or multiple times in a group of such servers **1000a**, as a laptop computer **1000b**, or as part of a rack server system **1000c**.

[0132] Various implementations of the systems and techniques described here can be realized in digital electronic and/or optical circuitry, integrated circuitry, specially designed ASICs (application specific integrated circuits), computer hardware, firmware, software, and/or combinations thereof. These various implementations can include implementation in one or more computer programs that are executable and/or interpretable on a programmable system including at least one programmable processor, which may be special or general purpose, coupled to receive data and instructions from, and to transmit data and instructions to, a storage system, at least one input device, and at least one output device.

[0133] These computer programs (also known as programs, software, software applications or code) include machine instructions for a programmable processor, and can be implemented in a high-level procedural and/or object-oriented programming language, and/or in assembly/machine language. As used herein, the terms “machine-readable medium” and “computer-readable medium” refer to any computer program product, non-transitory computer readable medium, apparatus and/or device (e.g., magnetic discs, optical disks, memory, Programmable Logic Devices (PLDs)) used to provide machine instructions and/or data to a

programmable processor, including a machine-readable medium that receives machine instructions as a machine-readable signal. The term “machine-readable signal” refers to any signal used to provide machine instructions and/or data to a programmable processor.

[0134] Implementations of the subject matter and the functional operations described in this specification can be implemented in digital electronic circuitry, or in computer software, firmware, or hardware, including the structures disclosed in this specification and their structural equivalents, or in combinations of one or more of them. Moreover, subject matter described in this specification can be implemented as one or more computer program products, i.e., one or more modules of computer program instructions encoded on a computer readable medium for execution by, or to control the operation of, data processing apparatus. The computer readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, a composition of matter effecting a machine-readable propagated signal, or a combination of one or more of them. The terms “data processing apparatus”, “computing device” and “computing processor” encompass all apparatus, devices, and machines for processing data, including by way of example a programmable processor, a computer, or multiple processors or computers. The apparatus can include, in addition to hardware, code that creates an execution environment for the computer program in question, e.g., code that constitutes processor firmware, a protocol stack, a database management system, an operating system, or a combination of one or more of them. A propagated signal is an artificially generated signal, e.g., a machine-generated electrical, optical, or electromagnetic signal, that is generated to encode information for transmission to suitable receiver apparatus.

[0135] A computer program (also known as an application, program, software, software application, script, or code) can be written in any form of programming language, including compiled or interpreted languages, and it can be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. A computer program does not necessarily correspond to a file in a file system. A program can be stored in a portion of a file that holds other programs or data (e.g., one or more scripts stored in a markup language document), in a single file dedicated to the program in question, or in multiple coordinated files (e.g., files that store one or more modules, sub programs, or portions of code). A computer program can be deployed to be executed on one computer or on multiple computers that are located at one site or distributed across multiple sites and interconnected by a communication network.

[0136] The processes and logic flows described in this specification can be performed by one or more programmable processors executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by, and apparatus can also be implemented as, special purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application specific integrated circuit).

[0137] Processors suitable for the execution of a computer program include, by way of example, both general and special purpose microprocessors, and any one or more processors of any kind of digital computer. Generally, a processor will receive instructions and data from a read only memory or a random access memory or both. The essential elements of a

computer are a processor for performing instructions and one or more memory devices for storing instructions and data. Generally, a computer will also include, or be operatively coupled to receive data from or transfer data to, or both, one or more mass storage devices for storing data, e.g., magnetic, magneto optical disks, or optical disks. However, a computer need not have such devices. Moreover, a computer can be embedded in another device, e.g., a mobile telephone, a personal digital assistant (PDA), a mobile audio player, a Global Positioning System (GPS) receiver, to name just a few. Computer readable media suitable for storing computer program instructions and data include all forms of non-volatile memory, media and memory devices, including by way of example semiconductor memory devices, e.g., EPROM, EEPROM, and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks; magneto optical disks; and CD ROM and DVD-ROM disks. The processor and the memory can be supplemented by, or incorporated in, special purpose logic circuitry.

[0138] To provide for interactivity with a user, one or more aspects of the disclosure can be implemented on a computer having a display device, e.g., a CRT (cathode ray tube), LCD (liquid crystal display) monitor, or touch screen for displaying information to the user and optionally a keyboard and a pointing device, e.g., a mouse or a trackball, by which the user can provide input to the computer. Other kinds of devices can be used to provide interactivity with a user as well; for example, feedback provided to the user can be any form of sensory feedback, e.g., visual feedback, auditory feedback, or tactile feedback; and input from the user can be received in any form, including acoustic, speech, or tactile input. In addition, a computer can interact with a user by sending documents to and receiving documents from a device that is used by the user; for example, by sending web pages to a web browser on a user's client device in response to requests received from the web browser.

[0139] One or more aspects of the disclosure can be implemented in a computing system that includes a backend component, e.g., as a data server, or that includes a middleware component, e.g., an application server, or that includes a frontend component, e.g., a client computer having a graphical user interface or a Web browser through which a user can interact with an implementation of the subject matter described in this specification, or any combination of one or more such backend, middleware, or frontend components. The components of the system can be interconnected by any form or medium of digital data communication, e.g., a communication network. Examples of communication networks include a local area network ("LAN") and a wide area network ("WAN"), an inter-network (e.g., the Internet), and peer-to-peer networks (e.g., ad hoc peer-to-peer networks).

[0140] The computing system can include clients and servers. A client and server are generally remote from each other and typically interact through a communication network. The relationship of client and server arises by virtue of computer programs running on the respective computers and having a client-server relationship to each other. In some implementations, a server transmits data (e.g., an HTML page) to a client device (e.g., for purposes of displaying data to and receiving user input from a user interacting with the client device). Data generated at the client device (e.g., a result of the user interactivity) can be received from the client device at the server.

[0141] While this specification contains many specifics, these should not be construed as limitations on the scope of

the disclosure or of what may be claimed, but rather as descriptions of features specific to particular implementations of the disclosure. Certain features that are described in this specification in the context of separate implementations can also be implemented in combination in a single implementation. Conversely, various features that are described in the context of a single implementation can also be implemented in multiple implementations separately or in any suitable sub-combination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a sub-combination or variation of a sub-combination.

[0142] Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. In certain circumstances, multi-tasking and parallel processing may be advantageous. Moreover, the separation of various system components in the embodiments described above should not be understood as requiring such separation in all embodiments, and it should be understood that the described program components and systems can generally be integrated together in a single software product or packaged into multiple software products.

[0143] A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the disclosure. Accordingly, other implementations are within the scope of the following claims. For example, the activities recited in the claims can be performed in a different order and still achieve desirable results.

1. A method comprising:

receiving, at data processing hardware, inputs indicative of a user state of a user, the received inputs comprising at least one of:

sensor inputs from one or more sensors in communication with the data processing hardware;

application inputs received from one or more software applications executing on the data processing hardware or a remote device in communication with the data processing hardware; or

user inputs received from a graphical user interface;

determining, by the data processing hardware, possible information for the user by executing one or more searches of data sources, at least one search based on the received inputs;

executing, by the data processing hardware, behaviors having corresponding objectives, each behavior configured to evaluate the possible information and determine an evaluation based on whether the possible information is related to the corresponding objective, at least one behavior electing to participate or not participate in evaluating the possible information based on the received inputs, and at least one of the one or more searches based on the objective of at least one behavior participating in evaluating the possible information; and

selecting, by the data processing hardware, suggested information from the possible information based on the evaluations of one or more behaviors for presentation to the user.

2. (canceled)

3. The method of claim 1, further comprising, for each behavior:

determining whether any input of the received inputs is of an input type associated with the behavior; and
when an input of the received inputs is of an input type associated with the behavior, incrementing an influence value associated with the behavior,

wherein when the influence value of the behavior satisfies an influence value criteria, the behavior participates in evaluating the possible information, and when the influence value of the behavior does not satisfy the influence value criteria, the behavior does not participate in evaluating the possible information.

4. The method of claim 3, further comprising, for each behavior:

determining whether a decrement criteria is satisfied for the behavior; and

decrementing the influence value of the behavior when the decrement criteria is satisfied.

5. The method of claim 4, wherein the decrement criteria is satisfied when a threshold period of time has passed since last incrementing the influence value.

6. The method of claim 3, wherein the evaluation of at least one behavior is weighted based on the corresponding influence value of the at least one behavior.

7. The method of claim 1, further comprising displaying in the graphical user interface a representation of the user state based on the received inputs.

8. The method of claim 1, wherein at least one behavior evaluates the possible information based on at least one of a history of previously selected information for the user or one or more preferences of the user.

9. The method of claim 1, wherein a first behavior evaluates the possible information based on an evaluation by a second behavior of the possible information.

10. The method of claim 1, wherein the received inputs comprise biometric data of the user and environmental data regarding a surrounding of the user.

11. A system comprising:

data processing hardware; and

memory hardware in communication with the data processing hardware, the memory hardware storing instructions that, when executed by the data processing hardware, cause the data processing hardware to perform operations comprising:

receiving inputs indicative of a user state of a user, the received inputs comprising at least one of:

sensor inputs from one or more sensors in communication with the data processing hardware;

application inputs received from one or more software applications executing on the data processing hardware or a remote device in communication with the data processing hardware; or

user inputs received from a graphical user interface;

determining possible information for the user by executing one or more searches of data sources, at least one search based on the received inputs;

executing behaviors having corresponding objectives, each behavior configured to evaluate the possible information and determine an evaluation based on whether the possible information is related to the corresponding objective, at least one behavior electing to participate or not participate in evaluating the possible information based on the received inputs, and at least one of the one or more searches based on the objective of at least one behavior participating in evaluating the possible information; and

selecting suggested information from the possible information based on the evaluations of one or more behaviors for presentation to the user.

12. (canceled)

13. The system of claim 11, wherein the operations further comprise, for each behavior:

determining whether any input of the received inputs is of an input type associated with the behavior; and
when an input of the received inputs is of an input type associated with the behavior, incrementing an influence value associated with the behavior,

wherein when the influence value of the behavior satisfies an influence value criteria, the behavior participates in evaluating the possible information, and when the influence value of the behavior does not satisfy the influence value criteria, the behavior does not participate in evaluating the possible information.

14. The system of claim 13, wherein the operations further comprise, for each behavior:

determining whether a decrement criteria is satisfied for the behavior; and
decrementing the influence value of the behavior when the decrement criteria is satisfied.

15. The system of claim 14, wherein the decrement criteria is satisfied when a threshold period of time has passed since last incrementing the influence value.

16. The system of claim 13, wherein the evaluation of at least one behavior is weighted based on the corresponding influence value of the at least one behavior.

17. The system of claim 11, wherein the operations further comprise displaying in the graphical user interface a representation of the user state based on the received inputs.

18. The system of claim 11, wherein at least one behavior evaluates the possible information based on at least one of a history of previously selected information for the user or one or more preferences of the user.

19. The system of claim 11, wherein a first behavior evaluates the possible information based on an evaluation by a second behavior of the possible information.

20. The system of claim 11, wherein the received inputs comprise biometric data of the user and environmental data regarding a surrounding of the user.

* * * * *