

AUSTRALIA
Patents Act 1990

NOTICE OF ENTITLEMENT

I/We SUPER VISION INTERNATIONAL, INC.

of 2442 VISCOUNT ROW
ORLANDO FL 32809
USA

being the applicant(s) and nominated person(s) in respect of an application for a patent for an invention entitled LATERAL ILLUMINATION FIBER OPTIC CABLE DEVICE AND METHOD OF MANUFACTURE (Application No. 69540/94), state the following:

1. The nominated person(s) has/have, for the following reasons, gained entitlement from the actual inventor(s):

THE NOMINATED PERSON IS THE ASSIGNEE OF
THE ACTUAL INVENTOR.

2. The nominated person(s) has/have, for the following reasons, gained entitlement from the applicant(s) listed in the declaration under Article 8 of the PCT:

THE APPLICANT AND NOMINATED PERSON IS THE
ASSIGNEE OF THE BASIC APPLICANT.

3. The basic application(s) listed in the declaration under Article 8 of the PCT is/are the first application(s) made in a Convention country in respect of the invention.

DATED: 6 November 1995

SUPER VISION INTERNATIONAL, INC.

GRIFFITH HACK & CO.



Patent Attorney for and
on behalf of the applicant(s)



AU9469540

(12) PATENT ABRIDGMENT (11) Document No. AU-B-69540/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 686172

- (54) Title
LATERAL ILLUMINATION FIBER OPTIC CABLE DEVICE AND METHOD OF MANUFACTURE
- International Patent Classification(s)
(51)⁵ G02B 006/44 F21V 007/04
- (21) Application No. : 69540/94 (22) Application Date : 20.05.94
- (87) PCT Publication Number : WO94/28451
- (30) Priority Data
- (31) Number (32) Date (33) Country
065942 21.05.93 US UNITED STATES OF AMERICA
- (43) Publication Date : 20.12.94
- (44) Publication Date of Accepted Application : 05.02.98
- (71) Applicant(s)
SUPER VISION INTERNATIONAL, INC.
- (72) Inventor(s)
BRETT M KINGSTONE
- (74) Attorney or Agent
GRIFFITH HACK , GPO Box 1285K, MELBOURNE VIC 3001
- (56) Prior Art Documents
US 4763984
EP 030637
- (57) Claim

1. A lateral illumination fibre optic cable device, comprising:

a central core having an axially extending outer surface;

a plurality of twisted optical fibres distributed circumferentially about the core and extending axially along the outer surface; and

an axially extending tubular sheath enclosing the core and the optical fibres.

21. A lateral illumination fibre optic cable comprising:

a central core extending longitudinally of the cable;

a plurality of optical fibers distributed perimetrically about the core and extending axially along an outer surface of the core; and

a transparent tubular sheath encompassing the core and the optical fibres and extending along a length of the cable.

(11) AU-B-69540/94
(10) 686172

-2-

24. A lateral illumination optical fibre lighting system comprising:

a longitudinally extending mounting strip having front and rear surfaces;

a first plurality of fibre optic cables having ends, each of said cables comprising a plurality of helically twisted optical fibres;

means mounting the first plurality of fibre optic

cables to extend longitudinally along the front surface of the mounting strip;

a light source directed into the ends for providing lateral illumination from the fibre optic cables; and

the means mounting the plurality of fibre optic cables including means located rearwardly of the fibre optic cables for reflecting rearwardly directed lateral illumination forwardly.

LATERAL ILLUMINATION FIBER OPTIC CABLE
DEVICE AND METHOD OF MANUFACTURE

This invention relates to fiber optic lighting, in general; and, in particular, to an improved fiber optic cable providing illumination through lateral transmission of light, and to a method of manufacture thereof.

5

BACKGROUND OF THE INVENTION

An "optical fiber" is an elongated glass or plastic filament having a core region surrounded by one or more layers of cladding, with the core having a higher index of refraction than the cladding, so that light introduced at one end of the fiber will be internally reflected for transmission longitudinally within the core channel, to the other end of the fiber. A "fiber optic cable" comprises a sheath surrounding a multiplicity of optical fibers. For further details on optical fibers, see, e.g., U.S. Patent No. 4,744,631, the disclosure of which is incorporated herein.

In addition to transmitting light in a longitudinal mode, conventional fiber optic cable also transmits light laterally. For data communications, an effort is made to minimize such lateral transmission; however, the lateral illumination is useful for area lighting or spotlighting, such as around swimming pools, walkways, signs, and other safety and decorative accent lighting applications. Attempts have been made in this context to maximize lateral emissions to provide uniform sideways lighting or "glow" over the length of the cable.

Examples of lateral illumination fiber optic cable devices used for safety or decorative illumination purposes are given in U.S. Patent Nos. 4,933,815 and 4,763,984, the disclosures of which are incorporated herein. Such fiber optic cables or light channels utilize special methods of fabrication, such as the inclusion of actinically-sensitive dyes or other light-scattering materials in the core, to aid in enhancing

lateral scattering of the incident light flux.

Other approaches, which do not require specifically fabricated fibres, simply bundle large numbers of fibres over each other, either individually or in helically wound groups, and cover the same with a clear plastic jacket or cable. Such bundles are not efficient from the aspect of cost and illumination. The central fibres in the cable are wasted due to the fact that the central core of fibres in such cables does not contribute to the visible illumination. Moreover, the central fibres may actually detract from the lateral mode transmissions of the perimetric fibres by causing absorption and attenuation of the light directed toward the center.

SUMMARY OF THE INVENTION

In accordance with a first broad aspect of the invention, there is provided a lateral illumination fibre optic cable device, comprising:

a central core having an axially extending outer surface;

a plurality of twisted optical fibres distributed circumferentially about the core and extending axially along the outer surface; and

an axially extending tubular sheath enclosing the core and the optical fibres.

Preferably said outer surface is light reflective.

In one arrangement, described in greater detailed below, the cable has a plurality of bundles of fibres, uniformly distributed at equiangular intervals about a tube covered with a reflective tape or coating. In a second arrangement discussed below, a plurality of such cables are provided with accurate cutouts and hollow core regions

which fit over complementary projections of corresponding attachment tracks of lineally extending reflective mounting strips. A method of manufacturing the cable includes cabling, wrapping or winding the bundles of fibres about the perimeter of a tubular core, while passing the same through an extruder to apply a clear plastic jacket or sheath thereover. The sheath material is injected with a UV stabiliser during manufacture to protect the cable from yellowing due to the sun, and a clear protective cape is used around the bundles to prevent the fibres from being melted during the extrusion process.

The improved perimetrical arrangement eliminates the need for wasted central core fibres and the reflective central core of the improved cable serves to deflect inwardly directed laterally transmitted light back out towards the perimeter of the cable, thereby enhancing the brightness of the cable while reducing the number of fibres needed to produce the same diameter cable.

In accordance with a second broad aspect there is provided a lateral illumination optical fibre lighting system, comprising:

a longitudinally extending mounting strip having front and rear surfaces;

first and second pluralities of optical fibres having ends;

means mounting the first and second pluralities of optical fibres to extend longitudinally along the front surface in respective upper and lower position separated by a space;

means rendering the space between the upper and lower positions reflective; and

a light source directed into the ends for providing lateral illumination from the fibres;

the means mounting the pluralities of fibres including means located rearwardly of the fibres for

reflecting rearwardly directed lateral illumination forwardly.

5 In accordance with a third broad aspect there is provided a lateral illumination fibre optic cable comprising:

a central core extending longitudinally of the cable;

10 a plurality of optical fibers distributed perimetrically about the core and extending axially along an outer surface of the core; and

a transparent tubular sheath encompassing the core and the optical fibres and extending along a length of the cable.

15

Preferably the optical fibres are wound about the core in overlapping patterns to form variable lateral illumination designs.

20

In accordance with a fourth broad aspect there is provided a lateral illumination optical fibre lighting system comprising:

a longitudinally extending mounting strip having front and rear surfaces;

25

a first plurality of fibre optic cables having ends, each of said cables comprising a plurality of helically twisted optical fibres;

means mounting the first plurality of fibre optic cables to extend longitudinally along the front surface of the mounting strip;

30

a light source directed into the ends for providing lateral illumination from the fibre optic cables; and

35 the means mounting the plurality of fibre optic cables including means located rearwardly of the fibre optic cables for reflecting rearwardly directed lateral illumination forwardly.

Preferably the system includes a second plurality of fibre optic cables having ends, the second plurality of fibre optic cables being mounted on the mounting strip spaced from the first plurality, the light source being directed into the ends of the fibre optic cables to create a pair of spaced, parallel lateral illumination cables.

In accordance with a fifth broad aspect there is provided a lateral illumination fibre optic cable device comprising:

a central core having an axially extending light reflective outer surface;

a plurality of bundles of optical fibres distributed circumferentially and wound in successive layers about the core and extending axially along the reflective surface; and

a transparent tubular sheath running longitudinally, coaxially of the core about the optical fibres.

According to a sixth broad aspect of the present invention there is provided a lateral illumination fibre optic cable device comprising:

a central core having a light reflective outer surface;

a plurality of optical fibres distributed at least partially perimetrically about the core and extending axially along the core; and

an outer sheath enclosing the optical fibres and the core to form a composite cable.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention have been chosen for purposes of illustration and description, and are shown in the accompanying drawings, wherein:

Fig. 1 is a cross-section view of a lateral

illumination fiber optic cable device in accordance with one embodiment of the present invention;

FIG. 2 is a schematic view of a manufacturing process suitable for forming the cable device of FIG. 1;

5 FIG. 3 is a fragmentary perspective view, in section, showing a modified embodiment of the cable device of FIG. 1, employed in a track lighting system; and

10 FIG. 4 is a fragmentary view, in section, of another form of the modified embodiment of FIG. 3.

Throughout the drawings, like elements are referred to by like numerals.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

As shown in FIG. 1, a lateral illumination fiber optic cable device 10 includes a central core in the form of a longitudinally extending, hollow circular tube 12 having a cylindrical outer surface 14. The tubing is, ^{preferably} made of a reflective material, coated, or otherwise accommodated to impart light reflectance to the surface 14. A plurality of prepackaged bundles 15 of optical fibers 16 is uniformly distributed circumferentially about the perimeter of the core 12 to extend axially in contact with the reflective surface 14.

25 The bundles 15 are, in turn, covered with a clear plastic tubing or casing sheath 17 which has an inside cylindrical surface 18 in contact with the radial extremities of the bundles 15. The sheath 17 runs longitudinally, coaxially of the tubing 12, with the bundles being evenly angularly distributed about a common longitudinal axis 19 in an annular region formed in the space between the surfaces 14, 18. The bundles 15 may be laid straight, or helically wound about core 12, in the axial direction.

35 In a typical application, a length of cable 10 will be mounted around a swimming pool, walkway, sign or similar structure, and illuminated by coupling light flux

into one or both ends using a light source, such as one of the type generally describe in U.S. Patent Nos. 4,825,341; 4,922,385 and 5,016,152, the disclosures of which are incorporated herein. Each cable end to be illuminated is
5 stripped back to remove like lengths of sheath 17 and core 12, leaving the remaining bundle ends to be gathered together for efficient light input. Unlike prior art cables, wherein laterally transmitted, inwardly directed light is attenuated and "lost" within the cable center,
10 light emitted inwardly by the fibers 16 of the device 10 will be reflected by the surface 14, out towards the perimeter of the cable 10. There is, thus, no necessity to fill the core region with fibers, as done conventionally. On the contrary, the action of reflection at surface 12
15 enhances the brightness of the "glowing" cable, while reducing cost compared to equal diameter conventional cables which needlessly fill the core with additional fibers.

20 In a preferred embodiment of manufacture, commercially available bundles 15 of helically-twisted fibers 16 are cabled, wrapped or wound over a white or silver reflective PVC plastic tubing 12, then passed through a plastic extruding machine, which will lay a clear
25 PVC plastic tubing jacket 18 over the bundle-wrapped core to serve as a protective outer shell. The fibers 16 may be wound about the core in overlapping patterns to form variable lateral illumination designs. In the preferred embodiment, a UV stabilizer is injected into the tubing 18
30 as it is being formed to protect the cable from yellowing due to the rays of the sun, and a cape 20 of clear MylarTM or TeflonTM tape is wound around the outside diameter of the bundle layer, to keep the bundles 15 from unravelling during the cabling process and to prevent the fibers 16
35 from being melted during the process of extruding the jacket 18 over the bundle wrapping. For enhancement of the reflectance, or as an alternative to using a reflective tubing material, the surface 12 may be wrapped with a layer of aluminium foil

or Mylar™ (foil-side out) tape 21, or coated with TiO₂ or white reflective paint.

One approach to implementing the manufacturing process is illustrated in FIG. 2. A length of hollow tubing 12 is drawn off a roll 22 and fed in an axial direction 23. A tape dispenser 24 is rotated about tubing 12 to wrap a length of reflective tape 21 helically about tubing 12. A plurality of fiber bundles 15 are then laid longitudinally, at equiangular intervals, along the reflective tape covered tubing. A second tape dispenser 25 is then rotated about tubing 12, in a direction counter to the rotation of dispenser 24, to wrap a length of clear protective tape 20 helically about the bundled tubing 12. The protective tape-wrapped tubing is then fed centrally through an extruder 26 having a die 27 which forms a jacket 18 over the bundle wrapping, thereby producing the finished cable 10.

For manufacture of a 0.580" 98-element fiber optic cable, core 12 can suitably be constituted by a 0.312" OD x 0.156" ID PVC tube; sheath 17 can be a .040" dia. transparent PVC jacket; and bundles 15 can comprise 14 evenly distributed bunches of 7 x 0.030" fiber optic elements. Utilizing a central core of reflective material, the fibers are efficiently placed, so that their contributions to the externally visible illumination are not wasted by being lost due to placement in the central core region.

The hollow 27 of tube 12 is left devoid of fibers currently contributing to the visible lateral illumination. Hollow 27 may, however, be optionally utilized to extend electrical wiring to remote light sources, to extend fibers to carry light to serially mounted cables or signalling devices, or for other similar conduit purposes. Where light is to be communicated by longitudinal transmission through hollow 27, the inside surface 28 of tube 12 may also be made

reflective. Such treatment will reflect lateral emissions back to the internally located fibers to enhance longitudinal transmission through the shielded center of the core region.

5 FIG. 3 shows a modified arrangement 10' of cable device 10, wherein an arcuate segment cutout 30 of approximately 90° has been made cross-sectionally, to run the entire length of the cable 10'. Cutout 30 provides a longitudinal opening 31 into the hollow 27' of the
10 tubing 12'. The opening 31 is bounded by radially directed walls 32, 33 which are formed by inwardly directed flanges of a C-shaped cross-sectioned transparent sheath 17'. Bundles 15 of fibers 16, identical with those of cable 10, fill the arcuate
15 annular region formed in the spacing between the outside surface 14' of tube 12' and the inside surface 18' of sheath 17'. For the example shown, the space is filled by 70 fibers constituted by 10 bundles of seven fibers each.

20 In accordance with a further aspect of the invention, a longitudinally extending mounting strip 35 has a base 36 with a vertically planar rear surface 37 and a front surface 38 having forwardly projecting, spaced upper and lower attachment tracks 39, 40
25 protruding therefrom and running longitudinally therealong. Track 39 includes a triangular cross-section having a circular protuberance 42 at its apex. Sides 43, 44 of the triangle of track 39 complement the radially-directed walls 32, 33 of cutout 30, and protuberance 42
30 complements the diameter of hollow 27', so that the length of cabling 10' can be snap-fit onto track 39 to secure the same to the mounting strip 35. ^{Optionally, track} Track 40 is identically formed to receive a second length of cable 10' in snap-fitting relationship similarly thereon.

35 Track 35 can be positioned as desired around a swimming pool, walkway, sign, or other structure to be

illuminated or accented by lateral fiber optic lighting. Fasteners 46 may be passed through bores 47 located in axially-spaced placements intermediate the tracks 39, 40, in order to secure the strip 35 in position. The space
5 48, exposed on front surface 38 between tracks 39, 40 after mounting respective cables 10' thereon, may be made of or coated with a reflective substance to provide the effect of continuous lateral illumination from the top edge 49 to the bottom edge 50 along the strip 35. As
10 with cable 10, one or more light sources 52 are directed axially into one or both ends of each cable 10'.

FIG. 4 illustrates another cable device 10" similar to device 10' of FIG. 3, but which integrates the functions of core 12' and sheath 17' in a modified
15 mounting strip 35". Strip 35" has a base 36" with a vertically planar rear surface 37" and a front surface 38" having spaced upper and lower tracks 39", 40" protruding therefrom and running longitudinally therealong. Each track 39", 40" comprises an arcuate
20 segment 42" defining an interior longitudinally extending channel 41 through which a plurality of pregrouped bundles 15 of fibers 16 are inserted. The rear surface 45 of each channel 41 is made reflective, as is the space 48" exposed on the front surface 38" between tracks 39",
25 40". This can be done by using a clear material for the strip 35" and applying a reflective substance over the surfaces 45 and space 48" or, as shown, by applying a reflective material, such as a metallic foil backing 51, over the surface 35". The device 10" can be readily
30 manufactured by collecting bundles 15 into upper and lower groupings, wrapping a clear protective covering 20" over the separate bundle groupings, then passing the same through an extruder which forms the mounting strip profile about the groupings. In this case, the rear
35 surfaces 45 of the channels 41 serve the purpose of the reflective core 12", and the segments 42" perform the

role of the casing sheath 17".

Though the cable devices 10, 10', 10" are shown filled with fibers 16 prewound into bundles 15, it will be understood that the same devices can be achieved using
5 individual unbundled fibers, if preferred. Moreover, those skilled in the art to which the invention relates will appreciate that other substitutions and modifications can also be made to the described
10 embodiments, without departing from the spirit and scope of the invention as encompassed by the claims below.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A lateral illumination fibre optic cable device,
comprising:
5 a central core having an axially extending outer
surface;
a plurality of twisted optical fibres distributed
circumferentially about the core and extending axially
along the outer surface; and
10 an axially extending tubular sheath enclosing the
core and the optical fibres.
2. A lateral illumination fibre optical cable device
as claimed in claim 1, wherein said outer surface is light
15 reflective.
3. A device as claimed in claim 2, wherein the
reflective outer surface is provided by wrapping the core
tube with a reflective material.
20
4. A device as claimed in any one of the preceding
claims, wherein the core is a hollow circular tube, the
outer surface is cylindrical, the tubular sheath is
circular, and the fibres are located in an annular region
25 formed by spacing between the outer surface and the sheath.
5. A device as claimed in any one of the preceding
claims wherein the plurality of optical fibres comprises a
plurality of optical fibres helically-twisted into a
30 plurality of bundles.
6. A device as claimed in claim 5, further
comprising a cape of clear material wound around the
plurality of bundles.
35
7. A device as claimed in either claims 5 or 6,
wherein the bundles are laid straight, longitudinally, at



equiangular intervals, in a single layer along the core.

8. A lighting system comprising a length of fibre optic cable having a grouping of axially extending optical fibres with ends and a transparent tubular sheath surrounding the fibres, and a light source directed into the ends for provided lateral illumination from the fibres, wherein the cable includes a tubular core having an outer surface and being located within the sheath to define a space between the core and the sheath, and means rendering the outer surface light reflective; and wherein the optical fibers are located within the space.

9. A lighting system as claimed in claim 8, wherein the optical fibres are bundled into a plurality of bundles and the bundles are uniformly distributed about the core outer surface.

10. A lighting system as claimed in claim 9, wherein the bundles are in simultaneous contact with the core and the sheath.

11. A lighting system as claimed in any one of claims 8 to 10, wherein the means rendering the outer surface light reflective comprises a reflective material covering the outer surface.

12. A lighting system as claimed in either claims 9 or 10, further comprising a cape of clear material surrounding the plurality of bundles.

13. A lateral illumination optical fibre lighting system, comprising;
a longitudinally extending mounting strip having front and rear surfaces;
first and second pluralities of optical fibres having ends;

means mounting the first and second pluralities of optical fibres to extend longitudinally along the front surface in respective upper and lower position separated by a space;

5 means rendering the space between the upper and lower positions reflective; and

a light source directed into the ends for providing lateral illumination from the fibres;

10 the means mounting the pluralities of fibres including means located rearwardly of the fibres for reflecting rearwardly directed lateral illumination forwardly.

14. A system as claimed in claim 13, further comprising means located at the space for securing the strip to a supporting structure.

15. A system as claimed in claim 13, wherein the means rendering the space reflective comprises a reflective covering applied to one of the front and rear surfaces.

16. A system as claimed in claim 13, wherein the pluralities of optical fibres comprise pluralities of bundles of optical fibres.

17. A system as claimed in claim 14, wherein the means mounting the pluralities of fibres comprises upper and lower members defining longitudinally extending channels, and the bundles are received in the channels.

18. A system as claimed in claim 15, wherein the channel defining members are formed as an integral part of the strip.

19. A system as claimed in claim 15, wherein the channel defining members comprise tubular cores having reflective forwardly facing surfaces, transparent sheaths

surrounding the cores, and means mounting the cores to the mounting strip.

20. A system as claimed in claim 19, wherein the
5 tubular cores include internal hollows and the mounting strip includes protuberances over which the hollows can be respectively snap fitted.

21. A lateral illumination fibre optic cable
10 comprising:
a central core extending longitudinally of the cable;
a plurality of optical fibers distributed perimetrically about the core and extending axially along
15 an outer surface of the core; and
a transparent tubular sheath encompassing the core and the optical fibres and extending along a length of the cable.

20 22. A lateral illumination fibre optic cable as claimed in claim 21 wherein the optical fibres are wound about the core in overlapping patterns to form variable lateral illumination designs.

25 23. A lateral illumination fibre optic cable as claimed in claim 21 wherein the optical fibres are bundled into a plurality of bundles and the bundles are distributed about the core.

30 24. A lateral illumination optical fibre lighting system comprising:
a longitudinally extending mounting strip having front and rear surfaces;
a first plurality of fibre optic cables having
35 ends, each of said cables comprising a plurality of helically twisted optical fibres;
means mounting the first plurality of fibre optic



cables to extend longitudinally along the front surface of the mounting strip;

a light source directed into the ends for providing lateral illumination from the fibre optic cables;
5 and

the means mounting the plurality of fibre optic cables including means located rearwardly of the fibre optic cables for reflecting rearwardly directed lateral illumination forwardly.

10

25. A system as claimed in claim 24 and including a second plurality of fibre optic cables having ends, the second plurality of fibre optic cables being mounted on the mounting strip spaced from the first plurality, the light
15 source being directed into the ends of the fibre optic cables to create a pair of spaced, parallel lateral illumination cables.

26. A lateral illumination fibre optic cable device
20 comprising:

a central core having an axially extending light reflective outer surface;

a plurality of bundles of optical fibres distributed circumferentially and wound in successive
25 layers about the core and extending axially along the reflective surface; and

a transparent tubular sheath running longitudinally, coaxially of the core about the optical fibers.

30

27. A lateral illumination fibre optic cable device comprising:

a central core having a light reflective outer surface;

a plurality of optical fibres distributed at
35 least partially perimetrimally about the core and extending axially along the core; and

an outer sheath enclosing the optical fibers and the core to form a composite cable.

28. A lateral illumination fiber optic cable device
5 substantially as herein described with reference to figures 1 and 2 or to figure 3 or to figure 4 of the accompanying drawings.

29. A lateral illumination optical fibre lighting
10 system substantially as herein described with reference to figures 1 and 2 or to figure 3 or to figure 4 of the accompanying drawings.

30. A lateral illumination fibre optic cable
15 substantially as herein described with reference to figures 1 and 2 or to figure 3 or to figure 4 of the accompanying drawings.

DATED THIS 22ND DAY OF OCTOBER 1997

20 SUPER VISION INTERNATIONAL, INC.

By Its Patent Attorneys:

GRIFFITH HACK



Fellows Institute of Patent
Attorneys of Australia

25

69540/94

1/2

FIG. 1

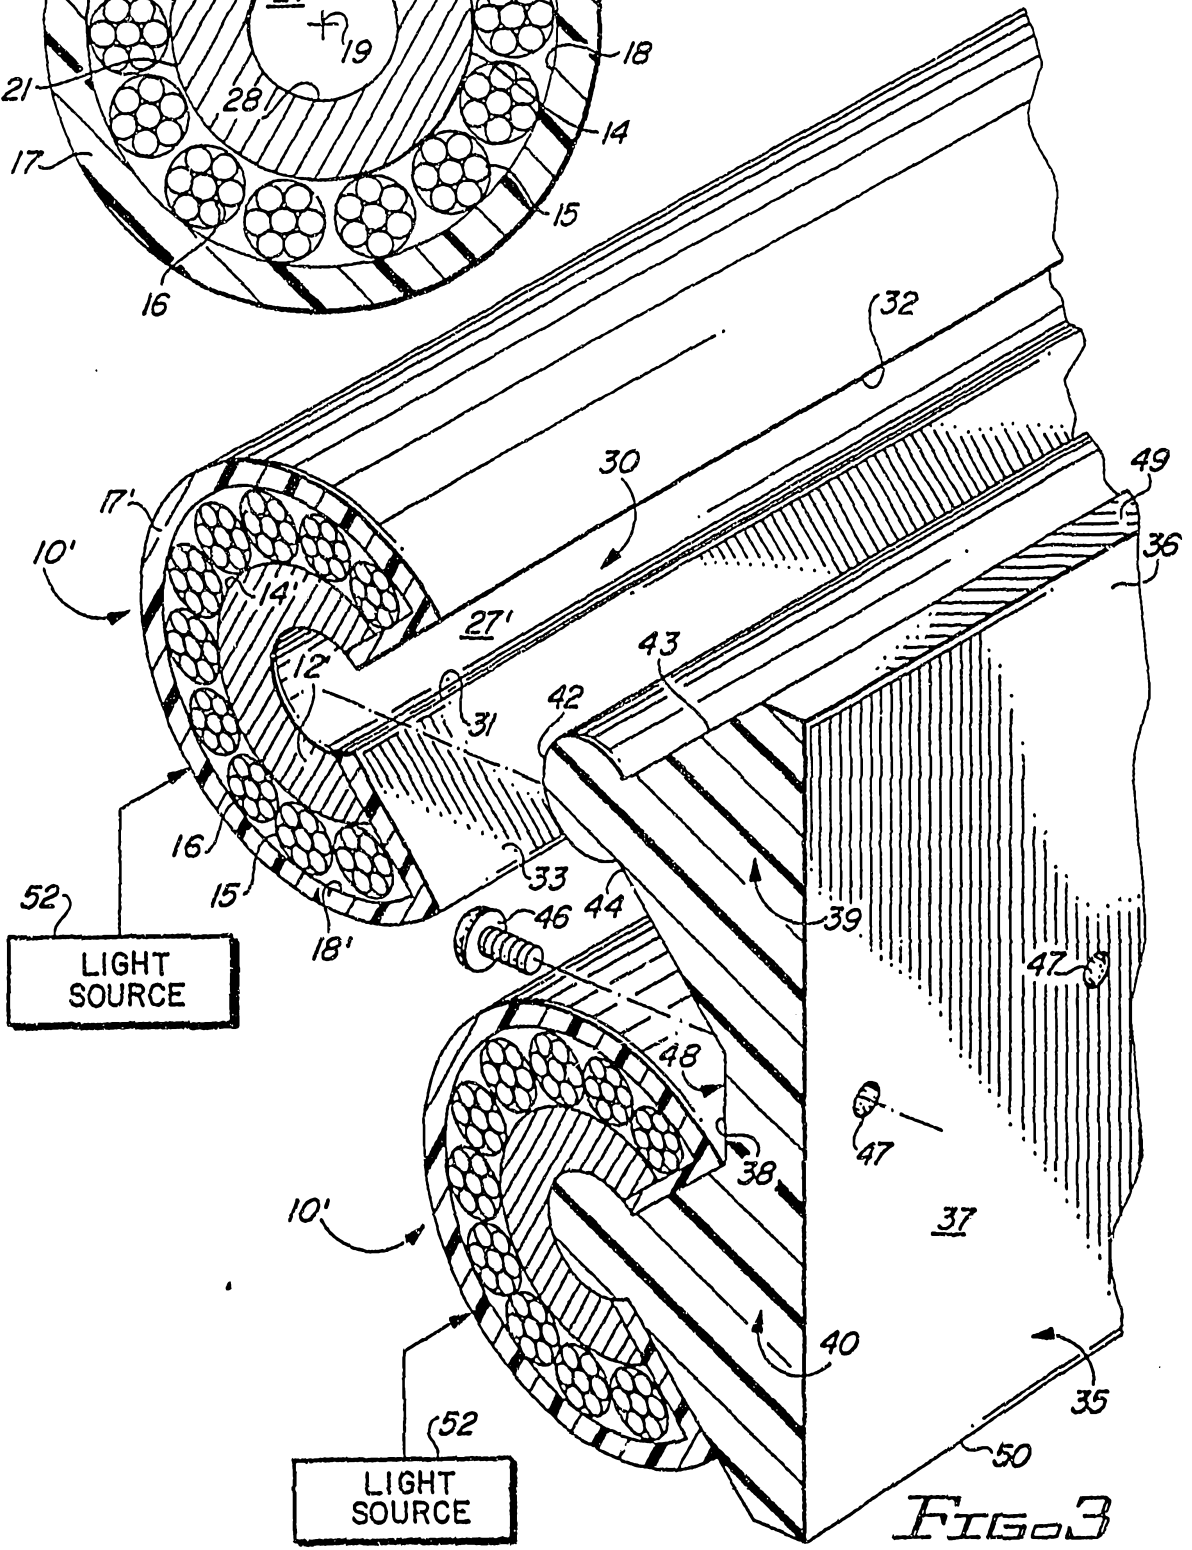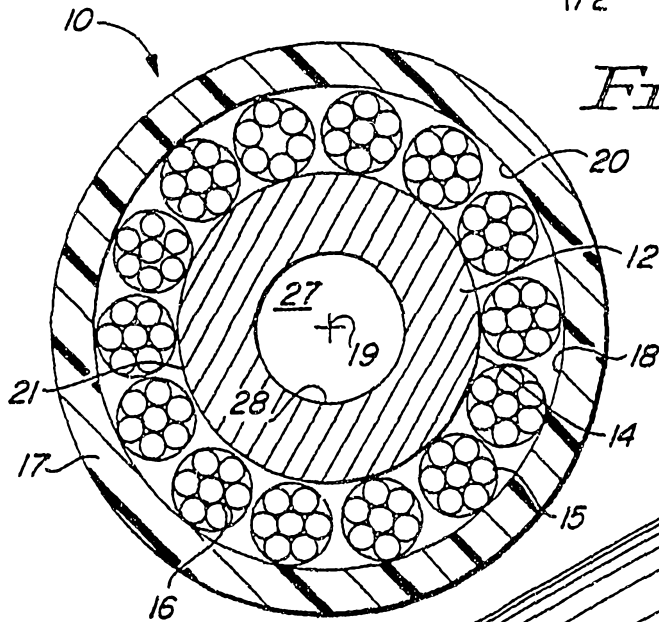

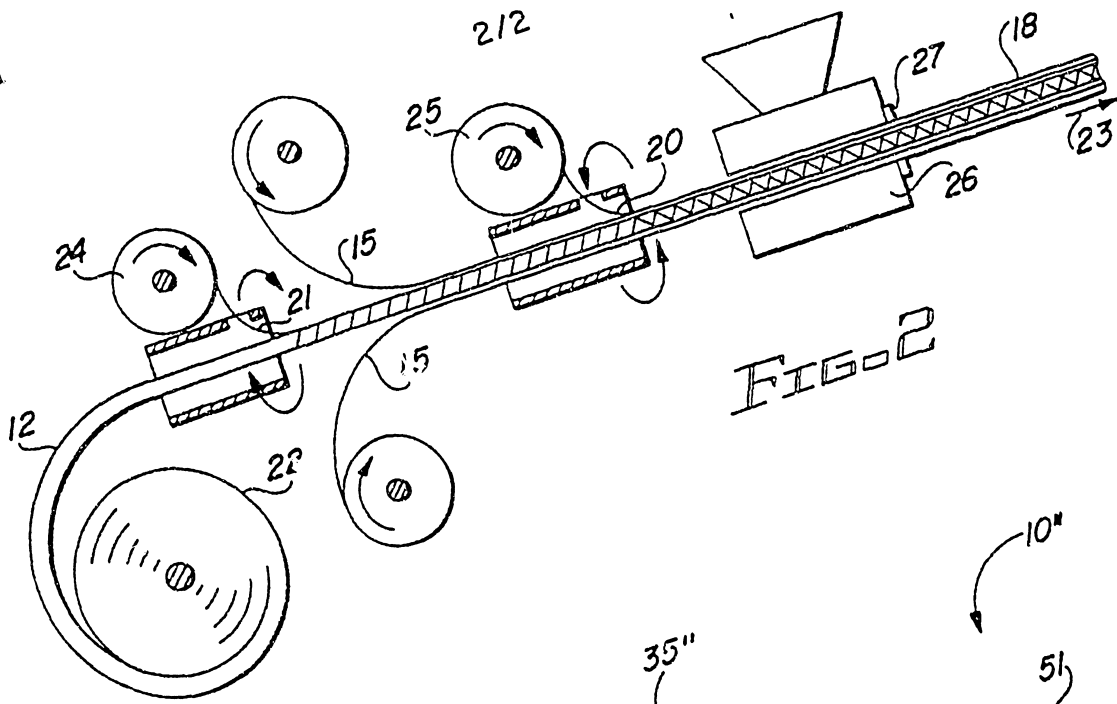


FIG-2

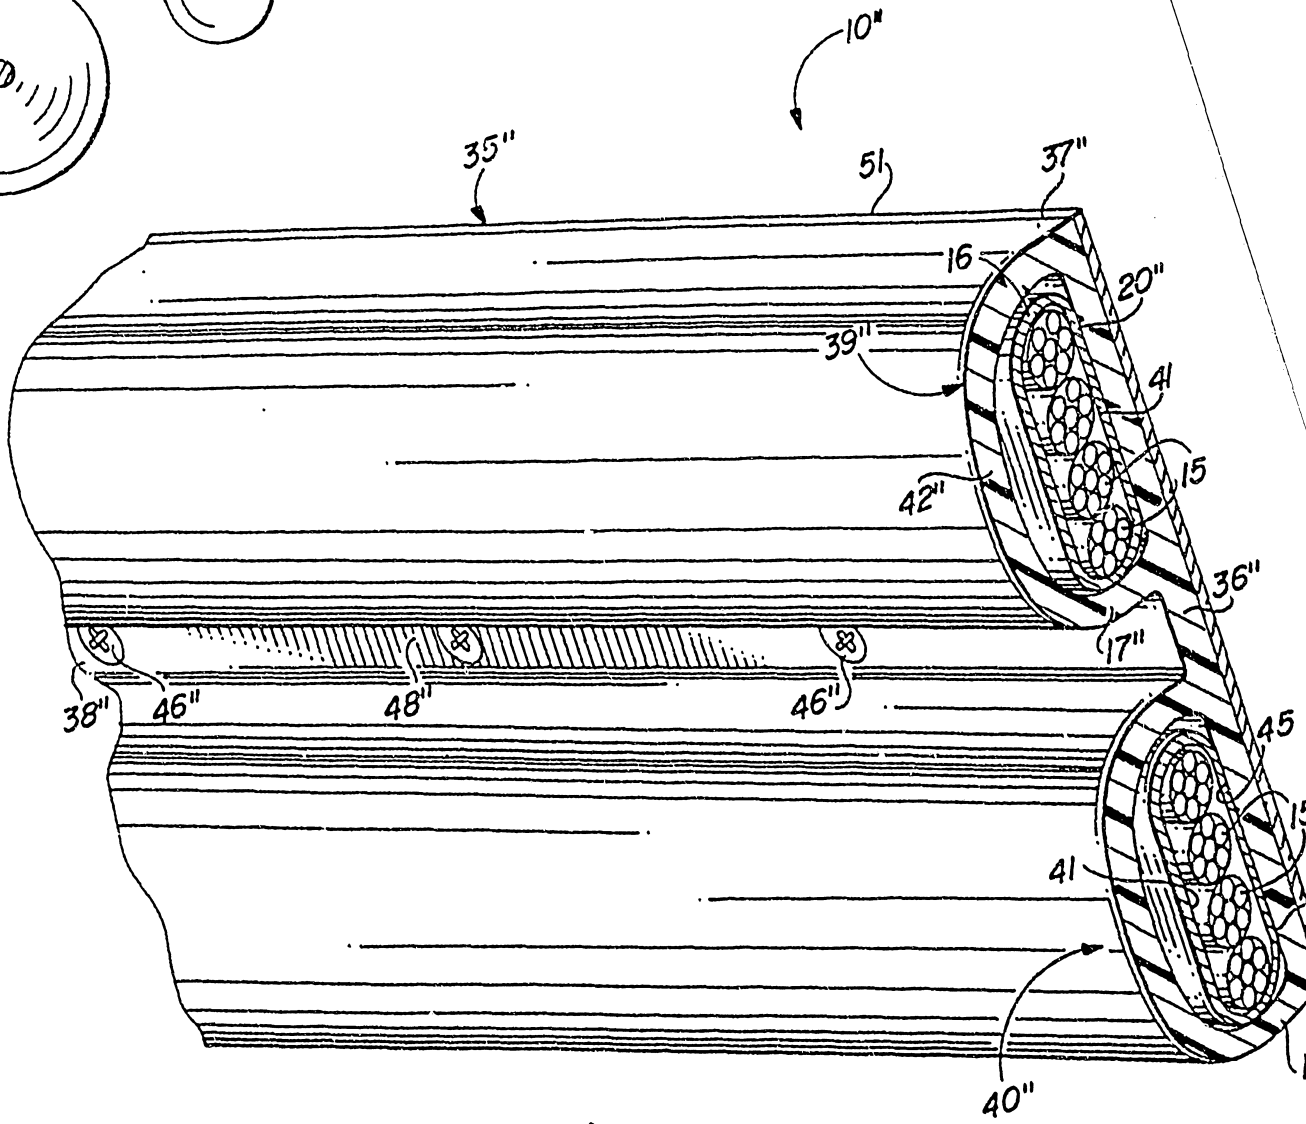


FIG-4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/05677

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : G02B 6/44; F21V 7/04

US CL : 385/102, 104, 106, 901; 362/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 385/100, 102, 104, 106, 112, 115, 901; 362/32

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5,122,933 (Johnson) 16 June 1992, Figs. 3-4 and column 2, line 62 to column 3, line 40.	1, 7, 12
A, P	US, A, 5,222,795 (Hed) 29 June 1993, see the entire document	1, 7, 12
A	US, A, 3,535,018 (Vasilatos) 20 October 1970, see the entire document.	1, 7, 12
A	US, A, 4,744,631 (Eichenbaum et al.) 17 May 1988, see Figs. 2-3 and columns 5-7.	1, 7, 12
A	US, A, 4,763,984 (Awai et al.) 16 August 1988, see the entire document.	1, 7, 12
A	US, A, 4,825,341 (Awai) 25 April 1989, see Figs. 4-5 and columns 4-5.	1, 7, 12

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z*	document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

13 JULY 1994

Date of mailing of the international search report

27 JUL 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

FRANK GONZALEZ

Telephone No. (703) 308-4881

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/05677

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5,016,152 (Awai et al.) 14 May 1991, see the entire document.	1, 7, 12
A	US, A, 4,922,385 (Awai) 01 May 1990, see Figs. 4-5 and columns 4-5.	1, 7, 12
A	US, A, 4,933,815 (Parthasarathy) 12 June 1990, see Figs. 1-6 and columns 2-4.	1, 7, 12

INTERNATIONAL SEARCH REPORT

Int. .ational application No.
PCT/US94/05677

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS

search terms: ((fiber# or fibre#)(2a)(cable#)) (p) (illuminat? (p) reflectiv?)