



US010314377B2

(12) **United States Patent**
Stephens

(10) **Patent No.:** **US 10,314,377 B2**

(45) **Date of Patent:** **Jun. 11, 2019**

(54) **LUNCH BOX WITH WORKING SURFACE**

(56) **References Cited**

(71) Applicant: **Rick Stephens**, Chicago, IL (US)

U.S. PATENT DOCUMENTS

(72) Inventor: **Rick Stephens**, Chicago, IL (US)

3,459,359 A	8/1969	Heffernan
4,889,257 A	12/1989	Steffes
D328,550 S	8/1992	Mogil
D340,387 S	10/1993	Melk
D340,621 S	10/1993	Melk
D340,840 S	11/1993	Melk
5,354,131 A	10/1994	Mogil
5,403,095 A	4/1995	Melk
D368,387 S	4/1996	Bureau
D371,052 S	6/1996	Melk
D373,514 S	9/1996	Melk
D382,771 S	8/1997	Mogil
D382,772 S	8/1997	Mogil
D387,249 S	12/1997	Mogil
D391,121 S	2/1998	Melk
D394,552 S	5/1998	Melk
5,915,580 A	6/1999	Melk
5,924,303 A	6/1999	Hodosh

(73) Assignee: **CALIFORNIA INNOVATIONS INC.**
(CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 455 days.

(21) Appl. No.: **14/732,181**

(22) Filed: **Jun. 5, 2015**

(65) **Prior Publication Data**

US 2016/0355319 A1 Dec. 8, 2016

(51) **Int. Cl.**

<i>A45C 13/26</i>	(2006.01)
<i>A45C 11/20</i>	(2006.01)
<i>A45C 13/00</i>	(2006.01)
<i>A45C 13/02</i>	(2006.01)
<i>A45C 13/12</i>	(2006.01)
<i>A45C 7/00</i>	(2006.01)

(52) **U.S. Cl.**

CPC *A45C 13/26* (2013.01); *A45C 11/20* (2013.01); *A45C 13/005* (2013.01); *A45C 13/02* (2013.01); *A45C 13/126* (2013.01); *A45C 2007/0004* (2013.01); *A45C 2013/026* (2013.01)

(58) **Field of Classification Search**

USPC 220/592.01, 592.03, 592, 810, 847, 220/DIG. 10; 206/541, 810
See application file for complete search history.

(Continued)

Primary Examiner — James N Smalley

Assistant Examiner — Madison L Poos


(74) *Attorney, Agent, or Firm* — Ostrolenk Faber LLP

(57)

ABSTRACT

A soft-sided insulated container assembly has a generally box-shaped form like a school lunch box, having a main body and a lid. The lid is formed of one of the largest panels of the box-structure, and is joined to the main body of the box by a hinge that lets the lid lie flat next to the main body when the box is open. The inside face of the lid then defines a work surface on which to place objects such as foodstuffs and beverages. The work surface may be formed in a substantially rigid molded stiffener member, and may be divided into sub-regions with raised retainers to discourage sliding of objects where not precisely level. The container assembly may include a rigid internal liner with which the lid may mate zipperlessly. The mating portion of the lid may be formed in the same rigid member as the work surface.

19 Claims, 15 Drawing Sheets

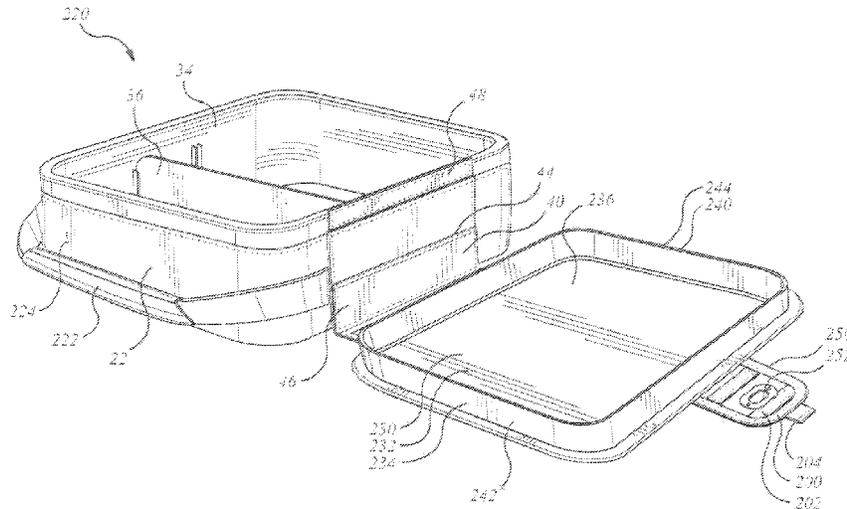

(56)

References Cited

U.S. PATENT DOCUMENTS

5,950,834	A *	9/1999	Woodnorth	A45C 11/20 206/541	8,043,004	B2	10/2011	Mogil	
D419,770	S	2/2000	Mogil		8,061,159	B2	11/2011	Mogil	
D421,366	S	3/2000	Mogil		8,096,442	B2	1/2012	Ramundi	
6,067,816	A	5/2000	Hodosh		8,191,747	B2	6/2012	Pruchnicki	
6,068,402	A	5/2000	Freese		8,348,510	B2	1/2013	Mogil	
6,073,796	A	6/2000	Mogil		8,459,058	B2	6/2013	Mogil	
6,092,661	A	7/2000	Mogil		8,640,937	B2	2/2014	Pruchnicki	
6,116,045	A	9/2000	Mogil		8,646,970	B2	2/2014	Mogil	
D435,968	S	1/2001	Mogil		8,777,045	B2	7/2014	Mitchell	
D436,342	S	1/2001	Lopez		8,857,654	B2	10/2014	Mogil	
D436,442	S	1/2001	Mogil		8,899,071	B2	12/2014	Mogil	
6,234,677	B1	5/2001	Mogil		9,408,445	B2	8/2016	Mogil	
6,237,776	B1	5/2001	Mogil		9,422,099	B2	8/2016	Mitchell	
6,238,091	B1	5/2001	Mogil		2001/0010312	A1	8/2001	Mogil	
6,247,328	B1	6/2001	Mogil		2001/0039807	A1	11/2001	Mogil	
D446,937	S	8/2001	Mogil		2002/0043076	A1	4/2002	Hodosh	
D452,075	S	12/2001	Mogil		2002/0126920	A1	9/2002	Mogil	
D453,625	S	2/2002	Mogil		2003/0198408	A1	10/2003	Mogil	
6,363,739	B1	4/2002	Mogil		2004/0035143	A1	2/2004	Mogil	
6,439,389	B1	8/2002	Mogil		2004/0136621	A1	7/2004	Mogil	
6,481,239	B2	11/2002	Mogil		2005/0072181	A1	4/2005	Mogil	
6,513,661	B1	2/2003	Mogil		2005/0103044	A1*	5/2005	Mogil	A45C 11/20 62/457.7
6,582,124	B2	6/2003	Mogil		2005/0117817	A1	6/2005	Mogil	
6,644,063	B2	11/2003	Mogil		2005/0205459	A1	9/2005	Mogil	
6,821,019	B2	11/2004	Mogil		2007/0237432	A1	10/2007	Mogil	
7,162,890	B2	1/2007	Mogil		2008/0245096	A1*	10/2008	Hanson	A45C 11/20 62/457.2
7,597,478	B2	10/2009	Pruchnicki		2010/0116830	A1	5/2010	Mogil	
7,669,436	B2	3/2010	Mogil		2010/0282763	A1	11/2010	Mogil	
7,682,080	B2	3/2010	Mogil		2011/0127274	A1	6/2011	Mogil	
7,757,878	B2	7/2010	Mogil		2013/0341338	A1*	12/2013	Mitchell	A45C 11/20 220/592.2
D620,707	S	8/2010	Mogil		2014/0345314	A1*	11/2014	Cox	A45F 3/46 62/440
D627,199	S	11/2010	Pruchnicki		2015/0296940	A1*	10/2015	Tseng	A45C 5/14 190/114
7,841,207	B2	11/2010	Mogil						
D635,828	S	4/2011	Pruchnicki						
7,988,006	B2	8/2011	Mogil						

* cited by examiner

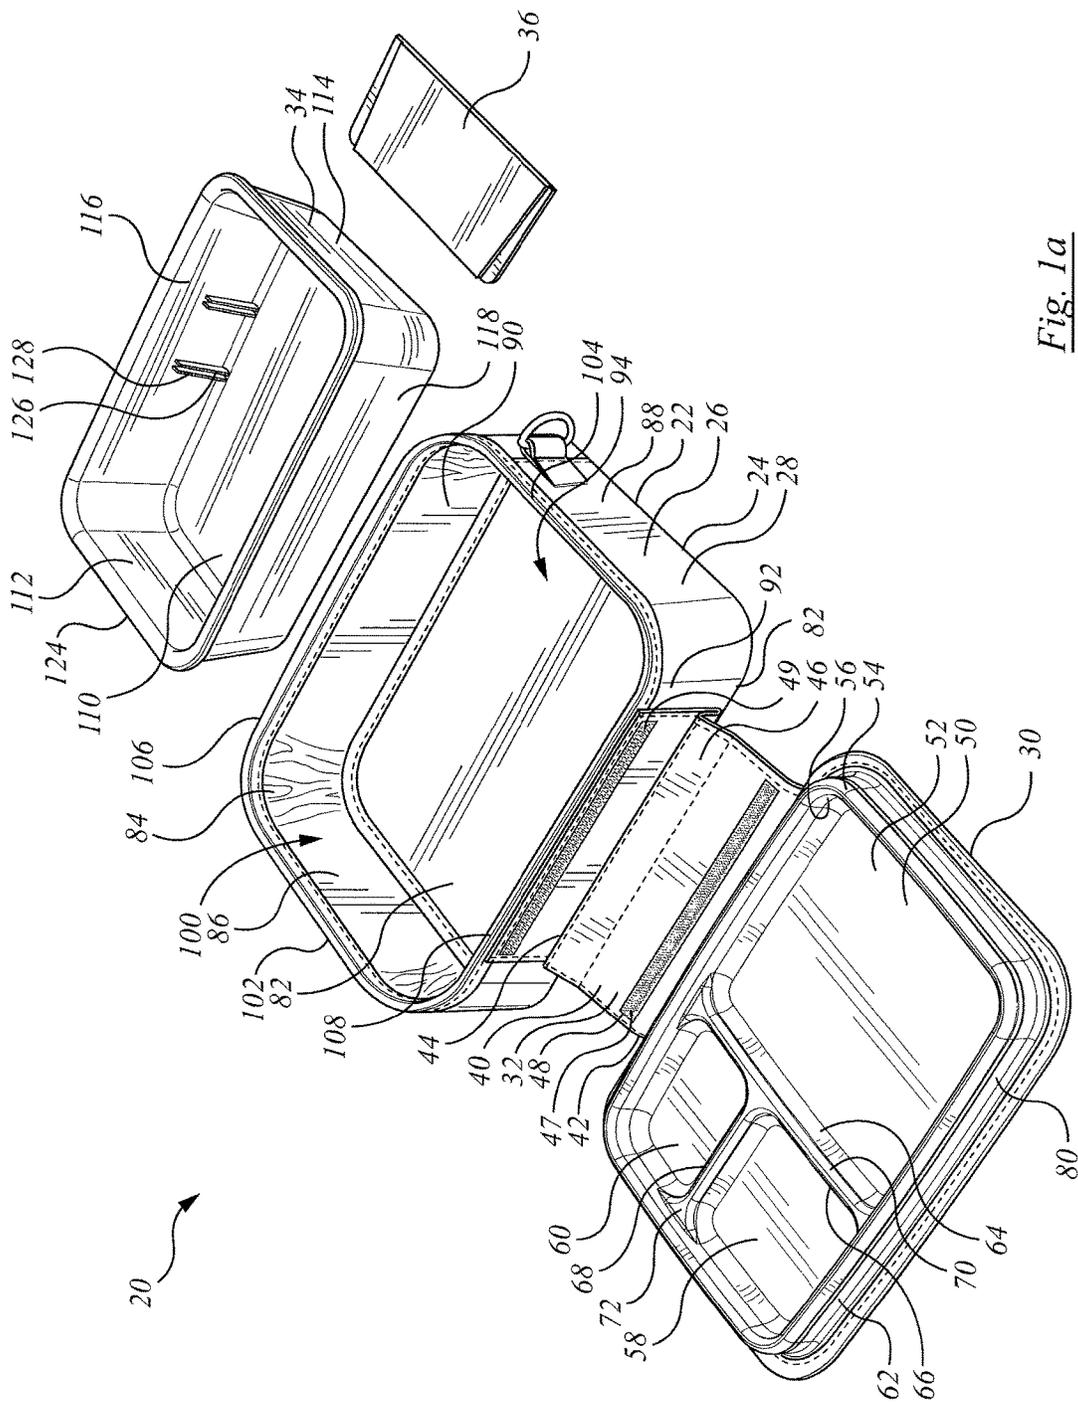


Fig. 1a

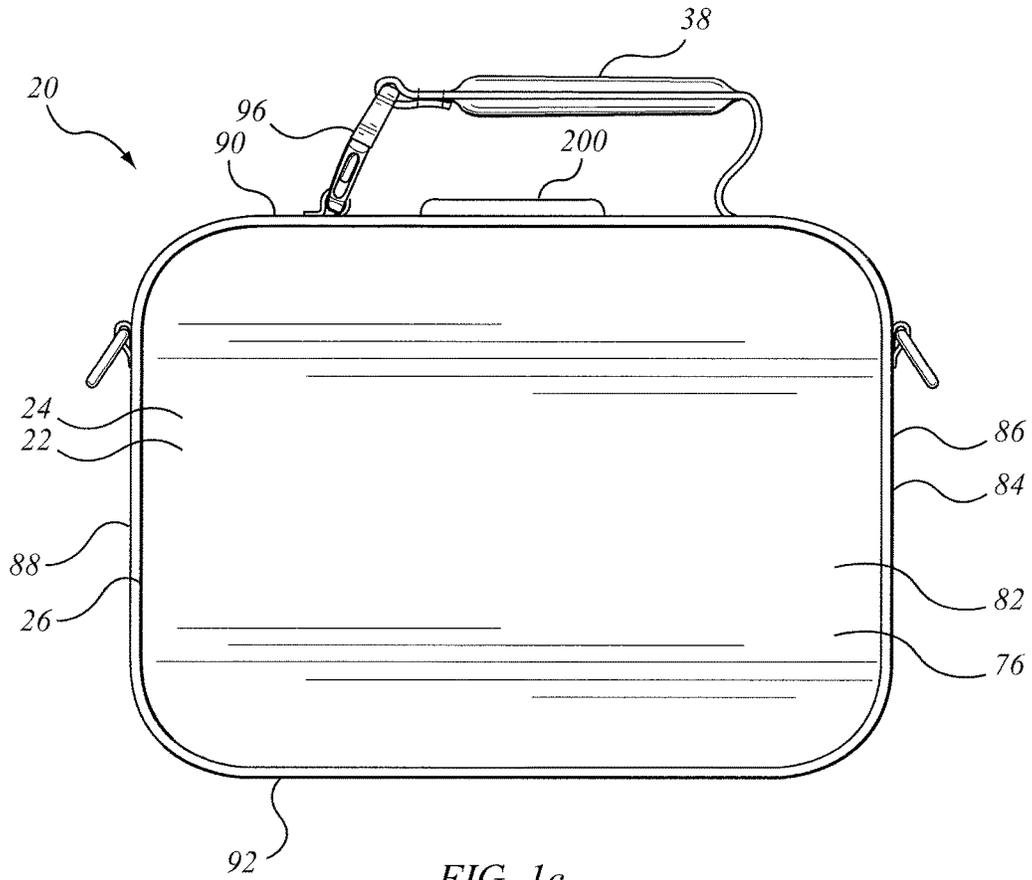


FIG. 1c

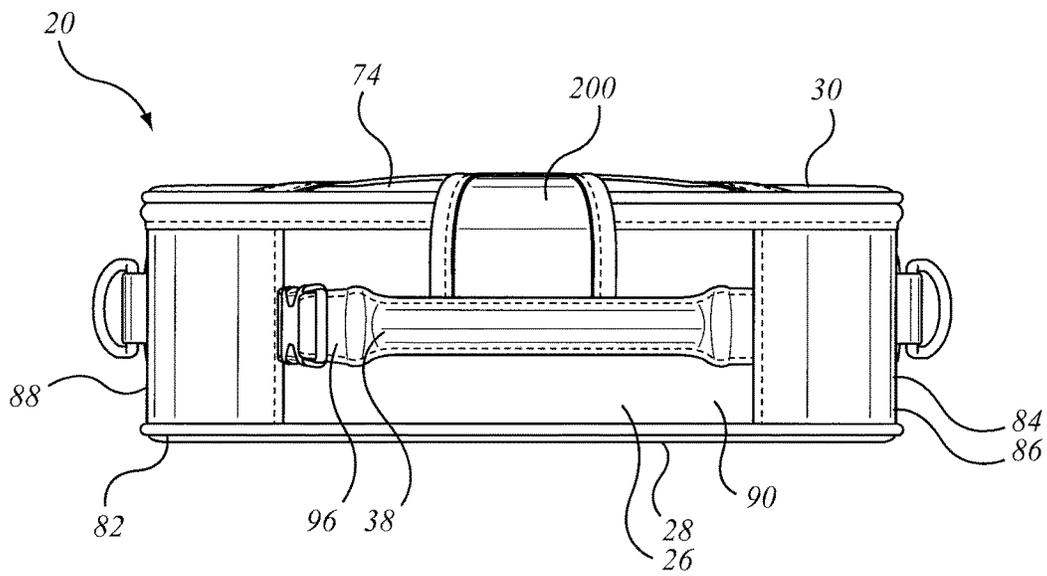


FIG. 1d

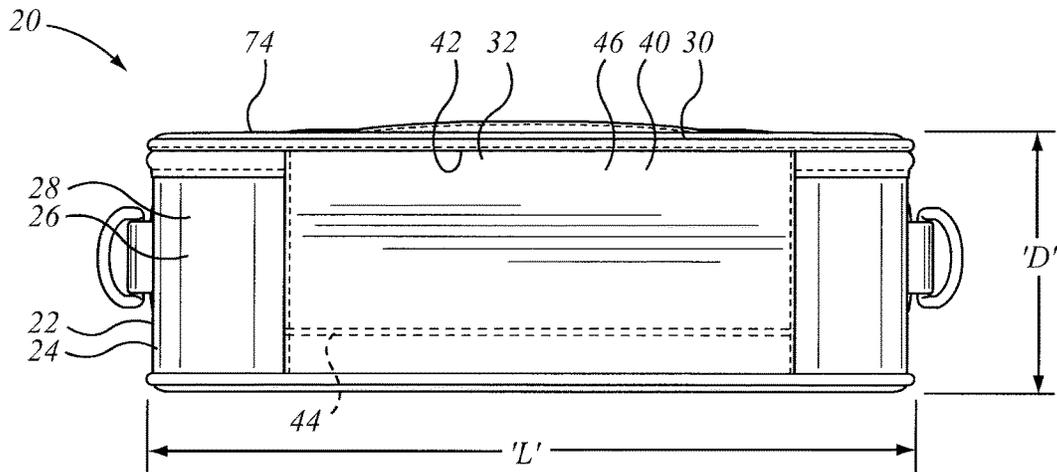


FIG. 1e

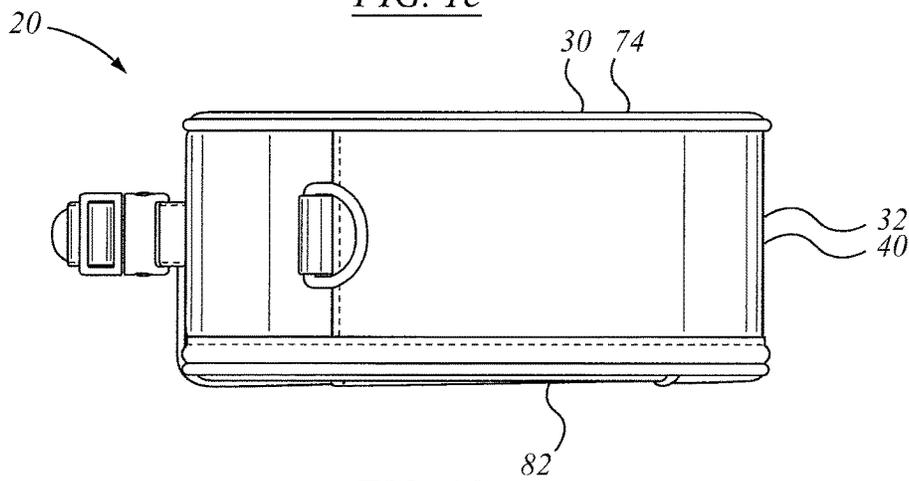


FIG. 1f

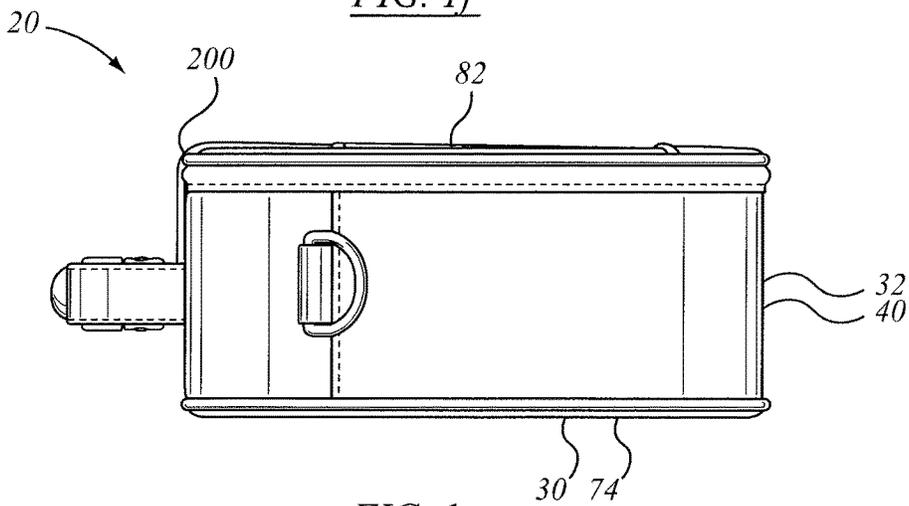


FIG. 1g

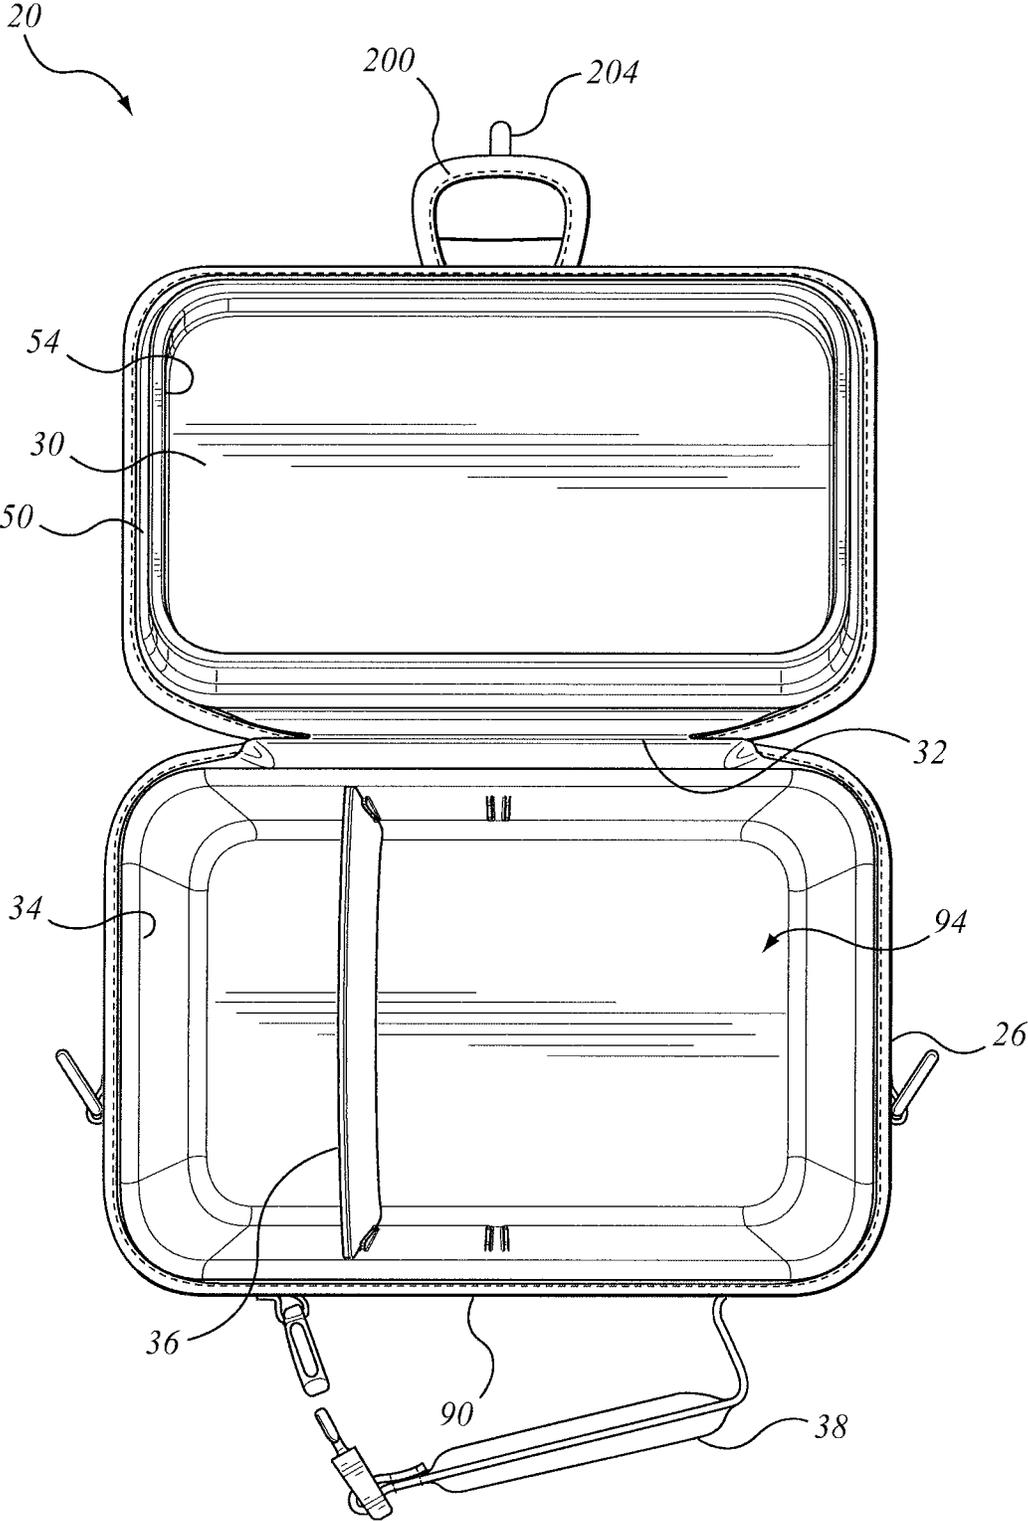


FIG. 1h

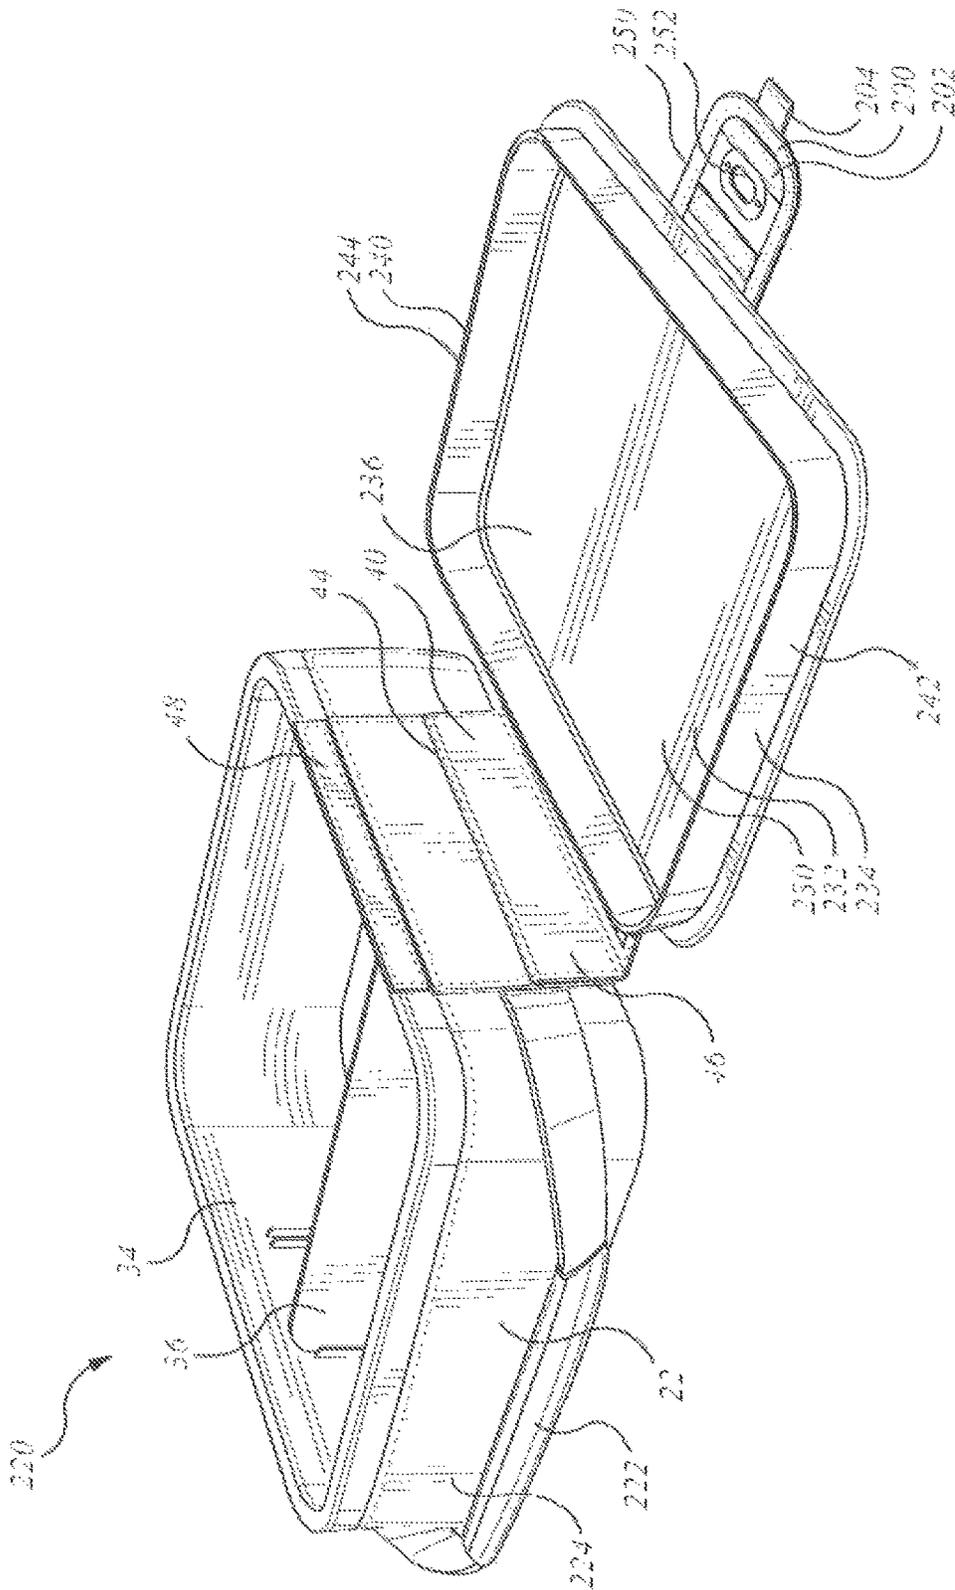


FIG. 2a

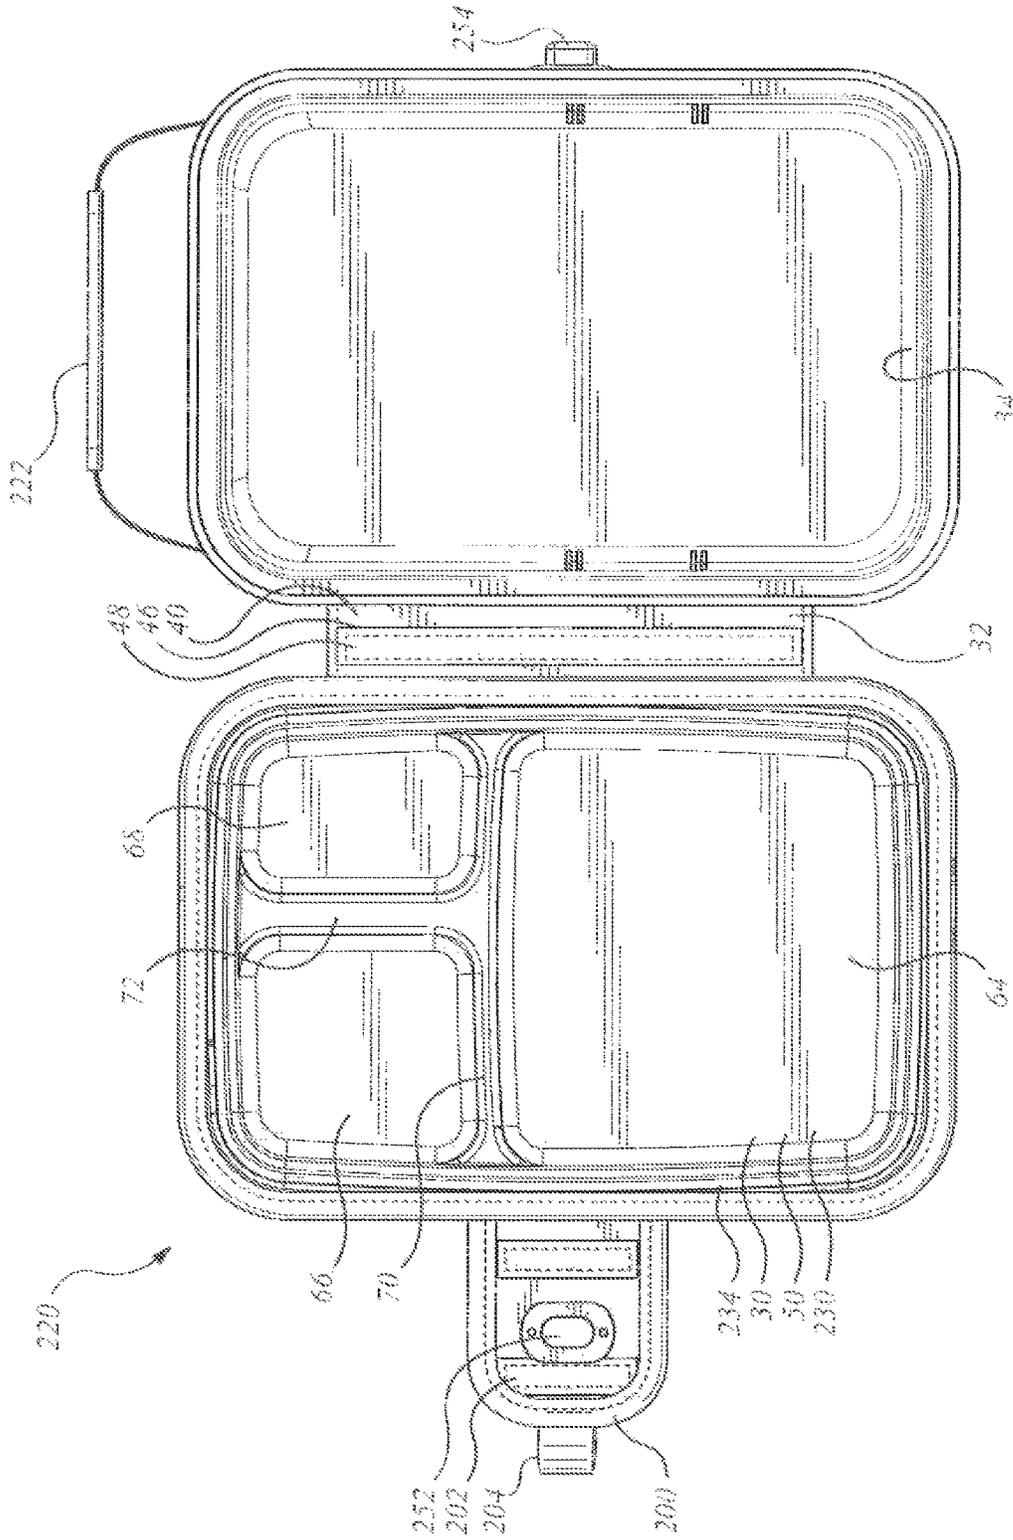


FIG. 2b

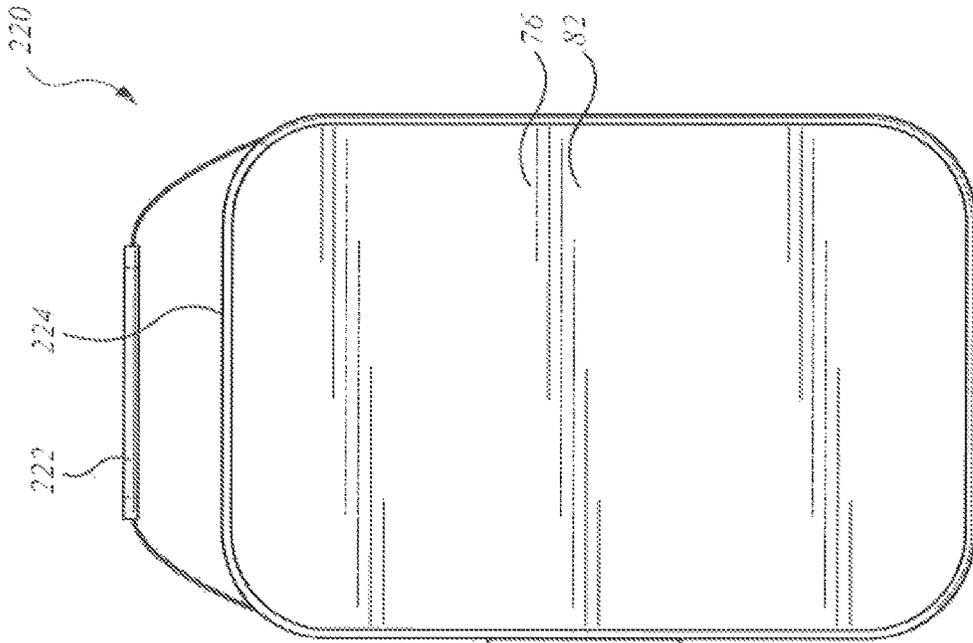


FIG. 2d

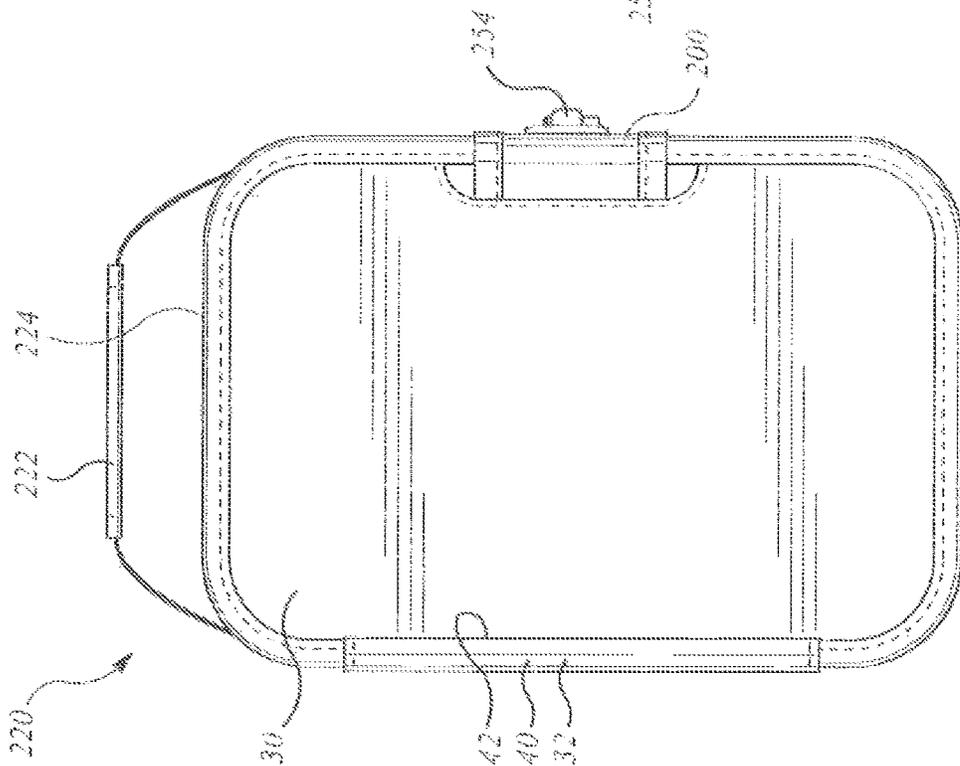


FIG. 2c

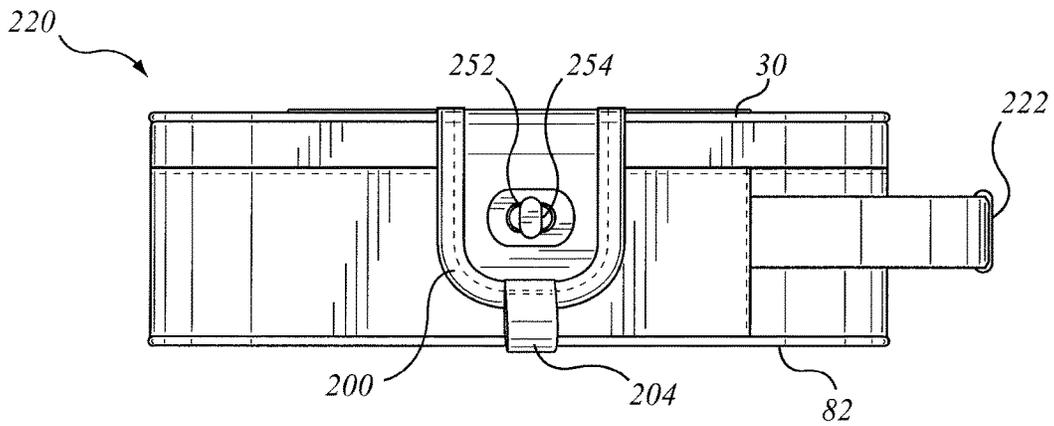


FIG. 2e

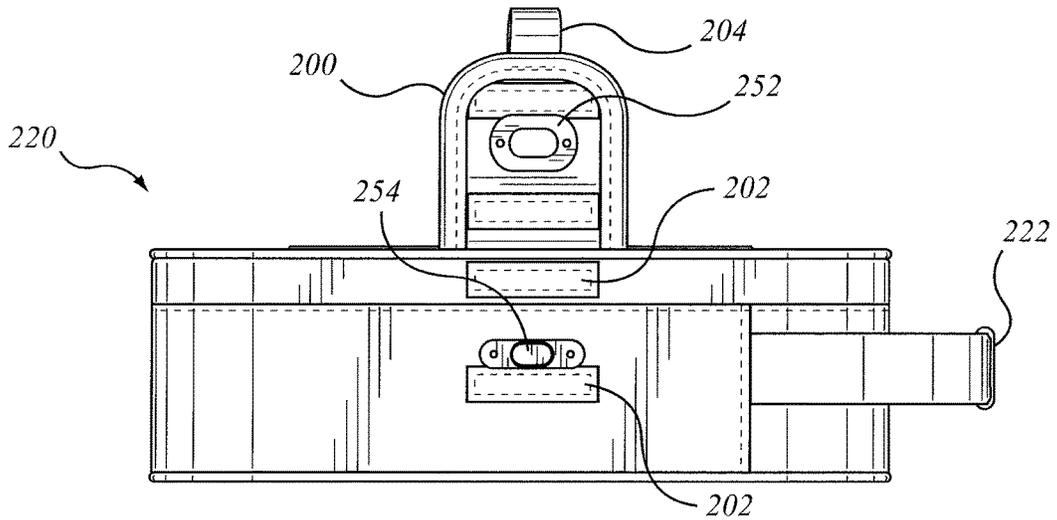


FIG. 2f

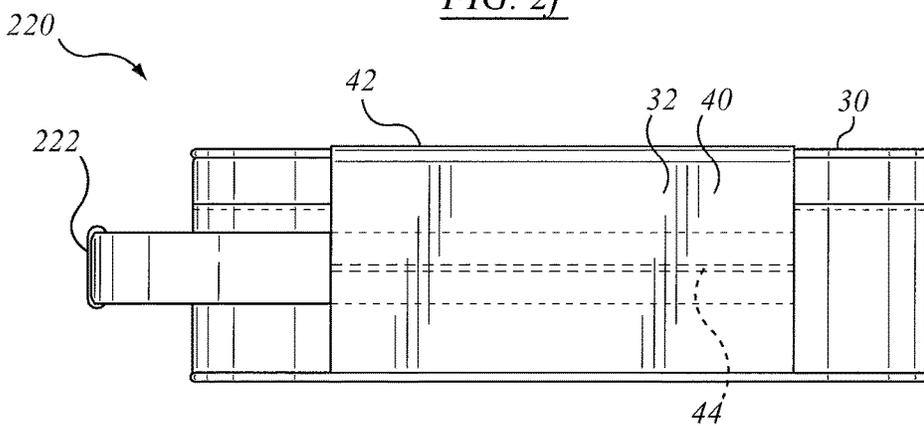


FIG. 2g

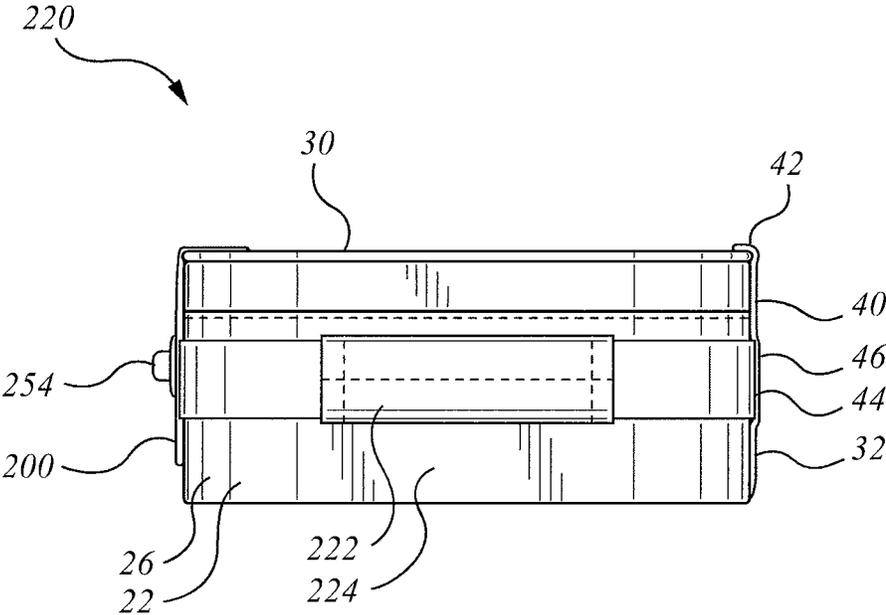


FIG. 2h

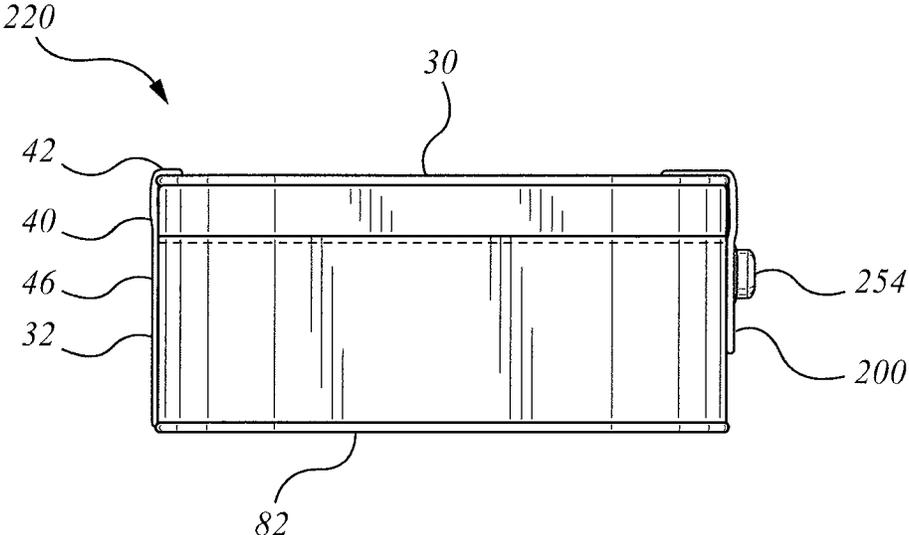


FIG. 2i

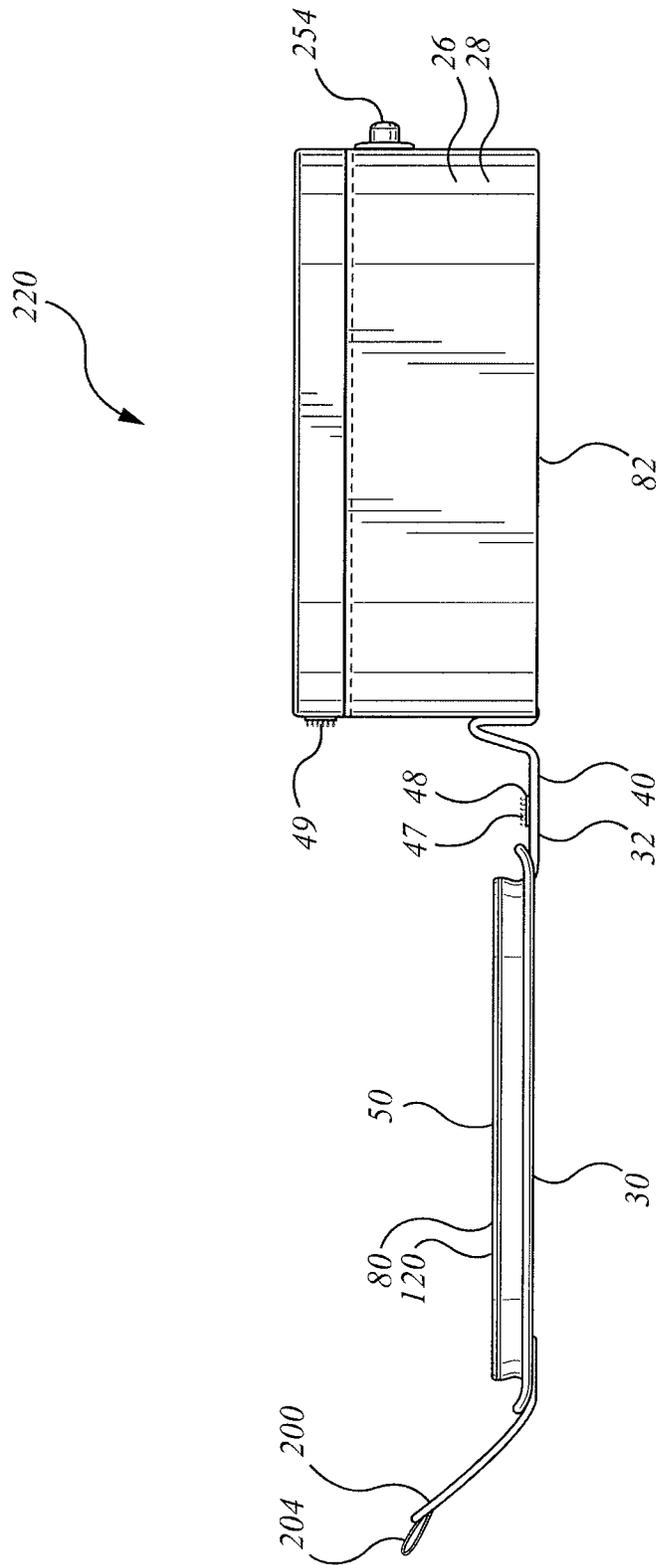


FIG. 3a

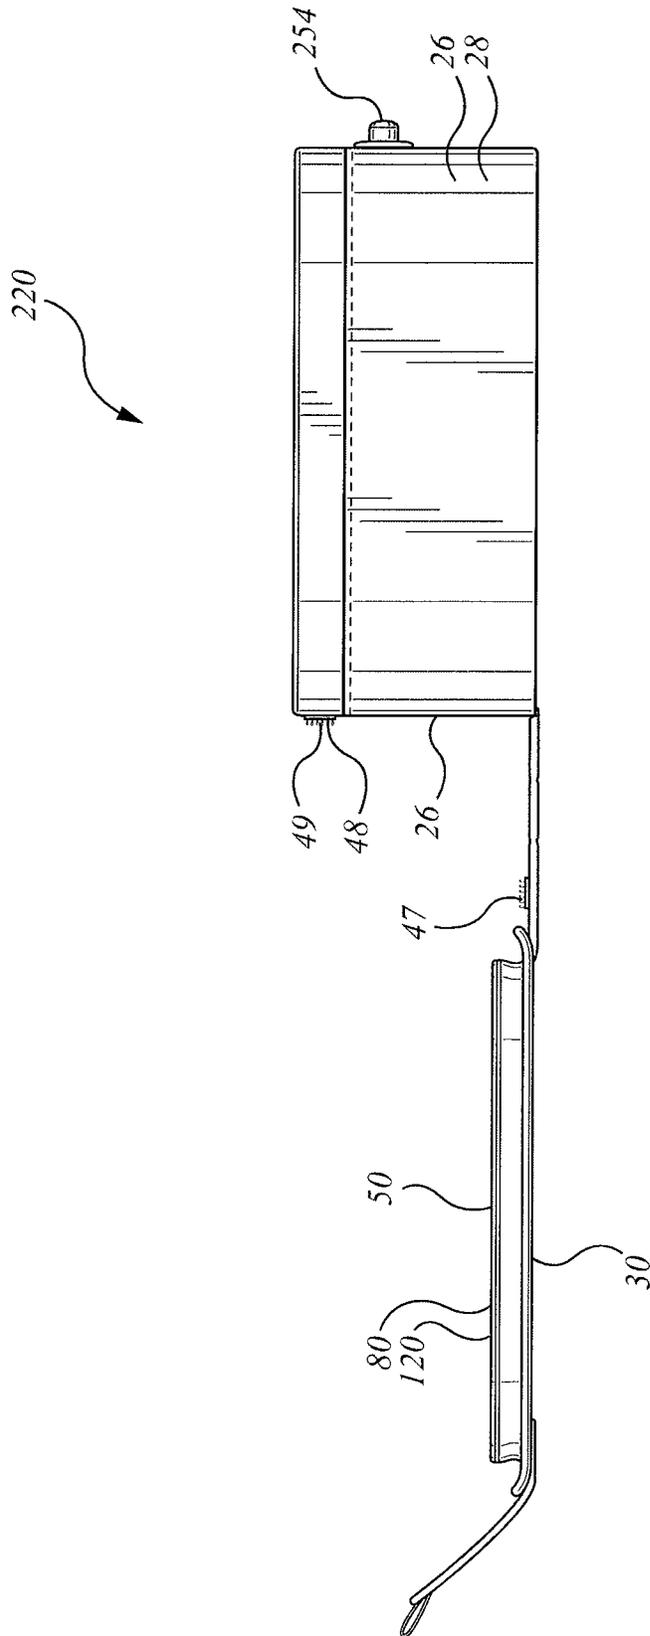


FIG. 3b

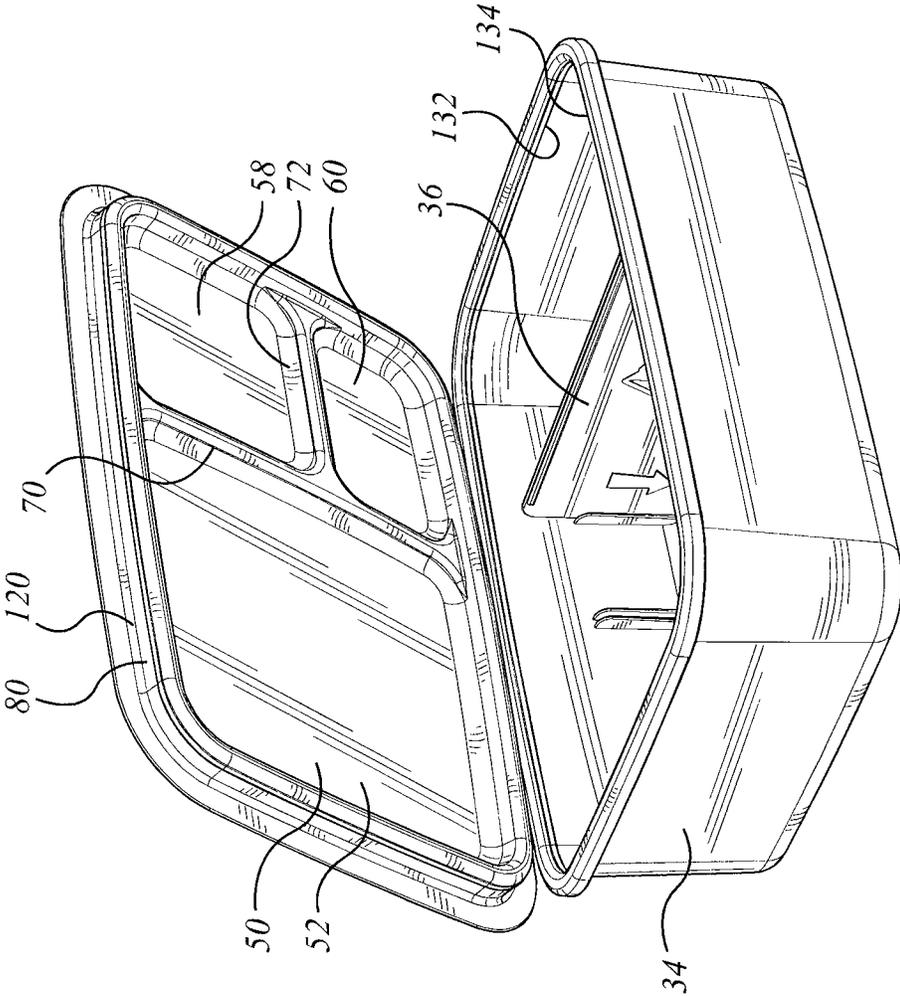


FIG. 4a

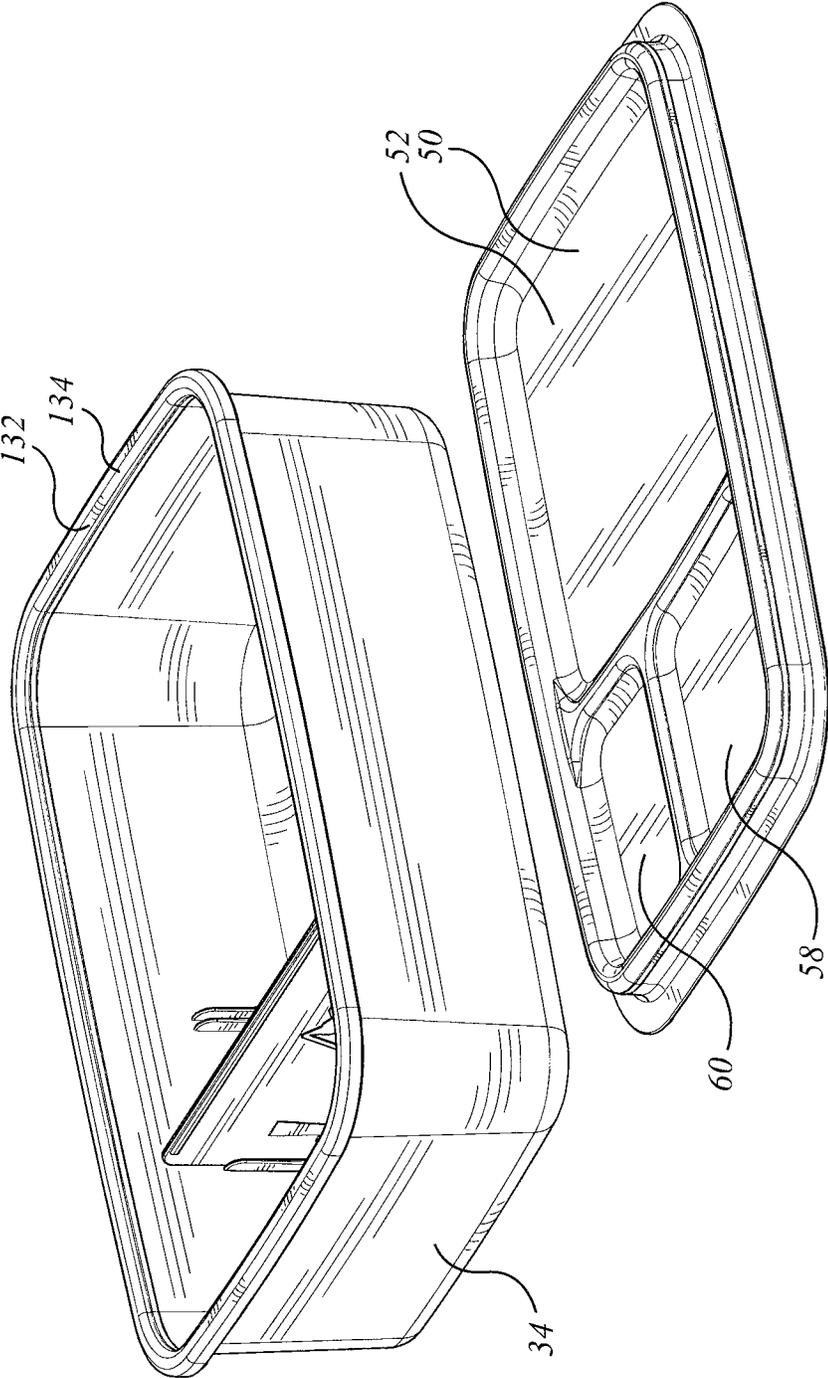


FIG. 4b

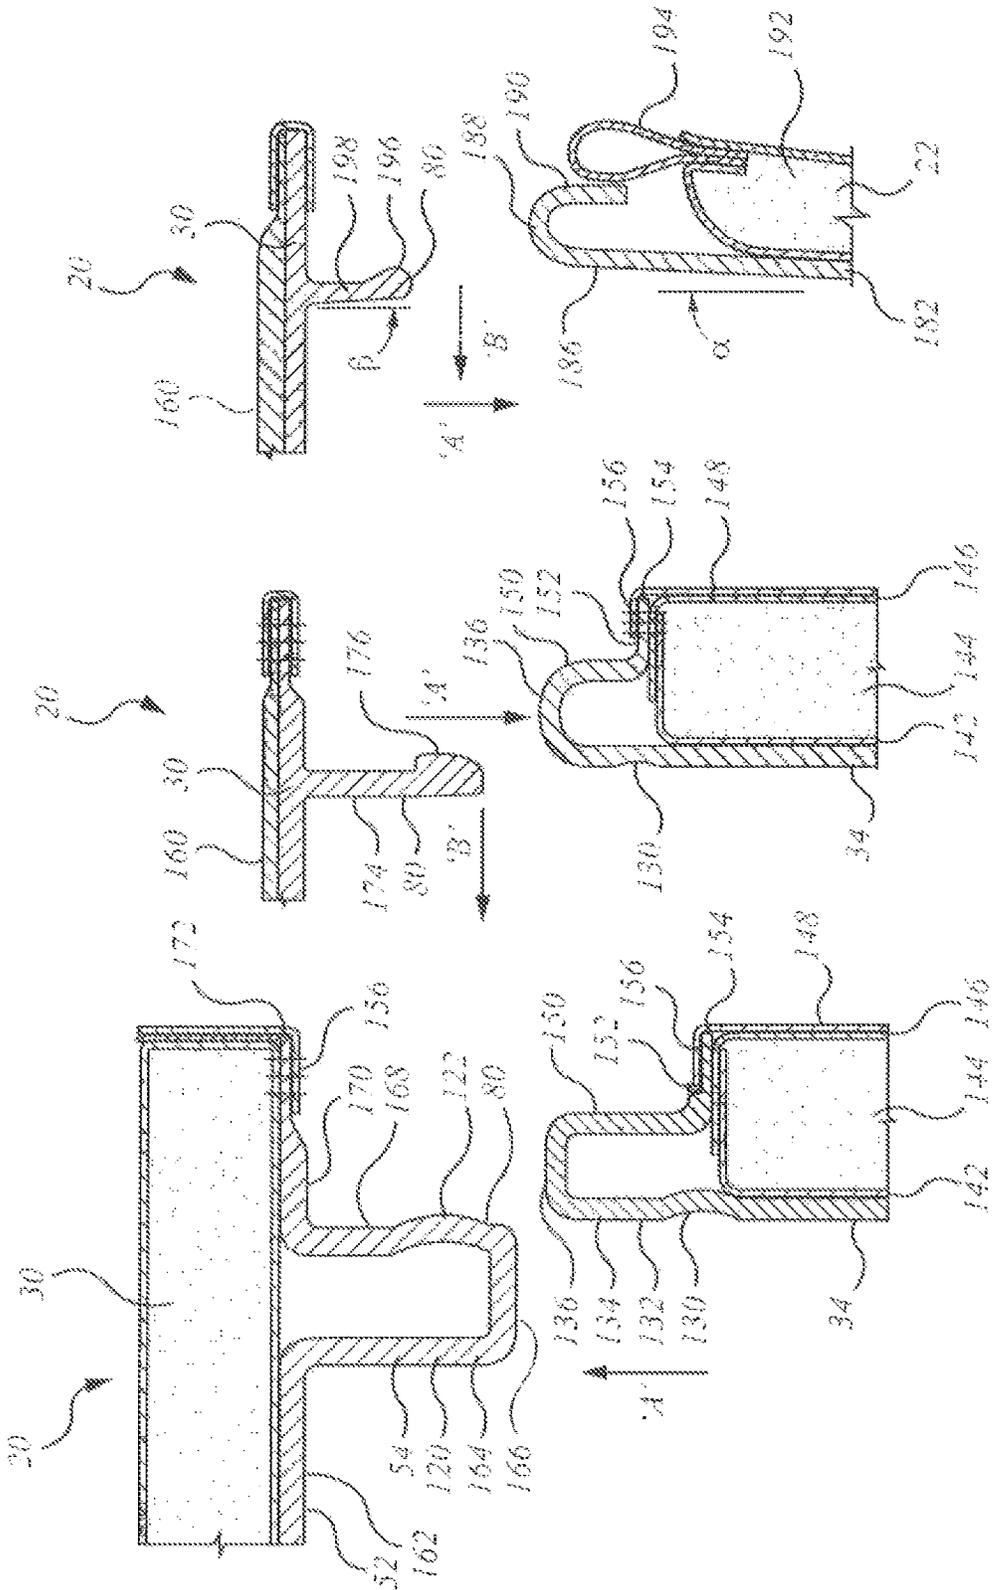


FIG. 5a

FIG. 5b

FIG. 5c

LUNCH BOX WITH WORKING SURFACE

FIELD OF THE INVENTION

This invention relates to the field of insulated portable
containers.

BACKGROUND OF THE INVENTION

Soft-sided insulated containers may be used to transport
articles that may best be served cool, such as beverages or
salads, or warm, such as appetizers, hot dogs, and so on.
Such containers are also used to carry liquids, whether hot
liquids, such as soup containers, coffee or tea, or cold liquids
such as beer, soft drinks, or other carbonated beverages,
juices and milk. The containers are typically made in a
generally cube-like shape, whether of sides are of equal
length or not, having a base, four upstanding walls, and a
top. The top wall is often a lid which opens to permit articles
to be placed in, or retrieved from, the container.

In soft-sided insulated containers heretofore, the main
closure of the lid has tended to depend on the closing of a
zipper, often a zipper running around three sides of a
rectangle, with the fourth side being hinged. The lid may rest
on a foam lip or bead. When a container of this nature falls
over, its resistance to the spilling of liquid through the
closure may not be as effective as might be desired. It might
be advantageous to have a somewhat tighter seal, such as
might be made by stiffer materials in an interference fit. A
soft-sided panel would not normally be sufficiently stiff to
achieve such a seal. The use of a seal in this nature might
also permit the elimination of the main peripheral zipper of
the main closure of the container.

Soft-sided insulated containers can also be used as lunch
containers or lunch boxes. Such containers may be used by
school children to transport their lunch or snacks or other
objects to school, to camp, or on field trips. When an object
is removed from the container, it may be that it would be
convenient to have some place to rest that object. For
instance, parents may be concerned about the cleanliness of
school lunchrooms and not want their children's food to
come into contact with unclean surfaces or surfaces touched
by other children. It may also be that one wishes to have a
clean surface for placing a piece of fruit or a sandwich, or
a surface for cutting a lime or lemon. For whatever reason,
it may be desirable to have a place for resting objects. It
may also be convenient for that resting place to be firm, such
that objects placed upon it may be less prone to wobble or tip,
and for that resting place to be washable such that it may be
wiped clean with a cloth should drinks or other objects be
spilled on it. Further still, it may be convenient for that
resting place to be such as may discourage, or limit, the
extent to which objects may slide if the surface is not
precisely level, as may be the case at a picnic, at a sporting
venue, at the beach, or in a moving vehicle such as a school
bus.

Furthermore, children are sometimes inattentive with
their belongings. It may be desirable to limit the number of
items they have to remember to transport to and from school.
Providing a working surface on which to place objects that
is secured to their lunch container may prevent loss or
misplacement of the working surface.

SUMMARY OF THE INVENTION

In an aspect of the invention there is a soft-sided insulated
box-shaped lunch container having an attached lid movable
to an open position lying flat next thereto.

In a feature of that aspect of the invention, the lid has an
inside surface that faces upward when the lid is in the open
position. The inside surface is formed to define a work
surface having an object retainer. In an additional feature,
the lid includes a stiffened member. The stiffened member is
formed to define the work surface. In another additional
feature, the object retainer includes a raised relief feature
formed in the stiffened member. In another feature, the lid
includes a stiffened member, the stiffened member is formed
to define a work surface and a raised retaining rim of the
work surface, the upwardly facing inside surface of the lid
including the work surface. In a further additional feature,
the stiffened member has a plurality of sub-regions of the
stiffened member having raised retainers.

In another feature, the container has a length and a width,
and a through thickness. The through thickness is less than
each of the length and the width. The container has a main
body having a base and an upstanding peripheral side wall.
The main body has a peripheral margin to which the lid
mates in a closed position. In the open position the lid lies
at a level shy of the margin. In a further feature, in the open
position the lid lies adjacent to the base. In another feature,
the container has a body, the lid is secured to the body by a
flexible securement. In another feature, the flexible secure-
ment is a flexible hinge running along a margin of the lid. In
still another feature, the container has a depth dimension,
and the hinge has a reach equal to at least half of the depth.
In still another feature, the hinge has a reach corresponding
to the depth, and the hinge includes a web member having
a first margin joined to the lid and a second margin joined
to the body adjacent to a base of the body. The web is
movable to a flat position intermediate the lid and the body
when the lid is in the open position. In another feature, the
hinge is joined to the body along a first margin, and has a
releaseable attachment by which the hinge is releasably
securable to the body. The releasable attachment is interme-
diate the first margin and the lid. In still yet another feature,
the container has a body and a rigid liner mounted within the
body. The lid has a formed member matable with the rigid
liner in an interference fit.

In another feature, the container has a length and a width,
and a through thickness, the through thickness is less than
each of the length and the width. The container has a main
body having a base and an upstanding peripheral side wall.
The main body has a margin distant from the base to which
the lid mates in a closed position. A rigid liner is mounted
within the body. The lid is joined to the body by a flexible
hinge. The flexible hinge has a first connection along a
margin of the lid and a second connection along the body.
The hinge has a reach at least half as great as the through
thickness of the body. The lid has a rigid formed member.
The rigid formed member including a first region defining a
first work surface. The first work surface faces upwardly
when the lid is in the open position. The rigid formed
member has at least a first raised retainer formed therein
about at least a first region of the first work surface.

In another feature, the second connection of the hinge is
along a margin of the base, and the hinge has a releasable
securement intermediate the first connection and the second
connection. In another feature, the rigid formed member of
the lid is matingly engageable with the rigid liner in an
interference fit when the lid is in a closed position.

In another aspect of the invention there is a container
assembly that includes a soft-sided insulated wall structure
and a flexible attachment member. The soft-sided insulated
wall structure includes a top wall, a bottom wall and a
peripheral wall running about the bottom wall. The periph-

eral wall extends upwardly away from the bottom wall and has an upper margin distant from the bottom wall. The flexible attachment member has a first end and a second end, the first end fixed to an attachment portion of the insulated wall structure. The top wall is connected to the second end of the flexible attachment member. The top wall includes an outer surface and a substantially rigid inner member. The top wall is movable between an open position and a closed position. In the closed position, the top wall, the bottom wall and the peripheral wall define an inner volume in which to receive objects. In the open position, the flexible attachment member extends away from the soft-sided insulated wall structure and allows the bottom wall and the outer surface of the top wall to concurrently lie flat such that the substantially rigid inner member of the top wall defines a work surface.

In a feature of that aspect, the container has a substantially rigid liner. The substantially rigid liner fits closely, i.e., snug, within the outer wall structure, and occupies substantially all of the inner volume. The liner has a peripherally extending rim defining a land. The substantially rigid inner member of the top wall includes a peripherally extending engagement member that includes a stiffened member. The stiffened member is operable on closing of the top wall to engage the land of the substantially rigid liner. The co-operable peripherally extending engagement member of the top wall and the land of the substantially rigid liner define a closure of the assembly, the closure so defined are zipperless. In another feature, the top wall is a substantially planar lid of the assembly. The substantially rigid inner member of the top wall includes a raised member extending out-of-plane relative to the substantially planar lid. The raised member sub-divides the working surface into sub-sections.

In another feature, the top wall has a tab extending outwardly from a second edge portion thereof, the second edge portion are opposite the first edge portion. The extending tab has a keyway extending therethrough and a releasable tab fastener on an underside thereof, the keyway adjacent to the releasable tab fastener. The peripheral wall has a tab securement fitting mounted thereon for matingly engaging the releasable tab fastener and a key adjacent to the tab securement fitting, the key are movable between a locked position and an unlocked position. In the closed position of the top wall, the releasable tab fastener is aligned with the tab securement fitting and the key is aligned with the keyway of the extending tab. When the key is in the unlocked position the key passes through the keyway and the releasable tab fastener is matingly engaged with the tab securement fitting, and when the key is in the locked position the key is unable to pass through the keyway.

In another aspect of the invention, there is a container assembly that includes a soft-sided insulated container and a substantially rigid liner. The container has a soft-sided wall structure having a top wall, a bottom wall, left and right hand short sidewall portions, first and second long sidewall portions, and a flexible attachment member. The bottom wall is substantially rectangular. The bottom wall has first and second short side edges, and first and second long side edges. The first and second long sidewall portions adjoin the first and second long side edges and extend upwardly away from the bottom wall. The left and right hand short sidewall portions adjoin the first and second short side edges and extend upwardly away from the bottom wall. The first and second long side wall portions and the left and right hand short side wall portions co-operate to define a peripheral wall running about the bottom wall. The peripheral wall has an upper margin distant from the bottom wall and a midpoint halfway between the upper margin and the bottom wall. The

flexible attachment member having a first end and a second end, the first end the first end fixed to a portion of the peripheral wall below the midpoint. The top wall is generally rectangular. The top wall has an edge portion connected to the second end of the flexible attachment member. The top wall is movable between an open position and a closed position. In the closed position the bottom wall, top wall, left and right hand short sidewall portions, and first and second long sidewall portions define an internal volume there-within. The substantially rigid liner occupies substantially all of the internal volume. It has a mouth having a peripherally extending rim defining a land. The top wall includes an outer surface and a substantially rigid inner member that includes a peripherally extending engagement member that is a stiffened member. The stiffened member is operable on closing of the top wall to engage the land of the substantially rigid liner. In the open position, the flexible attachment member allowing the outer surface of the top wall and the bottom wall to concurrently lie flat such that the substantially rigid inner member of the top wall defines a work surface on which to place objects. The co-operable peripherally extending engagement member of the top wall and the land of the substantially rigid liner define a closure of the assembly, the closure so defined is zipperless.

In still another aspect of the invention, there is a container assembly that includes a soft-sided insulated container and a substantially rigid liner. The container has a soft-sided wall structure having a top wall, a bottom wall, left and right hand short sidewall portions, first and second long sidewall portions, and a flexible attachment member. The bottom wall is substantially rectangular. The bottom wall has first and second short side edges, and first and second long side edges. The first and second long sidewall portions adjoin the first and second long side edges and extend upwardly away from the bottom wall. The left and right hand short sidewall portions adjoin the first and second short side edges and extend upwardly away from the bottom wall. The first and second long side wall portions and the left and right hand short side wall portions co-operate to define a peripheral wall running about the bottom wall. The flexible attachment member having a first end and a second end, the first end fixed to a portion of the bottom wall. The top wall is generally rectangular. The top wall has an edge portion connected to the second end of the flexible attachment member. The top wall is movable between an open position and a closed position. In the closed position the bottom wall, top wall, left and right hand short sidewall portions, and first and second long sidewall portions define an internal volume therewithin. The substantially rigid liner is sized to fit closely within the soft-sided wall structure such that the substantially rigid liner occupies substantially all of the internal volume. The substantially rigid liner has a mouth that includes a peripherally extending rim defining a land. The top wall includes an outer surface and a substantially rigid inner member, the substantially rigid inner member including a peripherally extending engagement member that includes a stiffened member, the stiffened member is operable on closing of the top wall to engage the land of the substantially rigid liner. In the open position, the flexible attachment member allowing the outer surface of the top wall and the bottom wall to concurrently lie flat such that the substantially rigid inner member of the top wall defines a work surface on which to place objects. The co-operable peripherally extending engagement member of the top wall

and the land of the substantially rigid liner define a closure of the assembly, the closure so defined is zipperless.

BRIEF DESCRIPTION OF THE DRAWINGS

These aspects and other features of the invention may be understood with the aid of the following illustrations of a number of exemplary, and non-limiting, embodiments of the principles of the invention in which:

FIG. 1a shows a perspective view of a container assembly in an open position;

FIG. 1b shows a front view of the container assembly of FIG. 1a;

FIG. 1c shows a rear view of the container assembly of FIG. 1a;

FIG. 1d is a top, or first long sidewall view of the assembly of FIG. 1a;

FIG. 1e is a bottom or second long side view of the assembly of FIG. 1a;

FIG. 1f shows a left hand side view of the container assembly of FIG. 1a;

FIG. 1g shows a right hand side view of the container of FIG. 1a;

FIG. 1h is a view of the container assembly of FIG. 1a in an alternate open position;

FIG. 2a is a perspective view of an alternate container assembly to that of FIG. 1a, in perspective view in an open condition;

FIG. 2b is a plan view of the container assembly of FIG. 2a in the open position;

FIG. 2c shows a front view of the assembly of FIG. 2a in a closed position;

FIG. 2d shows a rear view of the assembly of FIG. 2a in a closed position;

FIG. 2e shows a first long sidewall view of the assembly of FIG. 2a with a fastening tab in a closed position;

FIG. 2f shows a first long sidewall view of the assembly of FIG. 2a with the fastening tab in an open position;

FIG. 2g shows a second, opposite long-side view to that of FIG. 2e;

FIG. 2h shows a first short-end view of the container assembly of FIG. 2a;

FIG. 2i shows a second, opposite short-end view to that of FIG. 2h;

FIG. 3a shows an end view of the assembly of FIG. 2a in an open position;

FIG. 3b shows an end view of the assembly of FIG. 3a in an alternate open position;

FIG. 4a is a perspective view of the internal liner of the assembly of FIG. 2a;

FIG. 4b is another perspective view of the internal liner of the assembly of FIG. 2a;

FIG. 5a is a section showing engaging closure members of the container assembly of FIG. 1a;

FIG. 5b shows a section of an alternate set of engaging closure members to that of FIG. 1a;

FIG. 5c shows a section of an alternate set of engaging closure members to that of FIG. 1a;

DETAILED DESCRIPTION

The description that follows, and the embodiments described therein, are provided by way of illustration of an example, or examples of particular embodiments of the principles of the present invention. These examples are provided for the purposes of explanation, and not of limitation, of those principles and of the invention. In the

description, like parts are marked throughout the specification and the drawings with the same respective reference numerals. The drawings are not necessarily to scale and in some instances proportions may have been exaggerated in order to more clearly depict certain features of the invention. In the description and drawings herein, reference may be made to a cartesian co-ordinate system in which the vertical direction, or z-axis, extends in an up and down orientation from bottom to top. The x-axis extends in the shorter dimension of the container assembly, when fully expanded, running in the front-to-back direction. The y-axis extends cross-wise horizontally relative to the x-axis, running in the side-to-side direction. Unless noted otherwise, the terms “inside” and “outside”, “inwardly” and “outwardly”, refer to location or orientation relative to the enclosed spaces of the first and second portions of the container assembly, as may be.

The term “insulated” or “insulated wall structure” may be used in this description. It is intended to pertain to walls having a layer of thermal insulation. Typically such walls have an inner surface or lining or web, an outer surface or lining or web, and a layer of insulation material captured between the inner and outer surfaces. The outside layer may be a wear-resistant or scuff resistant material. Thin single membranes or sheets of web material, such as woven high density Nylon TM, or vinyl TM, or leather, or paper, or polyester or PEVA, are not of themselves intended to fall within the meaning of the term “insulated” as used herein unless they have been treated or formed in a manner deliberately to enhance thermal insulating properties.

A soft-sided insulated structure is one in which the insulated panels are flexible panels, typically in the form of fabric or plastic sheets with insulation inside. In some embodiments they may be like quilted panels. In some embodiments, a substantially rigid liner is mounted inside the soft-sided insulated structure to stiffen it. The liner is typically removable, although not always. In some embodiments stiffened battens may be mounted to the soft-sided panels. The battens may be removable, or may be permanent. A soft-sided insulated structure may be understood as being in contrast to a hard-sided insulated structure in which the wall structure may be a rigid molded structure.

Referring now to FIGS. 1a to 1h, by way of general overview, a container assembly is identified as 20. Container assembly 20 includes an outer casing 22 in the nature of a soft-sided, insulated wall structure 24. Container assembly 20 has a first or main portion, 26, identified as a main body, 28, and a second portion identified as a closure member or top or lid 30. Lid 30 is secured to main body 28 by an attachment member shown as hinge 32. Hinge 32 may be a flexible hinge, and may be a fabric hinge as described hereinbelow. Main body 28 may have a substantially rigid internal liner 34.

Container assembly 20 may be generally box-shaped. It may be of the size and shape of a child's school lunch box. Clearly it can be used for snacks at any time of day, and is suitable for use by more than merely children. Container assembly 20 may have a length ‘L’, a width ‘W’ (as seen in FIG. 1b) and a depth ‘D’ (as seen in FIG. 1e). Length ‘L’ may be taken as exceeding width ‘W’, and both may be greater than depth ‘D’. Although assembly 20 could be square in plan view, in some embodiments the dimensions may lie in the range of L:W of 3:2 (+/-25%), and L:D of 3:1 (+/-25%), and in one embodiment L:W:D of about 3:2:1 (all +/-25%), such that the inner liner may be a relatively shallow tray. In another embodiment, this ratio of L:W:D may be roughly 5:3:2 (all +/-25%), for the region enclosing the liner.

It may be noted that in the embodiment of FIGS. 1a-1h, the lifting member, i.e., handle 38, is mounted on one of the long sides of the box, such that when the lunch box is carried, the long dimension is fore-and-aft horizontal. In the embodiment of FIGS. 2a-2i, handle 222 is mounted on the short side, such that when the container is carried the long dimension is substantially or predominantly oriented up-and-down in the vertical direction. In either instance, while being carried the wall portion with handle 38, or handle 222 as may be, is the top panel, and the opposite side is the bottom. In either case, when the lunch box is to be opened it is typically placed with the large rear panel on a suitable surface, such that the rear panel may then be termed the bottom side. The large front panel then faces upwardly as the top side, and is then the lid which is movable between closed and open positions.

Attachment member 32 may have the form of a hinge, 40. Hinge 40 may have the form of a fabric or web hinge, and may be accordingly flexible. Hinge 40 may have a first margin or termination or edge, 42, that is connected to, or mounted to, or attached to, a margin of lid 30. Hinge 40 has a second margin, or termination, or edge, 44, that is connected to or mounted to or attached to main body 28 distant from lid 30. Hinge 40 may have a reach 46 defined between edges 42 and 44. That reach may be greater than half the depth (in the z-direction) of the box.

In a first embodiment, reach 46 may correspond to roughly half the depth, such that when lid 30 is opened, hinge 40 may fold back on itself and lid 30 may lie on the suitable supporting surface next to main body 28. In the open position, where the suitable surface is flat, the lid will also tend to lie flat, roughly at the same level as the bottom or rear panel of container assembly 20 more generally.

In a second embodiment reach 46 may be greater than half the depth, such that lid 30 may lie a bit away from main body 28. In another embodiment, reach 46 may be substantially equal to the depth of assembly 20 in the z-direction, such that reach 46 may fold out sideways from main body 28 with lid 30 distant therefrom.

In an optional embodiment, hinge 40 may include a releasable securement 48. Releasable securement 48 may be located intermediate edge 42 and edge 44. Releasable securement may have the form of a fabric fastening strip, of which one type is commonly known as Velcro™. Securement 48 may include a male strip 47 and a mating female strip, 49. It is substantially arbitrary which is which. One strip is mounted to reach 46; the other is mounted to main body 28. They are located near the upper margin of the peripheral wall of main body 28, such that when attached, lid 30 may tend approximately to pivot about, or close to, the upper edge of hinge 40. By contrast, when released, a greater length hinge 40 may hinge, permitting lid 30 to lie flat.

Lid 30

As may be noted, lid 30 is tethered to main body 28 by a securement in the nature of reach 46 of hinge 40, such as may tend to discourage the two parts from being separated, or lost. At the same time, lid 30 may lie flat. The outside surface of lid 30 may face downward and lie upon the suitable surface. The inside surface of lid 30 may tend to face upwardly, and in so doing, may present a surface upon which to place items. For example, it may be a surface upon which to rest one's sandwich, or soup, or canned drink, or fruit serving, and so on.

Lid 30 may include a stiffener member 50. Stiffener member 50 may include a first portion 52 that extends as a substantially planar layer or web. Stiffener member 50 may be substantially co-extensive with lid 30, generally, whether

lengthwise (in the x-direction side to side, parallel to hinge 40) or depth-wise (in the y-direction, front to back perpendicular to hinge 40), or both. First portion 52 may be substantially flat, and may present a work surface on which to rest objects, or upon which objects may be processed, as by cutting or slicing with a knife, or mixing in a bowl, and so on. Stiffener member 50 may have a retainer, or retainer array, 54, that extends about first portion 52. The retainer or retainer array may have the form of a raised member, or members that stand proud of first portion 52, such as may tend to discourage or to limit the range of sliding of objects placed on main portion 52. While a series of raised blisters or pegs may be used, in some embodiments it may be that retainer 54 may have the form of a raised peripheral wall or flange or rim, as at 56. It may be that there is more than one work surface portion such as item 52, or a work surface portion such as item 52 may be divided into two or more sub-regions. For example, there may be a second region 58, and a third region 60. It may be that all of first, second, and third regions 52, 58 and 60 are container within a common external peripheral retaining wall 62 of a first height, and individual first, second and third sub-dividing retainers as at 64, 66 and 68, which may be of a lesser height than wall 62. It may be that a first cross member 70 divides the work surface, or work surfaces across the body of stiffener member 50 in one direction, and a second cross-member 72 further subdivides the space. Cross-members 70 and 72 may be channel shaped in cross-section. Cross-members 70 and 72 may intersect. The side faces of cross-members 70 and 72 may define at least portions of members 64, 66 and 68. It may be that member 50 is a molded plastic member. That panel may have a scuff-resistant outer layer 76. The wall structure of lid 30 (when the unit is lying on its back) or front panel (when the unit is being carried), may be such that the outside surface of stiffener member 50 is covered by, or contained within, an insulated soft-sided panel 74. Alternatively, the front panel may omit the relatively thick insulated layer, and may employ a more skin-like covering, such as may be a grade of NYLON, whether sheet or woven, and indicated as 160 in FIG. 5b.

Lid 30 may also include a closure engagement member, or a closure engagement array, 80 for interaction with main body 28. It may be that the closure engagement member 80 may be a separate fitting, or it may be defined at least in part by retaining wall 62. Three embodiments of member 80 are shown in FIGS. 5a, 5b, and 5c, described below.

Structure and Fabrication of Outer Casing 22

In respect of outer casing 22, lower or main portion 26 may have a base wall, or rear wall 82, that may, when soft-sided insulated lunch box 20 is placed on a generally flat surface, lie flat on the ground. A peripheral wall 84 is joined about the four margins of base wall 82, and extends away therefrom. Peripheral wall 82 may include four sides or side panels, or side members. The bottom panel, or rear panel of base wall 82, may be an insulated wall. Base wall 82 and insulated wall panels, namely a pair of left and right hand side panels 86 and 88, a front panel 90, and a rear panel 92. The choice of nomenclature of front and rear, left and right, orientations is arbitrary. Each panel 82, 86, 88, 90 and 92 may be located at substantially right angles to two adjacent wall panels. The combination of panels defines a space or volume, or compartment 94. Panels 82, 86, 88, 90 and 92 may be fastened or joined or attached to one another by sewing, gluing or some other suitable fastening means. Alternatively, two or more panels (including the bottom panel) may be formed from a single piece of material having one or more folds therein to define the two or more panels.

In one embodiment, the front, bottom and rear panels may be made from a single piece of insulated material.

In one embodiment, the portions of the peripheral side wall, being panels **86**, **88**, **90** and **92** may each have an upper, or distal, edge **102**, **104**, **106** and **108**, respectively, which are also free edges, the four edges co-operating to define a container opening **100** through which receptacle **34** may be placed into compartment **94**. Lid **30** is hinged, or pivotally attached to main body **28**. Rather than employing a zipper (or, optionally, in addition to a zipper, if a zipper is desired), internal structural member **80** may tend to engage the mouth of receptacle **34** in a relatively tight interference fit, thus effectively securing lid **30** to inhibit heat transfer to and from compartment **94**.

In one embodiment, where base wall **40** may be substantially square in plan view, the four sides of peripheral wall **42** may be equal. In the general four-sided layout, the layout, whether square or not may be considered to have two opposed long sides (**90**, **92**) and two opposed short sides (**86**, **88**). Sides **86**, **88**, **90** and **92** may themselves be considered to be substantially rectangular, although they may also be trapezoidal. In any event, base wall **82** and side wall members **86**, **88**, **90** and **92** may co-operate to define a five-sided open topped box.

That is, container assembly **20** has a rear wall, namely base wall **82** that may also be a bottom wall when container assembly **20** is lying on its back, and a generally rectangular peripheral wall or sidewall **84** that has left hand and right hand short sidewall portions **90**, **92** and top (when carried) and bottom (when carried), first and second long sidewall portions **86**, **88** that co-operate to form the four-sided shape. A handle **38** is mounted to the top sidewall portion, i.e., first long sidewall portion **86**, to permit container assembly **20** to be hand carried. Handle **38** may have a detachable and re-attachable release member, such as quick release **96**, shown in separated condition in FIG.1*b*, and connected in FIG. 1*c*.

The front wall of container assembly **20** may also be the top, i.e., lid **30**, wall when container assembly **20** is lying on its back (i.e., base wall **40**) to be opened. The top panel, or lid **30**, has an internal structural member or substantially rigid liner member **70** for engagement with the upper portion of receptacle **32**, thereby acting as a closure member to control access to the enclosed chamber **38** defined within receptacle **32**. Internal structural member **70** has a peripherally extending seal member **72** for interferingly engaging the mouth of receptacle **32**. Lid **30** may tend to deter the egress of materials that might otherwise occur when container assembly **20** is inadvertently tipped over or jostled excessively energetically. Lid **30** may also include such features as may permit lid **30** to provide a relatively stiff surface upon which to place objects, such as, for example, foods or beverages.

When lid **22** is in a closed position, heat transfer may be inhibited to a greater extent. The insulative material may additionally be soft, such as resilient foam so that the container may tend not to damage, or be damaged by, objects with which it may come into contact. The outer facing layer of the panel (be it **82**, **88**, **88**, **90** or **92**) can be an outer skin in the nature of a canvas or Nylon™ covering layer for resisting abrasion. The inner face of the insulation layer can be covered by an inner skin in the nature of a flexible sheet, whether of vinyl™ or of plasticized metallic foil sheeting that is shiny and reflective. The metallic foil sheeting material may be the type sold under the name Thermo-Flect™. The inside of compartment **56** can be lined with white vinyl sheeting on its forward and bottom sides. If a

suitable plastic or other material or stain resistant surface coating or surface treatment is used, then outer casing **94** may also be readily cleaned to remove dirt and other debris acquired through use.

The Liner

The reinforcement member, or stiff wall structure, in the nature of a relatively, substantially, or predominantly rigid, resilient, molded plastic tub, or liner, indicated as receptacle **34** may typically be made of a molded high-density plastic. Receptacle **34** is removable from within wall structure **24**, to facilitate washing thereof. When receptacle **34** is in place, container portion **26** is intended to be maintained in the shape shown in the Figures, and is not intended to be collapsible.

Receptacle **34** may be rigid to provide a degree of protection to items stored therein from external forces caused, for example, by bumping, jostling, or knocking of container assembly **20** when it is transported or otherwise used. At the same time, receptacle **34** may tend to be sufficiently lightweight that it may not make container assembly **20** unduly heavy for a child to carry when container assembly **20** is filled with items such as sandwiches, snacks and juice boxes. A relatively tough plastic is preferred because it may tend to resist breakage, it can contain melting ice and spilled liquids, and it may be readily cleaned.

Likewise, receptacle **34** may have a first or main or bottom or base panel **110** and a side wall **98** having side portions **112**, **114**, **116** and **118** that correspond respectively to sides **86**, **88**, **90** and **92** of receptacle **34**.

Insulated container main portion **26** may include a divider or partition **36**. Outer casing **22** defines a has a relief or accommodation, or chamber, or space, or compartment in which to receive receptacle **34**, and receptacle **34** has a seat, or a plurality of choices of seats into which a partition or partitions **36** may be placed. Partition **36** may be used to separate items placed within receptacle **34**. A closure member such as lid **30**, attached to outer casing **22**, may be used to govern access to the inside of container assembly **20**, lid **30** being movable between a first, or closed, position, and a second or open position. FIG. 1*a* shows container assembly **20** with lid **30** in an open position. A lifting member, or carrying member, such as a strap or grip or handle **38** may be attached to outer casing **22** to facilitate transport of container assembly **20**.

Liner walls **112**, **114**, **116**, **118** extend from the bottom of receptacle **34**, and each wall terminates at a free edge that together define a receptacle rim, or edge **124** of generally rectangular plan form, with radiused corners. Receptacle edge **124** may be generally equidistant from bottom **110** (i.e., lies in a parallel, upwardly spaced plane) and defines a receptacle by which to obtain access to the internal chamber. The liner may include indexing features **128**, such as may be in the nature of wall mounted grooves or slots **126**, which may be molded in liner or receptacle **34**. Slots **126** may be placed intermittently along receptacle **34** to permit a partition **36** to be installed, thereby dividing the internal space into halves, or a 2:1 or 3:1 split, as may be. The internal liner member may be a removable tub, or vessel, or may be secured to the soft-sided outer wall assembly. In either case, the liner may fit quite closely, or snugly, inside the soft-sided insulating walls, and may occupy substantially all of the internal volume within the soft-sided walls.

Zipperless Closure Member and FIGS. 5*a*, 5*b* and 5*c*

Container assembly **20** includes a pair of matingly engaging peripheral wall portions. Those portions may include a female land **132**, which may be in the form of a debouch-

11

ment, or mouth, or rim **134** of a substantially rigid (as compared to the insulated soft sided wall portions) structural member such as a liner in the nature of a receptacle or bin, or tub, however it may be called. Rim **134** may be opposed by a male closure of securement member such as the front or top panel reinforcing peripheral member **120**. Member **120** may include a bezel-like upstanding peripheral interference fit engagement member, which may have a peripherally outwardly facing fitting, such as an interference bulge or detent **122**, such as may tend to encourage a positive interference between the two mating members, and which may co-operate with an opposed, corresponding detent feature, such as a relief or cusp **130** in the surrounding land defined by rim **134** (see detail of FIG. **5a**, when parts are forced together in the direction of phantom arrow 'A'). FIG. **5a** also shows an embodiment of wall structure. As may be noted, the wall structure includes the substantially rigid liner member receptacle **34**, the external soft-sided insulated wall having an inner skin **142**, an insulated layer, **144**, and an outer skin **146**. This wall structure may also include a further outer protective layer of heavier, scuff resistant material **148**, or the scuff resistant material may be used in place of outer skin **146**.

In the embodiment of FIG. **5a**, the outer, or female interference fit engagement assembly includes a molded re-entrant lip that may include cusp **130**, an end wall **136**, and an outer, return leg **150**, such that the land region, end wall **136** and return leg **150** may tend to co-operate to function as a channel section tending to stiffen the peripheral lip or rim **134** more generally. At the inward end of outward return leg **150** there may be a laterally extending leg, such as may be identified as flange **152**, to which the soft sided wall structure may be secured by an attachment. The attachment may be a bonding agent, or, the distal portion **154** of flange **152** may be thinned to provide a land through which stitching **156** may be passed to secure the liner to the wall structure, or stitching and bonding may both be employed to discourage removal of the substantially rigid liner from the soft-sided wall structure.

The embodiment of FIG. **5a** may employ a formed externally facing interference fit reinforcement, in the nature of a lip or rim member **134** that may extend peripherally about a main planar lid panel portion **52**. Lip member **134** may have an out-of-plane inner leg **164**, distal end portion **166**, return leg **168**, and outer peripheral flange **170**, and thinned outer finger **172** through which a stitched connection to the front panel covering assembly, be it a cellular foam insulated panel (FIG. **5a**), or a thinner covering (FIGS. **5b** and **5c**), can be made. In FIG. **5a**, leg **164**, end portion **166** and leg **168** co-operate with the adjacent planar portions **162** and **170** to function as a reinforcing channel for the adjacent planar regions, thus tending to yield a stiffened member for engagement with the surrounding land of the liner.

In the alternate embodiment of FIG. **5b**, lip member **134** may be replaced by a cast panel having a peripheral lip having a solid, as opposed to hollow or channel like, leg **174**, having a bulbous, or fattened distal end portion **176** such as may deflect in the direction of Arrow 'B' when the male and female parts are forced together by motion in the direction of arrow 'A', in the manner of a cantilevered spring flexing to give an interference fit. In these embodiments there is, commonly, an engagement interface that is free from tracked fasteners, or, as it might be alternatively termed, the friction interface is 'zipperless'.

In the further alternative embodiment of FIG. **5c**, the container assembly, be it assembly **20** or assembly **220**, may include a receptacle, or vessel or liner, or tub **34** that may be

12

removable from within the surrounding soft-sided wall structure, indicated generally as **22**. The container assembly may be generally similar to those of FIG. **5a** or **5b**. Similarly, the surrounding soft-sided wall panels may include an outer covering, a layer of thermal insulation, and an inner wall covering, all generally analogous to the structure described above. However, tub **182** may differ from receptacle **34**, in having an upstanding sidewall structure that may include a flare or splay, such that the wall **186** may be inclined outward from the vertical, as indicated by angle α such that the closure is tapered. The upper rim **188** of tub **182** may be formed to have a leg folded or bent back upon itself, such as leg **190**, which is, in effect a rim stiffening flange. The soft sided insulated side wall structure **192** may end at a bead, or piping, **194** which may sit peripherally outside rim **188**. The lid or top panel **30** may be substantially the same as before, except insofar as downwardly extending leg **198** may be angled or splayed, such as in the outward direction measured from the vertical as indicated by angle β . Leg **198** may extend peripherally about top panel, forming a continuous peripheral depending wall. Leg **198** may include a bulbous head, such as may include an outwardly extending bead **196**. In operation, when the lid is closed onto the tub, as suggested by motion in the direction of arrow 'A' in FIG. **11**, bead **196** may tend to engage the opposing land of wall **186** in an interference condition, such as may tend to urge leg **198** inwards in the direction of arrow 'B' and which may tend to urge rim **188** outwards in the direction opposite to arrow 'B'.

Latch

An opener, grip, or pull, which may be in the nature of a tongue, or pull tab **200** may assist in opening the lid, namely front wall or lid **30** away from the remainder of the insulated sidewall portions, thereby yielding access to the interior chamber. Tab **200** is attached externally to lid **30**, and the inside, or underside, however it may be called, of the distal portion of tab may include a releasable fastener, which may be a hook and eye fastener, such as one of a mating pair of VELCRO strips, the mating strip, or patch **202** being mounted to first long sidewall portion **90** in the region lying within the span of the bail of handle **38**. The mating hook and eye portions may function as a releasable attachment or securement, or latch member, such as may, when mated together, further discourage disengagement of the friction fit interface. When secured, the release member **204** may tend to secure, or lock, lid **30** in place. When lifted, the release member **204** may tend to aid in disengaging lid **30** from receptacle **34**. Tab **200** is grasped to release the mating portions of a hook and eye fabric strip securement, and to permit the interference fit seal of lid **30** inside receptacle **34** to be broken, and lid **30** moved pivotally about its rearward hinged edge between the closed, or sealed position, and an open, and unsealed, position.

FIGS. **2a-2i**

In FIGS. **2a-2i**, an alternate embodiment of a box-shaped, soft-sided insulated container assembly is identified as **220**. Container assembly **220** is generally similar to assembly **20**, with the corresponding item numbers used for similar parts. In this case however, handle **222** is not mounted to one of the long side portions, as is handle **38**, but rather placed along one of the short side portions **224**, with the roots of the handle strap being secured along the corresponding opposed long sides, such that, in the customary orientation for carrying, hinge **40** may lie along one of the ascending (or descending), predominantly vertical sides of the friction fit interface, as may the pull tab member **200**, and the portions

of the friction fit interface lying along the short side portions may tend to be predominantly horizontal.

Lid **30** may include internal structural member **230**. The general cross-sectional structure of lid **30** may include an outer skin, an intermediate layer of thermal insulating material, such as may be a layer of closed cell foam, and an inner wall, or skin, provided by internal structural member **200**. A heavy fabric strip may be folded over the combined edges of the fabric outer skin and the external lip of structure member **230** and the laminate so formed is then sewn together, the stitches passing through lip **280**. In this way a thermally insulative sandwich structure is formed.

In one embodiment, as shown in FIG. **2a**, internal structural member **230** may include a substantially planar medial web portion, **232**, that is generally rectangular in plan view (reflecting the generally rectangular plan form of container assembly **220**, more generally). A raised retainer in the form of an integrally formed bezel, or surround member **234** extends peripherally, and continuously, about web portion **232**, much in the manner of a picture frame, or peripheral flange. A work surface **236** lies within the region bounded by surround member **234**. Surround member **234** is generally rectangular in plan view, and the outside flange may interact in an interference fit relationship with at least a portion of the similarly rectangular plan view outline of the mouth of receptacle **34**. If receptacle **34** were circular, or elliptical, or oblong, surround member **234** would also tend to be correspondingly circular, or elliptical, or oblong to permit satisfactory mating engagement. The peripherally outermost portion, or extremity, of surround member **234**, is peripheral lip **240**. Lip **240** may lie in the plane of web portion **232** (although it need not do). Inwardly of lip **240** is an upstanding, outwardly facing wall member **242**. Wall member **242** terminates at an end wall portion **244** that may extend in a plane generally parallel to the plane of web portion **232** (although end wall portion **244** could be a continuously radiused portion, or could be beveled, as may be). In this example there is a single working surface region that occupies substantially the entire area of lid **30**, and is shown without internal dividers. This may be seen in contrast to the embodiment shown in FIGS. **1a** and **2b** in which the total working surface area is divided into a plurality of sub-regions, namely the first, second, and third regions noted above.

As may be noted, the interface of the seal fitting with the land region of receptacle **34** is intended to be sufficiently tight that it may tend to resist re-opening. To that extent, the interface between lid **30** and the lower portion of container assembly may tend not to require a zipper, and may be zipperless, that is, free of any peripheral tracked fastener. In the open position, the inner structural member **230** is formed to define work surface **236** on which to place objects, as before. The attachment member **32** again allows the work surface **236** to lie substantially flat while the container assembly **220** remains on its back, allowing access to remove objects stored in receptacle **34**. As before, attachment member **32** also tends to ensure that lid **30** remains secured to container assembly **220** at all times. This may tend to prevent the lid **30** from being separated and potentially lost or misplaced due to inattention or distraction.

As before, attachment member **32** is connected to the container assembly **220** at peripheral wall **56**. The soft-sided shell of container assembly **220** may have a midpoint about halfway between the bottom wall and the upper margin of peripheral wall **56**. The attachment may be located at or below this midpoint, for example. Thus, as above, attachment member **32** is of sufficient length, or reach, to permit

lid **30** to engage with the female land of liner **34** so that lid **30** can be moved to the closed position or the adjacent lying-flat open position.

As explained above, the lip or rim **134** may extend peripherally about top panel **224**, forming a continuous peripheral depending wall. The lip member extends out of the plane of the planar medial web portion **232**, and in addition to providing a stiffened member for engaging with the land of the liner, rim **134** also prevent objects from sliding off structural member **226** when being used as work surface.

A lid release member or tongue, or tab **250** also includes an aperture, or seat, or socket or indexing member, or keyway **252** extending therethrough. A mating indexing member or latch, or key **254** and base **256** are mounted on front long sidewall portion **90**. Key **254** may be rotatably moved between an unlocked position (as shown in FIGS. **2c** and **2f**) and a locked position (as shown in FIGS. **2d** and **2e**).

As described above, in one embodiment there is a soft-sided insulated box-shaped lunch container having an attached lid movable to an open position lying flat next thereto.

In that embodiment, the lid has an inside surface that faces upward when the lid is in the open position. The inside surface is formed to define a work surface having an object retainer. The lid includes a stiffened member formed to define the work surface. The object retainer includes a raised relief feature formed in the stiffened member. The stiffened member formed has a work surface and a raised retaining rim. The stiffened member has a plurality of sub-regions of the stiffened member having raised retainers.

In the embodiments shown and described, the container has a length and a width, and a through thickness. The through thickness is less than each of the length and the width. The container has a main body having a base and an upstanding peripheral side wall. The main body has a peripheral margin to which the lid mates in a closed position. In the open position the lid lies at a level shy of the margin, namely adjacent to the base. The lid is secured to the body by a flexible securement in the form of a flexible hinge running along a margin of the lid. The container has a depth dimension, and the hinge has a reach equal to at least half of that depth. The hinge includes a web member having a first margin joined to the lid and a second margin joined to the body adjacent to a base of the body. The web is movable to a flat position intermediate the lid and the body when the lid is in the open position. The hinge has a releaseable attachment intermediate the first margin and the lid, by which it is releasably securable to the body. The container has a body and a rigid liner mounted within the body. The lid has a formed member matable with the rigid liner in an interference fit.

In those embodiments the container has a main body having a base and an upstanding peripheral side wall. The main body has a margin distant from the base to which the lid mates in a closed position. A rigid liner is mounted within the body. The lid is joined to the body by a flexible hinge. The lid has a rigid formed member that includes a first region defining a first work surface. The first work surface faces upwardly when the lid is in the open position. The rigid formed member has at least a first raised retainer formed therein about at least a first region of the first work surface. The rigid formed member of the lid is matingly engageable with the rigid liner in an interference fit when the lid is in a closed position.

The top wall is movable between an open position and a closed position. In the closed position, the top wall, the

15

bottom wall and the peripheral wall define an inner volume in which to receive objects. In the open position, the flexible attachment member extends away from the soft-sided insulated wall structure and allows the bottom wall and the outer surface of the top wall to lie flat generally beside each other such that the substantially rigid inner member of the top wall defines a work surface.

The container has a substantially rigid liner that fits closely within the soft-sided insulated wall structure to occupy substantially all of the inner volume. The substantially rigid liner has a mouth that includes a peripherally extending rim defining a land. The substantially rigid inner member of the top wall includes a peripherally extending engagement member that includes a stiffened member. The stiffened member is operable on closing of the top wall to engage the land of the substantially rigid liner. The co-operable peripherally extending engagement member of the top wall and the land of the substantially rigid liner define a closure of the assembly, the closure so defined are zipperless. The substantially rigid inner member of the top wall includes a raised member extending out-of-plane relative to the substantially planar lid. The raised member sub-divides the working surface into sub-sections.

In some embodiments, the top wall has a tab extending outwardly from a second edge portion thereof, the second edge portion are opposite the first edge portion. The extending tab has a keyway extending therethrough and a releasable tab fastener on an underside thereof, the keyway adjacent to the releasable tab fastener. The peripheral wall has a tab securement fitting mounted thereon for matingly engaging the releasable tab fastener and a key adjacent to the tab securement fitting, the key are movable between a locked position and an unlocked position. In the closed position of the top wall, the releasable tab fastener is aligned with the tab securement fitting and the key is aligned with the keyway of the extending tab. When the key is in the unlocked position the key passes through the keyway and the releasable tab fastener is matingly engaged with the tab securement fitting, and when the key is in the locked position the key is unable to pass through the keyway.

Although the various embodiments have been illustrated and described herein, the principles of the present invention are not limited to these specific examples which are given by way of illustration.

I claim:

1. A soft-sided insulated box-shaped lunch container having a main body and an attached lid movable to an open position lying flat next to said main body;

said main body of said container has a length, a width, and a through thickness, said through thickness being, less than each of said length and said width;

said main body has a base and an upstanding peripheral side wall;

said peripheral side wall of said main body has a peripheral margin to which said lid mates in a closed position; and

in said open position said lid lies at a level shy of said peripheral margin of said main body.

2. The soft-sided insulated box-shaped lunch container of claim 1 wherein said lid has an inside surface that faces upward when said lid is in said open position, said inside surface being formed to define a work surface having an object retainer.

3. The soft-sided insulated box-shaped container of claim 2 wherein said lid includes a stiffened member, said stiffened member being formed to define said work surface.

16

4. The soft-sided insulated box-shaped lunch container of claim 3 wherein said object retainer includes a raised relief feature formed in said stiffened member.

5. The soft-sided insulated box-shaped lunch container of claim 2 wherein said lid includes a stiffened member, said stiffened member being formed to define a work surface and a raised retaining rim of said work surface, said upwardly facing inside surface of said lid including said work surface.

6. The soft-sided insulated box-shaped lunch container of claim 5 wherein said stiffened member of said lid has a plurality of sub-regions of said stiffened member having raised retainers, said sub-regions being defined on an inside of said lid, whereby, when said lid is open and lying flat on the ground next to said body, said sub-regions face upward.

7. The soft-sided insulated box-shaped lunch container of claim 1 wherein:

said base is substantially rectangular;

said peripheral wall has four side portions corresponding to four sides of said substantially rectangular base; said peripheral wall has a depth measured from said base wall to said lid;

said lid is joined to said body by a flexible hinge; said flexible hinge has a first edge connected to a margin of said lid;

said flexible hinge has a second edge mated to said body distant from said rim of said peripheral wall;

said hinge has a reach measured between said first and second edges thereof, said reach being at least half as great as said through thickness of said main body; and in said open position said lid lies adjacent to said base wall.

8. The soft-sided insulated box-shaped lunch container of claim 1 wherein said lid is secured to said body by a flexible securement.

9. The soft-sided insulated box-shaped lunch container of claim 8 wherein said flexible securement is a flexible hinge running along a margin of said lid.

10. The soft-sided insulated box-shaped lunch container of claim 9 wherein said hinge has a reach equal to at least half of said through thickness of said main body of said container.

11. The soft-sided insulated box-shaped container of claim 10 wherein said hinge has a reach corresponding to said through thickness of said main body of said container, and said hinge includes a web member having a first margin joined to said lid and a second margin joined to said body adjacent to a base of said main body, said web being movable to a flat position intermediate said lid and said main body when said lid is in said open position.

12. A soft-sided insulated box-shaped lunch container having a main body and an attached lid movable to an open position lying flat next to said main body; said container having a body, said lid being secured to said body by a flexible securement; said flexible securement being a flexible hinge running along a margin of said lid; and

said hinge being joined to said body along a first margin, and having a releasable attachment by which said hinge is releasably securable to said body, said releasable attachment being intermediate said first margin and said lid.

13. The soft-sided insulated box-shaped container of claim 1 wherein said container has a rigid liner mounted within said main body, said lid having a formed member matable with said rigid liner in an interference fit.

14. A soft-sided insulated box-shaped lunch container having:

17

a main body and an attached lid movable to an open position lying flat next to said main body;
 said container has a length and a width, and a through thickness, said through thickness being less than each of said length and said width;
 said main body having a base and an upstanding peripheral side wall;
 said main body having a margin distant from said base to which said lid mates in a closed position;
 a rigid liner is mounted within said main body;
 said lid is joined to said main body by a flexible hinge, said flexible hinge having a first connection along a margin of said lid and a second connection along said main body, said hinge having a reach at least half as great as said through thickness of said main body;
 said lid having a rigid formed member;
 said rigid formed member including a first region defining a first work surface, said first work surface facing upwardly when said lid is in said open position;
 said rigid formed member having at least a first raised retainer formed therein about at least a first region of said first work surface; and
 said second connection of said hinge is along a margin of said base, and said hinge has a releasable securement intermediate said first connection and said second connection.

15. The soft-sided insulated box-shaped lunch container of claim **1** wherein:

said soft-sided insulated wall structure includes a top wall;
 said top wall is joined to said main body by a flexible hinge;
 said flexible hinge has a first end and a second end distant from said first end;
 said first end is distant from said second end by a distance that is at least half as great as said through thickness of said container;
 said first end of said flexible hinge has a first connection to a margin of said top wall; and
 said second end of said flexible hinge has a connection along said body distant from said top wall.

16. A container assembly that includes a soft-sided insulated wall structure and a flexible attachment member, wherein:

said soft-sided insulated wall structure includes a top wall, a bottom wall and a peripheral wall running about said bottom wall;
 said peripheral wall extends upwardly away from said bottom wall and has an upper margin distant from said bottom wall;
 said flexible attachment member has a first end and a second end, said first end fixed to an attachment portion of said insulated wall structure;
 said top wall is connected to said second end of said flexible attachment member;
 said top wall includes an outer surface and a substantially rigid inner member;
 said top wall is movable between an open position and a closed position;
 in said closed position, said top wall, said bottom wall and said peripheral wall define an inner volume in which to receive objects; and
 in said open position, said flexible attachment member extends away from said peripheral wall of said soft-sided insulated wall structure and allows said bottom wall and said outer surface of said top wall to concur-

18

rently lie flat such that said substantially rigid inner member of said top wall defines a work surface on which to place objects.

17. The container assembly of claim **16** further comprising:

a substantially rigid liner, said substantially rigid liner being sized to fit closely within said soft-sided insulated wall structure such that said substantially rigid liner occupies substantially all of said inner volume;
 said substantially rigid liner has a mouth that includes a peripherally extending rim defining a land; and
 said substantially rigid inner member of said top wall includes a peripherally extending engagement member that includes a stiffened member, said stiffened member being operable on closing of said top wall to engage said land of said substantially rigid liner;
 when said top wall engages said land on closing, said flexible attachment member being located outside and next to said peripheral wall; and
 said co-operable peripherally extending engagement member of said top wall and said land of said substantially rigid liner define a closure of said assembly, said closure so defined being zipperless.

18. The container assembly of claim **16** wherein:

said top wall is a substantially planar lid of said assembly; and
 said substantially rigid inner member of said top wall includes a raised member extending out-of-plane relative to said substantially planar lid, said raised member sub-dividing said working surface into sub-sections.

19. A container assembly that includes a soft-sided insulated container and a substantially rigid liner, wherein:

said container has a soft-sided wall structure having a top wall, a bottom wall, left and right hand short sidewall portions, first and second long sidewall portions, and a flexible attachment member;
 said bottom wall is substantially rectangular;
 said bottom wall has first and second short side edges, and first and second long side edges;
 said first and second long sidewall portions adjoin said first and second long side edges and extend upwardly away from said bottom wall;
 said left and right hand short sidewall portions adjoin said first and second short side edges and extend upwardly away from said bottom wall;
 said first and second long side wall portions and said left and right hand short side wall portions co-operate to define a peripheral wall running about said bottom wall;
 said flexible attachment member having a first end and a second end, said first end fixed to a portion of said bottom wall;
 said top wall is generally rectangular;
 said top wall has an edge portion connected to the second end of said flexible attachment member;
 said top wall is movable between an open position and a closed position;
 in said closed position said bottom wall, top wall, left and right hand short sidewall portions, and first and second long sidewall portions define an internal volume therein;
 said substantially rigid liner is sized to fit closely within said soft-sided wall structure such that said substantially rigid liner occupies substantially all of said internal volume;
 said substantially rigid liner has a mouth that includes a peripherally extending rim defining a land;

said top wall includes an outer surface and a substantially rigid inner member, said substantially rigid inner member including a peripherally extending engagement member that includes a stiffened member, said stiffened member being operable on closing of said top wall to engage said land of said substantially rigid liner; 5

in said open position, said flexible attachment member allowing said outer surface of said top wall and said bottom wall to concurrently lie flat such that said substantially rigid inner member of said top wall defines a work surface on which to place objects; 10

said co-operable peripherally extending engagement member of said top wall and said land of said substantially rigid liner define a closure of said assembly, said closure so defined being zipperless, 15

said bottom wall, left and right hand short sidewall portions, and said first and second long sidewall portions, define a main body of said container;

said top wall defines a lid of said container;

said left and right hand short sidewall portions, and said first and second long sidewall portions co-operate to define a peripheral wall of said container; 20

said main body of said container has a length, a width, and a through thickness, said through thickness being less than each of said length and said width; 25

said main body has a base and an upstanding peripheral side wall;

said peripheral sidewall wall of said main body has a peripheral margin to which said lid mates in a closed position; and 30

in said open position said lid lies at a level shy of said peripheral margin of said main body.

* * * * *