

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199955620 B2
(10) Patent No. 760518

(54) Title
Energy absorbing system for fixed roadside hazards

(51)⁷ International Patent Classification(s)
E01F 015/14

(21) Application No: **199955620**

(22) Application Date: **1999.08.12**

(87) WIPO No: **WO00/09813**

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/096538	1998.08.13	US
09/356060	1999.07.19	US

(43) Publication Date : **2000.03.06**

(43) Publication Journal Date : **2000.05.04**

(44) Accepted Journal Date : **2003.05.15**

(71) Applicant(s)
Exodyne Technologies, Inc.

(72) Inventor(s)
James R. Albritton


(74) Agent/Attorney
F B RICE and CO,605 Darling Street,BALMAIN NSW 2041



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : E01F 15/14</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/09813 (43) International Publication Date: 24 February 2000 (24.02.00)</p>
<p>(21) International Application Number: PCT/US99/18509 (22) International Filing Date: 12 August 1999 (12.08.99) (30) Priority Data: 60/096,538 13 August 1998 (13.08.98) US 09/356,060 19 July 1999 (19.07.99) US (71) Applicant: EXODYNE TECHNOLOGIES, INC. [US/US]; P.O. Box 121008, Fort Worth, TX 76121-1008 (US). (72) Inventor: ALBRITTON, James, R.; 208 Highland Drive, Aledo, TX 76008 (US). (74) Agent: FELGER, Thomas, R.; Baker & Botts, L.L.P., 2001 Ross Avenue, Dallas, TX 75201-2980 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: ENERGY ABSORBING SYSTEM FOR FIXED ROADSIDE HAZARDS

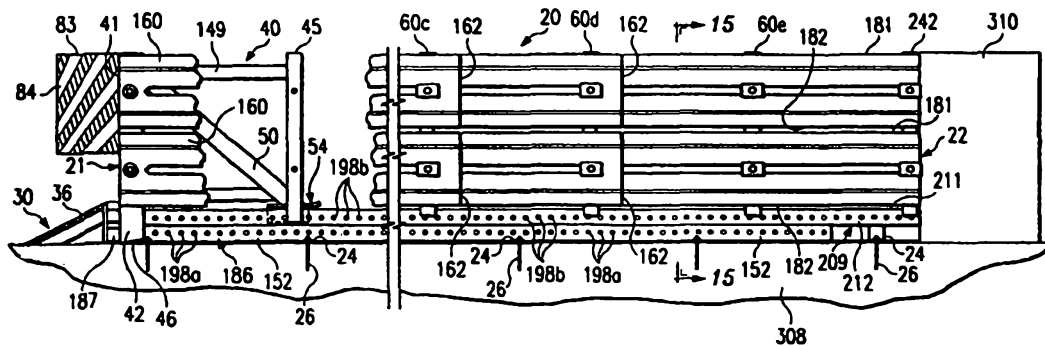

(57) Abstract

An energy absorbing system with one or more energy absorbing assemblies is provided to reduce or eliminate the severity of a collision between a moving motor vehicle and a roadside hazard. The energy absorbing system may be installed adjacent to a roadside hazard such as the end of a concrete barrier facing oncoming traffic. The energy absorbing system preferably includes at least one energy absorbing element. A sled assembly is also provided with a cutter plate such that a collision by the motor vehicle with one end of the sled assembly will result in the cutter plate tearing or ripping the energy absorbing element to dissipate energy from the motor vehicle collision. The configuration and number of energy absorbing assemblies and the configuration and number of energy absorbing elements may be varied depending upon the intended application for the resulting energy absorbing system.

ENERGY ABSORBING SYSTEM FOR FIXED ROADSIDE HAZARDS

TECHNICAL FIELD OF THE INVENTION

5 This invention relates in general to the field of impact attenuation devices, and more particularly to an energy absorbing system which may be used to reduce the severity of a collision between a moving motor vehicle and a stationary hazard adjacent to a roadway.

BACKGROUND OF THE INVENTION

10 Various impact attenuation devices and energy absorbing systems have been used to prevent or reduce damage resulting from a collision between a moving motor vehicle and a fixed roadside hazard or obstacle. Examples of prior impact attenuation devices and energy
15 absorbing systems include crash cushions or crash barriers with various structures and containers having crushable elements. Other crash barriers rely on inertia forces generated when material such as sand is accelerated during an impact to absorb energy.

20 Some of these devices and systems have been developed for use at narrow roadside hazards or obstacles such as at the end of a median barrier, end of a barrier extending along the edge of a roadway, large sign posts adjacent to a roadway, and bridge pillars or center
25 piers. Such impact attenuation devices and energy absorbing systems are installed in an effort to minimize the extent of personal injury as well as damage to an

impacting vehicle and any structure or equipment associated with the roadside hazard.

5 Examples of general purpose impact attenuation devices are shown in U.S. Patent 5,011,326 entitled *Narrow Stationary Impact Attenuation System*; U.S. Patent 4,352,484 entitled *Shear Action and Compression Energy Absorber*; U.S. Patent 4,645,375 entitled *Stationary Impact Attenuation System*; and U.S. Patent 3,944,187 entitled *Roadway Impact Attenuator*. Examples of
10 specialized stationary energy absorbing systems are shown in U.S. Patent 4,928,928 entitled *Guardrail Extruder Terminal* and U.S. Patent 5,078,366 entitled *Guardrail Extruder Terminal*. Each of the preceding patents is incorporated by reference for all purposes in the present
15 application.

Examples of impact attenuation devices and energy absorbing systems appropriate for use on a slow moving or stopped highway service vehicle are shown in U.S. Patent 5,248,129 entitled *Energy Absorbing Roadside Crash*
20 *Barrier*; U.S. Patent 5,199,755 entitled *Vehicle Impact Attenuating Device*; U.S. Patent 4,711,481 entitled *Vehicle Impact Attenuating Device*; U.S. Patent 4,008,915 entitled *Impact Barrier for Vehicles*.

Recommended procedures for evaluating performance of
25 various types of highway safety devices including crash cushions is presented in *National Cooperative Highway Research Program (NCHRP) Report 350*. A crash cushion is generally defined as a device designed to safely stop an impacting vehicle within a relatively short distance.
30 *NCHRP Report 350* further classifies crash cushions as either "redirective" or "nonredirective". A redirective crash cushion is designed to contain and redirect a vehicle impacting downstream from a nose or end of the crash cushion facing oncoming traffic extending from a
35 roadside hazard. Nonredirective crash cushions are designed to contain and capture a vehicle impacting

downstream from the nose of the crash cushion. Redirective crash cushions are further classified as either "gating" or "nongating" devices. A gating crash cushion is one designated to allow controlled penetration of a vehicle during impact between the nose of the crash cushion and the beginning of length of need (LON) of the crash cushion.

- 5 A nongating crash cushion is designed to have redirection capabilities along its entire length.

SUMMARY OF THE INVENTION

10 According to a first aspect of the invention there is provided an energy absorbing system to minimise the results of a collision between a vehicle travelling on a roadway and a roadside hazard comprising:

the energy absorbing system having a first end and a second end;

the second end of the energy absorbing system disposed adjacent to the roadside hazard with the first end extending longitudinally therefrom;

15 a sled assembly slidably disposed at the first end of the energy absorbing system;

at least one energy absorbing assembly disposed between the roadside hazard and the sled assembly;

each energy absorbing assembly having at least one energy absorbing element;

20 the sled assembly having a cutter plate mounted adjacent to and aligned with each energy absorbing element; and

the sled assembly having a first end facing oncoming traffic whereby a collision of a vehicle with the first end of the sled assembly will cause the cutter plate to slide longitudinally relative to the energy absorbing element and dissipate kinetic energy of
25 the vehicle by separating the energy absorbing element.


According to a second aspect of the invention there is provided an energy absorbing system to minimise the results of a collision between a vehicle travelling on a roadway and a roadside hazard comprising:

the energy absorbing system having a first end and a second end;

30 the second end of the energy absorbing system disposed adjacent to the roadside hazard with the first end extending longitudinally therefrom;

a sled assembly slidably disposed at the first end of the energy absorbing system;

35 a first row of energy absorbing assemblies and a second row of energy absorbing assemblies extending longitudinally from the roadside hazard, at least one of the energy absorbing assemblies among the first row and the second row of energy



absorbing assemblies being disposed between the roadside hazard and the sled assembly, the first row and the second row of energy absorbing assemblies spaced laterally from each other;

each energy absorbing assembly having at least one energy absorbing element;

5 the sled assembly having a cutter plate mounted adjacent to and aligned with each energy absorbing element;

the sled assembly having a first end facing oncoming traffic whereby a collision of a vehicle with the first end of the sled assembly will cause the cutter plate to slide longitudinally relative to the energy absorbing element and dissipate kinetic energy of
10 the vehicle by separating the energy absorbing element;

a plurality of panel support frames slidably disposed on the first guide rail and the second guide rail between the sled assembly and the roadside hazard;

the panel support frames spaced longitudinally from each other; and

a plurality of panels attached to the panel support frames and extending
15 longitudinally along opposite sides of the energy absorbing system.

According to a third aspect of the invention there is provided a crash cushion to minimise the results of a collision between a vehicle travelling on a roadway and an immobile roadside hazard comprising:

a pair of energy absorbing assemblies extending longitudinally parallel with
20 each other;

the energy absorbing assemblies spaced laterally from each other;

the energy absorbing assemblies having a first end facing oncoming traffic and a second end disposed adjacent to the roadside hazard;

a sled assembly slidably coupled to the first end of each energy absorbing
25 assembly;

each energy absorbing assembly having at least one energy absorbing element;

and

a cutter plate attached to the sled assembly adjacent to and aligned respectively with the energy absorbing assemblies whereby a collision of the vehicle with the sled
30 assembly will result in the cutter plate sliding longitudinally relative to the respective energy absorbing elements and separating the respective energy absorbing elements to dissipate kinetic energy from the vehicle.

According to a fourth aspect of the invention there is provided a crash cushion to minimise the results of a collision between a vehicle travelling on a roadway and an
35 immobile roadside hazard comprising:



a pair of energy absorbing assemblies extending longitudinally parallel with each other;

the energy absorbing assemblies spaced laterally from each other;

the energy absorbing assemblies having a first end facing oncoming traffic and a
5 second end disposed adjacent to the roadside hazard;

each energy absorbing assembly having at least one energy absorbing element;

a pair of guide rails with each guide rail attached to and extending laterally from one of the energy absorbing assemblies;

a sled assembly slidably coupled to the first end of each energy absorbing
10 assembly, the sled assembly being disposed on and secured to the guide rails;

a plurality of panel support frames slidably disposed on the guide rails between the sled assembly and the roadside hazard;

a plurality of panes attached to the panel support frames; and

a cutter plate attached to the sled assembly adjacent to and aligned respectively
15 with the energy absorbing assemblies whereby a collision of the vehicle with the sled assembly will result in the cutter plate sliding longitudinally relative to the respective energy absorbing elements and separating the respective energy absorbing elements to dissipate kinetic energy from the vehicle.

According to a fifth aspect of the invention there is provided a crash cushion to
20 minimise the results of a collision between a vehicle travelling on a roadway and an immobile roadside hazard comprising:

a pair of energy absorbing assemblies extending longitudinally parallel with each other;

the energy absorbing assemblies spaced laterally from each other;

25 the energy absorbing assemblies having a first end facing oncoming traffic and a second end disposed adjacent to the roadside hazard;

each energy absorbing assembly having:

a pair of supporting beams disposed longitudinally parallel with each other;

the support beams spaced from each other;

30 at least two energy absorbing elements attached to opposite sides of each supporting beam;

the distance between the supporting beams selected to allow the respective cutter plate to separate the respective energy absorbing elements to dissipate energy from the vehicle collision;

35 each supporting beam having a generally C-shaped cross section;



the energy absorbing elements attached to opposite sides of each supporting beam with the generally C-shaped cross sections of the respective supporting beams facing each other to define a generally hollow rectangular cross section for the resulting energy absorbing assembly;

5 each energy absorbing element attached to the respective supporting beams by releasable fasteners to allow replacement of the energy absorbing element;

a sled assembly slidably coupled to the first end of each energy absorbing assembly; and

10 a cutter plate attached to the sled assembly adjacent to and aligned respectively with the energy absorbing assemblies whereby a collision of the vehicle with the sled assembly will result in the cutter plate sliding longitudinally relative to the respective energy absorbing elements and separating the respective energy absorbing elements to dissipate kinetic energy from the vehicle.

15 According to a sixth aspect of the invention there is provided a method to minimise the effects of a collision between a motor vehicle travelling on a roadway and a roadway hazard comprising the steps of:

forming at least one energy absorbing assembly from a pair of supporting beams;

attaching at least one energy absorbing element to the supporting beams;

20 installing the energy absorbing assembly adjacent to the roadway hazard with one end of the energy absorbing assembly facing oncoming traffic;

forming a sled assembly with a cutter plate attached thereto; and

25 slidably coupling the sled assembly with the one end of the energy absorbing assembly and the cutter plate disposed adjacent to the energy absorbing element whereby a collision between the motor vehicle and the sled assembly will result in the cutter plate sliding longitudinally relative to the energy absorbing element and separating the energy absorbing element to dissipate energy from the collision by the motor vehicle.

30 According to a seventh aspect of the invention there is provided a method to minimise the effects of a collision between a motor vehicle travelling on a roadway and a roadway hazard comprising the steps of:

forming at least one energy absorbing assembly from a pair of supporting beams, at least one of the support beams having a generally C-shaped cross section;

attaching at least one energy absorbing element to the supporting beams;

35 installing the energy absorbing assembly adjacent to the roadway hazard with one end of the energy absorbing assembly facing oncoming traffic;



forming a sled assembly with a cutter plate attached thereto;
slidably coupling the sled assembly with one end of the energy absorbing
assembly and the cutter plate disposed adjacent to the energy absorbing element;
attaching a guide plate to at least one side of the cutter plate; and

5 placing the guide plate within the C-shaped cross section to maintain alignment
of the cutter plate assembly with the respective energy absorbing assembly, whereby a
collision between the motor vehicle and the sled assembly will result in the cutter plate
sliding longitudinally relative to the energy absorbing element and separating the
energy absorbing element to dissipate energy from the collision by the motor vehicle.

10 In accordance with teachings of the present invention, disadvantages and
problems associated with the previous impact attenuation devices and energy absorbing
systems have been substantially reduced or eliminated. One aspect of the present
invention includes providing a crash barrier or crash cushion which may be installed
15 adjacent to a fixed roadside hazard or obstacle to protect occupants of a vehicle from
collision with the roadside hazard. The crash cushion preferably includes a cutter plate
and a series of rip plates or energy absorbing elements which cooperate with each other
to absorb energy from a vehicle impacting one end of the crash cushion opposite from
the fixed roadside hazard. The rip plates remain relatively fixed within the crash
20 cushion while the cutter blade moves through the rip plates to absorb energy from the
vehicle impact. The crash cushion also includes improved panels and associated panel
support frames to redirect a vehicle impacting with either side of the crash cushion.

Another aspect of the present invention includes providing an energy absorbing
system having a plurality of panel support frames and panels which may be installed
25 between a road side hazard and oncoming traffic. The panel support frames and panels
are slidably disposed relative to each other. As a result, when a vehicle collides with
one end of the energy absorbing system



facing oncoming traffic, the panel support frames and panels will telescope or collapse relative to each other to cushion the impact from the vehicle. The panel support frames, associated panels and other components of the energy absorbing system cooperate with each other to absorb kinetic energy from the vehicle and provide deceleration within acceptable limits to minimize injury to occupants within the vehicle. The panel support frames and panels also cooperate with other components of the energy absorbing system to direct vehicles away from the road side hazard and back onto the roadway following a collision with either side of the energy absorbing system.

Technical advantages of the present invention include providing a crash cushion which may be fabricated at relatively low cost using conventional materials and processes that are well known to the highway safety industry. The resulting crash cushion combines innovative structural and energy absorbing techniques that are highly predictable and reliable. Energy from vehicle impact is preferably absorbed by ripping, cutting or tearing one or more energy absorbing elements. The crash cushion may be easily reused following vehicle impact by replacing one or more energy absorbing elements. A wide variety of metal strips and metal plates may be satisfactorily used as energy absorbing elements depending upon the intended operating environment for the crash cushion. Also, the number of energy absorbing elements and their geometric configuration may be varied depending upon the intended application.

In accordance with another aspect of the present invention, a crash cushion is provided with multiple energy absorbing elements disposed adjacently to one end of a fixed roadside hazard facing oncoming traffic. The energy absorbing elements cooperate with each other to

allow varying the amount of deceleration applied to a vehicle impacting one end of the crash cushion opposite from the fixed roadside hazard. For example, the crash cushion may include a first, relatively soft portion to absorb impact from small, lightweight vehicles, a middle portion with increased stiffness and a third or final portion with the greatest amount of stiffness to absorb impact from heavy, high speed vehicles.

Still another aspect of the present invention includes providing a crash cushion with multiple panels which are preferably nested with each other to minimize any problems associated with a "reverse angle" impact between a vehicle and either side of the crash cushion. The panels and associated panel support frames preferably telescope with respect to each other in response to a vehicle impact at one end of the crash cushion opposite from the fixed roadside hazard. The number of panel support frames and associated panels may be selected in accordance with teachings of the present invention to optimize deceleration of an impacting vehicle while protecting occupants of the vehicle from injury due to excessive amounts of deceleration.

Further technical advantages of the present invention include providing relatively low cost crash cushions which meet the criteria of NCHRP Report 350 including Level 3 Requirements. A crash cushion having a cutter plate and energy absorbing elements incorporating teachings of the present invention may be satisfactorily used during harsh weather conditions and is not sensitive to cold or moisture. A cutter plate and energy absorbing elements incorporating teachings of the present invention can absorb large amounts of energy while safely stopping an impacting vehicle during a relatively short length of travel of the cutter plate through the energy absorbing elements.

The cutter plate and energy absorbing elements cooperate with each other and with panel support frames and associated panels to eliminate many of the problems associated with prior crash cushion designs. A crash cushion incorporating teachings of the present invention can satisfactorily dissipate kinetic energy of an impacting vehicle weighing 4,500 pounds at speeds of over sixty miles per hour (60 mph) with minimal damage (if any) to the roadside hazard and minimal debris (if any) from the crash cushion. A crash cushion incorporating teachings of the present invention provides highly predictable deceleration of an impacting vehicle to protect occupants of the vehicle.

In addition to eliminating problems associated with prior crash cushion designs, the present invention provides a crash cushion offering a higher level of protection to the motoring public with greater improved reliability and reduced costs. The resulting crash cushion provides appropriate deceleration or stopping force for a wide range of vehicle sizes and types including vehicles weighing between 820 kilograms and 2,000 kilograms.

A further aspect of the present invention includes a crash cushion having a sled assembly with a cutter plate attached thereto and multiple energy absorbing assemblies connected with each other by a series of cross ties or anchor plates. As a result of connecting the energy absorbing assemblies with each other, the crash cushion has a rigid frame construction which in cooperation with multiple panel supporting frames and associate panels will redirect vehicles during side impacts with the crash cushion.

For some applications each energy absorbing assembly includes two C-channels with the C shaped configurations facing each other and the C-channels extending generally horizontally in the direction of oncoming vehicle traffic

during normal operation of the crash cushion. A gap of approximately one inch is provided between opposing flanges of the two C-channels. This gap may be covered by one or more metal plates or energy absorbing elements to form a closed box type structure. A cutter blade or ripper is preferably attached to the lower portion of a sled assembly at the end of the crash cushion facing oncoming traffic. During impact between a motor vehicle and the sled assembly, forces from the collision are transferred from the sled assembly to the energy absorbing assemblies by the cutter blade. As the sled assembly moves toward the fixed roadside hazard, the metal plates or energy absorbing elements which are attached on opposite sides of the C-channels are cut or ripped by the cutter blade. The energy of the impacting vehicle is dissipated and the impacting vehicle brought safely to rest by the force required to cut or rip the metal plates of the energy absorbing assemblies. Various combinations of metal plates and supporting beams may be used to form each energy absorbing assembly to provide appropriate stopping or deceleration for a wide range of vehicle types, weights and speeds of impact. Supporting beams having configurations other than C-channels may be satisfactorily used with the present invention.

Technical advantages of the present invention include providing a crash cushion which may be easily installed, operated and maintained. Easily replaceable parts allow quick, low cost repair after nuisance hits and side impacts. Elimination of easily crushed or easily bent materials further minimizes the effect of any damage from nuisance hits and/or side impacts with the crash cushion.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present invention may be acquired by referring to the following description taken in conjunction with the accompanying drawings in which like reference numbers indicate like features and wherein:

FIGURE 1 is a schematic drawing showing an elevational view with portions broken away of an energy absorbing system incorporating teachings of the present invention installed adjacent to one end of a fixed roadside hazard;

FIGURE 2 is a schematic drawing showing a plan view with portions broken away of the fixed roadside hazard and energy absorbing system of FIGURE 1;

FIGURE 3 is a schematic drawing showing an isometric view with portions broken away of a cutter plate and an energy absorbing assembly having a plurality of energy absorbing elements and supporting beams incorporating teachings of the present invention;

FIGURE 4 is a schematic drawing in section with portions broken away taken along lines 4-4 of FIGURE 3 showing the box beam type cross section of the energy absorbing assembly;

FIGURE 5 is a schematic drawing showing an isometric view with portions broken away of the energy absorbing assembly of FIGURE 3 after the energy absorbing elements have been cut or ripped while absorbing energy from a vehicle impact;

FIGURE 6 is a schematic drawing in section with portions broken away showing an energy absorbing assembly incorporating another embodiment of the present invention;

FIGURE 7 is an exploded schematic drawing showing an isometric view with portions broken of still another embodiment of the present invention in which the energy absorbing assembly includes a plurality of progressively

thicker energy absorbing elements or metal plates along the length of the associated energy absorbing assembly selected to stop an impacting automobile with a gradually increasing deceleration or stopping force applied to the impacting automobile;

5

FIGURE 8 is a schematic drawing showing an isometric view with portions broken away of an energy absorbing element having a plurality of cutouts disposed therein to minimize damage to a light weight motor vehicle during initial impact with an energy absorbing assembly having such energy absorbing elements;

10

FIGURE 9A is a schematic drawing showing a plan view with portions broken away of another energy absorbing system incorporating teachings of the present invention installed adjacent to one end of a fixed roadside hazard;

15

FIGURE 9B is a schematic drawing showing a plan view with portions broken away after a motor vehicle has collided with or impacted one end of the energy absorbing system of FIGURE 9A opposite from the fixed roadside hazard;

20

FIGURE 9C is a schematic drawing showing a plan view of still another energy absorbing system incorporating teachings of the present invention installed adjacent to one end of a fixed roadside hazard;

25

FIGURE 10 is a more detailed schematic drawing showing an elevational view with portions broken away of the energy absorbing system shown in FIGURES 9A and 9B;

FIGURE 11 is a schematic drawing with portions broken away showing an isometric view of a sled assembly and other components at the end of the energy absorbing system of FIGURE 10 opposite from the fixed roadside hazard;

30

FIGURE 12 is a schematic drawing with portions broken away showing an isometric view of the sled assembly associated with the energy absorbing system of FIGURE 10;

35

FIGURE 13 is a schematic drawing end section with portions broken away showing one end of the sled assembly of FIGURE 12 opposite from oncoming traffic;

5 FIGURE 14 is a schematic drawing with portions broken away showing an exploded isometric view of the sled assembly, cutter plate and ramp associated with the energy absorbing system of FIGURE 10;

10 FIGURE 15 is a schematic drawing end section with portions broken away taken along lines 15-15 of FIGURE 10 showing a slidable support frame and attached panels;


FIGURE 16 is a schematic drawing with portions broken away showing an isometric view of the slidable support member and attached panels as shown in FIGURE 15;

15 FIGURE 17 is a schematic drawing showing an isometric view of overlapping panels incorporating teachings of the present invention disposed along one side of the energy absorbing system of FIGURE 10;

20 FIGURE 18 is a schematic drawing end section with portions broken away showing a first upstream panel and a second downstream panel slidably disposed relative to each other in accordance with teachings of the present invention;

25 FIGURE 19 is a schematic drawing showing an isometric view of a slot plate satisfactory for use in slidably attaching a panel incorporating teaching of the present invention with a panel support frame; and

30 FIGURE 20 is a schematic drawing with portions broken away showing an exploded plan view of a cutter plate and energy absorbing elements satisfactory for use with the energy absorbing system of FIGURE 10.



DETAILED DESCRIPTION OF THE INVENTION

The present invention and its advantages are best understood by referring to FIGURES 1-20 of the drawings, like numerals being used for like and corresponding parts of the drawings.

Energy absorbing system 320 incorporating one embodiment of the present invention is shown in FIGURES 1 and 2. Energy absorbing system 20 incorporating additional embodiments of the present invention is shown in FIGURES 9A-20. Energy absorbing systems 20 and 320 may sometimes be referred to as crash cushions, crash barriers, or roadside protective systems. Energy absorbing systems 20 and 320 may be used to minimize the results of a collision between a motor vehicle (not expressly shown) and various types of roadside hazards such as roadside hazard 310.

A wide variety of energy absorbing assemblies may be fabricated in accordance with the teachings of the present invention by attaching energy absorbing elements or metal plates with a pair of supporting beams spaced from each other. A cutter plate with one or more cutting edges may be disposed adjacently to the energy absorbing elements between the supporting beams to dissipate kinetic energy by ripping or tearing the associated energy absorbing elements. An energy absorbing system incorporating teachings of the present invention may be formed from energy absorbing assemblies and/or panel support frames and panels slidably disposed relative to each other. The energy absorbing assemblies, panel support frames and panels may be selected to satisfactorily absorb energy from a wide variety of vehicles colliding with the energy absorbing system at various angles including side impacts and "reverse" angle side impacts.

Energy absorbing systems 20 and 320 are shown installed at the end of roadside hazard 310 facing

oncoming traffic. Roadside hazard 310 shown in FIGURES 1;
2, 9A, 9B, and 10, may be a concrete barrier extending
along the edge or side of a roadway (not expressly
shown). Roadside hazard 310 may also be a concrete
5 barrier extending along the median between two roadways.

The terms "longitudinal," "longitudinally" and
"linear" will generally be used to describe the
orientation and/or movement of components associated with
energy absorbing systems 20 and 320 in a direction which
10 is substantially parallel with the direction vehicles
(not expressly shown) will travel on an adjacent roadway.
The terms "lateral" and "laterally" will generally be
used to describe the orientation and/or movement of
components associated with energy absorbing systems 20
15 and 320 in a direction which is generally normal to the
direction vehicles will travel on the adjacent roadway.

The term "downstream" will generally be used to
describe movement which is substantially parallel with
and in the same direction as movement of a vehicle
20 traveling an adjacent roadway. The term "upstream" will
generally be used to describe movement which is parallel
with but opposite to the direction a vehicle travels on
an adjacent roadway. The terms "upstream" and
"downstream" may also be used to describe the position of
25 one component relative to another component in respective
energy absorbing systems 20 and 320.

The terms "separate" and "separating" will generally
be used to describe the results of deforming an energy
absorbing element using a cutter plate to cause failure
30 of the energy absorbing element in tension in accordance
with teachings of the present invention. The terms
"separate" and "separating" may also be used to describe
the combined effects of ripping and tearing an energy
absorbing element in accordance with teachings of the
35 present invention.

Various components of energy absorbing systems 20 and 320 may be formed from commercially available structural steel materials. Examples of such materials include steel strips, steel plates, structural steel tubing and structural steel shapes. Examples of structural steel shapes include W shapes, HP shapes, beams, channels, tees, and angles. Structural steel angles may have legs with equal or unequal width. The American Institute of Steel Construction publishes detailed information concerning various types of commercially available steel structural materials satisfactory for use in fabricating energy absorbing systems 20 and 320.

Roadside hazard 310 may sometimes be described as a "fixed" barrier or "fixed" obstacle even though concrete barriers and other obstacles adjacent to a roadway may from time to time be moved or removed. Roadside hazard 310 may also represent a portion of a large sign post adjacent to a roadway, a bridge pillar, a center pier of a bridge or overpass, or any other structure located adjacent to a roadway and presenting a hazard to oncoming traffic. An energy absorbing system incorporating teachings of the present invention is not limited to use with only concrete barriers.

Principal components of energy absorbing system 320 as shown in FIGURES 1, 2, and 3 preferably include one or more energy absorbing assemblies 86, cutter plate or plates 106 and sled assembly 340. Cutter plate 106 may also be referred to as a "ripper" or as a "cutter blade."

One end of each energy absorbing assembly 86 is preferably attached to roadside hazard 310 by respective struts 312. For some applications energy absorbing assemblies 86 may also be fixed to the ground in front of roadside hazard 310. A plurality of spacers or cross braces 314 may be used to hold energy absorbing assemblies 86 aligned generally parallel with each other

and extending longitudinally from roadside hazard 310 toward oncoming traffic.

Sled assembly 340 is slidably coupled with the end of energy absorbing assemblies 86 opposite from roadside hazard 310. Impact plate 382 may be disposed on the end of sled assembly 340 facing oncoming traffic. One or more of cutter plates 106 (not shown in FIGURES 1 and 2) are preferably provided as part of sled assembly 340. Respective cutter plates 106 are preferably slidable mounted relative to one end of each energy absorbing assembly 86 opposite from roadside hazard 310. When a motor vehicle (not expressly shown) contacts or collides with impact plate 382, sled assembly 340 will move longitudinally relative to energy absorbing assemblies 86 and roadside hazard 310. As sled assembly 340 moves toward roadside hazard 310, kinetic energy of the impacting motor vehicle will be dissipated by cutter plates 106 tearing or ripping associated energy absorbing elements 100. For some applications it may be desirable to install a section of guardrail 316 between roadside hazard 310 and sled assembly 340 on the side immediately adjacent to the roadway.

For the embodiment of the present invention as shown in FIGURES 3, 4, and 5, energy absorbing assembly 86 may sometimes be referred to as a "box beam." Each energy absorbing assembly 86 preferably includes a pair of supporting beams 90 which are disposed longitudinally parallel with each other and are spaced from each other. Supporting beams 90 have a generally C-shaped or U-shaped cross section. The C-shaped cross section of each supporting beam 90 is disposed facing each other to define a generally rectangular cross section for energy absorbing assembly 86. Supporting beams 90 may also be described as channels. The C-shaped cross section of each support beam 90 is defined in part by web 92 and grips or flanges 94 and 96 extending therefrom. A

plurality of matching holes 98 are preferably formed in both grips 94 and 96 for use in attaching energy absorbing elements 100 to opposite sides of energy absorbing assembly 86.

5 For the embodiment shown in FIGURES 3, 4, and 5, a pair of energy absorbing elements 100 is attached to grips 94 on one side of energy absorbing assembly 86. Another pair of energy absorbing elements 100 is attached to grips 96 on the opposite side of energy absorbing
10 assembly 86. Spacers 104 are preferably disposed between each pair of energy absorbing elements 100 adjacent to the respective grips 94 and 96. A plurality of fasteners 103 extend through holes 98 in grips 94 and 96 and the associated energy absorbing elements 100. For the
15 embodiment of the present invention shown in FIGURES 3, 4 and 5, energy absorbing elements 100 have a relatively uniform thickness. As discussed later in more detail with respect to energy absorbing assembly 486 shown in FIGURE 7 and energy absorbing elements 152a, b, c and d
20 shown in FIGURE 20, it may be desirable to vary the thickness and/or number of energy absorbing elements extending along the length of an energy absorbing assembly.

Fasteners 103 allow easy replacement of energy
25 absorbing elements 100 after collision of a motor vehicle with impact plate 382. A wide variety of fasteners may be satisfactorily used to attach energy absorbing elements 100 with supporting beams 90.

Energy absorbing elements 100 may be formed from
30 various types of metal alloys. For some applications, mild steel is preferred. The number of energy absorbing elements 100 and their length and thickness may be varied depending upon the intended application for the resulting energy absorbing assembly. Increasing the number of
35 energy absorbing elements, increasing their thickness, and/or increasing the length of energy absorbing elements

100, will allow the resulting energy absorbing assembly to dissipate an increased amount of kinetic energy. Energy absorbing elements 100 may also be referred to as rip plates or shear plates. Benefits of the present invention include the ability to vary the geometric configuration and number of energy absorbing elements 100 and to select appropriate metal alloys depending upon the intended application for the resulting energy absorbing system.

10 For the embodiment shown in FIGURE 3, cutter plate 106 includes a pair of beveled cutting edges or ripping edges 107 and 109 which are disposed at first end 101 of respective energy absorbing assembly 86. Cutting edges 107 and 109 may also be described as rip blades. The thickness of cutter plates 106 and gap 118 between supporting beams 90 are selected to allow cutter plate 15 106 to fit between grips 94 and 96 and the adjacent supporting beams 90.

20 Slots 102 are preferably formed in the end of each energy absorbing element 100 adjacent to respective cutter plate 106. Cutting edges 107 and 109 are preferably disposed at an acute angle relative to energy absorbing elements 100. For the embodiment shown in FIGURE 3, cutting edges 107 and 109 are hardened and 25 formed at an angle of approximately forty-five degrees relative to the associated energy absorbing elements 100. The configuration of cutting edges 107 and 109, including their orientation relative to energy absorbing elements 100, is selected to cause the associated energy absorbing elements 100 to fail in tension as they are 30 stretched between the respective grips 94 and 96 of the associated support beams 90.

35 Energy absorbing elements 100 and other metal components of energy absorbing system 320 are preferably galvanized to insure that they retain their desired tensile strength and are not affected by environmental

conditions which could cause rust or corrosion during the life of the associated energy absorbing system 320.

Specific dimensions of cutting edges 107 and 109, along with their angular relationship relative to energy absorbing elements 100, may be varied depending upon the amount of kinetic energy which will be dissipated by energy absorbing assembly 86.

When a motor vehicle collides with or contacts impact fence 382, the force of the collision or impact is transmitted to energy absorbing assemblies 86 by cutter plate 106. As sled assembly 340 slides longitudinally toward roadside hazard 310, the kinetic energy of an impacting vehicle is dissipated through cutting or ripping of energy absorbing elements 100 by cutter plate 106 as shown, for example, in FIGURE 5.

For relatively low speed impacts, such as between approximately five miles per hour and eighteen miles per hour or higher, one or more relatively short lengths of energy absorbing elements 100 may be installed immediately adjacently to cutter plate 106. Thus, following a low speed impact only relatively short lengths of energy absorbing elements 100 will require replacement which substantially simplifies repair and maintenance of energy absorbing system 320.

As shown in FIGURE 2, energy absorbing assemblies 86 are preferably secured to each other by a plurality of cross braces 314. Cooperation between impact fence 382, cross braces 314 and energy absorbing assemblies 86 results in energy absorbing system 320 having a very rigid frame structure. As a result, energy absorbing system 320 is better able to safely absorb impact from a motor vehicle that strikes impact fence 382 either offset from the center of impact fence 382 or that strikes impact fence 382 at an angle other than parallel with energy absorbing assemblies 86.

Energy absorbing assemblies 186 and 486 incorporating alternative embodiments of the present invention are shown respectively in FIGURES 6 and 7. Energy absorbing assemblies 186 and 486 may be

5 satisfactorily used with energy absorbing systems 20 and 320. Energy absorbing assembly 186 shown in FIGURE 6 includes a pair of supporting beams or channels 190 similar to previously described supporting beams 90 for energy absorbing assembly 86. Energy absorbing assembly

10 186 is shown with only two energy absorbing elements or rip plates 152 disposed on opposite sides thereof. Channels 190 are spaced from each other to define cutting zone or gap 154 therebetween.

Energy absorbing elements 152 may be attached to

15 supporting beams 190 using various types of fasteners including bolts 103 as previously described for energy absorbing assemblies 86. Mechanical fasteners 198a and 198b as shown in FIGURES 13, 15 and 16 may also be used to attach energy absorbing elements 152 with

20 supporting beams 190. Alternatively, energy absorbing elements 152 may be attached to supporting beams 190 using other types of fasteners such as Huck bolts, rivets, by welding or by various adhesives. One of the main requirements is attaching energy absorbing elements

25 152 with supporting beams 190 to provide an appropriately sized cutting zone 154 between supporting beams 190 to accommodate the associated cutter plate (not shown). Energy absorbing assemblies having other configurations such as shown in corresponding U.S. patent application

30 serial number 08/870,118 filed June 5, 1997 (now U.S. Patent 5,947,452) may be satisfactorily used with an energy absorbing system incorporating teachings of the present invention.

FIGURE 7 is an exploded schematic drawing showing

35 energy absorbing assembly 486. Some of the differences between energy absorbing assemblies 86 and energy



absorbing assembly 486 include variations in the length and thickness of the energy absorbing elements which are replaceably secured to energy absorbing assembly 486. Energy absorbing assembly 486 may be formed using supporting beams 90 as previously described with respect to energy absorbing assembly 86.


For one application, supporting beams or C-channels 90 have an overall length of approximately eleven feet with a web width of approximately five inches and a flange height of approximately two inches. Multiple energy absorbing elements or rip plates 402, 404, 406, 408, 410 and 412 and multiple spacers 416 and 418 are preferably attached to C-channels 90 by threaded fasteners. For the example shown in FIGURE 7, the same number and configuration of energy absorbing elements 402, 404, 406 of various lengths and thicknesses are secured on opposite sides of C-channels 90. For one application, energy absorbing elements 402, 404, 406, 408, 410, and 412 were formed from galvanized mild steel plates. The number of energy absorbing elements, their thickness and location on the exterior of energy absorbing assembly 486 is selected to provide the desired deceleration characteristics for various sizes and types of vehicles both during high speed and low speed impacts.

Spacers 416 and 418 are provided between energy absorbing elements 410 and 412 on both sides of energy absorbing assembly 486. One of the technical benefits of the present invention includes the ability to vary the number, size and location of energy absorbing elements on each side of an energy absorbing assembly to provide the desired deceleration characteristics.

Centerline slot 102 is preferably formed in energy absorbing elements 402 and 404 immediately adjacent to the first end of energy absorbing assembly 486 to receive the associated cutter plate. For one application, slot 102 is formed along the centerline of energy absorbing

elements 402 and 404 with an opening of approximately one and one-half inches tapering to a radius of approximately one-half inch in width over a length of approximately six inches. For some applications, energy absorbing
5 elements 402 and 404 may be replaceably secured with the respective supporting beams 90 by using relatively short mechanical fastener 422. Also, the length of energy absorbing elements 402 and 404 is relatively short in comparison with other energy absorbing elements which are
10 attached to and form a part of energy absorbing assembly 486. The use of relatively short mechanical fasteners 422 and relatively short energy absorbing elements 402 and 404 allow energy absorbing assembly 486 to be quickly repaired and returned to service after a
15 relatively minor impact. Mechanical fasteners 424, preferably extend from one side of energy absorbing assembly 486 to the other side of energy absorbing assembly 486. Mechanical fasteners 422 and 424 may be bolts or Hucks as previously described.

20 Energy absorbing elements 402, 404, 406, 408, 410 and 412 provide stopping force that has been tailored for specific vehicle weights. For example, during approximately the first few feet of travel, of an associated cutter plate through energy absorbing assembly
25 486, two stages of stopping force appropriate for a vehicle weighing approximately 820 kilograms are provided. The remaining travel of a cutter plate through energy absorbing assembly 486 provides stopping force that is appropriate for larger vehicles weighing
30 approximately 2,000 kilograms. Variations in the location, size, configuration and number of energy absorbing elements 402, 404, 406, 408, 410 and 412 allows energy absorbing assembly 486 to provide safe deceleration of vehicles weighing between 820 kilograms
35 and 2,000 kilograms.



Energy absorbing element 200 as shown in FIGURE 8 has been modified to reduce the initial effects of an impact between a moving vehicle and an energy absorbing system incorporating teachings of the present invention, particularly with respect to lightweight vehicles. For some applications, center line slot 202 at first end 201 of energy absorbing element 200 may have a width of approximately three quarters of an inch and a length of approximately six inches. Slot 202 is used to receive cutter plate 206 during installation and to align cutter plate 206 with energy absorbing elements 200. A plurality of elongated, oval slots 204 are preferably formed along the center line of energy absorbing element 200 extending from slot 202. For one application, oval slots 204 have a length of approximately two and one half ($2\frac{1}{2}$) inches and a width of approximately three quarters ($\frac{3}{4}$) of an inch. The distance between the center line of adjacent oval slots 204 is approximately three inches. The number of oval slots 204 and the dimensions of oval slots 204 may be varied depending upon the intended application for the associated energy absorbing assembly. For one application, energy absorbing element 200 has an overall length of forty-five (45) inches and a width of four and one half ($4\frac{1}{2}$) inches. Oval slots 204 reduce the energy required to initiate ripping or tearing of energy absorbing element 200 on initial impact particularly with respect to a lightweight vehicle. Oval slots 204 cooperate with each other to substantially minimize the initial impact or jolt experienced by a lightweight vehicle colliding with sled assembly 340.

For some applications, energy absorbing element 200 is preferably disposed immediately adjacently to the respective cutter plate 106. Limiting the overall length of energy absorbing element 200 to approximately forty-five (45) inches reduces the time and cost of returning energy absorbing system 20 or 320 to service following a

collision by a lightweight vehicle or a slow speed
 vehicle with sled assembly 340, if repair is deemed
 appropriate. After a collision which did not require
 absorbing a substantial amount of energy, it may only be
 5 necessary to replace energy absorbing elements 200 and
 not all of the energy absorbing elements which are
 attached to the associated energy absorbing assembly 86.

Various types of mechanical fasteners may be
 satisfactorily used to releasably attach energy absorbing
 10 elements 100, 200, and/or 402, 404, 406, 408, 410
 and 412 with the associated support beams 90. For some
 applications, a combination of long bolts and short bolts
 may be satisfactorily used. For other applications, the
 mechanical fasteners may be blind threaded rivets and
 15 associated nuts. A wide variety of blind rivets, bolts
 and other fasteners may be satisfactorily used with the
 present invention. Examples of such fasteners are
 available from Huck International, Inc., located at 6
 Thomas, Irvine, California 92718-2585. Power tools
 20 satisfactory for installing such blind rivets are also
 available from Huck International and other vendors.

Energy absorbing system 20 incorporating teachings
 of the present invention is shown in FIGURES 9A, 9B and
 10 installed adjacent to one end of roadside hazard 310
 25 facing oncoming traffic. Energy absorbing system 20a
 incorporating a further embodiment of the present
 invention is shown in FIGURE 9C. Energy absorbing
 systems 20 and 20a may be formed from substantially the
 same components. Some of the differences between energy
 30 absorbing system 20 and 20a will be discussed later in
 more detail. Energy absorbing systems 20 and 20a may
 sometimes be described as "nongating, redirective crash
 cushions."

Portions of energy absorbing system 20 are shown in
 35 FIGURES 11-20. Various components and features of energy
 absorbing system 320 such as energy absorbing assemblies



86, 186 and 486 and energy absorbing elements 100, 152, 200, 402, 404, 406, 408, 410 and 412 may be incorporated into energy absorbing systems 20 and 20a as desired. Energy absorbing systems 20, 20a and 320 dissipate

5 kinetic energy by moving a cutter plate or cutter blade through respective energy absorbing elements which remain in a generally fixed position relative to roadside hazard 310.

10 FIGURE 9A is a schematic plan view showing energy absorbing system 20 in its first position, extending longitudinally from roadside hazard 310. Sled assembly 40 is slidably disposed at first end 21 of energy absorbing system 20. Sled assembly 40 may sometimes be referred to as an "impact sled."


15 First end 21 of energy absorbing system 20 including first end 41 of sled assembly 40 faces oncoming traffic. Second end 22 of energy absorbing system 20 is preferably securely attached to the end of roadside hazard 310 facing oncoming traffic. Energy absorbing system 20 is

20 installed in its first position with first end 21 longitudinally spaced from second end 22 as shown in FIGURE 9A.

25 A plurality of panel support frames 60a-60e are spaced longitudinally from each other and slidably disposed between first end 21 and second end 22. The number of panel support frames may be varied depending upon the desired length of the associated energy absorbing system. Panel support frames 60a-60e may sometimes be referred to as "intermediate frames."

30 Multiple panels 160 are respectively attached to sled assembly 40 and panel support frames 60a-60e. Panels 160 may sometimes be referred to as "fenders" or "fender panels."

35 When a vehicle impacts with first end 21 of energy absorbing system 20, sled assembly 40 will move longitudinally toward fixed roadside hazard 310. Energy




absorbing assemblies 186 (not expressly shown in FIGURES 9A and 9B) will absorb energy from the impacting vehicle during this movement. Panel support frames 60a-60e and associated panels 160 will also absorb energy from a
 5 vehicle impacting first end 21. FIGURE 9B is a schematic plan view which shows sled assembly 40 and panel support frames 60a-60e and their associated panels 160 collapsed adjacently to each other. Further longitudinal movement of sled assembly 40 toward roadside hazard 310 is
 10 prevented by panel support frames 60a-60e.

For purposes of explanation, the position of energy absorbing system 20 as shown in FIGURE 9B may be referred to as the "second" position. During most vehicle collisions with end 21 of energy absorbing system 20,
 15 sled assembly 40 will generally move only a portion of the distance between the first position as shown in FIGURE 9A and the second position as shown in FIGURE 9B.

Panel support frames 60a-60e, associated panels 160 and other components of energy absorbing system 20
 20 cooperate with each other to redirect vehicles striking either side of energy absorbing system 20 back onto the associated roadway. Respective panels 160 are attached to sled assembly 40 and preferably extend over a portion of respective panels 160 attached to panel support frame
 25 60a. In a corresponding manner, panels 160 attached to panel support frame 60a preferably extend over a corresponding portion of panels 160 attached to panel support frame 60b.

First end 161 of each panel 160 is preferably
 30 securely attached to sled assembly 40 or panel support frame 60a-60d as appropriate. Each panel 160 is also preferably slidably attached to one or more downstream panel support frames 60a-60e. Up stream panels 160 overlap down stream panels 160 to allow telescoping or
 35 nesting of respective panels 160 as panel support frames 60a-60e slide toward each other. Subsets of panel support frames 60a-60e
 and



panels 160 may be grouped together to form a one-bay group or a two-bay group. Various components of energy absorbing system 20 provide substantial lateral support to panel support frames 60a-60e and panels 160.

5 For purposes of illustration, second end 162 of each upstream panel 160 is shown in FIGURES 9A and 9B projecting a substantial distance laterally at the overlap with the associated downstream panel 160. As discussed later in more detail, panels 160 incorporating
10 teachings of the present invention will preferably nest closely with each other to minimize any lateral projection at second end 162 which might snag a vehicle during a reverse angle impact with either side of energy absorbing system 20.

15 FIGURE 9C is a schematic plan view showing energy absorbing system 20a in its first position, extending longitudinally from roadside hazard 310. Energy absorbing system 20a includes first end 21 facing oncoming traffic and second end 22 securely attached to
20 roadside hazard 310. Energy absorbing system 20a also includes sled assembly 40, panel support frames 60a-60g and respective panels 160.

Panels 160 extending along both sides of energy absorbing systems 20 and 20a have substantially the same
25 configuration. However, the length of panels 160 may vary depending on whether the respective panel 160 is used as a "one-bay panel" or for a "two-bay panel." For purposes of explanation, a "bay" is defined as the distance between two adjacent panels support frames.

30 The length of panels 160 designated as "two-bay panels" is selected to span the distance between three-panel support frames when energy absorbing systems 20 and 20a are in their first position. For example, as discussed later in more detail, first end 161 of a two-bay panel 160 is securely attached to an upstream panel support frame. Second end 162 of two-bay panel 160 is
35 slidably attached to a downstream panel support frame 60c. Another panel



support frame 60b is slidably coupled with two-bay panels 160 intermediate first end 161 and second end 162.

When sled assembly 40 hits the panel support frame of a one-bay group e.g., panel support frame 60c, the panel support frame and attached panels
 5 160 are accelerated toward the roadside hazard 310. The inertia of the panel support frame 60 and attached panels 160 contributes to the deceleration of the impacting vehicle. If the panel support frame of another one-bay group is hit, the one-bay group will be coupled to its own associated panels 160 and, therefore, will have relatively high inertia. To soften deceleration of an
 10 impacting vehicle, a two-bay group is preferably disposed downstream from each one-bay group. When sled assembly 40, or one or more panel support frames being pushed by sled assembly 40, or one or more panel support frame of a two-bay group e.g., panel support frame 60d, the inertia is the same or slightly more than (because of the longer panels 160) the inertia of a one-bay
 15 group. However, when the second panel support frame of the two-bay group e.g., panel support frame 60e, is contacted, the second panel support frame 60 has a lower inertia because it is only slidably coupled to the associated panels 160. Therefore, deceleration is somewhat reduced.

Energy absorbing system 20a has the following groups
 20 of bays: 2-2-1-2-2, where "2" means two bays and "1" means one bay. Beginning at sled assembly 40 and moving toward roadside hazard 310, energy absorbing system 20a has a two-bay group (counting sled assembly 40 as a bay in and of itself), another two-bay group, a one-bay
 25 group, followed by a two-bay group and another two-bay group.

As best shown in FIGURE 10, nose cover 83 may be attached to sled assembly 40 at first end 21 of energy absorbing system 20. Nose cover 83 may be a generally
 30 rectangular sheet of flexible plastic type material.



Opposite edges of nose cover 83 are attached to corresponding opposite sides of end 41 of sled assembly 40. End 41 of sled assembly 40 is normally located at first end 21 of energy absorbing system 20. Nose cover 83 preferably includes a plurality of chevron delineators 84 which are visible to oncoming traffic approaching roadside hazard 310. Various types of reflectors and/or warning signs may also be mounted on sled assembly 40 and along each side of energy absorbing system 20.

Energy absorbing system 20 preferably includes multiple energy absorbing assemblies 186 aligned in respective rows 188 and 189 (See FIGURE 20) extending generally longitudinally from fixed roadside hazard 310 and parallel with each other. For some applications, each row 188 and 189 may contain two or more energy absorbing assemblies 186.

For the embodiment of the present invention as shown in FIGURE 20, energy absorbing assembly 186 in row 188 is spaced laterally from energy absorbing assembly 186 in row 189. Rows 188 and 189 and/or energy absorbing assemblies 186 may sometimes be referred to as a "guidance track" for sled assembly 40 and panel support frames 60a-60c.

An energy absorbing system incorporating teachings of the present invention may have energy absorbing assemblies arranged in various configurations. For some applications, only a single row of energy absorbing assemblies may be installed adjacent to roadside hazard 310. For other applications, three or more rows of energy absorbing assemblies may be installed. Also, each row may only have one energy absorbing assembly or multiple energy absorbing assemblies.

As discussed later in more detail, energy absorbing assemblies 186 are preferably securely attached to concrete foundation 308 in front of roadside hazard 310. Each row 188 and 189 of energy absorbing assemblies 186



has a respective first end 187 which corresponds generally with first end 21 of energy absorbing system 20. First end 41 of sled assembly 40 is preferably disposed adjacent to first end 187 of rows 188 and 189 prior to a vehicle impact.

Ramp assembly 30 is preferably provided at end 21 of energy absorbing system 20 to prevent small vehicles or vehicles with low ground clearance from directly impacting first end 187 of rows 188 and 189. If ramp assembly 30 is not provided, a small vehicle or vehicle with low ground clearance may contact either or both first ends 187 and experience severe deceleration with substantial damage to the vehicle and/or injury to occupants in the vehicle.

Various types of ramps and other structures may be provided to ensure that a vehicle impacting end 21 of energy absorbing 20 will properly engage sled assembly 40 and not directly contact first ends 187 of rows 188 and 189. For the embodiment of the present invention as shown in FIGURES 10, 11, and 14, ramp assembly 30 includes a pair of ramps 32. Each ramp 32 preferably includes leg 34 with tapered surface 36 extending therefrom. Connectors 38 extend from leg 34 opposite from tapered surface 36. As best shown in FIGURE 14, connectors 38 allow each ramp 32 to be securely engaged with respective energy absorbing assembly 186.

For some applications, leg 34 may have a height of approximately six and one-half inches. Other components associated with energy absorbing system 20 such as energy absorbing assemblies 186 and guide rails 208 and 209 will preferably have a generally corresponding height. Limiting the height of ramps 32 and energy absorbing assemblies 186 will allow such components to pass under a vehicle impacting with end 41 of sled assembly 40.

Tapered surfaces 36 may have a length of approximately thirteen and one-half inches. Tapered

surfaces 36 may be formed by cutting a structural steel angle (not expressly shown) having nominal dimensions of three inches by three inches by one-half inch thick into sections with appropriate lengths and angles. The sections of structural steel angle may be attached to respective legs 34 using welding techniques and/or mechanical fasteners. Ramps 32 may also be referred to as "end shoes."

For some applications, roadside hazard 310 and/or energy absorbing system 20 may be disposed on and attached to a suitable concrete foundation. For the embodiment shown in FIGURES 10, 13 and 15, concrete foundation 308 preferably extends both longitudinally and laterally from roadside hazard 310. As best shown in FIGURES 13, 15, 16 and 20 energy absorbing assemblies 186 are preferably disposed on and secured to a plurality of cross ties 24. Each cross tie 24 is preferably secured to concrete foundation 308 using respective bolts 26. Various types of mechanical fasteners in addition to bolts 26 may be satisfactorily used to secure cross ties 24 with concrete foundation 308.

For the embodiment of the present invention as shown in FIGURES 10-20, cross ties 24 may be formed from structural steel strips having a nominal width of three inches and a nominal thickness of one half inch. The length of each cross tie 24 may be approximately twenty-two inches. Three holes are preferably formed in each cross tie 24 to accommodate bolts 26. During a vehicle collision with either side of energy absorbing system 20, cross ties 24 are placed in tension. The materials used to form cross ties 24 and their associated configuration are selected to allow cross ties 24 to deform in response to tension from such side impacts and to absorb energy from the impacting vehicle.

Energy absorbing assemblies 186 are similar to previously described energy absorbing assemblies 86. For

example, see FIGURES 6, 13 and 15. For purposes of describing embodiments of the present invention as shown in FIGURES 9A-20, supporting beams 190 immediately adjacent to cross ties 24 are designated 190a. The
5 respective supporting beams 190 disposed immediately there above are designated 190b. Supporting beams 190a and 190b have substantially identical dimensions and configurations (See FIGURE 13) including respective web
10 192 with grips or flanges 194 and 196 extending therefrom. For the embodiment as shown in FIGURES 9A-20, four cross ties 24 are preferably attached to web 192 of supporting beams 190a opposite from respective flanges 194 and 196. As a result, the generally C-shaped cross section of each supporting beam 190a extends away from
15 respective cross ties 24.

The number of cross ties 24 attached to each supporting beam 190a may be varied depending upon the intended use of the resulting energy absorbing system. For energy absorbing system 20, two supporting beams 190a
20 are spaced laterally from each other and attached to four cross ties 24. Conventional welding techniques and/or mechanical fasteners (not expressly shown) may be used to attach supporting beams 190a with cross ties 24.

A plurality of energy absorbing elements 152 is preferably attached to respective supporting beams 190a and 190b using mechanical fasteners 198a and 198b. For
25 some applications each energy absorbing element 152 may have substantially the same configuration and dimensions. For other applications such as shown in FIGURE 20 energy absorbing elements 152a, 152b, 152c, 152d, 152e and 152f
30 with varying lengths, widths, and thicknesses may be used to form energy absorbing assemblies 186.

A pair of guide rails or guide beams 208 and 209 are preferably attached to and extend laterally from
35 respective supporting beams 190b. Guide rails 208 and 209 are preferably formed from structural steel angles

having legs of equal width such as three inches by three inches and a thickness of approximately one-half of an inch. Guide rails 208 and 209 each have first leg 211 and second leg 212 which intersect each other at approximately a ninety-degree angle. A plurality of holes (not expressly shown) is preferably formed along the length of second leg 212 to allow attaching guide rails 208 and 209 with mechanical fasteners 198b to respective supporting beams 190b. Mechanical fasteners 198b are preferably longer than mechanical fasteners 198a to accommodate guide rails 208 and 209 and longitudinal force causing sled assembly 40 to move toward roadside hazard 310.

As shown in FIGURES 10, 11, 13 and 14, sled assembly 40 is slidably disposed on guide rails 208 and 209. As best shown in FIGURES 15 and 16, panel support frames 60a-60e are also slidably disposed on guide rails 208 and 209. For the embodiment of the present invention as shown in FIGURE 10, the length of guide rails 208 and 209 is longer than the length of the associated rows 188 and 189 of energy absorbing assemblies 186. When energy absorbing system 20 is in its second position as shown in FIGURE 9B, panel support frames 60a-60e are disposed immediately adjacently to each other which prevents further movement of sled assembly 40. Therefore, it is not necessary for rows 188 and 189 of energy absorbing assemblies 186 to have the same length as guide rails 208 and 209.

For the embodiment of the present invention as represented by energy absorbing system 20, sled assembly 40 has the general configuration of an open sided box. See FIGURE 12. The materials used to form sled assembly 40 and their configuration are preferably selected to allow sled assembly 40 to remain intact after impact by a high speed vehicle. First end 41 of sled assembly 40 corresponds generally with first end 21 of energy



absorbing system 20. End 41 may also be referred to as the "upstream" end of sled assembly 40. End 47 of sled assembly 40 is disposed opposite from end 41. End 47 may also be referred to as the "downstream" end of sled assembly 40. Sled assembly 40 also includes sides 48 and 49 which extend between ends 41 and 47. As shown in FIGURES 11 and 13, sides 48 and 49 of sled assembly 40 are preferably covered by panels 160. For purposes of illustration, panels 160 have been removed from side 48 in FIGURE 12.

Sled assembly 40 is further defined by corner posts 42, 43, 44 and 45 which extend generally vertically from guide rails 208 and 209. For the embodiment of the present invention as shown in FIGURES 10-14, corner posts 42 and 43 may be formed from structural steel strips having a width of approximately four inches, a thickness of approximately three quarters of an inch. Each corner post 42 and 43 has a length of approximately thirty-two inches. Tapered surface 46 is preferably formed on the end of each corner post 42 and 43 immediately adjacent to the ground or concrete foundation 308. The dimensions and configuration of tapered surfaces 46 is preferably selected to minimize or eliminate contact between concrete foundation 308 and respective ends of corner posts 42 and 43 that might prevent smooth linear movement of sled assembly 40 along guide rails 208 and 209 toward roadside hazard 310.

Corner posts 44 and 45 may be formed from structural steel angles having legs of equal width such as two and one half inches by two and one half inches and a thickness of approximately three-eighths of an inch. Corner posts 44 and 45 preferably have a length of approximately twenty-nine inches. Various configurations of braces and supports may be used to rigidly attach corner post 42, 43, 44 and 45 with each other to provide the desired structural strength for sled assembly 40.

For the embodiment of the present invention as shown in FIGURES 10-14, top brace 141 preferably extends laterally between corner posts 42 and 43. Top brace 142 preferably extends laterally between corner posts 44 and 45. A pair of top braces 148 and 149 extend longitudinally between top braces 141 and 142 along respective sides 48 and 49 of sled assembly 40. Bottom brace 51 preferably extends laterally between corner post 42 and corner post 43 immediately above guide rails 208 and 209. Another bottom brace 52 preferably extends laterally between corner post 44 and corner post 45 immediately above guide rails 208 and 209.

End 41 of sled assembly 40 also includes braces 146 and 147 extending diagonally between respective corner posts 42 and 43 and bottom brace 51. Corner posts 42 and 43, top brace 141, bottom brace 51 and braces 146 and 147 cooperate with each other to provide a very rigid, strong structure at first end 41 of sled assembly 40. End 47 of sled assembly 40 includes diagonal braces 143, 144 and 145 along with diagonal braces 146 and 147 to provide additional structural support for sled assembly 40.

The dimensions of end 41 of sled assembly 40 which are defined in part by corner posts 42 and 43, top brace 141 and bottom brace 51 are selected to catch or gather an impacting vehicle. During a collision between a motor vehicle and first end 21 of energy absorbing assembly 20, kinetic energy from the colliding vehicle is transferred from first end 41 to other components of sled assembly 40. The dimensions and configuration of end 41 may also be selected to effectively transfer kinetic energy even if a vehicle does not impact the center of first end 41 or if a vehicle impacts end 41 at an angle other than parallel with the longitudinal axis of energy absorbing system 20.

A pair of C-shaped channels 50 and 53 preferably extend diagonally from top brace 141 to bottom brace 52.

Channels 50 and 53 are preferably spaced laterally from each other and laterally from corner posts 42 and 43 and corner posts 44 and 45. Guide assembly 54 is preferably attached to the ends of channels 50 and 53 extending from
5 bottom brace 52. The length of channels 50 and 53 is selected to ensure that guide assembly 54 will contact web 192 of respective supporting beams 190b.

Guide assembly 54 preferably includes plate 55. The end of channels 50 and 53 extending from bottom brace 52
10 are attached to one side of plate 55. A pair of guides 58 and 59 are preferably attached to and extend generally vertically from the opposite side of plate 55. Guides 58 and 59 are disposed at an angle relative to each other and the center of guide assembly 54 to assist in
15 maintaining sled assembly 40 properly positioned between rows 188 and 189 of energy absorbing assemblies 186. Plate 55 may sometime be referred to as a guide shoe or skid. Guides 58 and 59 may sometimes be referred to as "diverters."

Respective tabs 56 and 57 are attached to the bottom
20 end of corner posts 44 and 45 adjacent to energy absorbing assemblies 186. Tabs 56 and 57 project laterally inward from respective corner posts 44 and 45 toward and under guide rails 208 and 209. Bottom brace
25 52 is preferably spaced from tabs 56 and 57 such that legs 211 of guide rails 208 and 209 may be respectively disposed between tabs 56 and 57 and bottom brace 52. As best shown in FIGURE 13, tabs 56 and 57 cooperate with bottom brace 52 to securely maintain sled assembly 40 on
30 guide rails 208 and 209 while at the same time allowing sled assembly 40 to slide along guide rails 208 and 209 toward roadside hazard 310. Tabs 56 and 57 are particularly helpful in preventing undesired lateral rotation of sled assembly 40 in response to a side
35 impact.

Most impacts between a motor vehicle and end 41 of sled assembly 40 will generally occur at a location substantially above energy absorbing assemblies 186. As a result, vehicle impact with end 41 will generally result in applying a rotational moment to sled assembly 40 which forces bottom brace 52 to bear down on the top of guide rails 208 and 209.

The dimensions of plate 55 and guides 58 and 59 are selected to be compatible with web 192 of channels 190. During a collision between a motor vehicle and end 41 of sled assembly 40, force from the vehicle is transferred from top brace 141 through channels 50 and 53 to bottom brace 52 and guide assembly 54. As a result, plate 55 will apply force to supporting beams 190b to maintain the desired orientation of sled assembly 40 relative to energy absorbing assemblies 186.

The inertia of sled assembly 40 and the friction associated with bottom brace 52 sliding over the top of guide rails 208 and 209 and the friction caused by contact between plate 55 and the top of supporting beams 190b will contribute to deceleration of the impacting vehicle.

For the embodiment of the present invention as best shown in FIGURES 11, 12 and 14 connectors 214 and 216 are attached to bottom brace 51 opposite from cross braces 145 and 146. Connectors 214 and 216 are spaced laterally from each other to receive connector 220 which is attached to and extends from cutter plate 206. Connectors 222 and 224 are also preferably attached to corner post 42 and extend laterally therefrom. Corresponding connectors 222 and 224 are also attached to corner post 43 and extend laterally therefrom. Connectors 222 are spaced from respective connectors 224 a distance corresponding generally with the thickness of cutter plate 206. As best shown in FIGURE 14, a plurality of holes is provided in connectors 214, 216,

220, 222, 224 and cutter plate 206 to allow mechanical fasteners to securely attach cutter plate 206 with sled assembly 40 adjacent to energy absorbing assemblies 186.

As best shown in FIGURES 12, 14 and 20 cutter plate 206 preferably includes two sets of beveled cutting edges or ripping edges 107 and 109. Sled assembly 40 is slidably disposed on guide rails 208 and 209 with cutting edges 107 and 109 aligned with first end 187 of energy absorbing assemblies 186. The thickness of cutter plate 206 and the gap or cutting zone 154 between supporting beams 190a and 190b are selected to allow cutter plate 206 to fit between flanges 194 and 196 of supporting beams 190a and 190b. Cutter plate 206 is located within slots 102 of energy absorbing assemblies 186.

As best shown in FIGURE 14, cutter plate 206 preferably includes respective guide plates 268. A respective guide plate 268 is provided on each side of cutter plate 206 for each supporting beam 190. The width of each guide plate 268 is selected to be compatible with the width of the respective supporting beam 190. The combined thickness of each cutter plate 206 along with respective guide plates 268 is selected to be compatible with gap or cutting zone 154 formed between respective support beams 190. The thickness of cutting plate 206 is selected to correspond generally with the dimensions of gap 154. Each guide plate 268 is preferably disposed within the generally C-shaped cross section defined by web 192 and flanges 194 and 196 of the associated support beams 190. For some applications, gap or cutting zone 154 between supporting beams 190a and 190b may be approximately one inch (or twenty-five millimeters) and the thickness of cutter plates 206 may be approximately one half inch.

During a collision with end 21 of energy absorbing system 20, a vehicle will experience a deceleration spike as momentum is transferred from the vehicle to sled

assembly 40 which results in sled assembly 40 and the vehicle moving in unison with each other. The amount of deceleration due to the momentum transfer is a function of the weight of sled assembly 40, along with the weight and initial speed of the vehicle. As sled assembly 40 slides longitudinally toward roadside hazard 310, guide assembly 54 will contact respective supporting beams 190b to maintain the desired alignment between sled assembly 40 and energy absorbing assemblies 186 and cutter plates 206. Sled assembly 40 maintains cutter blade 206 in alignment with cutting zone 154.

As sled assembly 40 continues sliding toward roadside hazard 310, cutter plate 206 will engage and separate energy absorbing elements 152 of the respective energy absorbing assemblies 186. When sled assembly 40 is impacted by a vehicle, cutter plate 206 is pushed into the edge of each energy absorbing element 152. Beveled edges 107 and 109 of cutter plate 206 engage the respective energy absorbing elements 152. Cutter plate 206 may be formed from various steel alloys. Beveled edges 107 and 109 are preferably hardened to provide desired cutting and/or ripping of energy absorbing elements 152.

The center portion of each energy absorbing element 152 is forced inwardly between respective supporting beams 190, while the top and bottom portions of each energy absorbing element 152 are fixed to respective supporting beams 190 by bolts 198a and 198b. The center portion of each energy absorbing element 152 continues to be stretched or deformed by cutter plate 206 until the respective energy absorbing element 152 typically fails in tension. This creates a separation in each energy absorbing element 152 which propagates along the length of respective energy absorbing elements 152 as sled assembly 40 continues to be push cutter plate 206 therethrough.



The separation of energy absorbing elements 152 will stop when kinetic energy from the impacting vehicle has been absorbed. After the passage of cutter plate 206, one or more energy absorbing elements 152 will be separated into upper and lower parts (See FIGURE 5), which upper and lower parts are separated by a gap.

Cutter plate 206, when viewed from associated energy absorbing elements 152, has the configuration of a deep, strong beam. Cutter plate 206 is secured to sled assembly 40 at both ends and in the center and is therefore rigid. Thus, when cutter plate 206 engages energy absorbing elements 152, the energy absorbing elements 152 fails while cutter plate 206 does not.

As previously noted, the thickness and number of energy absorbing elements 152 may be varied to safely absorb the kinetic energy from a wide range of vehicle types, sizes and/or speeds of impact. The rotational moment which is generally applied to end 41 of sled assembly 40 will also increase frictional forces between cutter plate 206 and portions of energy absorbing element 152 which have been sheared or ripped.

For the embodiment as shown in FIGURE 9A, end 47 of sled assembly 40 will contact panel support frame 60a which will, in turn, contact panel support frame 60b and any other panel support frames disposed downstream from sled assembly 40. Movement of sled assembly 40 toward roadside hazard 310 results in telescoping of panel support frames 60 and their associated panels 160 with respect to each other. The inertia of panel support frames 60 and their associated panels 160 will further decelerate an impacting vehicle as sled assembly 40 moves longitudinally from first end 21 toward second end 22 of energy absorbing system 20. The telescoping or sliding of panels 160 against one another produces additional friction forces which also contribute to deceleration of the vehicle. Movement of panel support frames 60 along



guide rails 208 and 209 also produces additional frictional forces to even further decelerate the vehicle.

As previously discussed with respect to FIGURES 9A and 9B, panel support frames 60a-60e and associated panels 160 will redirect vehicles striking either side of energy absorbing system 20 back onto the associated roadway. Each panel 160 preferably has a generally elongated rectangular configuration defined in part by first end or upstream end 161 and second end or downstream end 162. (See FIGURES 9A, 10 and 17.) Each panel 160 preferably includes first edge 181 and second edge 182 which extend longitudinally between first end 161 and second end 162. (See FIGURES 10, 17 and 18.) For some applications panels 160 may be formed from standard ten (10) gauge W beam guardrail sections having a length of approximately thirty-four and three-fourth inches for "one-bay panels" and five feet two inches for "two-bay panels." Each panel 160 preferably has approximately the same width of twelve and one-fourth inches.

As shown in FIGURES 16 and 17, slot 164 is preferably formed in each panel 160 intermediate ends 161 and 162. Slot 164 is preferably aligned with and extends along the longitudinal center line (not expressly shown) of each panel 160. The length of slot 164 is less than the length of the associated panel 160. A respective slot plate 170 is slidably disposed in each slot 164.

Metal strap 166 is preferably welded to first end 161 of each panel 160 along edges 181 and 182 and the middle. For some applications metal strap 166 may have a length of approximately twelve and one-fourth inches and a width of approximately two and one-half inches. The length of each metal strap 166 is preferable equal to the width of the respective panel 160 extends between respective longitudinal edges 181 and 182.

Mechanical fasteners 167, 168, and 169 may be used to attach each metal strap 166 with its associated corner post 68 or 69. Mechanical fasteners 167 and 169 are substantially identical. Metal straps 166 provide more contact points for mounting end 161 of panels 160 to respective panel support frames 60a-60f.

Recesses 184 are preferably formed in each panel 160 at the junction between second end 162 and respective longitudinal edges 181 and 182. (See FIGURE 17)

Recesses 184 allow panels 160 to fit with each other in a tight overlapping arrangement when energy absorbing system 20 is in its first position. As a result, recesses 184 minimize the possibility of a vehicle snagging the sides of energy absorbing system 20 during a "reverse angle" collision or impact.

Panel support frames 60a-60e have substantially the same dimensions and configuration. Therefore, only panel support frame 60e as shown in FIGURE 16 will be described in detail. Panel support frame 60e has a generally rectangular configuration defined in part by first post 68 disposed adjacent to guide rail 208 and second post 69 disposed adjacent to guide rail 209. Top brace 61 extends laterally between first post 68 and second post 69. Bottom brace 62 extends laterally between first post 68 and second post 69. The length of posts 68 and 69 and the location of bottom brace 62 are selected such that when panel support frame 60e is disposed on guide rails 208 and 209, bottom brace 62 will contact guide rails 208 and 209 but posts 68 and 69 will not contact concrete foundation 308.

A plurality of cross braces 63, 64, 65, 70 and 71 may be disposed between posts 68 and 69, top brace 61 and bottom brace 62 to provide a rigid structure. For some applications cross braces 63, 64, 65, 70 and 71 and/or posts 68 and 69 may be formed from relatively heavy structural steel components. Also, cross brace 65 may be




installed at a lower position on posts 68 and 69. The weight of support frames 60a-60e and the location of the associated cross braces to provide desired strength during a side impact with energy absorbing system 20.

5 Tab 66 (See FIGURE 15) is attached to the end of post 69 adjacent to concrete foundation 308 and extends laterally toward energy absorbing assemblies 186. Tab 67 is attached to the end of post 68 adjacent to concrete assembly 308 and extends laterally toward energy
10 absorbing assemblies 186. Tabs 66 and 67 cooperate with bottom brace 62 to maintain panel supporting frame 60e engaged with guide rails 208 and 209 during a side impact with energy absorbing system 20 to prevent or minimize rotation in a direction perpendicular to guide rails 208
15 and 209 while allowing panel supporting frame 60e to slide longitudinally toward roadside hazard 310.

Impact from a vehicle colliding with either side of energy absorbing assembly 20 will be transferred from panels 160 to panel support frames 60a-60g. The force of
20 the lateral impact will then be transferred from panel support frames 60a-60g to the associated guide rails 208 and/or 209 to energy absorbing assemblies 186 through cross ties 24 and mechanical fasteners 26 to concrete
25 foundation 308. Cross ties 24, mechanical fasteners 26, energy absorbing assemblies 186, guide rails 208 and 209 along with panel support frames 60a-60g provides lateral support during a side impact with energy absorbing system 20.

For purposes of explanation, panels 160 shown in FIGURES 17 and 18
30 have been designated 160a, 160b, 160c, 160d, 160e and 160f. Further, the longitudinal edges of panels 160a-160d are identified as longitudinal edges 181a-181d and 182a-182d, and the longitudinal edges of panel 160f are identified as longitudinal edges 181f and 182f. Also, for panels 160a, 160b and 160d, ends 161 and 162 are identified as ends 161a and 162a, ends 161b and
35 162b and ends 161d and 161d, respectively. Likewise, for panel 160c, the upstream end is identified as end 161c, and for panel 160e, the downstream end



is identified as end 162e. For the embodiment of the present invention, as shown in FIGURE 17, respective metal straps 166 are provided to attach first end 161a and first end 161d to post 68 of panel support frame 60c. In a similar manner, respective metal straps 166 are provided to securely attach first end
 5 161b and 161e to corner post 68 of panel support frame 60d. As best shown in FIGURE 18, both 168 extends through hold 172 in respective slot plate 170 and a corresponding hole (not expressly shown) in panel 160b.

As best shown in FIGURE 19, slot plate 170 preferably includes hole 172 extending therethrough. A pair of fingers 174 and 176 extend laterally from one
 10 side of slot plate 170. Fingers 174 and 176 are sized to be received within slot 164 of the associated panel 160. Mechanical fastener 168 is preferably longer than mechanical fasteners 167 and 169 to accommodate slot plate 170. Each slot plate 170 and bolt 168 cooperate
 15 with each other to securely anchor end 161 of an inner panel 160 with the associate post 68 or 69 while allowing an outer panel 160 to slide longitudinally relative to the associated post 68 or 69. See inner panel 160b and outer panel 160a in FIGURE 18.

For the embodiment of the present invention as shown in FIGURES 17 and 18, a portion of bolt 168 along with associated fingers 174 and 176 of slot plate 170 are slidably disposed in longitudinal slot 164 of panel 160b. During a vehicle impact with end 21 of energy absorbing
 20 assembly 20, panel support frame 60c with first end 161a of panel 160a will move longitudinally toward roadside hazard 310. The engagement of the associated slot plate 170 within longitudinal slot 164 will allow panel 160a to slide longitudinally relative to panel 160b until panel
 25 support frame 60c contacts panel support frame 60d. When this contact occurs, panel support frame 60d and associated panels 160 will move with panel support frame 60c and its associated panels 160 toward roadside hazard 160.

35 Upon a vehicle impact with the sled assembly 40, sled assembly 40 is pushed into



the frames which are maintained in vertical alignment by guide rails 208 and 209, bottom brace 62 and tabs 66 and 67 as the frames slide toward roadside hazard 310.

As previously discussed each panel support frame
5 60a-60e is slidably disposed on guide rails 208 and 209.
As best shown in FIGURE 17, upstream panel 160b overlaps
downstream panel 106c. End 161c of downstream panel 160c
is preferably welded to strap 166. Slot plate 170 is
slidably disposed in slot 164 of upstream panel of 160b.
10 Therefore, as panel support frame 60d moves
longitudinally toward panel support frame 60e, panel 160b
may slide longitudinally and telescope over downstream
panel 160c.

For many applications, energy absorbing elements
15 disposed immediately adjacently to sled assembly 40 will
typically be relatively thin or "soft" to decelerate
relatively small, slow-moving vehicles. The length of
energy absorbing system 20 is preferably selected to be
long enough to provide for multiple stages for
20 satisfactory deceleration of large, high-speed vehicles
after sled assembly 40 has moved through the front
portion with "relatively soft" energy absorbing elements.
Generally, energy absorbing elements installed in the
middle portion of energy absorbing system 20 and
25 immediately adjacent to roadside hazard 310 will be
relatively "hard" as compared to energy absorbing
elements installed adjacent to first end 21.

When a vehicle initially impacts end 21 of energy
absorbing system 20, any occupants who are not wearing a
30 seat belt or other restraining device will be catapulted
forward from their seat. Properly restrained occupants
will generally decelerate with the vehicle. During the
short time period and distance sled assembly 40 travels
along guide rails 208 and 209, an unrestrained occupant
35 may be airborne inside the vehicle. Deceleration forces
applied to the impacting vehicle during this same time



period may be quite large. However, just prior to an unrestrained occupant contacting interior portions of the vehicle, such as the windshield (not expressly shown), deceleration forces applied to the vehicle will preferably be reduced to lower levels to minimize possible injury to the unrestrained occupant.

The relative "softness" or "hardness" of energy absorbing system 20 is determined by the number and characteristics of energy absorbing elements 152, the location of energy absorbing elements 152, and the location and inertia associated with panel support frames 60a-60g and their associated panels 160. For example, energy absorbing element 200 shown in FIGURE 8 may be modified to be relatively hard by reducing the number and/or size of oval slot 204. In the same manner, energy absorbing element 200 may be made relatively soft by increasing the number and/or size of oval slot 204. Increasing the thickness of energy absorbing elements 152 will increase the amount of force required to push cutter plate 206 therethrough and thus, produces a harder portion in the associated energy absorbing system 20. Energy absorbing assembly 486 as previously described in FIGURE 7 shows various techniques for increasing the hardness of an energy absorbing system. Thus, the present invention allows modifying energy absorbing system 20 to minimize possible injury to both restrained and unrestrained occupants in a wide variety of vehicles traveling at various speeds.

Energy absorbing system 20 as shown in FIGURE 20 preferably includes energy absorbing elements 152a, 152b, 152c, 152d, 152e and 152f. Energy absorbing elements 152a and 152b are preferably formed from relatively thin sixteen gauge construction steel strips having a nominal width of four and one half inches. Energy absorbing element 152a preferably has a nominal length of approximately fifty-four inches. Energy absorbing



element 152b preferably has a nominal length of
 approximately sixty inches. Energy absorbing elements
 152c and 152d are preferably formed from structural steel
 strips having a nominal width of four and one half inches
 5 and thickness of three-sixteenths of an inch. Energy
 absorbing element 152c preferably has a nominal length of
 approximately seventy-six inches. Energy absorbing
 element 152d preferably has a nominal length of
 approximately seventy inches. Energy absorbing elements
 10 152e are preferably formed from the same type of
 material. Energy absorbing elements 152f are preferably
 formed from structural steel strips having a width of
 approximately four and one-half inches and a length of
 approximately ninety-two inches. Each energy absorbing
 15 element 152f preferably has a thickness corresponding
 with ten gauge construction steel strips.

By combining energy absorbing elements 152a, 152b,
 152c, 152d, 152e and 152f, as shown in FIGURE 20, energy
 absorbing assemblies 186 will have a relatively "soft"
 20 first portion, a "hard" middle portion and a "harder"
 final portion adjacent to roadside hazard 310. Energy
 absorbing elements 152a, 152b, 152c, 152d, 152e and 152f
 are staggered to decrease the change in deceleration
 forces applied to an impacting vehicle as cutter blade
 206 passes from the first portion of energy absorbing
 25 assembly 220 to the middle portion of energy absorbing
 system 20.

When sled assembly 40 hits thicker energy absorbing media, such as the
 previously described energy absorbing elements, sled assembly 40 slows down
 30 while the panel support frames continue to slide toward fixed hazard 310,
 telescoping panels 160 along the way. Thus, the panel support frames will
 typically move out of the way so that they no longer contribute to deceleration
 of the vehicle.



If the sled assembly 40 is hit at an angle, energy absorbing system 20 will generally function as previously described to decelerate the impacting vehicle. Depending upon the angle of impact with sled assembly 40,
 5 additional deceleration may occur due to increased friction forces being applied to sled assembly 40 as it slides along guide rails 208 and 209.

If panels 160 are hit, the vehicle is redirected back to the roadway and away from the fixed hazard. The
 10 impact is transmitted from the panels 160 to respective panel frames. The panel support frames attempt to rotate, as panels 160 are usually hit high. However,

the panel support frames 60 are prevented from rotating on guide rails 208 and 209 by inwardly extending
 15 projections 56 and 57 underneath beam guides on the rails. Thus, the system "gives" when hit on its side by allowing the cross-ties to deform. Much like the system's collapse during a head on collision, this "give" on a lateral impact reduces deceleration forces applied
 20 to a side impacting vehicle. The system remains in place after a lateral redirecting impact.

End weldment 242 is preferably provided at end 22 of energy absorbing system 20 for use in attaching energy absorbing system 20 with the end of roadside hazard 310
 25 facing oncoming traffic. For some applications end weldment 242 has substantially the same configuration as panel supporting frames 60a-60g.

Although the present invention has been described in detail, it should be understood that various changes,
 30 substitutions and alterations can be made hereto without departing from the spirit and scope of the invention as defined by the appended claims.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. An energy absorbing system to minimize the results of a collision between a vehicle traveling on a roadway and a roadside hazard comprising:

the energy absorbing system having a first end and a second end;

5 the second end of the energy absorbing system disposed adjacent to the roadside hazard with the first end extending longitudinally therefrom;

a sled assembly slidably disposed at the first end of the energy absorbing system;

at least one energy absorbing assembly disposed between the roadside hazard and the sled assembly;

10 each energy absorbing assembly having at least one energy absorbing element;

the sled assembly having a cutter plate mounted adjacent to and aligned with each energy absorbing element; and

15 the sled assembly having a first end facing oncoming traffic whereby a collision of a vehicle with the first end of the sled assembly will cause the cutter plate to slide longitudinally relative to the energy absorbing element and dissipate kinetic energy of the vehicle by separating the energy absorbing element.

2. The energy absorbing system of Claim 1 further comprising:

20 a pair of energy absorbing assemblies extending longitudinally from the roadside hazard and spaced laterally from each other; and

the cutter plate having two sets of cutter blades with one set of cutter blades disposed adjacent to and aligned with one energy absorbing assembly and the other set of cutter blades disposed adjacent to and aligned with the other energy absorbing assembly.

3. The energy absorbing system of Claim 1 further comprising:

25 a first row of energy absorbing assemblies and a second row of energy absorbing assemblies extending longitudinally from the roadside hazard;

the first row and the second row of energy absorbing assemblies spaced laterally from each other; and




the cutter plate having a first set of cutter blades and a second set of cutter blades with the first set of cutter blades aligned with the first row of energy absorbing assemblies and the second set of cutter blades aligned with the second row of energy absorbing assemblies.

- 5 4. The energy absorbing system of Claim 1 further comprising:
 a first row of energy absorbing assemblies and a second row of energy absorbing
 assemblies extending longitudinally from the roadside hazard;
 the first row and the second row of energy absorbing assemblies spaced laterally from
 each other; and
 10 the sled assembly having a guide assembly attached to and extending therefrom for
 engagement with the first row and the second row of energy absorbing assemblies.

- 15 5. The energy absorbing system of Claim 1 further comprising:
 a pair of energy absorbing assemblies spaced laterally from each other;
 the sled assembly slidably coupled to one end of each energy absorbing assembly;
 each energy absorbing assembly further comprising at least one energy absorbing
 element; and

20 the cutter plate having two sets of cutter blades disposed adjacent to respective energy
 absorbing assemblies whereby the collision between the vehicle and the sled assembly will result
 in the cutter plate separating at least one respective energy absorbing element to dissipate energy
 from the collision of the vehicle.

- 25 6. The energy absorbing system of Claim 1 further comprising:
 a first row of energy absorbing assemblies and a second row of energy absorbing
 assemblies extending longitudinally from the roadside hazard;
 the first row and the second row of energy absorbing assemblies spaced laterally from
 each other;
 a first guide rail attached to and extending laterally from the first row of energy absorbing
 assemblies; and
 30 a second guide rail attached to and extending laterally from the second row of energy
 absorbing assemblies.



7. The energy absorbing system of Claim 1 wherein each energy absorbing assembly further comprises:

a pair of supporting beams disposed longitudinally parallel with each other;
the supporting beams spaced from each other;

5 a pair of energy absorbing elements attached respectively to opposite sides of each supporting beam; and

the distance between the supporting beams selected to allow the cutter plate to rip each energy absorbing element to dissipate energy from the impact by the vehicle.

10 8. The energy absorbing system of Claim 1 further comprising:

the cutter plate attached to the sled assembly;

at least one energy absorbing assembly having a plurality of energy absorbing elements attached thereto with the sled assembly slidably coupled to one end of the energy absorbing assembly;

15 the plurality of energy absorbing elements aligned with the cutter plate; and

the energy absorbing elements having a variation in thickness along the length of the energy absorbing assembly whereby an increasing amount of force is required to move the cutter plate through the energy absorbing elements.

20 9. An energy absorbing system to minimize the results of a collision between a vehicle traveling on a roadway and a roadside hazard comprising:

the energy absorbing system having a first end and a second end;

the second end of the energy absorbing system disposed adjacent to the roadside hazard with the first end extending longitudinally therefrom;

25 a sled assembly slidably disposed at the first end of the energy absorbing system;

a first row of energy absorbing assemblies and a second row of energy absorbing assemblies extending longitudinally from the roadside hazard, at least one of the energy absorbing assemblies among the first row and the second row of energy absorbing assemblies being disposed between the roadside hazard and the sled assembly, the first row and the second

30 row of energy absorbing assemblies spaced laterally from each other;



each energy absorbing assembly having at least one energy absorbing element;

the sled assembly having a cutter plate mounted adjacent to and aligned with each energy absorbing element;

the sled assembly having a first end facing oncoming traffic whereby a collision of a vehicle with the first end of the sled assembly will cause the cutter plate to slide longitudinally relative to the energy absorbing element and dissipate kinetic energy of the vehicle by separating the energy absorbing element;

a plurality of panel support frames slidably disposed on the first guide rail and the second guide rail between the sled assembly and the roadside hazard;

the panel support frames spaced longitudinally from each other; and

a plurality of panels attached to the panel support frames and extending longitudinally along opposite sides of the energy absorbing system.

10. A crash cushion to minimize the results of a collision between a

vehicle traveling on a roadway and an immobile roadside hazard comprising:

a pair of energy absorbing assemblies extending longitudinally parallel with each other;

the energy absorbing assemblies spaced laterally from each other;

the energy absorbing assemblies having a first end facing oncoming traffic and a second end disposed adjacent to the roadside hazard;

a sled assembly slidably coupled to the first end of each energy absorbing assembly;

each energy absorbing assembly having at least one energy absorbing element; and

a cutter plate attached to the sled assembly adjacent to and aligned respectively with the energy absorbing assemblies whereby a collision of the vehicle with the sled assembly will result in the cutter plate sliding longitudinally relative to the respective energy absorbing elements and separating the respective energy absorbing elements to dissipate kinetic energy from the vehicle.

11. A crash cushion to minimize the results of a collision between a vehicle traveling on a roadway and an immobile roadside hazard comprising:

a pair of energy absorbing assemblies extending longitudinally parallel with each other;

the energy absorbing assemblies spaced laterally from each other;



the energy absorbing assemblies having a first end facing oncoming traffic and a second end disposed adjacent to the roadside hazard;

each energy absorbing assembly having at least one energy absorbing element;

5 a pair of guide rails with each guide rail attached to and extending laterally from one of the energy absorbing assemblies;

a sled assembly slidably coupled to the first end of each energy absorbing assembly, the sled assembly being disposed on and secured to the guide rails;

a plurality of panel support frames slidably disposed on the guide rails between the sled assembly and the roadside hazard;

10 a plurality of panels attached to the panel support frames; and

a cutter plate attached to the sled assembly adjacent to and aligned respectively with the energy absorbing assemblies whereby a collision of the vehicle with the sled assembly will result in the cutter plate sliding longitudinally relative to the respective energy absorbing elements and separating the respective energy absorbing elements to dissipate kinetic energy from the vehicle.

15

12. The crash cushion of Claim 10 further comprising:

the pair of energy absorbing assemblies spaced laterally from each other and extending longitudinally parallel with each other between the sled assembly and the roadway hazard;

a plurality of cross braces extending between the energy absorbing assemblies whereby

20 the energy absorbing assemblies and cross braces cooperate with each other to form a rigid frame structure; and

the cutter plate attached to the sled assembly adjacent to the respective energy absorbing assemblies.

25

13. The crash cushion of Claim 10 wherein each energy absorbing assembly further comprises:

a pair of supporting beams disposed longitudinally parallel with each other;

the supporting beams spaced from each other;

30 at least two energy absorbing elements attached to opposite sides of each supporting beam; and



the distance between the supporting beams selected to allow the respective cutter plate to separate the respective energy absorbing elements to dissipate energy from the vehicle collision.

14. A crash cushion to minimize the results of a collision between a
 5 vehicle traveling on a roadway and an immobile roadside hazard comprising:

a pair of energy absorbing assemblies extending longitudinally parallel with each other;

the energy absorbing assemblies spaced laterally from each other;

the energy absorbing assemblies having a first end facing oncoming traffic and a second
 end disposed adjacent to the roadside hazard;

10 each energy absorbing assembly having :

a pair of supporting beams disposed longitudinally parallel with each other;

the supporting beams spaced from each other;

at least two energy absorbing elements attached to opposite sides of each
 supporting beam;

15 the distance between the supporting beams selected to allow the respective cutter
 plate to separate the respective energy absorbing elements to dissipate energy from the vehicle
 collision;

each supporting beam having a generally C-shaped cross section;


the energy absorbing elements attached to opposite sides of each supporting beam

20 with the generally C-shaped cross sections of the respective supporting beams facing each other
 to define a generally hollow rectangular cross section for the resulting energy absorbing
 assembly; and

each energy absorbing element attached to the respective supporting beams by
 releasable fasteners to allow replacement of the energy absorbing element;

25 a sled assembly slidably coupled to the first end of each energy absorbing assembly; and

a cutter plate attached to the sled assembly adjacent to and aligned respectively with the
 energy absorbing assemblies whereby a collision of the vehicle with the sled assembly will result
 in the cutter plate sliding longitudinally relative to the respective energy absorbing elements and
 separating the respective energy absorbing elements to dissipate kinetic energy from the vehicle.



15. The crash cushion of Claim 10 wherein each energy absorbing assembly further comprises:

a pair of supporting beams disposed longitudinally parallel with each other;

the supporting beams spaced from each other;

5 a plurality of energy absorbing elements attached to one side of each supporting beam;

a plurality of energy absorbing elements attached to the opposite side of each supporting beam; and

a spacer disposed between selected energy absorbing elements.

10 16. The crash cushion of Claim 10 wherein each energy absorbing assembly further comprises:

two supporting beams extending longitudinally parallel with each other;

the supporting beams spaced from each other;

at least one energy absorbing element attached to each supporting beam;

15 at least one cutter plate attached to the sled assembly adjacent to one end of the energy absorbing element; and

the distance between the supporting beams selected to allow the respective cutter plate to rip the portion of the energy absorbing element between the respective supporting beams to dissipate energy from the vehicle collision.

20

17. The crash cushion of Claim 10 further comprising:

the cutter plate having two sets of cutter blades; and

each energy absorbing assembly having at least two energy absorbing elements with each set of cutter blades disposed at an acute angle relative to respective energy absorbing elements.

25

18. A method to minimize the effects of a collision between a motor vehicle traveling on a roadway and a roadway hazard comprising the steps of:

forming at least one energy absorbing assembly from a pair of supporting beams;

attaching at least one energy absorbing element to the supporting beams;

30 installing the energy absorbing assembly adjacent to the roadway hazard with one end of the energy absorbing assembly facing on-coming traffic;



forming a sled assembly with a cutter plate attached thereto; and
 slidably coupling the sled assembly with the one end of the energy absorbing
 assembly and the cutter plate disposed adjacent to the energy absorbing element
 whereby a collision between the motor vehicle and the sled assembly will result in the
 5 cutter plate sliding longitudinally relative to the energy absorbing element and
 separating the energy absorbing element to dissipate energy from the collision by the
 motor vehicle.

19. A method to minimise the effects of a collision between a motor vehicle
 10 travelling on a roadway and a roadway hazard comprising the steps of:

forming at least one energy absorbing assembly from a pair of supporting
 beams, at least one of the support beams having a generally C-shaped cross section;

attaching at least one energy absorbing element to the supporting beams;

15 installing the energy absorbing assembly adjacent to the roadway hazard with
 one end of the energy absorbing assembly facing oncoming traffic;

forming a sled assembly with a cutter plate attached thereto;

slidably coupling the sled assembly with one end of the energy absorbing
 assembly and the cutter plate disposed adjacent to the energy absorbing element;

attaching a guide plate to at least one side of the cutter plate; and

20 placing the guide plate within the C-shaped cross section to maintain alignment
 of the cutter plate assembly with the respective energy absorbing assembly, whereby a
 collision between the motor vehicle and the sled assembly will result in the cutter plate
 sliding longitudinally relative to the energy absorbing element and separating the
 energy absorbing element to dissipate energy from the collision by the motor vehicle.

25

20. An energy absorbing system to minimise the results of a collision between
 a vehicle travelling on a roadway and a roadside hazard substantially as hereinbefore
 described with reference to the accompanying figures.

30 21. A crash cushion substantially as hereinbefore described with reference to
 the accompanying figures.



22. A method to minimise the effects of a collision between a motor vehicle travelling on a roadway and a roadway hazard substantially as hereinbefore described with reference to the accompanying figures.



5





Dated this thirtieth day of January 2003

EXODYNE TECHNOLOGIES, INC.

Patent Attorneys for the Applicant:

F B RICE & CO



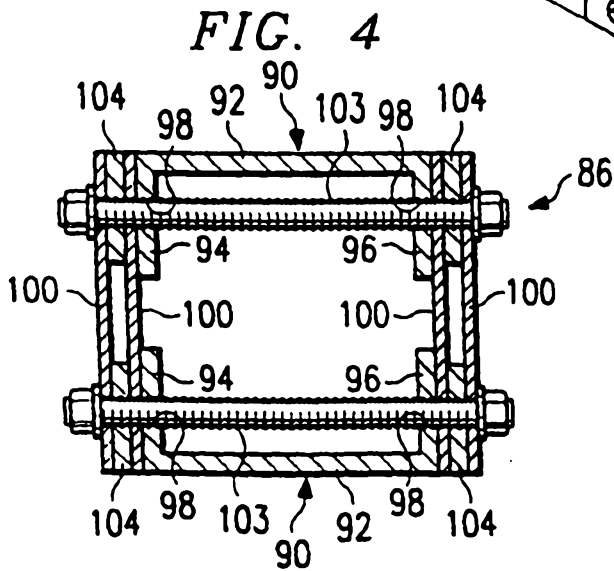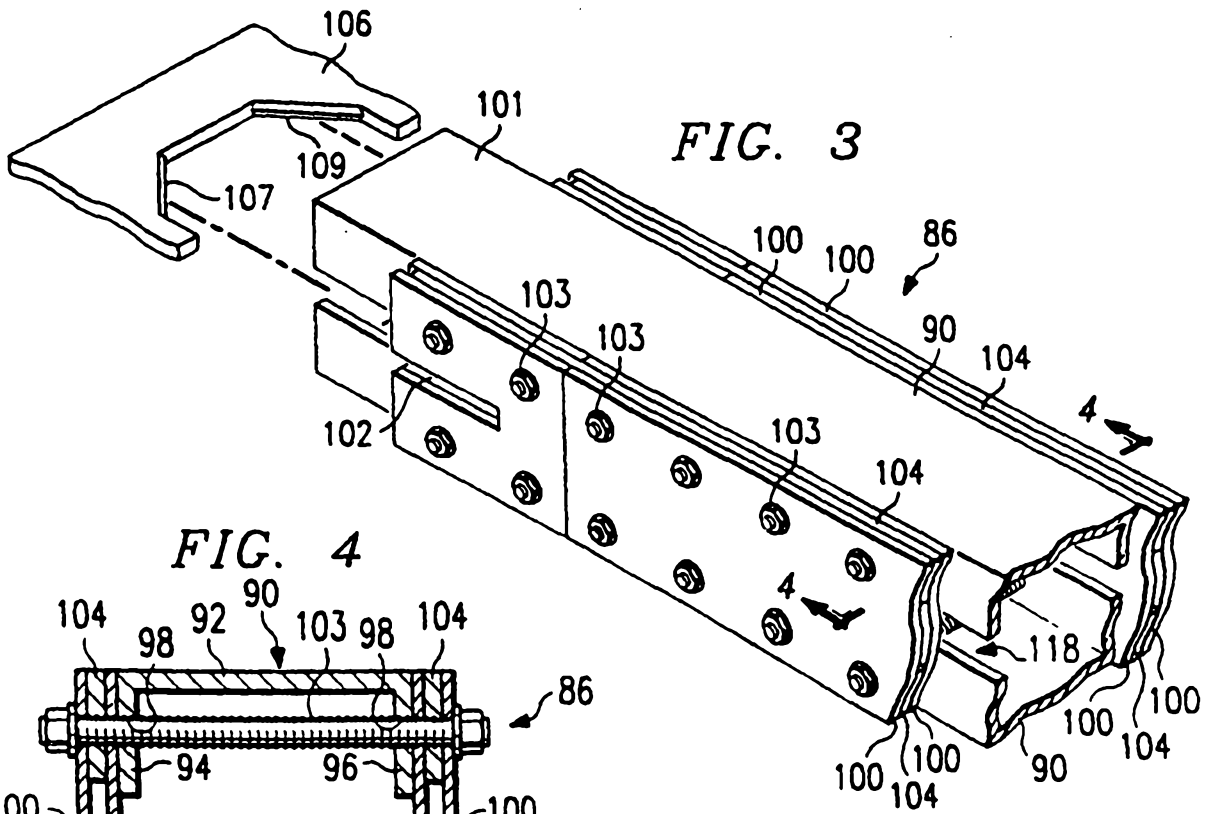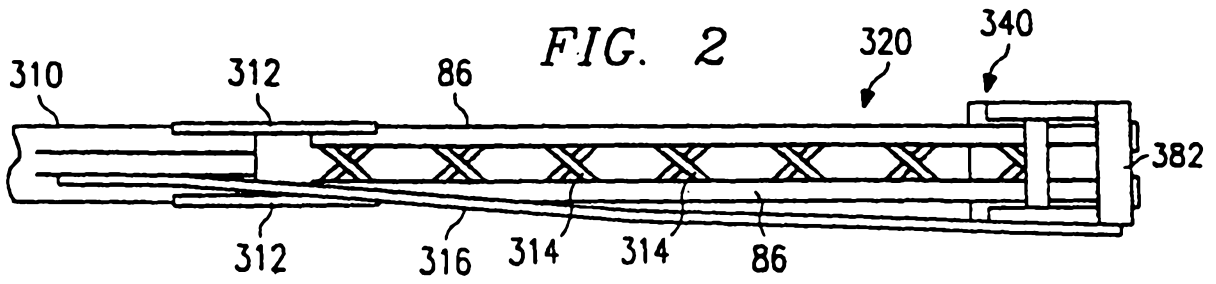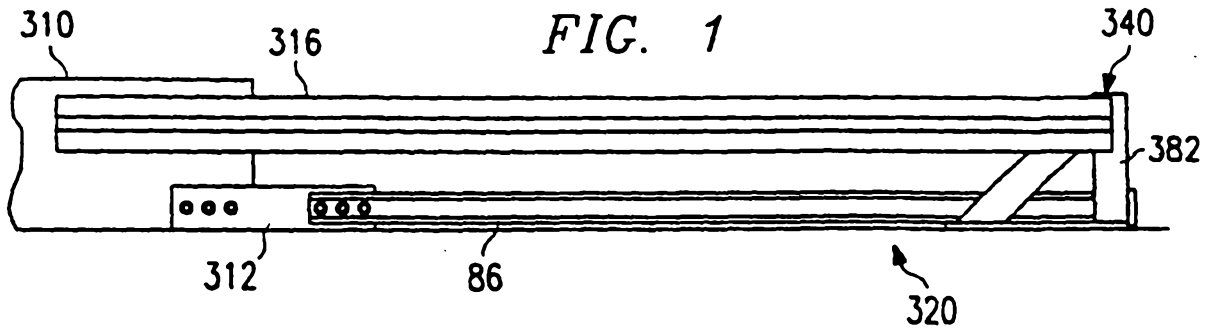

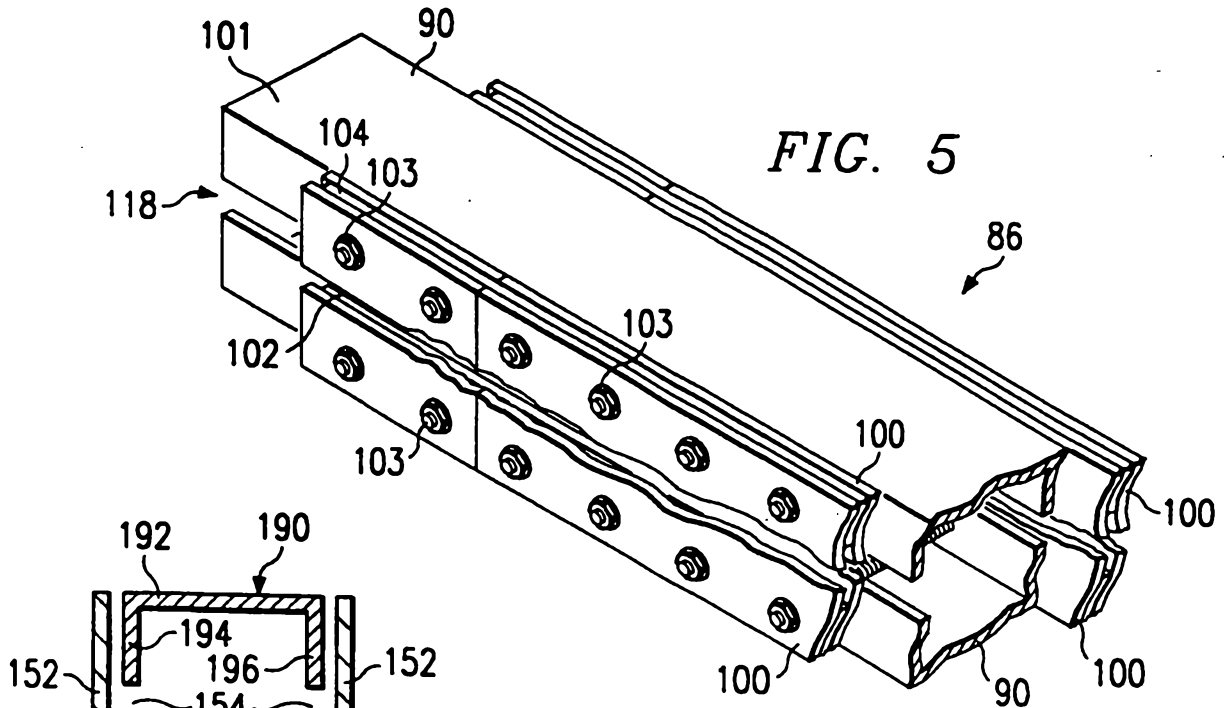


FIG. 5

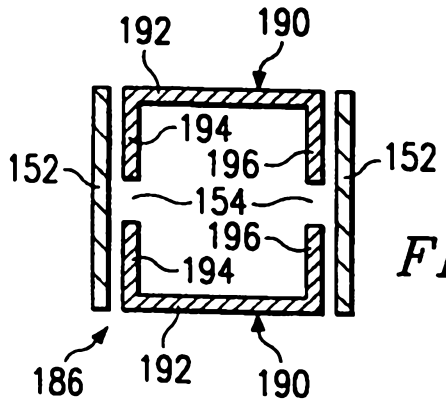


FIG. 6

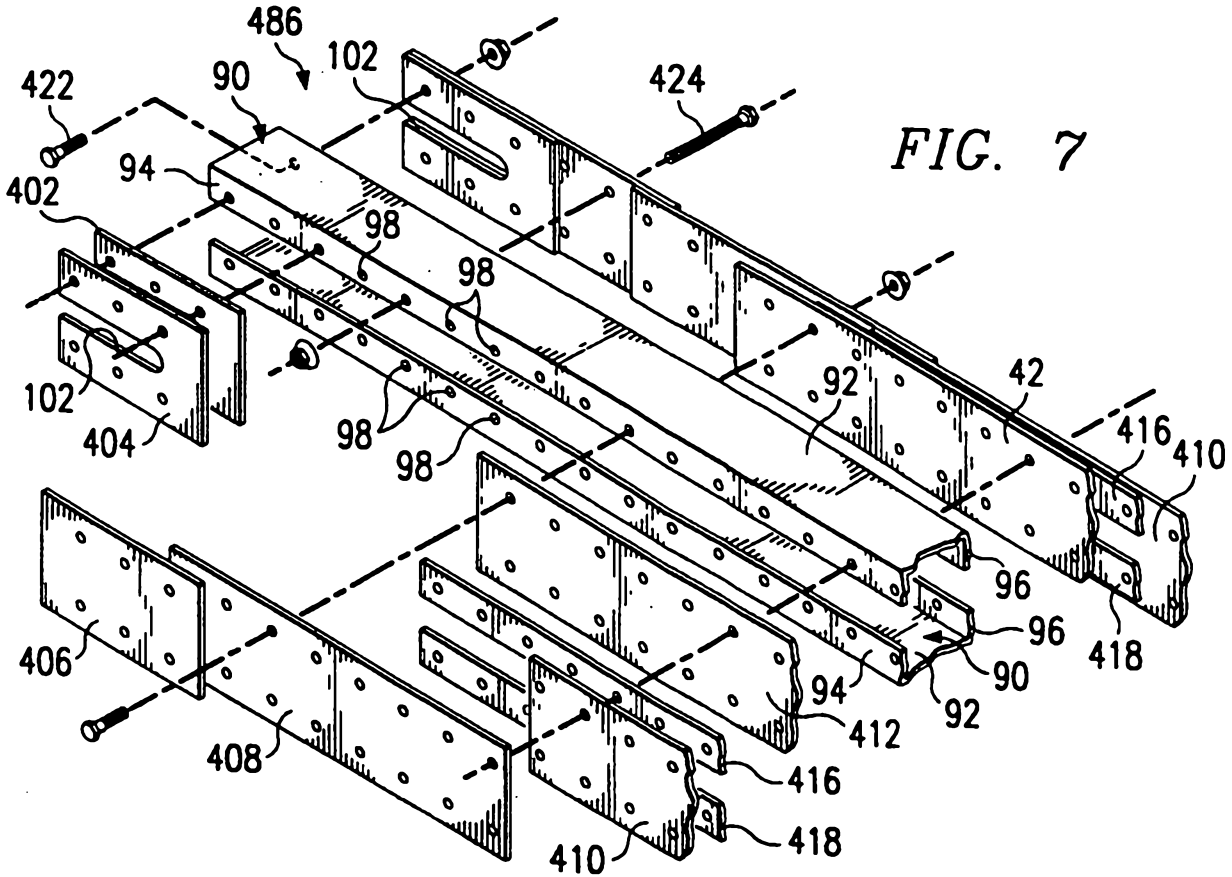


FIG. 7

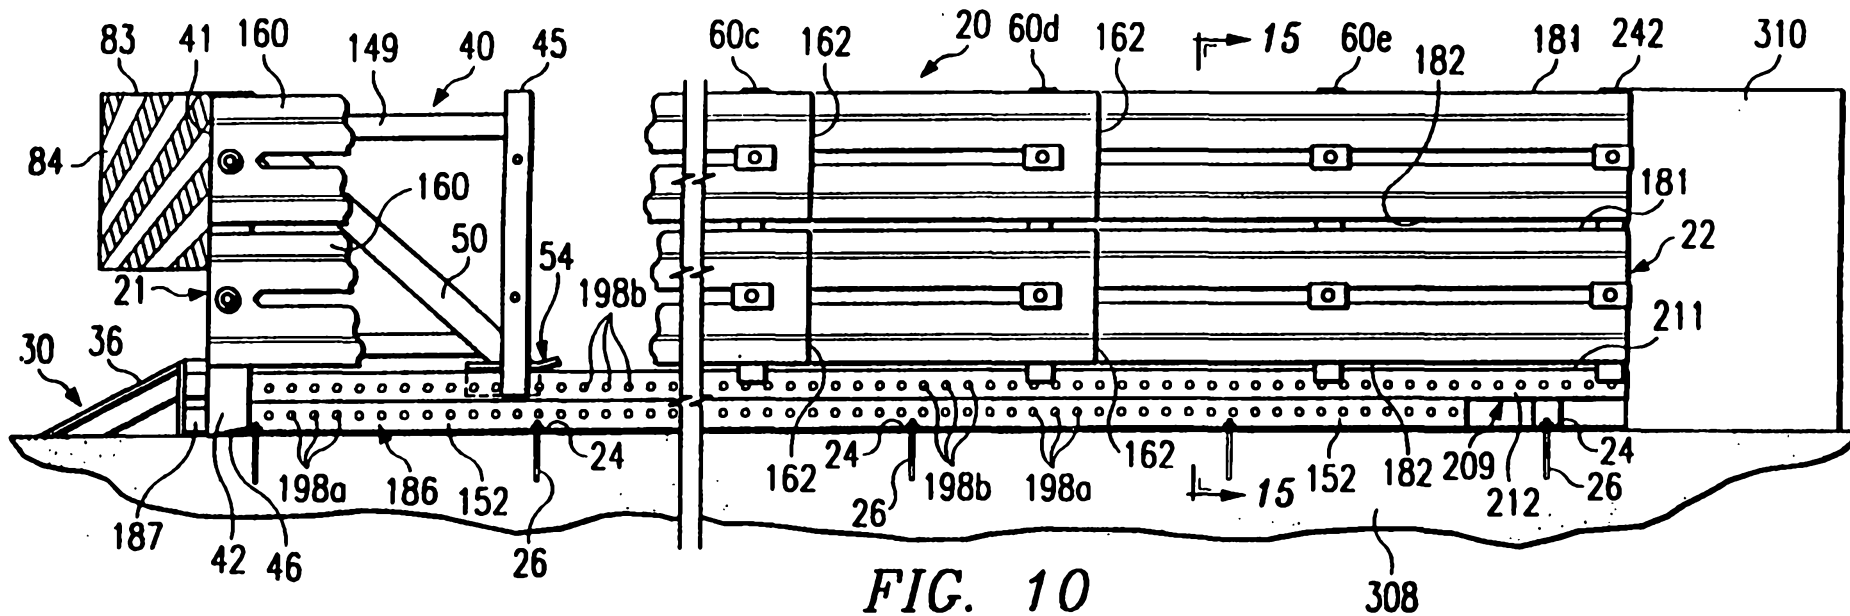


FIG. 10

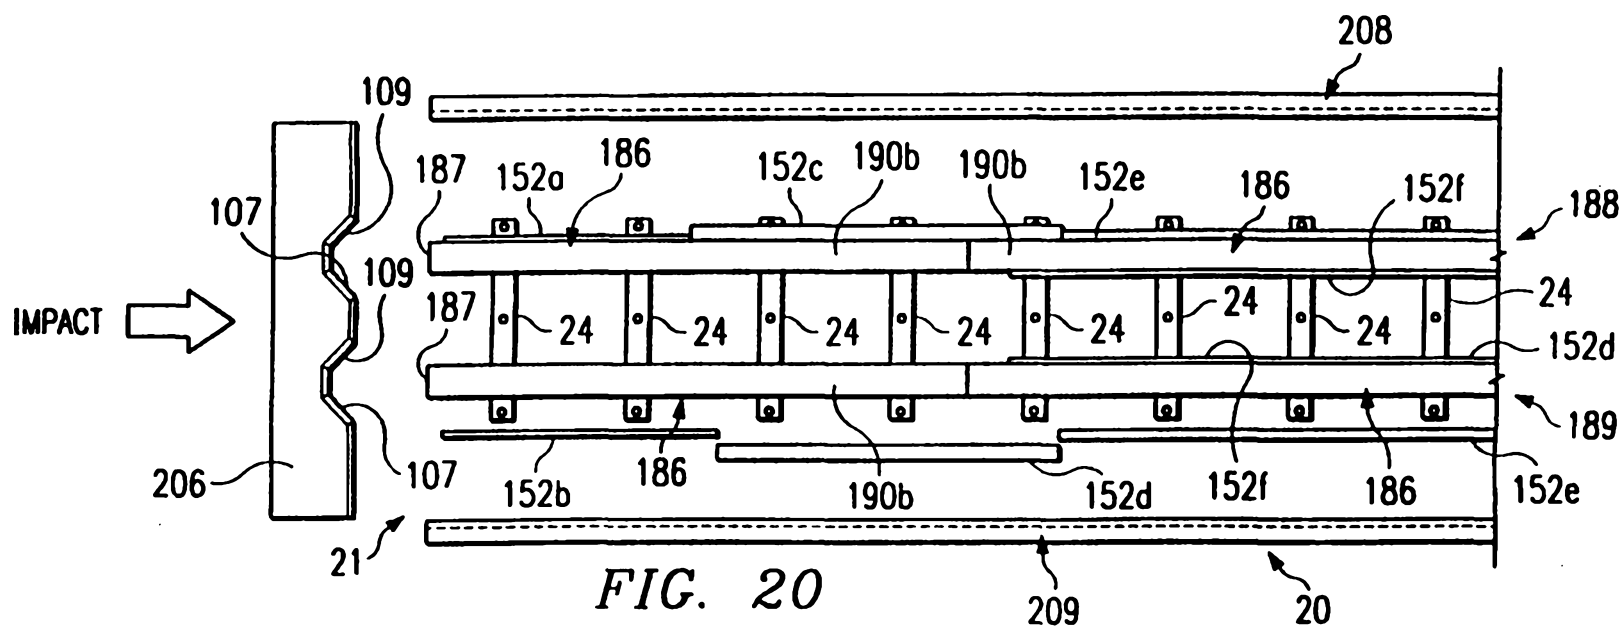


FIG. 20

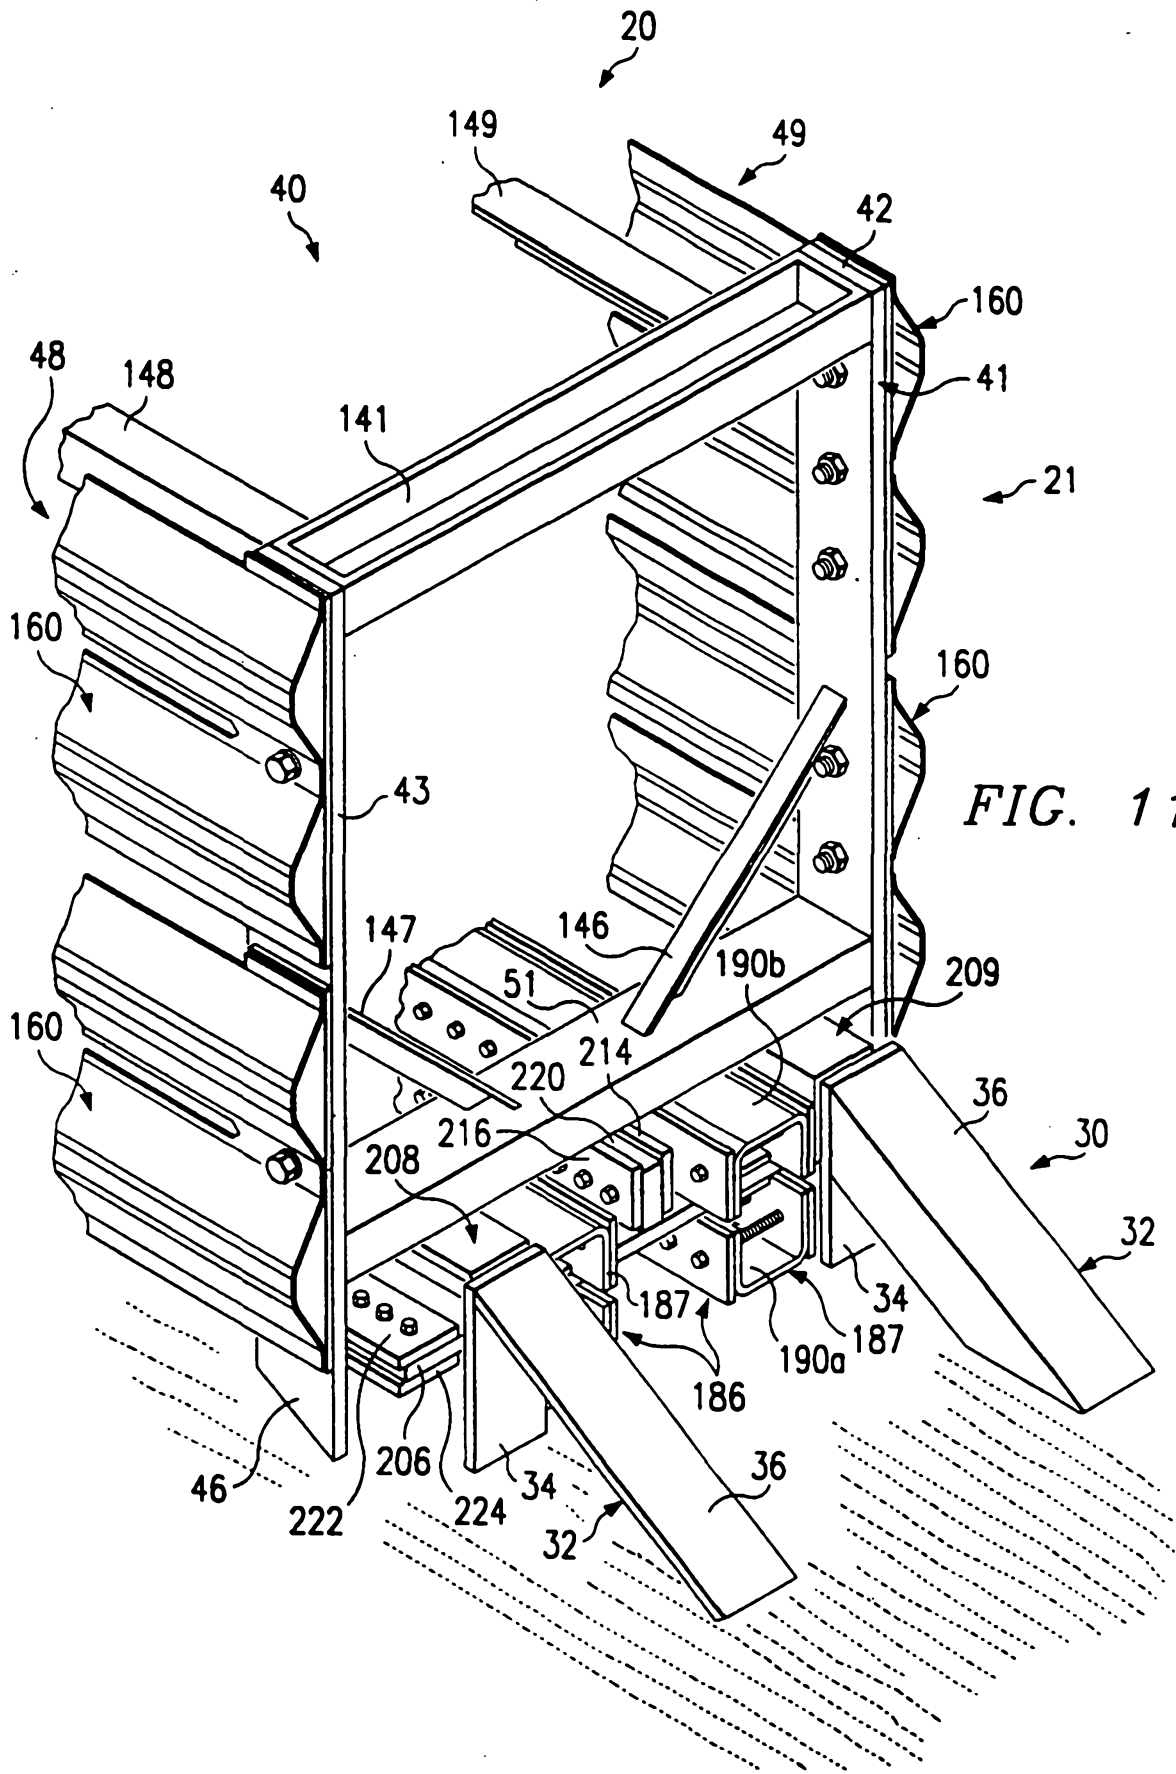


FIG. 11

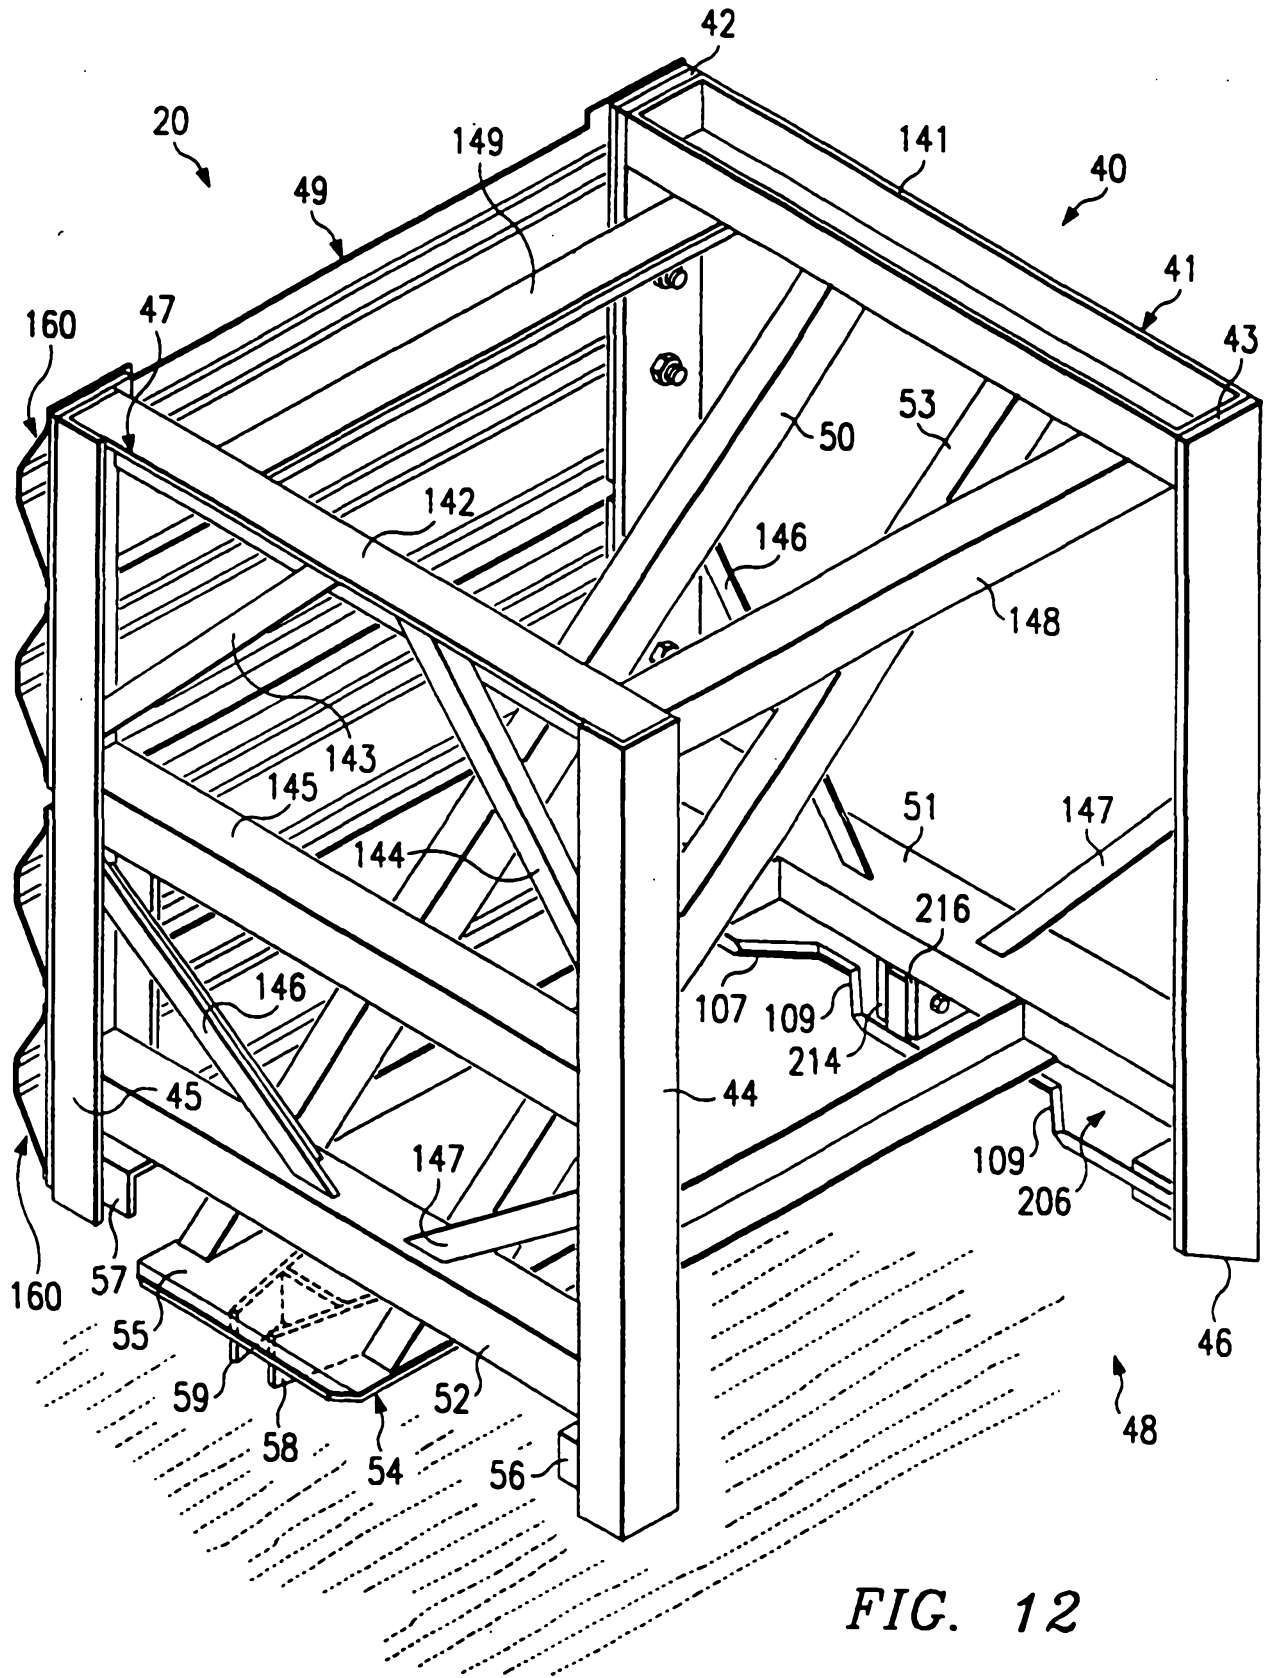


FIG. 12


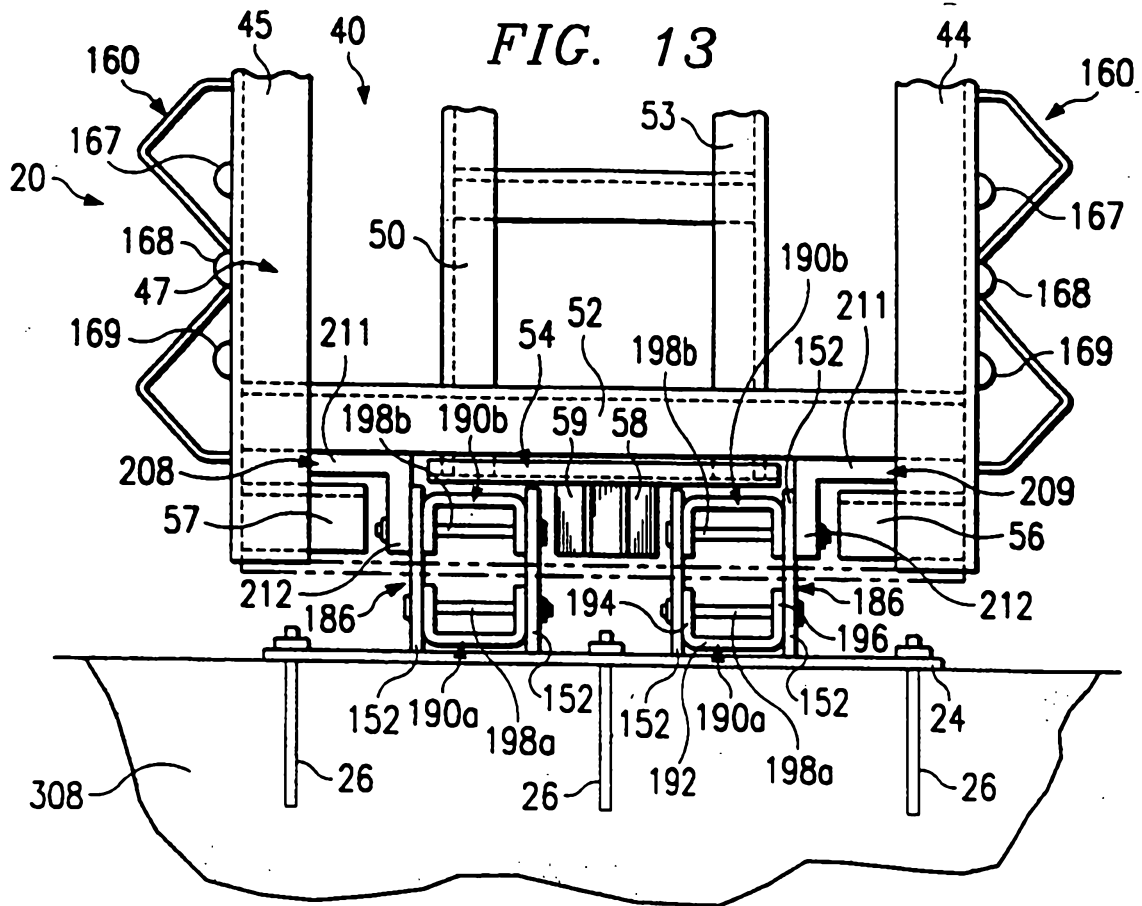


FIG. 15

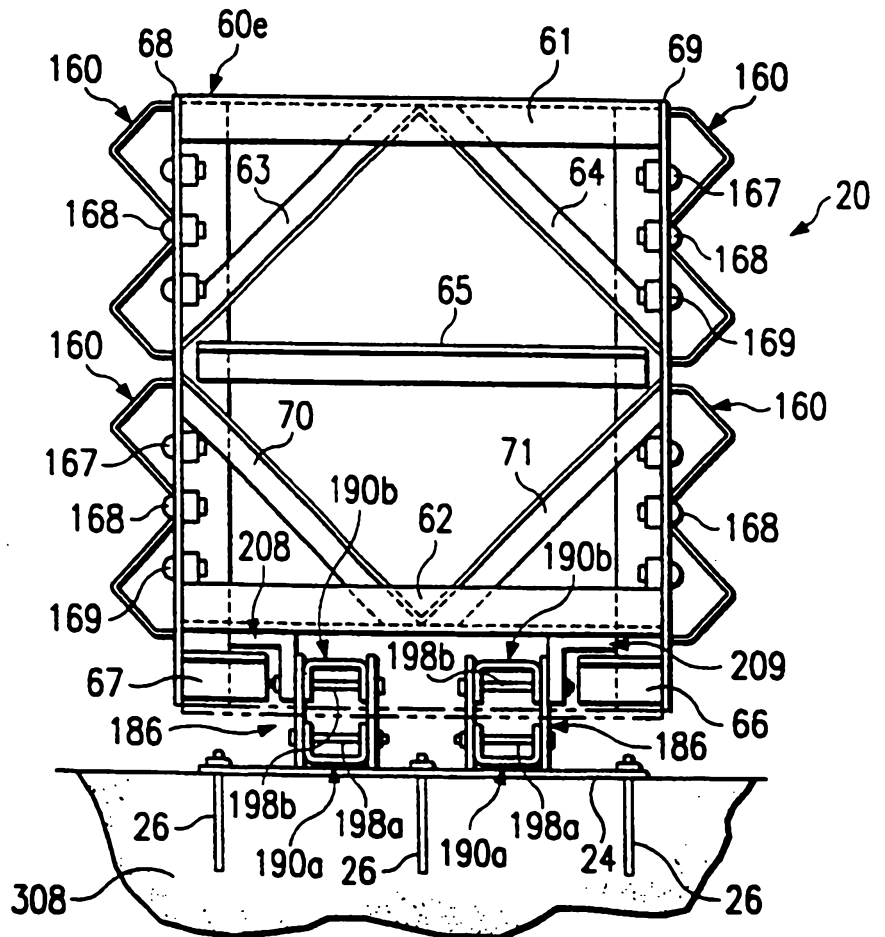

11 01 5500

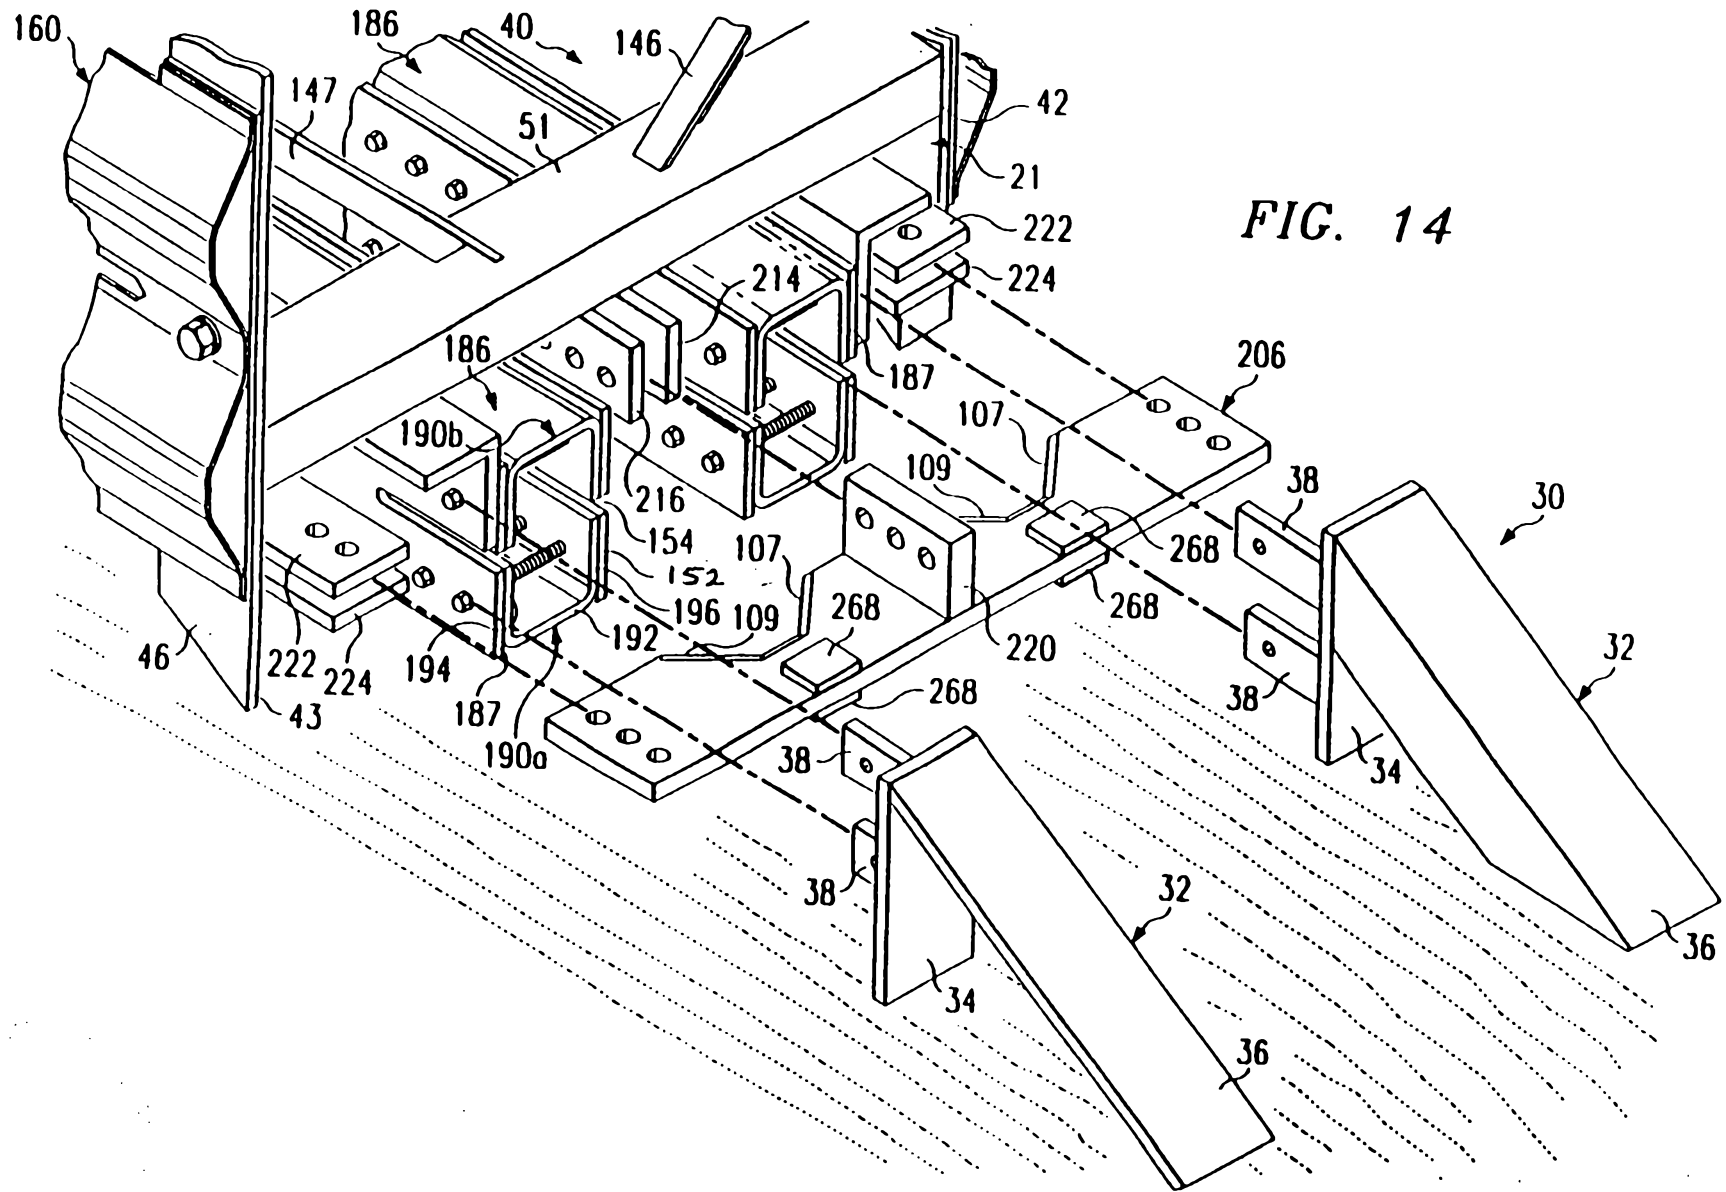


FIG. 14

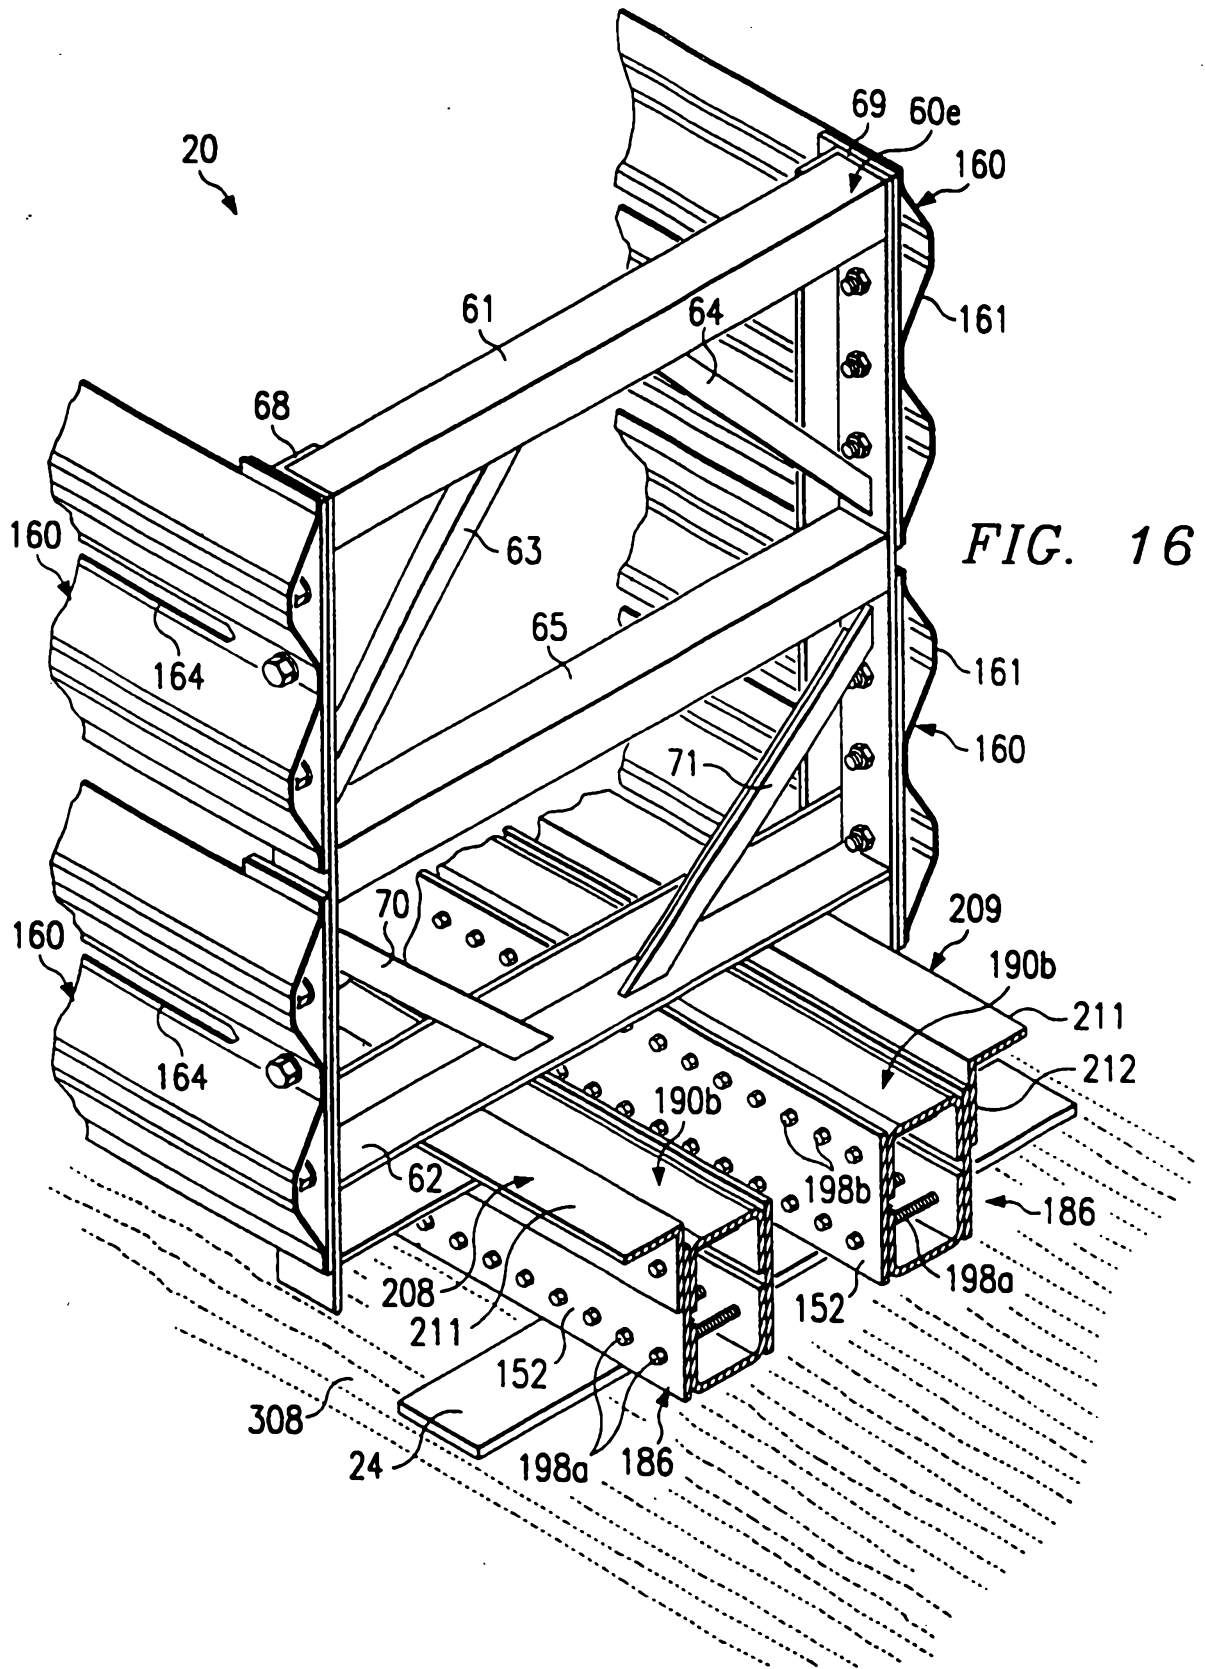


FIG. 16

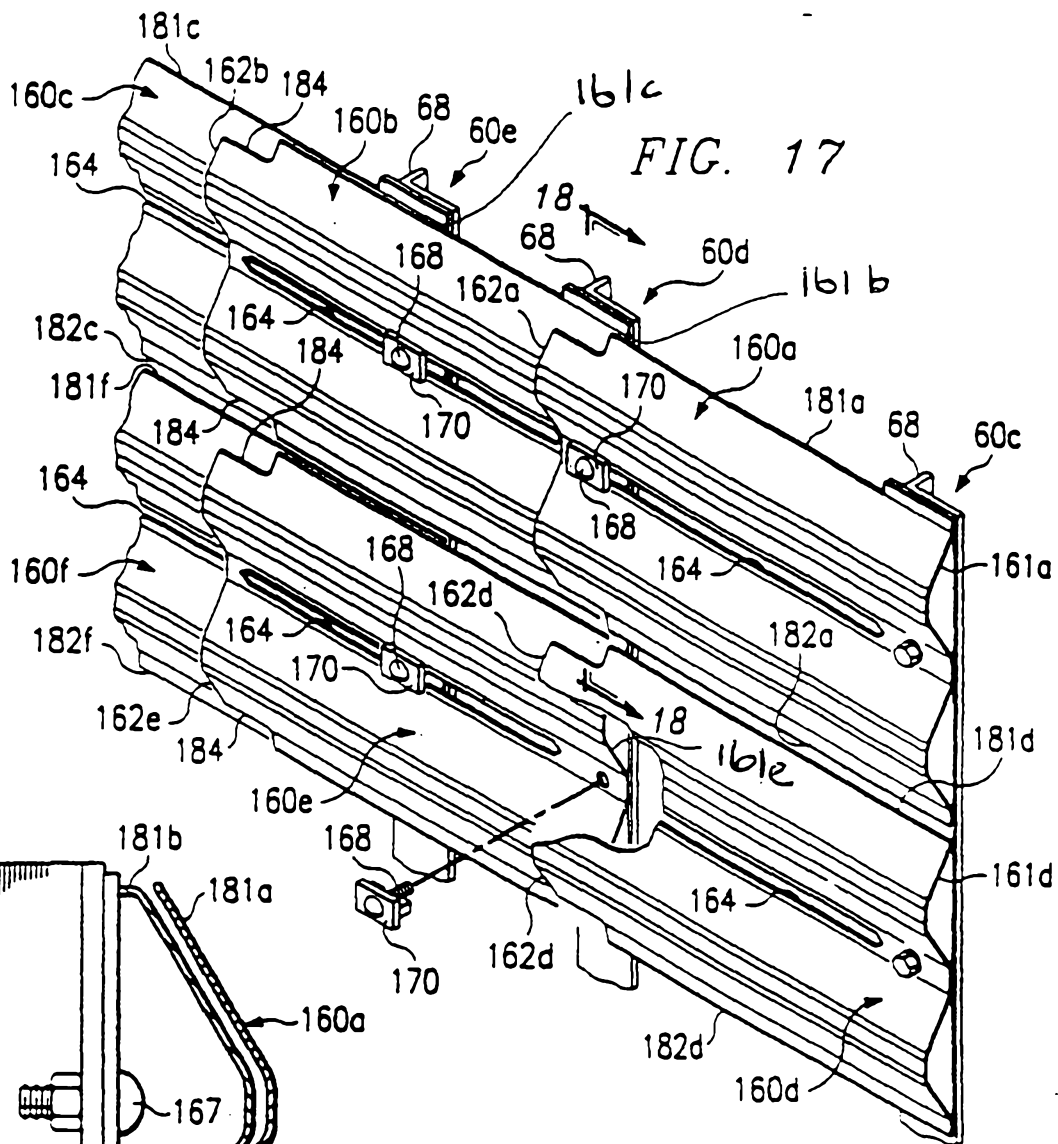


FIG. 17

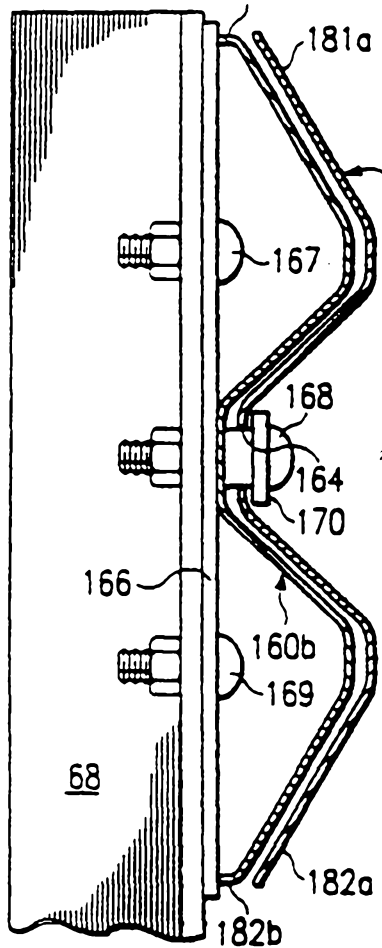


FIG. 18

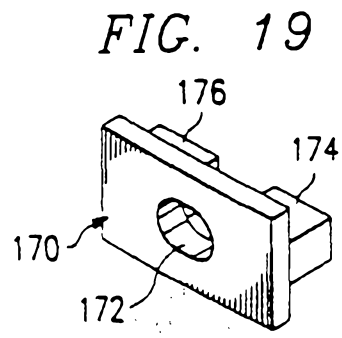


FIG. 19