



- (51) International Patent Classification:
E21B 43/16 (2006.01) *E21B 43/25* (2006.01)
- (21) International Application Number:
PCT/US2015/035349
- (22) International Filing Date:
11 June 2015 (11.06.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/011,340 12 June 2014 (12.06.2014) US
- (71) Applicant: TEXAS TECH UNIVERSITY SYSTEM
[US/US]; Office Of Technology Commercialization, P.O.
Box 42007, Lubbock, TX 79409-2007 (US).
- (72) Inventor: SHENG, James, J.; 6125 87 Street, Lubbock,
TX 79424 (US).
- (74) Agent: GARSSON, Ross, Spencer; Greenberg Traurig,
LLP, 300 W. 6th Street, Suite 2050, Austin, TX 78701
(US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) Title: LIQUID OIL PRODUCTION FROM SHALE GAS CONDENSATE RESERVOIRS

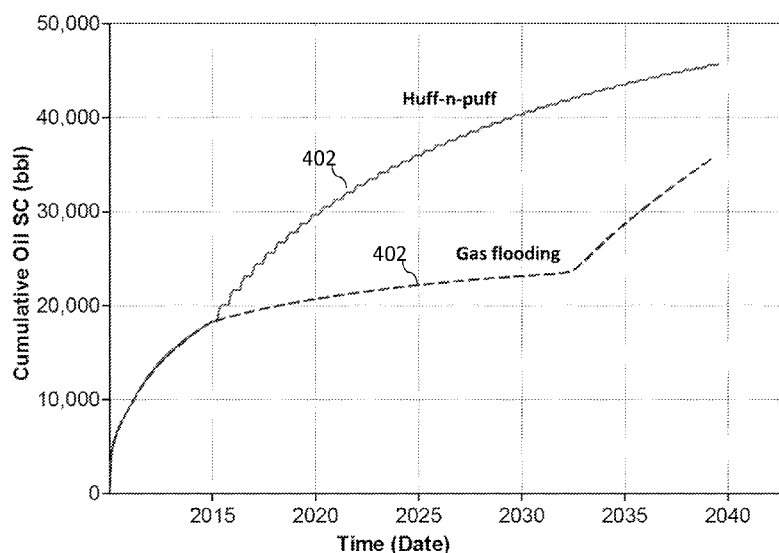


FIG. 4

(57) Abstract: A process of producing liquid oil from shale gas condensate reservoirs and, more particularly, to increase liquid oil production by huff-n-puff in shale gas condensate reservoirs. The process includes performing a huff-n-puff gas injection mode and flowing the bottom-hole pressure lower than the dew point pressure.

LIQUID OIL PRODUCTION FROM SHALE GAS CONDENSATE RESERVOIRS**CROSS-REFERENCE TO RELATED PATENT APPLICATIONS**

[0001] This application claims priority benefits to U.S. Patent Application Serial No. 62/011,340, entitled “Liquid Oil Production From Shale Gas Condensate Reservoirs,” filed on June 12, 2014. This provisional application is commonly assigned to the Assignee of the present invention and is hereby incorporated herein by reference in its entirety for all purposes.

GOVERNMENTAL INTEREST

[0002] This invention was made with United States Government support under Grant No. DE-FE0024311 awarded by the Department of Energy and the Texas Tech University Shale EOR Consortium. The Government may have certain rights in the invention.

FIELD OF INVENTION

[0003] The present invention generally relates to the production of liquid oil from shale gas condensate reservoirs. More particularly, the present disclosure relates to increasing liquid oil production by huff-n-puff in shale gas condensate reservoirs.

BACKGROUND

[0004] Huge shale resources available and low gas price turn the oil operators’ activities to producing more liquid oil. Common enhanced oil recovery methods can be divided along three different techniques: thermal injection, gas injection, and chemical injection to extract oil from the reserves.

[0005] Thermal injection uses hot water and steam to extract crude oil from the reservoir. Thermal injection is used for heavily viscous oil that cannot flow on its own, as the increased temperature reduces the oil’s viscosity. Thermal injection has dominated the oil recovery market for 2012 and is utilized heavily by Canada, Indonesia, and California. [*TMR 2014*]. However,

given the high price of the natural gas that is needed to heat the steam, its market share is expected to decrease during the next decade.

[0006] Gas injection technology injects gases to extract oil. The most common used gas is carbon dioxide (CO₂) since it is an abundant byproduct of industrial processes. In Northern America, many of the carbon dioxide enhanced oil recovery projects are concentrated in West Texas.

[0007] Chemical injection technology uses polymer, surfactant solution and alkali to extract crude oil from the reservoirs and can be incorporated in conjunction with another injection method for further efficiency.

[0008] Presently, North America leads the World in the enhanced oil recovery market, followed by Europe (especially Russia). Currently, it appears there is no necessity for the Middle East to utilize enhanced oil recovery methods for oil extraction (given the region's abundant resources), this is expected to change and it is anticipated that enhanced oil recovery will play a significant role in the Middle East in the coming years.

[0009] Currently, to produce a conventional (high-permeability) gas condensate, the conventional practice is inject gas and/or water to flood the gas condensate while maintaining the lower bottom-hole flowing pressure above the dew point pressure. Maintaining the flowing pressure above the dew point pressure is vital since it will prevent the formation of liquid from the initial gas phase, a phenomenon known as retrograde condensate. If this phenomenon were to occur, then valuable oil will be lost since it is more difficult for the formed residual oil saturation to flow to the surface and the formed oil near the wellbore will block further gas flow.

[0010] However, keeping the flowing pressure above the dew point results in a lower pressure difference between the reservoir and the flowing pressure. This pressure difference represents the driving force and needs to be high to ensure a higher oil production rate.

[0011] Generally when pressure is reduced, a liquid will vaporize to become a gas. However, in some special situation, when the pressure is reduced below a dew point pressure, a liquid forms from an initial gas phase. For instance, such phenomenon would occur by a pressure drop shown in the graph of **FIG. 1** from point A to point B. This phenomenon is called retrograde condensate. Such reservoir is called gas condensate reservoir where initially the fluid is in gas state in reservoir. To produce the gas condensate, the conventional practice is to maintain the reservoir pressure or even the bottom-hole well pressure of the production well above the dew point pressure by gas and/or water flooding [*Hernandez 1999*]. The reason is that, if the reservoir pressure is allowed to decline below the dew point, a considerable volume of valuable condensate may be lost in the reservoir because oil saturation is formed and it is more difficult for the liquid to flow to the surface compared with gas. When oil saturation is below a residual oil saturation, oil cannot be produced using a conventional producing method. In addition, gas productivity declines rapidly once the liquid is formed near the wellbore, because the liquid will block gas flow [*Thomas 1995*].

[0012] In a shale or tight gas condensate reservoir where the formation permeability is very low (nano-Darcy or micro-Darcy), if the well flowing pressure and/or the reservoir pressure is above the dew point pressure, the pressure difference between the reservoir pressure and well flowing pressure which is the drive force to produce gas condensate will be small, especially when the initial reservoir pressure is near the dew point pressure. Then the production rate will be low and the resulting total hydrocarbon recovery will be low as well.

[0013] To increase reservoir pressure, there are two methods: gas flooding and huff-n-puff. In the gas flooding, gas is injected through an injector, and fluids are produced from another producer. In the huff-and-puff gas injection, gas is injected to the reservoir through a well during the huff period, and fluids are produced from the same well during the puff period.

[0014] Gaseous or gaseous/liquid recovery fluid methods of hydrocarbons is generally divided into two mechanism: (a) drive processes or flooding processes and (b) cyclic processes. The cyclic processes are also known as “huff-n-puff” or “push/pull.” In drive oil recovery processes, injection and production of fluids occur at different wells. In huff-n-puff processes, injection and production of fluids occur through the same well. Besides those structural differences, drive and huff-n-puff processes are substantially different in that the design of slugs of recovery fluid, times of recovery, well patterns, costs, fluid velocities, and other factors are different. Examples of huff-n-puff processes are described and taught in *Patton '068 Patent*, *Russum '689 Patent*, *Wehner '863 Patent*, *Shayegi '054 Patent*, and *Miller '431 Patent*.

[0015] In Applicant's recent work of huff-n-puff gas injection in shale oil reservoirs [*Sheng 2014*; *Wan 2013 A*; *Wan 2013 B*; *Gamadi 2013*; *Wan 2014*; *Gamadi 2014*], the pressure effect on oil recovery was studied. It is perceived that, when the flowing pressure is above the minimum miscibility pressure (MMP), the injected gas will be fully miscible with the in-situ oil. Then the oil viscosity will be decreased to the minimum, and the oil will swell to the maximum. The oil recovery will be high. It appears that one of the dominant mechanisms is pressure maintenance. According to the discussions and definitions in *Sheng 2011*, if the dominant mechanism is pressure maintenance, the gas injection process belongs to improved oil recovery (IOR). If the dominant mechanism is related to miscible flooding, the gas injection process belongs to enhanced oil recovery.

[0016] However, the simulation results shown in **FIG. 2** show that higher oil recovery is obtained if a lower bottom-hole flowing pressure (BHFP) is used, even though the flowing pressure is lower than the MMP. (For 500 psi, 1000 psi, 1500 psi, and 2500 psi, these are respectively (a) oil recover factors curves **201-204** and (b) oil rates curves **205-208**). The main reason is that as the flowing pressure is lower, the pressure difference between the reservoir and this flowing pressure (drive force) will be higher, so that flow rate will be higher according to Darcy's law.

[0017] Similarly, in gas condensate reservoirs, to increase gas and oil production, the pressure drop should be high. The wellbore flowing pressure will be lower than the dew point pressure. When that occurs, the liquid oil will be accumulated at the wellbore and the resulting gas saturation will be low. Then gas condensate rate will be lower, the corresponding liquid oil rate will be low as well.

[0018] The current available technique to produce gas condensate shale reservoirs is through primary depletion using horizontal wells with multiple transverse fractures. No IOR or EOR methods have been implemented in shale reservoirs. Juell and Whitson [*Juell 2013*] did simulation work to find optimal operation conditions for gas condensate shale reservoirs is in the depletion mode. They found that the optimal production strategy for wells producing from highly undersaturated gas condensate reservoirs is likely to have an initial period where the flowing pressure equals the saturation pressure, followed by a gradual increase in drawdown, towards the minimum bottom-hole pressure that is operationally possible. When that occurs, the liquid oil will be accumulated at the wellbore, and the resulting gas saturation will be low. Then gas condensate rate will be lower, and the corresponding liquid oil rate will be low as well. To solve this problem, the condensate in conventional condensate reservoirs is re-vaporized by lean gas

flooding. [Standing 1948; Weinaug1949; Smith 1968, nitrogen (Aziz 1982) or CO₂ (Chaback 1994; Goricnik 1995)].

[0019] However, in shale and tight reservoirs, formation permeability is so low that any flooding (gas flooding and water flooding) may not be feasible because the pressure drop from an injector to a producer is large and thus it is very difficult for the pressure to transport from the injector to the producer. For the huff-n-puff, a quick response from gas injection is expected. The injected gas will increase the pressure near the producer, thus the drive energy is boosted. The increased pressure may vaporize the liquid dropout near the producer. However, there is a concern that the injected gas during the huff period will be re-produced during the puff period.

[0020] Thus, there is a need to solve the ultra-low permeability problem in shale reservoirs where gas flooding or water flooding is not feasible to maintain reservoir pressure particularly because liquid oil will drop out in the reservoir and become difficult to produce when the reservoir pressure is low.

SUMMARY OF INVENTION

[0021] The present invention generally relates to the production of liquid oil from shale gas condensate reservoirs. A method has been discovered for producing gas condensate reservoirs to solve the low-permeability problem, to increase the production drawdown (production rate), and to increase liquid oil offtake. This method includes performing a huff-n-puff gas injection mode and flowing the bottom-hole pressure lower than the dew point pressure.

[0022] The present invention thus provides an increase (and can maximize) liquid oil offtake and production while ensuring that the phenomenon of retrograde condensate does not occur through huff-n-puff gas injection.

[0023] The huff-n-puff injection of produced gases of the present invention can produce more liquid oil in gas condensate reservoirs than gas flooding or primary depletion. The advantages of huff-n-puff over gas flooding are the early response to gas injection, high drawdown pressure, oil saturation decrease near the wellbore by evaporation, and overcoming the pressure transport problem owing to ultra-low permeability. The advantages become more important when the initial reservoir pressure is close to the dew point pressure, or the bottom-hole flowing pressure is low.

[0024] Such advantages further include: (A) Huff-n-puff injection of produced gases can produce more liquid oil in gas condensate reservoirs than gas flooding or primary depletion. All the cases with different reservoir and fluid properties and operation conditions show this result. (B) The advantages of huff-n-puff over gas flooding are early response to gas injection, high drawdown pressure, oil saturation decrease by evaporation, and overcoming the pressure transport problem owing to ultra-low permeability. (C) The advantages of huff-n-puff over gas flooding become more important when the initial reservoir pressure is close to the dew point pressure, or the bottom-hole flowing pressure is low. (D) CO₂ injection may not be superior to lean gases in terms of oil recovery in gas condensate reservoirs. (E) There is an optimum cycle time for oil recovery, and it may not be necessary to have a soak period.

[0025] In general, in one aspect, the invention features a method of producing hydrocarbons from a shale gas condensate reservoir. The method includes determining dew point pressure of fluids in a reservoir formation. The method further includes injecting gas from the surface downhole into a wellbore of a well such that the injected gas flows from bottom-hole into the reservoir formation. The step of injecting occurs over a first time period of a cycle period. The method further includes producing fluids from the same wellbore by flowing the fluids from the

reservoir formation into the bottom hole and up hole to the surface. The bottom hole flowing pressure is below the dew point pressure of the fluids in the reservoir formation. The production of the fluids occurs over a second time period of a cycle period. The method further includes repeating above identified injection and production steps for a plurality of cycle periods.

[0026] Implementations of the invention can include one or more of the following features:

[0027] The hydrocarbons can be liquid oil.

[0028] The shale gas condensate reservoir can have a permeability of the reservoir formation that is at most 50 mD.

[0029] The permeability can be at most 0.1 mD.

[0030] The permeability can be at most 100 nD.

[0031] The gas can be selected from the group consisting of methane, natural gas, carbon dioxide, nitrogen, and combinations thereof.

[0032] The gas can include methane.

[0033] The gas can include carbon dioxide.

[0034] The pressure at which the gas is injected into the reservoir formation can be below fracture pressure of the reservoir formation.

[0035] The cycle period can be at most 200 days.

[0036] The cycle period can be between 25 and 100 days.

[0037] The method can further include selecting the durations of the first time period and the second time period based upon a parameter selected from the group consisting of permeability of the reservoir formation, composition of the gas, composition of the fluids in the reservoir formation, the dew point pressure of the fluids in the reservoir formation, the bottom-hole

flowing pressure, production rate, the bottom-hole injection pressure, the bottom-hole injection rate, facility constraints, economic parameters, and combinations thereof.

[0038] The method can further include that the parameter is an economic parameter of net present value of the fluids produced.

[0039] There can be no soaking period between the first period and the second period.

[0040] There can be a soak period between the first period and the second period.

[0041] The soak period can be for a period of time that is at most the time of the first period.

[0042] The production of the liquid oil from the wellbore using the method and the production of the liquid oil from the wellbore before the method was used can be at a liquid oil ratio of least around 1.2.

[0043] The liquid oil ratio can be at least around 1.5.

[0044] The production of net gas from the wellbore using the method and the production of gas from the wellbore before the method was used can be at a gas ratio of least around 1.3. The net gas is the amount of gas produced during the second time period less the amount of gas injected during the first time period.

[0045] The gas ratio can be at least around 2.

[0046] The bottom hole flowing pressure can be at most 2500 psi.

[0047] The bottom hole flowing pressure can be at most 500 psi.

[0048] Durations of the first time period and the second time period can be the same for each cycle period in the plurality of cycle period.

[0049] Duration of the first time periods can be the same for each cycle period in the plurality of cycle periods. Duration of the second time periods can be the same for each cycle period in the plurality of cycle periods.

[0050] Duration of at least some of the first time periods can be different for each cycle period in the plurality of cycle periods. Duration of at least some of the second time periods can be different for each cycle period in the plurality of cycle period.

BRIEF DESCRIPTION OF THE DRAWINGS

[0051] For better understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings.

[0052] **FIG. 1** is a graph illustrating an example of p-T diagram of a retrograde condensate.

[0053] **FIG. 2** is a graph showing oil rate and recovery at different bottom-hole flowing pressures (500 psi, 1000 psi, 1500 psi, and 2500 psi) (*Sheng 2014*). For 500 psi, 1000 psi, 1500 psi, and 2500 psi, these are respectively (a) oil recover factors curves **201-204** and (b) oil rates curves **205-208**.

[0054] **FIG. 3** is the simulation model grid set up for a simulation performed of an embodiment of the present invention.

[0055] **FIG. 4** is a graph showing cumulative oil production in the base case (gas flooding curve **401**) and huff-n-puff (huff-n-puff curve **402**).

[0056] **FIG. 5** is a graph showing the oil saturations near the producing fracture of the simulation that was set up as illustrated in **FIGS. 9A-9B**. Curves **501-503** show, respectively, the oil saturations SO for Block (10, 28, 4) primary, gas flooding, and huff-n-puff.

[0057] **FIG. 6** is a graph showing oil saturation near (I=10) (curve **601**) and at the producing fracture (I=11) (curve **602**).

[0058] **FIG. 7** shows the pressure near fracture of the simulation that was set up as illustrated in **FIGS. 9A-9B**. Curves **701-703** show, respectively, the pressure for PRES Block (10, 28, 4) primary, gas flooding, and huff-n-puff.

[0059] FIG. 8 shows the pressure and oil saturation near the producing fracture in the gas huff-n-puff process of the simulation that was set up as illustrated in FIGS. 9A-9B. Curves 801-802 show, respectively, the oil saturation SO Block (10, 28, 4) and pressure PRES Block (10, 28, 4).

[0060] FIGS. 9A-9B illustrate pressure distributions at the end of 10 year injection for two permeability reservoirs (having permeabilities of 100 nD to 0.1 mD, respectively).

[0061] FIG. 10 is a graph showing the values of produced oil and gas change with BHFP in the different production modes. Curves 1001-1003 are the curves for primary, flooding, and huff-n-puff, respectively.

[0062] FIG. 11 is a graph showing oil saturation near the producing fractures in the C₁ flooding (curve 1101) and CO₂ flooding (curve 1102).

[0063] FIG. 12 is a graph showing pressure near the producing fractures in the C₁ flooding (curve 1201) and CO₂ flooding (curve 1202).

DETAILED DESCRIPTION

[0064] The present invention generally relates to the production of liquid oil from shale gas condensate reservoirs. More particularly, the present disclosure relates to increasing liquid oil production by huff-n-puff in shale gas condensate reservoirs.

[0065] The potentials of gas flooding and huff-n-puff gas injection to enhance oil recovery in shale oil reservoirs has recently been compared by applicant. [Sheng 2014]. In Applicant's simulation work, Applicant used the same grid model used, except that gas condensate compositions were used in place of the black oil model. The method of the present invention was simulated using a compositional simulator (GEM – Composition & Unconventional Reservoir Simulator, developed by Computer Modelling Group Ltd. (Calgary, Alberta, Canada)).

[0066] The gas condensate composition was from *Orangi 2011* (as re-presented in TABLE 1)

and the simulator related reservoir and fluid parameters are shown in **FIG 3**.

TABLE 1

Peng-Robinson EOS Fluid Description of Eagle Ford Condensate (<i>Orangi 2011</i>)						
Components	Initial Comp. (mole frac)	P _c (atm)	T _c (deg.K)	Acentric Fac. (dimensionless)	MW (g/mole)	V _c (l/mol)
C1	0.65882	45.4	190.6	0.013	16.04	0.099
N2	0.00154	33.5	126.0	0.04	28.01	0.089
C2	0.08337	48.2	305.4	0.0986	30.07	0.148
C3	0.0467	41.9	369.8	0.1524	44.09	0.203
CO2	0.02686	72.8	304.2	0.225	44.01	0.094
IC4	0.01045	36.0	408.1	0.1848	58.12	0.263
NC4	0.01825	37.5	425.2	0.201	58.12	0.255
IC5	0.00825	33.4	460.4	0.2223	72.15	0.306
NC5	0.00791	33.3	469.6	0.2539	72.15	0.304
NC6	0.01194	32.46	507.5	0.3007	86.18	0.344
C7+	0.07627	27.8	584.1	0.3673	112	0.446
C11+	0.04551	20.2	692.1	0.5491	175	0.685
C15+	0.00278	17.62	737.5	0.6435	210	0.809
C20+	0.00135	15.39	781	0.7527	250	0.942

[0067] In **TABLE 1**, P_c, T_c and V_c are critical pressure, critical temperature and critical volume, respectively, and MW is molecular weight. Because of flow symmetry, two half-fractures along the left and right boundaries were simulated. These two half-fractures are the equivalent of one fracture. One half-fracture is connected to the injector, while the other half-fracture is connected to the producer. A fracture of 2-ft width was used to represent the real fracture of 0.001 ft, and the fracture permeability was reduced from 83,000 mD to 46.5 mD based on the concept of equivalent fracture conductivity (k_{fwf}) [*Rubin 2010*].

[0068] The concept of equivalent fracture conductivity is that the fracture conductivity (k_{fwf}) in the model of $46.5 \times 2 = 83$ mD·ft is equal to the conductivity of real fracture which is $83000 \times 0.001 = 83$ mD·ft. The fracture length is 1000 ft, represented by 55 blocks in the J direction of the simulation grid. The formation height and the fracture height are the same, 200 ft.,

represented by 7 blocks in the K direction. The fracture spacing is 200 ft. The locations of two half-fractures in the gas flooding mode are in the most-left and most-right blocks in the I direction as shown in **FIG. 1** and **FIGS. 9A-9B**. The location of a single fracture in the huff-n-puff mode is in the middle of the model, as schematically shown in **FIGS. 9A-9B**. Total 22 blocks are used in the I direction in the gas flooding mode and 21 blocks in the I direction for the huff-n-puff mode. For the gas flooding, the injector is located at $I = 1$ and the producer at $I = 22$. For the huff-n-puff, the injector and producer (same well) is located at $I = 11$. The well locations in the XY plan are schematically shown in **FIGS. 9A-9B**. All the wells are perforated at the bottom layer ($K = 7$) and in the middle in the J direction ($J = 28$). The detailed block sizes are as follows.

[0069] The block sizes in feet in the I direction from $I = 1$ to $I = 22$ in the order (gas flooding mode) are:

1, 4, 6, 8, 8, 9, 10, 12, 12, 14, 16,
16, 14, 12, 12, 10, 9, 8, 8, 6, 4, 1

[0070] The block sizes in feet in the I direction from $I = 1$ to $I = 21$ in the order (primary and huff-n-puff modes) are:

16, 14, 12, 12, 10, 9, 8, 8, 6, 4, 2,
4, 6, 8, 8, 9, 10, 12, 12, 14, 16

[0071] The block sizes in feet in the J direction with total 55 blocks (all modes) are:

35, 21 blocks at 20 ft each, 16, 10, 8, 6, 4, 2, 4, 6, 8, 10, 16, 21 blocks at 20 ft each, 35

[0072] The block sizes in feet in the K direction from $K = 1$ to $K = 7$ in the order (all modes) are:

52.8, 26.4, 14.2, 13.2, 14.2, 26.4, 52.8

[0073] In this example, a single well and a single fracture are built in the model for the huff-n-puff and primary modes. Their block sizes in the I direction can be the same as those in the gas flooding mode, if two half-wells and two half-fractures are used. The results are unchanged because of the flow symmetry. [K. Chen 2013].

[0074] . The formation height and the fracture height were the same, 200 ft. The properties of the reservoir properties used in the simulation are provided in **TABLE 2**.

TABLE 2

Reservoir and fluid properties used in the model	
Initial Reservoir Pressure	9088 psi
Porosity of Shale Matrix	0.06
Initial Water Saturation	0.2
Compressibility of Shale	$5 \times 10^{-6} \text{ psi}^{-1}$
Shale Matrix Permeability	0.0001 md
Reservoir Temperature	310 °F
Reservoir Thickness	200 ft
Dew Point pressure	3988 psi

[0075] The following three scenarios were compared: (a) primary production, (b) gas flooding, and (c) huff-n-puff gas injection. In each scenario, primary production was implemented in the first 5 years, followed by 25 years of continued production. In the gas injection and gas huff-n-puff scenarios, the injected gas or recycled gas was methane. (Different injection gases, such as natural gas, carbon dioxide, nitrogen, and combinations thereof, can be used alternatively, or in additional, to methane in other embodiments of the present invention). The minimum bottom hole flowing pressure for the producer was 500 psi, and the maximum bottom hole injection pressure for the injector was 9500 psi. This injection pressure is a conveniently chosen value and close to the initial reservoir pressure 9088 psi. It is assumed to be below the fracture pressure. For the huff-n-puff mode, the injection and production cycle is 100 days, and there is no soaking

time. **TABLE 3** shows the simulation results for these base cases. The ratios of each parameter for the huff-n-puff scenario to that for the gas flooding scenario are also shown in this **TABLE 3**.

TABLE 3

Performance comparison of different scenarios (100 nD)				
	Primary	Gas Flooding	Gas huff-n-puff	Ratio (B/A)
Total gas produced (MMSCF)	357.01	275.43	3133.7	11.38
Gas injected (MMSCF)	0	216.36	3008.3	13.90
Net gas produced (MMSCF)	357.01	59.07	125.4	2.12
Oil produced (MSTB)	30.385	36.5	46.666	1.28
Oil recovery factor (%)	26	31.23	39.93	1.28
Value of produced oil and gas (MM\$)	4.466548	3.88628	5.1682	1.33

[0076] From **TABLE 3**, it can be seen that the liquid oil recovery from gas huff-n-puff is 39.93%, almost 14% higher than that from the primary depletion, and about 9% higher than the gas flooding scenario. Assuming an oil price of \$100/STB and a gas selling price of \$4/MMSCF, the huff-n-puff scenario showed the highest revenue. Although the primary depletion has higher revenue than the gas flooding, the liquid oil recovery is lower. In this economic calculation, the difference in capital investment and facility and operation costs were not included. A discount rate was not included either. When a discount rate is considered, the performance of huff-n-puff looks even better than gas flooding because the former responds to gas injection earlier, as **FIG. 4** shows that the cumulative oil produced in the huff-n-puff scenario at the earlier days is higher than that in the gas flooding scenario. The simple economic analysis is conducted to compare the liquid oil production potentials between the huff-n-puff mode and gas flooding mode.

[0077] In the current North American market, the gas supply is higher than the demand. Increasing liquid oil production is the operators' interest. The results in **TABLE 3** show that huff-n-puff gas injection can meet the operators' goal.

[0078] FIG. 5 shows the oil saturations near the producing fractures at Block (21,28,4) 905 for the gas flooding case as marked in FIG. 9B, and at Block (10,28,4) 904 in the middle of the model schematically marked in FIG. 9A. (The grids are not correct because the grids in FIGS. 9A-9B are for the gas flooding mode not for the huff-n-puff mode).

[0079] FIG. 5 shows that the oil saturation in the gas huff-n-puff case (curve 503) quickly decreases to very low values. At the end, the oil saturation is almost zero. In the primary and gas flooding cases (curves 501 and 502, respectively), the oil saturations remain high. It is noted that the oil saturation in the gas flooding case built up because the oil bank reaches the producing fracture. In the gas huff-n-puff case, the oil saturation suddenly shot up because some oil in the producing fracture was displaced to the block near the fracture during the gas injection period, as shown in FIG. 6.

[0080] FIG. 7 shows the pressures near the producing fracture of the simulation that was set up as illustrated in FIG. 3. FIG. 7 shows that the pressure in the gas huff-n-puff case (curve 703) fluctuated at high and low values following the huff and puff cycles. The pressures in the primary and gas flooding cases (curves 701 and 702, respectively) remained low. When the flowing bottom-hole pressure is below the dew point pressure, some liquid will drop out during the puff period. But the liquid will be “picked” up by injected dry gas (less heavy components) or mixed with dry gas during huff period. FIG. 8 shows the oil saturation and pressure near the producing fracture in the case of gas huff-n-puff (curves 801 and 802, respectively). FIG. 8 clearly shows that as the pressure declines, during the puff period, the oil saturation builds up; as the pressure is increased during the huff period, the oil saturation is decreased.

[0081] In conventional or tight reservoirs, gas flooding is used to maintain high pressure so that liquid oil and gas production can be achieved [Thomas 1995]. In cases of shale gas

condensate reservoir (matrix permeability of 100 nD, *e.g.*), gas flooding did not result in higher liquid production. This was because the pressure near the injection well was very high, and this pressure could not propagate to the production end owing to very low permeability. The pressure near the producing fracture (Block (21, 28,4) **905** as marked in **FIG. 9B**) in the gas flooding case was very low (about 1000 psi, as shown in **FIG. 7**), and the pressure near the injection fracture (Block (1,28,4) **903** as marked in **FIG. 9A**) is very high (9500 psi). This is clear in the pressure map at the end of 10 years of gas flooding, as shown in **FIG. 9A**. The pressure at the injection side **901** is at 9500 psi, while the pressure at the production side **902** is 500 psi. And there is a large area in between where the pressure is 4000–6000 psi.

[0082] The three scenarios were re-simulated by increasing the matrix permeability by 1000 times from 100 nD to 0.1 mD. The pressure map at the end of 10 years of gas flooding is shown in **FIG. 9B**. **FIG. 9B** shows that the pressure at the injection side **901** is about 2481 psi, and the pressure at the production side **902** is 500 psi. And the pressure gradually propagates from the injector to the producer. Note that in the case of 0.1 mD, the pressure near the injector cannot be built up to 9500 psi like the case of 100 nD, because the pressure is able to dissipate to the production end.

[0083] The three scenarios of primary, gas flooding and huff-n-puff were re-simulated for a tight formation of 0.1 mD (to show the difference between a conventional or tight reservoir). The results for these three cases are shown in **TABLE 4**.

TABLE 4

Performance comparison of different scenarios (0.1 mD)				
	Primary	Gas Flooding	Gas huff-n-puff	Ratio (B/A)
Total gas produced (MMSCF)	427.22	7491.5	3989.4	0.53
Gas injected (MMSCF)	0	7200	3600	0.50
Net gas produced (MMSCF)	427.22	291.5	389.4	1.34
Oil produced (MSTB)	55.046	111.36	83.167	0.75
Oil recovery factor (%)	47.1	95.28	71.16	0.75
Value of produced oil and gas (MM\$)	7.21348	12.302	9.8743	0.80

[0084] **TABLE 4** shows that the oil recovery factor was the highest in the gas flooding case, and was twice that from the primary case. The oil recovery factor in the gas hug-n-puff case was lower than that in the gas flooding case. The revenues from produced oil and gas were in line with the oil recovery factors from these three scenarios. The performance difference in **TABLE 3** and **TABLE 4** shows that gas huff-n-puff is the preferred method to increase liquid oil production in shale gas condensate reservoirs, but may not in conventional or tight gas condensate reservoirs. The ratios of each parameter for the huff-n-puff scenario to that for the gas flooding scenario in **TABLE 4** are all lower than one except for the net bas produced, compared with the ratios in **TABLE 3** for a shale reservoir which are all greater than one.

[0085] As further verification of the present invention in liquid oil production is increased from gas condensate reservoirs, a series of parametric studies were conducted. The parameters studied include initial reservoir pressure, bottom-hole flowing pressure (BHFP), cycle time, soak time, gas compositions, and CO₂ injection.

[0086] For initial reservoir pressure, the dew point of the gas condensate in the base model was 3988 psi, and the initial reservoir pressure was 9088 psi. It is believed that when the initial reservoir pressure is close to the dew point, the huff-n-puff method is more effective compared to

gas flooding and primary depletion. A lower reservoir pressure of 5000 psi was tested while keeping the dew point pressure unchanged. The results for the three scenarios are presented in **TABLE 5**.

TABLE 5

Performance at the initial reservoir pressure of 5000 psi				
	Primary	Gas Flooding	Gas huff-n-puff	Ratio (B/A)
Total gas produced (MMSCF)	286.62	158.78	2125.8	13.39
Gas injected (MMSCF)	0	225.51	2010.1	8.91
Net gas produced (MMSCF)	286.62	-66.73	115.7	-1.73
Oil produced (MSTB)	17.832	15.446	23.418	1.52
Oil recovery factor (%)	18.969	16.43	24.911	1.52
Value of produced oil and gas (MM\$)	2.92968	1.2777	2.8046	2.20

[0087] The ratios of oil recovery factors and values of produced oil and gas for the huff-n-puff scenario to those for the gas flooding scenario are all 1.52. These ratios at the initial reservoir pressure of 9088 psi (performance results in **TABLE 3**) are 1.28 and 1.33, respectively. Comparing these ratios at these two initial reservoir pressures, it can be seen that with lower initial reservoir pressure, the huff-n-puff shows higher potential of improved oil recovery (IOR) compared with gas flooding.

[0088] For the effect of bottom-hole flowing pressure (BHFP), as discussed above with regard to **FIG. 2**, the oil recovery in shale oil reservoirs is increased as BHFP is lowered because of larger driving energy. However, **TABLE 6** shows that although the gas produced during the primary depletion is increased in shale gas condensate reservoirs, the oil recovery in both primary depletion and gas flooding increases with BHFP before reaching the dew point pressure (3988 psi in this studied reservoir), and decreases after the dew point.

TABLE 6

Oil recovery factors (%) at different BHFPs and different injection modes					
BHFP, psi	Primary gas, MMSCF	Primary oil	Gas flooding (A)	Huff-n-puff (B)	Ratio (B/A)
500	357.01	26	31.23	39.93	1.28
1000	337.87	26.427	31.757	39.328	1.24
2000	285.84	27.97	33.813	38.805	1.15
4000	167.85	28.903	35.1	34.683	0.99
6000	85.132	15.272	19.972	25.322	1.27

[0089] This is because more liquid will drop out when the BHFP is farther below the dew point. The drawdown will be reduced when the BHFP is increased above the dew point. So the oil recovery factor decreases with BHFP. The ratio oil recovery factors of the huff-n-puff and flooding reaches the lowest point at the dew point pressure (close to 1).

[0090] FIG. 10 shows the values of oil and gas produced in MM\$ at different BHFPs (curves 1001-1003 respectively for primary, flooding, and huff-n-puff). The value decreases with BHFP in the primary depletion and the huff-n-puff. The value is at the highest at the dew point pressure, and the value increases in the huff-n-puff mode.

[0091] For cycle time effect, FIG. 7 shows that the pressure quickly decreases when the well is put in production, and quickly increases when the well is put in injection. After a short time of production or injection, either production or injection rate must quickly decrease. Therefore, reducing cycle time should accelerate production. TABLE 7 shows the results for different cycle times.

TABLE 7

Effect of cycle times				
	200 d	100 d	50 d	25 d
Total gas produced (MMSCF)	2232.2	3133.7	3783.1	3814.4
Gas injected (MMSCF)	2161.6	3008.3	3621.5	3572
Net gas produced (MMSCF)	70.6	125.4	161.6	242.4
Oil produced (MSTB)	43.816	46.666	44.668	40.891
Oil recovery factor (%)	37.49	39.93	38.22	34.99
Value of produced oil and gas (MM\$)	4.664	5.1682	5.1132	5.0587

[0092] Interestingly, the total gas produced follows this expectation, but the total oil produced does not. The data shows that the maximum oil is produced when the cycle time is at 100 days.

[0093] For soak time effect, in most of the cases, the puff period immediately follows the huff period. There is no soak time imposed because it is expected that miscibility or diffusion between the injected gas and in situ gas and condensate is fast.

[0094] To test this, the huff time of 100 days in the base case was split into 50 days of soak time and 50 days of injection time. In other words, during the 100 days, the first 50 days was used to inject gas, then the well was shut-in in the next 50 days. The case was “50 d shut-in, 100 d open” in **TABLE 8**.

TABLE 8

Effect of soak times			
Scenario	100 d	50 d shut-in, 100 d open	50 d shut-in, 100 d open, diffusion
Total gas produced (MMSCF)	3133.7	2017.9	2028.2
Gas injected (MMSCF)	3008.3	1798.2	1790.3
Net gas produced (MMSCF)	125.4	219.7	237.9
Oil produced (MSTB)	46.666	40.582	40.92
Oil recovery factor (%)	39.93	34.72	35.012
Value of produced oil and gas (MM\$)	5.1682	4.937	5.0436

[0095] The results in **TABLE 8** show that all the parameters are lower in this case compared to the base case without 50 days of soak time (the case “100 d” in the table), except the net gas produced. When the diffusion effect was added (in the case of “50 d shut-in, 100 d open, diffusion”), all the parameters are higher than those in the corresponding case without diffusion. However, the effect was minor, and those parameters were all lower than those in the base case. Only the molecular diffusion was considered. The molecular binary diffusion coefficients between components in the mixture are calculated using the *Sigmund 1976* method.

[0096] For gas composition effect, the gas flooding and huff-n-puff were simulated with the injected gas composition of 85% C_1 and 15% C_2 . The results are shown in **TABLE 9**.

TABLE 9

Gas composition effect (85% C_1, 15% C_2)				
	Primary	Gas flooding (A)	Huff-n-puff (B)	Ratio (B/A)
Total gas produced (MMSCF)	357.01	273.680	3091.000	11.29
Gas injected (MMSCF)	0	211.290	2917.600	13.81
Net gas produced (MMSCF)	357.01	62.390	173.400	2.78
Oil produced (MSTB)	30.385	35.504	49.297	1.39
Oil recovery factor (%)	26	30.377	42.180	1.39
Value of produced oil and gas (MM\$)	4.467	3.800	5.623	1.48
Base case (100% C_1)	-	-	-	-
Oil recovery factor (%)	26.000	31.230	39.93	1.28
Value of produced oil and gas (MM\$)	4.467	3.886	5.17	1.33

[0097] For the ease of comparison, the oil recovery factor and value of produced oil and gas for the base case (100% C_1) are also listed. It is understood that as the injection gas composition was closer to the reservoir gas, the recovery was higher, as shown in this **TABLE 9** for the huff-n-puff and gas flooding scenarios. Note the oil recovery factor for the gas mixture injection was

slightly lower than that from 100% C₁. The ratios of oil recovery factors and values of produced oil and gas for the mixture of C₁ and C₂ are higher than those for the C₁ only.

[0098] For CO₂ injection performance, several attempts have been made to evaluate CO₂ EOR potential in shale and tight oil reservoirs. [*Shoaib 2009; Wang 2010; C Chen 2013; Want et al., 2013; Wan 2014; Gamadi 2014; Yu 2014*]. Applicant believes that evaluation of CO₂ potential to improve liquid oil recovery from shale oil gas condensate reservoirs has not been seen in the literature. Shale reservoirs can serve as good CO₂ storage reservoirs. Therefore, to see the performance of CO₂ injection is of interest. **TABLE 10** shows the oil recovery factors for CO₂ and C₁ injection.

TABLE 10

CO₂ vs. C₁ injection			
	Gas flooding (A)	Huff-n-puff (B)	Ratio (B/A)
C ₁ oil recovery factor (%)	30.890	39.93	1.29
CO ₂ oil recovery factor (%)	24.533	37.092	1.51

[0099] The oil recovery factor from the CO₂ huff-n-puff was higher than that from the CO₂ flooding. Interestingly, the oil recovery factor from C₁ flooding was higher than that from CO₂ flooding; and this observation is also true for the huff-n-puff cases.

[00100] These observations can also be understood by comparing the flooding cases. **FIGS. 11-12** show, respectively, the oil saturation and pressure near the producing fractures. In **FIG. 11**, the oil saturation near the producing fractures is shown for C₁ flooding (curve **1101**) and CO₂ flooding (curve **1102**). In **FIG. 12**, the pressure near the producing fractures is shown for C₁ flooding (curve **1201**) and CO₂ flooding (curve **1202**). These figures indicate that the pressure wave and the oil bank arrive later in the CO₂ flooding than in the C₁ flooding. Therefore, the

cumulative oil produced in the CO₂ flooding was delayed. As an aside, there was a concern of formation damage owing to asphaltene deposition in shale reservoirs. [*Shahriar 2014*].

[00101] The examples provided herein are to more fully illustrate some of the embodiments of the present invention. It should be appreciated by those of skill in the art that the techniques disclosed in the examples which follow represent techniques discovered by the Applicant to function well in the practice of the invention, and thus can be considered to constitute exemplary modes for its practice. However, those of skill in the art should, in light of the present disclosure, appreciate that many changes can be made in the specific embodiments that are disclosed and still obtain a like or similar result without departing from the spirit and scope of the invention.

[00102] While embodiments of the invention have been shown and described, modifications thereof can be made by one skilled in the art without departing from the spirit and teachings of the invention. The embodiments described and the examples provided herein are exemplary only, and are not intended to be limiting. Many variations and modifications of the invention disclosed herein are possible and are within the scope of the invention. Accordingly, other embodiments are within the scope of the following claims. The scope of protection is not limited by the description set out above.

[00103] Advantages of the using embodiments of the present invention include maximizing oil production rate, maximizing liquid oil offtake, and providing an alternative to the gas or water flooding methods that are not feasible for the low permeability shale reservoirs. Such technology of the present invention thus can be utilized by oil producers to maximize liquid oil production from its shale reservoirs.

RELATED PATENTS AND PUBLICATIONS

[00104] The following patents and publications relate to the present invention:

- [00105] U.S. Patent No. 4,390,068, “Carbon dioxide stimulated oil recovery process,” issued June 28, 1983 to Patton *et al.* (“*Patton '068 Patent*”).
- [00106] U.S. Patent No. 4,452,689, “Huff and puff process for retorting oil shale,” issued June 5, 1984 to Russum (“*Russum '689 Patent*”).
- [00107] U.S. Patent No. 5,381,863, “Cyclic huff-n-puff with immiscible injection and miscible production steps,” issued January 17, 1995 to Wehner (“*Wehner '863 Patent*”).
- [00108] U.S. Patent No. 5,725,054, “Enhancement of residual oil recovery using a mixture of nitrogen or methane diluted with carbon dioxide in a single-well injection process,” issued March 10, 1998 to Shayegi *et al.* (“*Shayegi '054 Patent*”).
- [00109] U.S. Patent No. 6,244,431, “Huff and puff process utilizing nitrogen gas,” issued June 12, 2001 to Miller (“*Miller '431 Patent*”).
- [00110] Aziz, R.M.A. 1982. Critique on gas cycling operations on gas-condensate reservoirs, paper SPE11477 presented at the Middle East Oil Technical Conference of the Society of Petroleum Engineers held in Manama, Bahrain. March 14-17 (“*Aziz 1982*”).
- [00111] Chaback J.J. and Williams, M.L. 1994. p-x Behavior of a rich-gas condensate in admixture with CO₂ and (N₂+CO₂), SPERE, 9(1), 44-50 (“*Chaback 1994*”).
- [00112] Chen, C., Balhoff, B., Mohanty, K. K., 2013. Effect of Reservoir Heterogeneity on Improved Shale Oil Recovery by CO₂ Huff-n-Puff, SPE 164553-MS, presented at 2013 SPE Unconventional Resources Conference, Woodlands, Texas, USA, 10-12 April (“*C Chen 2013*”).
- [00113] Chen, K. 2013. Evaluation of EOR Potential by Gas and Water Injection in Shale Oil Reservoirs, Masters thesis, Texas Tech University, May (“*K Chen 2103*”).
- [00114] Gamadi, T.D., Sheng, J.J., and Soliman, M.Y. 2013. An Experimental Study of Cyclic Gas Injection to Improve Shale Oil Recovery, paper SPE 166334 presented at the SPE Annual

Technical Conference and Exhibition held in New Orleans, Louisiana, USA, 30 September–2 October (“*Gamadi 2013*”).

[00115] Gamadi, T.D., Sheng, J.J., and Soliman, M.Y., Menouar, H., Watson, M.C., Emadibaladehi, H. 2014. An Experimental Study of Cyclic CO₂ Injection to Improve Shale Oil Recovery, paper SPE 169142 presented at the SPE Improved Oil Recovery Symposium, 12-16 April, Tulsa, Oklahoma (“*Gamadi 2014*”).

[00116] Goricnik B., Sarapa, M., and Csisko, M. 1995. Phase equilibria in a rich-gas condensate-CO₂ and natural gas mixtures, NAFTA, 46(9), 371-377 (“*Goricnik 1995*”).

[00117] Hernandez, I., Farouq Ali, S.M., and Bentsen, R.G. 1999. First Steps for Developing an Improved Recovery Method for a Gas Condensate Reservoir, paper PETSOC 95-09 presented at the Annual Technical Meeting of Petroleum Society of Canada, June 14-18, Calgary, Alberta (“*Hernandez 1999*”).

[00118] Juell, A.O. and Whitson, C.H. 2013. Optimized Well Modeling of Liquid-Rich Shale Reservoirs, paper SPE 166380 presented at the SPE Annual Technical Conference and Exhibition, 30 September-2 October, New Orleans, Louisiana, USA (“*Juell 2013*”).

[00119] Orangi, A., Nagarajan, N.R., Honarpour, M.M., Rosenzweig, J. 2011. Unconventional Shale Oil and Gas-Condensate Reservoir Production, Impact of Rock, Fluid, and Hydraulic Fractures. Paper 140536 presented at SPE Hydraulic Fracturing Technology Conference, January 24-26, 2011, The Woodlands, Texas, USA (“*Orangi 2011*”).

[00120] Rubin, B. 2010. Accurate Simulation of Non Darcy Flow in Stimulated Fractured Shale Reservoirs. paper SPE 132093 presented at the SPE Western Regional Meeting, 27-29 May, Anaheim, California (“*Rubin 2010*”).

- [00121] Shahriar, M. 2014. Aggregation of Asphaltene Molecules as a Function of Carbon Dioxide Concentration, PhD dissertation, Texas Tech University, August (“*Shahriar 2014*”).
- [00122] Shoaib, S., Hoffman, B.T. 2009. CO₂ Flooding the Elm Coulee Field, SPE-123176-MS presented at the SPE Rocky Mountain Petroleum Technology Conference, 14-16 April, Denver, Colorado (“*Shoaib 2009*”).
- [00123] Sheng, J.J. 2011. Modern Chemical Enhanced Oil Recovery: Theory and Practice, Elsevier (“*Sheng 2011*”).
- [00124] Sheng, J.J. and Chen, K. 2014. Evaluation of the EOR Potential of Gas and Water Injection in Shale Oil Reservoirs, *Journal of Unconventional Oil and Gas Resources*, 5, 1-9 (“*Sheng 2014*”).
- [00125] Sigmund, P.M. 1976. Prediction of Molecular Diffusion at Reservoir Conditions. Part 1- Measurement and Prediction of Binary Dense Gas Diffusion Coefficients. JCPT 15 (2):48-57 (“*Sigmund 1976*”).
- [00126] Smith L.R. and Yarborough L. 1968. Equilibrium Revaporization of retrograde condensate by dry gas injection, SPEJ, 8(1), 87-94 (“*Smith 1968*”).
- [00127] Standing, M.B., Lindblad, E.N., and Parsons, R.L. 1948. Calculated Recoveries by Cycling from a Retrograde Reservoir of Variable Permeability, Trans. AIME, 174(1), 165-190 (“*Standing 1948*”).
- [00128] Thomas, F.B., Zhou, X., Bennion, D.B., Bennion, D.W. 1995. Towards Optimizing Gas Condensate Reservoirs, paper PETSOC 95-09 presented at the Annual Technical Meeting of Petroleum Society of Canada, June 7-9, 1995, Calgary, Alberta (“*Thomas 1995*”).

- [00129] Transparency Market Research (TMR). April 2014. Enhanced Oil Recovery (EOR) Market: Global Industry Analysis, Size, Share, Growth, Trends and Forecast, 2013 – 2023. ID 2829851 (“*TMR 2014*”).
- [00130] Wan, T., Sheng, J.J., and Soliman, M.Y. 2013. Evaluation of the EOR Potential in Shale Oil Reservoirs by Cyclic Gas Injection, paper SPWLA-D-12-00119 presented at the SPWLA 54th Annual Logging Symposium held in New Orleans, Louisiana, 22-26 June (“*Wan 2013 A*”).
- [00131] Wan, T., Sheng, J.J., and Soliman, M.Y. 2013. Evaluation of the EOR Potential in Fractured Shale Oil Reservoirs by Cyclic Gas Injection, paper SPE 168880 or URTeC 1611383 presented at the Unconventional Resources Technology Conference held in Denver, Colorado, USA, 12-14 August 2013 (“*Wan 2013 B*”).
- [00132] Wan, T., Meng, X., Sheng, J.J., Watson, M. 2014. Compositional Modeling of EOR Process in Stimulated Shale Oil Reservoirs by Cyclic Gas Injection, paper SPE 169069 presented at the SPE Improved Oil Recovery Symposium, 12-16 April, Tulsa, Oklahoma (“*Wan 2014*”).
- [00133] Wang, X., Luo, P., Er, V. Huang, S. 2010. Assessment of CO₂ Flooding Potential for Bakken Formation, Saskatchewan, paper SPE-137728-MS presented at the Canadian Unconventional Resources and International Petroleum Conference, 19-21 October, Calgary, Alberta, Canada (“*Wang 2010*”).
- [00134] Weinaug C.P. and Cordell J.C. 1949. Revaporization of butane and pentane from sand, Trans. AIME, 179(1), 303-312 (“*Weinaug 1949*”).
- [00135] Yu, W., Lashgari, H., Sepehrnoori, K. 2014. Simulation Study of CO₂ Huff-n-Puff Process in Bakken Tight Oil Reservoirs, paper SPE 169575-MS presented at the SPE Western North American and Rocky Mountain Joint Meeting, 17-18 April, Denver, Colorado (“*Yu 2014*”).

[00136] The disclosures of all patents, patent applications, and publications cited herein are hereby incorporated herein by reference in their entirety, to the extent that they provide exemplary, procedural, or other details supplementary to those set forth herein.

What is claimed is:

1. A method of producing hydrocarbons from a shale gas condensate reservoir, wherein the method comprises the steps of:
 - (a) determining dew point pressure of fluids in a reservoir formation;
 - (b) injecting gas from the surface downhole into a wellbore of a well such that the injected gas flows from bottom-hole into the reservoir formation, wherein the step of injecting occurs over a first time period of a cycle period;
 - (c) producing fluids from the same wellbore by flowing the fluids from the reservoir formation into the bottom hole and up hole to the surface, wherein
 - (i) the bottom hole flowing pressure is below the dew point pressure of the fluids in the reservoir formation, and
 - (ii) the production of the fluids occurs over a second time period of a cycle period; and
 - (d) repeating steps (c) and (d) for a plurality of cycle periods.
2. The method of Claim 1, wherein the hydrocarbons are liquid oil.
3. The method of Claim 1, wherein the shale gas condensate reservoir has a permeability of the reservoir formation that is at most 50 mD.
4. The method of Claim 3, wherein the permeability is at most 0.1 mD.
5. The method of Claim 3, wherein the permeability is at most 100 nD.

6. The method of Claim 1, wherein the gas is selected from the group consisting of methane, natural gas, carbon dioxide, nitrogen, and combinations thereof.
7. The method of Claim 1, wherein the gas comprises methane.
8. The method of Claim 1, wherein the gas comprises carbon dioxide.
9. The method of Claim 1, wherein the pressure at which the gas is injected into the reservoir formation is below fracture pressure of the reservoir formation.
10. The method of Claim 1, wherein the cycle period is at most 200 days.
11. The method of Claim 1, wherein the cycle period is between 25 and 100 days.
12. The method of Claim 1 further comprising selecting the durations of the first time period and the second time period based upon a parameter selected from the group consisting of permeability of the reservoir formation, composition of the gas, composition of the fluids in the reservoir formation, the dew point pressure of the fluids in the reservoir formation, the bottom-hole flowing pressure, production rate, the bottom-hole injection pressure, the bottom-hole injection rate, facility constraints, economic parameters, and combinations thereof.
13. The method of Claim 12, wherein the parameter comprises an economic parameter of net

present value of the fluids produced.

14. The method of Claim 1, wherein there is no soaking period between the first period and the second period.

15. The method of Claim 1, wherein there is a soak period between the first period and the second period.

16. The method of Claim 15, wherein the soak period is for a period of time that is at most the time of the first period.

17. The method of Claim 2, wherein the production of the liquid oil from the wellbore using the method and the production of the liquid oil from the wellbore before the method was used is at a liquid oil ratio of least around 1.2.

18. The method of Claim 17, wherein the liquid oil ratio is at least around 1.5.

19. The method of Claim 2, wherein the production of net gas from the wellbore using the method and the production of gas from the wellbore before the method was used is at a gas ratio of least around 1.3, wherein the net gas is the amount of gas produced during the second time period less the amount of gas injected during the first time period.

20. The method of Claim 19, wherein the gas ratio is at least around 2.

21. The method of Claim 1, wherein the bottom hole flowing pressure is at most 2500 psi.
22. The method of Claim 1, wherein the bottom hole flowing pressure is at most 500 psi.
23. The method of Claim 1, wherein durations of the first time period and the second time period is the same for each cycle period in the plurality of cycle period.
24. The method of Claim 1, wherein
 - (a) duration of the first time periods is the same for each cycle period in the plurality of cycle periods, and
 - (b) duration of the second time periods is the same for each cycle period in the plurality of cycle periods.
25. The method of Claim 1, wherein
 - (a) duration of at least some of the first time periods is different for each cycle period in the plurality of cycle periods, and
 - (b) duration of at least some of the second time periods is different for each cycle period in the plurality of cycle period.

1/ 13

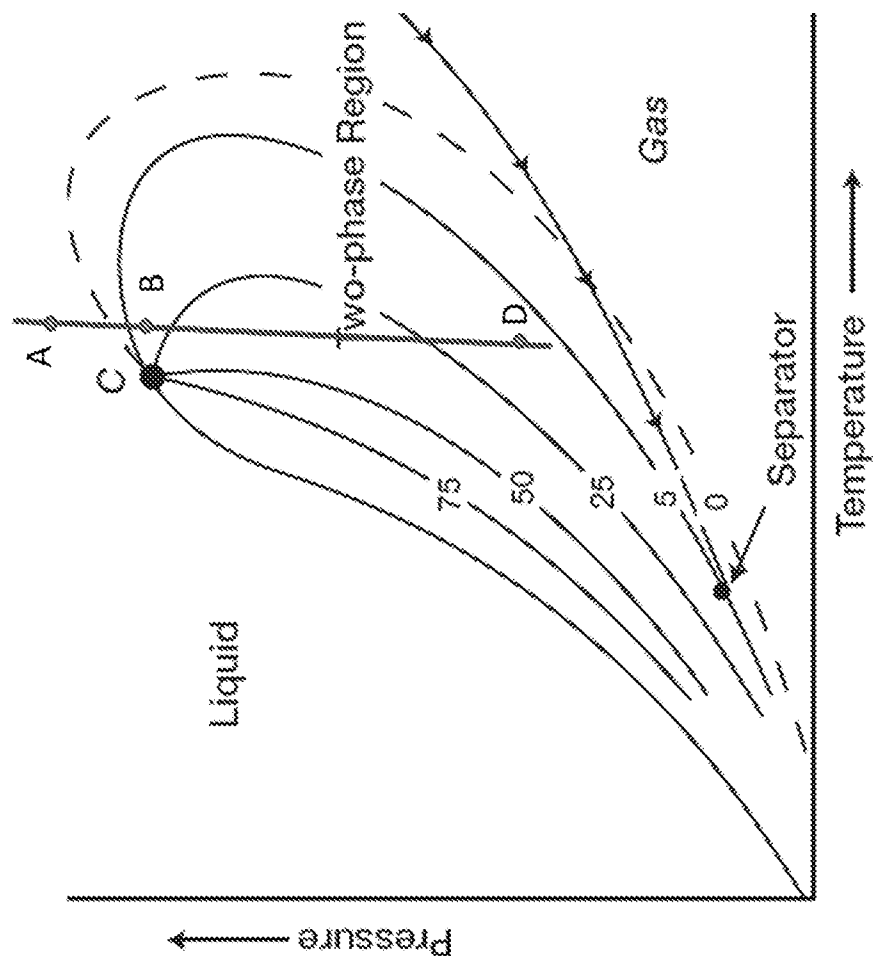


FIG. 1

2/13

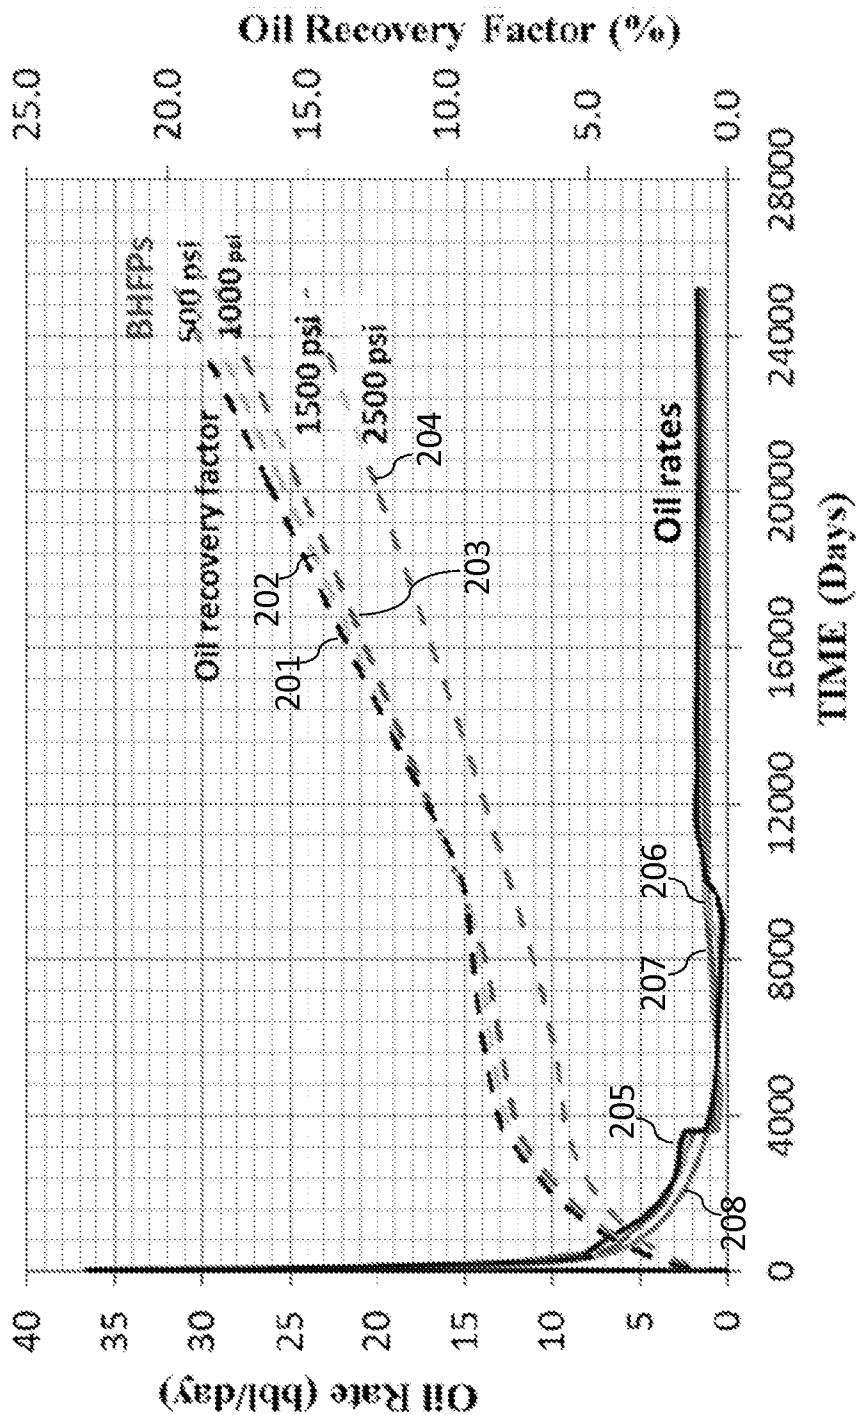


FIG. 2

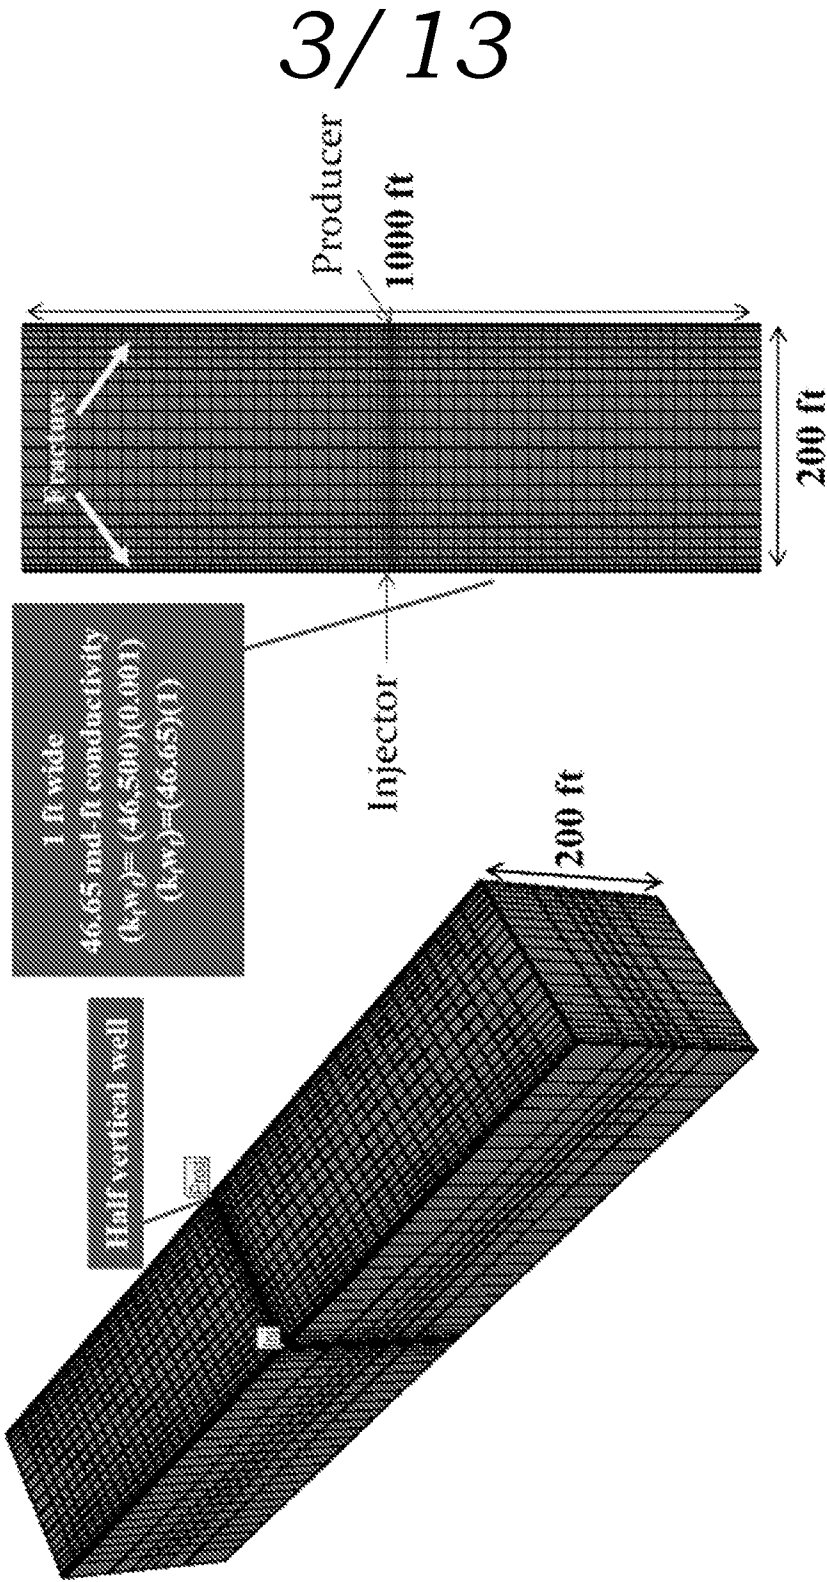


FIG. 3

4/13

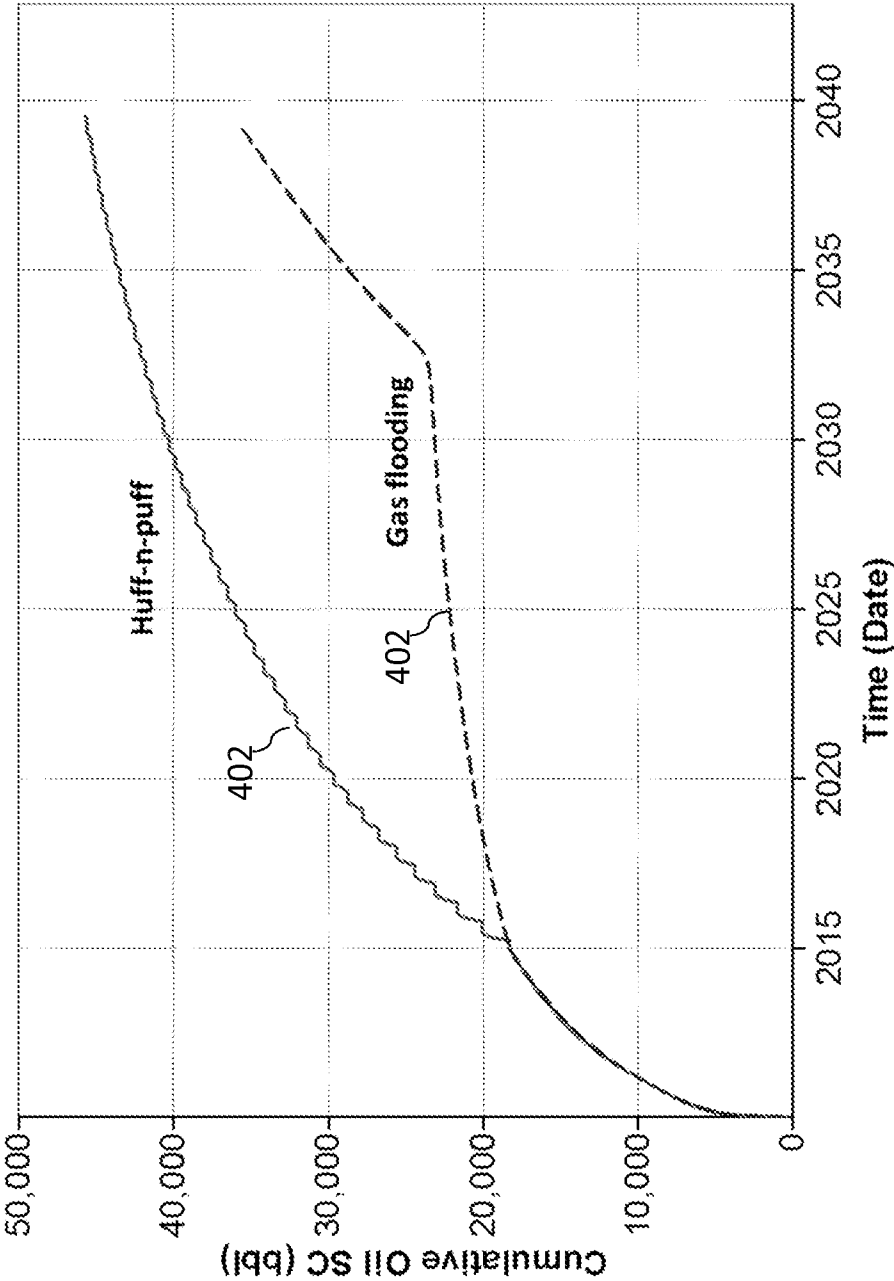


FIG. 4

5/ 13

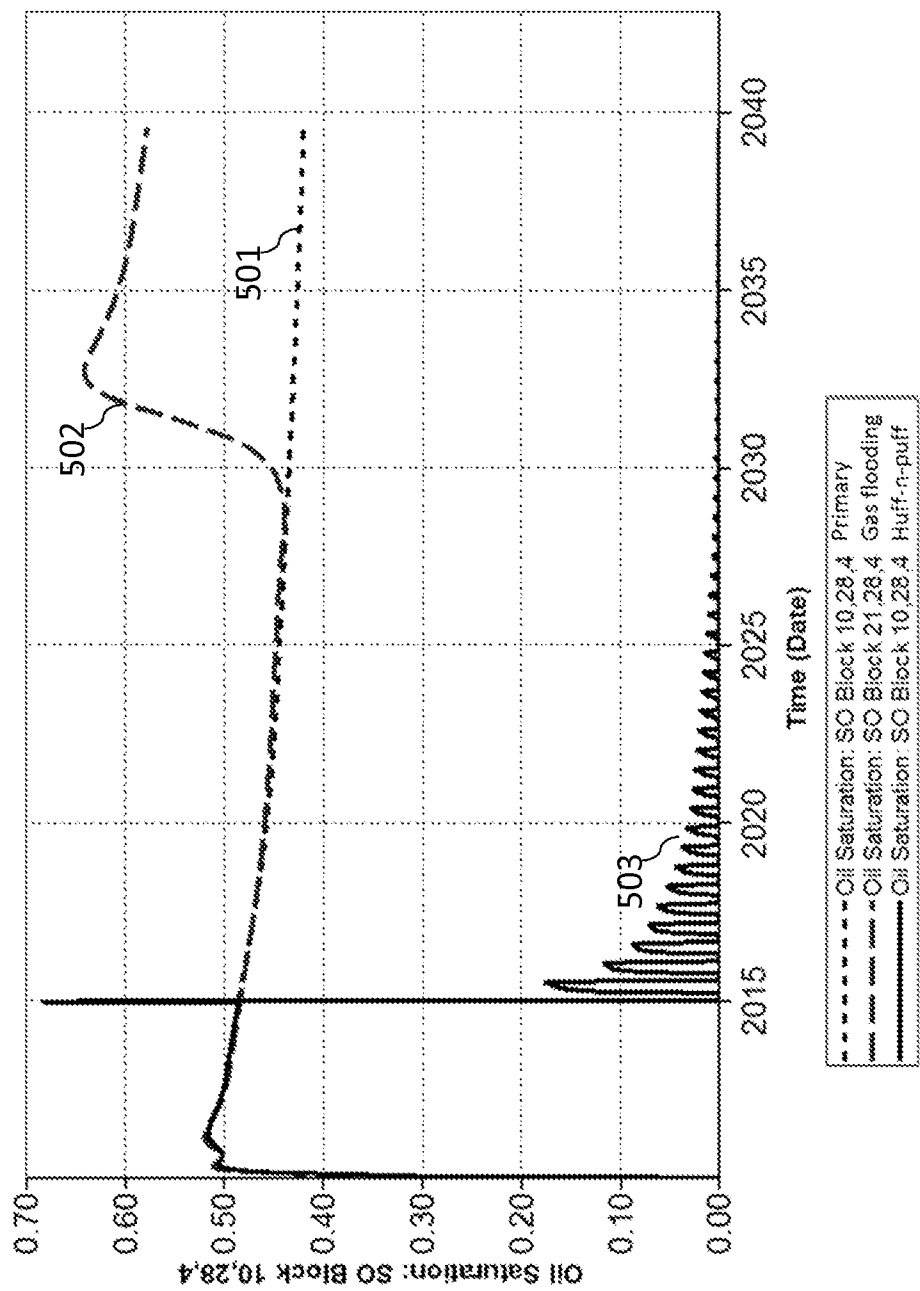


FIG. 5

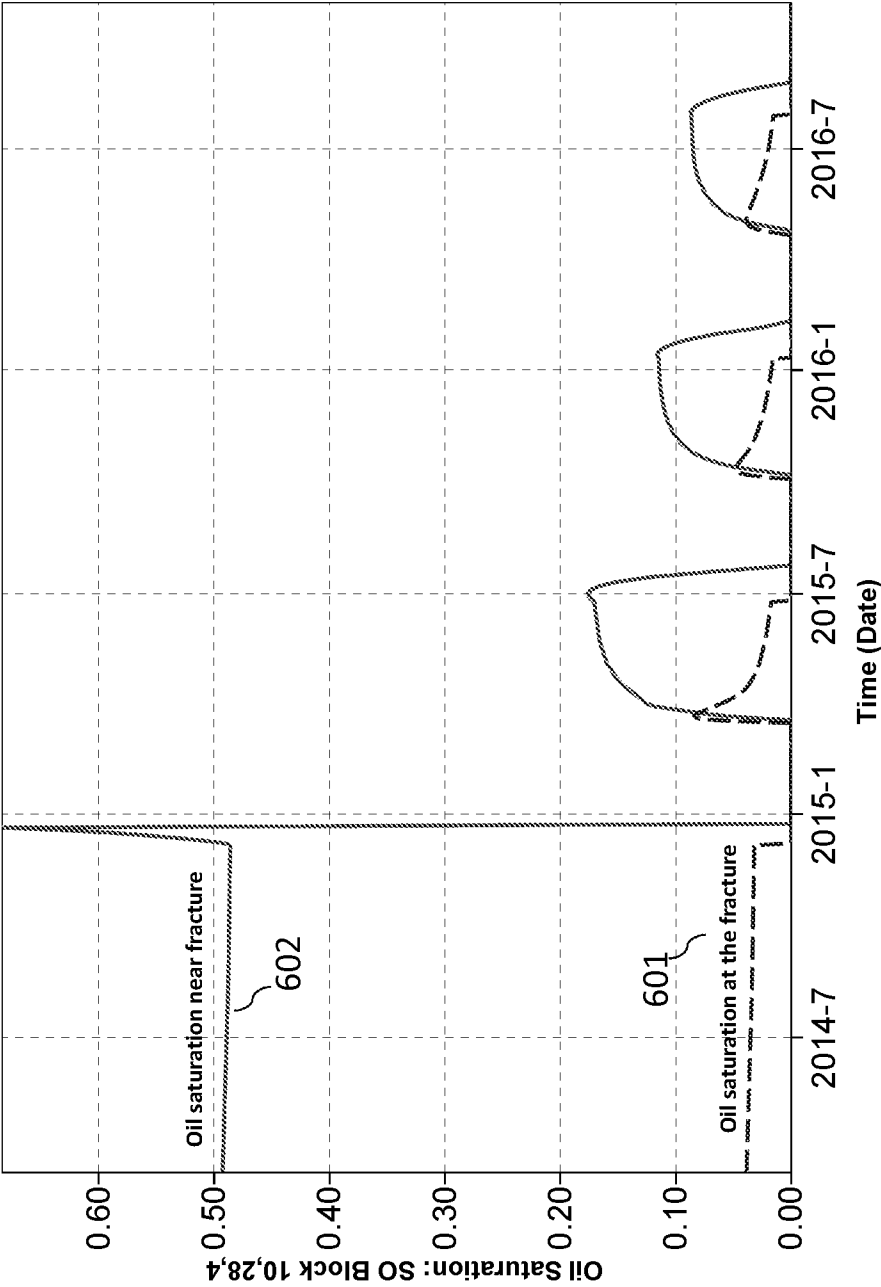


FIG. 6

7/13

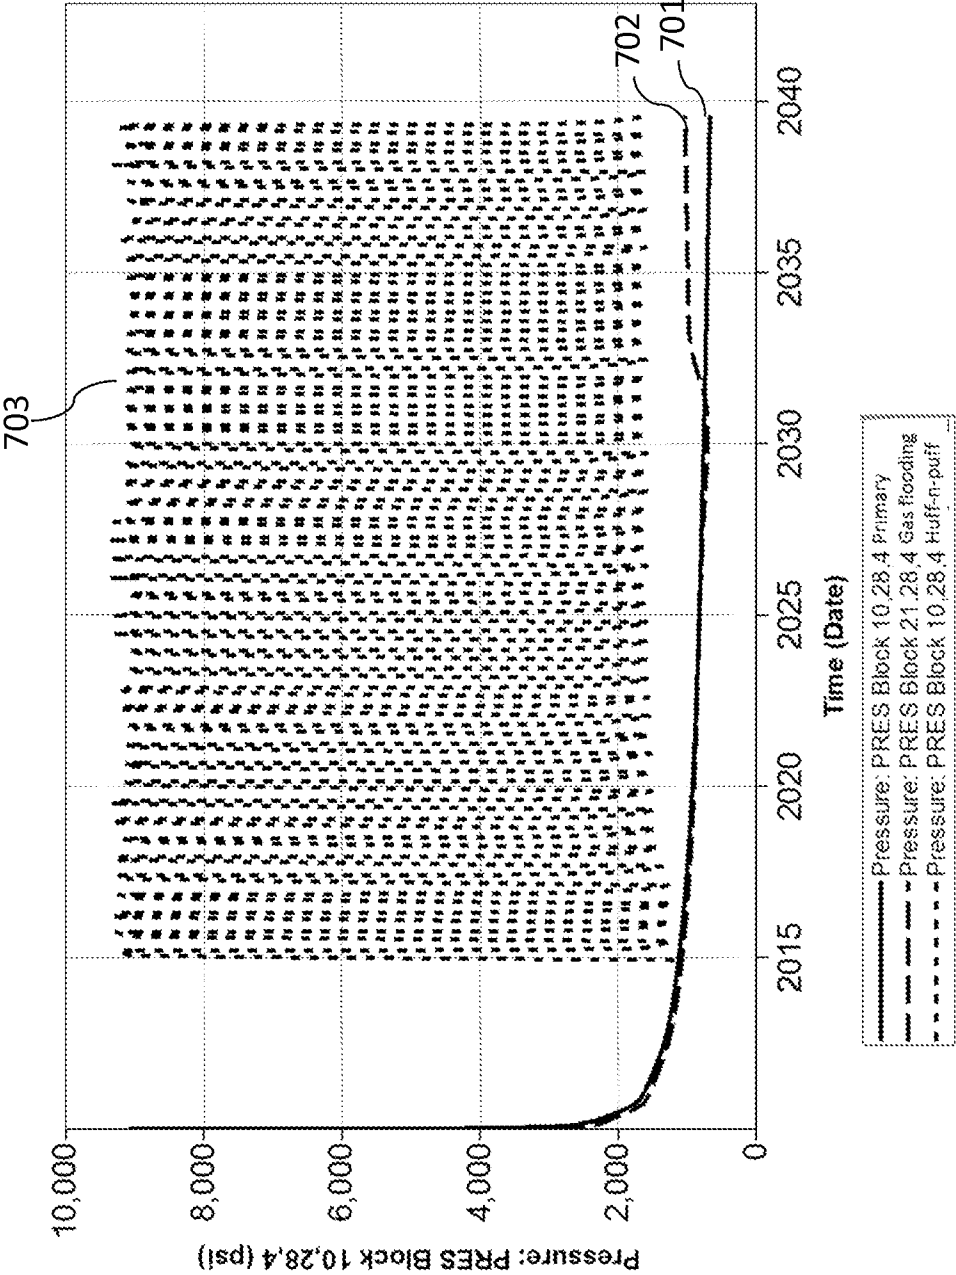


FIG. 7

8/13

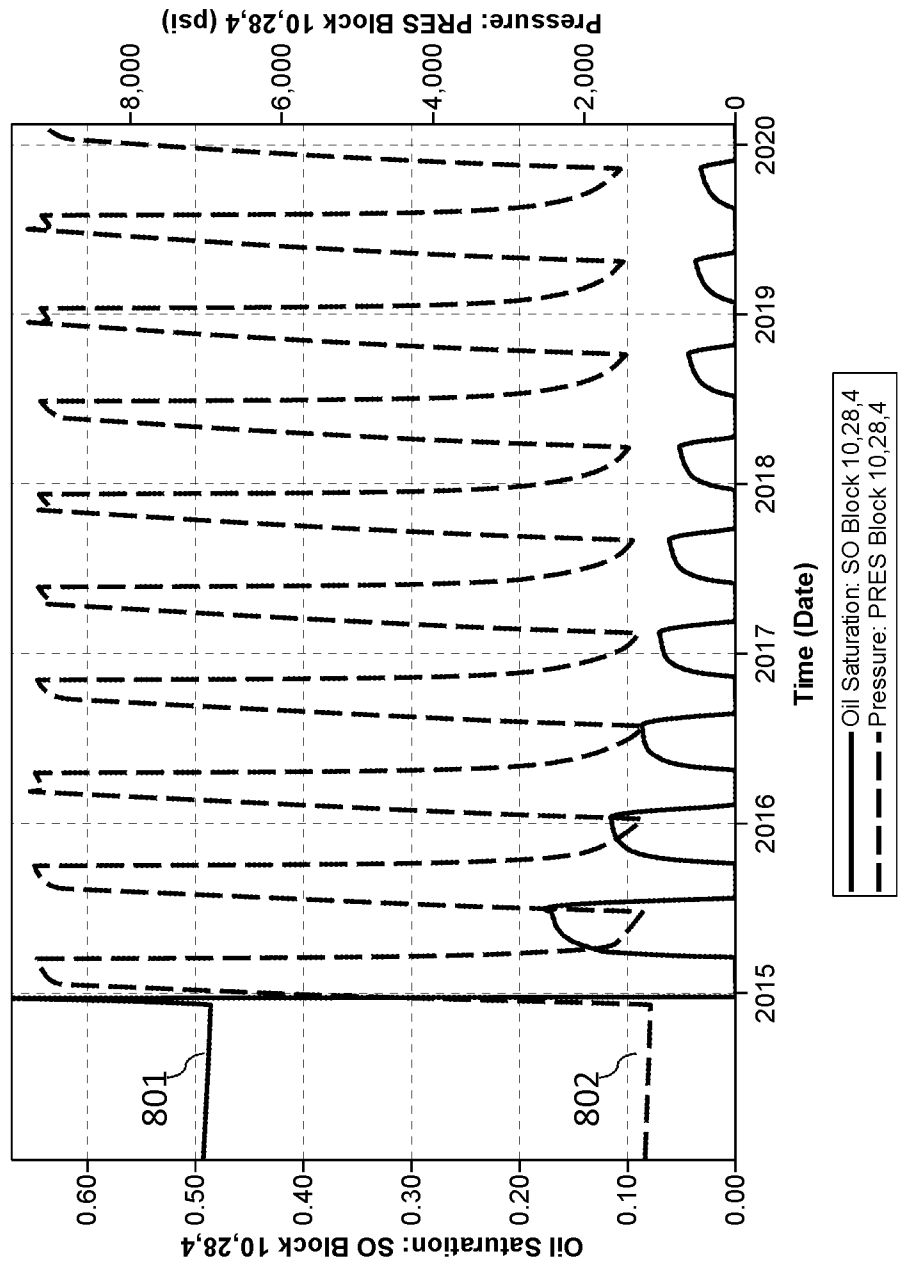


FIG. 8

9/13

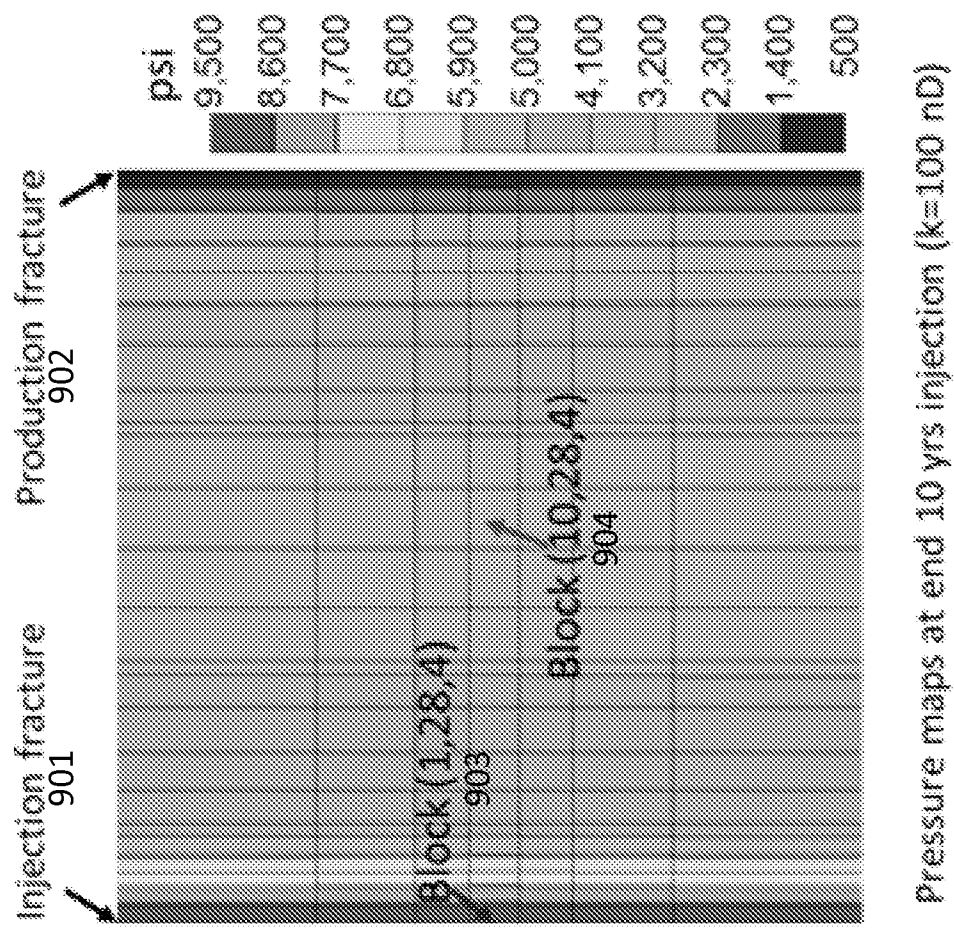


FIG. 9A

10/ 13

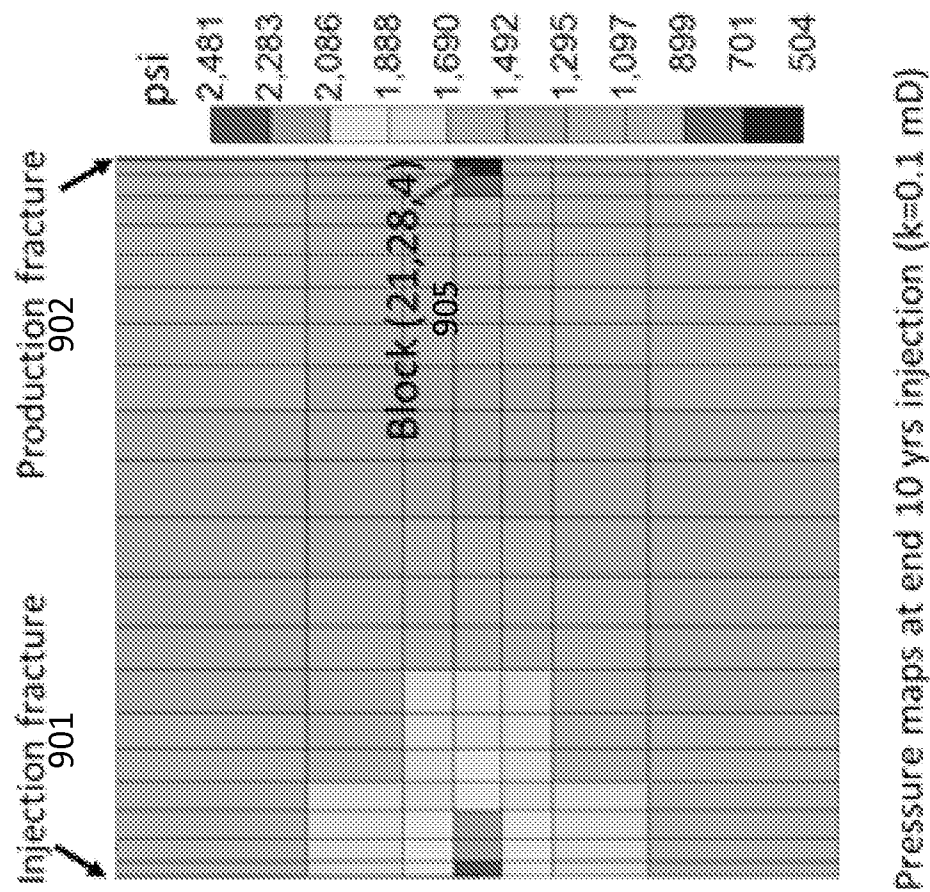


FIG. 9B

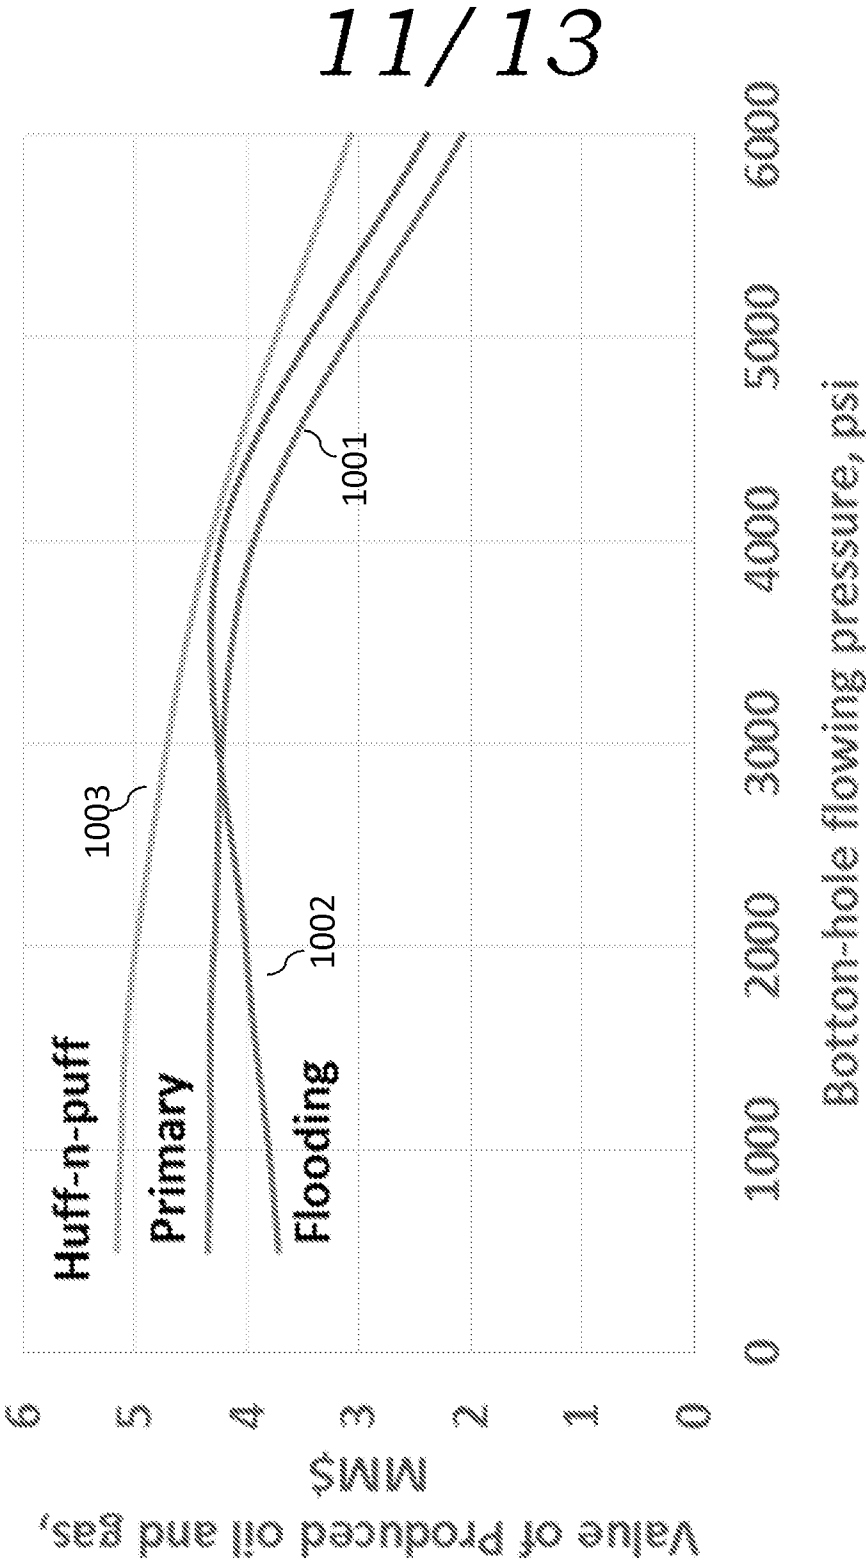


FIG. 10

12/13

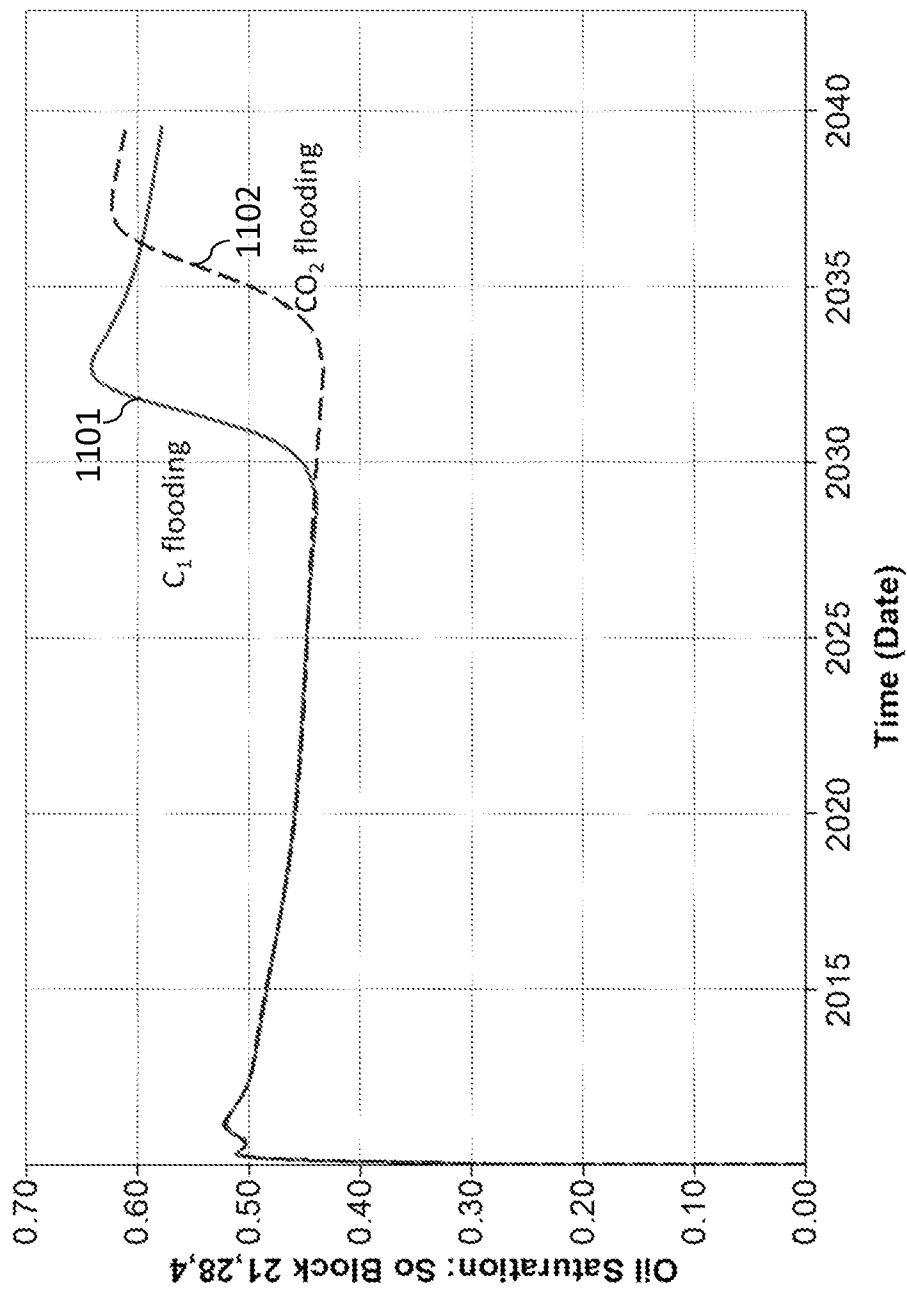


FIG. 11

13/13

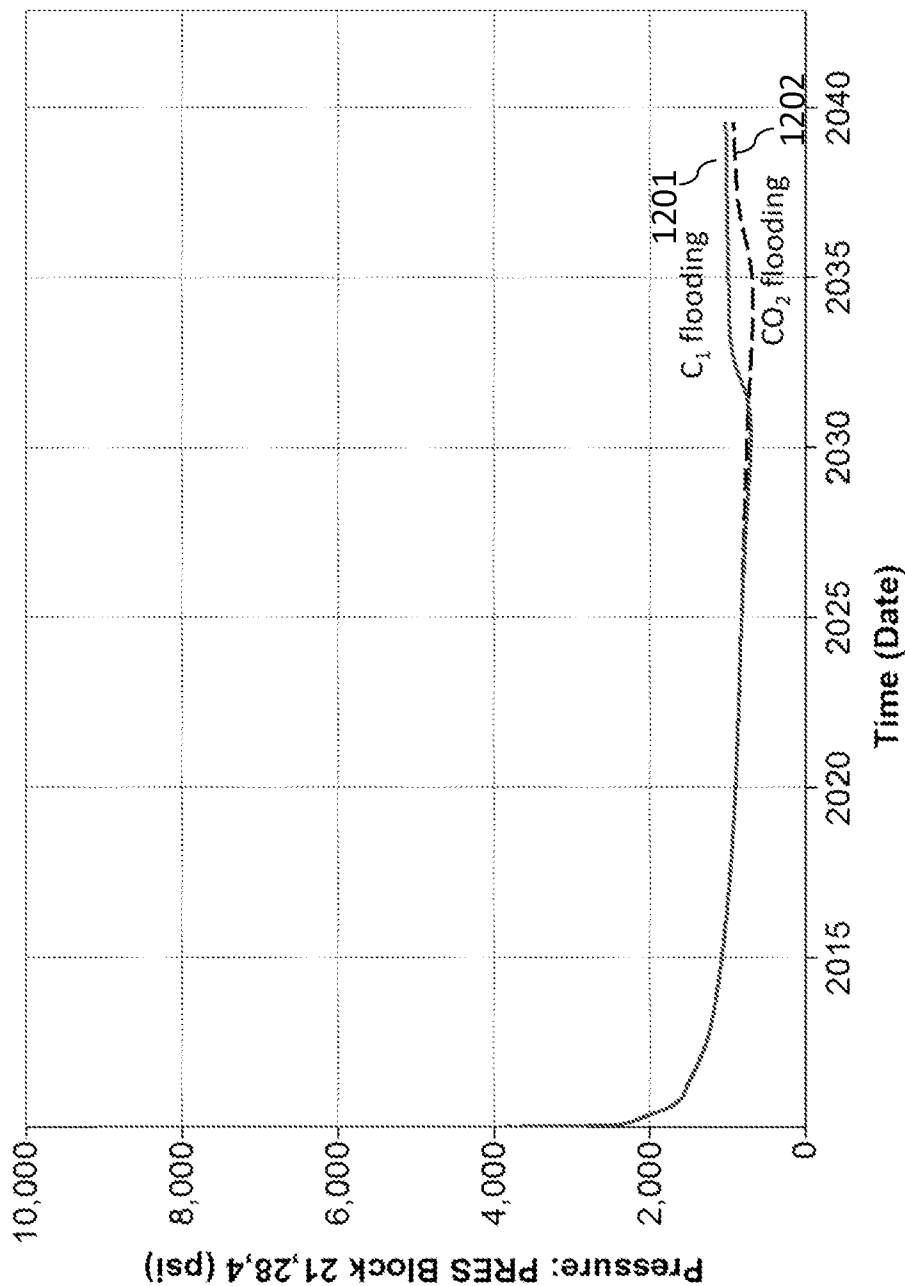


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/035349A. CLASSIFICATION OF SUBJECT MATTER
INV. E21B43/16 E21B43/25
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, TULSA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AL-WADHAHI ET AL: "Huff 'n puff to revaporize liquid dropout in an Omani gas field", JOURNAL OF PETROLEUM SCIENCE AND ENGINEERING, ELSEVIER, AMSTERDAM, NL, vol. 55, no. 1-2, 2 January 2007 (2007-01-02), pages 67-73, XP005819928, ISSN: 0920-4105, DOI: 10.1016/J.PETROL.2006.04.016 paragraphs [0001], [0002], [0003], [0004], [0005] figures 3,6,8 abstract -----	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 September 2015

Date of mailing of the international search report

15/09/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Altamura, Alessandra