(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
1 September 2016 (01.09.2016)

WIPO | PCT

(10) International Publication Number
WO 2016/137454 A1

(51) International Patent Classification:
F04D 13/08 (2006.01) *E21B 43/12* (2006.01)
F04D 13/10 (2006.01) *E21B 21/08* (2006.01)

(21) International Application Number:
PCT/US2015/017447

(22) International Filing Date:
25 February 2015 (25.02.2015)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032-3219 (US).

(72) Inventors: **OEHLER, Matthew Wade**; 25414 Cherry Ranch Dr., Katy, Texas 77494 (US). **EOFF, Larry Steven**; 22742 Adrift Row Lane, Porter, Texas 77365 (US).

(74) Agents: **KAISER, Iona** et al.; McDermott Will & Emery LLP, 500 North Capitol Street, N.W., Washington, District of Columbia 20001 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: MITIGATING WATER INCLUSION IN DOWNHOLE PUMPS

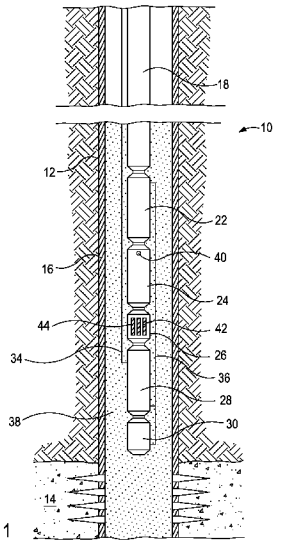


FIG. 1

(57) Abstract: Downhole pumps may include, at the inlet, a component that reduces the amount of water taken up by the pump. For example, a downhole assembly may include a tool string that includes a fluid pump, a fluid intake subassembly, a motor, and a downhole control system each coupled such that a fluid flowing into the fluid intake assembly is conveyed to the fluid pump; one or more inlets defined in the fluid intake subassembly; a flow line fluidly coupled to at least one of the one or more inlets and containing a filter component that contains a filter media at least partially coated with a relative permeability modifier (RPM), wherein the fluid flowing through the flow line contacts the RPM.

WO 2016/137454 A1

MITIGATING WATER INCLUSION IN DOWNHOLE PUMPS

BACKGROUND

[0001] The present disclosure relates to downhole pumps.

[0002] In some instances, the reservoir pressure of a subterranean formation may be insufficient to carry fluids from the formation up a wellbore to a wellhead at the surface during production operations. To overcome low reservoir pressure, various artificial lift techniques that increase fluid flow to the surface can be used. For example, artificial lift may be accomplished by positioning a pump in the wellbore. Numerous types of pumps have been employed for artificial lift operations including plunger lifts, sucker rod pumps, progressive cavity pumps, and electric submersible pumps.

[0003] However, pumps are indiscriminant in the fluid composition flowing therethrough. Consequently, the water in the fluid from the formation will be produced with the hydrocarbons. Water, because of its greater density relative to the hydrocarbons, increases the wear on the pump mechanics and potential corrosion of pump surfaces, thereby reducing pump lifetime.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] The following figures are included to illustrate certain aspects of the embodiments, and should not be viewed as exclusive embodiments. The subject matter disclosed is capable of considerable modifications, alterations, combinations, and equivalents in form and function, as will occur to those skilled in the art and having the benefit of this disclosure.

[0005] FIG. 1 is a schematic illustration of a submersible pump assembly positioned in a wellbore according to at least one embodiment described herein.

[0006] FIG. 2 is a schematic illustration of an exemplary filter component for use at the fluid intake portion of a submersible pump according to at least some embodiments described herein

[0007] FIG. 3 is a schematic illustration of a submersible pump assembly positioned in a wellbore according to at least one embodiment described herein.

[0008] FIG. 4 is an exemplary diagram of flow system that provides bypass of a filter component described herein.

DETAILED DESCRIPTION

[0009] The present disclosure relates to downhole pumps that include, at the inlet, a component that reduces the amount of water taken up by the pump. Reducing the water taken up by the pump may reduce the mechanical wear and surface corrosion of the pump, thereby increasing the operable lifetime of the pump. Further, reduction of water in the fluids produced downhole reduces need to separate the water and hydrocarbons at the surface, which can be a costly and time-consuming process.

[0010] FIG. 1 is a schematic illustration of a submersible pump assembly 10 positioned in a wellbore 12 penetrating a subterranean formation 14 according to at least one embodiment described herein. A casing 16 is secured within wellbore 12, and a tubing string 18 is disposed within the wellbore 12. The lower end of tubing string 18 includes various tools such as a fluid pump 22 coupled to a gas separator 24, which may be coupled to a fluid intake subassembly 26, which may be coupled to a motor 28, which may be coupled to a downhole control system 30. Even though the submersible pump assembly 10 has been described and depicted as having a particular array and structural configuration of components, it should be understood by those skilled in the art that other arrangements and configurations of the components having a greater or lesser degree of functionality could alternatively be used, without departing from the principles of the present disclosure. For example, the gas separator 24 eliminated for no-gas or low-gas wells.

[0011] In the illustrated embodiment, a cable assembly 34 extends from the surface to provide power to various components of the submersible pump assembly 10. A second cable assembly 36 is depicted as extending among various components of the submersible pump assembly 10 to provide communication therebetween. Even though two cable assemblies 34, 36 have been described and depicted, it should be understood by those skilled in the art that the required power and signal capability could alternatively be handled by a single cable assembly. Further, the locations of the connections may be altered from the illustrative example without departing from the teachings of the present application.

[0012] In operation, if artificial lift is required to convey fluid 38 from the formation 14 to the surface of wellbore 12, the submersible pump

assembly 10 may be lowered into wellbore 12 and placed in fluid communication with the fluid 38, as depicted in FIG. 1. Thereafter, electric power is supplied to the motor 28 via cable assembly 34. As the motor 28 rotates, the fluid enters the submersible pump assembly 10 at the fluid intake subassembly 26. The fluid 38 then passes through gas separator 24, which separates and discharges at least a portion of the gas fraction that may be present in the fluid 38 via one or more ports 40, for production to the surface, for example, in the annulus between casing 16 and tubing string 18. The remaining portion of the fluid 38 then enters the fluid pump 22, which sufficiently increases the pressure of the fluid 38 so it will flow to the surface within tubing string 18.

[0013] As discussed above, the lifetime of submersible pumps can be compromised when water is present in the fluid 38 from the subterranean formation 14. In the present disclosure, one or more filter components 42 may be coupled to one or more of the inlets 44 of the fluid intake subassembly 26. The filter components 42 may include a flow line containing a filter media at least partially coated with relative permeability modifiers (RPM), such that the fluid flowing through the flow path contacts and otherwise interacts with the RPM.

[0014] Without being limited by theory, it is believed that the RPMs may reduce the flow of water through the filter component 42 and, consequently, into the corresponding fluid pump 22. In some instances, RPMs are homopolymers or copolymers of hydrophilic monomers. In some instances, RPMs are copolymers of at least one hydrophobically modified hydrophilic monomer and at least one hydrophilic monomer. As used herein, the term "copolymer" is not limited to polymers comprising two types of monomeric units and, therefore, encompasses terpolymers, tetrapolymers, and the like. Further, the term "copolymer" encompasses any ordering of the two or more monomers include, but not limited to, random copolymers, alternating copolymers, block copolymer, graft copolymers, and the like.

[0015] The hydrophilic portion of the hydrophobically modified hydrophilic monomer and a hydrophilic monomer may be the same or may be different.

[0016] Examples of a hydrophilic monomer suitable for use as a hydrophilic monomer of the RPM or as the hydrophilic portion of a hydrophobically modified hydrophilic monomer of the RPM may include, but are

not limited to, acrylamide, 2-acrylamido-2-methyl propane sulfonic acid, N,N-dimethylacrylamide, vinyl pyrrolidone, acrylic acid, dimethylaminopropylmethacrylamide ("DMAPMA"), trimethylammoniumethyl methacrylate chloride, methacrylamide, hydroxyethyl acrylate, dimethylaminoethyl methacrylate ("DMEMA"), and the like.

[0017] The hydrophobic portion of a hydrophobically modified hydrophilic monomer of the RPM may be a C4-C22 alkyl. As used herein, the term "alkyl" refers to hydrocarbon groups that may be linear or branched and saturated or unsaturated. Examples of hydrophobically modified hydrophilic monomers of the RPM may include, but are not limited to, C4-C22 alkyl acrylamides, C4-C22 alkyl methacrylates, C4-C22 alkyl acrylamides, C4-C22 alkyl methacrylamides, C4-C22 alkyl dimethylammoniumethyl methacrylate halides, C4-C22 alkyl dimethylammonium-propylmethacrylamide halides, and the like.

[0018] By way of nonlimiting example, an RPM may be a copolymer of DMEMA and alkyl-DMEMA halide.

[0019] The relative amounts of the at least one hydrophobically modified hydrophilic monomer and at least one hydrophilic monomer in the RPM by weight of the RPM may range from about 10:90 to about 0.02:99.8.

[0020] The molecular weight of the RPM may range from about 250 kDaltons to about 3,000 kDaltons.

[0021] FIG. 2 is a schematic illustration of an exemplary filter component 100 for use at the fluid intake portion of a submersible pump, according to at least some embodiments described herein. The filter component 100 may be similar to or the same as the filter component 42 of FIG. 1, and therefore may be used in conjunction with the fluid pump 22 and otherwise coupled to inlets 44 of the fluid intake subassembly 26 of FIG. 1. As illustrated, the filter component 100 may include a flow line 102 that contains a filter media 110, which is illustrated as particles 104 that are at least partially coated with an RPM 106. The position of the filter media 110 may be maintained within the flow line 102 with membranes 108, which are fluid permeable. One skilled in the art would recognize the various configurations, if needed, for containing the various embodiments of RPM-coated materials in the flow path.

[0022] As used herein, the term "flow line" refers to a route through which a fluid is capable of being transported between two points. Exemplary flow

lines include, but are not limited to, a conduit, a hose, a tubing, a filter cartridge, and the like. It should be noted that the term "flow line" does not necessarily imply that a fluid is flowing therein, rather, that a fluid is capable of being transported or otherwise flowable therethrough.

[0023] Exemplary particles 104 suitable for use in conjunction with the filter components described herein may be formed of a material that includes, but is not limited to, sand, bauxite, ceramic materials, glass materials, polymer materials, polytetrafluoroethylene materials, nut shell pieces, cured resinous particulates comprising nut shell pieces, seed shell pieces, cured resinous particulates comprising seed shell pieces, fruit pit pieces, cured resinous particulates comprising fruit pit pieces, wood, composite particulates, and combinations thereof. Suitable composite particulates may comprise a binder and a filler material wherein suitable filler materials include silica, alumina, fumed carbon, carbon black, graphite, mica, titanium dioxide, meta-silicate, calcium silicate, kaolin, talc, zirconia, boron, fly ash, hollow glass microspheres, solid glass, and combinations thereof. The mean particulate size generally may range from about 2 mesh to about 400 mesh or less on the U.S. Sieve Series.

[0024] In some instances, the RPM may be a coating on a plurality of fibers rather than particles. In some instances, the RPM-coated fibers may be arranged as a nonwoven material (*e.g.*, formed by RPM-coated melt blown fibers or RPM-coated staple fibers) that is secured in a flow line. In some instances, the RPM-coated fibers may be aggregated or woven in a rope-like configuration and contained in a tubular or other elongated flow line where fluid flows along the length of the RPM-coated fibers. In some instances, the fibers may be RPM-coated staple fibers and packed into a flow line to form the filter component.

[0025] Exemplary fibers suitable for use in conjunction with the filter components described herein may be formed of a material that includes, but is not limited to, ceramic materials, glass materials, polymer materials, carbon, and combinations thereof.

[0026] In some instances, RPM-coated fibers and RPM-coated particles may be used in combination.

[0027] In some instances, the filter media 110 may be a porous media with at least a portion of the surface coated with RPM. Examples of

porous media may include, but are not limited to, open cell foamed polymers, porous minerals (*e.g.*, pumicite), and the like.

[0028] The filter media 110 may be designed (*e.g.*, particle size, fiber diameter, open cell size, and the like) such that the RPM-coated filter media 110 has a permeability for oil of greater than about 1 Darcy (*e.g.*, about 1 Darcy to about 1000 Darcy, including any subset therebetween). Further, the permeability of water may be 0.5 times or less the permeability of oil (*e.g.*, about 0.5 to about 0.001 times the permeability of oil). Permeability may be measured using a Hassler sleeve in which the RPM-coated filter media 110 is contained with 1500 psi confinement pressure. The oil (kerosene) or water (2% KCl solution) may then be injected into the system at a given pressure, and the permeability may be calculated according to known equations for calculating permeability.

[0029] The use of the filter component with an RPM-coated filter media therein may be preferably implemented in a subterranean formation with a sufficient flow capacity (*e.g.*, from natural permeability or from water injection), such that the water that does not flow into the fluid pump subassembly because of exclusion by the filter component could readily flow into and out of the formation. Water flow in and out of the formation may allow for the fluid at the filter component to maintain a sufficiently high hydrocarbon concentration that the filter component has sufficient fluid flow from the hydrocarbon component of the fluid.

[0030] FIG. 3 is a schematic illustration of a submersible pump assembly 210 positioned in a wellbore 212 penetrating a subterranean formation 214 according to at least one embodiment described herein. A casing 216 is secured within wellbore 212. Similar to the submersible pump assembly 10 of FIG. 1, a tubing string 218 is disposed within the wellbore 212. The lower end of tubing string 218 includes various coupled tools such as a fluid pump 222, a gas separator 224, a fluid intake subassembly 226 with filter components 244 described herein as coupled to at least some of the inlets 242, a motor 228, a downhole control system 230, and a sensor subassembly 232. A cable assembly 234 extends from the surface to provide power to various components of the submersible pump assembly 210 and communication between the various components and the surface. A second cable assembly 236 is depicted as

extending among various components of the submersible pump assembly 210 to provide communication therebetween.

[0031] In embodiments alternate to that illustrated in FIG. 3, the sensor subassembly 232 may be located elsewhere along the submersible pump assembly 210, for example, between the fluid pump 222 and the tubing string 218.

[0032] In some instances, the hydrocarbon and/or water concentration in the fluid 238 may be monitored by the sensor subassembly 232. When the hydrocarbon concentration becomes too low or the water concentration becomes too high, a flow line not coupled to a filter component described herein may be opened and used as a bypass to allow the fluid 228 to flow to the fluid pump 222 without passing through the filter components 244. As illustrated, the bypass is an intake inlet 246 not coupled to a filter component and configured to open and close (*e.g.*, by a valve or the like) as needed to provide for bypass flow or not, respectively. The ability to utilize bypass flow may mitigate extra mechanical stresses on the fluid pump 222 from insufficient inlet flow due to high water concentrations, which effectively plugs the inlets 242 coupled to the filter components 244 described herein.

[0033] Actuation of the bypasses may be initiated downhole (*e.g.*, by the downhole control system 230 as communicated via the second cable assembly 236) or by an operator at the surface (*e.g.*, via the cable assembly 234). For example, a sensor 250 included in the sensor subassembly 232 may produce at least one output signal 252 corresponding to a concentration of water, a concentration of hydrocarbon, or both in the fluid 238. The output signal 252 may be conveyed to a signal processor 248, which is illustrated as a component of the downhole control system 230 where the output signal 252 is conveyed via the second cable assembly 236. In alternate embodiments, the signal processor 248 may be a component of the fluid intake subassembly 226 where the output signal 252 may alternatively be conveyed via the second cable assembly 236. In yet other embodiments, the signal processor 248 may alternatively be positioned within the sensor subassembly 232.

[0034] The signal processor 248 may be configured to determine an appropriate fluid flow configuration of the fluid intake subassembly 226 (*i.e.*, through one or both of the inlets 242, 246) based on the hydrocarbon and/or water concentration and to produce an output signal 254 corresponding to the

fluid flow configuration. As illustrated, the output signal 254 from the signal processor 248 may be conveyed to the fluid intake subassembly 226 to control the valves and other components of the fluid intake subassembly 226 that provide for the fluid flow configuration corresponding to the output signal 254.

[0035] In alternate embodiments, the output signal 252 corresponding to the water and/or hydrocarbon concentration may be conveyed to the surface via the cable assembly 234 for an operator or other control system (*e.g.*, a computer with a processor) to determine the appropriate fluid flow configuration of the fluid intake subassembly 226. An appropriate fluid flow configuration may then be conveyed to the downhole control system 230 via the cable assembly 234 and, ultimately, the fluid intake subassembly 226 via the second cable assembly 236.

[0036] A processor may be configured to execute one or more sequences of instructions, programming stances, or code stored on a non-transitory, computer-readable medium. The processor can be, for example, a general purpose microprocessor, a microcontroller, a digital signal processor, an application specific integrated circuit, a field programmable gate array, a programmable logic device, a controller, a state machine, a gated logic, discrete hardware components, an artificial neural network, or any like suitable entity that can perform calculations or other manipulations of data. In some embodiments, computer hardware can further include elements such as, for example, a memory (*e.g.*, random access memory (RAM), flash memory, read only memory (ROM), programmable read only memory (PROM), erasable programmable read only memory (EPROM)), registers, hard disks, removable disks, CD-ROMS, DVDs, or any other like suitable storage device or medium.

[0037] Executable sequences described herein can be implemented with one or more sequences of code contained in a memory. In some embodiments, such code can be read into the memory from another machine-readable medium. Execution of the sequences of instructions contained in the memory can cause a processor to perform the process steps described herein. One or more processors in a multi-processing arrangement can also be employed to execute instruction sequences in the memory. In addition, hard-wired circuitry can be used in place of or in combination with software instructions to implement various embodiments described herein. Thus, the

present embodiments are not limited to any specific combination of hardware and/or software.

[0038] As used herein, a machine-readable medium will refer to any medium that directly or indirectly provides instructions to a processor for execution. A machine-readable medium can take on many forms including, for example, non-volatile media, volatile media, and transmission media. Non-volatile media can include, for example, optical and magnetic disks. Volatile media can include, for example, dynamic memory. Transmission media can include, for example, coaxial cables, wire, fiber optics, and wires that form a bus. Common forms of machine-readable media can include, for example, floppy disks, flexible disks, hard disks, magnetic tapes, other like magnetic media, CD-ROMs, DVDs, other like optical media, punch cards, paper tapes and like physical media with patterned holes, RAM, ROM, PROM, EPROM, and flash EPROM.

[0039] Those skilled in the art should recognize other mechanisms and configurations to provide for bypass flow in addition to or in place of flow through the filter components 244. For example, FIG. 4 provides an exemplary diagram of a flow system 300 that provides bypass of a filter component 302 described herein. The flow system 300 includes a flow line 304 with a valve 308 positioned downstream from an inlet 306. In some embodiments, the inlet 306 may comprise an inlet of one of the fluid intake subassemblies 10, 210 of FIGS. 1 and 3, respectively. In operation, the valve 308 may selectively direct fluid flow represented by arrows A in the flow line 304. In some cases, for example, the valve 308 may actuate to direct fluid flow A to a flow line 310 that includes a filter component 302. In other cases, the valve 308 may actuate to direct fluid flow A to a bypass flow line 312 that does not include a filter component. In yet other embodiments, the valve 308 may actuate to direct a fraction of the fluid flow A in both flow lines 310, 312 simultaneously. The fluid flow A from the flow line 310 and the bypass flow line 312 may then proceed to the gas separator and the fluid pump (not shown).

[0040] Accordingly, the valve 308 may be actuated and otherwise positioned to provide for fluid flow according to one of (1) flow through the flow line 310 and the filter component 302 and no flow through the bypass flow line 312, (2) no flow through the flow line 310 and the filter component 302 and flow through the bypass flow line 312, or (3) flow through the flow line 310 and the filter component 302 and flow through the bypass flow line 312.

[0041] Even though FIGS. 1 and 3 depict a vertical wellbore, it should be understood by those skilled in the art that the present disclosure is equally well suited for use in wellbores having other directional configurations including horizontal wellbores, deviated wellbores, slanted wells, lateral wells and the like. Accordingly, it should be understood by those skilled in the art that the use of directional terms such as above, below, upper, lower, upward, downward, uphole, downhole and the like are used in relation to the illustrative embodiments as they are depicted in the figures, the upward direction being toward the top of the corresponding figure and the downward direction being toward the bottom of the corresponding figure, the uphole direction being toward the surface of the well and the downhole direction being toward the toe of the well.

[0042] Embodiments disclosed herein include, but are not limited to, Embodiment A, Embodiment B, and Embodiment C.

[0043] Embodiment A is a downhole assembly that includes a tool string that includes a fluid pump, a fluid intake subassembly, a motor, and a downhole control system each coupled such that a fluid flowing into the fluid intake assembly is conveyed to the fluid pump; one or more inlets defined in the fluid intake subassembly; a flow line fluidly coupled to at least one of the one or more inlets and containing a filter component that contains a filter media at least partially coated with a RPM, wherein the fluid flowing through the flow line contacts the RPM.

[0044] Embodiment A may have one or more of the following additional elements in any combination: Element A1: wherein the tool string further includes a gas separator and the fluid flowing into the fluid intake assembly is conveyed to the gas separator and then the fluid pump; Element A2: wherein the filter media has an oil permeability of about 1 Darcy or greater and a water permeability of about 0.5 times or less the oil permeability; Element A3: wherein the filter media comprises particulates; Element A4: wherein the filter media comprises fibers; Element A5: wherein the filter media comprises an open cell foam; Element A6: wherein the RPM comprises a copolymer of at least one hydrophobically modified hydrophilic monomer and at least one hydrophilic monomer; Element A7: wherein the RPM comprises a homopolymer of a hydrophilic monomer; and Element A8: wherein the RPM comprises a copolymer of two or more hydrophilic monomers.

[0045] By way of non-limiting example, exemplary combinations applicable to Embodiment A include: Element A1 in combination with one or more of Elements A2-A8; Element A2 in combination with one or more of Elements A3-A8; Element A3 in combination with Element A4 and optionally one or more of Elements A6-A8; Element A5 in combination with one or more of Elements A6-A8; and two or more of Elements A6-A8 in combination.

[0046] Embodiment B is a downhole assembly that includes a tool string that includes a fluid pump, a gas separator, a fluid intake subassembly, a motor, a downhole control system, and a sensor subassembly each coupled such that a fluid flowing into the fluid intake assembly is conveyed to the gas separator and then the fluid pump; one or more inlets defined in the fluid intake subassembly; a flow line fluidly coupled to at least one of the one or more inlets and containing a filter component that contains a filter media at least partially coated with a relative permeability modifier (RPM), such that the fluid flowing through the flow line contacts the RPM; a bypass flow line fluidly coupled to the flow line and not containing the filter component; and at least one valve positioned in the flow line to selectively direct the fluid through one or both of the bypass flow line and the filter component.

[0047] Embodiment B may have one or more of the following additional elements in any combination: Element B1: the downhole assembly further including a cable assembly that communicably couples the fluid intake assembly, the downhole control system, and the sensor subassembly, wherein the sensor produces a first output signal corresponding to a hydrocarbon concentration, a water concentration, or both that is received by a processor in the downhole control system via the cable assembly, and wherein the processor is programmed to determine a fluid flow configuration for the fluid intake assembly, produce a second output signal corresponding thereto, and transmit the second output signal to the fluid intake assembly via the cable assembly; Element B2: wherein the filter media has an oil permeability of about 1 Darcy or greater and a water permeability of about 0.5 times or less the oil permeability; Element B3: wherein the filter media comprises particulates; Element B4: wherein the filter media comprises fibers; Element B5: wherein the filter media comprises an open cell foam; Element B6: wherein the RPM comprises a copolymer of at least one hydrophobically modified hydrophilic monomer and at least one hydrophilic monomer; Element B7: wherein the RPM comprises a

homopolymer of a hydrophilic monomer; and Element B8: wherein the RPM comprises a copolymer of two or more hydrophilic monomers.

[0048] By way of non-limiting example, exemplary combinations applicable to Embodiment B include: Element B1 in combination with one or more of Elements B2-B8; Element B2 in combination with one or more of Elements B3-B8; Element B3 in combination with Element B4 and optionally one or more of Elements B6-B8; Element B5 in combination with one or more of Elements B6-B8; and two or more of Elements B6-B8 in combination.

[0049] Embodiment C is a method that includes measuring a hydrocarbon concentration, a water concentration, or both of a fluid contained in a wellbore with a sensor that is coupled to a sensor subassembly of a tool string, the tool sting including a fluid pump, a gas separator, a fluid intake subassembly, a motor, a downhole control system, and a sensor subassembly each coupled such that a fluid flowing into the fluid intake assembly is conveyed to the gas separator and then the fluid pump, one or more inlets defined in the fluid intake subassembly; a flow line fluidly coupled to at least one of the one or more inlets and containing a filter component that contains a filter media at least partially coated with a relative permeability modifier (RPM), such that the fluid flowing through the flow line contacts the RPM; a bypass flow line fluidly coupled to the flow line and not containing the filter component; and at least one valve positioned in the flow line to selectively direct the fluid through one or both of the bypass flow line and the filter component; and actuating the at least one valve to provide for a fluid flow configuration through the fluid intake subassembly based on the hydrocarbon concentration, the water concentration, or both, the fluid flow configurations being: (1) fluid flow through the flow line and no fluid flow through the bypass flow line; (2) no fluid flow through the flow line and fluid flow through the bypass flow line; or (3) fluid flow through the flow line and fluid flow through the bypass flow line.

[0050] Embodiment C may have one or more of the following additional elements in any combination: Element C1: wherein the filter media has an oil permeability of about 1 Darcy or greater and a water permeability of about 0.5 times or less the oil permeability; Element C2: wherein the filter media comprises particulates; Element C3: wherein the filter media comprises fibers; Element C4: wherein the filter media comprises an open cell foam; Element C5: wherein the RPM comprises a copolymer of at least one

hydrophobically modified hydrophilic monomer and at least one hydrophilic monomer; Element C6: wherein the RPM comprises a homopolymer of a hydrophilic monomer; and Element C7: wherein the RPM comprises a copolymer of two or more hydrophilic monomers.

[0051] By way of non-limiting example, exemplary combinations applicable to Embodiment C include: Element C1 in combination with one or more of Elements C2-C7; Element C2 in combination with Element C3 and optionally one or more of Elements C5-C7; Element C4 in combination with one or more of Elements C5-C7; and two or more of Elements C5-C7 in combination.

[0052] Unless otherwise indicated, all numbers expressing quantities of ingredients, properties such as molecular weight, reaction conditions, and so forth used in the present specification and associated claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the following specification and attached claims are approximations that may vary depending upon the desired properties sought to be obtained by the embodiments of the present disclosure. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claim, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding techniques.

[0053] One or more illustrative embodiments incorporating the disclosure embodiments disclosed herein are presented herein. Not all features of a physical implementation are described or shown in this application for the sake of clarity. It is understood that in the development of a physical embodiment incorporating the embodiments of the present disclosure, numerous implementation-specific decisions must be made to achieve the developer's goals, such as compliance with system-related, business-related, government-related and other constraints, which vary by implementation and from time to time. While a developer's efforts might be time-consuming, such efforts would be, nevertheless, a routine undertaking for those of ordinary skill the art and having benefit of this disclosure.

[0054] While compositions and methods are described herein in terms of "comprising" various components or steps, the compositions and methods can also "consist essentially of" or "consist of" the various components and steps.

[0055] To facilitate a better understanding of the embodiments of the present disclosure, the following examples of preferred or representative embodiments are given. In no way should the following examples be read to limit, or to define, the scope of the disclosure.

EXAMPLES

[0056] To illustrate the efficacy of RPM described herein to mitigating water flow and allowing oil flow, an Oklahoma #1 sand coated with a copolymer of DMEMA and alkyl-DMEMA halide (*i.e.*, the RPM) was used to pack a column. Columns with uncoated Oklahoma #1 sand were used as a control. Through the uncoated sand column, brine (2% KCl solution) permeability was 122,000 mDarcy (mD), and oil permeability was 6472 mD. Through the coated sand columns, the brine permeability dropped over 350 times to 34 mD, while the oil permeability was substantially the same at 6815 mD. This illustrates that water preferentially does not flow through filter media coated with RPM described herein.

[0057] Therefore, the present disclosure is well adapted to attain the ends and advantages mentioned as well as those that are inherent therein. The particular embodiments disclosed above are illustrative only, as the present disclosure may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is therefore evident that the particular illustrative embodiments disclosed above may be altered, combined, or modified and all such variations are considered within the scope and spirit of the present disclosure. The disclosure illustratively disclosed herein suitably may be practiced in the absence of any element that is not specifically disclosed herein and/or any optional element disclosed herein. While compositions and methods are described in terms of "comprising," "containing," or "including" various components or steps, the compositions and methods can also "consist essentially of" or "consist of" the various components and steps. All numbers and ranges disclosed above may vary by some amount. Whenever a numerical range with a lower limit and an upper limit is disclosed, any number and any included range falling within the range is specifically disclosed. In particular, every range of values (of the form, "from about a to about b," or,

equivalently, "from approximately a to b," or, equivalently, "from approximately a-b") disclosed herein is to be understood to set forth every number and range encompassed within the broader range of values. Also, the terms in the claims have their plain, ordinary meaning unless otherwise explicitly and clearly defined by the patentee. Moreover, the indefinite articles "a" or "an," as used in the claims, are defined herein to mean one or more than one of the element that it introduces.

CLAIMS

The invention claimed is:

1. A downhole assembly comprising:

a tool string that includes a fluid pump, a fluid intake subassembly, a motor, and a downhole control system each coupled such that a fluid flowing into the fluid intake assembly is conveyed to the fluid pump;

one or more inlets defined in the fluid intake subassembly;

a flow line fluidly coupled to at least one of the one or more inlets and containing a filter component that contains a filter media at least partially coated with a relative permeability modifier (RPM), wherein the fluid flowing through the flow line contacts the RPM.

2. The downhole assembly of claim 1, wherein the tool string further includes a gas separator and the fluid flowing into the fluid intake assembly is conveyed to the gas separator and then the fluid pump.

3. The downhole assembly of claim 1, wherein the filter media has an oil permeability of about 1 Darcy or greater and a water permeability of about 0.5 times or less the oil permeability.

4. The downhole assembly of claim 1, wherein the filter media comprises particulates.

5. The downhole assembly of claim 1, wherein the filter media comprises fibers.

6. The downhole assembly of claim 1, wherein the filter media comprises an open cell foam.

7. The downhole assembly of claim 1, wherein the RPM comprises a copolymer of at least one hydrophobically modified hydrophilic monomer and at least one hydrophilic monomer.

8. The downhole assembly of claim 1, wherein the RPM comprises a homopolymer of a hydrophilic monomer.

9. The downhole assembly of claim 1, wherein the RPM comprises a copolymer of two or more hydrophilic monomers.

10. A downhole assembly comprising:

a tool string that includes a fluid pump, a gas separator, a fluid intake subassembly, a motor, a downhole control system, and a sensor subassembly each coupled such that a fluid flowing into the fluid intake assembly is conveyed to the gas separator and then the fluid pump;

one or more inlets defined in the fluid intake subassembly;

a flow line fluidly coupled to at least one of the one or more inlets and containing a filter component that contains a filter media at least partially coated with a relative permeability modifier (RPM), such that the fluid flowing through the flow line contacts the RPM;

a bypass flow line fluidly coupled to the flow line and not containing the filter component; and

at least one valve positioned in the flow line to selectively direct the fluid through one or both of the bypass flow line and the filter component.

11. The downhole assembly of claim 10 further comprising:

a cable assembly that communicably couples the fluid intake assembly, the downhole control system, and the sensor subassembly, wherein the sensor produces a first output signal corresponding to a hydrocarbon concentration, a water concentration, or both that is received by a processor in the downhole control system via the cable assembly, and wherein the processor is programmed to determine a fluid flow configuration for the fluid intake assembly, produce a second output signal corresponding thereto, and transmit the second output signal to the fluid intake assembly via the cable assembly.

12. The downhole assembly of claim 10, wherein the filter media has an oil permeability of about 1 Darcy or greater and a water permeability of about 0.5 times or less the oil permeability.

13. The downhole assembly of claim 10, wherein the filter media comprises particulates.

14. The downhole assembly of claim 10, wherein the filter media comprises fibers.

15. The downhole assembly of claim 10, wherein the filter media comprises an open cell foam.

16. A method comprising:

measuring a hydrocarbon concentration, a water concentration, or both of a fluid contained in a wellbore with a sensor that is coupled to a sensor subassembly of a tool string, the tool sting including a fluid pump, a gas separator, a fluid intake subassembly, a motor, a downhole control system, and a sensor subassembly each coupled such that a fluid flowing into the fluid intake assembly is conveyed to the gas separator and then the fluid pump, one or more inlets defined in the fluid intake subassembly; a flow line fluidly coupled to at

least one of the one or more inlets and containing a filter component that contains a filter media at least partially coated with a relative permeability modifier (RPM), such that the fluid flowing through the flow line contacts the RPM; a bypass flow line fluidly coupled to the flow line and not containing the filter component; and at least one valve positioned in the flow line to selectively direct the fluid through one or both of the bypass flow line and the filter component; and

actuating the at least one valve to provide for a fluid flow configuration through the fluid intake subassembly based on the hydrocarbon concentration, the water concentration, or both, the fluid flow configurations being: (1) fluid flow through the flow line and no fluid flow through the bypass flow line; (2) no fluid flow through the flow line and fluid flow through the bypass flow line; or (3) fluid flow through the flow line and fluid flow through the bypass flow line.

17. The method of claim 16, wherein the filter media has an oil permeability of about 1 Darcy or greater and a water permeability of about 0.5 times or less the oil permeability.

18. The method of claim 16, wherein the filter media comprises particulates.

19. The method of claim 16, wherein the filter media comprises fibers.

20. The method of claim 16, wherein the filter media comprises an open cell foam.

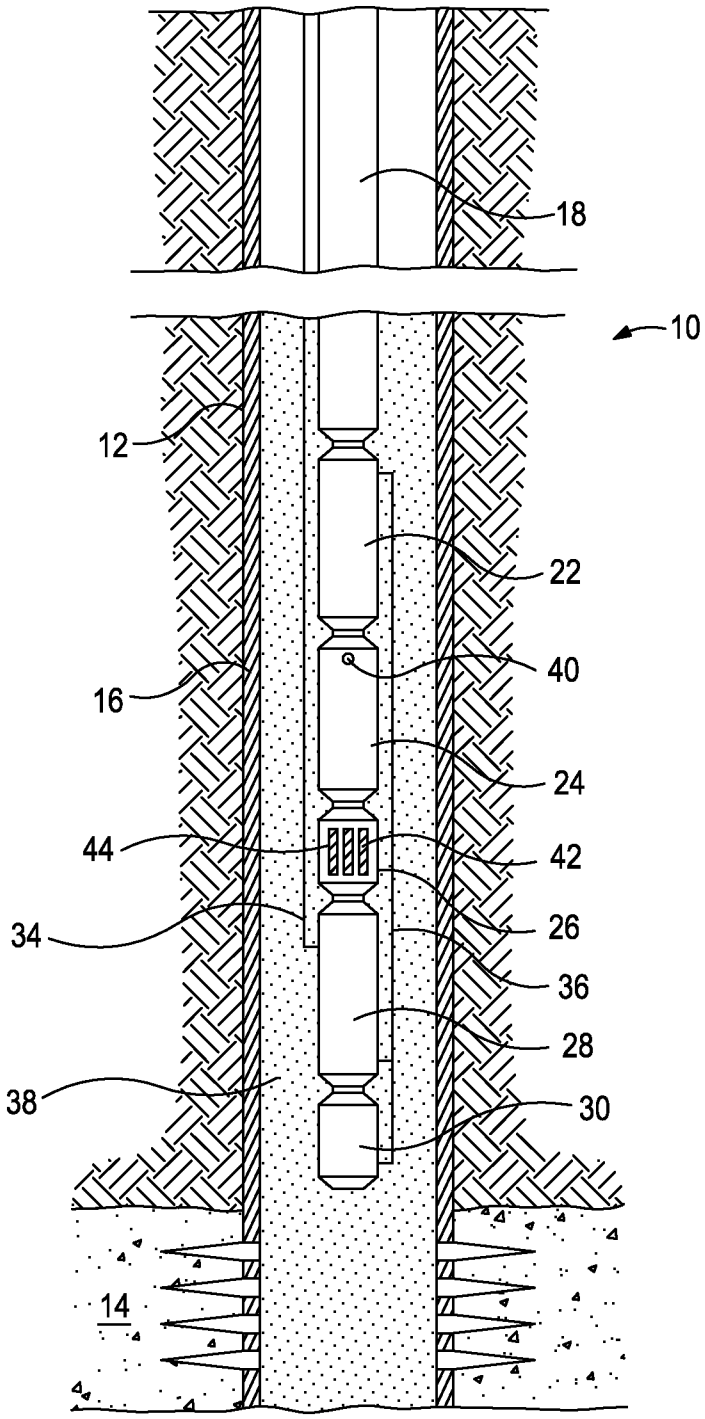


FIG. 1

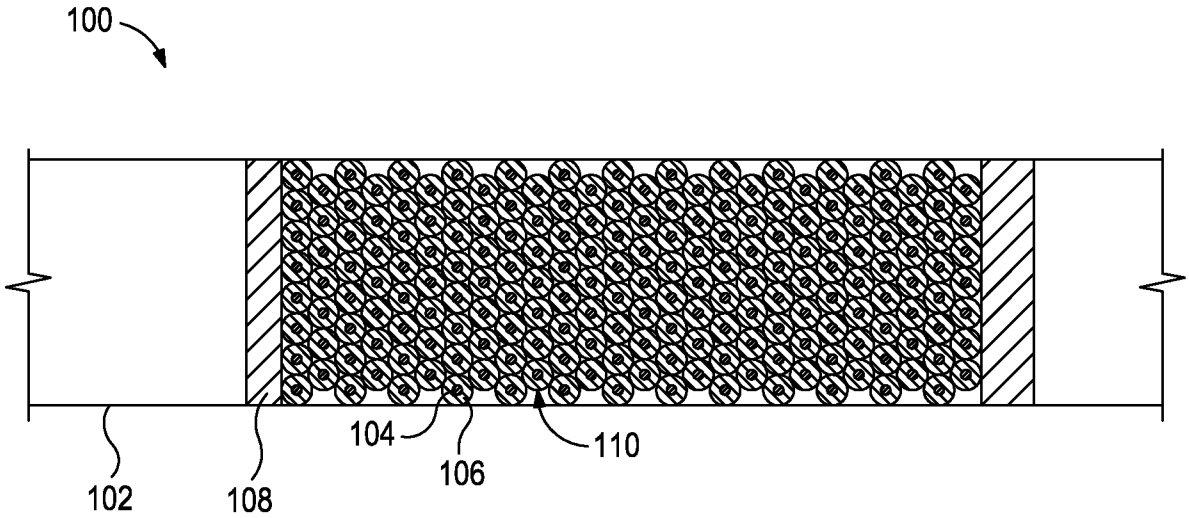


FIG. 2

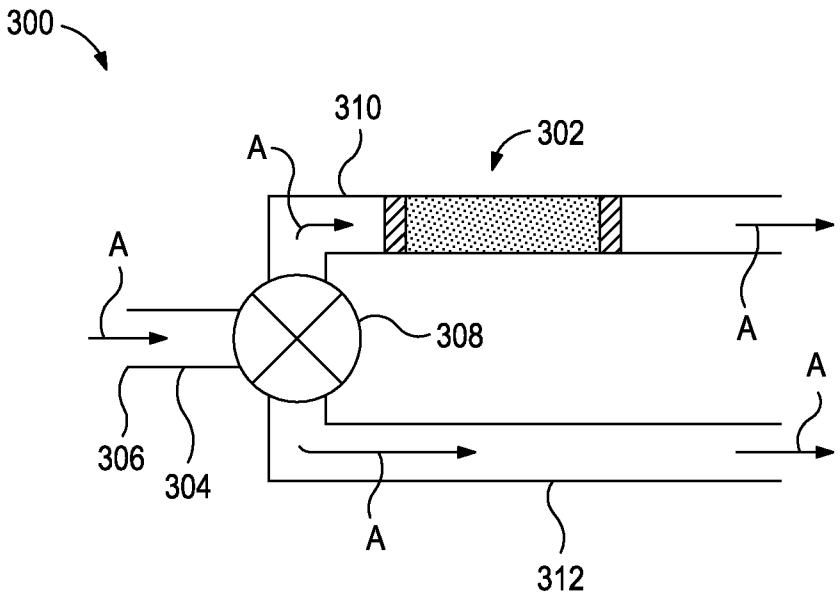


FIG. 4

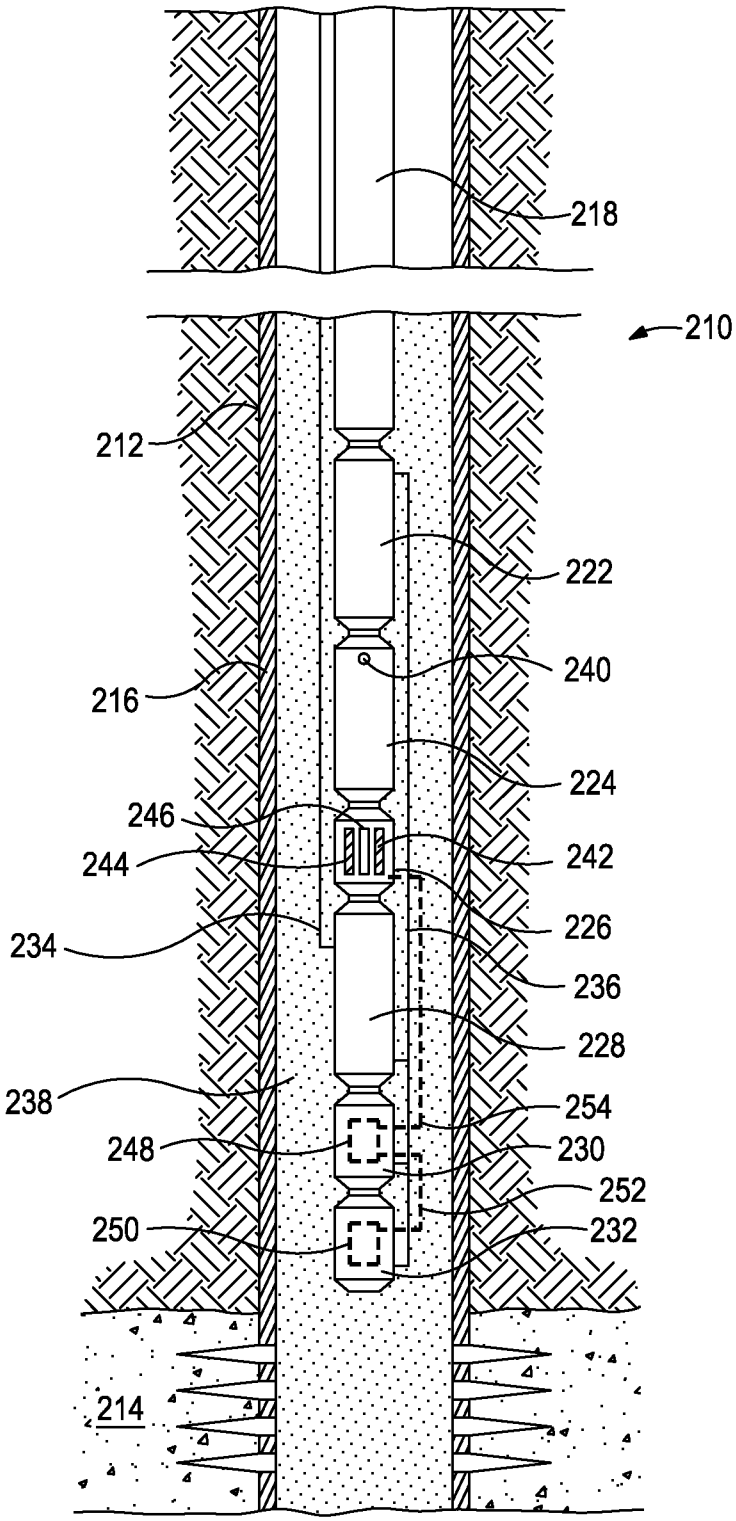

218
210
212
222
240
216
224
246
242
244
226
234
236
228
238
254
248
230
252
250
232
214

FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/017447

A. CLASSIFICATION OF SUBJECT MATTER

F04D 13/08(2006.01)i, F04D 13/10(2006.01)i, E21B 43/12(2006.01)i, E21B 21/08(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F04D 13/08; E21B 43/34; E21B 43/00; E21B 47/12; E21B 33/13; E21B 49/08; E21B 43/08; E21B 43/38; F04D 13/10; E21B 43/12; E21B 21/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & keywords: downhole assembly, pump, fluid intake subassembly, motor, downhole control system, inlet, filter media, and relative permeability modifier

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014-0352953 A1 (HALLIBURTON ENERGY SERVICES, INC.) 04 December 2014 See paragraphs [0024]-[0026] and figure 1.	1-9
A		10-20
Y	US 2007-0012444 A1 (HORGAN et al.) 18 January 2007 See abstract, paragraph [0035], claims 1, 4, and figures 1-6.	1-9
A	US 6015011 A (HUNTER, CLIFFORD WAYNE) 18 January 2000 See abstract, column 2, line 35 - column 5, line 13, and figures 1-5.	1-20
A	US 7823635 B2 (WRIGHT et al.) 02 November 2010 See column 2, line 22 - column 7, line 18 and figures 1-5.	1-20
A	US 7918272 B2 (GAUDETTE et al.) 05 April 2011 See column 3, line 12 - column 6, line 43 and figures 1-5.	1-20

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
25 November 2015 (25.11.2015)	**25 November 2015 (25.11.2015)**

Name and mailing address of the ISA/KR
International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea
Facsimile No. +82-42-472-7140

Authorized officer
LEE, Chang Ho
Telephone No. +82-42-481-8398

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/017447

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014-0352953 A1	04/12/2014	WO 2014-196955 A1	11/12/2014
US 2007-0012444 A1	18/01/2007	None	
US 6015011 A	18/01/2000	None	
US 7823635 B2	02/11/2010	US 2006-037746 A1	23/02/2006
US 7918272 B2	05/04/2011	AU 2008-312545 A1	23/04/2009
		AU 2010-232846 A1	07/10/2010
		AU 2010-232846 B2	19/02/2015
		BR PI0817825 A2	31/03/2015
		CA 2668983 A1	19/12/2009
		CA 2668983 C	03/12/2013
		CA 2675191 A1	15/02/2010
		CA 2675191 C	29/05/2012
		CA 2701801 A1	23/04/2009
		CA 2730228 A1	14/01/2010
		CN 101828002 A	08/09/2010
		CN 102369337 A	07/03/2012
		EA 201000606 A1	29/10/2010
		EP 2414621 A2	08/02/2012
		GB 201006019 D0	26/05/2010
		GB 2468217 A	01/09/2010
		GB 2468217 B	02/03/2011
		GB 2474174 A	06/04/2011
		MX 2010004215 A	05/05/2010
		NO 20100677 A	15/07/2010
		US 2009-0101330 A1	23/04/2009
		US 2009-0101335 A1	23/04/2009
		US 2009-0101342 A1	23/04/2009
		US 2009-0101349 A1	23/04/2009
		US 2009-0101356 A1	23/04/2009
		US 2009-0101357 A1	23/04/2009
		US 2009-0101360 A1	23/04/2009
		US 2009-0205834 A1	20/08/2009
		US 2009-0283255 A1	19/11/2009
		US 2009-0283256 A1	19/11/2009
		US 2009-0283262 A1	19/11/2009
		US 2009-0283263 A1	19/11/2009
		US 2009-0283264 A1	19/11/2009
		US 2009-0283267 A1	19/11/2009
		US 2009-0283268 A1	19/11/2009
		US 2009-0283270 A1	19/11/2009
		US 2009-0283271 A1	19/11/2009
		US 2009-0283272 A1	19/11/2009
		US 2009-0283278 A1	19/11/2009
		US 2009-0284260 A1	19/11/2009
		US 2011-0056680 A1	10/03/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/017447

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2011-0056688 A1	10/03/2011
		US 7775271 B2	17/08/2010
		US 7775277 B2	17/08/2010
		US 7784543 B2	31/08/2010
		US 7789139 B2	07/09/2010
		US 7789151 B2	07/09/2010
		US 7789152 B2	07/09/2010
		US 7793714 B2	14/09/2010
		US 7814974 B2	19/10/2010
		US 7819190 B2	26/10/2010
		US 7913755 B2	29/03/2011
		US 7931081 B2	26/04/2011
		US 8069919 B2	06/12/2011
		US 8069921 B2	06/12/2011
		US 8113292 B2	14/02/2012
		US 8151875 B2	10/04/2012
		US 8159226 B2	17/04/2012
		US 8171999 B2	08/05/2012
		US 8555958 B2	15/10/2013
		US 8776881 B2	15/07/2014
		WO 2009-052149 A2	23/04/2009
		WO 2009-052149 A3	09/07/2009
		WO 2009-140004 A2	19/11/2009
		WO 2009-158327 A3	01/04/2010
		WO 2010-005883 A2	14/01/2010
		WO 2010-005883 A3	06/05/2010
		WO 2010-114741 A2	07/10/2010
		WO 2010-114741 A3	13/01/2011