



(43) International Publication Date
2 October 2014 (02.10.2014)

(51) International Patent Classification:
H02J 7/00 (2006.01)

(21) International Application Number:
PCT/US2014/011420

(22) International Filing Date:
14 January 2014 (14.01.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/785,115 14 March 2013 (14.03.2013) US
13/927,811 26 June 2013 (26.06.2013) US

(71) Applicant (for all designated States except US): **TYCO FIRE & SECURITY GMBH** [CH/CH]; Victor Von Bruns-Strasse 21, CH-8212 Neuhausen am Rheinfall (CH).

(72) Inventors; and

(71) Applicants (for US only): **HAVASS, Richard, Glenn** [US/US]; 3979 NW 57th Street, Coconut Creek, FL 33073 (US). **KOUTSOYANNIS, Robert, Jayson** [US/US]; 8906 Shadow Wood Blvd., Coral Springs, FL 33071 (US).

(74) Agents: **SAAR, Leah, C.** et al.; Tyco International, 6600 Congress Avenue, Boca Raton, FL 33487 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: ACCELEROMETER-BASED BATTERY CHARGE STATUS INDICATOR

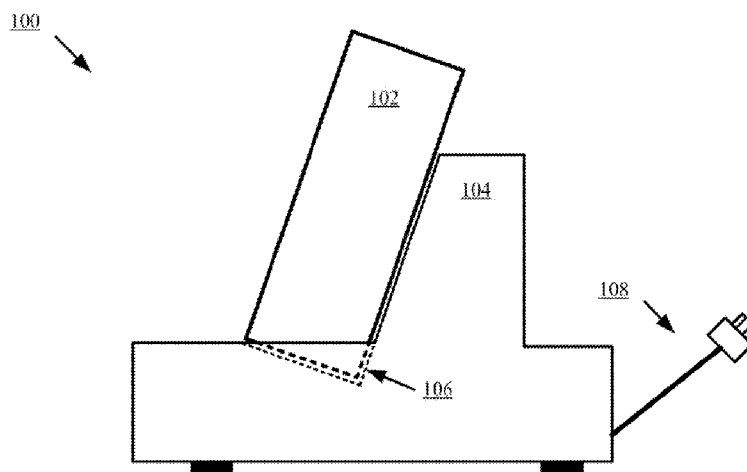


FIG. 1

(57) Abstract: Systems (100) and methods (600) for recharging a battery (292) of an electronic device (102) which has been placed in a cradle (106) of a charging dock (104). The methods involve: measuring a charging voltage value and a charging current value for the electronic device; determining a first value of angular orientation for a current position of the electronic device relative to a reference angular orientation of the electronic device; selecting at least one first indicator from a plurality of indicators based on the charging voltage value, the charging current value, and the first value of angular orientation; and outputting a first indicator to the user of the electronic device.



ACCELEROMETER-BASED BATTERY CHARGE STATUS INDICATOR

Cross Reference to Related Applications

[0001] This application is a non-provisional application of U.S. Provisional Application No. 61/778,026 filed on March 13, 2013, which is herein incorporated in its entirety.

Statement of the Technical Field

[0002] The inventive arrangements relate to systems and methods for recharging batteries of an electronic device. More particularly, the inventive arrangements concern systems and methods for providing an indication of a charging status for a battery of an electronic device when the battery is being recharged or is not receiving charge.

Description of the Related Art

[0003] Electronic devices with rechargeable batteries are designed to be recharged by coupling the electronic device to a power source (e.g., an Alternating Current (“AC”) power source). This coupling can be achieved directly via a cable or indirectly via a charging dock. The charging dock supplies electric energy for the recharging of a battery disposed within the electronic device. This recharging process may fail for various reasons. For example, the battery may not recharge simply because (1) the charging dock itself is not properly coupled to the power source, (2) the electronic device was incorrectly placed in the charging dock such that an electrical coupling therebetween was not formed, and/or (3) an obstruction (e.g., an object or dust buildup) exists which prevents the electrical coupling between the electronic device and the charging dock.

[0004] There are many solutions known in the art for providing feedback to a user indicating that the electronic device is not recharging properly. One such solution involves: sensing whether at least one electrical contact of a connector disposed on the electronic device is not in contact with a respective electrical contact of the charging dock; sensing whether an input voltage of the electronic device is incorrect; and/or outputting information indicating that an electrical coupling between the electronic device and charging dock has not been suitably established for enabling the recharge of the battery. This solution fails when the charging dock is not connected to the power source, and/or when the electronic device is incorrectly placed in the charging dock such that a suitable electrical coupling is not formed

between other electrical contacts (i.e., non-sensed electrical contacts) of the electronic device and the charging dock.

SUMMARY OF THE INVENTION

[0005] The present invention concerns systems and methods for recharging a battery of an electronic device which has been placed in a cradle of a charging dock. The methods involve performing the following operations by an electronic circuit (e.g., the electronic device or the charging dock): measuring a charging voltage value and a charging current value for the electronic device; determining a first value of angular orientation for a current position of the electronic device relative to a reference angular orientation of the electronic device; selecting at least one first indicator from a plurality of indicators based on the charging voltage value, the charging current value, and the first value of angular orientation; and outputting a first indicator to the user of the electronic device. The indicators can include, but are not limited to, an auditory indicator, a visual indicator, and a tactile indicator.

[0006] In some scenarios, the first indicator indicates that: a charging of the battery has failed or a low battery charge has been detected; the electronic device is or is not properly placed in the cradle of the charging dock; the wrong type of charging dock is being used to charge the battery; there is something present in the cradle which is preventing an electrical connection between charging interface connectors of the electronic device and the charging station; and/or the charging station is not electrically coupled to an external power source. Also, the first indicator is further selected based on: results of a determination as to whether the electronic device has been stationary for a pre-defined period of time; and/or results of a determination as to whether the charging voltage and current values are equal to zero.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Embodiments will be described with reference to the following drawing figures, in which like numerals represent like items throughout the figures, and in which:

[0008] FIG. 1 is a schematic illustration of an exemplary system that is useful for understanding the present invention.

[0009] FIG. 2 is a more detailed block diagram of an electronic device shown in FIG. 1.

[0010] FIG. 3 is a more detailed block diagram of a charging dock shown in FIG. 1.

[0011] FIGS. 4A-4C each provide a schematic illustration of an angular orientation of the electronic device of FIG. 1 relative to a reference angular orientation.

[0012] FIG. 5 is a histogram of acceleration magnitude data for the angular orientations shown in FIGS. 4A-4C on the x-axis of the electronic device.

[0013] FIGS. 6A-6C collectively provide a flow diagram of an exemplary method for recharging a battery of an electronic device.

DETAILED DESCRIPTION

[0014] It will be readily understood that the components of the embodiments as generally described herein and illustrated in the appended figures could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of various embodiments, as represented in the figures, is not intended to limit the scope of the present disclosure, but is merely representative of various embodiments. While the various aspects of the embodiments are presented in drawings, the drawings are not necessarily drawn to scale unless specifically indicated.

[0015] The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects as illustrative. The scope of the invention is, therefore, indicated by the appended claims. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

[0016] Reference throughout this specification to features, advantages, or similar language does not imply that all of the features and advantages that may be realized with the present invention should be or are in any single embodiment of the invention. Rather, language referring to the features and advantages is understood to mean that a specific feature, advantage, or characteristic described in connection with an embodiment is included in at least one embodiment of the present invention. Thus, discussions of the features and advantages, and similar language, throughout the specification may, but do not necessarily, refer to the same embodiment.

[0017] Furthermore, the described features, advantages and characteristics of the invention may be combined in any suitable manner in one or more embodiments. One skilled in the relevant art will recognize, in light of the description herein, that the invention can be practiced without one or more of the specific features or advantages of a particular embodiment. In other instances, additional features and advantages may be recognized in certain embodiments that may not be present in all embodiments of the invention.

[0018] Reference throughout this specification to “one embodiment”, “an embodiment”, or similar language means that a particular feature, structure, or characteristic described in connection with the indicated embodiment is included in at least one embodiment of the

present invention. Thus, the phrases “in one embodiment”, “in an embodiment”, and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

[0019] As used in this document, the singular form “a”, “an”, and “the” include plural references unless the context clearly dictates otherwise. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. As used in this document, the term “comprising” means “including, but not limited to”.

[0020] Embodiments will now be described with respect to FIGS. 1-6C. Embodiments generally relate to systems and methods for indicating that an electronic device, which has been placed by a user in its designated cradle of a charging dock, is not receiving charge sufficient to recharge a battery thereof. The solution advantageously informs the user of a charging failure immediately without having to wait for a rechargeable battery of the electronic device to drop to a critically low level. The methods as disclosed herein use charging voltage and current detection in combination with orientation detection for selecting the type information to be output to the user or which indicator of a plurality of indicators is to be output to the user. The detected charging voltage and current is used to determine whether the electronic device is currently being charged, and to detect the difference between a “successful” battery charge condition and an “unsuccessful” battery charge condition. The detected orientation is used to determine whether the electronic device has been sitting for a specified amount of time in a specific directional orientation.

[0021] In some scenarios, the electronic device or charging station outputs an auditory, visual and/or tactile indicator based on the results of such determinations. The indicator is of a type that can draw the immediate attention of the user to an “unsuccessful” battery charge attempt, and that can inform the user of the reason(s) for such an “unsuccessful” battery charge attempt. In this regard, the indicator can indicate that: the charging of the rechargeable battery has failed; the electronic device is or is not properly positioned in the cradle of the charging dock; a low battery charge has been detected; the wrong type of charging dock is being used; there is something present in the cradle (e.g., dust) which may be preventing an electrical connection between the charging interface connectors of the

electronic device and the charging station; and/or the charging station may not be electrically coupled to a power source.

[0022] Referring now to FIG. 1, there is provided a schematic illustration of an exemplary system **100** that is useful for understanding the present invention. System **100** comprises an electronic device **102** and a charging dock **104**. The electronic device **102** includes any device with a rechargeable battery (not shown in FIG. 1). Such device can include, but is not limited to, a mobile phone, a Personal Digital Assistant (“PDA”), a portable computer, a portable game station, and a portable telephone. The charging dock **104** is generally configured to recharge the rechargeable battery contained in the electronic device **102**. In this regard, the charging dock **104** has a cradle **106** sized and shaped to receive at least a portion of the electronic device **102**, as shown in FIG. 1. The cradle **106** includes an interface connector (not shown in FIG. 1) for creating an electrical connection with a corresponding interface connector (not shown in FIG. 1) of the electronic device **102**. A retractable connector **108** is provided for electrically coupling the charging dock **104** to a power source (e.g., an AC power source). The interface connectors and retractable connector **108** collectively facilitate the recharging of the rechargeable battery of the electronic device **102**.

[0023] As shown in FIG. 1, a battery is charged when the electronic device **102** is positioned in the cradle **106** of the charging dock **104** at a tilted orientation (e.g., a titled orientation of 24 degrees relative to a reference position). The tilted orientation is not a typical orientation for the electronic device **102** during normal operations, i.e., when the electronic device **102** is not disposed within the cradle **106**. Therefore, a directional orientation of the electronic device **102** can be sensed and used to trigger the output of an indication of a charging status to a user thereof, as discussed below.

[0024] Referring now to FIG. 2, there is provided a detailed block diagram of an exemplary architecture for the electronic device **102** of FIG. 1. Electronic device **102** may include more or less components than those shown in FIG. 2. However, the components shown are sufficient to disclose an illustrative embodiment implementing the present invention. Some or all of the components of the electronic device **102** can be implemented in hardware, software and/or a combination of hardware and software. The hardware includes, but is not limited to, one or more electronic circuits.

[0025] As noted above, electronic device **102** can include, but is not limited to, a notebook computer, a personal digital assistant, a cellular phone, or a mobile phone with smart device functionality (e.g., a Smartphone). In this regard, the electronic device **102** comprises an antenna **202** for receiving and transmitting Radio Frequency (“RF”) signals. A receive/transmit (“Rx/Tx”) switch **204** selectively couples the antenna **202** to the transmitter circuitry **206** and receiver circuitry **208** in a manner familiar to those skilled in the art. The receiver circuitry **208** demodulates and decodes the RF signals received from an external device. The receiver circuitry **208** is coupled to a controller (or microprocessor) **210** via an electrical connection **234**. The receiver circuitry **208** provides the decoded signal information to the controller **210**. The controller **210** uses the decoded RF signal information in accordance with the function(s) of the electronic device **102**. The controller **210** also provides information to the transmitter circuitry **206** for encoding and modulating information into RF signals. Accordingly, the controller **210** is coupled to the transmitter circuitry **206** via an electrical connection **238**. The transmitter circuitry **206** communicates the RF signals to the antenna **202** for transmission to an external device via the Rx/Tx switch **204**.

[0026] Notably, the electronic device **102** is configured to facilitate the provision of an indication of a charging status for its battery **292** to a user thereof. In this regard, the electronic device **100** comprises an interface connector **290** for creating an electrical connection with a corresponding interface connector of a charging station (e.g., charging station **104** of FIG. 1). The interface connector **290** can include, but is not limited to, a multi-pin connector or a plurality of protruding conductive contacts.

[0027] Electronic device **100** also comprises an antenna **240** coupled to a Near Field Communication (“NFC”) transceiver **214** for receiving NFC signals. NFC transceivers are well known in the art, and therefore will not be described in detail herein. However, it should be understood that the NFC transceiver **214** processes the NFC signals to extract information therefrom. The NFC transceiver **214** may process the NFC signals in a manner defined by the NFC application **254** installed on the electronic device **102**. The NFC application **254** can include, but is not limited to, a Commercial Off The Shelf (“COTS”) application. The NFC transceiver **214** provides the extracted information to the controller **210**. As such, the NFC transceiver **214** is coupled to the controller **210** via an electrical connection **236**. The

controller **210** uses the extracted information in accordance with the function(s) of the electronic device **102**. For example, the extracted information can be used by the electronic device **102** to determine that it is in proximity of a charging station (e.g., charging station **104** of FIG. 1). Thereafter, the electronic device **102** can initiate a charging status indication process. The charging status indication process will be described in detail below.

[0028] The controller **210** may store received and extracted information in memory **212** of the electronic device **102**. Accordingly, the memory **212** is connected to and accessible by the controller **210** through electrical connection **232**. The memory **212** may be a volatile memory and/or a non-volatile memory. For example, the memory **212** can include, but is not limited, a RAM, a DRAM, an SRAM, a ROM and a flash memory. The memory **212** may also comprise unsecure memory and/or secure memory. The memory **212** can be used to store various other types of information therein, such as authentication information, cryptographic information, location information and various service-related information.

[0029] The electronic device **102** also may comprise a barcode reader **232**. Barcode readers are well known in the art, and therefore will not be described herein. However, it should be understood that the barcode reader **232** is generally configured to scan a barcode and process the scanned barcode to extract information therefrom. The barcode reader **232** may process the barcode in a manner defined by the barcode application **256** installed on the electronic device **102**. Additionally, the barcode scanning application can use camera **218** to capture the barcode image for processing. The barcode application **256** can include, but is not limited to, a COTS application. The barcode reader **232** provides the extracted information to the controller **210**. As such, the barcode reader **232** is coupled to the controller **210** via an electrical connection **260**. The controller **210** uses the extracted information in accordance with the function(s) of the electronic device **102**. For example, the extracted information can be used by the electronic device **102** to determine that it is in proximity of a charging station (e.g., charging station **104** of FIG. 1). Thereafter, the electronic device **102** can initiate a charging status indication process. The charging status indication process will be described in detail below.

[0030] As shown in FIG. 2, one or more sets of instructions **250** are stored in memory **212**. The instructions **250** may include customizable instructions and non-customizable instructions. The instructions **250** can also reside, completely or at least partially, within the

controller **210** during execution thereof by electronic device **102**. In this regard, the memory **212** and the controller **210** can constitute machine-readable media. The term “machine-readable media”, as used here, refers to a single medium or multiple media that stores one or more sets of instructions **250**. The term “machine-readable media”, as used here, also refers to any medium that is capable of storing, encoding or carrying the set of instructions **250** for execution by the electronic device **102** and that causes the electronic device **102** to perform one or more of the methodologies of the present disclosure.

[0031] The controller **210** is also connected to a user interface **230**. The user interface **230** comprises input devices **316**, output devices **324** and software routines (not shown in FIG. 3) configured to allow a user to interact with and control software applications (e.g., application software **252-258** and other software applications) installed on the electronic device **102**. Such input and output devices may include, but are not limited to, a display **228**, a speaker **226**, a keypad **220**, a directional pad (not shown in FIG. 2), a directional knob (not shown in FIG. 2), a microphone **222** and a camera **218**. The display **228** may be designed to accept touch screen inputs. As such, user interface **230** can facilitate a user-software interaction for launching applications (e.g., application software **252-258**) installed on the electronic device **102**. The user interface **230** can facilitate a user-software interactive session for: initiating communications with an external device; writing data to and reading data from memory **212**; initiating a calibration process for calibrating the electronic device **102** with a specific charging station (e.g., charging station **104** of FIG. 1); and/or initiating a charging status indication process. The calibration process and the charging status indication process will be described in detail below.

[0032] The display **228**, keypad **220**, directional pad (not shown in FIG. 2) and directional knob (not shown in FIG. 2) can collectively provide a user with a means to initiate one or more software applications or functions of the electronic device **102**. The application software **254-258** can facilitate the data exchange (a) between a user and the electronic device **102** and (b) between the electronic device **102** and a charging dock (e.g., charging dock **104** of FIG. 1). In this regard, the application software **354-358** performs one or more of the following: verify an identity of a user of the electronic device **102** via an authentication process; present information to the user indicating that her/his identity has been or has not been verified; present a Graphical User Interface (“GUI”) to the user for enabling the user to

initiate a calibration process for calibrating the electronica device **102** with a specific charging station (e.g., charging station **104** of FIG. 1); and/or present a GUI to the user for enabling the user to initiate a charging indication process for providing an indication of a charging status for its battery **292** to a user thereof.

[0033] The calibration process can generally involve: prompting a user of the electronic device **102** to manually input charging station information or prompting the user of the electronic device **102** to place the electronic device in proximity to the charging station; obtaining the charging station information manually from the user or automatically from the charging station via a short range communication (e.g., barcode communication or NFC communication); storing the charging station information in memory **212** for later use in the charging indication process. The charging station information can include, but is not limited to, a pre-defined range of angular orientations for an assumed cradle position of an electronic device. The calibration process will become more evident as the discussion progresses. In this regard, the calibration process will be described in more detail below in relation to FIGS. 6A-6C.

[0034] The charging indication process generally involves detecting when it is in proximity to the charging station (e.g., charging station **104** of FIG. 1); and initializing indication operations when such detection is made. In some scenarios, such detection can be achieved using the barcode reader **232**, the NFC transceiver **214**, and/or a sensor **270** of the electronic device **102**. In the barcode scenario, the barcode reader **232** can scan a barcode disposed on an outer surface of the charging dock so as to obtain charging dock information, such as a serial, make or model number. In the NFC transceiver **214** scenario, the electronic device can obtain the charging dock information from the charging dock via a short range communication (e.g., a near field communication). In the sensor **270** scenario, a presence of an object adjacent to the electronic device may simply be sensed. Methods for sensing the presence of an adjacent object are well known in the art, and therefore will not be described herein. Any known or to be known method for sensing an adjacent object can be used herein without limitation.

[0035] The indication operations can also involve: determining whether or not the charging of battery **292** has failed; determining the reason(s) for such failure; detecting a low battery charge of the battery **292**; and/or outputting an indication indicating that the charging

of the battery has failed, the reasons for such failure, and/or the detection of the low battery charge. These determinations are based on detected values for a charging voltage, a charging current, and/or a directional orientation of the electronic device. The charging voltage and current values can be detected by a voltage/current detector **274** of sensors **270**. The directional orientation can be detected by a position detection sensor **272** (e.g., an accelerometer) of sensors **270**. The reasons for a charging failure include, but are not limited to: the charging station is not electrically coupled to a power source; the electronic device is not positioned properly in the cradle of the charging station; an incorrect charging station is being used; and/or an obstruction exists within the cradle of the charging station which prevents an electrical coupling between the electronic device and the charging station. The indicator can include an auditory, visual and/or tactile indication. As such, the electronic device **102** comprises a speaker **226** for providing an auditory indicator, a display **228** for providing a visual indicator, Light Emitting Diodes (“LEDs”) **280** for providing visual indicators, and a vibration device **282** for providing a tactile indicator. The charging indication process will become more evident as the discussion progresses. In this regard, the charging indication process will be described in more detail below in relation to FIGS. 6A-6C.

[0036] Referring now to FIG. 3, there is provided a detailed block diagram of an exemplary architecture for the charging station **104** shown in FIG. 1. Notably, the charging station **104** may include more or less components than those shown in FIG. 3. However, the components shown are sufficient to disclose an illustrative embodiment implementing the present invention. The hardware architecture of FIG. 3 represents one embodiment of a representative charging station configured to facilitate the provision of an indication of a charging status for a battery (e.g., battery **292** of FIG. 2) of an electronic device (e.g., electronic device **102** of FIG. 1) to a user thereof. As such, the computing device **102** of FIG. 2 implements methods for providing such indication in accordance with embodiments of the present invention. Some or all the components of the computing device **102** can be implemented as hardware, software and/or a combination of hardware and software. The hardware includes, but is not limited to, one or more electronic circuits.

[0037] As shown in FIG. 3, the charging station **104** includes an interface connector **322**. Interface connector **322** allows the charging station **104** to recharge a battery (e.g., battery **292** of FIG. 2) of an electronic device (e.g., electronic device **102** of FIG. 1) disposed within a cradle (e.g., cradle **106** of FIG. 1) thereof. In this regard, the interface connector **322**

facilitates the formation of an electrical connection between the electronic device and the charging station, as described herein.

[0038] The charging station **104** also comprises a user interface **302**, a Central Processing Unit (“CPU”) **306**, a system bus **310**, a memory **312** connected to and accessible by other portions of charging station **104** through system bus **310**, and hardware entities **314** connected to system bus **310**. At least some of the hardware entities **314** perform actions involving access to and use of memory **312**, which can be a Random Access Memory (“RAM”), a disk driver and/or a Compact Disc Read Only Memory (“CD-ROM”). The charging station **104** also comprises sensors **360**, a barcode **330**, a barcode reader **390** and a SRC unit **332**.

[0039] Hardware entities **314** can include a disk drive unit **316** comprising a computer-readable storage medium **318** on which is stored one or more sets of instructions **320** (e.g., software code) configured to implement one or more of the methodologies, procedures, or functions described herein. The instructions **320** can also reside, completely or at least partially, within the memory **312** and/or within the CPU **306** during execution thereof by the charging station **104**. The memory **312** and the CPU **306** also can constitute machine-readable media. The term "machine-readable media", as used here, refers to a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more sets of instructions **320**. The term "machine-readable media", as used here, also refers to any medium that is capable of storing, encoding or carrying a set of instructions **220** for execution by the charging station **104** and that cause the charging station **104** to perform any one or more of the methodologies of the present disclosure.

[0040] In some embodiments of the present invention, the hardware entities **314** include an electronic circuit (e.g., a processor) programmed for facilitating the provision of an indication of a charging status for a battery (e.g., battery **292** of FIG. 2) of an electronic device (e.g., electronic device **102** of FIG. 1) to a user thereof. In this regard, it should be understood that the electronic circuit can access and run software applications (not shown in FIG. 3) installed on the charging station **104**. The software applications are generally operative to facilitate: the detection of the presence of an electronic device (e.g., electronic device **102** of FIG. 1) within a cradle **106** of the charging station **104**; and the initialization of

charging operations when the presence of the electronic device is detected. In some scenarios, such detection can be achieved using the barcode reader **390**, the NFC unit **332**, and/or a cradle sensor **364** of the charging dock **104**. In the barcode scenario, the barcode reader **390** can scan a barcode disposed on an outer surface of the electronic device so as to obtain electronic device information, such as a serial, make or model number. In the SRC unit **332** scenario, the charging station can obtain the electronic device information from the electronic device via a short range communication (e.g., a near field communication). In the cradle sensor **364** scenario, a presence of an object within the cradle **106** may simply be sensed. Methods for sensing the presence of an object in a given area are well known in the art, and therefore will not be described herein. Any known or to be known method for sensing the presence of an object can be used herein without limitation.

[0041] The charging operations can involve: charging a battery (e.g., battery **292** of FIG. 2) of an electronic device (e.g., electronic device **102** of FIG. 1) disposed within a cradle **106** of the charging station **104**; determining whether or not the charging of the battery has failed; determining the reason(s) for such failure; detecting a low battery charge of the battery; and/or outputting an indication indicating that the charging of the battery has failed, the reasons for such failure, and/or the detection of the low battery charge. These determinations made in the charging indication process are based on detected values for a charging voltage, a charging current, and/or a directional orientation of the electronic device. The charging voltage and current can be detected by a voltage/current detector **362** of the charging dock **104**. The directional orientation of the electronic device can be detected by a position sensor **366** of the charging dock **104**. The position sensor **366** can include, but is not limited to, an accelerometer. The reasons for a charging failure include, but are not limited to: the charging station is not electrically coupled to a power source; the electronic device is not positioned properly in the cradle of the charging station; an incorrect charging station is being used; and/or an obstruction exists within the cradle of the charging station which prevents an electrical coupling between the electronic device and the charging station. The indicator can be an auditory, visual and/or tactile indicator. In this regard, the charging station **104** comprises a speaker **352** for providing an auditory indicator, a display **354** for providing a visual indicator, LEDs **356** for providing visual indicators, and a vibration device **358** for providing a tactile indicator. The charging operations will become more evident as the

discussion progresses. In this regard, the charging indication process will be described in more detail below in relation to FIGS. 6A-6C.

[0042] As noted above, electronic device **102** and/or charging station **104** may include a position sensor **272, 366** for detecting the directional orientation of the electronic device **102** when it is disposed within a cradle **106** of the charging station **104**. This position sensor is generally configured to sense the subtle differences between angular positions of the electronic device, such as those shown in FIGS. 4A-4C. In this regard, the position sensor **272, 366** is configured to sense and store x, y and z acceleration magnitude data specifying a directional orientation of the electronic device **102**. Such acceleration magnitude data allows subtle differences in angular orientation to be accurately distinguishable. FIG. 5 provides a histogram of acceleration magnitude data for the angular positions on the x-axis of the electronic device, as shown in FIGS. 4A-4C. Notably, the data distinguishes each of the listed angles with marginal variance.

[0043] In some scenarios, the electronic device **102** and/or charging station **104** determines if the directional orientation of the electronic device is in a proper “cradle” range by setting the acceptable range x, y and z accelerometer magnitude. The x and z data will change significantly from an angular rotation, but the y data should not change because the electronic device pivots the y axis. The acceptable range for the x, y and z accelerometer magnitude may be preset, i.e., programmed at the time of manufacture of the electronic device based on known configurations of the electronic device and the cradle. Alternatively, the electronic device can be calibrated to a specific charging dock. In the calibration scenario, the x, y and z accelerometer magnitude values can be manually input by the user, automatically obtained via a user selection of a menu item of a GUI, and/or automatically obtained using charging station data received via a barcode read or a short range communication. The ability to calibrate the electronic device may be useful if the electronic device were being used with an after-market charging dock which may not precisely match the angle of the originally manufactured charging dock.

[0044] Referring now to FIGS. 6A-6C, there is provided a flow diagram of an exemplary method **600** for recharging a battery (e.g., battery **292** of FIG. 2) of an electronic device (e.g., electronic device **102** of FIGS. 1-2). Method **600** begins with step **602** and continues with step **604** where the electronic device is turned on. In a next optional step **605**, the electronic

device is calibrated to a specific charging dock (e.g., charging dock **104** of FIGS. 1 and 3). The calibration can involve: receiving a user input specifying a value for an angular orientation of an assumed cradle position or values for a range of angular orientations of the assumed cradle position; receiving a user input selecting a type of charging dock from a menu; retrieving at least one value of the angular orientation which is associated in a data store with the type of charging dock selected by the user; and/or retrieving information from the charging dock via a short range communication (e.g., a barcode communication or an NFC communication). Once the value(s) of angular orientation for an assumed cradle position are obtained by the electronic device, step **606** is performed where the electronic device is placed in a cradle (e.g., cradle **106** of FIG. 1) of the charging dock such that its rechargeable battery (e.g., battery **292** of FIG. 2) can be recharged.

[0045] If the charging dock is electrically coupled to a power source, then method **600** can continue with optional steps **608-614**. Optional step **608** involves performing operations by the charging dock to sense the presence of the electronic device within the cradle thereof. If the charging dock has not sensed the presence of the electronic device within its cradle [**610:NO**], then step **612** is performed where the charging station outputs an indicator indicating that the charging operations thereof have not been initiated. This indicator can be an auditory, visual and/or tactile indicator. In contrast, if the charging dock has sensed the presence of the electronic device within its cradle [**610:YES**], then step **614** is performed where the charging operations of the charging station are initiated.

[0046] The remaining steps of method **600** define charging indication operations which can be performed by the electronic device and/or the charging dock. If the charging indication operations are performed by the electronic device, then an optional step **615** can be performed to initiate said charging indication operations thereof. Step **615** involves communicating from the charging dock to the electronic device information indicating that the electronic device is in proximity thereof. This communication can be achieved via a short range communication (e.g., a barcode communication or an NFC communication). Additionally or alternatively, this communication can be achieved using a sensor (e.g., sensor **270** of FIG. 2).

[0047] Next, method **600** continues with step **616**. In step **616**, the electronic device and/or charging station perform operations to detect a charging voltage value and a charging

current value of a charging interface (e.g., interface connector **290** of FIG. 2 or **322** of FIG. 3). If the charging voltage and current values indicate a “successful” charging condition [**618:YES**], then method **600** ends or other processing is performed. A “successful” charging condition can be detected by: determining whether the charging voltage is equal to or greater than a pre-defined charging voltage; determining whether the charging current is equal to or greater than a pre-defined charging current; and deciding that the “successful” charging condition exists if the charging voltage and current values are equal to or greater than the pre-defined values, respectively. Alternatively, step **618** can involve: determining a first difference value by comparing the charging voltage to the pre-defined charging voltage; determining a second difference value by comparing the charging current to the pre-defined charging current; and identifying the charging state of the electronic device based on the first and second difference values (e.g., using a list stored in a data store of the electronic device and/or charging dock).

[**0048**] If the charging voltage and current values do not indicate a “successful” charging condition [**618:NO**], then method **600** continues with step **622** of FIG. 6B. Step **622** involves determining a first value of an angular orientation for a current position of the electronic device relative to a reference angular orientation of the electronic device. The first value of angular orientation is then stored in a data store (e.g., memory **212** of FIG. 2 and/or memory **312** of FIG. 3) of the electronic device and/or charging dock, as shown by step **624**. A timestamp may be stored along with the first value of angular orientation.

[**0049**] Thereafter, the electronic device and/or charging dock wait for a pre-defined period of time. When the pre-defined period of time has expired [**626:YES**], then a second value of angular orientation is determined for the current position of the electronic device relative to the reference angular orientation of the electronic device, as shown by step **628**. Next, a decision is made in step **630** as to whether the electronic device has been stationary for a pre-defined period of time. Step **630** can involve determining if the second value of angular orientation is equal to the first value of angular orientation. If it is determined that the electronic device has not been stationary for the pre-defined period of time [**630:NO**], then step **632** is performed where method **600** ends or other processing is performed. If it is determined that the electronic device has been stationary for the pre-defined period of time [**630:YES**], then a decision step **634** is performed.

[0050] In step **634**, it is determined if the first and/or second values of angular orientation fall within a pre-defined range of angular orientations for an assumed cradle position. As noted above, the pre-defined range of angular orientations for the assumed cradle position can be pre-set at the factory, or alternatively obtained via a calibration process.

[0051] If the first and/or second values of angular orientation do not fall within a pre-defined range of angular orientations for an assumed cradle position [**634:NO**], then the electronic device and/or charging dock output an indicator to the user thereof, as shown by step **636**. The indicator may be an auditory, visual and/or tactile indicator. The indicator may indicate that the charging of the rechargeable battery has failed and/or that the electronic device is not properly positioned in the cradle of the charging station. An indicator can also be provided to the user indicating that a low battery charge is detected, as shown by step **638**. Thereafter, step **640** is performed where method **600** ends or other processing is performed.

[0052] If the first and/or second values of angular orientation fall within a pre-defined range of angular orientations for an assumed cradle position [**634:YES**], then method **600** continues with a decision step **642** of FIG. 6C in which a determination is made as to whether the charging voltage is equal to zero Volts and whether the charging current is equal to zero Amps.

[0053] If the charging voltage is not equal to zero Volts and/or the charging current is not equal to zero Amps [**642:NO**], then step **644** is performed. In step **644**, the electronic device and/or charging dock output an auditory, visual and/or tactile indicator indicating that: the charging of the rechargeable battery has failed; the electronic device is properly placed in the cradle; and/or the wrong type of charging dock is being using or there is something present in the cradle (e.g., dust) which may be preventing an electrical connection between the charging interface connectors of the electronic device and charging dock. The electronic device and/or charging dock may also output an auditory, visual and/or tactile indicator indicating that a low battery charge has been detected, as shown by step **648**. Next, step **650** is performed where method **600** ends or other processing is performed.

[0054] If the charging voltage is equal to zero Volts and the charging current is equal to zero Amps [**642:YES**], then step **646** is performed. In step **646**, the electronic device and/or charging dock output an auditory, visual and/or tactile indicator indicating that: the charging of the rechargeable battery has failed; the electronic device is properly placed in the cradle;

and/or the charging dock may not be electrically coupled to a power source. The electronic device and/or charging dock may also output an auditory, visual and/or tactile indicator indicating that a low battery charge has been detected, as shown by step **648**. Next, step **650** is performed where method **600** ends or other processing is performed.

[0055] As noted above, the electronic device and/or charging dock may be configured to not only alert the user of an unsuccessful battery charge, but also to indicate to the user the exact nature of the charging failure. For example, the electronic device and/or charging dock may include a series of LEDs, where one LED might indicate that the cradle is possibly unplugged and another LED may indicate that the electronic device in the cradle is not making proper contact. If the electronic device and/or charging dock has a display screen, then the device can be configured to provide a combination of audible and visual alert indicators. For example, the alert indicating that the charging dock is not plugged in could be an audible alert, e.g., a beeping tone, while the alert for improper contact may be a visual alert.

[0056] All of the apparatus, methods and algorithms disclosed and claimed herein can be made and executed without undue experimentation in light of the present disclosure. While the invention has been described in terms of preferred embodiments, it will be apparent to those of skill in the art that variations may be applied to the apparatus, methods and sequence of steps of the method without departing from the concept, spirit and scope of the invention. More specifically, it will be apparent that certain components may be added to, combined with, or substituted for the components described herein while the same or similar results would be achieved. All such similar substitutes and modifications apparent to those skilled in the art are deemed to be within the spirit, scope and concept of the invention as defined.

CLAIMS

We claim:

1. A method for recharging a battery of an electronic device which has been placed in a cradle of a charging dock, comprising:
 - measuring, by an electronic circuit, a charging voltage value and a charging current value for the electronic device;
 - determining, by the electronic circuit, a first value of angular orientation for a current position of the electronic device relative to a reference angular orientation of the electronic device;
 - selecting, by the electronic circuit, at least one first indicator from a plurality of indicators based on the charging voltage value, the charging current value, and the first value of angular orientation; and
 - outputting, by the electronic circuit, a first indicator to the user of the electronic device.
2. The method according to claim 1, wherein the electronic circuit comprises the electronic device or the charging dock.
3. The method according to claim 1, wherein the plurality of indicators comprises an auditory indicator, a visual indicator, and a tactile indicator.
4. The method according to claim 1, wherein the first indicator indicates that a charging of the battery has failed or a low battery charge has been detected.
5. The method according to claim 1, wherein the first indicator indicates that the electronic device is or is not properly placed in the cradle of the charging dock.
6. The method according to claim 1, wherein the first indicator indicates that the wrong type of charging dock is being used to charge the battery.

7. The method according to claim 1, wherein the first indicator indicates that there is something present in the cradle which is preventing an electrical connection between charging interface connectors of the electronic device and the charging station.
8. The method according to claim 1, wherein the first indicator indicates that the charging station is not electrically coupled to an external power source.
9. The method according to claim 1, wherein the first indicator is further selected based on results of a determination as to whether the electronic device has been stationary for a pre-defined period of time.
10. The method according to claim 1, wherein the first indicator is further selected based on results of a determination as to whether the charging voltage and current values are equal to zero.
11. A system, comprising:
 - an electronic device having a rechargeable battery;
 - a charging dock comprising a cradle configured to receive the electronic device; and
 - an electronic circuit configured to
 - measure a charging voltage value and a charging current value for the electronic device,
 - determine a first value of angular orientation for a current position of the electronic device relative to a reference angular orientation of the electronic device,
 - select at least one first indicator from a plurality of indicators based on the charging voltage value, the charging current value, and the first value of angular orientation, and
 - output a first indicator to the user of the electronic device.
12. The system according to claim 11, wherein the electronic circuit is contained in the electronic device or the charging dock.

13. The system according to claim 11, wherein the plurality of indicators comprises an auditory indicator, a visual indicator, and a tactile indicator.
14. The system according to claim 11, wherein the first indicator indicates that a charging of the battery has failed or a low battery charge has been detected.
15. The system according to claim 11, wherein the first indicator indicates that the electronic device is or is not properly placed in the cradle of the charging dock.
16. The system according to claim 11, wherein the first indicator indicates that the wrong type of charging dock is being used to charge the battery.
17. The system according to claim 11, wherein the first indicator indicates that there is something present in the cradle which is preventing an electrical connection between charging interface connectors of the electronic device and the charging station.
18. The system according to claim 11, wherein the first indicator indicates that the charging station is not electrically coupled to an external power source.
19. The system according to claim 11, wherein the first indicator is further selected based on results of a determination as to whether the electronic device has been stationary for a pre-defined period of time.
20. The system according to claim 11, wherein the first indicator is further selected based on results of a determination as to whether the charging voltage and current values are equal to zero.

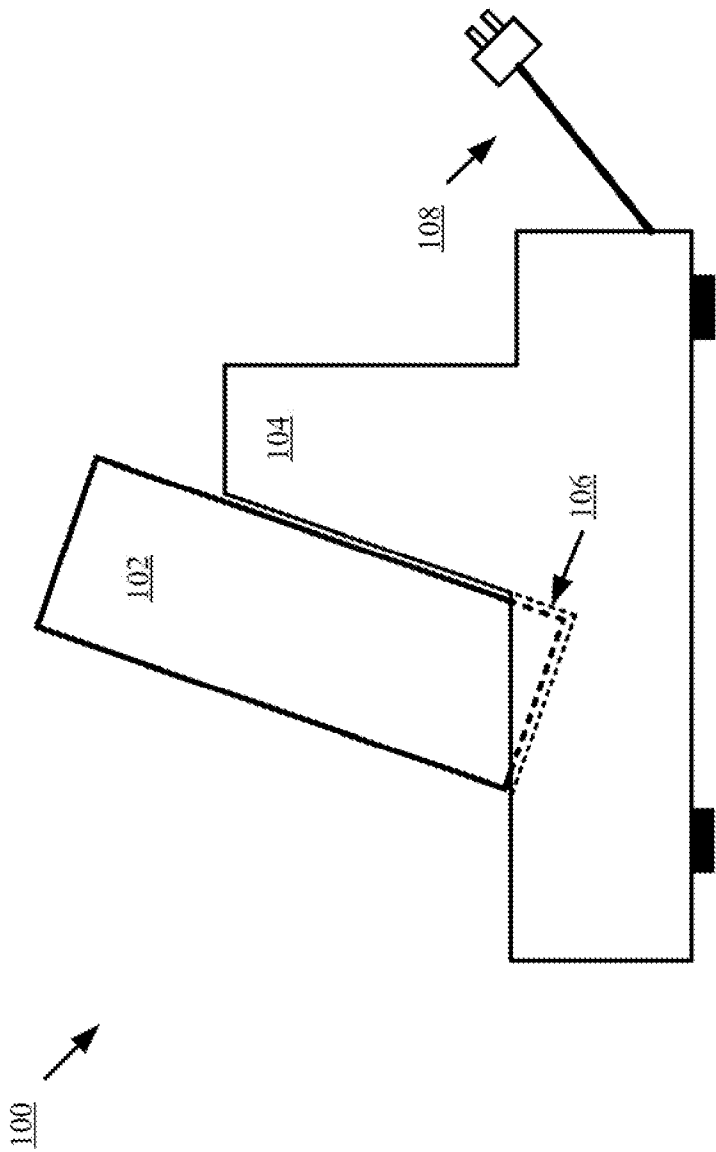


FIG. 1

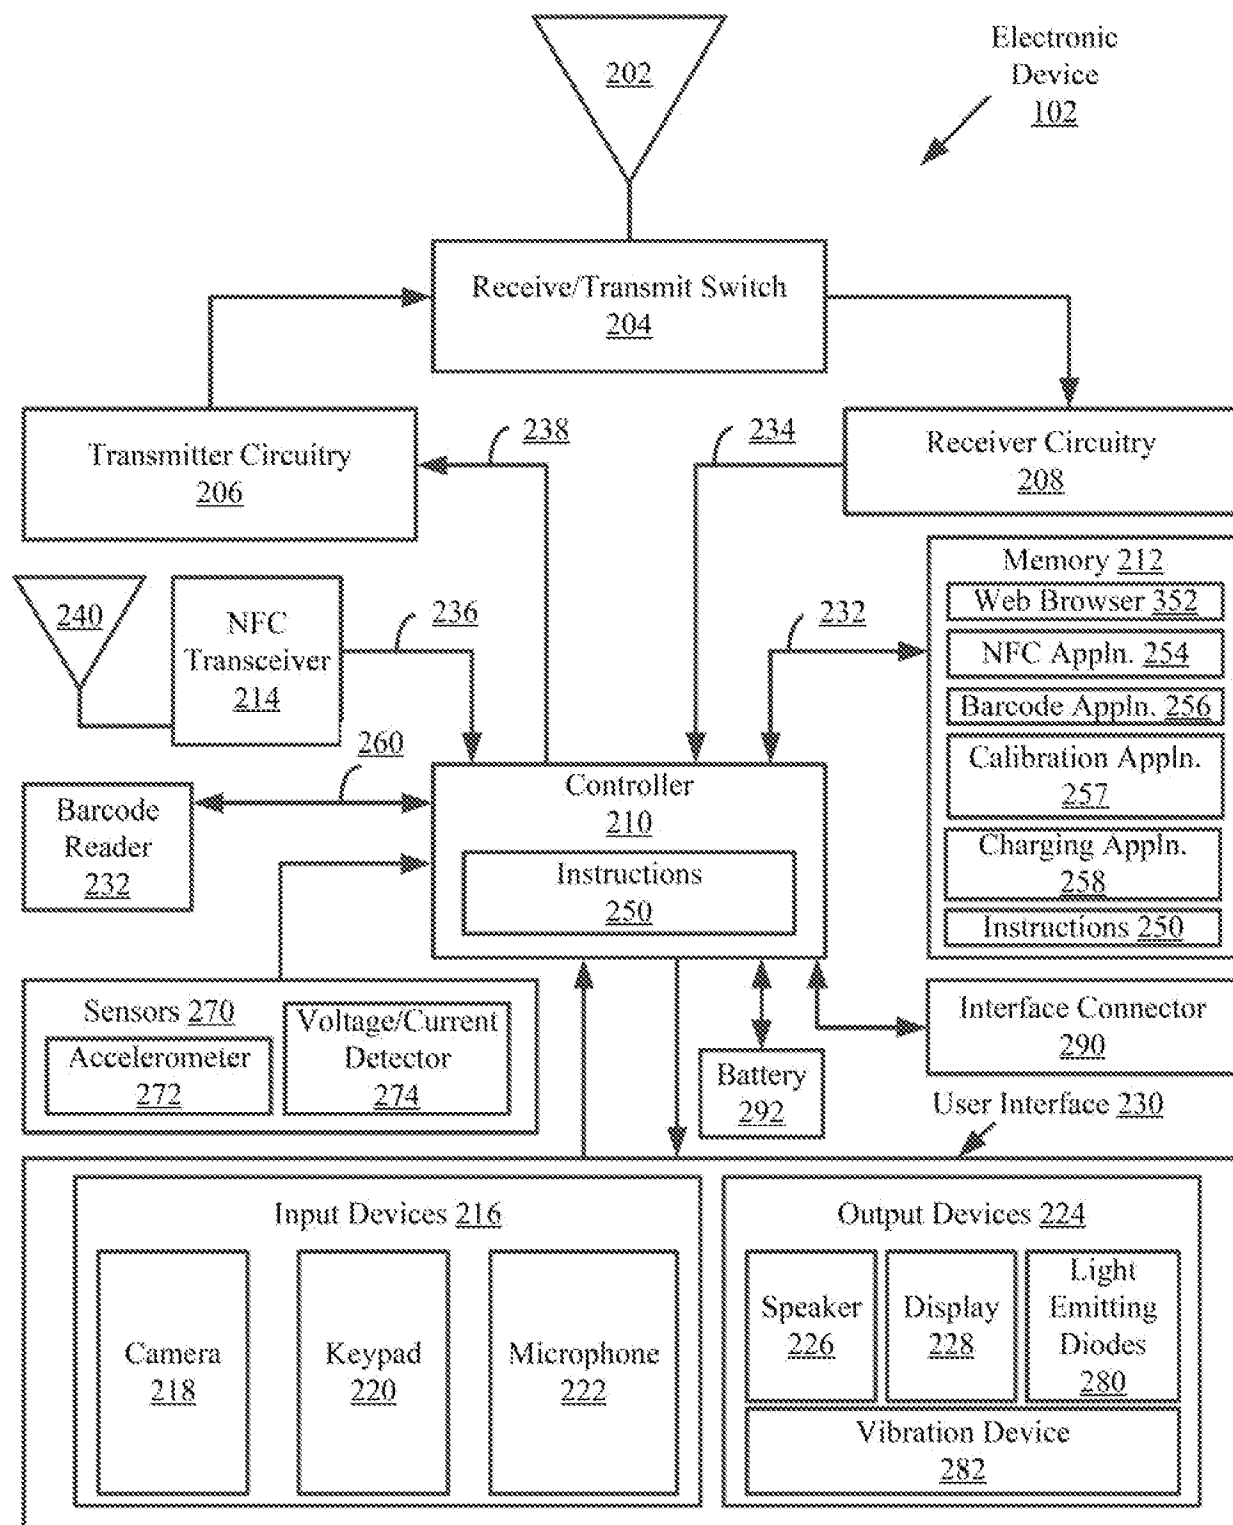


FIG. 2

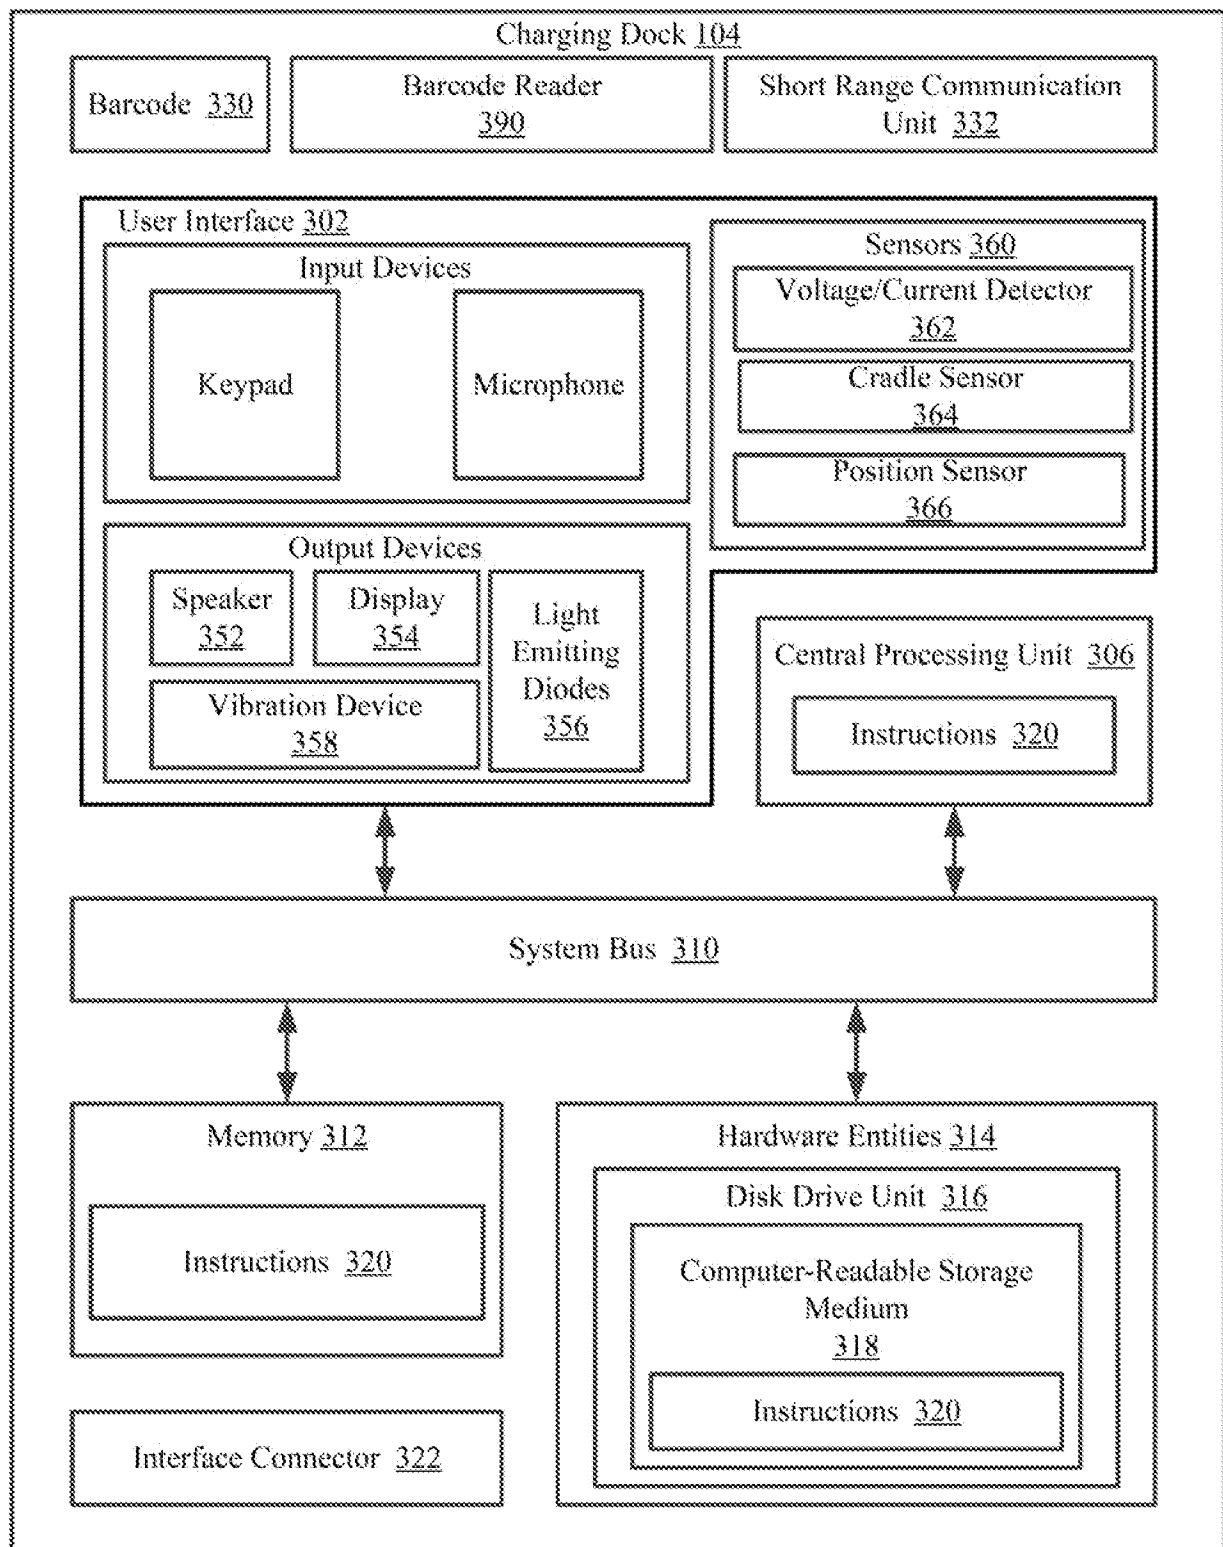


FIG. 3

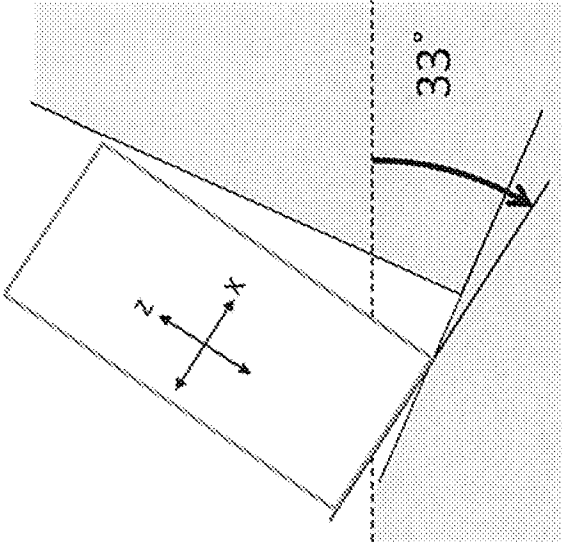


FIG. 4A

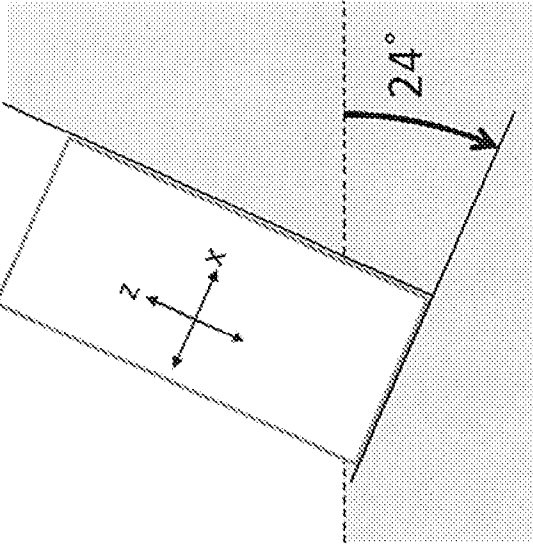


FIG. 4B

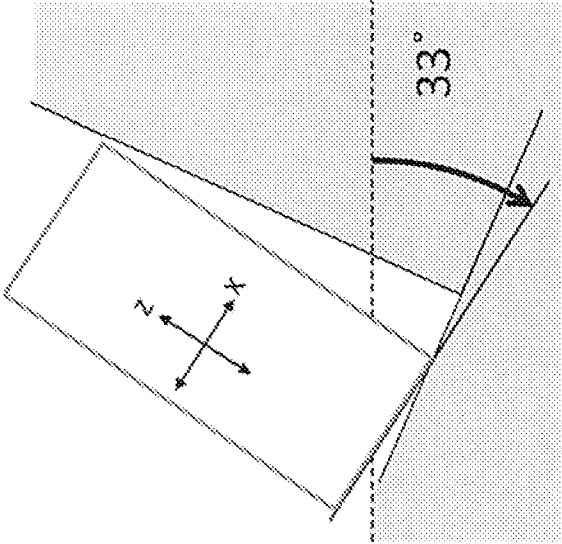


FIG. 4C

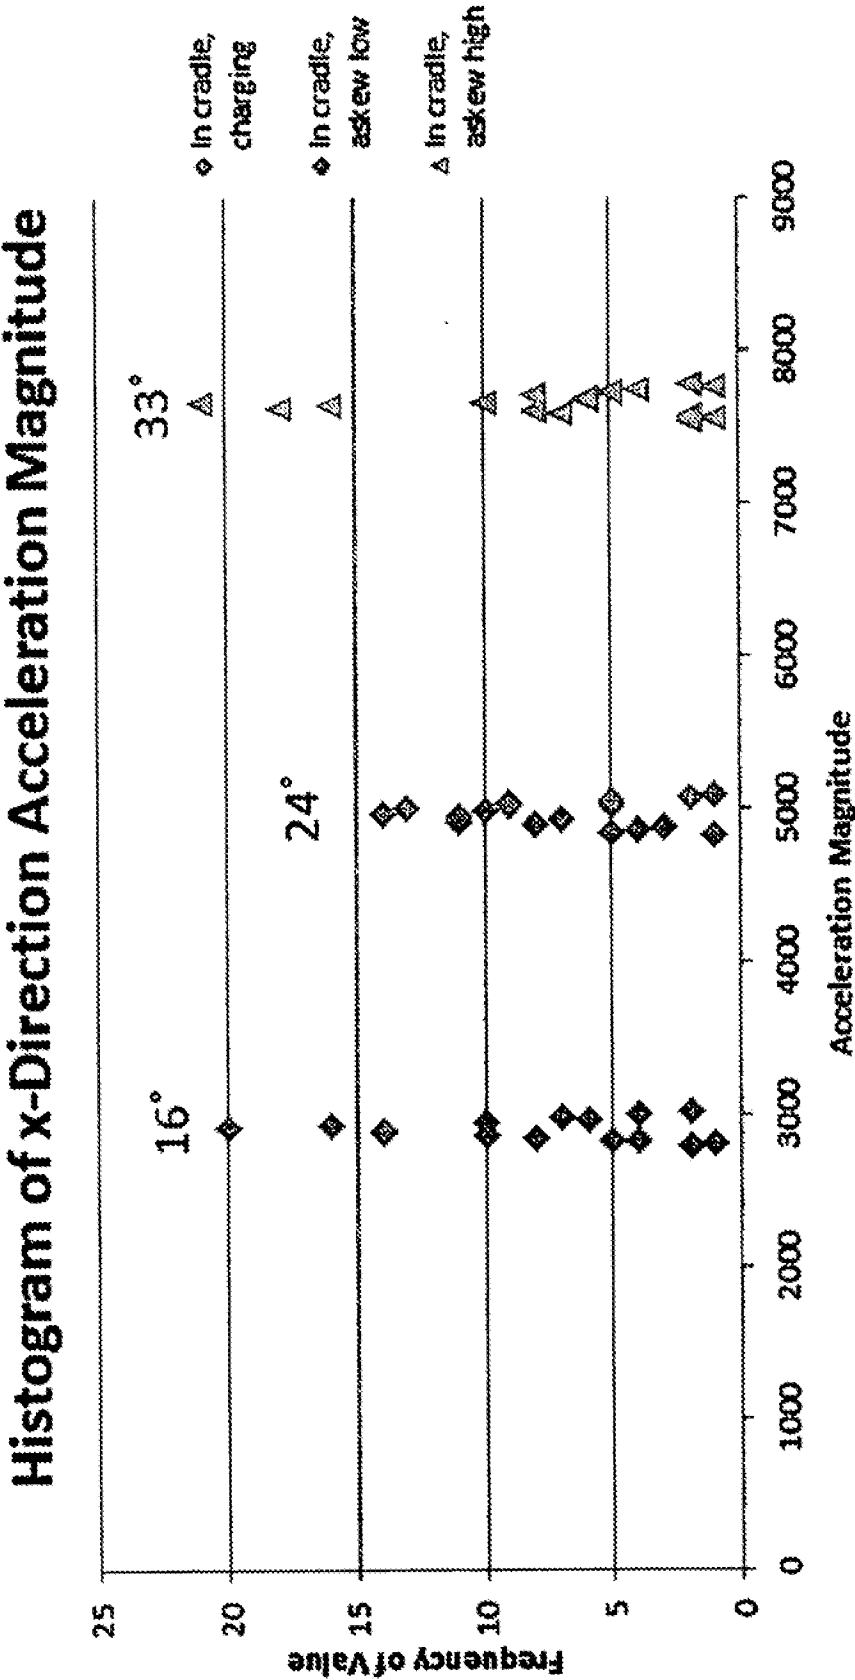
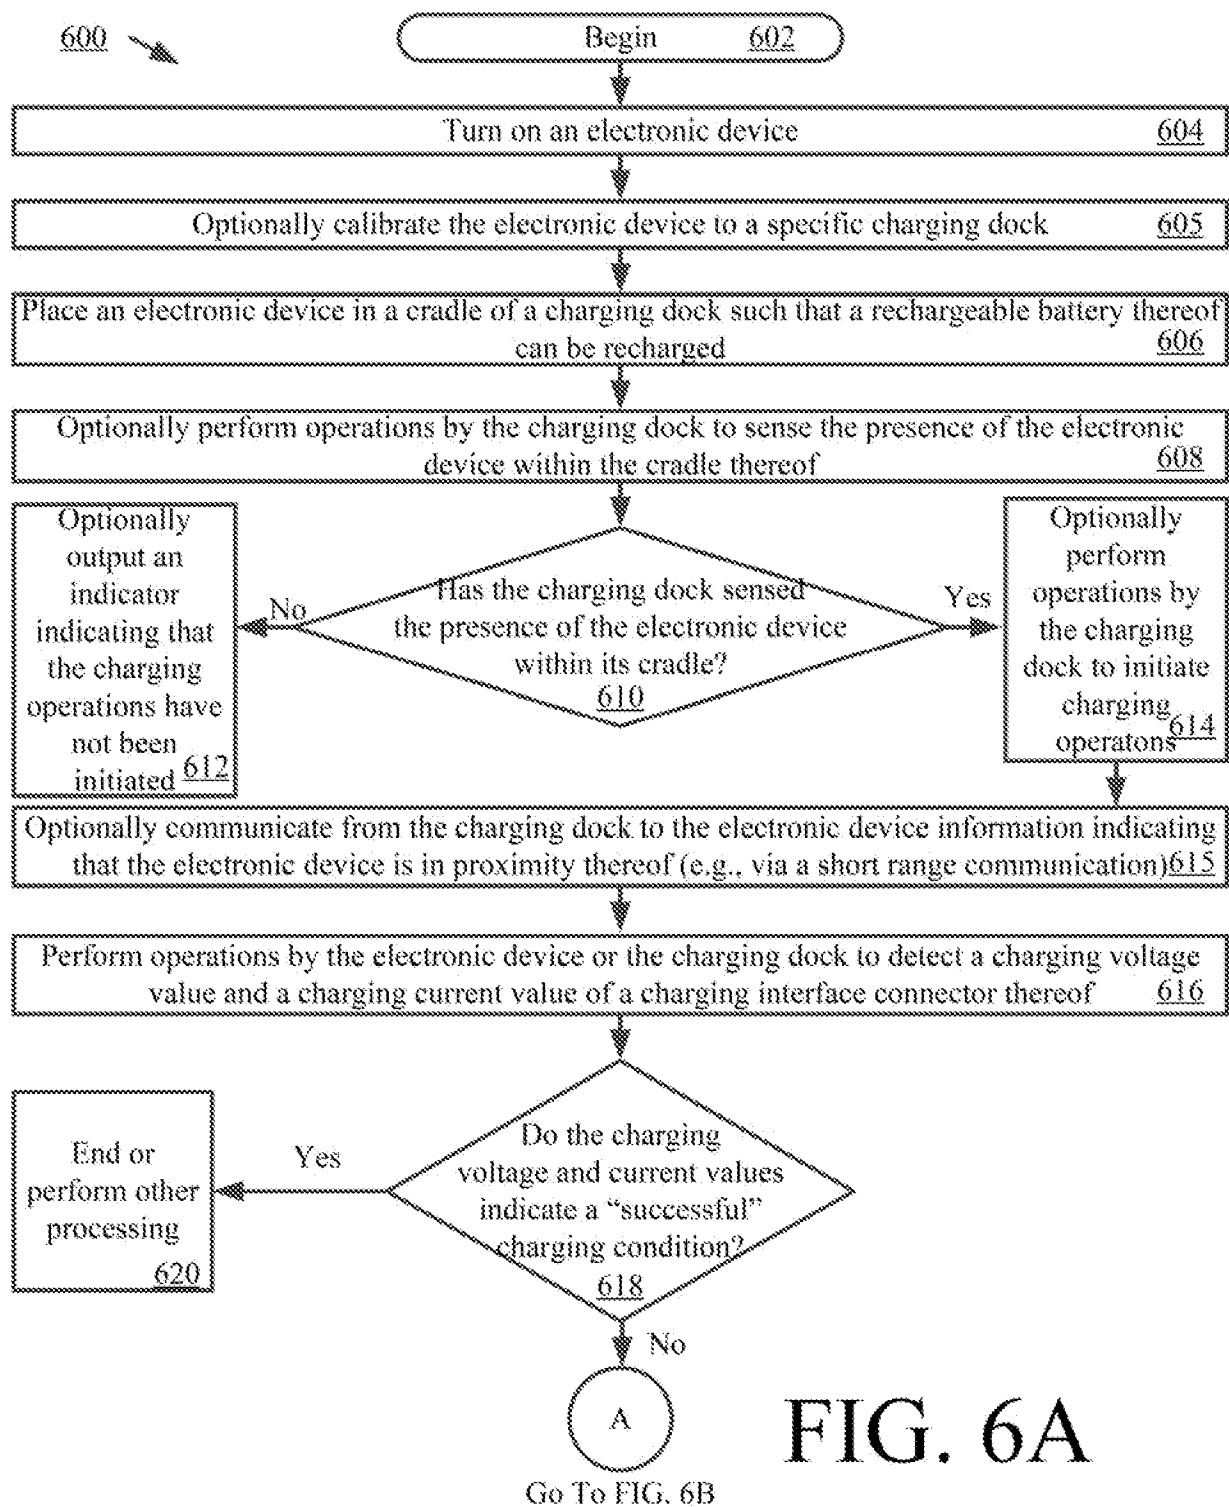
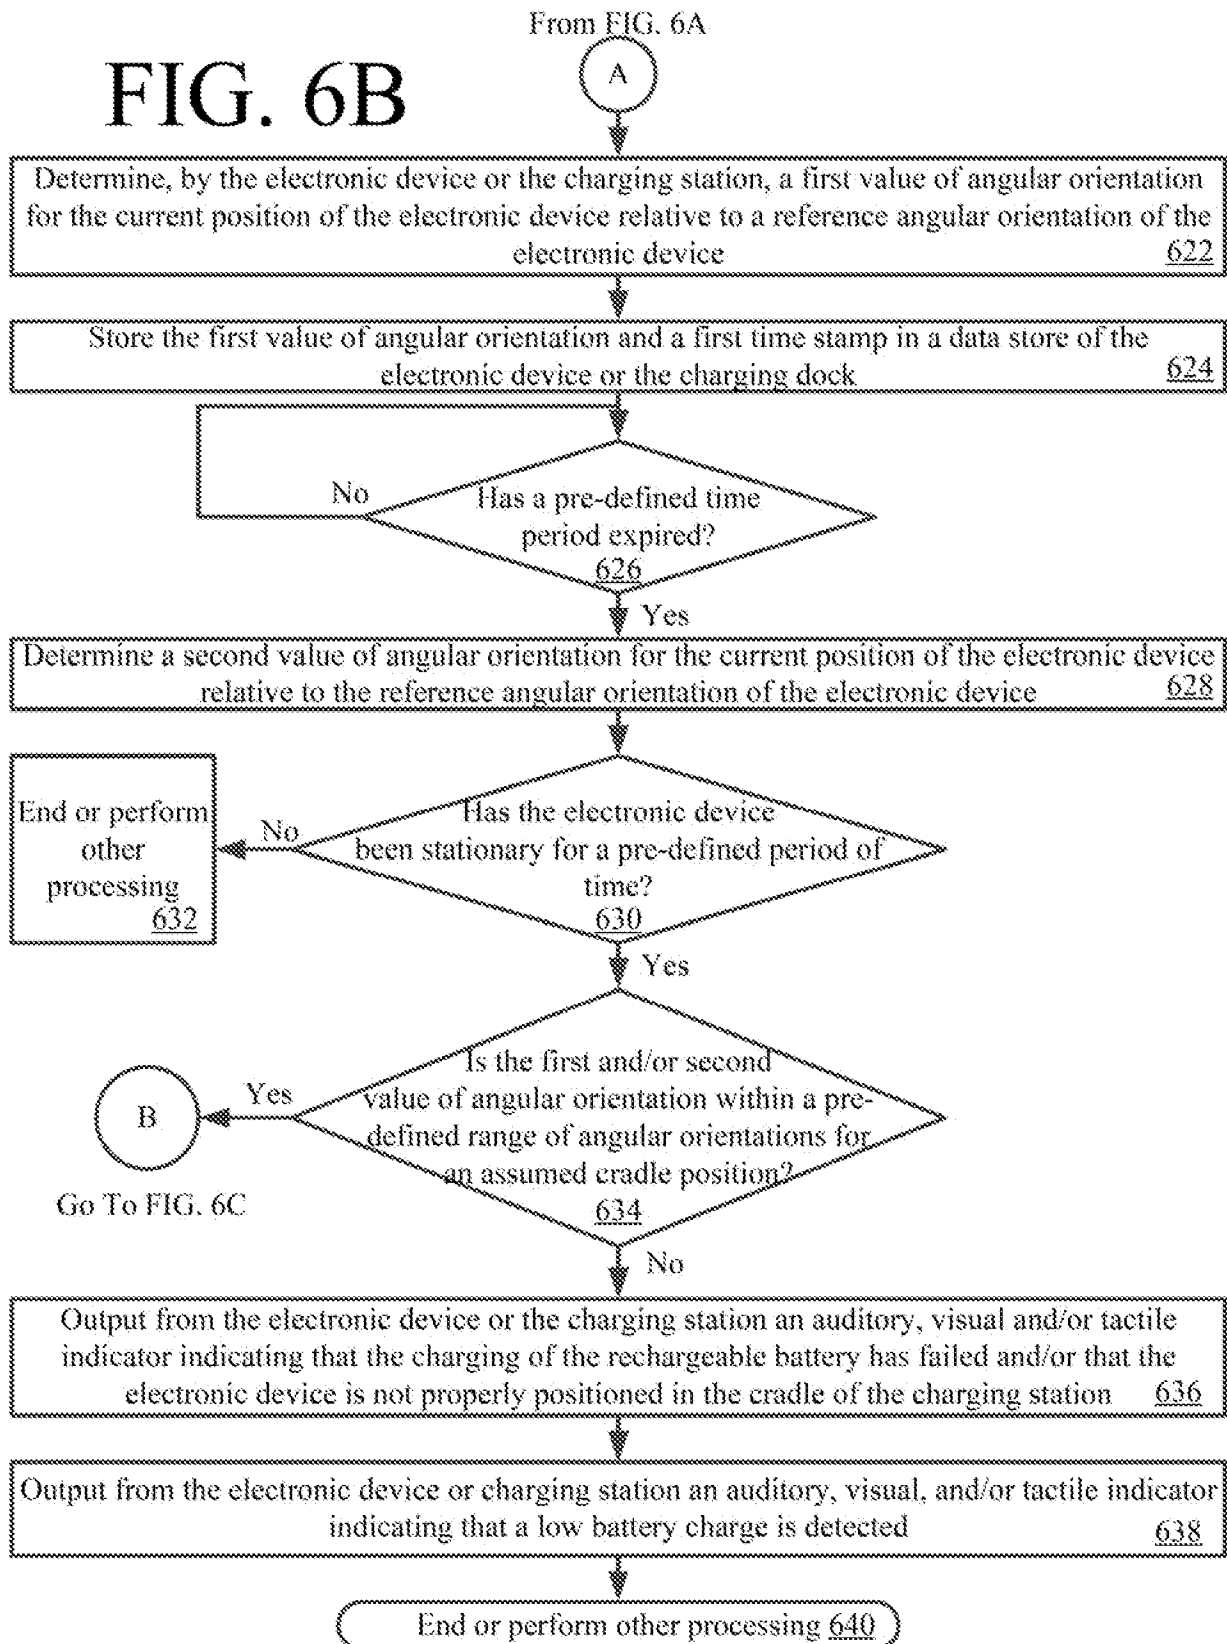


FIG. 5





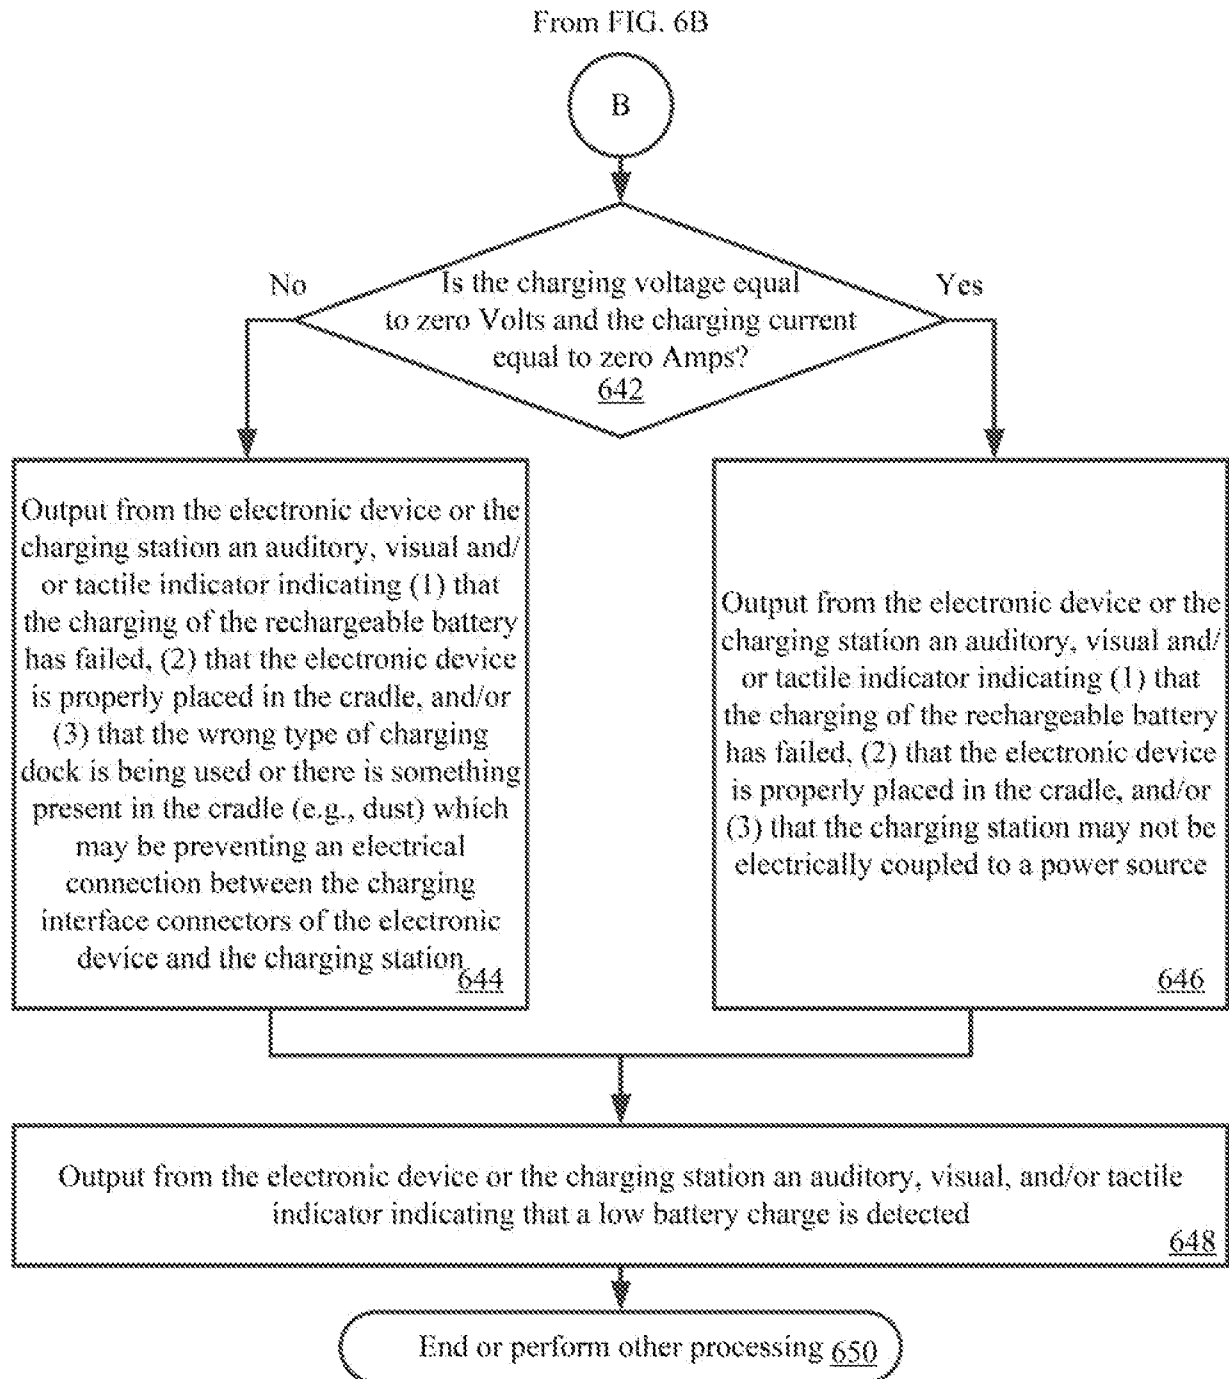


FIG. 6C