



(86) Date de dépôt PCT/PCT Filing Date: 2002/06/28

(87) Date publication PCT/PCT Publication Date: 2003/01/09

(45) Date de délivrance/Issue Date: 2010/11/16

(85) Entrée phase nationale/National Entry: 2003/12/19

(86) N° demande PCT/PCT Application No.: AU 2002/000843

(87) N° publication PCT/PCT Publication No.: 2003/002785

(30) Priorité/Priority: 2001/06/29 (AU PR 6029)

(51) Cl.Int./Int.Cl. *C25C 3/28* (2006.01),
C22B 34/12 (2006.01), *C22B 5/00* (2006.01)

(72) Inventeurs/Inventors:
STREZOV, LES, AU;
RATCHEV, IVAN, AU;
OSBORN, STEVE, AU

(73) Propriétaire/Owner:
METALYSIS LIMITED, GB

(74) Agent: OGILVY RENAULT LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : REDUCTION D'OXYDES METALLIQUES DANS UNE CELLULE ELECTROLYTIQUE

(54) Title: REDUCTION OF METAL OXIDES IN AN ELECTROLYTIC CELL

(57) **Abrégé/Abstract:**

A method of reducing a titanium oxide in a solid state in an electrolytic cell which includes an anode, a cathode formed at least in part from the titanium oxide, and a molten electrolyte which includes cations of a metal that is capable of chemically reducing the cathode titanium oxide, wick method includes operating the cell at a potential that is above a potential at which cations of the metal that is capable of chemically reducing the cathode titanium oxide deposit as the metal on the cathod, whereby the metal chemically reduces the cathode titanium oxide, and which method is characterised by refreshing the electrolyte and/or changing the cell potential in later stages of the operation of the cell as required having regard to the reactions occurring in the cell and the concentration of oxygen in the titanium oxide in the cell in order to produce high purity titanium.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 January 2003 (09.01.2003)


PCT

(10) International Publication Number
WO 03/002785 A1

- (51) International Patent Classification⁷: **C25C 3/28**, C22B 34/12 (74) Agent: **GRIFFITH HACK**; 509 St Kilda Road, Melbourne, VIC 3004 (AU).
- (21) International Application Number: PCT/AU02/00843 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 28 June 2002 (28.06.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: PR 6029 29 June 2001 (29.06.2001) AU (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **BHP BIL-LITON INNOVATION PTY LTD** [AU/AU]; Level 45, 600 Bourke Street, Melbourne, Victoria 3000 (AU).
- (72) Inventors; and (75) Inventors/Applicants (*for US only*): **STREZOV, Les** [AU/AU]; 7 Marin Street, Adamstown, New South Wales 2289 (AU). **RATCHEV, Ivan** [AU/AU]; 2 Young Street, Georgetown, New South Wales 2298 (AU). **OSBORN, Steve** [AU/AU]; 15 Robertson Road, Valentine, New South Wales 2280 (AU).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REDUCTION OF METAL OXIDES IN AN ELECTROLYTIC CELL

(57) Abstract: A method of reducing a titanium oxide in a solid state in an electrolytic cell which includes an anode, a cathode formed at least in part from the titanium oxide, and a molten electrolyte which includes cations of a metal that is capable of chemically reducing the cathode titanium oxide, with method includes operating the cell at a potential that is above a potential at which cations of the metal that is capable of chemically reducing the cathode titanium oxide deposit as the metal on the cathode, whereby the metal chemically reduces the cathode titanium oxide, and which method is characterised by refreshing the electrolyte and/or changing the cell potential in later stages of the operation of the cell as required having regard to the reactions occurring in the cell and the concentration of oxygen in the titanium oxide in the cell in order to produce high purity titanium.

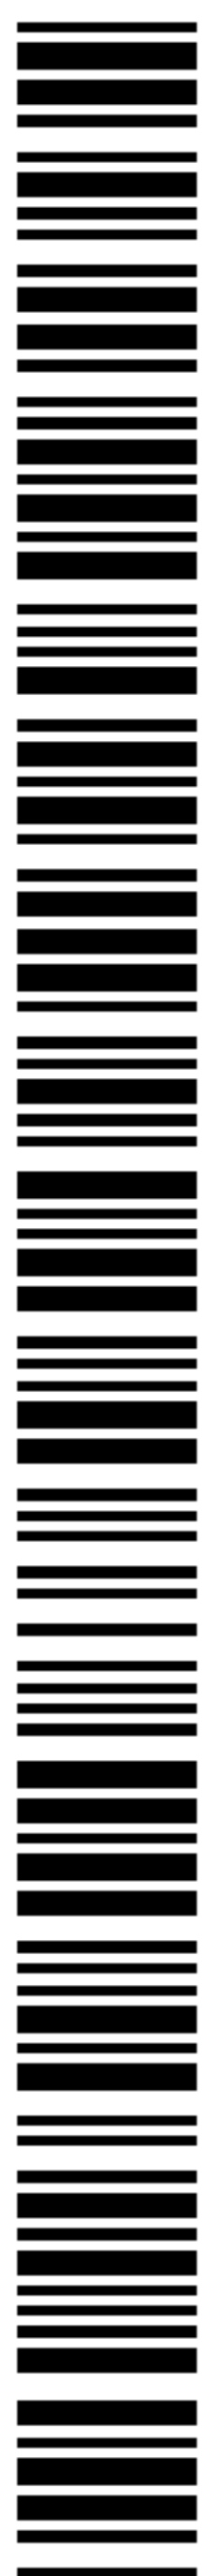

WO 03/002785 A1

- 1 -

REDUCTION OF METAL OXIDES IN AN ELECTROLYTIC CELL

The present invention relates to reduction of metal oxides in an electrolytic cell.

5

The present invention was made during the course of an on-going research project on the electrolytic reduction of titania (TiO_2) carried out by the applicant.

10

During the course of the research project the applicant carried out experimental work on an electrolytic cell that included a graphite crucible that formed an anode of the cell, a pool of molten CaCl_2 -based electrolyte in the crucible, and a cathode that included solid

15

titania.

One objective of the experimental work was to reproduce the results reported in International application PCT/GB99/01781 (Publication no. WO99/64638) in the name of Cambridge University Technical Services Limited and in technical papers published by the inventors.

20

The Cambridge International application discloses two potential applications of a "discovery" in the field of metallurgical electrochemistry.

25

One application is the direct production of a metal from a metal oxide.

30

In the context of this application, the "discovery" is the realisation that an electrolytic cell can be used to ionise oxygen contained in a metal oxide so that the oxygen dissolves in an electrolyte. The Cambridge International application discloses that when a suitable potential is applied to an electrolytic cell with a metal oxide as a cathode, a reaction occurs whereby

35

- 2 -

oxygen is ionised and is subsequently able to dissolve in the electrolyte of the cell.

EP1088113 derived from the Cambridge International application has been granted by the European Patent Office.

5 The claims of EP 1088113 inter alia define a method of electrolytically reducing a metal oxide (such as titania) that includes operating an electrolytic cell at a potential that is lower than the deposition potential of cations in the electrolyte.

The Cambridge European patent does not define what is meant by deposition potential and does not include any specific examples that provide values of the deposition potential for particular cations.

10 However, submissions dated 2 October 2001 to the European Patent Office by the Cambridge patent attorneys, which pre-dated the lodgement of the claims that were ultimately allowed, indicate that they believe that the decomposition potential of an electrolyte is the deposition potential of a cation in the electrolyte.

15 Specifically, page 5 of the submissions state that: "The second advantage described above is achieved in part through carrying out the claimed invention below the decomposition potential of the electrolyte. If higher potentials are used then, as noted in D1 and D2, the cation in the electrolyte deposits on the metal or semi- metal compound. In the example of D1, this leads to calcium deposition and therefore consumption of this reactive metal During operation of the method, the electrolytic
20 cation is not deposited on the cathode".

Contrary to the findings of Cambridge, the experimental work carried out by the applicant has established that it is essential that the electrolytic cell be operated at a

- 3 -

potential that is above the potential at which Ca^{++} cations in the electrolyte can deposit as Ca metal on the cathode.

Specifically, as a consequence of the experimental work, the applicant has invented a
5 method of reducing a metal oxide such as titanium oxides in a solid state in an electrolytic cell which includes an anode, a cathode formed at least in part from the metal oxide, and a molten electrolyte which includes cations of a metal that is capable of chemically reducing the cathode metal oxide, which method includes a step of
operating the cell at a potential that is above a potential at which cations of the metal
10 that is capable of chemically reducing the cathode metal oxide deposit as the metal on the cathode, whereby the metal chemically reduces the cathode metal oxide.

The above method is described in WO03/076690.

In addition to the above, the experimental work (and associated theoretical analysis work) carried out by the applicant has determined a number of important factors that
15 play a role in the actual reduction process.

The relevant experimental data indicates that (i) Cl_2 gas is removed at the anode of the electrolytic cell at potentials well below the theoretical decomposition



- 4 -

potential of the electrolyte CaCl_2 , (ii) $\text{Ca}_x\text{Ti}_y\text{O}_z$, is present at the cathode during some stages of the electrolysis, and (iii) CaO is formed in the molten electrolyte bath.





5

In view of the above, the applicant has concluded that a number of steps are involved in the method of reducing titanium oxides and that some of these steps are represented by reactions (1) to (8) mentioned below.

10 Reactions (1) to (8) relate to reduction of titanium oxides using an electrolytic cell with CaCl_2 (containing O^{2-} anions) as the electrolyte and a graphite anode, with their standard potentials at 950°C .

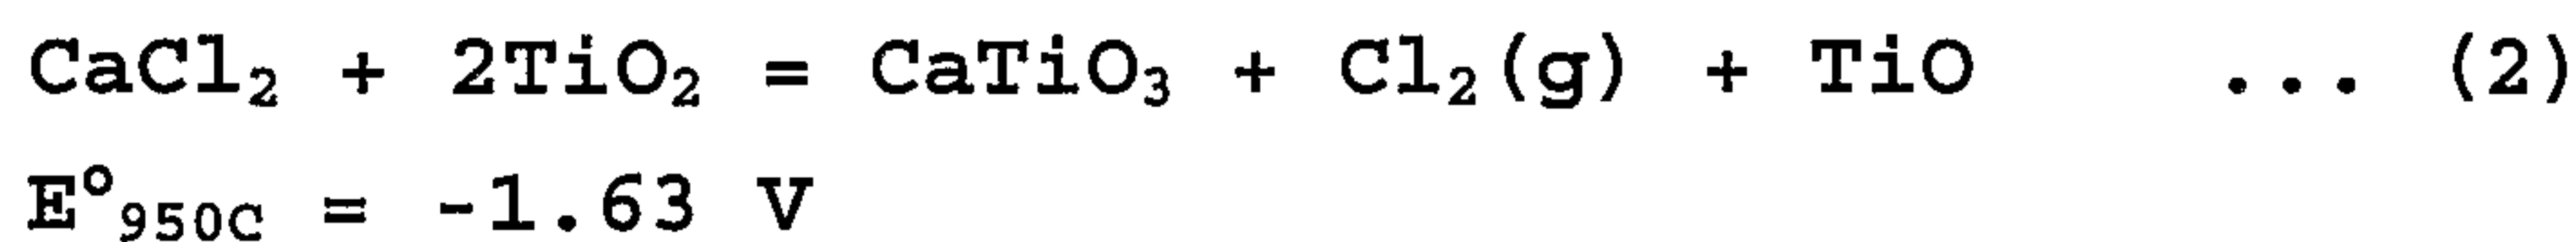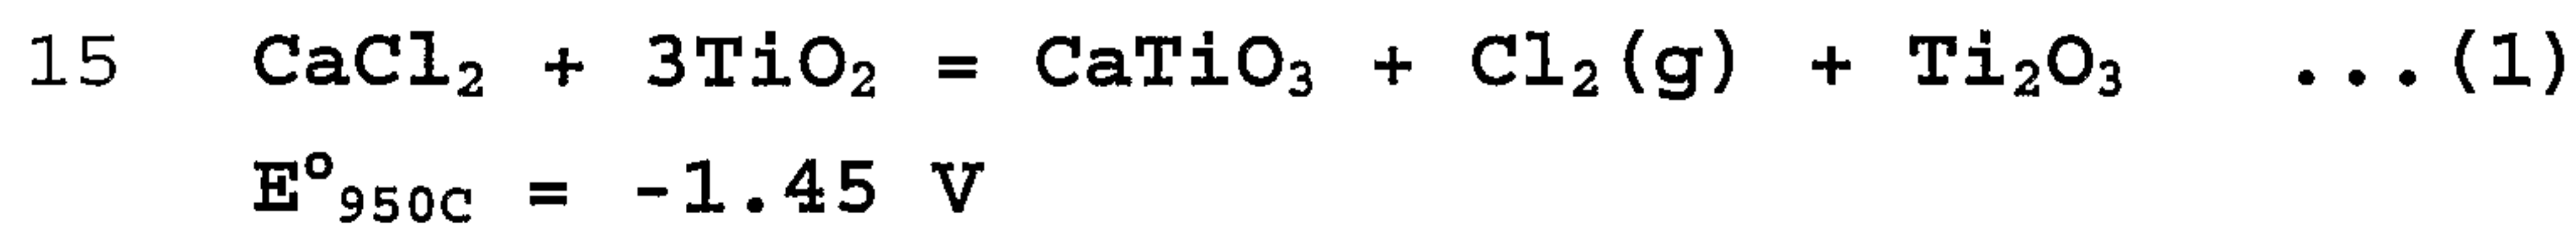

20

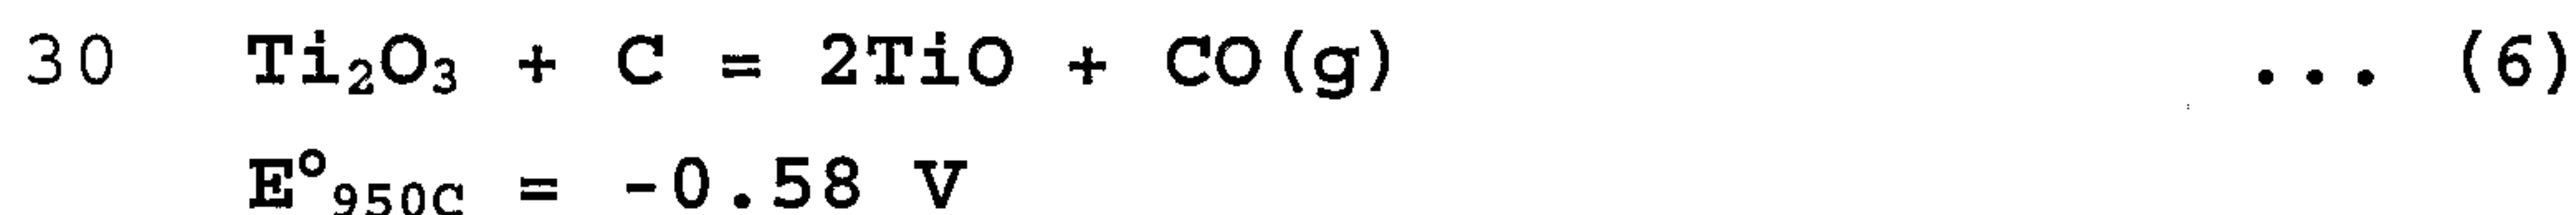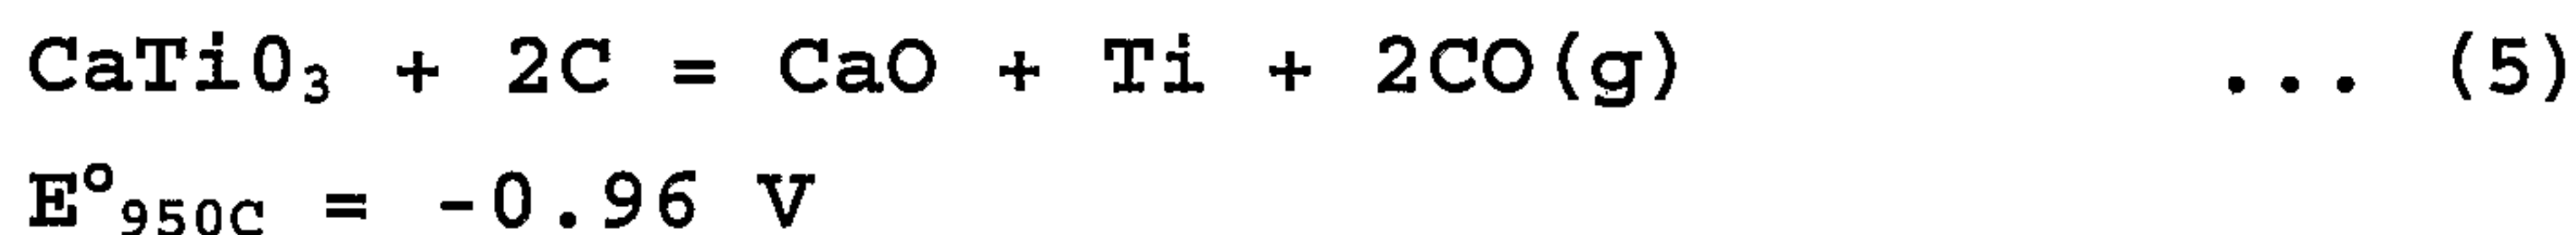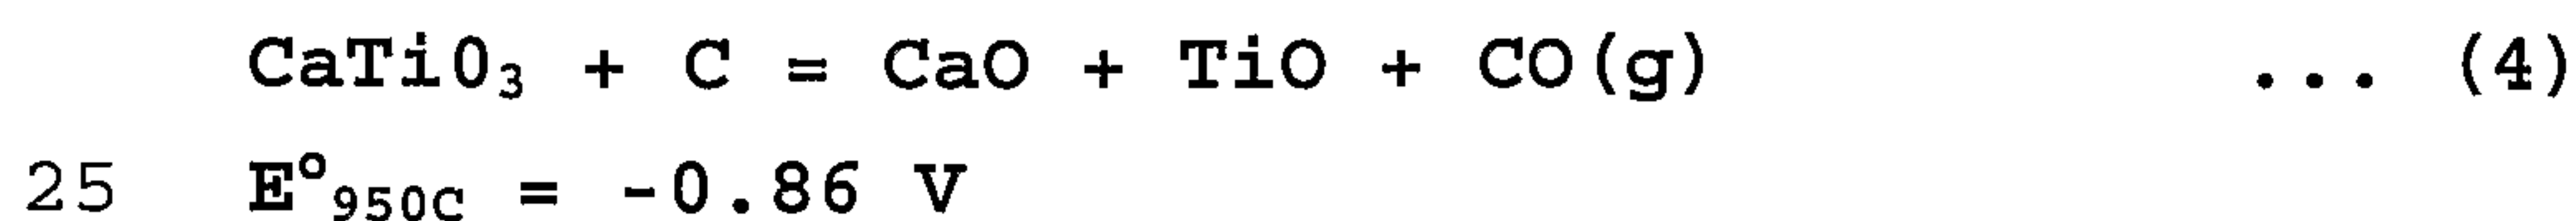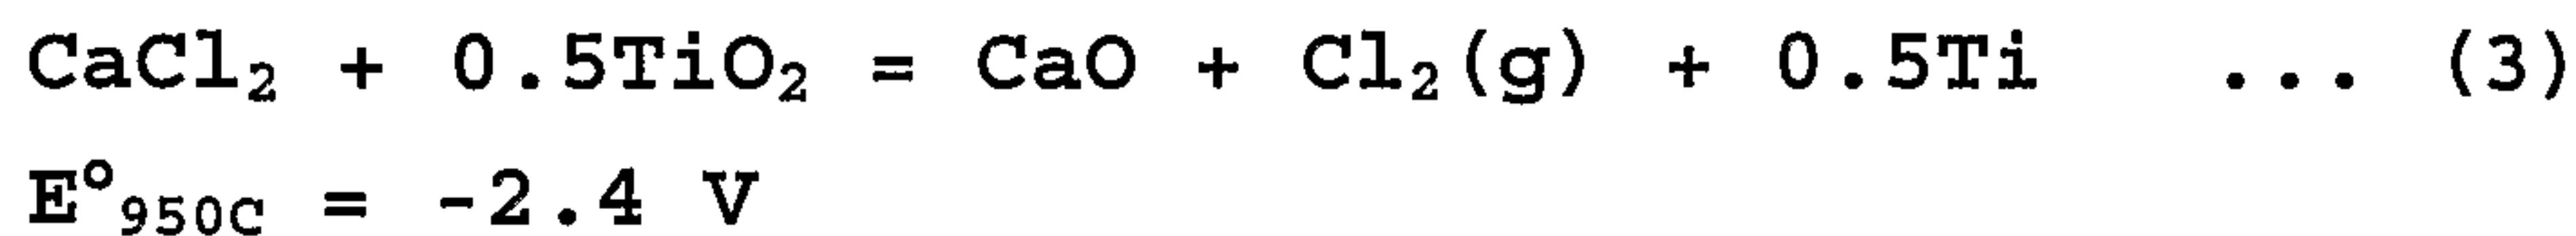

35



- 5 -

Reactions (1) to (8) are not an exhaustive list, of the possible reaction and other reactions can take place. Specifically, the applicant suspects that other reactions, involving titanium suboxides, represented by the formula Ti_nO_{2n-l} , and calcium titanates, represented by the formula $CaTi_nO_{3n+l}$, can take place.

- 5 The invention is further illustrated by reference to the accompanying drawing in which:

FIG. 1 is a graph illustrating the variation of potential with concentration of oxygen in titanium in a cell operating at 950°C.

- 10 With further reference to FIG. 1, the potential of reaction (8) in particular varies with the concentration of oxygen in titanium, and FIG. 1 illustrates the variation of potential with concentration of oxygen in titanium in a cell operating at 950°C. The graph was prepared by using published data.

- 15 It is clear from the graph of FIG. 1 that reaction (8) requires higher potentials at lower concentrations of oxygen and thus there is increased resistance to oxygen removal as the oxygen concentration decreases.

The solubility of different titanium oxides in $CaCl_2$ is not taken into consideration in the calculation of the potentials for reactions (1) to (8). The significance of this is that some of reactions (1) to (8) may take place at potentials that are higher or lower than the potentials stated above at the stated temperature of 950°C.

- 20 For example, reduced activity of TiO will reduce the value of the potentials of reactions (2), (4) and (6) (i. e. make the potentials more positive) and at the same time will increase the potential of reaction (7) (i. e. make it more negative).

- 25 In view of the above, it has been realised that it is likely to be extremely difficult to reduce titanium oxide in an electrolytic cell to titanium (αTi) of high purity, i. e. low concentration of oxygen (no more than 100ppm oxygen) in a single stage operation.

- 6 -

Specifically, the applicant has realised that it is necessary to refresh the electrolyte and/or to change cell potential in a later stage or in later stages of the operation of the electrolytic cell in order to reduce titanium oxide in an electrolytic cell to a titanium of high purity, ie low concentration of oxygen.

- 5 According to the present invention there is provided a method of reducing a titanium oxide in a solid state in an electrolytic cell which includes an anode, a cathode formed at least in part from the titanium oxide, and a molten electrolyte which includes cations of a metal that is capable of chemically reducing the cathode titanium oxide, which method includes operating the cell at a potential that is above a potential at
10 which cations of the metal that is capable of chemically reducing the cathode titanium oxide deposit as the metal on the cathode, whereby the metal chemically reduces the cathode titanium oxide.

- The method is characterised in one aspect by refreshing the electrolyte and/or changing the cell potential in later stages of the operation of the cell as required
15 having regard to the reactions occurring in the cell and the concentration of oxygen in the titanium oxides in the cell in order to produce high purity titanium (α Ti).

- The method is characterised in another aspect by operating the cell at constant current and refreshing the electrolyte in later stages of the operation of the cell as required having regard to the reactions occurring in the cell and the concentration of oxygen in
20 the titanium oxides in the cell in order to produce high purity titanium.

- The method is characterised in still another aspect by refreshing the electrolyte and changing the cell potential in later stages of the operation of the cell as required having regard to the reactions occurring in the cell and the concentration of oxygen in the titanium oxides in the cell in order to produce high purity titanium.

- 25 The term "high purity" is understood to mean that the concentration of oxygen is no more than 100ppm in the titanium.

- 7 -

In effect, the present invention is concerned with selecting the operating conditions of the cell, including cell potential and/or electrolyte composition, during various stages of the operation in the cell having regard to the reactions that take place in the cell.

The applicant envisages at this stage that commercial operations will be at constant
5 current and that it may not be possible to achieve voltages required to remove oxygen to very low levels because of composition changes in the electrolyte. In these circumstances, refreshing and or changing the electrolyte composition is important in order to produce a high purity titanium.

The above-described method makes it possible to produce titanium of high purity with
10 respect to oxygen in an electrolytic cell and without refining or otherwise processing the titanium outside the electrolytic cell.

The method may include refreshing the electrolyte by adding new electrolyte to the existing electrolyte or otherwise adjusting the composition of the electrolyte.

In addition, the method may include carrying out the method in a series of electrolytic
15 cell and successively transferring the partially reduced titanium oxide to each of the cells in the series.

The composition of the electrolyte in each cell may be selected having regard to the reactions occurring in the cell and the concentration of oxygen in the titanium oxide in the cell.

20 The cell potential may be changed at different stages in the method on a continuous or a step-change basis.

Preferably the metal deposited on the cathode is soluble in the electrolyte and can dissolve in the electrolyte and thereby migrate to the vicinity of the cathode titanium oxide.

- 8 -

It is preferred that the electrolyte be a CaCl_2 - based electrolyte that includes CaO as one of the constituents of the electrolyte.

In such a situation it is preferred that the cell potential be above the potential at which Ca metal can deposit on the cathode, i. e. the decomposition potential of CaO .

- 5 The decomposition potential of CaO can vary over a considerable range depending on factors such as the composition of the anode, the electrolyte temperature and electrolyte composition.

In a cell containing CaO saturated CaCl_2 at 1373K (1100°C) and a graphite anode this would require a minimum cell potential of 1.34V.

- 10 It is also preferred that the cell potential be below the decomposition potential of CaCl_2 .

In a cell containing CaO saturated CaCl_2 at 1373K (1100°C) and a graphite anode this would require that the cell potential be less than 3.5V.

- 15 The decomposition potential of CaCl_2 can vary over a considerable range depending on factors such as the composition of the anode, the electrolyte temperature and electrolyte composition.

For example, a salt containing 80% CaCl_2 and 20% KCl at a temperature of 900K (657°C), decomposes to Ca (metal) and Cl_2 (gas) above 3.4V and a salt containing 100% CaCl_2 at 1373K (1100°C) decomposes at 3.0V.

- 20 In general terms, in a cell containing CaO-CaCl_2 salt (not saturated) at a temperature in the range of 600- 1100°C and a graphite anode it is preferred that the cell potential be between 1.3 and 3.5V.

- 9 -

The CaCl_2 -based electrolyte may be a commercially available source of CaCl_2 , such as calcium chloride dihydrate, that partially decomposes on heating and produces CaO or otherwise includes CaO .

Alternatively, or in addition, the CaCl_2 -based electrolyte may include CaCl_2 and CaO
5 that are added separately or pre-mixed to form the electrolyte.

It is preferred that the anode be graphite or an inert anode.

The cell may be of the type disclosed in the drawings of WO03/076690.

- 10 -

Claims:

1. A method of reducing a titanium oxide in a solid state in an electrolytic cell which includes an anode, a cathode formed at least in part from the titanium oxide,
5 and a molten electrolyte which includes cations of a metal that is capable of chemically reducing the cathode titanium oxide, which method includes operating the cell at a potential that is above a potential at which cations of the metal that is capable of chemically reducing the cathode titanium oxide deposit as the metal on the cathode, whereby the metal chemically reduces the cathode titanium oxide, and which method
10 is characterised by operating the cell at constant current and refreshing the electrolyte in later stages of the operation of the cell as required having regard to the reactions occurring in the cell and the concentration of oxygen in the titanium oxides in the cell in order to produce high purity titanium.
- 15 2. The method defined in claim 1 wherein the metal deposited on the cathode is soluble in the electrolyte and can dissolve in the electrolyte and thereby migrate to the vicinity of the cathode titanium oxide.
3. The method defined in claim 1 or claim 2 wherein the electrolyte is a CaCl_2 -
20 based electrolyte that includes CaO as one of the constituents of the electrolyte.
4. The method defined in claim 3 wherein the cell potential is above the potential at which Ca metal can deposit on the cathode.
- 25 5. The method defined in claim 4 wherein the cell potential is above the decomposition potential of CaO .
6. The method defined in claim 3, 4 or 5 wherein the cell potential is below the decomposition potential of CaCl_2 .

30

- 11 -

7. The method defined in any one of claims 3 to 6 wherein at a temperature in the range of 600-1100°C and in a cell comprising a graphite anode the cell potential is between 1.3 and 3.5V.

5 8. The method defined in any one of claims 3 to 7 wherein the CaCl₂-based electrolyte is a commercially available source of CaCl₂ that partially decomposes on heating and produces CaO or otherwise includes CaO.

9. The method defined in claim 8 wherein the commercially available source of
10 CaCl₂ comprises calcium chloride dihydrate.

10. The method defined in any one of claims 3 to 9 wherein the CaCl₂-based electrolyte includes CaCl₂ and CaO that are added separately or pre-mixed to form the electrolyte.

15 11. The method defined in any one of claims 1 to 10 wherein the anode is graphite or an inert anode.

12. A method of reducing a titanium oxide in a solid state in an electrolytic cell
20 which includes an anode, a cathode formed at least in part from the titanium oxide, and a molten electrolyte which includes cations of a metal that is capable of chemically reducing the cathode titanium oxide, which method includes operating the cell at a potential that is above a potential at which cations of the metal that is capable of chemically reducing the cathode titanium oxide deposit as the metal on the cathode,
25 whereby the metal chemically reduces the cathode titanium oxide, and which method is characterised by refreshing the electrolyte and changing the cell potential in later stages of the operation of the cell as required having regard to the reactions occurring in the cell and the concentration of oxygen in the titanium oxides in the cell in order to produce high purity titanium.

30

- 12 -

13. The method defined in claim 12 wherein the metal deposited on the cathode is soluble in the electrolyte and can dissolve in the electrolyte and thereby migrate to the vicinity of the cathode titanium oxide.
- 5 14. The method defined in claim 12 or claim 13 wherein the electrolyte is a CaCl_2 -based electrolyte that includes CaO as one of the constituents of the electrolyte.
15. The method defined in claim 14 wherein the cell potential is above the potential at which Ca metal can deposit on the cathode.
- 10 16. The method defined in claim 15 wherein the cell potential is above the decomposition potential of CaO .
- 15 17. The method defined in claim 15, 16 or 17 wherein the cell potential is below the decomposition potential of CaCl_2 .
18. The method defined in any one of claims 14 to 17 wherein at a temperature in the range of $600\text{-}1100^\circ\text{C}$ and in a cell comprising a graphite anode the cell potential is between 1.3 and 3.5V.
- 20 19. The method defined in any one of claims 14 to 18 wherein the CaCl_2 -based electrolyte is a commercially available source of CaCl_2 that partially decomposes on heating and produces CaO or otherwise includes CaO .
- 25 20. The method defined in claim 8 wherein the commercially available source of CaCl_2 comprises calcium chloride dihydrate.
21. The method defined in any one of claims 14 to 20 wherein the CaCl_2 -based electrolyte includes CaCl_2 and CaO that are added separately or pre-mixed to form the electrolyte.
- 30 22. The method defined in any one of claims 12 to 21 wherein the anode is graphite or an inert anode.

FIG. 1