

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2003249089 B2**

(54) Title
Reclosable bag production

(51) International Patent Classification(s)
B65B 9/06 (2006.01) **B65B 61/18** (2006.01)
B31B 19/90 (2006.01) **B65B 9/20** (2006.01)

(21) Application No: **2003249089** (22) Date of Filing: **2003.08.07**

(87) WIPO No: **WO04/014731**

(30) Priority Data

(31) Number	(32) Date	(33) Country
0218420.8	2002.08.08	GB

(43) Publication Date: **2004.02.25**

(43) Publication Journal Date: **2004.04.08**

(44) Accepted Journal Date: **2009.07.16**

(71) Applicant(s)
Illinois Tool Works Inc.

(72) Inventor(s)
Leighton, Murray Edward Bruce

(74) Agent / Attorney
Griffith Hack, Level 3 509 St Kilda Road, Melbourne, VIC, 3004

(56) Related Art
US 2002/139704
US 6151868
US 6085491
US 5212857

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/014731 A1

(51) International Patent Classification⁷: **B65B 9/08**,
9/20, 61/18, B31B 19/90

(21) International Application Number:
PCT/GB2003/003449

(22) International Filing Date: 7 August 2003 (07.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0218420.8 8 August 2002 (08.08.2002) GB

(71) Applicant (*for all designated States except US*):
SUPREME PLASTICS HOLDINGS LIMITED
[GB/GB]; Supreme House, 300 Regents Park Road,
Finchley, London N3 2TL (GB).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **LEIGHTON, Mur-
ray, Edward, Bruce** [GB/GB]; 20A York Road, Harrogate,
Yorkshire HL1 5HZ (GB).

(74) Agent: **PROBERT, Gareth, David**; W P Thompson &
Co, Eastcheap House, Letchworth Garden City, Hartford-
shire SG6 3DS (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: RECLOSABLE BAG PRODUCTION

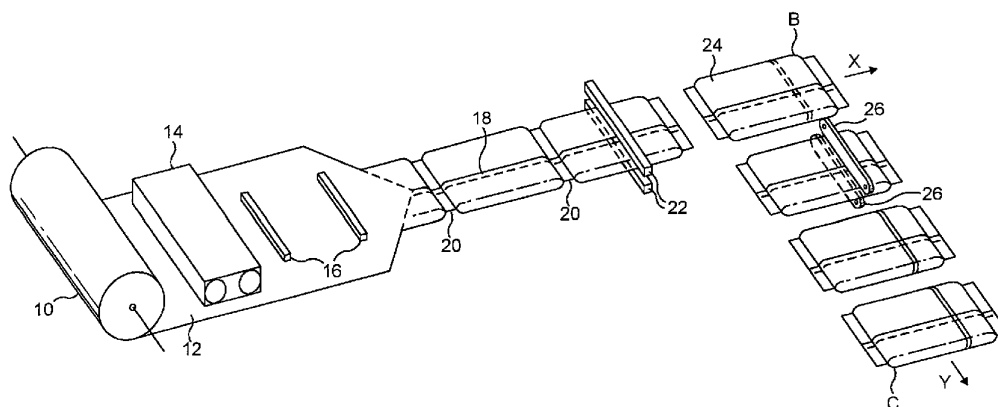

(57) Abstract: The bags are produced on a form-fill-seal machine operating horizontally or vertically. Zipper strips (16) are initially attached to a continuous web (12) which is subsequently formed into a continuous run of bags having end seals (20) and a back seal (18). The continuous run is separated into individual bags and the zipper strips finally attached to the bag walls by application of heat and/or pressure by a belt sealer (26) operating in a direction perpendicular to that of movement of the continuous web.

RECLOSABLE BAG PRODUCTION

This invention relates to the production of reclosable bags which have a reclosable seal formed by resealable and
5 engagable zipper strips attached to opposed walls of the bag.

The reclosable seal is often provided adjacent a nonreclosable seal, for example a heat seal, and allows the bag to be reclosed with the non-reclosable seal has been opened. Such bags are often formed by use of a horizontal or
10 a vertical form-fill-seal machine.

In preparing continuous web material for supply to a form-fill-seal machine, or other apparatus for forming bags having reclosable seals, a continuous length of web material from which the bags are to be formed is advanced in a
15 longitudinal direction and separate lengths of zipper strip are applied to the web so that they are at spaced intervals longitudinally of the web and extend transversely (usually perpendicularly) to the longitudinal direction. Each zipper strip length comprises first and second interengagable
20 profiles which are pre-assembled into at least partial engagement with each other. This is known as "cross-web technology": see our published UK patent application GB-A-2349603 which describes a form-fill-seal machine using that technology. Figure 5 of GB-A-2349603 shows the use of a pair
25 of spring-loaded zipper sealing jaws which operate to seal the zipper strips to the walls of the bag simultaneously with formation of the non-reclosable end seal of the bag. This operation requires a certain time as it is necessary for the zipper sealing jaws to supply heat to the zipper strips to
30 seal them to the bag walls. The step therefore slows down the entire form-fill-seal operation.

According to the present invention, there is provided a method of making a reclosable bag, comprising the steps of:

supplying a continuous web of bag-forming material in a
35 first direction to a bag-forming station;

attaching to the continuous web a plurality of zipper strips at intervals spaced in the first direction and extending transversely of the web, each zipper strip comprising first and second interengagable profiles pre-assembled into at least partial engagement with each other;
5 forming end-sealed bags at the bag-forming station, each bag having opposed first and second walls, at least one of which is formed from the said continuous web of material, first and second end seals, and therebetween at least one of the zipper strips attached to a respective wall of the bag;
10 and

after the step of forming the end-sealed bags, treating the bags adjacent the respective zipper strip profiles in order to secure the profiles to the first and second walls
15 respectively and to form an openable and reclosable seal inside the bags.

In a method according to the present invention, the respective zipper strip profiles are not finally attached to the bag walls until after the bag has been formed.

20 In a preferred form of the invention, the zipper strips are initially attached to the continuous web only sufficiently to hold them in position: final securement takes place only after formation of the bag.

The step of treatment of the walls of the bag to secure the zipper profiles may take place before or after the web
25 has been separated into individual bags but preferably takes place after separation of the continuous web into individual bags.

Initial attachment and/or securement of the zipper strip profiles to the bag walls can be by means of pressure-sensitive or heat-sensitive adhesive, by fusing of the material of the bags and/or the strips under the application of heat and/or pressure, or by any other suitable means. The means for initial attachment and for subsequent securement
30 may be the same or different.
35

Separation of the continuous web into individual bags prior to the securement of the zipper strips to the bag walls allows securement to take place at a securement station prior to which the bags are reorientated so that they are fed to
5 the securement station with their zipper strips aligned along a common axis.

The common axis may be parallel to the direction of supply of the continuous web but is preferably transverse to that direction, most preferably perpendicular thereto.
10 Preferably, the bags are treated by the application of heat and/or pressure to secure the zipper-strip profiles to the bags.

Conveniently, the bags are treated by a belt sealer. Advantageously, the direction of supply of the
15 continuous web is substantially horizontal and the common axis is substantially horizontal.

Preferably, the direction of supply of the continuous web is substantially vertical and the common axis is substantially horizontal.

20 The invention also provides an apparatus for making a reclosable bag, the apparatus comprising successively:

means for supplying a continuous web of bag-forming material in a first direction:

means for attaching to the continuous web a plurality of
25 zipper strips at intervals spaced in the first direction and extending transversely of the web, each zipper strip comprising first and second interengagable profiles pre-assembled into at least partial engagement with each other;

a bag-forming station at which are formed bags having
30 opposed first and second walls, at least one of which is formed from the continuous web of material, first and second end seals and therebetween and attached to a respective wall of the bag at least one of the zipper strips; and

means located after the bag-forming station for treating
35 the bags adjacent the respective zipper strip profiles to secure the profiles to the first and second walls

respectively and to form an openable and reclosable seal inside the bags.

Preferably, the apparatus comprises means located between the bag-forming station and the securement means for
5 separating the continuous web into individual bags.

Advantageously, the apparatus comprises means located between the separating means and the securement means for reorientating the separated bags so that their respective zipper strips are aligned one with another along a common
10 axis.

The securement means preferably comprises means for conveying the bags through a treatment zone, where the bags are treated with heat and/or pressure, or otherwise, to secure the zipper-strip profiles to the walls of the bags.
15

The conveying means advantageously engage the zipper-strip profiles, whilst making contact with the respective outer surfaces of the walls of the bags.

Preferably, the conveying means also effect the treatment to secure the profiles to the bag walls.
20 Conveniently, this is achieved by application of heat and/or pressure by way of the conveying means, for example by the conveying means comprising a belt sealer.

In the present invention, the preferred features of separation of the individual bags and reorientation of the
25 bags before securement of the zipper strips allows the rate of bag production to be high because the zipper strips can be secured in a shorter time period than could be achieved by securement whilst the bags still formed a continuous web.

An embodiment of the invention will now be described by
30 way of example with reference to the drawing of this specification, in which:

Figure 1 is a somewhat schematic drawing of a horizontal form-fill-seal apparatus using cross-web technology;

Figure 2 is a longitudinal sectional view of a bag at an
35 intermediate stage in the production of bags using the apparatus of figure 1, the bag being as at the stage

indicated by the letter "B" in figure 1;

Figure 3 is a view similar to figure 2 but showing the finished bag, as at the stage indicated by the letter "C" in figure 1; and

5 Figure 4 is a schematic drawing of a vertical form-fill-seal apparatus using cross-web technology.

Referring to figure 1, this shows a storage roll 10 of web material 12, for example polyethylene. The web material 12 is advanced from the roll 10 past a cross-web applicator 10 14 at which lengths of zipper 16 are attached to the web at spaced intervals in the direction of advancement of the web, shown by the arrow "X" in figure 1. The cross-web applicator is preferably as described in our published International Patent Application WO-A-03/097341 but any suitable apparatus 15 may be used, for example that described in GB-A-2349603 referred to above.

Each length of zipper consists of a first and a second interengagable profile, which are respectively "male" and "female" in cross-sectional shape. Each profile has a 20 respective surface for attachment to the web material. An example of suitable zipper profiles can be seen in our published International Patent Application WO-A-02/06040. The attachment surfaces extend in spaced parallel planes when the profiles are in engagement with each other. As seen in 25 figure 1, the lengths of zipper 16 are attached to the web 12 by the formation of a tack seal between the flange of one zipper profile and the web material 12. Each length of zipper 16 is approximately one-half the width of the web material 12. The lengths are positioned approximately mid- 30 way between the longitudinal edges of the web material.

After application of the lengths of zipper 16, the web material 12 is formed into a tubular shape by the form-fill-

seal apparatus. This is shown only schematically in figure 1. In this operation, the longitudinal edges of the web material 12 are brought together to form a back seal 18 which is made by the action of heated clamping bars (not shown).
5 Similarly, transverse end seals 20 are formed by the action of further heated clamping bars 22. During this operation, product is introduced into the bags being formed. The means for doing this are not shown in figure 1 but they are well-known in the field of form-fill-seal apparatus. Formation of
10 the back seal 18 and the end seals 20 produces a continuous length of bags which is then cut into separate individual bags 24 by cutting means (again not shown but well-known in the field of form-fill-seal apparatus).

An individual bag as first produced is shown by the
15 letter "B" in figure 1 and in longitudinal section in figure 2.

Figure 2 shows the bag to have an end seal 20 at each end and a length of zipper 16 tack-sealed to one wall of the bag inside the bag and adjacent one of the end seals 20. The
20 tack-seal of the length of zipper 16 to the material of the bag is between the outer surface of one zipper profile and the bag. The other zipper profile is engaged with the first zipper profile, at least to the extent necessary to hold the profiles in the correct alignment for their engagement.
25 Normally, the profiles will be fully engaged.

After the continuous length of bags has been cut into individual bags 24, the bags are moved laterally from the direction of advancement of the web 12, shown by the arrow "X" in figure 1, into a line perpendicular thereto and shown by
30 the arrow "Y" in figure 1.

After lateral movement of the bags 24 into the direction of the arrow "Y" the bags are engaged by a belt sealer comprising a pair of heated gripping guides 26. One of the guides 26 engages the outer surface of the bag 24 immediately
35 adjacent the respective zipper profile which is tack-sealed

to the inner surface of the bag. The relatively stiff zipper profile facilitates this engagement between the respective guide 26 and the bag 28. At the same time, the other guide 26 engages the other zipper profile through the material of 5 the bag.

The engagement of the guides 26 with the zipper 16 through the material of the bag not only allows the bags to be conveyed further in the direction of arrow "Y" but also effects complete sealing of the zipper profiles to the 10 respective inner surfaces of the walls of the bag. This complete sealing can be brought about by heat or pressure, or by both, or by any other suitable means. At the same time, the zipper profiles are, if not already, brought into complete engagement with each other.

15 The final bag 28 is shown by the letter "C" in figure 1 and in longitudinal section in figure 3. It will be seen from figure 3 that the final bag has non-reclosable end seals 20 and a reclosable seal formed by the zipper 16 inside the bag. This allows the bag to be resealed by means of the zipper 16 20 after it has been opened by opening the non-reclosable end seal 20 adjacent the zipper 16.

The present invention is equally applicable to vertical form-fill-seal machines and to methods operated on such machines, as can be seen from the embodiment shown in figure 25 4.

In figure 4, an apparatus for forming, filling and sealing bags in the vertical direction is shown which works in a substantially similar way to that shown in figure 1 and described above. A storage roll 28 feeds web material 30 past 30 a cross-web applicator 32 which attaches lengths of zipper 34 at spaced intervals. The web material 30 is formed into a tubular shape around the vertical form-fill-seal apparatus 36. As described above, the web material 30 is formed, filled, sealed and separated to give individual bags, such as bag 38. 35 This whole process is performed in the vertically downward

direction shown as "V". Once the bags are separated, they are moved in the horizontal direction "H" perpendicular to the direction "V". The bags are then passed through a belt sealer comprising a pair of heated gripping guides

5 42. As shown in figure 4, the outer surfaces of bag 40 are gripped between the guides 42 which both complete sealing of the zipper profiles to the respective inner surfaces of the walls of the bag 40 and direct the bag 40 in the direction "H". As mentioned above, this process

10 also ensures that the zipper profiles are brought into complete engagement with each other, to give a completed sealed bag 44.

It will be noted that, in the bag production method of the invention, the sealed bag (as in figure 2) is first

15 formed with the zipper attached to only one wall thereof. The zipper is attached to the other wall after formation of the sealed bag.

The present invention may be embodied in other specific forms without departing from the spirit or

20 essential attributes thereof and, accordingly, reference should be made to the appended claims, rather than to the foregoing specification, as indicating the scope of the invention.

In the claims which follow and in the preceding

25 description of the invention, except where the context requires otherwise due to express language or necessary implication, the word "comprise" or variations such as "comprises" or "comprising" is used in an inclusive sense, i.e. to specify the presence of the stated features but

30 not to preclude the presence or addition of further features in various embodiments of the invention.

It is to be understood that, if any prior art publication is referred to herein, such reference does not constitute an admission that the publication forms a part

35 of the common general knowledge in the art, in Australia or any other country.

CLAIMS

1. A method of making a reclosable bag, comprising the steps of:

5 supplying a continuous web of bag-forming material in a first direction to a bag-forming station;

attaching to the continuous web a plurality of zipper strips at intervals spaced in the first direction and extending transversely of the web, each zipper strip
10 comprising first and second interengagable profiles pre-assembled into at least partial engagement with each other;

forming end-sealed bags at the bag-forming station, each bag having opposed first and second walls, at least one of which is formed from the said continuous web of material,
15 first and second end seals, and therebetween at least one of the zipper strips attached to a respective wall of the bag; and

after the step of forming the end-sealed bags, treating the bags adjacent the respective zipper strip
20 profiles in order to secure the profiles to the first and second walls respectively and to form an openable and reclosable seal inside the bags.

2. A method according to claim 1, in which the zipper strips are initially attached to the continuous web only
25 sufficiently to hold them in position, final securement taking place in the said step of treating the bags.

3. A method according to claim 1 or 2, in which the step of treating the bags takes place after the web has been separated into individual bags.

30 4. A method according to claim 1 or 2, in which the step of treating the bags takes place before the web has been separated into individual bags.

5. A method according to claim 3, in which the treating step takes place at a securement station, prior to
35 which the bags are reorientated so that they are fed to the

securement station with their zipper strips aligned along a common axis.

6. A method according to claim 5, in which the common axis is transverse to the direction of supply of the continuous web.

7. A method according to any preceding claim, in which the bags are treated by the application of heat and/or pressure to secure the zipper-strip profiles to the bags.

8. A method according to any preceding claim, wherein the bags are treated by a belt sealer.

9. A method according to any preceding claim, wherein the direction of supply of the continuous web is substantially horizontal and the common axis is substantially horizontal.

10. A method according to any of claims 1 to 8, wherein the direction of supply of the continuous web is substantially vertical and the common axis is substantially horizontal.

11. An apparatus for making a reclosable bag, the apparatus comprising successively:

means for supplying a continuous web of bag-forming material in a first direction;

means for attaching to the continuous web a plurality of zipper strips at intervals spaced in the first direction and extending transversely of the web, each zipper strip comprising first and second interengagable profiles pre-assembled into at least partial engagement with each other;

a bag-forming station at which are formed bags having opposed first and second walls, at least one of which is formed from the continuous web of material, first and second end seals and therebetween and attached to a respective wall of the bag at least one of the zipper strips; and

means located after the bag-forming station for treating the bags adjacent the respective zipper strip profiles to secure the profiles to the first and second walls respectively and to form an openable and reclosable seal

inside the bags.

12. An apparatus according to claim 11, comprising means located between the bag-forming station and the treatment means for separating the continuous web into
5 individual bags.

13. An apparatus according to claim 11, comprising means located downstream of the treatment means for separating the continuous web into individual bags.

14. An apparatus according to claim 12, comprising
10 means located between the separating means and the treatment means for reorientating the separated bags so that their respective zipper strips are aligned one with another along a common axis.

15. An apparatus according to claim 14, in which the
15 common axis is transverse to the direction of supply of the continuous web.

16. An apparatus according to claim 12, 14 or 15, in which the treatment means comprises means for conveying the bags through a treatment zone where the bags are treated to
20 secure the zipper-strip profiles to the walls of the bags.

17. An apparatus according to claim 16, in which the conveying means engage the zipper-strip profiles, whilst making contact with the respective outer surfaces of the walls of the bags.

25 18. An apparatus according to claim 17, in which the conveying means effect the treatment to secure the profiles to the bag walls.

19. An apparatus according to claim 18, in which the conveying means comprise a belt sealer.

30 20. An apparatus according to any of claims 11 to 19, in which the means for treating the bags apply heat and/or pressure to secure the zipper-strip profiles to the bags.

21. An apparatus according to any of claims 11 to 20, wherein the direction of supply of the continuous web is
35 substantially horizontal and the common axis is substantially horizontal.

22. An apparatus according to any of claims 11 to 20, wherein the direction of supply of the continuous web is substantially vertical and the common axis is substantially horizontal.

5 23. A reclosable bag made by a method according to any of the claims 1 to 10.

24. A method of making a reclosable bag, the method being substantially as hereinbefore described with reference to the drawings.

10 25. An apparatus for making a reclosable bag, the apparatus being substantially as hereinbefore described with reference to the drawings.

1 / 2

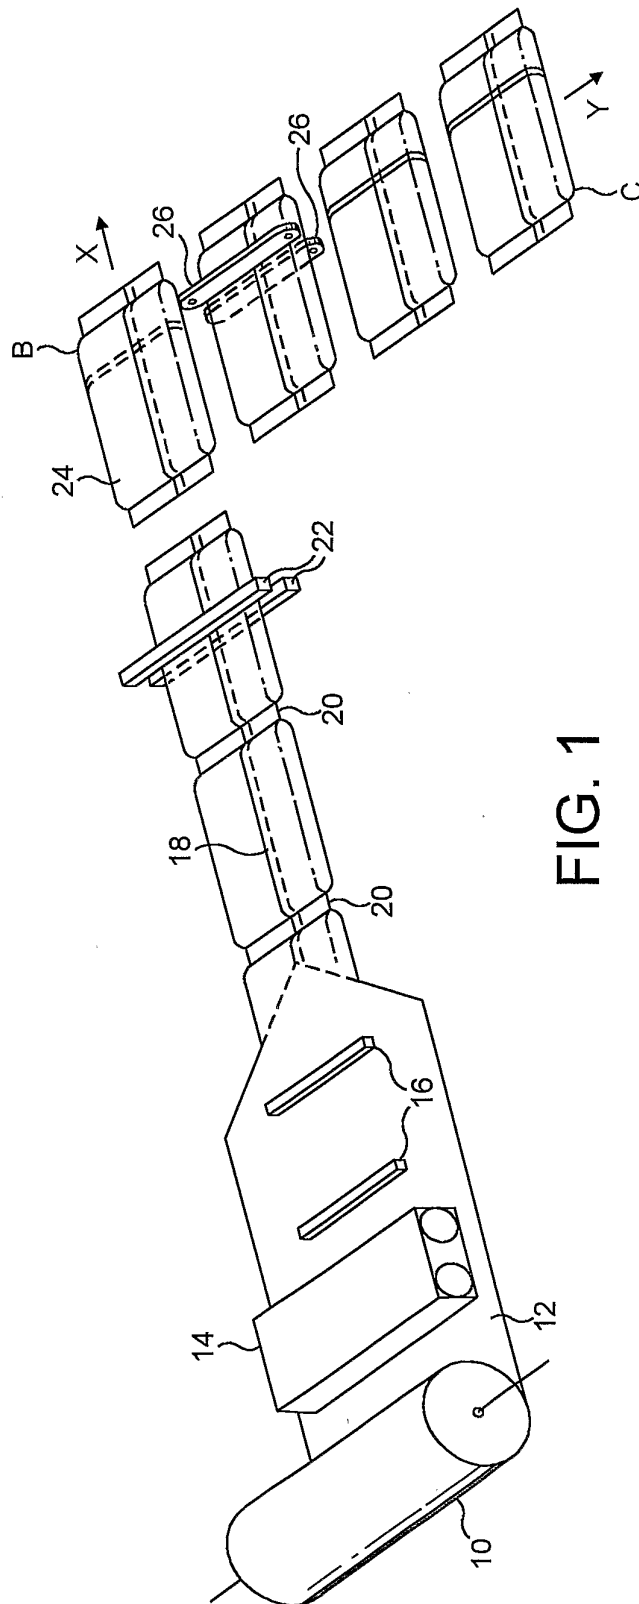


FIG. 1

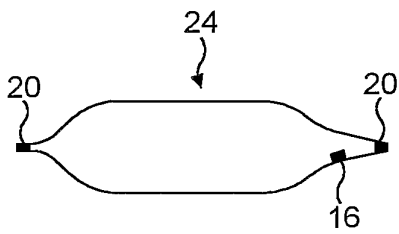


FIG. 2

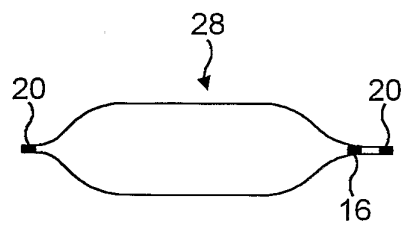


FIG. 3

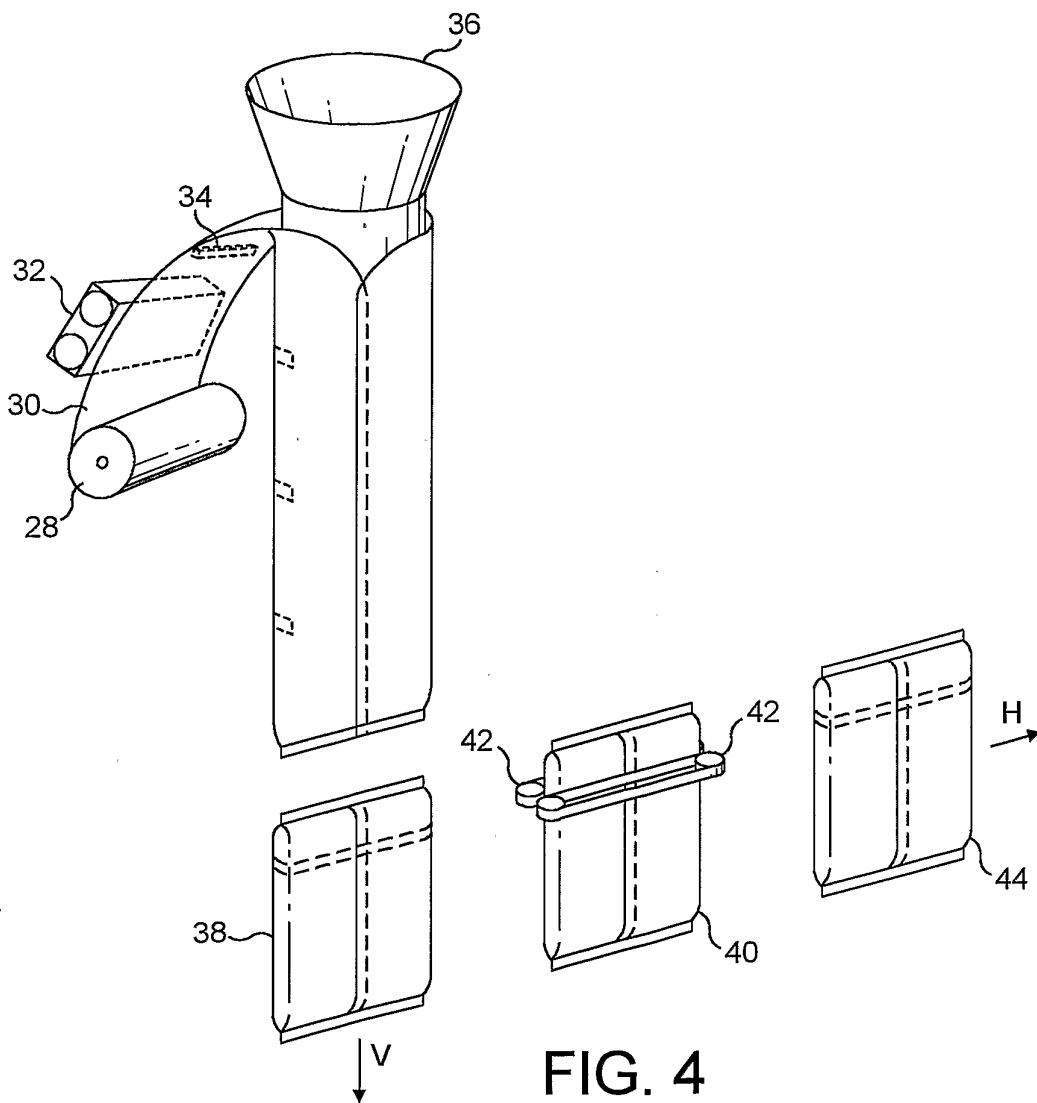


FIG. 4