

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199715117 B2**
(10) Patent No. **708221**

(54) Title
Organic carbonate additives for nonaqueous electrolyte in alkali metal electrochemical cells

(51)⁶ International Patent Classification(s)
H01M 006/14

(21) Application No: **199715117** (22) Application Date: **1997.03.06**

(30) Priority Data

(31) Number (32) Date (33) Country
638894 1996.04.25 US

(43) Publication Date : **1997.10.30**
(43) Publication Journal Date : **1997.10.30**
(44) Accepted Journal Date : **1999.07.29**

(71) Applicant(s)
Wilson Greatbatch Ltd.

(72) Inventor(s)
Hong Gan; Esther S. Takeuchi

(74) Agent/Attorney
WATERMARK PATENT and TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122

(56) Related Art
US 5358620



AU9715117

(12) PATENT ABSTRACT (11) Document No. AU-A-15117/97
(19) AUSTRALIAN PATENT OFFICE

- (54) Title
ORGANIC CARBONATE ADDITIVES FOR NONAQUEOUS ELECTROLYTE IN ALKALI METAL
ELECTROCHEMICAL CELLS
- International Patent Classification(s)
(51)⁶ H01M 006/14
- (21) Application No. : 15117/97 (22) Application Date : 06/03/97
- (30) Priority Data
- (31) Number (32) Date (33) Country
638894 25/04/96 US UNITED STATES OF AMERICA
- (43) Publication Date : 30/10/97
- (71) Applicant(s)
WILSON GREATBATCH LTD.
- (72) Inventor(s)
HONG GAN; ESTHER S. TAKEUCHI
- (74) Attorney or Agent
WATERMARK PATENT & TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122
- (57)

An alkali metal, solid cathode, nonaqueous electrochemical cell capable of delivering high current pulses, rapidly recovering its open circuit voltage and having high current capacity, is described. The stated benefits are realized by dissolving organic additives, preferably carbonate additives in the electrolyte.

CLAIM

5. An electrochemical cell, which comprises:
- a) an anode comprising an alkali metal which is electrochemically oxidizable to form metal ions in the cell upon discharge to generate electron flow in an external electrical circuit connected thereto;
 - b) a cathode comprising a cathode active material wherein the electron flow is generated by intercalation of the metal ions formed by oxidation of the alkali metal anode into the cathode active material; and
 - c) a nonaqueous electrolyte operatively associated with the anode and the cathode, the electrolyte comprising an alkali metal salt dissolved therein, wherein the alkali metal salt is similar to the alkali metal comprising the anode, the improvement in the electrolyte comprising an organic additive dissolved

.../2

therein, wherein the additive is either linear or cyclic and comprises covalent O-X and O-Y bonds on opposite sides of a carbonyl group and having the general structure of X-O-CO-O-Y, wherein at least one of the O-X and the O-Y bonds has a dissociation energy less than about 80 kcal/mole and wherein X and Y are the same or different and X is selected from NR_1R_2 and $\text{CR}_3\text{R}_4\text{R}_5$, and Y is selected from $\text{NR}'_1\text{R}'_2$ and $\text{CR}'_3\text{R}'_4\text{R}'_5$, and wherein R_1 , R_2 , R_3 , R_4 , R_5 , R'_1 , R'_2 , R'_3 , R'_4 and R'_5 are the same or different, and at least R_3 is an unsaturated substituent if X is $\text{CR}_3\text{R}_4\text{R}_5$ and Y is $\text{CR}'_3\text{R}'_4\text{R}'_5$.

ABSTRACT

An alkali metal, solid cathode, nonaqueous electrochemical cell capable of delivering high current pulses, rapidly recovering its open circuit voltage and having high current capacity, is described. The stated benefits are realized by dissolving organic additives, preferably carbonate additives in the electrolyte.

CORPORATE:50465_1 (12XT_1)

50465_1 (12XT_1)

AUSTRALIA

Patents Act 1990

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Application Number:

Lodged:

Invention Title:

ORGANIC CARBONATE ADDITIVES FOR NONAQUEOUS ELECTROLYTE
IN ALKALI METAL ELECTROCHEMICAL CELLS

The following statement is a full description of this invention, including the
best method of performing it known to us :-

ORGANIC CARBONATE ADDITIVES FOR NONAQUEOUS
ELECTROLYTE IN ALKALI METAL ELECTROCHEMICAL CELLS

CROSS-REFERENCE

The present application is a continuation-in-part application of application Serial No. 08/405,699 filed March 17, 1995, now abandoned.

BACKGROUND OF INVENTION

1. Field of the Invention

The present invention relates to a nonaqueous electrolyte alkali metal electrochemical cell, and in particular, a lithium cell designed for high current pulse discharge applications.

2. Description of the Prior Art

It is well known that the anode surface film, known as solid-electrolyte interphase (SEI), plays a very important role in the discharge performance of either a primary or a secondary alkali metal electrochemical cell, and in particular, a lithium cell. A good SEI benefits cell performance, including high discharge capacity, long useful life, better rechargeability for secondary cells and little or no voltage delay during high current pulse applications. Since the formation of a surface film is unavoidable for alkali metal, and in particular, lithium metal anodes, and for lithium intercalated carbon anodes, due to their low potential and high reactivity towards organic electrolytes, much effort has been focused on modification of the chemical composition and morphology of the anode surface film.

The ideal anode surface film should be electrically insulating and ionically conducting. While most alkali metal, and in particular, lithium electrochemical systems meet the first requirement, the second requirement is difficult to achieve. As

a result, higher impedance builds up inside the cell due to this surface layer formation which often results in lower discharge voltage and lower cell capacity. In the case of a cell subjected to high current pulse discharge, large voltage delay and voltage drop may occur and limit the effectiveness of the cell under these conditions. The surface film also affects the efficiency and cyclability of secondary alkali metal cells.

One of the known solutions to the above problem is to saturate the electrolyte solution with carbon dioxide CO₂. Cycling efficiency is improved dramatically in secondary cell systems having a lithium anode and activated with CO₂ saturated electrolytes (V.R. Koch and S.B. Brummer, *Electrochimica Acta*, 1978, 23, 55-62; U.S. Patent No. 4,853,304 to Ebner et al.; D. Aurbach, Y. Gofer, M. Ben-Zion and P. Aped, *J. Electroanal. Chem.* 1992, 339, 451-471). The same effect is also known for lithium intercalated carbon anode secondary batteries (D. Aurbach, Y. Ein-Eli, O. Chusid, Y. Carmeli, M. Babai and H. Yamin, *J. Electrochem. Soc.* 1994, 141, 603-611).

In spite of the success of CO₂, its use in electrochemical cells is limited due to the difficulty in controlling its concentration. To achieve the best results, high pressures of up to 50 psig have to be used, which further detracts from the practicality of this additive.

Instead of carbon dioxide, the present invention is directed to dissolving organic carbonate additives in the electrolyte to change the anode surface film. The carbonate additives can be either linear or cyclic carbonates, comprise covalent O-X and O-Y bonds on opposite sides of a carbonyl group and have the general structure X-O-CO-O-Y. At least one of the O-X and the O-Y bonds has a relatively low dissociation energy. When dissolved in the activating electrolyte, the carbonate additives effect the anode surface film to desirably change its ionic conductivity.

SUMMARY OF THE INVENTION

The object of the present invention is to improve the performance of a primary alkali metal electrochemical cell, and more particularly, a lithium electrochemical cell by dissolving in the nonaqueous electrolyte solution at least one of a family of carbonate additives. A further object of this invention is to provide the present electrolyte solution in operative association with an electrochemical system incorporated in a defibrillator battery to minimize or eliminate voltage delay under high current pulse discharge conditions. The concept of this invention is likewise applicable to secondary alkali metal electrochemical cells.

The aforementioned objects are achieved by the addition of at least one organic additive, preferably a carbonate additive, dissolved in the electrolyte solution of an alkali metal electrochemical cell. Unlike CO₂ used in the prior art cells, the present invention uses solid or liquid organic additives which provide ease in handling and in electrolyte preparation. The additives are designed to interact with the alkali metal anode, and particularly with a lithium anode to form a protective anode surface layer which improves the discharge performance of the cell and minimizes or even eliminates voltage delay under high current discharge conditions.

These and other objects of the present invention will become increasingly more apparent to those skilled in the art by reference to the following description and to the drawings.

BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 is a graph showing the pulse discharge curve 10 of a control electrochemical cell activated with an electrolyte comprising an alkali metal salt dissolved in an aprotic organic

solvent devoid of an organic carbonate additive according to the present invention.

Fig. 2 is a graph showing the pulse discharge curve 20 of an electrochemical cell activated with an electrolyte comprising an alkali metal salt dissolved in an aprotic organic solvent including an organic additive according to the present invention.

Fig. 3 is a graph showing the pulse discharge curve 30 of an electrochemical cell similar to that discharged to generate the graph shown in Fig. 2 but without the organic additive.

Figs. 4 to 6 are graphs showing discharge curves of electrochemical cells having 800 mAh of capacity removed before testing and including no additive, 0.01M BSC additive and 0.03M DBC additive, respectively.

Figs. 7 to 9 are graphs showing discharge curves of electrochemical cells having 1200 mAh of capacity removed before testing and including no additive, 0.01M BSC additive and 0.03M DBC additive, respectively.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The electrochemical cell of the present invention includes an anode selected from Group IA of the Periodic Table of Elements, including lithium, sodium, potassium, etc., and their alloys and intermetallic compounds including, for example Li-Si, Li-B and Li-Si-B alloys and intermetallic compounds. The preferred anode comprises lithium, and the more preferred anode comprises a lithium alloy, the preferred lithium alloy being lithium-aluminum with the aluminum comprising from between about 0% to about 50% by weight of the alloy. The greater the amount of aluminum present by weight in the alloy the lower the energy density of the cell.

The form of the anode may vary, but preferably the anode is a thin metal sheet or foil of the anode metal, pressed or rolled on a metallic anode current collector, i.e., preferably

comprising nickel, to form an anode component. In the exemplary cell of the present invention, the anode component has an extended tab or lead of the same material as the anode current collector, i.e., preferably nickel, integrally formed therewith such as by welding and contacted by a weld to a cell case of conductive metal in a case-negative electrical configuration. Alternatively, the anode may be formed in some other geometry, such as a bobbin shape, cylinder or pellet to allow an alternate low surface cell design.

The electrochemical reaction at the cathode involves conversion of ions which migrate from the anode to the cathode in atomic or molecular forms. The solid cathode material may comprise a metal element, a metal oxide, a mixed metal oxide, a metal sulfide or carbonaceous compounds, and combinations thereof. Suitable cathode materials include silver vanadium oxide, copper silver vanadium oxide, manganese dioxide, cobalt oxide, nickel oxide, copper vanadium oxide, titanium disulfide, copper oxide, copper sulfide, iron sulfide, iron disulfide, and fluorinated carbon. The solid cathode exhibits excellent thermal stability and is generally safer and less reactive than a non-solid cathode.

Preferably, the solid cathode material comprises a mixed metal oxide formed by the chemical addition, reaction or otherwise intimate contact or by a thermal spray coating process of various metal sulfides, metal oxides or metal oxide/elemental metal combinations. The materials thereby produced contain metals and oxides of Groups IB, IIB, IIIB, IVB, VB, VIB, VIIB and VIII of the Periodic Table of Elements, which includes the noble metals and/or their oxide compounds. By way of illustration, and in no way intended to be limiting, an exemplary cathode active material comprises silver vanadium oxide having the general formula $Ag_xV_yO_z$, in any one of its many phases, i.e. β -phase silver vanadium oxide having in the general formula $x = 0.35$ and $y =$

5.18, γ -phase silver vanadium oxide having in the general formula $x = 0.74$ and $y = 5.37$ and ϵ -phase silver vanadium oxide having in the general formula $x = 1.0$ and $y = 5.5$, and combination and mixtures of phases thereof.

The cell of the present invention includes a separator to provide physical separation between the anode and cathode active electrodes. The separator is of electrically insulative material to prevent an internal electrical short circuit between the electrodes, and the separator material also is chemically unreactive with the anode and cathode active materials and both chemically unreactive with and insoluble in the electrolyte. In addition, the separator material has a degree of porosity sufficient to allow flow therethrough of the electrolyte during the electrochemical reaction of the cell. Illustrative separator materials include non-woven glass, polypropylene, polyethylene, glass fiber materials, ceramics, polytetrafluorethylene membrane commercially available under the designations ZITEX (Chemplast Inc.), polypropylene membrane commercially available under the designation CELGARD (Celanese Plastic Company Inc.) and a membrane commercially available under the designation DEXIGLAS (C.H. Dexter, Div., Dexter Corp.).

The form of the separator typically is a sheet which is placed between the anode and cathode electrodes and in a manner preventing physical contact therebetween. Such is the case when the anode is folded in a serpentine-like structure with a plurality of cathode plates disposed intermediate the anode folds and received in a cell casing or when the electrode combination is rolled or otherwise formed into a cylindrical "jellyroll" configuration.

The electrochemical cell of the present invention further includes a nonaqueous, ionically conductive electrolyte operatively associated with the anode and the cathode electrodes. The electrolyte serves as a medium for migration of ions between



the anode and the cathode during the electrochemical reactions of the cell and nonaqueous solvents suitable for the present invention are chosen so as to exhibit those physical properties necessary for ionic transport (low viscosity, low surface tension and wettability). Suitable nonaqueous solvents are comprised of an inorganic salt dissolved in a nonaqueous solvent and more preferably an alkali metal salt dissolved in a mixture of aprotic organic solvents comprising a low viscosity solvent including organic esters, ethers and dialkyl carbonates, and mixtures thereof, and a high permittivity solvent including cyclic carbonates, cyclic esters and cyclic amides, and mixtures thereof. Low viscosity solvents include tetrahydrofuran (THF), methyl acetate (MA), diglyme, triglyme, tetraglyme, dimethyl carbonate (DMC), 1,2-dimethoxyethane (DME), diethyl carbonate and others. High permittivity solvents include propylene carbonate (PC), ethylene carbonate (EC), acetonitrile, dimethyl sulfoxide, dimethyl formamide, dimethyl acetamide, γ -butyrolactone (GBL) and N-methyl-pyrrolidinone (NMP) and others. Suitable nonaqueous solvents are substantially inert to the anode and cathode electrode materials and a preferred solvent comprises a 50/50 mixture (by volume) of propylene carbonate (PC) and dimethoxyethane (DME).

The preferred electrolyte comprises an inorganic salt having the general formula $MM'F_6$ or $MM'F_4$, wherein M is an alkali metal similar to the alkali metal comprising the anode and M' is an element selected from the group consisting of phosphorous, arsenic, antimony and boron. Examples of salts yielding $M'F_6$ are: hexafluorophosphate (PF_6), hexafluoroarsenate (AsF_6) and hexafluoroantimonate (SbF_6) while tetrafluoroborate (BF_4) is exemplary of salts yielding $M'F_4$. Thus, in the case of an anode comprising lithium, the alkali metal salt of the electrolyte of the present invention preferably comprises lithium


hexafluorophosphate, lithium hexafluoroarsenate, lithium hexafluoroantimonate or lithium tetrafluoroborate dissolved in a suitable solvent mixture. Alternately, the corresponding sodium or potassium salts may be used. Other inorganic salts useful with the present invention include LiClO_4 , LiAlCl_4 , LiGaCl_4 , $\text{LiC}(\text{SO}_2\text{CF}_3)_3$, $\text{LiN}(\text{SO}_2\text{CF}_3)_2$ and LiCF_3SO_3 , and mixtures thereof.

In the present invention, the addition of certain organic carbonate additives to the electrolyte solution has beneficial effects in minimizing or eliminating voltage delay when the cell is subjected to current pulse discharge conditions. Specifically, the organic carbonate additives can be either linear or cyclic carbonates containing covalent O-X and O-Y bonds on opposite sides of a carbonyl group and have the general structure of X-O-CO-O-Y , wherein X and Y are the same or different and X is selected from NR_1R_2 and $\text{CR}_3\text{R}_4\text{R}_5$, Y is selected from $\text{NR}'_1\text{R}'_2$ and $\text{CR}'_3\text{R}'_4\text{R}'_5$, and wherein R_1 , R_2 , R_3 , R_4 , R_5 , R'_1 , R'_2 , R'_3 , R'_4 and R'_5 are the same or different, and at least R_3 is an unsaturated substituent if X is $\text{CR}_3\text{R}_4\text{R}_5$ and Y is $\text{CR}'_3\text{R}'_4\text{R}'_5$. At least one of the O-X and the O-Y bonds has a dissociation energy less than about 80 kcal/mole

Examples of organic carbonate additives useful with the present invention include:




Di(succinimidy) carbonate




Di(1-benzotriazolyl) carbonate


$X \neq Y$ then $X = NR_1R_2$ and $Y = CR_3R_4R_5$




N-(Benzyloxycarbonyloxy)succinimide




Succinimidyl-2,2,2-trichloroethyl carbonate

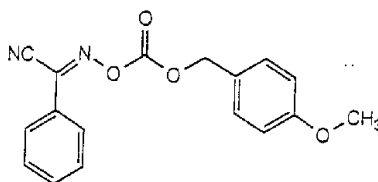


2-(4-methoxybenzyloxycarbonyloxyimino)-2-phenylacetonitrile

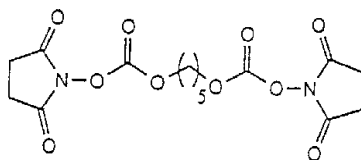

1,5-Bis(succinimidooxycarbonyloxy)pentane




N-(9-Fluorenylmethoxycarbonyloxy)succinimide




N-Benzyloxycarbonyloxy-5-norbornene-2,3-dicarboximide

$X = Y = CR_3R_4R_5$ and $R_3 =$ unsaturated group




Dibenzyl carbonate




Diallyl carbonate

$X \neq Y$ then $X = CR_3R_4R_5$, $R_3 =$ unsaturated group and $Y = CR'_3R'_4R'_5$



Allyl ethyl carbonate



4-phenyl-1,3-dioxolan-2-one

It is also contemplated by the scope of the present invention that suitable organic carbonate additives can further include those where $X \neq Y$ then $X = NR_1R_2$ and $Y = NR'_1R'_2$.

The above described compounds are only intended to be exemplary of those that are useful with the present invention, and are not to be construed as limiting. Those skilled in the art will readily recognize compounds which come under the purview of the general formulas set forth above and which will be useful as carbonate additives for the electrolyte to reduce voltage delay according to the present invention.

Compounds such as those exemplified above are known to improve the high current pulse discharge performance of the

alkali metal cells. The greatest effect is found when di-(N-succinimidyl) carbonate (DSC), benzyl-N-succinimidyl carbonate (BSC) and dibenzyl carbonate (DBC), and mixtures thereof are used as additives in the electrolyte.

The presence of at least one of the covalent O-X and O-Y bonds on opposite sides of the carbonyl group having a dissociation energy less than about 80 kcal/mole in the present compounds having the general formula X-O-CO-O-Y is important for improved performance of the alkali metal cells, and particularly lithium cells. Due to the respectively low O-X and O-Y bond dissociation energy, the above listed family of additives can compete effectively with electrolyte solvents or solutes to react with the lithium anode. Increased amounts of lithium carbonate are believed to be deposited on the anode surface to form an ionically conductive protective film. As a consequence, the chemical composition and perhaps the morphology of the anode surface protective layer is believed to be changed with concomitant benefits to the cell's discharge characteristics.

In the present invention, the anode is lithium metal and the cathode is preferably the transition mixed metal oxide $\text{AgV}_2\text{O}_{5.5}$ (SVO). The preferred electrolyte is 1.0M to 1.2M LiAsF_6 dissolved in an aprotic solvent mixture comprising at least one of the above listed low viscosity solvents and at least one of the above listed high permittivity solvents. The preferred aprotic solvent mixture comprises a 50/50, by volume, mixture of propylene carbonate and dimethoxyethane. The concentration of the above mentioned organic additives should preferably be in the range of between about 0.001M to about 0.2M. The positive effects of these additives have been achieved both at room temperature as well as at temperatures up to about 37°C.

The assembly of the cell described herein is preferably in the form of a wound element cell. That is, the fabricated cathode, anode and separator are wound together in a "jellyroll"

type configuration or "wound element cell stack" such that the anode is on the outside of the roll to make electrical contact with the cell case in a case-negative configuration. Using suitable top and bottom insulators, the wound cell stack is inserted into a metallic case of a suitable size dimension. The metallic case may comprise materials such as stainless steel, mild steel, nickel-plated mild steel, titanium or aluminum, but not limited thereto, so long as the metallic material is compatible for use with components of the cell.

The cell header comprises a metallic disc-shaped body with a first hole to accommodate a glass-to-metal seal/terminal pin feedthrough and a second hole for electrolyte filling. The glass used is of a corrosion resistant type having up to about 50% by weight silicon such as CABAL 12, TA 23 or FUSITE 425 or FUSITE 435. The positive terminal pin feedthrough preferably comprises titanium although molybdenum, aluminum, nickel alloy, or stainless steel can also be used. The cell header comprises elements having compatibility with the other components of the electrochemical cell and is resistant to corrosion. The cathode lead is welded to the positive terminal pin in the glass-to-metal seal and the header is welded to the case containing the electrode stack. The cell is thereafter filled with the electrolyte solution comprising at least one of the organic carbonate additives described hereinabove and hermetically sealed such as by close-welding a stainless steel ball over the fill hole, but not limited thereto. This above assembly describes a case-negative cell which is the preferred construction of the exemplary cell of the present invention. As is well known to those skilled in the art, the exemplary electrochemical system of the present invention can also be constructed in a case-positive configuration.

The following examples describe the manner and process of an electrochemical cell according to the present invention, and set

forth the best mode contemplated by the inventors of carrying out the invention, but are not construed as limiting.

EXAMPLE I

Lithium anode material and silver vanadium oxide cathode material were each pressed on titanium current collector screens connected to nickel leads. A prismatic cell stack assembly of a single anode and a single cathode with two layers of polypropylene separator sandwiched between the two electrodes was prepared. The thusly constructed electrode assembly was placed in a glass vessel sealed with a rubber septum and activated with a nonaqueous electrolyte. The electrochemical cell assemblies were then divided into ten cell groups.

The nonaqueous electrolyte was prepared by dissolving LiAsF_6 salt in each of the solvent mixtures listed in Table 1.

Table 1

Electrolyte Conductivity

Electrolyte [LiAsF_6] (mmho/cm)	Solvent (Volume Ratio)	Conductivity
1 1.0M	PC(50)/DME(50)	17.30
2 1.2M	PC(30)/DMC(70)	14.02
3 1.4M	PC(20)/MA(80)	24.2
4 1.0M	GBL(40)/DME(60)	21.3
5 1.3M	NMP(20)/DME(80)	20.2

PC = propylene carbonate
DMC = dimethyl carbonate
GBL = γ -butyrolactone

DME = 1,2-dimethoxyethane
MA = methyl acetate
NMP = N-methyl-pyrrolidinone

After the electrolyte solutions cooled to room temperature, the respective organic carbonate additives listed in table 2

were added thereto and the solutions were further diluted to the desired concentration.

Table 2

Organic Carbonate Additives in Test Cells

Cell Group	Additive Concentration	Additive	Electrolyte
1	0.01M	DSC	1
2	0.05M	DSC	1
3	0.01M	DSC	2
4	0.01M	DSC	3
5	0.01M	DSC	4
6	0.01M	DSC	5
7	0.01M	BSC	1
8	0.01M	BSC	4
9	0.01M	BSC	5
10	0.01M	DBC	1

DSC = di-(N-succinimidyl) carbonate
 BSC = benzyl-N-succinimidyl carbonate
 DBC = dibenzyl carbonate

To demonstrate the benefits in cell performance attributable to the organic additives of the present invention, reference test cells from each of the ten cell groups were also activated with electrolytes similar to those listed in Table 1, but without the present organic additives.

All the cells, i.e., those having the organic additives of the present invention dissolved in the respective electrolytes and the reference test cells, were discharged under a 1K ohm load for 1 hour and then discharged under a 2K ohm load. These cells received once every two days an application of a pulse train consisting of four 17.7 mA/cm², 10 second pulses with 15 seconds rest between each pulse. Four pulse trains were applied to each cell. In general, voltage delay in the first pulse can be observed for all of the above reference test cells in the third and fourth pulse trains. Voltage delay is defined as pulse one

end potential minus pulse one minimum potential as shown in Fig. 1 wherein in the pulse discharge curve 10, pulse one end potential is indicated at 12 and pulse one minimum potential is indicated at 14. A positive value indicates the existence of voltage delay. The larger this value, the larger the voltage delay. The beneficial effects of the organic additives on the voltage delay are thus obtained by comparing the results of test cells having the organic additives of the present invention dissolved in the electrolyte solution with respect to the reference cells at pulse trains 3 and 4. The results from pulse train 4 are summarized in Table 3.

Table 3

Effect of Organic Additives on Test Cell Performance:
Voltage Delay in Fourth Pulse Train (V)

Cell Group	Without Additive ($P_{1end} - P_{1min}$)	With Additive ($P_{1end} - P_{1min}$)
1	0.08 (0.08) ^a	0.00 (0.02) _a
2	(0.08) ^b	(0.02) _b
3	0.04	0.00
4	0.24	0.09
5	0.36	0.25
6	(0.11) ^c	(0.06) _c
7	0.13	0.00
8	0.36	0.29
9	(0.11) ^c	(0.05) _c
10	0.13	0.07

- (a) Small voltage delay at 37°C.
 (b) Result at 37°C. More voltage delay is observed in pulse trains 2 and 3.
 (c) Pulse current density is 7.8 mA/cm².

The results from Table 3 clearly indicate the beneficial effect on cell pulse discharge performance of the organic carbonate additives of the present invention dissolved in the electrolyte solutions of the various cell groups. Voltage delay

is eliminated in Cell Groups 1, 3 and 7. In all other cell groups, voltage delay is also decreased by addition of the present carbonate additives. More importantly, the improvements in minimizing voltage delay in the above example was achieved without any other detrimental effects on cell discharge performance. In addition to the noted improvements in voltage delay, it was discovered that the carbonate additives (DSC, BSC) are also useful in preventing decrease in cell potential. Alkali metal cells activated with electrolytes including these additives always have equal or higher prepulse discharge potential than the cells without them. This is especially the case when relatively more reactive solvents are used, such as GBL, NMP and MA. Higher cell capacity, thus, is expected. The data of prepulse potentials from cell groups 5, 8 and the control cell are listed in Table 4.

Table 4

Pre-Pulse Potential (V)

Cell Group	Pulse Train 1	Pulse Train 2	Pulse Train 3	Pulse Train 4
Control	3.14	2.68	2.32	2.04
5	3.13	2.74	2.42	2.12
8	3.16	2.77	2.45	2.14

EXAMPLE II

Lithium anode material was pressed on nickel current collector screen and silver vanadium oxide cathode material was pressed on titanium current collector screen. A prismatic cell stack assembly configuration with two layers of microporous polypropylene membrane separator sandwiched between the anode and cathode was prepared. The electrode assembly was then hermetically sealed in a stainless steel casing in a case negative configuration and activated with an electrolyte

comprising 1.0M LiAsF₆ dissolved in a 50/50 mixture (by volume) of propylene carbonate and 1,2-dimethoxyethane. Some of the cells in this example were provided with 0.01M DSC dissolved in the electrolyte while reference cells were built without the dissolved organic additive. These cells were partially discharged under 200 ohm for 70 hours at 37°C. After storing on open circuit at 37°C for 8 weeks, they received an application of a pulse train consisting of four 18.4 mA/cm², 10 second pulses with 15 seconds rest between each pulse at 37°C. The voltage delay results are listed in Table 5 and are graphically shown in Fig. 2 for a cell activated with an electrolyte including an organic carbonate additive, namely, di-(N-succinimidyl) carbonate (DSC), dissolved therein and Fig. 3 for a similarly built cell activated with an electrolyte devoid of an organic carbonate additive. Particularly, in Fig. 2, curve 20 was constructed from the pulse discharge of the cell built according to the present invention with the DSC electrolyte additive with the pulse one end potential indicated at 22 and the pulse one minimum potential indicated at 24. In the pulse discharge curve 30 shown in Fig. 3, the pulse one end potential is indicated at 32 and the pulse one minimum potential is indicated at 34.

Table 5

Voltage Delay (V) Data From Hermetic Cells at 37°C
Effect of DSC Additive

Without DSC Additive	With DSC Additive
(P _{1end} - P _{1min})	(P _{1end} - P _{1min})
0.163 ^a	0.116 ^a

(a) Data average from 8 cells

For those cells including the DSC additive, the improvement in cell performance is clearly evident in terms of decreased voltage delay during high current pulse discharge.

EXAMPLE III

Hermetically sealed Li/SVO defibrillator cells were constructed similar to those described in Example II and activated with an electrolyte comprising 1.0M LiAsF₆ dissolved in a 50/50 mixture (by volume) of propylene carbonate and 1,2-dimethoxyethane. Some of the cells were provided with 0.01M BSC dissolved in the electrolyte while some of the cells were provided with 0.03M DBC additive dissolved in the electrolyte. Reference cells for the two cell groups were built without organic additives in the electrolyte. These cells were further divided into two sub-groups. One group was partially discharged under 200 ohm for about 56 hours to remove 800 mAh capacity. The second sub-group cells were discharged under 200 ohm for about 87 hours to remove 1200 mAh capacity. After storing on open circuit at 37°C for 8 weeks, they received an application of a pulse train consisting of four 18.4 mA/cm², 10 second pulses with 15 second rest between each pulse at 37°C. The voltage delay results are listed in Table 6 and are graphically shown in Figs. 4 to 9.

Thus, the pulse discharge curve 40 (Fig. 4) was constructed from a Li/SVO cell activated with an electrolyte of 1.0M LiAsF₆ dissolved in a 50/50 mixture (by volume) of propylene carbonate and 1,2-dimethoxyethane without any additive therein and after 800 mAh of capacity was removed, wherein the pulse one end potential is indicated at 42 and the pulse one minimum potential is indicated at 44. The pulse discharge curve 50 in Fig. 5 was constructed from a cell similar to that used in Fig. 4 and activated with an electrolyte of 1.0M LiAsF₆ dissolved in a 50/50 mixture (by volume) of PC/DME with 0.01M BSC additive and after 800 mAh of capacity was removed, wherein the pulse one end potential is indicated at 52 and the pulse one minimum potential is indicated at 54. And, the pulse discharge curve 60 in Fig. 6

was constructed from a similar electrochemical system as that used in Fig. 5 except that the electrolyte contained 0.03M DBC additive dissolved therein and after 800 mAh of capacity was removed, wherein the pulse one end potential is indicated at 62 and the pulse one minimum potential is indicated at 64.

The pulse discharge curve in Fig. 7 was constructed from a Li/SVO cell activated with an electrolyte of 1.0M LiAsF₆ dissolved in a 50/50 mixture (by volume) of PC/DME without any additive therein and after 1200 mAh of capacity was removed, wherein the pulse one end potential is indicated at 72 and the pulse one minimum potential is indicated at 74. The pulse discharge curve 80 in Fig. 8 was constructed from a similar electrochemical system as that used in Fig. 7 except that the electrolyte contained 0.01M BSC additive dissolved therein and after 1200 mAh of capacity was removed, wherein the pulse one end potential is indicated at 82 and the pulse one minimum potential is indicated at 84. And, the pulse discharge curve 90 in Fig. 9 was constructed from an electrochemical system similar to those used in Figs. 7 and 8 except that the electrolyte contained 0.03M DBC additive dissolved therein and after 1200 mAh of capacity was removed, wherein the pulse one end potential is indicated at 92 and the pulse one minimum potential is indicated at 94.

Voltage Delay (V) Date From Hermetic Cells at 37°C
Effect of BSC and DBC Additives

Organic Additive	Capacity Removed	Without Additive ^a ($P_{Iend} - P_{Imin}$)	With Additive ($P_{Iend} - P_{Imin}$)
BSC	800 mAh	0.068	0.003
	1200 mAh	0.034	0.000
DBC	800 mAh	0.068	0.000
	1200 mAh	0.034	0.000

For those cells activated with an electrolyte including the BSC and DBC additives, the improvement in cell performance is clearly evident in terms of voltage delay elimination during high current pulse discharge.

EXAMPLE IV

Organic carbonate additives are also found to be beneficial to low rate lithium batteries with carbon monofluoride as a cathode material.

Hermetically sealed Li/CF₃ batteries were constructed in a similar fashion to those described in Example II (except using a non-woven polypropylene separator instead of microporous membrane polypropylene separator) and activated with an electrolyte comprising 1.0M LiBF₄ dissolved in GBL. Some of the cells were provided with 0.01M DSC dissolved in the electrolyte while reference cells were built without any organic additive in the electrolyte. These cells were further divided into three sub-groups. These three sub-groups were discharged under constant loads of 2.0K ohm, 5.1K ohm and 10.0K ohm, respectively. The results are summarized in Tables 7, 8 and 9.

Table 7

Li/CF₃ Cell Potential (V)^a vs. Time (Days)
Under 2.0K Ohm Load Discharge at 37°C

Time (days)	2	15	30	44	60	80
Reference	2.753	2.804	2.786	2.748	2.660	1.219
0.01M DSC	2.771	2.815	2.801	2.762	2.681	1.476

(a) Average of three cells.

Table 8

Li/CF_x Cell Potential (V)^a vs. Time (Days)
Under 5.1K Ohm Load Discharge at 37°C

Time (days)	2	30	61	96	131	156
Reference	2.186	2.853	2.826	2.798	2.771	2.690
0.01M DSC	2.862	2.877	2.852	2.822	2.792	2.695

(a) Average of three cells.

Table 9

Li/CF_x Cell Potential (V)^a vs. Time (Days)
Under 10.0K Ohm Load Discharge at 37°C

Time (days)	2	26	61	96	131	156
Reference	2.858	2.878	2.879	2.871	2.858	2.848
0.01M DSC	2.917	2.910	2.909	2.902	2.887	2.877

(a) Average of three cells.

For cells with the DSC additive in the electrolyte, the improvement in cell performance is clearly indicated in terms of higher discharge potential throughout the test. Higher cell capacity (mAh) and higher deliverable energy (mWh) are thus expected with the added organic carbonate DSC additive in the electrolyte.

It is believed that the organic carbonates of the present invention are reduced to form a product which deposits on the anode surface. This surface film is ionically more conductive than the film formed in the absence of the additives and it is responsible for the increased cell performance. Since lithium carbonate is known to form a good ionic conductive film on

lithium surfaces, the reductive cleavage of the O-X and/or the O-Y bonds in the carbonate additives of the present invention may produce lithium carbonate as the final product.

It is appreciated that various modifications to the inventive concepts described herein may be apparent to those of ordinary skill in the art without departing from the spirit and scope of the present invention as defined by the appended claims.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An electrochemical cell comprising an alkali metal anode; a cathode; a liquid, nonaqueous electrolyte operatively associated with the anode and the cathode, the improvement in the cell comprising: an organic additive dissolved in the electrolyte, wherein the additive is either linear or cyclic and includes covalent O-X and O-Y bonds on opposite sides of a carbonyl group and has the general structure of X-O-CO-O-Y, wherein at least one of the O-X and the O-Y bonds has a dissociation energy less than about 80 kcal/mole, and wherein X and Y are the same or different and X is selected from NR_1R_2 and $\text{CR}_3\text{R}_4\text{R}_5$, and Y is selected from $\text{NR}'_1\text{R}'_2$ and $\text{CR}'_3\text{R}'_4\text{R}'_5$, and wherein $\text{R}_1, \text{R}_2, \text{R}_3, \text{R}_4, \text{R}_5, \text{R}'_1, \text{R}'_2, \text{R}'_3, \text{R}'_4, \text{R}'_5$ are the same or different, wherein $\text{R}_1, \text{R}'_1, \text{R}_2$, and R'_2 can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 9 carbon atoms, and $\text{R}_3, \text{R}'_3, \text{R}_4, \text{R}'_4, \text{R}_5$, and R'_5 can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 13 carbon atoms, and wherein and at least R_3 is an unsaturated substituent if X is $\text{CR}_3\text{R}_4\text{R}_5$ and Y is $\text{CR}'_3\text{R}'_4\text{R}'_5$.

2. The electrochemical cell of claim 1 wherein the additive is selected from the group consisting of:

- a) $\text{X}=\text{Y}=\text{NR}_1\text{R}_2$;
- b) $\text{X}\neq\text{Y}$ then $\text{X}=\text{NR}_1\text{R}_2$ and $\text{Y}=\text{CR}_3\text{R}_4\text{R}_5$;
- c) $\text{X}\neq\text{Y}$ then $\text{X}=\text{NR}_1\text{R}_2$ and $\text{Y}=\text{NR}'_1\text{R}'_2$;
- d) $\text{X}=\text{Y}=\text{CR}_3\text{R}_4\text{R}_5$ and R_3 is an unsaturated group; and
- e) $\text{X}\neq\text{Y}$ then $\text{X}=\text{CR}_3\text{R}_4\text{R}_5$, R_3 is an unsaturated group and $\text{Y}=\text{CR}'_3\text{R}'_4\text{R}'_5$, and mixtures thereof.

3. The electrochemical cell of claim 1 wherein the additive is selected from the group consisting of di-(N-succinimidyl) carbonate, benzyl-N-succinimidyl carbonate, di(1-benzotriazolyl) carbonate, N-(benzyloxycarbonyloxy) succinimide, N-benzyloxycarbonyloxy-5-norbornene-2,3-dicarboximide, N-(9-fluorenylmethoxycarbonyloxy)succinimide, 2-(4-methoxybenzyloxycarbonyloxyimino)-2-phenylacetonitrile, 1,5-bis(succinimidooxycarbonyloxy)pentane, succinimidyl-2,2,2-trichloroethyl carbonate, diallyl carbonate, allyl ethyl carbonate, 4-phenyl-1,3-dioxolan-2-one and dibenzyl carbonate, and mixtures thereof.

4. The electrochemical cell of claim 1 wherein the anode is of an alkali metal, the electrolyte is a nonaqueous electrolyte and there is dissolved therein an alkali metal salt, wherein the alkali metal of the salt is the same as the alkali metal comprising the anode.

5. An electrochemical cell, which comprises:

- a) an anode comprising an alkali metal which is electrochemically oxidizable to form metal ions in the cell upon discharge to generate electron flow in an external electrical circuit connected thereto;
- b) a cathode comprising a cathode active material, wherein the electron flow is generated by intercalation of the metal ions formed by oxidation of the alkali metal anode into the cathode active material; and
- c) a liquid, nonaqueous electrolyte operatively associated with the anode and the cathode, the electrolyte comprising an alkali metal salt dissolved therein, the improvement in the electrolyte comprising: an organic additive dissolved therein, wherein the additive is either linear or cyclic and comprises covalent O-X and

O-Y bonds on opposite sides of a carbonyl group and having the general structure of X-O-CO-O-Y, wherein at least one of the O-X and the O-Y bonds has a dissociation energy less than about 80 kcal/mole and wherein X and Y are the same or different and X is selected from NR_1R_2 and $\text{CR}_3\text{R}_4\text{R}_5$, and Y is selected from $\text{NR}'_1\text{R}'_2$ and $\text{CR}'_3\text{R}'_4\text{R}'_5$, and wherein $\text{R}_1, \text{R}_2, \text{R}_3, \text{R}_4, \text{R}_5, \text{R}'_1, \text{R}'_2, \text{R}'_3, \text{R}'_4, \text{R}'_5$ are the same or different, wherein $\text{R}_1, \text{R}'_1, \text{R}_2$, and R'_2 can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 9 carbon atoms, and $\text{R}_3, \text{R}'_3, \text{R}_4, \text{R}'_4, \text{R}_5, \text{R}'_5$ can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 13 carbon atoms, and wherein and at least R_3 is an unsaturated substituent if X is $\text{CR}_3\text{R}_4\text{R}_5$ and Y is $\text{CR}'_3\text{R}'_4\text{R}'_5$.

6. The electrochemical cell of claim 5 wherein the additive is selected from the group consisting of:

- a) $\text{X}=\text{Y}=\text{NR}_1\text{R}_2$;
- b) $\text{X}\neq\text{Y}$ then $\text{X}=\text{NR}_1\text{R}_2$ and $\text{Y}=\text{CR}_3\text{R}_4\text{R}_5$;
- c) $\text{X}\neq\text{Y}$ then $\text{X}=\text{NR}_1\text{R}_2$ and $\text{Y}=\text{NR}'_1\text{R}'_2$;
- d) $\text{X}=\text{Y}=\text{CR}_3\text{R}_4\text{R}_5$ and R_3 is an unsaturated group; and
- e) $\text{X}\neq\text{Y}$ then $\text{X}=\text{CR}_3\text{R}_4\text{R}_5$, R_3 is an unsaturated group and $\text{Y}=\text{CR}'_3\text{R}'_4\text{R}'_5$, and mixtures thereof.

7. The electrochemical cell of claim 5 wherein the additive is selected from the group consisting of di-(N-succinimidyl) carbonate, benzyl-N-succinimidyl carbonate, di(1-benzotriazolyl) carbonate, N-(benzyloxycarbonyloxy)succinimide, N-benzyloxycarbonyloxy-5-norbornene-2,3-dicarboximide, N-(9-fluorenylmethoxycarbonyloxy)succinimide, 2-(4-methoxybenzyloxycarbonyloxyimino)-2-phenylacetonitrile, 1,5-bis(succinimidooxycarbonyloxy)pentane, succinimidyl-2,2,2-trichloroethyl carbonate, diallyl carbonate, allyl ethyl carbonate, 4-phenyl-1,3-dioxolan-2-one and dibenzyl carbonate, and mixtures thereof.



8. The electrochemical cell of claim 5 wherein the nonaqueous electrolyte comprises a low viscosity solvent selected from the group consisting of an ester, an ether and a dialkyl carbonate, and mixtures thereof.

9. The electrochemical cell of claim 8 wherein the low viscosity solvent is selected from the group consisting of 1,2-dimethoxyethane, dimethyl carbonate, diethyl carbonate, methyl acetate, tetrahydrofuran, diglyme, triglyme and tetraglyme, and mixtures thereof.

10. The electrochemical cell of claim 5 wherein the nonaqueous solvent comprises a high permittivity solvent selected from the group consisting of a cyclic carbonate, a cyclic ester and a cyclic amide, and mixtures thereof.

11. The electrochemical cell of claim 10 wherein the high permittivity solvent is selected from the group consisting of propylene carbonate, ethylene carbonate, gamma-butyrolactone, N-methyl-pyrrolidinone, dimethyl sulfoxide, acetonitrile, dimethyl formamide and dimethyl acetamide, and mixtures thereof.

12. The electrochemical cell of claim 11 wherein the cathode comprises a cathode active material selected from the group consisting of silver vanadium oxide, copper silver vanadium oxide, manganese dioxide, cobalt oxide, nickel oxide, fluorinated carbon, copper oxide, copper sulfide, iron sulfide, iron disulfide, titanium disulfide and copper vanadium oxide, and mixtures thereof.

13. The electrochemical cell of claim 5 wherein the alkali metal salt comprising the electrolyte solution is selected from the group consisting of LiPF_6 , LiAsF_6 , LiSbF_6 , LiBF_4 , LiClO_4 , LiAlCl_4 , LiGaCl_4 , $\text{LiC}(\text{SO}_2\text{CF}_3)_3$, $\text{LiN}(\text{SO}_2\text{CF}_3)_2$ and LiCF_3SO_3 and mixtures thereof.

14. An electrochemical cell, which comprises:
- a) an anode comprising an alkali metal which is electrochemically oxidizable to form metal ions in the cell upon discharge to generate electron flow in an external electrical circuit connected thereto;
 - b) a cathode comprising a cathode active material wherein the electron flow is generated by intercalation of the metal ions formed by oxidation of the alkali metal anode into the cathode active material; and
 - c) a liquid, nonaqueous electrolyte operatively associated with the anode and the cathode, the electrolyte comprising at least one ion-forming alkali metal salt selected from one of the group consisting of hexafluoroarsenate, hexafluorophosphate and hexafluoroantimonate, and mixtures thereof; and
 - d) an organic additive dissolved in the electrolyte, wherein the additive is either linear or cyclic and comprises covalent O-X and O-Y bonds on opposite sides of a carbonyl group and having the general structure of X-O-CO-O-Y, wherein at least one of the O-X and the O-Y bonds has a dissociation energy less than about 80 kcal/mole, and wherein X and Y are the same or different and X is selected from NR_1R_2 and $\text{CR}_3\text{R}_4\text{R}_5$, and Y is selected from $\text{NR}'_1\text{R}'_2$ and $\text{CR}'_3\text{R}'_4\text{R}'_5$, and wherein $\text{R}_1, \text{R}_2, \text{R}_3, \text{R}_4, \text{R}_5, \text{R}'_1, \text{R}'_2, \text{R}'_3, \text{R}'_4, \text{R}'_5$ are the same or different, wherein $\text{R}_1, \text{R}'_1, \text{R}_2$, and R'_2 can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 9 carbon atoms, and $\text{R}_3, \text{R}'_3, \text{R}_4, \text{R}'_4, \text{R}_5, \text{R}'_5$ can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 13 carbon atoms, and wherein and at least R_3 is an unsaturated substituent if X is $\text{CR}_3\text{R}_4\text{R}_5$ and Y is $\text{CR}'_3\text{R}'_4\text{R}'_5$.

15. The electrochemical cell of claim 14 wherein the additive is selected from the group consisting of:

- a) $X=Y=NR_1R_2$;
- b) $X \neq Y$ then $X=NR_1R_2$ and $Y=CR_3R_4R_5$;
- c) $X \neq Y$ then $X=NR_1R_2$ and $Y=NR'_1R'_2$;
- d) $X=Y=CR_3R_4R_5$ and R_3 is an unsaturated group; and
- e) $X \neq Y$ then $X=CR_3R_4R_5$, R_3 is an unsaturated group and $Y=CR'_3R'_4R'_5$, and mixtures thereof.

16. The electrochemical cell of claim 14 wherein the additive is selected from the group consisting of di-(N-succinimidyl) carbonate, benzyl-N-succinimidyl carbonate, di(1-benzotriazolyl) carbonate, N-(benzyloxycarbonyloxy)succinimide, N-benzyloxycarbonyloxy-5-norbornene-2,3-dicarboximide, N-(9-fluorenylmethoxycarbonyloxy)succinimide, 2-(4-methoxybenzyloxycarbonyloxyimino)-2-phenylacetonitrile, 1,5-bis(succinimidooxycarbonyloxy)pentane, succinimidyl-2,2,2-trichloroethyl carbonate, diallyl carbonate, allyl ethyl carbonate, 4-phenyl-1,3-dioxolan-2-one and dibenzyl carbonate, and mixtures thereof.

17. A method for reducing voltage delay in an electrochemical cell activated with a liquid, nonaqueous electrolyte, comprising the steps of:

- a) providing an anode comprising an alkali metal;
- b) providing a solid cathode of electrochemically conductive material;
- c) activating the electrochemical cell with the nonaqueous electrolyte operatively associated with the anode and the cathode, the nonaqueous electrolyte comprising an alkali metal salt dissolved therein; and
- d) dissolving an organic additive into the electrolyte, wherein the additive is either linear or cyclic and comprises covalent O-X and

O-Y bonds on opposite sides of a carbonyl group and having the general structure of X-O-CO-O-Y, wherein at least one of the O-X and the O-Y bonds has a dissociation energy less than about 80 kcal/mole, and wherein X and Y are the same or different and X is selected from NR_1R_2 and $\text{CR}_3\text{R}_4\text{R}_5$, and Y is selected from $\text{NR}'_1\text{R}'_2$ and $\text{CR}'_3\text{R}'_4\text{R}'_5$, and wherein $\text{R}_1, \text{R}_2, \text{R}_3, \text{R}_4, \text{R}_5, \text{R}'_1, \text{R}'_2, \text{R}'_3, \text{R}'_4, \text{R}'_5$ are the same or different, wherein $\text{R}_1, \text{R}'_1, \text{R}_2$, and R'_2 can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 9 carbon atoms, and $\text{R}_3, \text{R}'_3, \text{R}_4, \text{R}'_4, \text{R}_5, \text{R}'_5$ can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 13 carbon atoms, and wherein and at least R_3 is an unsaturated substituent if X is $\text{CR}_3\text{R}_4\text{R}_5$ and Y is $\text{CR}'_3\text{R}'_4\text{R}'_5$.

18. The method of claim 17 including selecting the additive from the group consisting of:

- a) $\text{X}=\text{Y}=\text{NR}_1\text{R}_2$;
- b) $\text{X}\neq\text{Y}$ then $\text{X}=\text{NR}_1\text{R}_2$ and $\text{Y}=\text{CR}_3\text{R}_4\text{R}_5$;
- c) $\text{X}\neq\text{Y}$ then $\text{X}=\text{NR}_1\text{R}_2$ and $\text{Y}=\text{NR}'_1\text{R}'_2$;
- d) $\text{X}=\text{Y}=\text{CR}_3\text{R}_4\text{R}_5$ and R_3 is an unsaturated group; and
- e) $\text{X}\neq\text{Y}$ then $\text{X}=\text{CR}_3\text{R}_4\text{R}_5$, R_3 is an unsaturated group and $\text{Y}=\text{CR}'_3\text{R}'_4\text{R}'_5$,

and mixtures thereof.

19. The method of claim 22 including selecting the additives from the group consisting of di-(N-succinimidyl)carbonate, benzyl-N-succinimidyl carbonate, di(1-benzotriazolyl)carbonate, N-(benzyloxycarbonyloxy)succinimide, N-benzyloxycarbonyloxy-5-norbornene-2,3-dicarboximide, N-(9-fluorenyl-methoxycarbonyloxy)succinimide, 2-(4-methoxybenzyloxycarbonyloxyimino)-2-phenylacetonitrile, 1,5-bis(succinimidooxycarbonyloxy)pentane, succinimidyl-2,2,2-trichloroethyl carbonate, diallyl carbonate, allyl ethyl carbonate, 4-phenyl-1,3-dioxolan-2-one and dibenzyl carbonate, and mixtures thereof.

20. The method of claim 17 providing the nonaqueous electrolyte comprising a low viscosity solvent and selecting the low viscosity solvent from the group consisting of an ester, an ether and a dialkyl carbonate, and mixtures thereof.

21. The method of claim 17 providing the nonaqueous electrolyte comprising a high permittivity solvent and selecting the high permittivity solvent from the group consisting of a cyclic carbonate, a cyclic ester and a cyclic amide, and mixtures thereof.

22. A method for reducing voltage delay in an electrochemical cell activated with a liquid, nonaqueous electrolyte, comprising the steps of:

- a) providing the anode comprising an alkali metal;
- b) providing a solid cathode of electrochemically conductive material;
- c) activating the electrochemical cell with the nonaqueous electrolyte operatively associated with the anode and the cathode, the nonaqueous electrolyte comprising at least one ion-forming alkali metal salt selected from one of the group consisting of hexafluorophosphate, hexafluoroarsenate and hexafluoroantimonate, and mixtures thereof; and
- d) dissolving an organic additive into the electrolyte, wherein the additive is either linear or cyclic and comprises covalent O-X and O-Y bonds on opposite sides of a carbonyl group and having the general structure of X-O-CO-O-Y, wherein at least one of the O-X and the O-Y bonds has a dissociation energy less than about 80 kcal/mole, and wherein X and Y are the same or different and X is selected from NR_1R_2 and $\text{CR}_3\text{R}_4\text{R}_5$, and Y is selected from $\text{NR}'_1\text{R}'_2$ and $\text{CR}'_3\text{R}'_4\text{R}'_5$, and wherein $\text{R}_1, \text{R}_2, \text{R}_3, \text{R}_4, \text{R}_5, \text{R}'_1, \text{R}'_2, \text{R}'_3, \text{R}'_4, \text{R}'_5$ are

the same or different, wherein R_1, R'_1, R_2 , and R'_2 can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 9 carbon atoms, and $R_3, R'_3, R_4, R'_4, R_5, R'_5$ can be a hydrogen atom or saturated or unsaturated organic groups containing from 1 to 13 carbon atoms, and wherein and at least R_3 is an unsaturated substituent if X is $CR_3R_4R_5$ and Y is $CR'_3R'_4R'_5$.

23. The method of claim 22 including selecting the additive from the group consisting of:

- a) $X=Y=NR_1R_2$;
- b) $X \neq Y$ then $X=NR_1R_2$ and $Y=CR_3R_4R_5$;
- c) $X \neq Y$ then $X=NR_1R_2$ and $Y=NR'_1R'_2$;
- d) $X=Y=CR_3R_4R_5$ and R_3 is an unsaturated group; and
- e) $X \neq Y$ then $X=CR_3R_4R_5$, R_3 is an unsaturated group and $Y=CR'_3R'_4R'_5$, and mixtures thereof.

24. The method of claim 22 including selecting the additives from the group consisting of di-(N-succinimidyl)carbonate, benzyl-N-succinimidyl carbonate, di(1-benzotriazolyl)carbonate, N-(benzyloxycarbonyloxy)succinimide, N-benzyloxycarbonyloxy-5-norbornene-2,3-dicarboximide, N-(9-fluorenyl-methoxycarbonyloxy)succinimide, 2-(4-methoxybenzyloxycarbonyloxyimino)-2-phenylacetonitrile, 1,5-bis(succinimidooxycarbonyloxy)pentane, succinimidyl-2,2,2-trichloroethyl carbonate, diallyl carbonate, allyl ethyl carbonate, 4-phenyl-1,3-dioxolan-2-one and dibenzyl carbonate, and mixtures thereof.


DATED the 9th day of February, 1999.

WILSON GREATBATCH LIMITED


WATERMARK PATENT & TRADEMARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

IAS:JPF:PCP Doc 25 AU1511797.WPC


15117/97

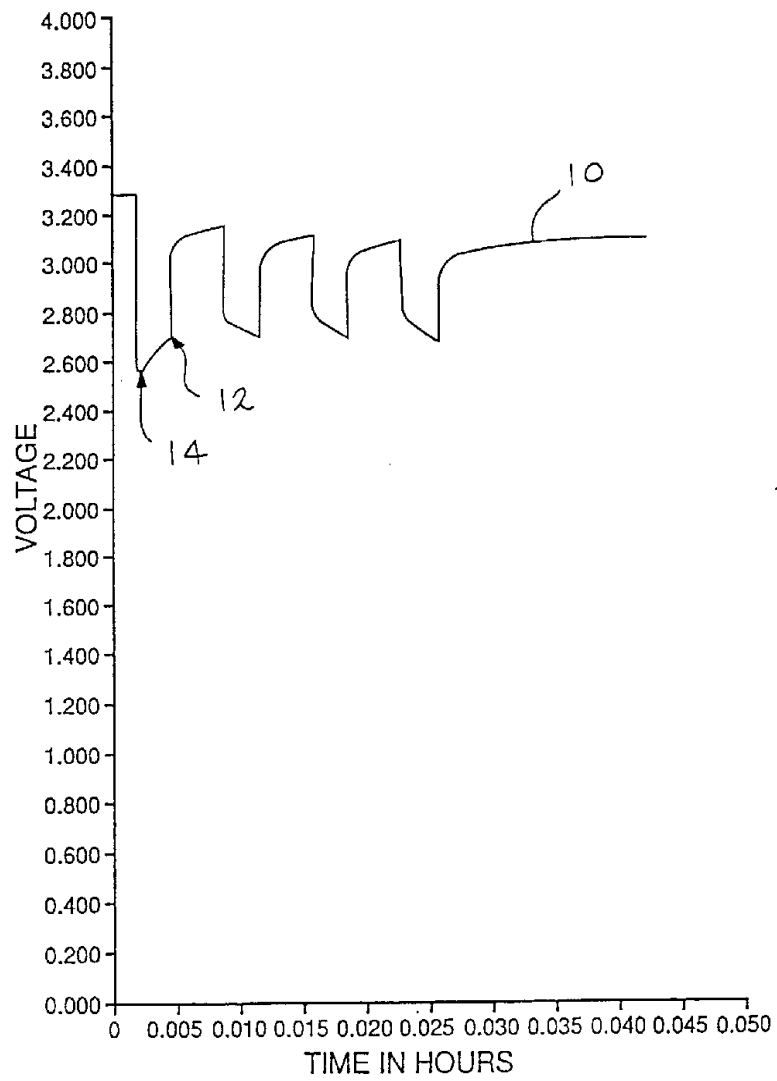

—FIG. 1

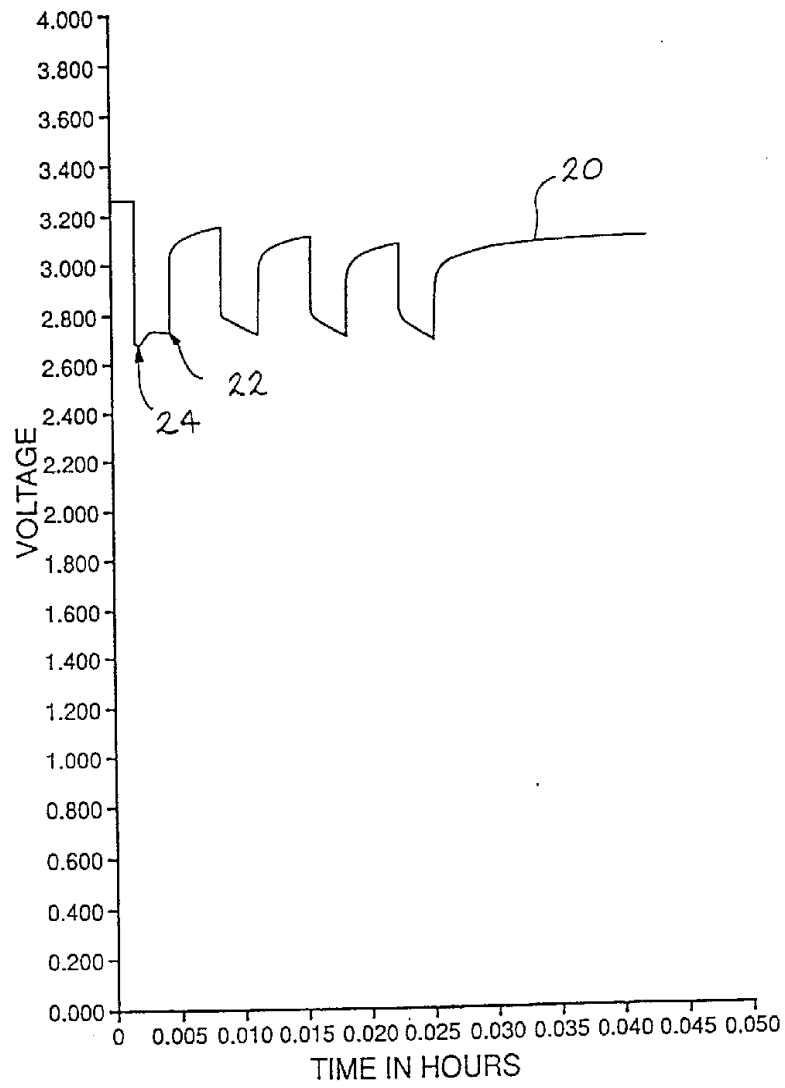

—FIG. 2

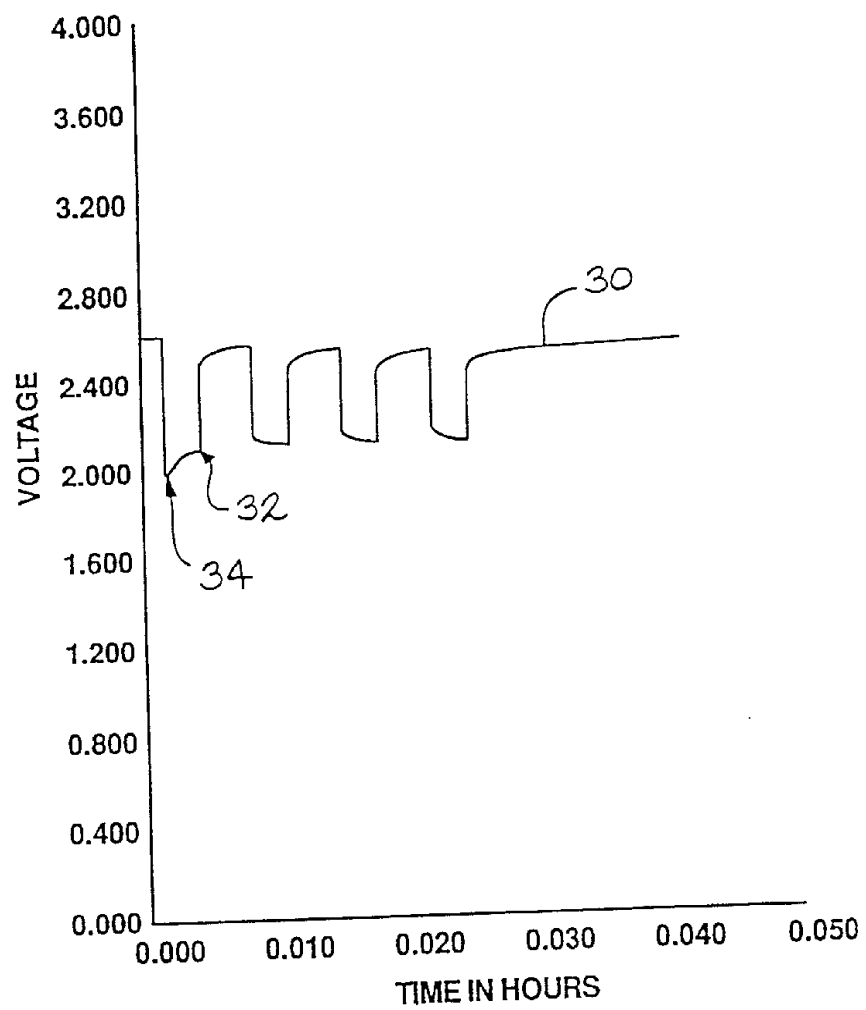

—FIG. 3

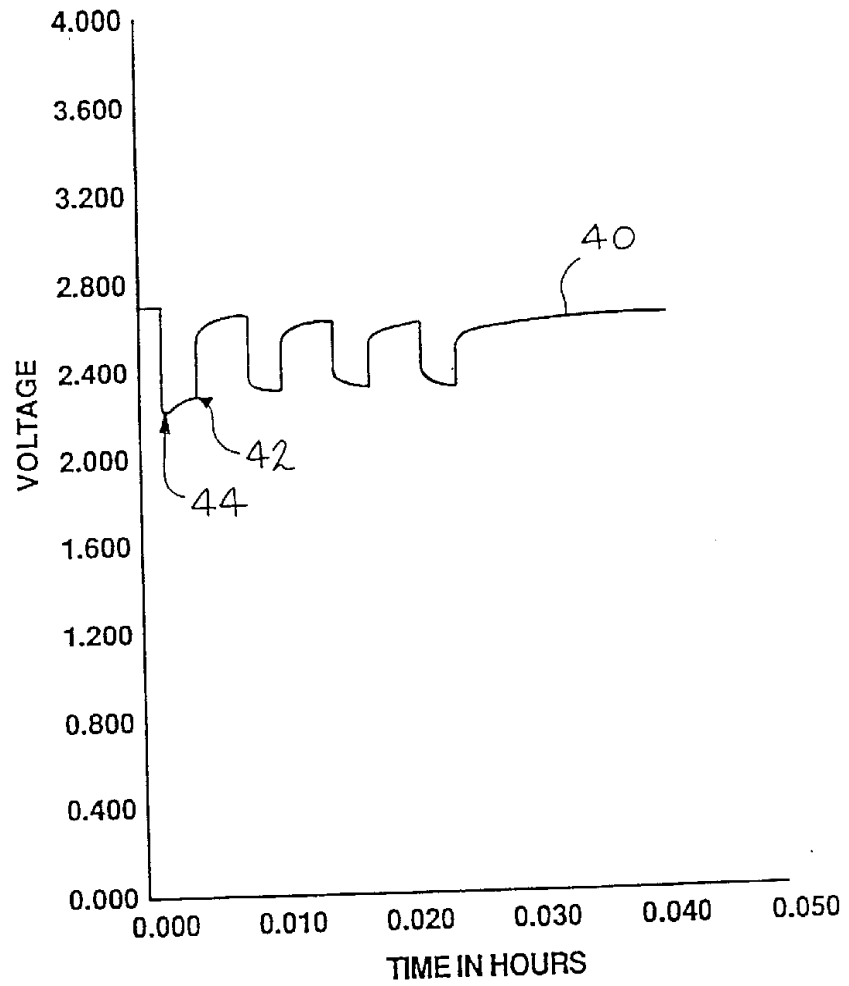


FIG. 4

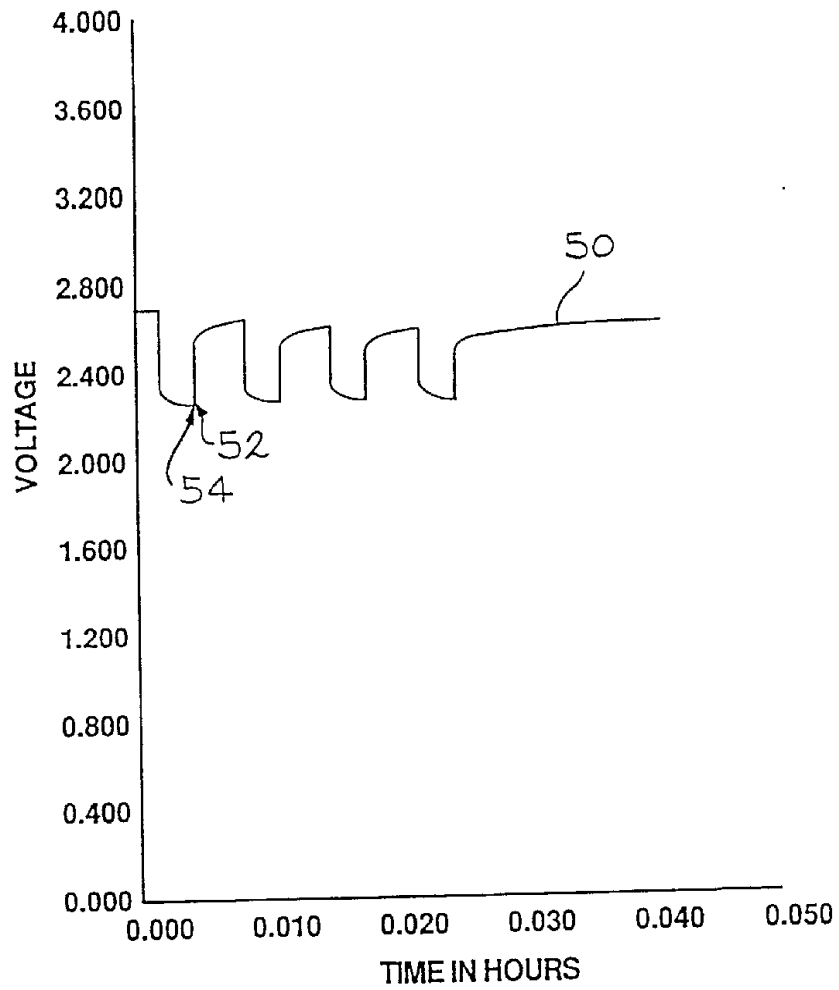


FIG. 5


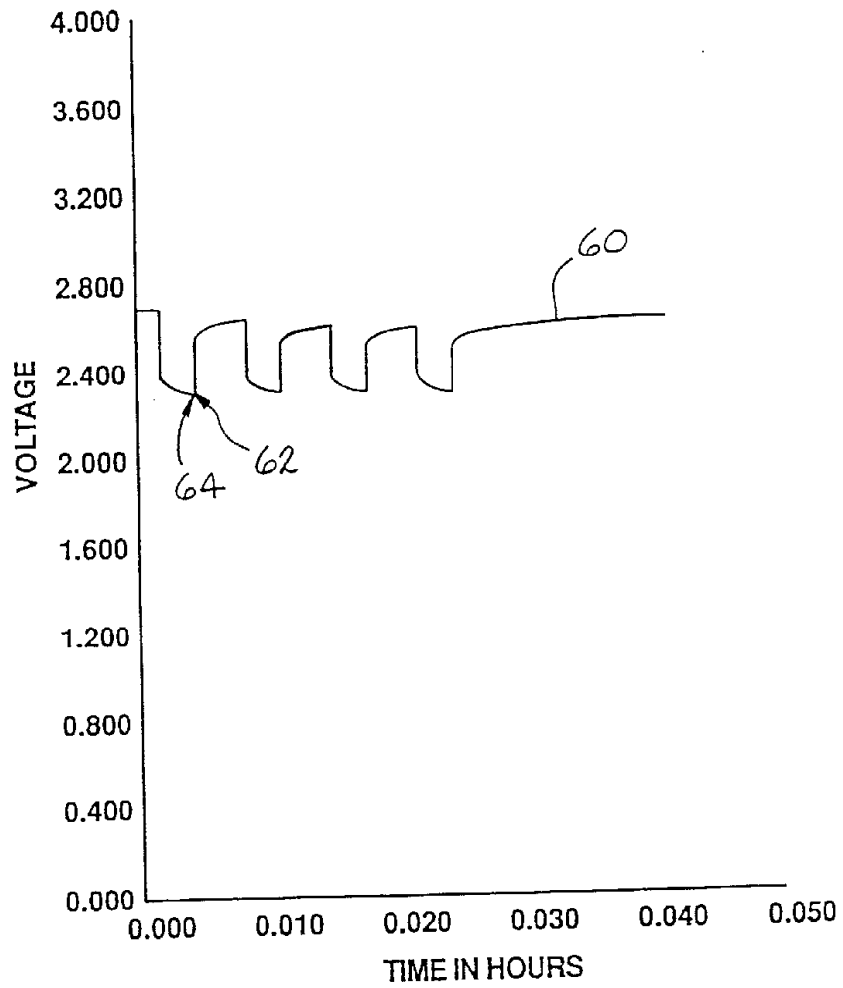


FIG. 6

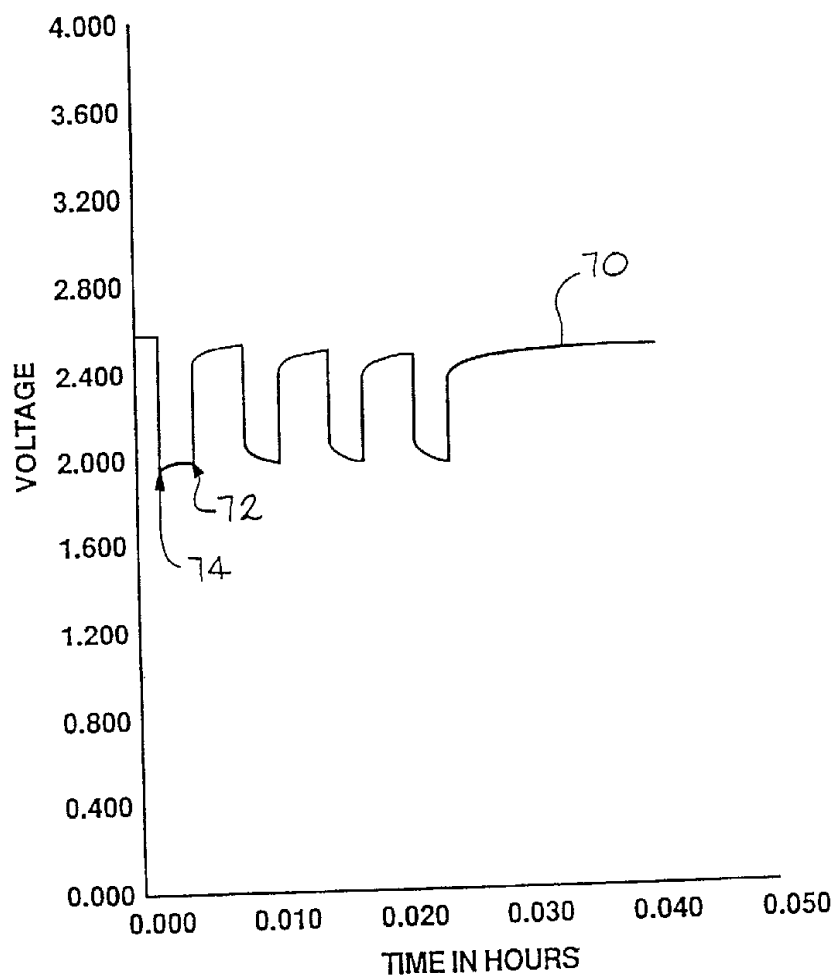

—FIG. 7

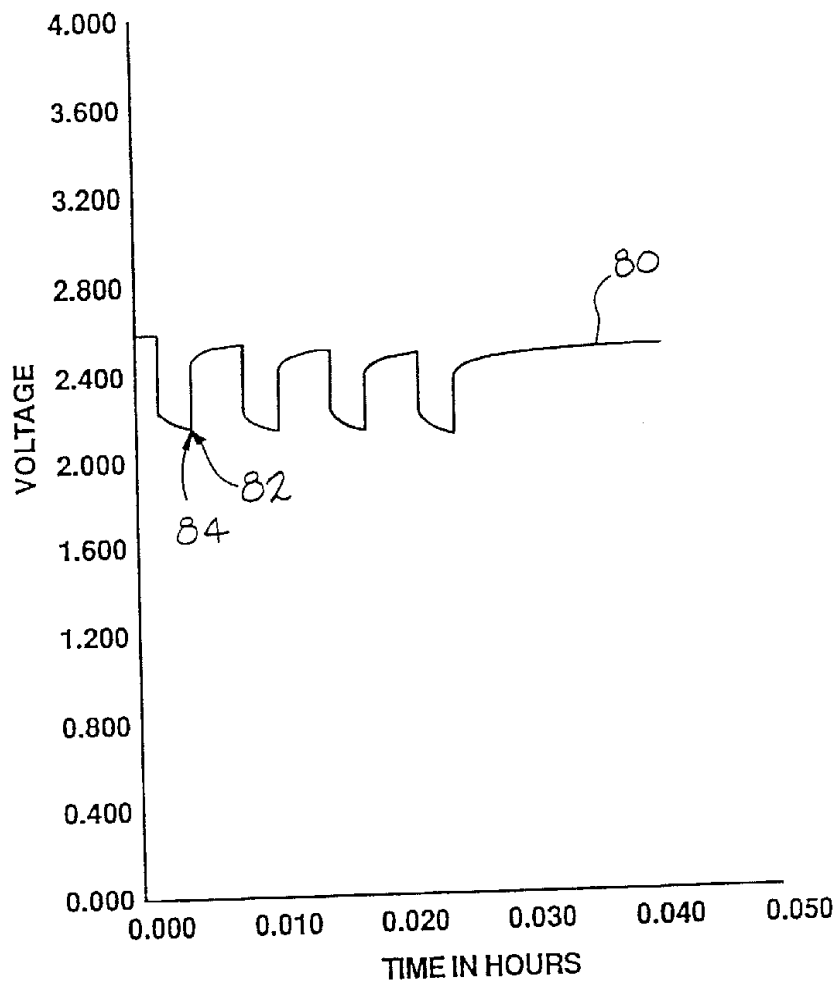


FIG. 8

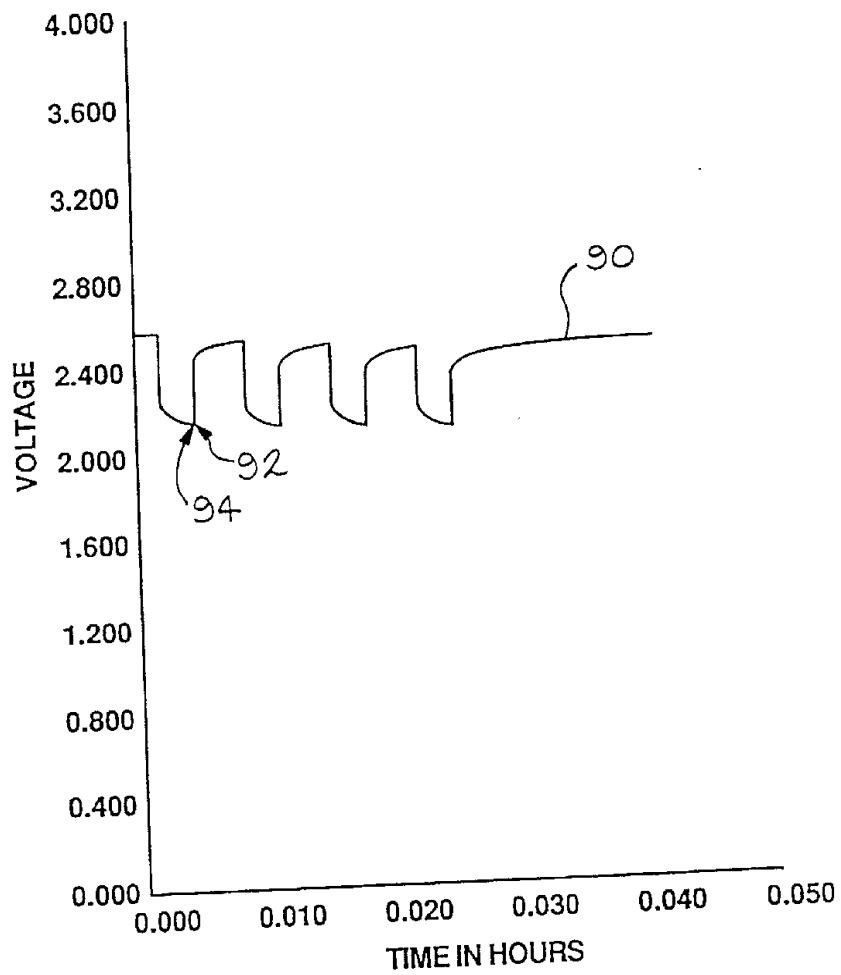


FIG. 9