

**(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)**

**(19) World Intellectual Property Organization**

International Bureau



**(10) International Publication Number**

**WO 2019/068767 A1**

**(43) International Publication Date**

11 April 2019 (11.04.2019)

**(51) International Patent Classification:**

C22F 1/04 (2006.01)

**(21) International Application Number:**

PCT/EP2018/076913

**(22) International Filing Date:**

03 October 2018 (03.10.2018)

**(25) Filing Language:**

English

**(26) Publication Language:**

English

**(30) Priority Data:**

17194723.7 04 October 2017 (04.10.2017) EP

**(71) Applicant:** AUTOMATION, PRESS AND TOOLING, AP & T AB [SE/SE]; Industriegatan 5, 514 32 Tranemo (SE).

**(72) Inventors:** KOROSCHETZ, Christian; Grönsångarevägen 19, 43838 Landvetter (SE). ANYASODOR, Gerald; Nygatan 18 lgh 1001, 52334 Ulricehamn (SE).

**(74) Agent:** AWA SWEDEN AB; Östra Storgatan 7, 553 21 Jönköping (SE).

**(81) Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,


HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

**(54) Title:** METHOD AND SYSTEM FOR FORMING ALUMINUM ALLOY BLANK

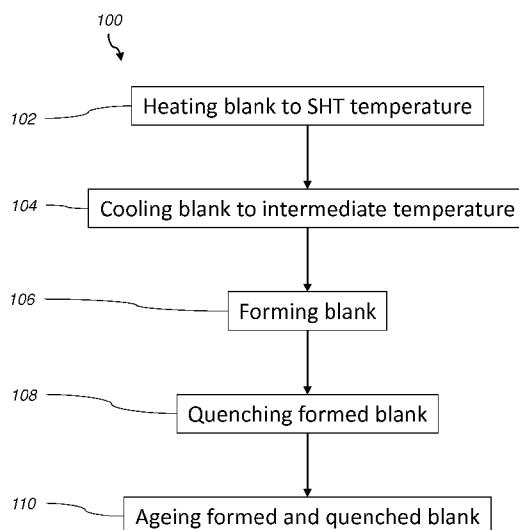

**(57) Abstract:** The present invention relates to a method of forming a 6xxx or 7xxx series Al alloy blank is provided. The method comprises the steps of heating the blank to a solutionization (SHT) temperature,  $T_{SHT}$ , for the alloy of the blank at a heating station and keeping the blank at said SHT temperature until SHT is complete, cooling the blank at a cooling station to an intermediate temperature,  $T_{ITM}$ , at which the kinetic movement for the alloy in the blank stops and at a cooling rate that is high enough such that re-crystallization in the alloy of the blank does not occur, forming the blank in a forming tool, quenching the formed blank to room temperature,  $T_E$ , and artificially ageing the formed and quenched blank in an ageing station. The present invention further relates to a 6xxx or 7xxx series Al alloy blank forming system (1, 3).

Fig. 1

## METHOD AND SYSTEM FOR FORMING ALUMINUM ALLOY BLANK

### Technical Field

The present disclosure relates to a heat treatment method of blank sheets of aluminum alloys, and especially to a method suitable for blank sheets of any aluminum alloy grade, composition or temper.

### Background

In especially the automotive industry, the hot forming of blank sheets is important, in particular hot forming of blank sheets of high strength

10 aluminum alloys. There are numerous methods known for forming aluminum alloy blanks. E.g. the hot forming die quenching methods as presented in WO2010/032002 and WO2015/136299.

However, such known methods have several drawbacks. For instance, these methods are not suitable for all aluminum alloy grades. The method in

15 WO2010/032002 may be suitable for AA6082 material, but not for any AA7xxx material. Further, the aluminum alloy grade material compositions and tempers may vary from different material suppliers. The resulting formed components using the known methods are very sensitive to different compositions and tempers.

20 Further, the known processes have problems in being suitable for mass production due to lack of stability, repeatability and accuracy of the formed components.

Consequently, there is a need for production method for forming aluminum alloy blank sheets which alleviate the mentioned drawbacks of

25 known technology.

### Summary

It is an object of the present invention to provide an improved solution that alleviates the mentioned drawbacks with present devices. Furthermore, it

30 is an object to provide a method resulting in improved accuracy of the formed

parts and which method is suitable for any aluminum alloy grade, composition and temper.

The invention is defined by the appended independent claims, with embodiments being set forth in the appended dependent claims, in the 5 following description and in the drawings.

According to a first aspect of the present invention, a method of forming a 6xxx or 7xxx series Al alloy blank into a component is provided. The method comprises the steps of heating the blank to a solutionization (SHT) temperature,  $T_{SHT}$ , for the alloy of the blank at a heating station and keeping 10 the blank at said SHT temperature until SHT is complete, cooling the blank at a cooling station to an intermediate temperature,  $T_{ITM}$ , at which the kinetic movement for the alloy in the blank stops and at a cooling rate that is high enough such that re-crystallization in the alloy of the blank does not occur, forming the blank in a forming tool, quenching the formed blank to room 15 temperature,  $T_E$ , and artificially ageing the formed and quenched blank in an ageing station.

By using a method according to the present invention, a method is provided that, with high accuracy of the formed components and low amount of springbacks, is suitable for any 6xxx or 7xxx series aluminum alloy grade 20 sheet blank.

The time in which the blank is kept at or above the solution heat treatment (SHT) temperature may be chosen to be sufficient to ensure maximum concentration of hardening elements, such as copper, zinc, magnesium, manganese, silicon etc. in the solid solution. The concentration 25 and rate of dissolution of these elements in the solid solution may increase with increasing temperature.

By cooling the blank at a specific cooling rate the SHT composition of the solid solution may be preserved at the intermediate temperature. If the blank were to be cooled in a too slow rate, the alloying elements may diffuse 30 through the solid solution and concentrate at the grain boundaries, in large voids, undissolved particles or other undesired locations. To achieve improved strength properties of the formed part, it may be desirable to avoid

such recrystallization and decrease the diffusion process and maintain the alloying elements in the solid solution by providing a rapid cooling. The cooling rate to achieve this may be selected depending on the aluminum alloy grade and composition of the blank. Further, a quenching rate may be

5 selected depending on the aluminum alloy grade and composition of the blank.

The intermediate temperature may be a temperature in an intermediate temperature range being above room temperature and below the SHT temperature. In the intermediate temperature range, the time required for a

10 given amount of precipitation may increase due to low solute diffusion coefficients. Though the thermodynamic potential for precipitation for most aluminum alloy grades are mostly high at the intermediate temperature because of the high degree of solute supersaturation, the rate of precipitate formation is low due to the inability of atoms to diffuse, increased nucleation 15 or precipitation and growth at the temperature range.

As an example, an intermediate temperature for a 7xxx series Al alloy blank may be chosen between 400-420 °C. Further, for a AA6082 Al alloy blank, the intermediate temperature may be chosen as 300-350 °C. At such temperatures, the kinetic movement in the alloy material of the blank may

20 have stopped.

The cooling to the intermediate temperature may be performed at a cooling station being separate from the forming tool. The cooling may thereby be provided fast and with homogeneous temperature in the blank.

As an example, for a 6xxx series Al alloy (such as AA6082), a cooling 25 rate of at least 30 K/s may be chosen. Further, for a 7xxx series Al alloy, a cooling rate of at least 30 K/s, at least 50 K/s, or preferably about 100 K/s, may be chosen.

In one embodiment, the intermediate temperature may be selected depending on the Al alloy of the blank, and being above 100 °C. The 30 intermediate temperature should be selected as a temperature wherein the kinetic movement of the alloy material of the blank stops. Depending on which 6xxx or 7xxx series Al alloy is used in the blank, the optimal intermediate

temperature may differ. However, the intermediate temperature may be above 100 °C. Further, the intermediate temperature may be selected being the highest possible temperature at which the kinetic movement in the present alloy material stops.

- 5        In one embodiment, the forming tool may be preheated to the intermediate temperature. The blank may thereby be formed at the intermediate temperature. The temperature of the blank may thereby be controlled during the forming, which may improve the accuracy in the properties of the final formed component.
- 10      In one embodiment, the blank may be kept at the intermediate temperature during the forming step in the forming tool. The temperature of the tool may be controlled in order to keep the temperature of both the tool and the blank stable at the intermediate temperature during the forming. After the forming, the temperature of the forming tool may be controlled in order to 15      quench the formed blank to room temperature. A temperature control function may be provided for the forming tool in order to control the temperature of the forming tool to the intermediate temperature throughout the forming step.
- 20      In one embodiment, the forming and the quenching may be performed in separate forming tools. A first forming tool may form the blank at the intermediate temperature, and a second forming tool may quench the blank to room temperature. In a further embodiment, the first forming tool may be preheated to the intermediate temperature, thereby keeping the blank at the intermediate temperature during the forming. The blank may then be transferred to the second forming tool, quenching the blank to room 25      temperature. The second forming tool may be a cold forming tool. Alternatively, the first forming tool may not be preheated, thereby cooling the blank during the forming. The blank may then in the second forming tool be quenched in a controlled manner to room temperature in the second forming tool.
- 30      According to a second aspect of the present invention, a 6xxx or 7xxx series Al alloy blank forming system is provided. The system comprises a heating station configured to heat a blank to its SHT temperature,  $T_{SHT}$ , a

cooling station configured to cool the blank to an intermediate temperature  $T_{ITM}$ , at which the kinetic movement for the alloy in the blank has stopped and at a cooling rate that is high enough such that re-crystallization in the alloy of the blank does not occur, a forming tool configured to form and quench the

5 blank, and an ageing station configured to provide an artificial ageing process to the formed and quenched blank.

By a heating station being configured to heat a blank to its SHT temperature it may be meant a heating station comprising means capable of heating a blank inserted into the heating station to its SHT temperature. By a

10 cooling station configured to cool the blank to an intermediate temperature at which kinetic movement for the alloy in the blank has stopped and at a cooling rate that is high enough such that re-crystallization in the alloy of the blank does not occur it may be meant a cooling station comprising means capable of cooling a blank in the specified way. By a forming tool configured

15 to form and quench a blank it may be meant a forming tool comprising means capable of forming and quenching the blank. By an ageing station configured to provide an artificial ageing process to the formed and quenched blank it may be meant an ageing station comprising means capable of such artificial ageing process.

20 Further embodiments of the system according to the present invention may be provided similarly as discussed above for the method. The heating station, the cooling station, the forming tool and/or the ageing station may further comprise means capable of providing additional functions as discussed above for the method.

25

#### Brief Description of the Drawings

The invention will in the following be described in more detail with reference to the enclosed drawings, wherein:

30 Fig. 1 shows a flow chart of a method according to an embodiment of the invention;

Fig. 2 shows a block scheme of a system according to an embodiment of the invention;

Fig. 3 shows a diagram view of a process of the method according to an embodiment of the invention;

5 Fig. 4 shows a flow chart of a method according to an embodiment of the invention;

Fig. 5 shows a block scheme of a system according to an embodiment of the invention; and

10 Fig. 6 shows a diagram view of a process of the method according to an embodiment of the invention.

#### Description of Embodiments

The present invention will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of 15 the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. In the drawings, like numbers refer to like elements.

20 As illustrated in figure 1, a method 100 according to an embodiment of the present invention comprises a first step of heating 102 a 6xxx or 7xxx series Al alloy blank 2 to the solutionization (SHT) temperature for the specific alloy of the blank 2. As further seen in fig. 2, a blank forming system 1 is provided, wherein the heating 102 is performed in a heating station 10. In the 25 heating station 10, when the blank 2 has reached its SHT temperature or above, the temperature of the blank 2 is kept at the SHT temperature or above until the solutionization of the alloy of the blank 2 is complete.

30 In a next step, the blank 2 is cooled 104 to an intermediate temperature. In the blank forming system 1, the cooling 104 is performed at a cooling station 20. The intermediate temperature is selected for the alloy of the blank 2 at which temperature the kinetic movement for the alloy stops.

The cooling 104 is performed at a cooling rate high enough such that recrystallization in the alloy of the blank 2 does not occur.

In a next step, the blank 2 is formed 106 in a forming tool 32 at a press station 30 in the blank forming system 1. The press station 30 may be a press 5 suitable for aluminum alloy blank sheet forming, such as a hydraulic press, a servo press (servo hydraulic or servo mechanical).

After forming 106 of the blank 2, the formed blank 2', or formed component 2', is quenched 108 in the forming tool 32 to room temperature.

Finally, the formed blank 2' is artificially aged 110 at an ageing station 10 40. The ageing process is provided to control and limit the recrystallization in the alloy material of the blank 2.

Fig. 3 illustrates the blank forming method 100 according to an embodiment of the present invention. The blank 2 is heated from room temperature  $T_E$  to the SHT temperature  $T_{SHT}$ , and kept at the  $T_{SHT}$  for a 15 necessary time  $t_1-t_2$  as discussed above. At  $t_2$  the blank 2 is rapidly cooled to the intermediate temperature  $T_{ITM}$  at the necessary cooling rate as discussed above. The blank 2 is then formed during  $t_2-t_3$  in the forming tool 32. At  $t_3$  the formed blank 2' is quenched to room temperature  $T_E$ .

At the ageing station 40, the formed component 2' is processed for 20 artificial ageing by being heated to an ageing temperature  $T_A$ . The component 2' is kept at the ageing temperature  $T_A$  during a period  $t_5-t_6$  until the ageing process is complete. The time  $t_3-t_4$  provides a transfer of the formed blank to the ageing station 40.

The blank 2 is transferred between the different stations 10, 20, 30, 40. 25 The transfer may be performed such that minimal heat loss in the blank 2 is achieved.

Figs. 4 and 5 illustrates a method 200 and system 3 according to an embodiment of the invention. The steps of heating 202 and cooling 204 correspond to the steps 102 and 104 as discussed above. Next, the blank 2 is 30 formed 206 in a preheated first forming tool 32a at a press station 30 in the blank forming system 3. The first forming tool 32a is preheated to the intermediate temperature. The blank 2 is thereby not further cooled when

arranged in the first forming tool 32a. The intermediate temperature may be kept in the first forming tool 32a and the blank 2 throughout the forming process 106.

Next, the formed blank is moved to a separate cold second forming 5 tool 32b. In the cold second forming tool 32b, the blank is quenched to room temperature. The cold second forming tool 32b may further form and quench the blank to its final shaped component.

Fig. 5 further illustrates an optional arrangement of ageing which can be used for either of the above presented embodiments. In such ageing 10 embodiment, a first pre-ageing step is performed at a pre-ageing station 40a, in which the formed component 2' is heated to the ageing temperature  $T_A$ , kept at  $T_A$  until the pre-ageing is complete and then cooled to room temperature  $T_E$ . After transfer to a second ageing station 40b, the component 2' is again heated to  $T_A$ , kept at  $T_A$  for a time period and thereafter cooled to 15 room temperature  $T_E$ , to provide a paint baking of the component 2'.

Alternatively, the component can be heated to a different temperature in the paint baking process than the temperature  $T_A$  in the pre-ageing process. A two-step ageing process is thereby provided comprising pre-ageing and paint baking.

20 Preferably, the pre-ageing process is integrated in the forming/stamping line, and performed in direct connection to the forming of the component 2'. The paint baking process may be performed at a later stage, whichever may be suitable for the production line.

The use of the pre-ageing process prevents natural ageing after 25 stamping in the second forming tool. Otherwise, natural ageing may occur after about 30 minutes for 7xxx series Al alloy materials or about one hour for 6xxx series Al alloy materials. The paint baking process cannot take effect on the formed component to achieve peak hardness. The pre-ageing process further enables post processing activities such as transport to another 30 location, storage for a required period before assembly or joining operations. Then, the paint baking operation may be performed at the most suitable time

to provide optimal peak hardness in a short cycle time and at a low cost. This may e.g. be after joining the formed component 2' to a desired assembly.

Fig. 6 illustrates the process blank forming method 200 according to an embodiment of the present invention. The blank 2 is heated from room temperature  $T_E$  to the SHT temperature  $T_{SHT}$ , and kept at the  $T_{SHT}$  for a necessary time  $t_1-t_2$  as discussed above. Between  $t_2$  and  $t_3$ , the blank 2 is cooled to the intermediate temperature  $T_{ITM}$  at the necessary cooling rate as discussed above. The blank 2 is then formed during  $t_3-t_4$  in the preheated first forming tool 32a. Between  $t_4$  and  $t_5$  the formed blank 2' is quenched to room temperature  $T_E$  in the second forming tool 32b.

Fig. 6 further illustrate the process of the embodiment comprising a pre-ageing and a paint baking step as discussed above. At the pre-ageing station 40a, the formed blank 2' is processed for artificial ageing by being heated to the ageing temperature  $T_A$  and kept at the ageing temperature  $T_A$  during a period  $t_7-t_8$ . After being cooled to room temperature, the blank 2' is in the second ageing station 40b again heated to the ageing temperature  $T_A$  and kept at  $T_A$  between  $t_{11}-t_{12}$  until the ageing process is complete. The blank 2' formed to a final shaped component is then again cooled to room temperature  $T_E$ .

In the drawings and specification, there have been disclosed preferred embodiments and examples of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for the purpose of limitation, the scope of the invention being set forth in the following claims.

CLAIMS

1. A method (100) of forming a 6xxx or 7xxx series Al alloy blank (2),  
5 wherein the method comprises the steps of:
  - heating (102) the blank to a solutionization (SHT) temperature ( $T_{SHT}$ ) for the alloy of the blank at a heating station (10) and keeping the blank at said SHT temperature until SHT is complete,
  - cooling (104) the blank at a cooling station (20) to an intermediate 10 temperature ( $T_{ITM}$ ) at which the kinetic movement for the alloy in the blank stops and at a cooling rate that is high enough such that re-crystallization in the alloy of the blank does not occur,
  - forming (106) the blank in a forming tool (32),
  - quenching (108) the formed blank (2') to room temperature ( $T_E$ ),
- 15 15 artificially ageing (110) the formed and quenched blank in an ageing station (40).
2. The method according to claim 1, wherein the intermediate temperature ( $T_{ITM}$ ) is selected depending the alloy of the blank (2) and when 20 the kinetic movement of the material of the alloy stops, wherein the intermediate temperature is above 100 °C.
3. The method according to any of the preceding claims, wherein the forming tool (32) is preheated to the intermediate temperature ( $T_{ITM}$ ).  
25
4. The method according to any of the preceding claims, wherein the blank (2) is kept at the intermediate temperature ( $T_{ITM}$ ) during the forming (106) in the forming tool (32).
- 30 5. The method according to any of the preceding claims, wherein the forming is performed in a first forming tool (32a) and the quenching is performed in a second forming tool (32b).

6. A 6xxx or 7xxx series Al alloy blank forming system (1, 3) comprising,
  - a heating station (10) configured to heat a blank (2) to its SHT temperature ( $T_{SHT}$ ),
  - a cooling station (20) configured to cool the blank to an intermediate temperature ( $T_{ITM}$ ) at which the kinetic movement for the alloy in the blank has stopped and at a cooling rate that is high enough such that recrystallization in the alloy of the blank does not occur,
  - 10 at least one forming tool (32) configured to form and quench the blank, and
  - an ageing station (40) configured to provide an artificial ageing process to the formed and quenched blank (2').
- 15 7. The system according to claim 6, wherein the cooling station (20) is configured to cool the blank (2) to the intermediate temperature ( $T_{ITM}$ ) being selected depending the alloy of the blank (2) and when the kinetic movement of the material of the alloy stops, and wherein the intermediate temperature is above 100 °C.
- 20 8. The system according to claim 6 or 7, wherein the forming tool is configured to be preheated to the intermediate temperature prior to forming the blank.
- 25 9. The system according to any of the claim 5-8, wherein the forming tool is configured to keep the blank (2) at the intermediate temperature ( $T_{ITM}$ ) during the forming (106) in the forming tool (32).
- 30 10. The system according to any of the claims 5-9, wherein the system comprises a first forming tool (32a) configured to form the blank (2), and a second forming tool (32b) configured to quench the blank.

1/6

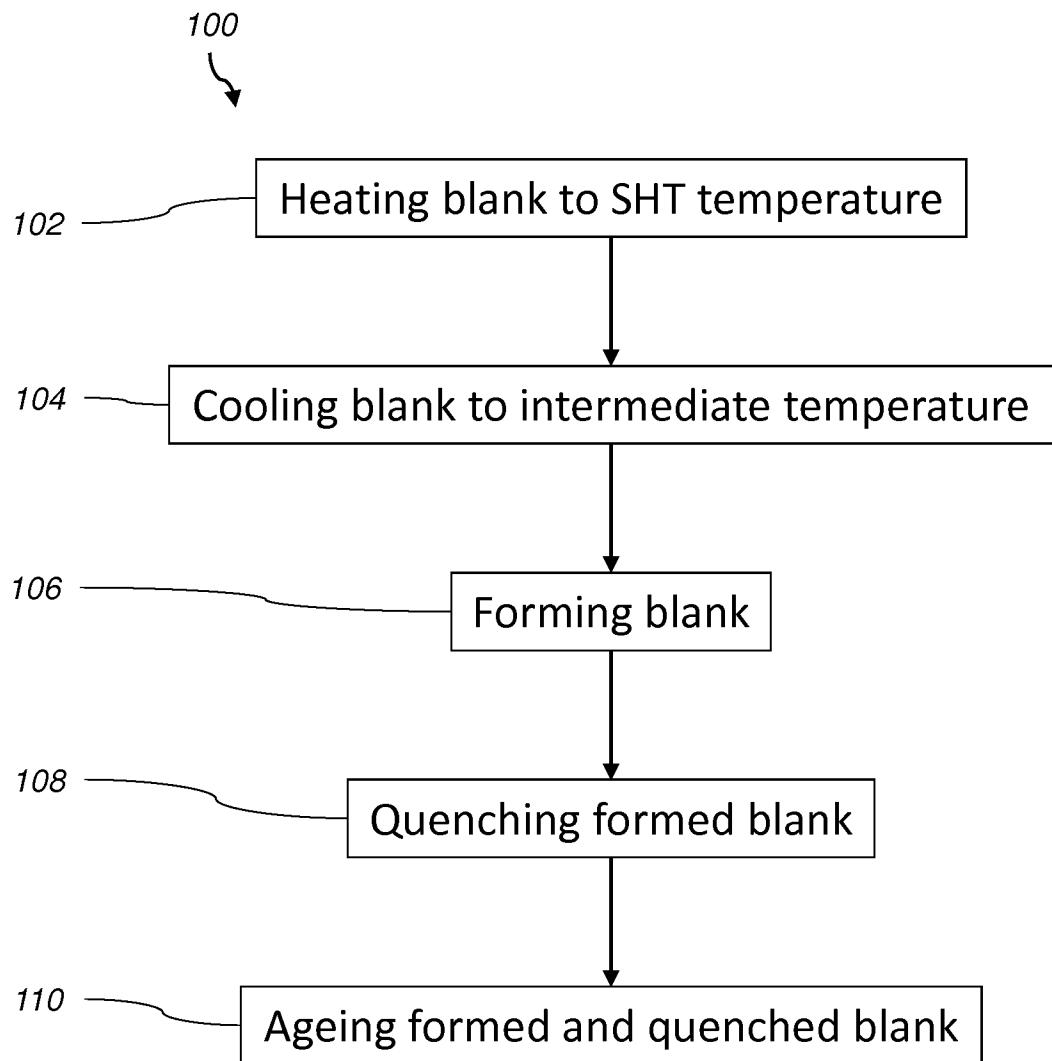


Fig. 1

2/6

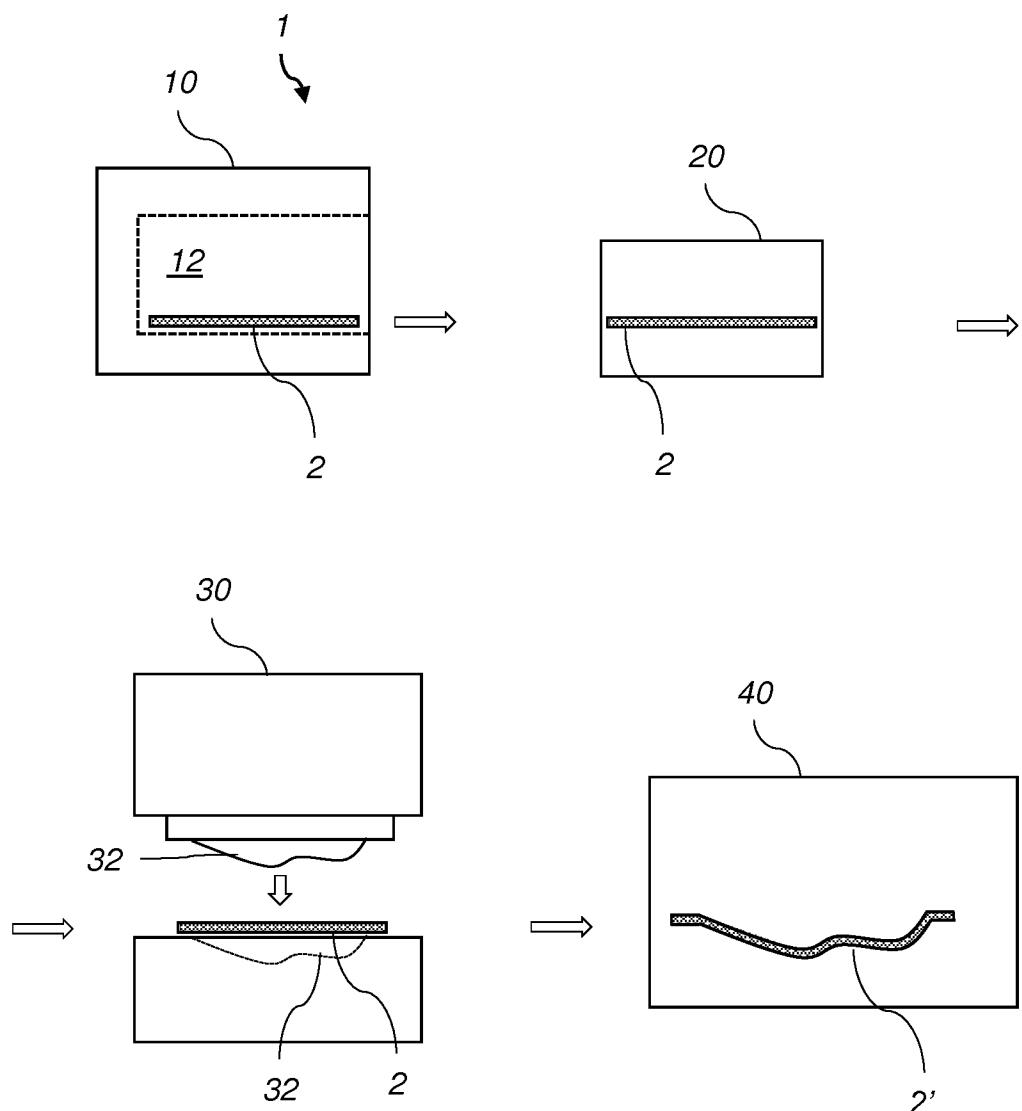


Fig. 2

3/6

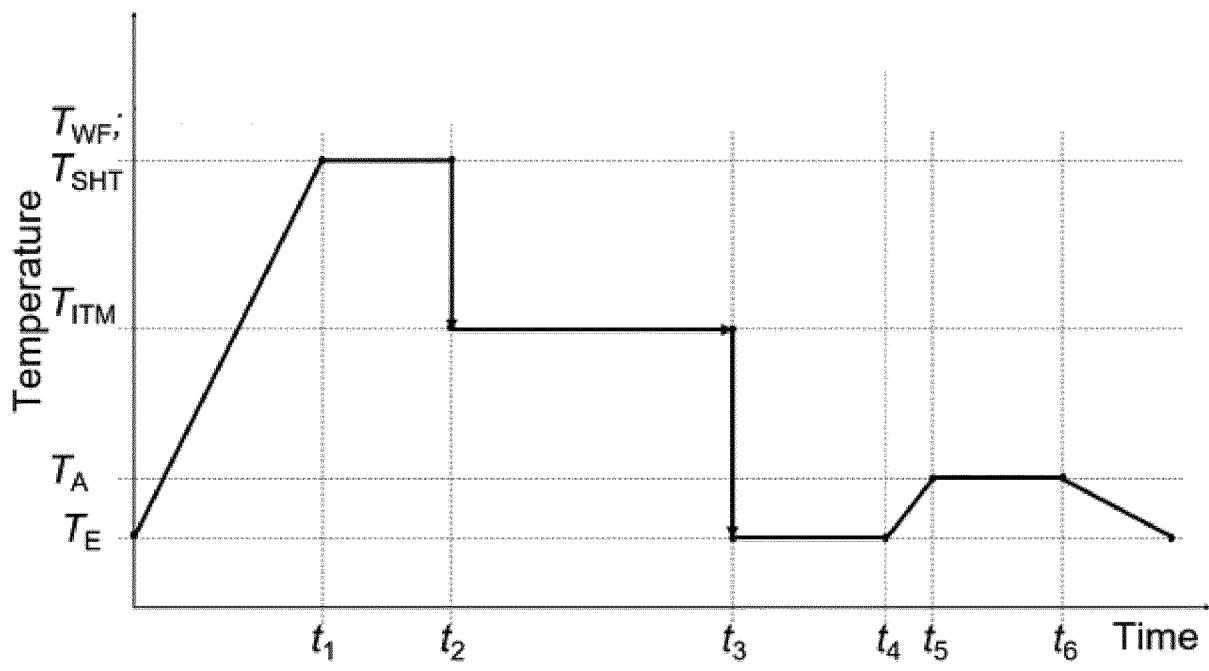


Fig. 3

4/6

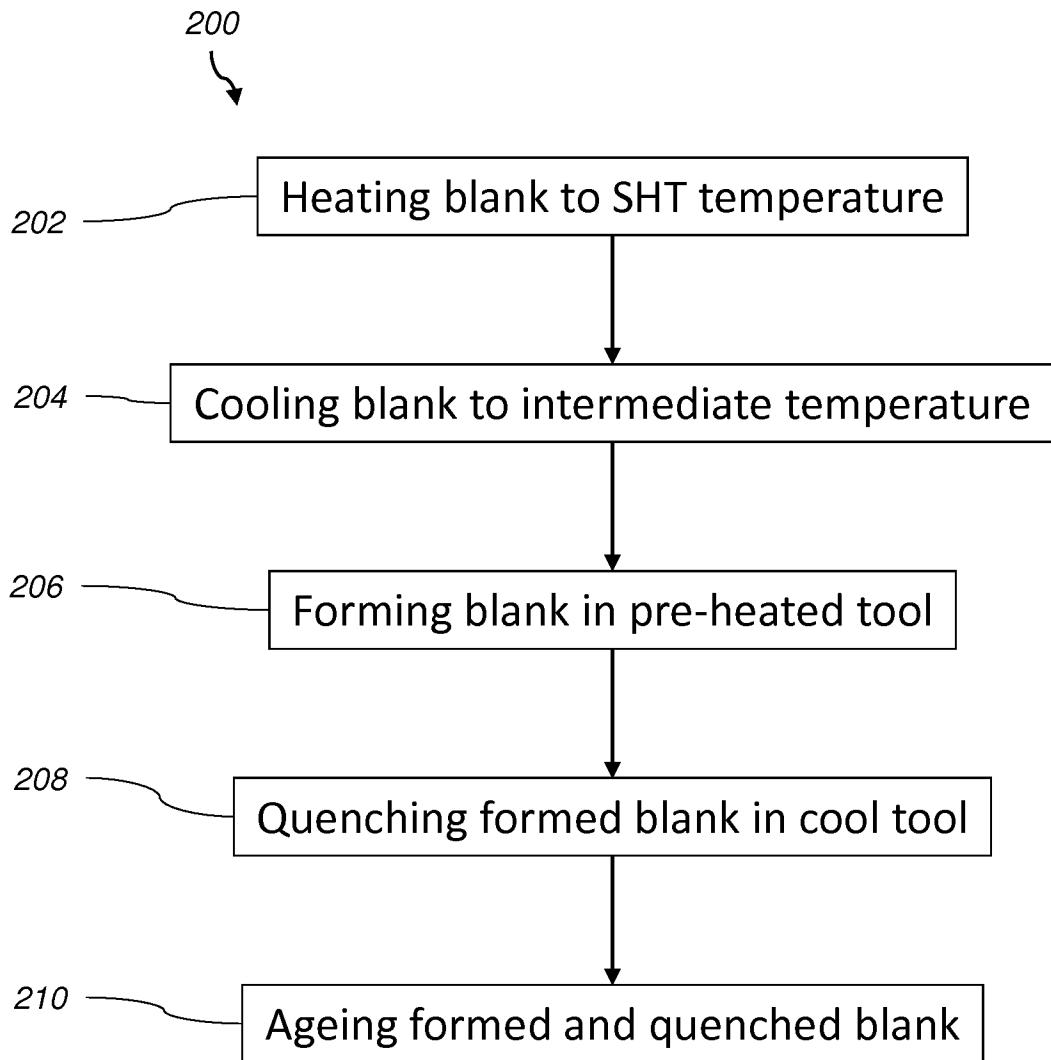


Fig. 4

5/6

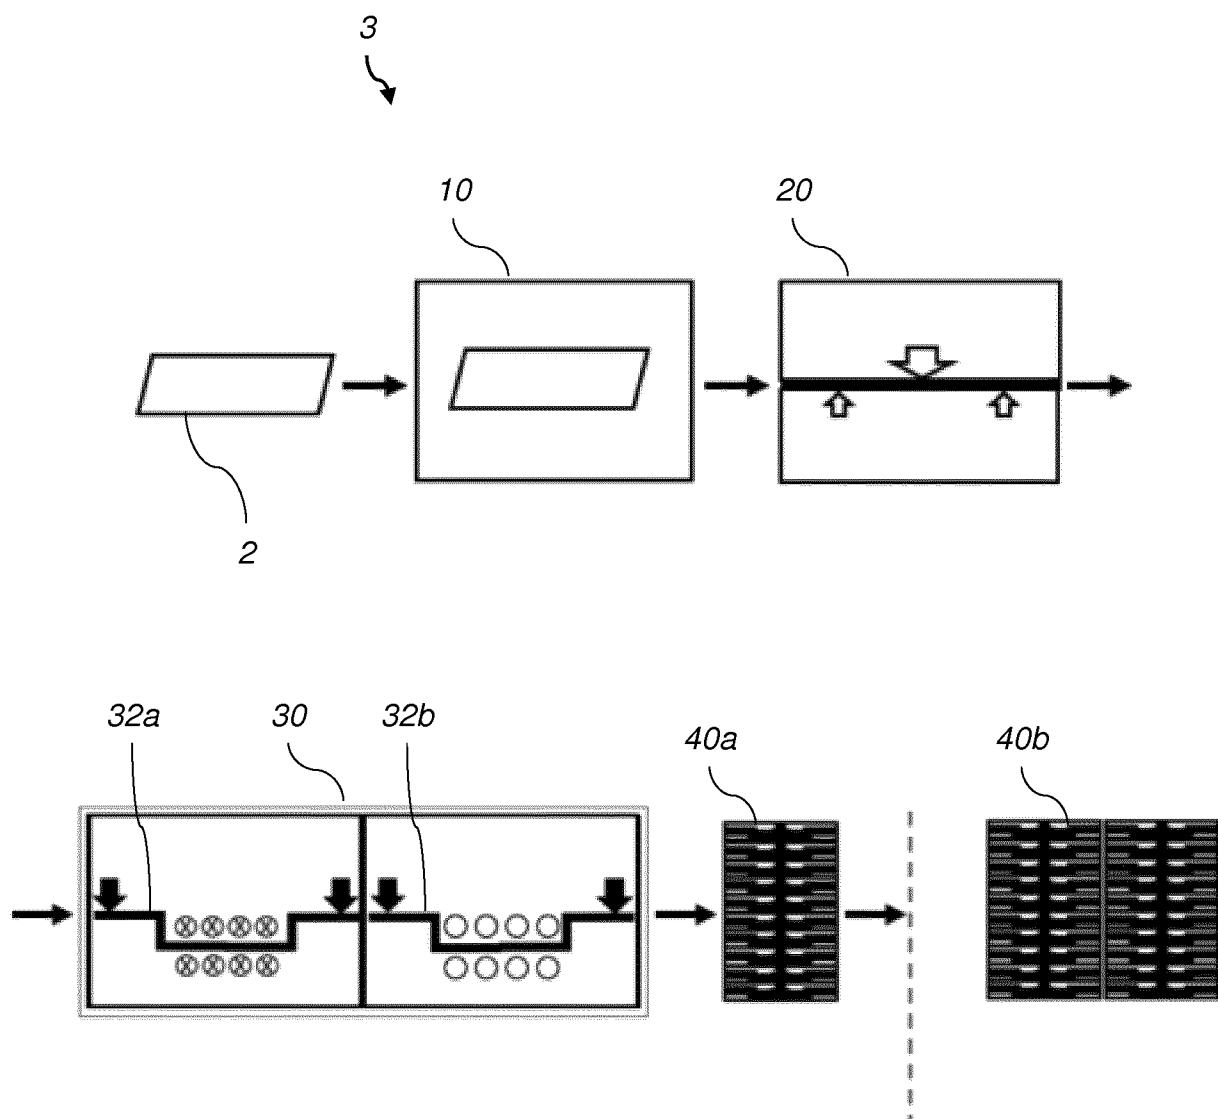


Fig. 5

6/6

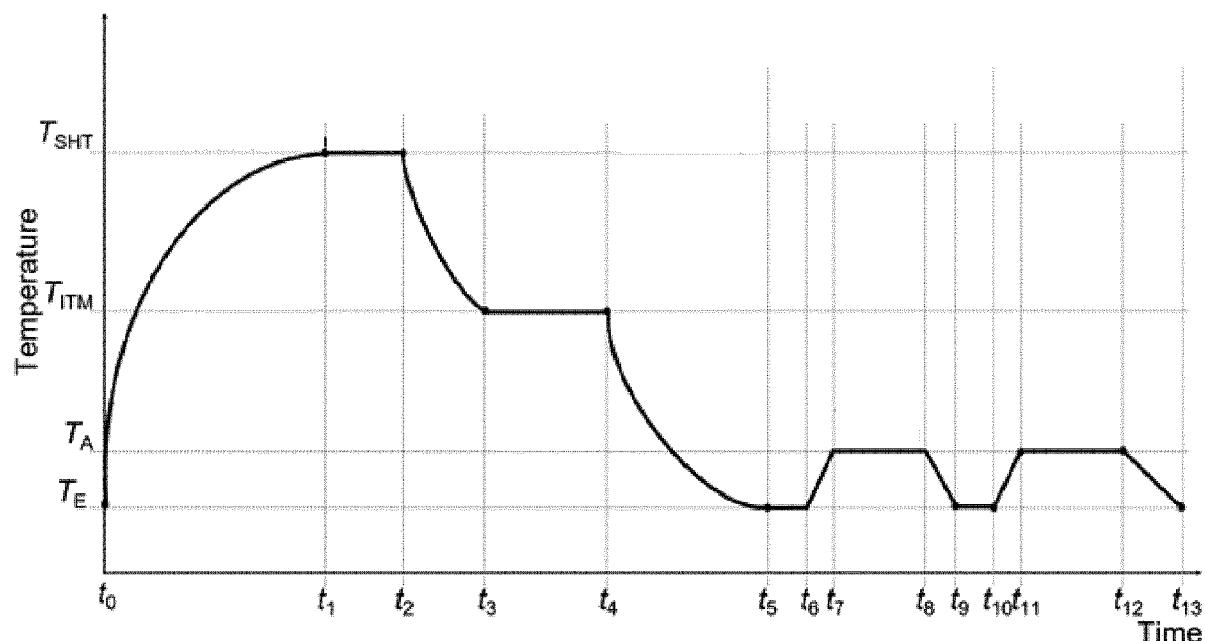


Fig. 6

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2018/076913

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. C22F1/04  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
C22F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 987 878 A2 (BENTELER AUTOMOBILTECHNIK GMBH [DE]) 24 February 2016 (2016-02-24) claims 1-13 -----	1-10
X	DE 10 2012 007213 A1 (DAIMLER AG [DE]) 29 November 2012 (2012-11-29) claims 1-5; figures 1,2 -----	1,6-10
A	WO 2010/032002 A1 (UNIV BIRMINGHAM [GB]; FOSTER ALISTAIR [GB]; DEAN TREVOR A [GB]; LIN JI) 25 March 2010 (2010-03-25) cited in the application claims 1-15; figures 1-3 -----	2-5
A	WO 2017/021742 A1 (IMP INNOVATIONS LTD [GB]) 9 February 2017 (2017-02-09) claims 1-10; figures 1-6 -----	1-10
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
10 January 2019	28/02/2019
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Liu, Yonghe

**INTERNATIONAL SEARCH REPORT**

International application No
PCT/EP2018/076913

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2017/093767 A1 (IMPRESSION TECH LTD [GB]) 8 June 2017 (2017-06-08) claims 1-20; figures 1-14 -----	1-10

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2018/076913
---------------------------------------------------

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2987878	A2 24-02-2016	CN 105369168 A DE 102014111920 A1 EP 2987878 A2 US 2016053356 A1	02-03-2016 25-02-2016 24-02-2016 25-02-2016
DE 102012007213	A1 29-11-2012	NONE	
WO 2010032002	A1 25-03-2010	CA 2737800 A1 CN 102216484 A EP 2324137 A1 ES 2409690 T3 JP 5681631 B2 JP 2012510565 A RU 2011115214 A US 2012152416 A1 WO 2010032002 A1	25-03-2010 12-10-2011 25-05-2011 27-06-2013 11-03-2015 10-05-2012 27-10-2012 21-06-2012 25-03-2010
WO 2017021742	A1 09-02-2017	CN 108474091 A EP 3344791 A1 US 2018223405 A1 WO 2017021742 A1	31-08-2018 11-07-2018 09-08-2018 09-02-2017
WO 2017093767	A1 08-06-2017	CA 3006929 A1 CN 108368597 A EP 3384062 A1 GB 2549565 A KR 20180088446 A US 2018305800 A1 WO 2017093767 A1	08-06-2017 03-08-2018 10-10-2018 25-10-2017 03-08-2018 25-10-2018 08-06-2017