



(51) International Patent Classification:

E21B 10/42 (2006.01) *E21B 47/017* (2012.01)
E21B 10/54 (2006.01) *E21B 12/02* (2006.01)
E21B 47/013 (2012.01) *E21B 47/26* (2012.01)
E21B 47/13 (2012.01)

(21) International Application Number:

PCT/US2022/017035

(22) International Filing Date:

18 February 2022 (18.02.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/180,083 19 February 2021 (19.02.2021) US

(71) Applicant: **SAUDI ARABIAN OIL COMPANY**
[SA/SA]; P.o. Box 5000, Dhahran, 31311 (SA).

(71) Applicant (for AG only): **ARAMCO SERVICES COMPANY** [US/US]; 1200 Smith Street, Houston, TX 77002 (US).

(72) Inventors: **ZHAN, Guodong**; C/o Saudi Aramco, P.o. box 1433, Dhahran, 31311 (SA). **MOELLENDICK, Timothy**,

Eric; C/o Saudi Aramco, P.o. Box 6472, Dhahran, 31311 (SA). **GOONERATNE, Chinthaka, P.**; C/o Saudi Aramco, P.o. Box 6939, Dhahran, 31311 (SA). **XU, Jianhui**; C/o Saudi Aramco, P.o. Box 8839, Dhahran, 222 (SA). **MAG-ANA MORA, Arturo**; C/o Saudi Aramco, P.o. Box 5436, Dhahran, 31311 (SA).

(74) Agent: **MEHTA, Seema, M.** et al.; Osha Bergman Watanabe & Burton LLP, 909 Fannin Street, Suite 3500, Houston, TX 77010 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(54) Title: IN-CUTTER SENSOR LWD TOOL AND METHOD

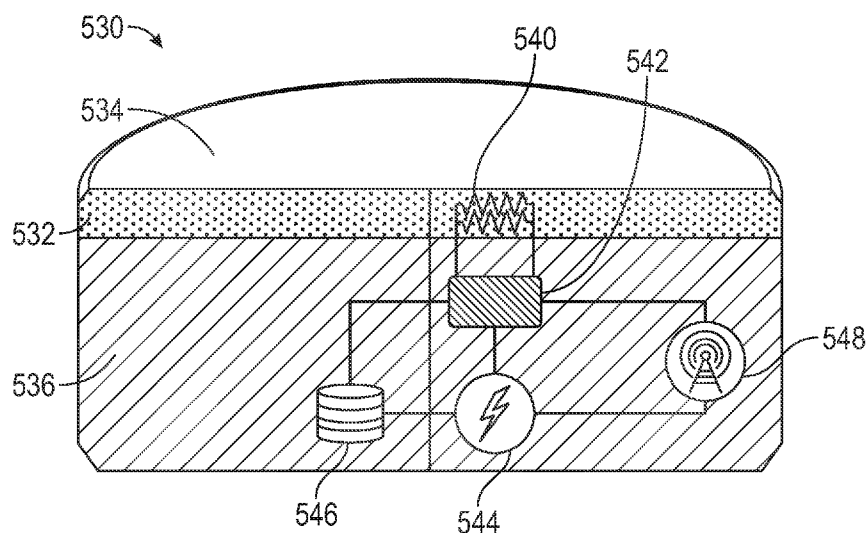


FIG. 5

(57) Abstract: An instrumented cutter (530) including a poly crystalline diamond compact table (532) bonded to a substrate (536) with a sensor (540), for monitoring the condition of the poly crystalline compact diamond table (532), embedded in the substrate (536). Further the instrumented cutter (530) includes a wireless transmitter (548) equipped with a power supply (544) to power to the wireless transmitter (548).

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

IN-CUTTER SENSOR LWD TOOL AND METHOD

BACKGROUND

[0001] Drilling a borehole to penetrate a hydrocarbon reservoir is a critical procedure in discovering, evaluating and producing oil and gas. It is common practice to extend the length a borehole by causing a drill bit to rotate while in contact with the rock at the bottom of the borehole. The drill bit typically consists of a plurality of cutters embedded in a plurality of blades arranged over the surface of the drill bit. During drilling the cutters become worn and their efficiency in extending the length of the borehole becomes diminished. Replacing the drill bit is time consuming and expensive and consequently it is undesirable to replace the drill bit sooner or more frequently than essential.

[0002] Thus, it is advantageous to have means of monitoring the wear of the cutters and the ability to correlate the wear and rate of wear of the cutters with other drilling parameters. This knowledge may be used to modify the drilling parameters during drilling and to modify the design and construction of future drill bits.

SUMMARY

[0003] This summary is provided to introduce a selection of concepts that are further described below in the detailed description. This summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used as an aid in limiting the scope of the claimed subject matter.

[0004] In general, in one aspect, embodiments relate to an instrumented cutter including a polycrystalline diamond compact table bonded to a substrate with a sensor, for monitoring the condition of the polycrystalline compact diamond table, embedded in the substrate. Further the instrumented cutter includes a wireless transmitter equipped with a power supply to power to the wireless transmitter.

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

[0005] In general, in one aspect, embodiments relate to a system including a string of drill-pipe, suspended from a drilling rig and attached to a bottomhole assembly and a drill bit, for boring a borehole in a rock formation. At least one instrumented cutter containing a sensor is mounted in a blade of the drill bit.

[0006] In general, in one aspect, embodiments relate to a method including inserting at least one instrumented cutter into a blade of a drill bit and attaching the drill bit to a bottomhole assembly. Further, the method includes inserting the drill bit and bottomhole assembly attached by a drill string to a drilling rig, into a borehole. The method still further includes increasing the size of the borehole by rotating the drill bit, transmitting a datum from the at least one instrumented cutter to the drilling rig; and modifying at least one parameter of drilling based, at least in part, on the datum from the at least one instrumented cutter. Other aspects and advantages of the claimed subject matter will be apparent from the following description and the appended claims.

BRIEF DESCRIPTION OF DRAWINGS

[0007] Specific embodiments of the disclosed technology will now be described in detail with reference to the accompanying figures. Like elements in the various figures are denoted by like reference numerals for consistency.

[0008] FIG. 1 shows system, in according with one or more embodiments.

[0009] FIG. 2 shows a polycrystalline diamond compact drill bit, in accordance with one or more embodiments.

[0010] FIG. 3 shows a polycrystalline diamond compact drill bit, in accordance with one or more embodiments.

[0011] FIG. 4 shows a cutter, in accordance with one or more embodiments.

[0012] FIG. 5 shows an instrumented cutter, in accordance with one or more embodiments.

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

[0013] FIG. 6 shows an instrumented cutter, in accordance with one or more embodiments.

[0014] FIG. 7 shows a flowchart, in accordance with one or more embodiments.

DETAILED DESCRIPTION

[0015] In the following detailed description of embodiments of the disclosure, numerous specific details are set forth in order to provide a more thorough understanding of the disclosure. However, it will be apparent to one of ordinary skill in the art that the disclosure may be practiced without these specific details. In other instances, well-known features have not been described in detail to avoid unnecessarily complicating the description.

[0016] Throughout the application, ordinal numbers (e.g., first, second, third, etc.) may be used as an adjective for an element (i.e., any noun in the application). The use of ordinal numbers is not to imply or create any particular ordering of the elements nor to limit any element to being only a single element unless expressly disclosed, such as using the terms "before", "after", "single", and other such terminology. Rather, the use of ordinal numbers is to distinguish between the elements. By way of an example, a first element is distinct from a second element, and the first element may encompass more than one element and succeed (or precede) the second element in an ordering of elements.

[0017] Embodiments disclosed herein relate to an instrumented polycrystalline diamond compact (PDC) cutter mounted in at least one blade of a drill bit. An instrumented PDC cutter is a PDC cutter in which at least one sensor has been embedded. In addition, a source of power, a non-transitory computer memory module, a wireless transceiver and an electronic control module may be embedded in the instrumented PDC cutter to store and transmit the measurements made by sensor. The sensor may make measurements to monitor the state of wear of the cutting surface of the instrumented PDC cutter and these measurements may be stored for later retrieval or transmitted to the drilling rig.

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

Modifications to the drilling parameters, including weight on bit, torque, and the time to replace the bit may be made in real-time, or near real-time based at least in part on the measurements. Further, modifications to parameters describing the drill bit design may be made.

[0018] In addition, embodiments disclosed herein are directed to a new sensing logging method for monitoring the real-time condition of the PDC cutters in the drill bit by forming an intelligent logging system inside PDC cutter substrates through measuring electrical, capacitive, acoustic, magnetic or other field properties. Data from the sensors may be transferred to the data processing system for drilling optimization and drilling automation. The on-cutter sensing technology of the instrumented PDC cutter has the ability to measure individual PDC cutter wear conditions that permit more accurate correlation of PDC cutter damage reduction to specific bit features and improving iterative improvements. Embodiments disclosed herein also aid in predicting bit performance based on the measurements that may be used to tailor drilling automation algorithms to optimize drilling performance based on current cutter/bit condition.

[0019] FIG. 1 illustrates a drilling system (100) which may include a top drive drill rig (110) arranged around the setup of a drill bit logging tool (120). A top drive drill rig (110) may include a top drive (111) that may be suspended in a derrick (112) by a travelling block (113). In the center of the top drive (111), a drive shaft (114) may be coupled to a top pipe of a drillstring (115), for example, by threads. The top drive (111) may rotate the drive shaft (114), so that the drillstring (115), a drill bit logging tool (120), and a drill bit (124) cut the rock formation (125) at the bottom of a borehole (116). A power cable (117) supplying electric power to the top drive (111) may be protected inside one or more service loops (118) coupled to a control system (134). As such, drilling mud may be pumped into the borehole (116) through a mud line, the drive shaft (114), and/or the drillstring (115).

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

[0020] Moreover, when completing a well, casing may be inserted into the borehole (116). The sides of the borehole (116) may require support, and thus the casing may be used for supporting the sides of the borehole (116). As such, a space between the casing and the untreated sides of the borehole (116) may be cemented to hold the casing in place. The cement may be forced through a lower end of the casing and into an annulus between the casing and a wall of the borehole (116).

[0021] As further shown in FIG. 1, sensors (121) may be included in a bottomhole assembly “BHA” (123), which is positioned adjacent to a drill bit (124) and coupled to the drill string (115). Sensors (121) may also be coupled to a processor assembly (122) that includes a processor, memory, and an analog-to-digital converter for processing sensor measurements. For example, the sensors (121) may include acoustic sensors, such as accelerometers, measurement microphones, contact microphones, and hydrophones. Likewise, the sensors (121) may include other types of sensors, such as transmitters and receivers to measure resistivity, gamma ray detectors, etc. The sensors (121) may include hardware and/or software for generating different types of well logs (such as acoustic logs or density logs) that may provide well data about a borehole (116), including porosity of borehole sections, gas saturation, bed boundaries in a geologic formation, fractures in the borehole or completion cement, and many other pieces of information about a formation. If such well data is acquired during drilling operations (i.e., logging-while-drilling), then the information may be used to make adjustments to drilling operations in real-time. Such adjustments may include altering weight on bit (WOB), drilling direction, mud weight, torque on bit, and many others drilling parameters.

[0022] In accordance with one or more embodiments, a telemetry transceiver (130B) may be installed in the BHA (123) of a drilling system (100) to transmit data and signals through a telemetry channel (132) from the BHA (123) to a telemetry transceiver (130A) located on the drilling rig (102). The telemetry

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

channel (132) may use acoustic signals transmitted through the drilling fluid. In other embodiments, the telemetry channel (132) may use electromagnetic signals transmitted through wired drill pipe. In other embodiments, the telemetry channel (132) may use electromagnetic signals transmitted through the geologic formations to the transceiver (130A) at the Earth's surface (104). The data and signals transmitted through the telemetry channel (132) may be processed and analyzed to determine by a computer system (134). The computer system (134) may be located on the drilling rig (102) or at a remote location.

[0023] The computer system (134) may be coupled to the drilling rig (102) in order to perform various functions for extending the length of the borehole (116), such as changing the rotational speed of the drill bit (124) and changing the force applied to the drill bit (124).

[0024] FIG. 2 shows the features of an example fixed cutter drill bit (200) fitted with PDC cutters for drilling through formations of rock formation (125) to form a borehole, in accordance with one or more embodiments. The drill bit (200) has a bit body (202) rigidly connected to a central shank (204) terminating in a threaded connection (206) for connecting the drill bit to a BHA (123) and to a drill string (115) to rotate the drill bit (200) in order to drill the borehole (116). The drill bit (200) has a central axis (208) about which the drill bit (200) rotates in the cutting direction represented by arrow (210).

[0025] In accordance with one or more embodiments, the cutting structure which is provided on the drill bit (200) includes six angularly spaced apart blades (212). In some embodiments, these blades (212) may be identical to each other, and in other embodiments these blades (212) may include a plurality of different blade types or designs. These blades (212) each project from the bit body (202) and extend radially out from the axis (210). The blades (212) are separated by channels that are sometimes referred to as junk slot (214) or flow courses. The junk slots (214) allow for the flow of drilling fluid supplied down the drill string (115) and delivered through apertures (216), which may be referred to as nozzles

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

or ports. Flow of drilling fluid cools the PDC cutters and as the flow moves uphole, carries away the drilling cuttings from the face of the drill bit (200). Those skilled in the art will appreciate that while FIG. 2 shows six (6) blades, any suitable number of blades may be used in the cutting structure of embodiments disclosed herein.

[0026] In accordance with one or more embodiments, the blades (212) have pockets or other types of cavities which extend inwardly from open ends that face in the direction of rotation (210). PDC cutters (220) are secured by brazing in these cavities formed in the blades (212) so as to rotationally lead the blades and project from the blades, which exposes the diamond cutting faces of the PDC cutters as shown. According to one or more embodiments, the number of cutters (220) on each blade (212) may be identical; alternatively, the number of cutters (220) may be different on some blades (212) from other blades (212). Similarly, according to one or more embodiments, the position of cutters (220) on each blade (212) may be identical or may be different on some blades (212) from other blades (212).

[0027] Continuing with FIG. 2, the drill bit (200) is designed, in accordance with one or more embodiments, to increase the length of the borehole (116) by breaking the rock formation (125) below or in front of the drill bit (200). In accordance with other embodiments, the drill bit (200) may be designed to increase the diameter of a pre-existing borehole (116) by breaking the rock formation which forms the walls of the pre-existing borehole (116). This process of increasing the diameter of a pre-existing borehole (116) may be called reaming, and the drill bit (200) used for reaming may be called a reamer. Reaming may be used to enlarge a section of a hole if the hole was not drilled as large as it should have been at the outset. This can occur when a drill bit (200) has been worn down from its original size but has been undetected until the drill bit (200) and drill string (115) is removed from the borehole (116). In other cases, some rock formations (125) may slowly plastically deform into the

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

wellbore over time, thus requiring the reaming operation to maintain the original hole size. Reamer drill bit may also have PDC cutters (220) mounted in their blades (212).

[0028] FIG. 3 shows the face of a drill bit (300), in accordance with one or more embodiments. FIG. 3 shows six nozzles (316) penetrating the body of the drill bit (300) to permit the exodus of drilling mud from the interior of the drill string (115) and the interior of the drill bit (300). FIG. 3 further shows six blades (312) of two different design, each separated by a junk slot (314). On each blade (312) a plurality of cutters (320 and 330) are mounted. As noted above, those of ordinary skill in the art will appreciate that any number of nozzles and blades may be employed by embodiments disclosed herein, without departing from the scope of this disclosure.

[0029] In accordance with one or more embodiments, at least one of the PDC cutters is an instrumented PDC cutter (330). An instrumented PDC cutter (330) differs from a non-instrumented PDC cutter (320) in that an instrumented PDC cutter (330) may contain at least one sensor to monitor the state of wear of the instrumented PDC cutters (330). In accordance with some embodiments, the instrumented PDC cutters (330) may be located at key locations anticipated by the operators to be locations at which the PDC cutters (330) may experience a maximum rate of wear. In accordance with one or more embodiments, the instrumented PDC cutters (330) may be positioned at the same position on each blade (312). In accordance with other embodiments, the instrumented PDC cutters (330) may be positioned at different locations on each blade (312). In accordance with still other embodiments, all the PDC cutters (320) in drill bit (300) may be instrumented PDC cutters (330).

[0030] FIG. 4 depicts an instrumented PDC cutter (430) in accordance with one or more embodiment. Both instrumented PDC cutters (430) and non-instrumented PDC cutters (320) may be formed from two components. The first component, of a PDC cutter (430) is known as the PDC diamond table (432) is

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

formed from polycrystalline diamond. PDC is an aggregate of tiny, inexpensive, manmade diamonds into relatively large, intergrown masses of randomly oriented crystals that can be formed into useful shapes. The PDC diamond table (432) forms the cutting surface (434) of the instrumented PDC cutters (430) that contacts the rock formation (125). Diamond, one of the hardest known materials, gives the cutting surface (434) of the PDC diamond tables (432) superior cutting properties. Besides their hardness, PDC diamond tables (432) have an essential characteristic for drill bit cutters. PDC diamonds efficiently bond with tungsten carbide. Tungsten carbide may be used to form a substrate (436) that can be attached to the blades (312) of a drill bit (300). The attaching of the substrate (436) to the blades (312) may be performed by brazing, a joining by soldering with an alloy of silver, copper and zinc at high temperature, wherein the high temperature may be above 840 °F.

[0031] FIG. 4 further shows, in accordance with one or more embodiments, a first sensor (440) and a second sensor (442). The presence of at least one of these sensors (440, 442) distinguish an instrumented cutter (430) from a non-instrumented cutter (320). In accordance with one or more embodiment, the first sensor (440) may be embedded in the PDC diamond table (432) and may extend to the cutting surface (434), and may be configured to directly sense or remotely monitor wear of the cutting surface (434). In accordance with other embodiments, the first sensor (440) may be embedded in the PDC diamond table (432) and may not extend to the cutting surface (434), but instead may be wholly enclosed within the PDC diamond table (432), and configured to remotely sense or remotely monitor wear of the cutting surface (434).

[0032] A second sensor (442) may be embedded in the substrate (436) of the instrumented PDC cutter (430). The second sensor (442) may be configured to remotely sense or remotely monitor wear of the cutting surface (434). Although FIG. 4 shows a first sensor (440) embedded in the PDC diamond table and a second sensor (442) embedded in the substrate (436) of the instrumented PDC

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

cutter (430) it should be understood that these are only illustrations of one of many configurations. In particular, in accordance with one or more embodiment, an instrumented PDC cutter may have only one sensor, that may be either embedded in the PDC diamond table (432) or in the substrate (436) of the instrumented PDC cutter (430). Alternatively, in accordance with other embodiments, the instrumented PDC cutter (430) may have any combination of at least one first sensor (440) embedded in the PDC diamond table (432) and at least one second sensor (442) embedded in the substrate (436) of the instrumented PDC cutter (430). Furthermore, in accordance with other embodiments each of a plurality of first sensors (440) embedded in the PDC diamond table (432) may not be identical to others of plurality of first sensors (440).

[0033] In particular, each of the plurality of first sensors (440) may use a different sensing modality. For example, one member of a plurality of first sensors (440) may be sensitive to electrical capacitance, and a second member of a plurality of second sensors (440) may be sensitive to ultrasonic propagation time. Similarly, each of the plurality of second sensors (442) may use a different sensing modality. For example, one member of a plurality of second sensors (442) may be sensitive to electrical capacitance, and a second member of a plurality of second sensors (442) may be sensitive to ultrasonic propagation time. Further a first sensor (440) embedded in the PDC diamond table (432) may use a sensing modality different from a second sensor (442) embedded in the substrate (436) of the instrumented PDC cutter (430).

[0034] In accordance with one or more embodiments, FIG. 5 depicts an instrumented PDC cutter (510) configured to monitor the wear of the cutting surface (534) of the PDC diamond table (532) using the resistivity of a sensor (540) embedded in the PDC diamond table (532). FIG. 5 further depicts, in accordance with one or more embodiments, an electronics module (542) embedded in the substrate (536) of the instrumented PDC cutter (530) configured

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

to monitor the resistivity of the resistivity sensor (540) and to store the resistivity values recorded by the resistivity sensor in a non-transient computer memory module (546) embedded in the substrate (536) of the instrumented PDC cutter (530).

[0035] In accordance with one or more embodiments, FIG. 5 further depicts a wireless transceiver (548) that may be embedded in the substrate (536) of the instrumented PDC cutter (530) and configured to transmit the resistivity values recorded by the resistivity sensor to a wireless telemetry transceiver mounted in the drill bit body (202), or the BHA (123). The wireless transceiver (548) may be a Wi-Fi transceiver, a Bluetooth transceiver, an induction wireless transceiver, an infrared wireless transceiver, an ultra-wideband transceiver, a ZigBee transceiver, or an ultrasonic transceiver.

[0036] FIG. 5 further depicts, in accordance with one or more embodiments, a power supply (544) to provide power to at least one of the non-transient computer memory module (546), the electronics module (542), the wireless transceiver (548), and the first sensor (540). The power supply (544) may be a battery, or an energy harvesting device that converts vibration to electrical power, or a terminal electrically connect to a power supply (not illustrated) located in the drill bit (200), or located in the BHA (123).

[0037] Although FIG. 5 shows a single first sensor (540), in accordance with one or more embodiments, this is intended to in no way limit the scope of the invention. It will be obvious to one of ordinary skill in the art that the instrumented PDC cutter may, in other embodiments have a plurality of sensors, that may share one or more of a single power supply (544), a non-transient computer memory module (546), an electronics module (542) and a wireless transceiver (548). Alternatively, each of a plurality of sensors may each be configured with their individual power supply (544), a non-transient computer memory module (546), an electronics module (542) and a wireless transceiver (548).

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

[0038] FIG. 6 depicts, in accordance with one or more embodiments, an example of remote sensing sensors (650A, 650B) embedded in an instrumented PDC cutter (630). According to one or more embodiments, the remote sensing sensor (650A) may be an ultrasonic transceiver that emits an ultrasonic wave (652). The ultrasonic wave (652) may be reflected by the cutting surface (634) of the PDC diamond table (632) and the reflected ultrasonic wave (653) may be detected by an ultrasonic transceiver (653). In accordance with one or more embodiment, the wear of the cutting surface (634) or the instrumented PDC cutter (630) may be determined from the travel time of the reflected ultrasonic wave (652). In accordance with other embodiments, the wear of the cutting surface (634) of the instrumented PDC cutter (630) may be determined from the amplitude of the reflected ultrasonic wave (653). In accordance with further embodiments, the wear of the cutting surface (634) of the instrumented PDC cutter (630) may be determined from the spectrum of the reflected ultrasonic wave (653). In accordance with still further embodiments, the wear of the cutting surface (634) of the instrumented PDC cutter (630) may be determined from a combination of at least one of the travel time, the amplitude, and the spectrum of the reflected ultrasonic wave (653). In accordance with one or more embodiments, the ultrasonic transceiver (650A) emitting the ultrasonic wave (652) and the ultrasonic transceiver (650B) receiving the reflected ultrasonic wave (653) may be one single transceiver performing both the emission and the reception of ultrasonic waves.

[0039] Just as the resistivity sensor (540) shown in FIG. 5 may be equipped with a power supply (544), a non-transient computer memory module (546), an electronics module (542) and a wireless transceiver (548) similarly the ultrasonic sensor (650A, 650B) shown in FIG. 6 may, in accordance with one or more embodiments, be equipped with a power supply (644), a non-transient computer memory module (646), and a wireless transceiver (648). One or more of the ultrasonic sensors (650A, 650B), power supply (644), non-transient computer

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

memory module (646), and wireless transceiver (648) may be embedded in the cutter substrate (636).

[0040] FIG. 7 depicts a flowchart, in accordance with one or more embodiments. One or more blocks of FIG. 7 may be performed using one or more components as described in FIGS. 1 through 6. While the various blocks in FIG. 7 are presented and described sequentially, one of ordinary skill in the art will appreciate that some or all of the blocks may be executed in a different order, may be combined or omitted, and some or all of the blocks may be executed in parallel and/or iteratively. Furthermore, the blocks may be performed actively or passively.

[0041] Initially, in Step 702, at least one instrumented PDC cutter (330) is inserted into at least one blade (312) of a drill bit (300). The instrumented PDC cutter (430) may include at least one sensor (440, 442), that may be configured to monitor the wear of the cutting surface (434) of the instrumented PDC cutter (430). In accordance with other embodiments, each blade (312) may be equipped with a plurality of instrumented cutters (430). The instrumented PDC cutter (430) may differ in design from one another and may use different physical sensing modalities.

[0042] In Step 704 the drill bit (300) and BHA (123) may be inserted into a borehole (116) attached to a drill string (115) extending from the BHA (123) to a drilling rig (102). The drill string (115) may include a plurality of joints of drill pipe, a plurality of joints of wired drill pipe, or a coiled tubing, in accordance with one or more embodiments. The insertion of the drill bit (300), BHA (123), and drill string (115) may comprise suspending the drill bit (300), BHA (123), and drill string (115) from the drilling rig (102).

[0043] In Step 706, in accordance with one or more embodiments, the size of the borehole (116) may be increased by rotation of the drill bit (300). The rotation of the drill bit (300) may be caused by the rotation of the drill string (115) that is, in turn, caused by the rotation of equipment on the drilling rig (102). In

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

accordance with other embodiments, the rotation of the drill bit (300) may be caused by the rotation of a mud-motor, or electrical motor mounted in the BHA (123). The size of the borehole increases, at least in part, by the abrasion of one or more instrumented PDC cutters (430) against the rock formation (125). In accordance with one or more embodiments, the increase in size of the borehole (116) may be an increase in the length of the borehole (116). In accordance with other embodiments, the increase in size of the borehole (116) may be an increase in the diameter of the borehole (116) or may be a simultaneous increase in both the length and the diameter of the borehole (116).

[0044] In Step 708, in accordance with one or more embodiments, at least one measurement may be made of the wear of the cutting surface (434) of an instrumented PDC cutter (430) by at least one sensor (440, 442) embedded in the PDC diamond table (432), or the substrate (436) of the instrumented PDC cutter (430). The measurement may be based upon the following without limitation, a strain, an acceleration, a motion, a vibration, an image, an electrical resistance, an electrical capacitance, an electrical inductance, a magnetic field, and a photoelectric emission, alone or in combination with one another.

[0045] In accordance with one or more embodiments, in Step 710 at least one measurement may be transmitted from the instrumented PDC cutter (430) to the BHA (123). The transmission of at least one measurement from the instrumented PDC cutter (430) to the BHA (123) may be performed using at least one wireless transceiver selected from the group composed of a Wi-Fi transceiver, a Bluetooth transceiver, an induction wireless transceiver, an infrared wireless transceiver, an ultra-wideband transceiver, a ZigBee transceiver, or an ultrasonic transceiver, and from the BHA to the drilling rig.

[0046] In Step 712, in accordance with one or more embodiment, at least one measurement may be transmitted from the BHA (123) to the drilling rig (102). The transmission of at least one measurement may be performed using mud-

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

pulse telemetry, wired drill pipe telemetry, wired coiled tubing telemetry, or electromagnetic induction telemetry.

[0047] In accordance with one or more embodiments, in Step 718, at least one drilling parameter may be modified based, at least in part, on at least one measurement from the instrumented PDC cutter (430). The modified drilling parameter(s) may include, without limitation, a weight on bit (WOB), a drilling direction, a mud weight, torque on bit, and many other drilling parameters. The modification of one or more drilling parameters may be performed in real-time. The modification may be commanded by an operator based, at least in part, on inspection of the measurement and/or change in the measurement. The modification may be commanded or performed by a drilling automation algorithm based, at least in part, on the measurement and/or a change in the measurement. The measurement may further allow the operator to determine the grade of the PDC cutter and the bit composed of a plurality of cutters, including how “dull” or worn are the plurality of PDC cutters.

[0048] The modification of drilling parameters may include the time at which it is optimal to replace the bit, including the retraction of the drill string (115), the BHA (123), and the drill bit (124) from the borehole (102); the replacements of the drill bit (124) with a new and unworn drill bit (124), and the insertion of the drill string (115), the BHA (123), and the drill bit (124) into the borehole (102).

[0049] In accordance with one or more embodiments, in Step 714 at least one measurement may be stored in the non-transient computer memory module (546, 646) embedded in the instrumented PDC cutter (530, 630). In Step 716, in accordance with one or more embodiment, at least one measurement from the non-transient computer memory module (546, 646) embedded in the instrumented PDC cutter (530, 630) may be read. The non-transient computer memory module (546, 646) may be read when the drill bit (300), BHA (123) and drill string (115) is retracted from the borehole (102). In accordance with other embodiments, the modified parameter may be a parameter describing the design

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

of a drilling bit (300), or the design of a PDC cutter (320). In accordance with other embodiments, the modified parameters may be control parameters in drilling automation algorithms which perform the automatic control of drilling parameters, and predict the current and future performance of the drill bit (300).

[0050] Although only a few example embodiments have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the example embodiments without materially departing from this invention. Accordingly, all such modifications are intended to be included within the scope of this disclosure as defined in the following claims. In the claims, any means-plus-function clauses are intended to cover the structures described herein as performing the recited function(s) and equivalents of those structures. Similarly, any step-plus-function clauses in the claims are intended to cover the acts described here as performing the recited function(s) and equivalents of those acts. It is the express intention of the applicant not to invoke 35 U.S.C. § 112(f) for any limitations of any of the claims herein, except for those in which the claim expressly uses the words “means for” or “step for” together with an associated function.

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

CLAIMS

What is claimed is:

1. An instrumented cutter, comprising:
 - a polycrystalline diamond compact (PDC) table;
 - a substrate bonded to the PDC table;
 - a sensor, for monitoring a condition of the PDC table, embedded in the substrate;
 - a wireless transmitter embedded in the substrate and attached to the sensor; and
 - a power supply embedded in the substrate to provide power to the sensor, and power to the wireless transmitter.
2. The instrumented cutter of claim 1, further comprising:
 - a non-transient computer memory module to record at least one datum from the sensor and powered by the power supply.
3. The instrumented cutter of claims 1 or 2,
 - wherein the sensor measures a physical property chosen from the group consisting of a strain, an acceleration, a motion, a vibration, an image, an electrical resistance, an electrical capacitance, an electrical inductance, a magnetic field, and a photoelectric emission.
4. The instrumented cutter of any one of claims 1-3,
 - wherein the sensor measures a change in a physical property chosen from the group consisting of a strain, an acceleration, a motion, a vibration, an image, an electrical resistance, an electrical capacitance, an electrical inductance, a magnetic field, and a photoelectric emission.
5. The instrumented cutter of claim 1, wherein the sensor is an ohmmeter for measuring an electrical resistance of a plurality of electrical conductors embedded in the PDC table.

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

6. The instrumented cutter of claim 5, wherein each of the plurality of electrical conductors are embedded at different depths below a cutting surface of the PDC table.
7. The instrumented cutter of claims 1, 2, or 3, wherein the sensor is at least one ultrasonic transducer for measuring a wear of the PDC table, by exciting the PDC table with an ultrasonic pulse and recording an ultrasonic vibration of the PDC table.
8. The instrumented cutter of any one of claims 1-7, wherein the wireless transmitter transmits at least a datum from the sensor to a wireless receiver mounted at a location selected from a group consisting of a drill bit, and a bottomhole assembly.
9. The instrumented cutter of claims 1 or 8, wherein the wireless transmitter and wireless receiver are devices selected from the group consisting of a Wi-Fi device, a Bluetooth device, an induction wireless device, an infrared wireless device, an ultra-wideband device, a ZigBee device, or an ultrasonic device.
10. The instrumented cutter of claim 1, wherein, the power supply is selected from the group consisting of a battery, an energy harvester device, an inductive coupling, and an electrical conductor.
11. The instrumented cutter of claim 10, wherein the energy harvester device is selected from the group consisting of: a piezoelectric device, an electrostatic device, an electromagnetic device, and an electret device.
12. A system, comprising:
 - a string of drill-pipe, suspended from a drilling rig;
 - a bottomhole assembly, attached to the string of drill-pipe, and including a drill bit, for boring a borehole in a rock formation, attached to the bottomhole assembly;
 - at least one instrumented cutter containing a sensor, wherein the instrumented cutter is mounted in a blade of the drill bit;

ATTORNEY DOCKET NO. 18733-338WO1; CLIENT REF.: SA9338

a wireless transmitter, mounted in the instrumented cutter, and capable of wirelessly transmitting a datum from the sensor,
a wireless receiver, mounted in the bottomhole assembly, wherein the wireless receiver receives at least a datum from a wireless transmitter embedded in the instrumented cutter;
a telemetry transmitter mounted in a bottomhole assembly, and communicatively connected to the wireless receiver; and
a telemetry receiver, positioned at the drilling rig, and communicatively connected to the telemetry transmitter in the bottomhole assembly.

13. A method, comprising:

inserting at least one instrumented cutter into a blade of a drill bit;
attaching the drill bit to a bottomhole assembly;
inserting, into a borehole, the drill bit and the bottomhole assembly from a drill string attached to a drilling rig;
increasing a size of the borehole by rotating the drill bit;
transmitting a datum from the at least one instrumented cutter to the drilling rig;
and
modifying at least one parameter of drilling based, at least in part, on the datum from the at least one instrumented cutter.

14. The method of claim 13,

wherein the at least one parameter of the drilling is selected from the group consisting of: a weight on bit, a rotational speed, a torque on bit, a downhole mud pressure, and a downhole mud flow rate.

15. The method of claim 13, wherein the at least one parameter of the drilling is a parameter of the design of the drill bit.

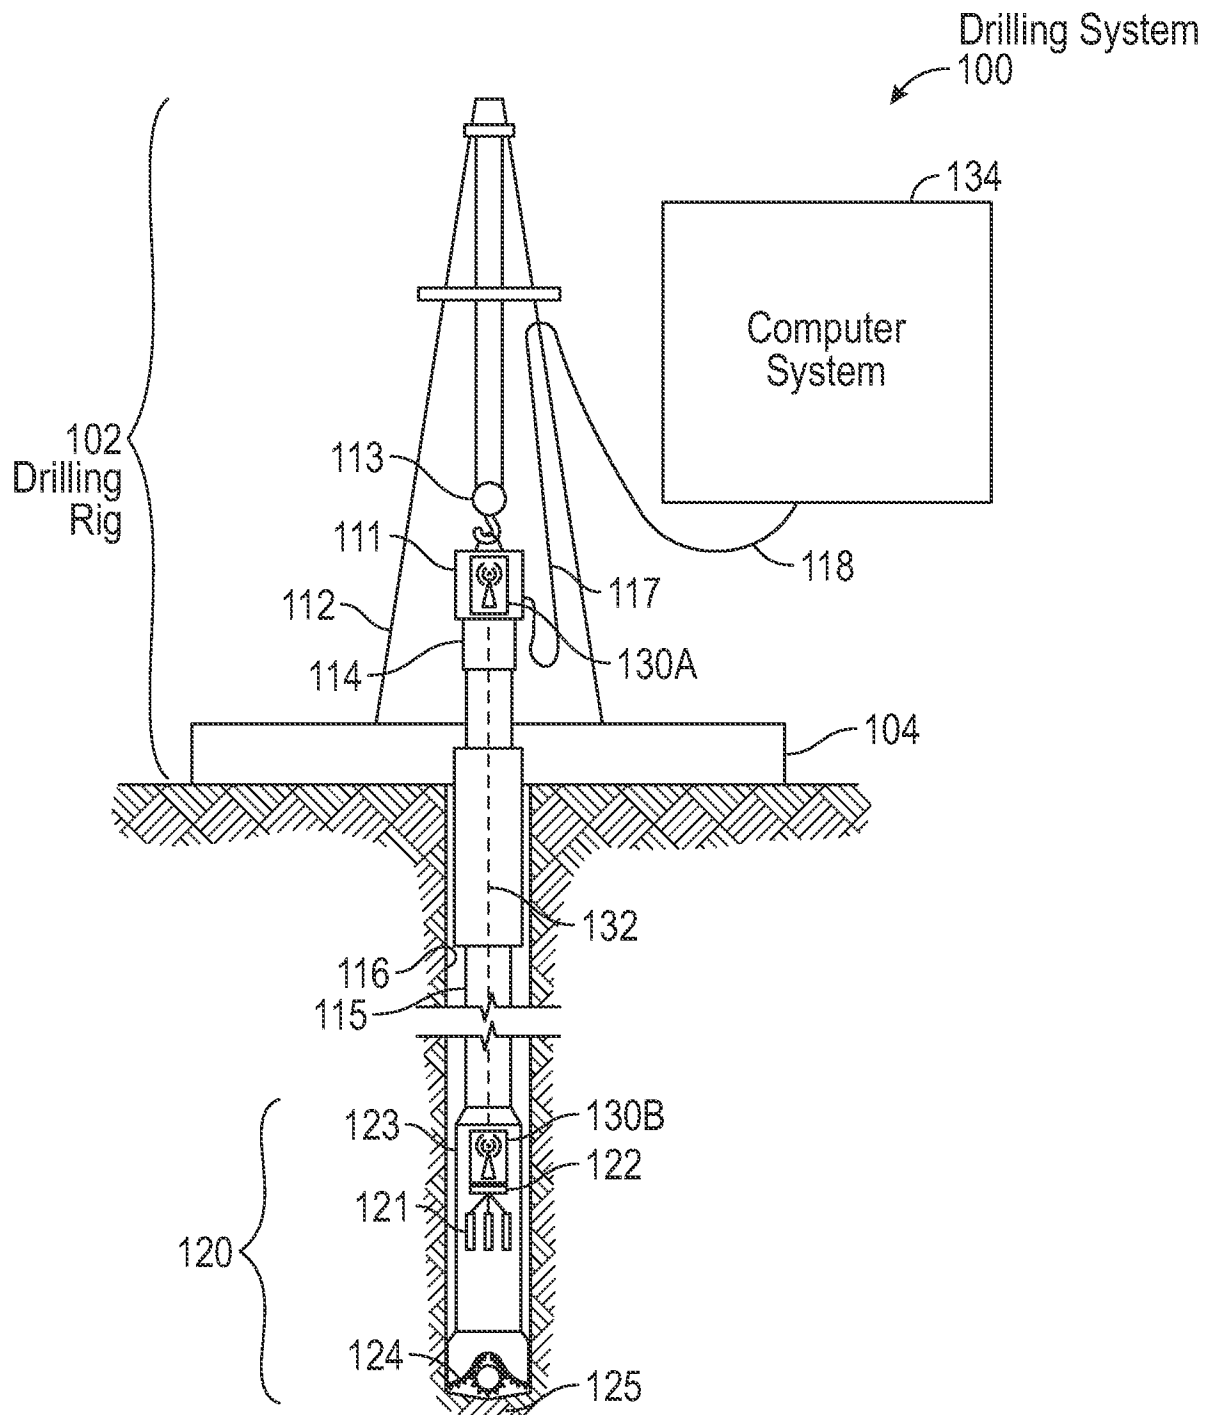


FIG. 1

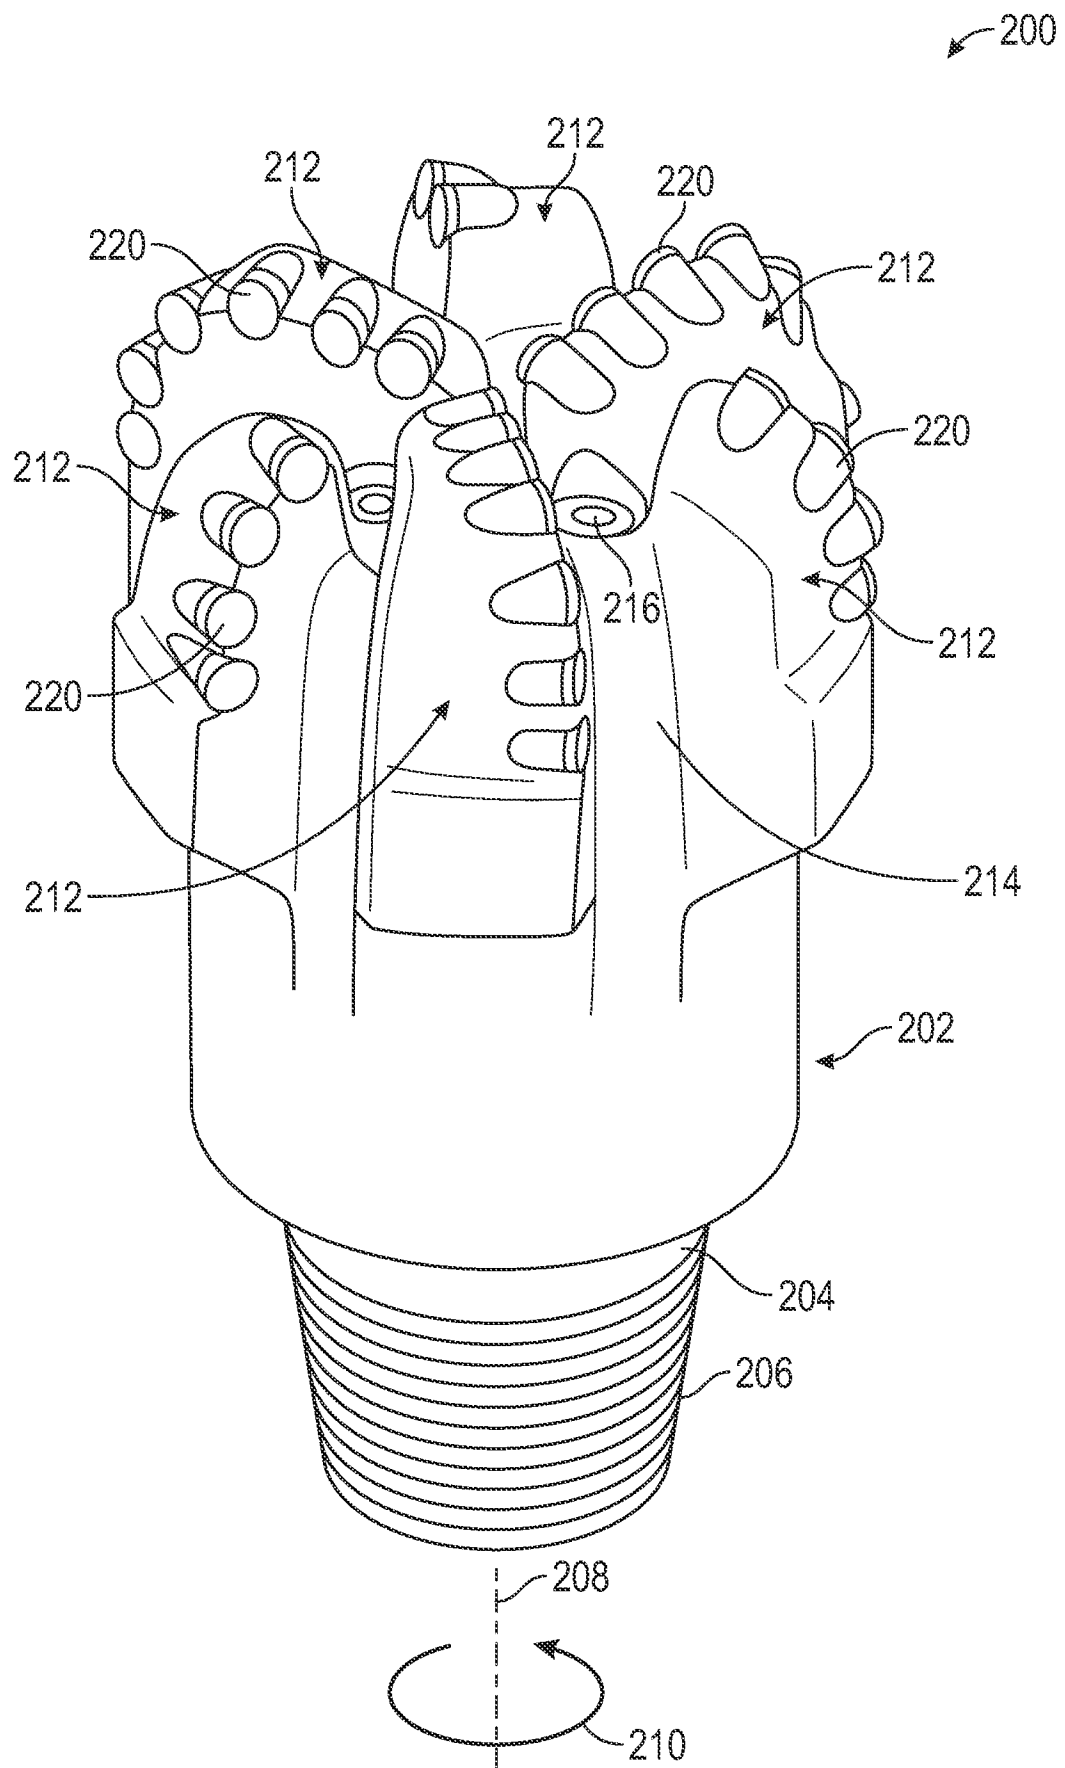


FIG. 2

3/5

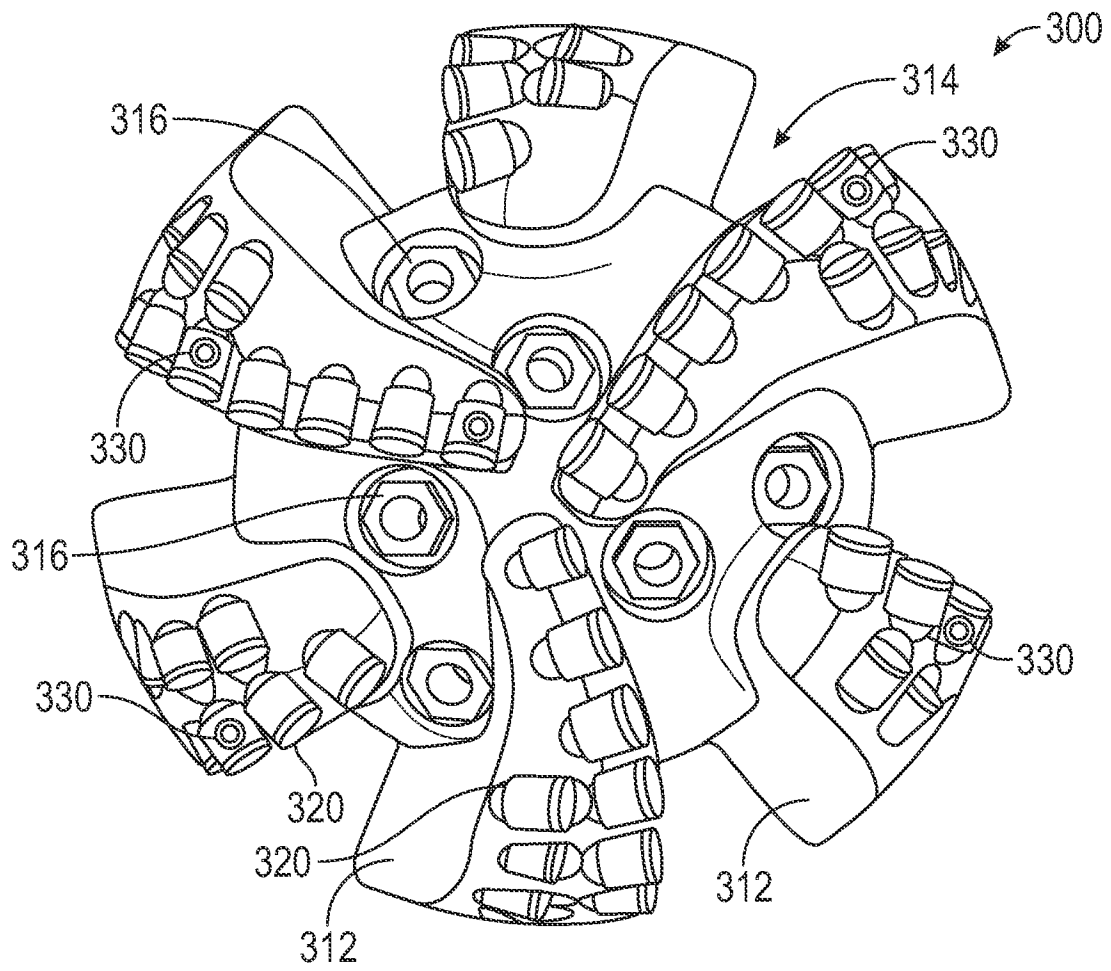


FIG. 3

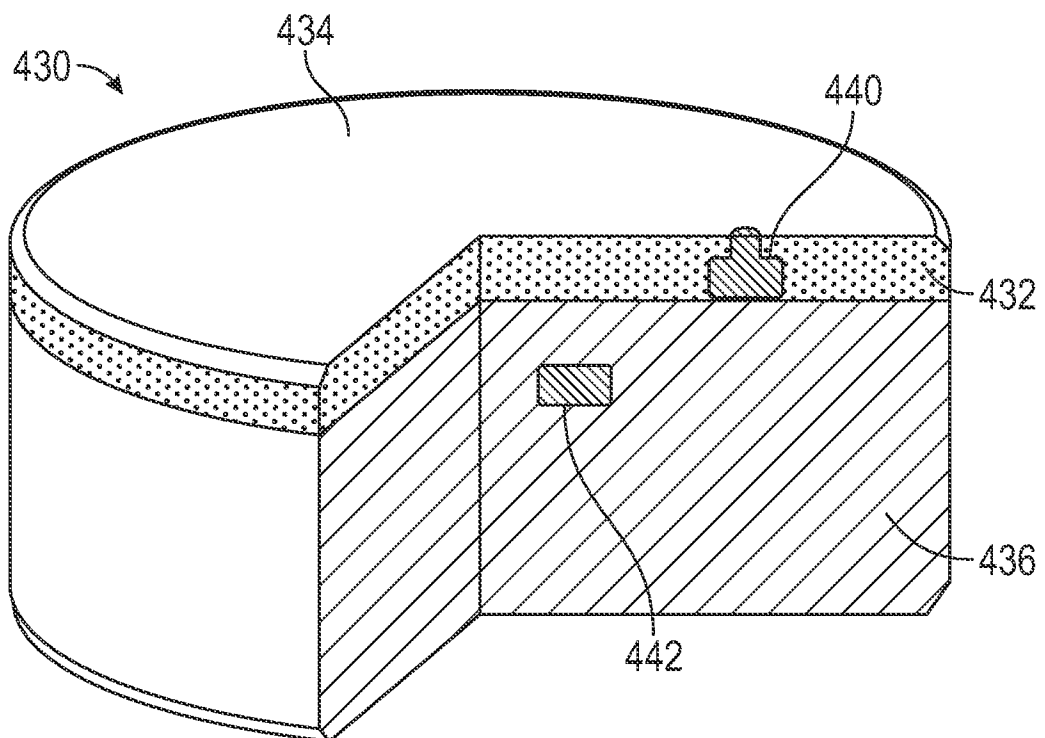


FIG. 4

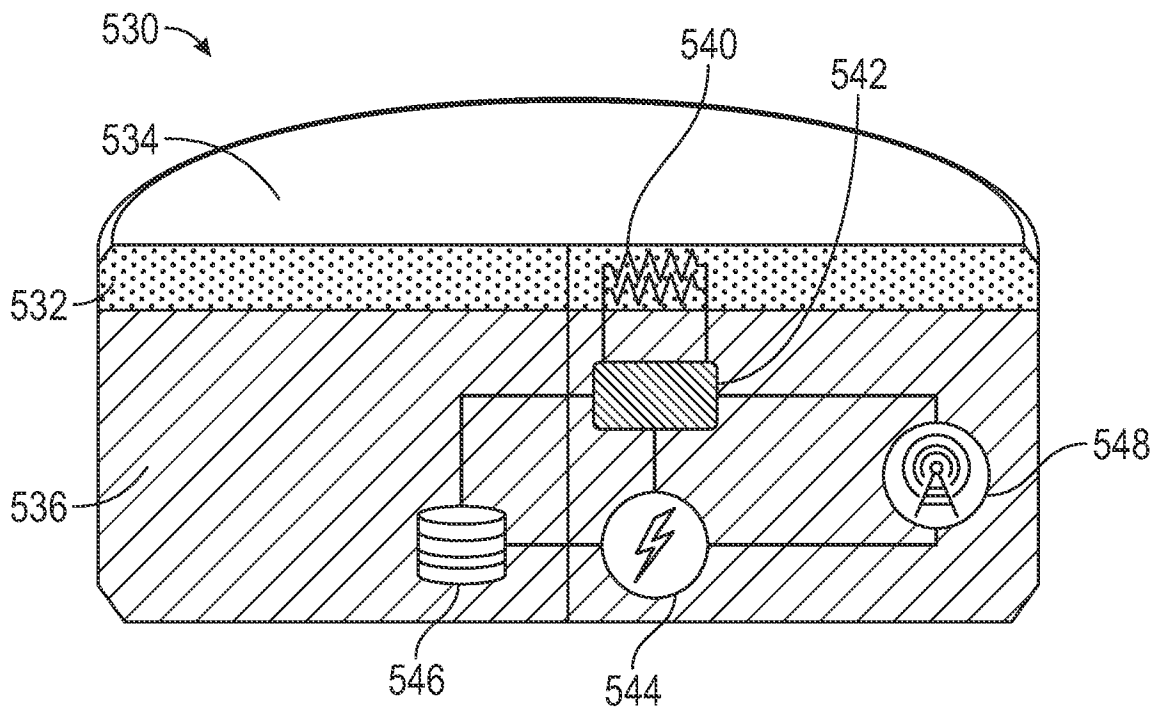


FIG. 5

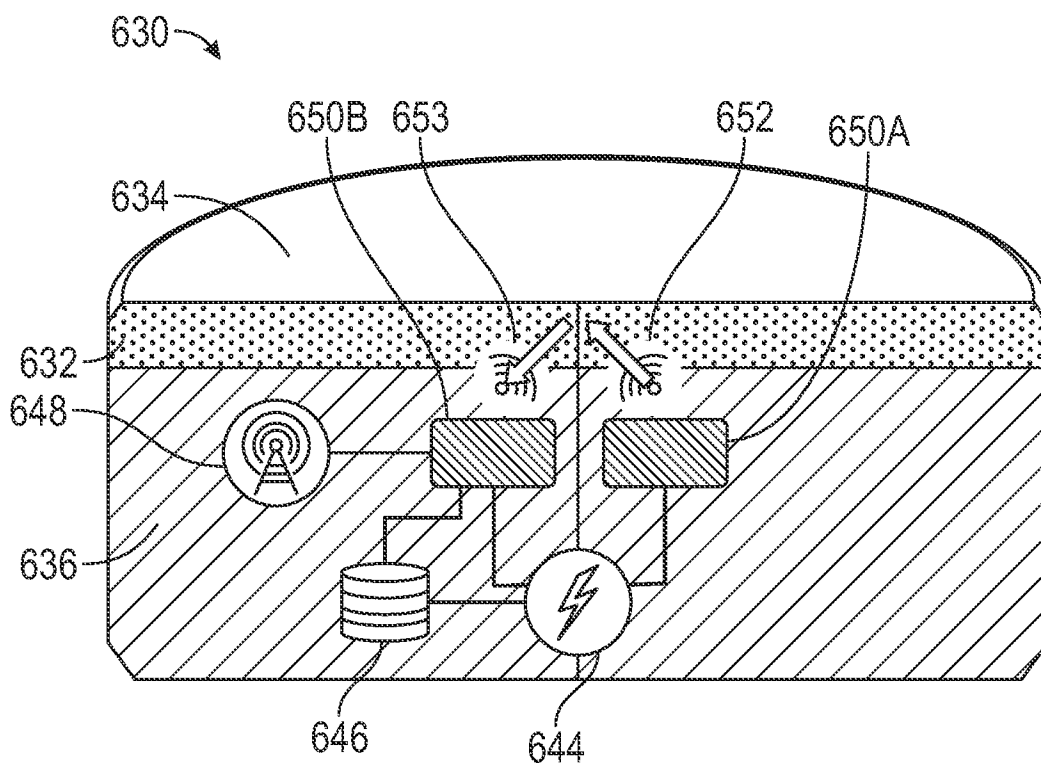


FIG. 6

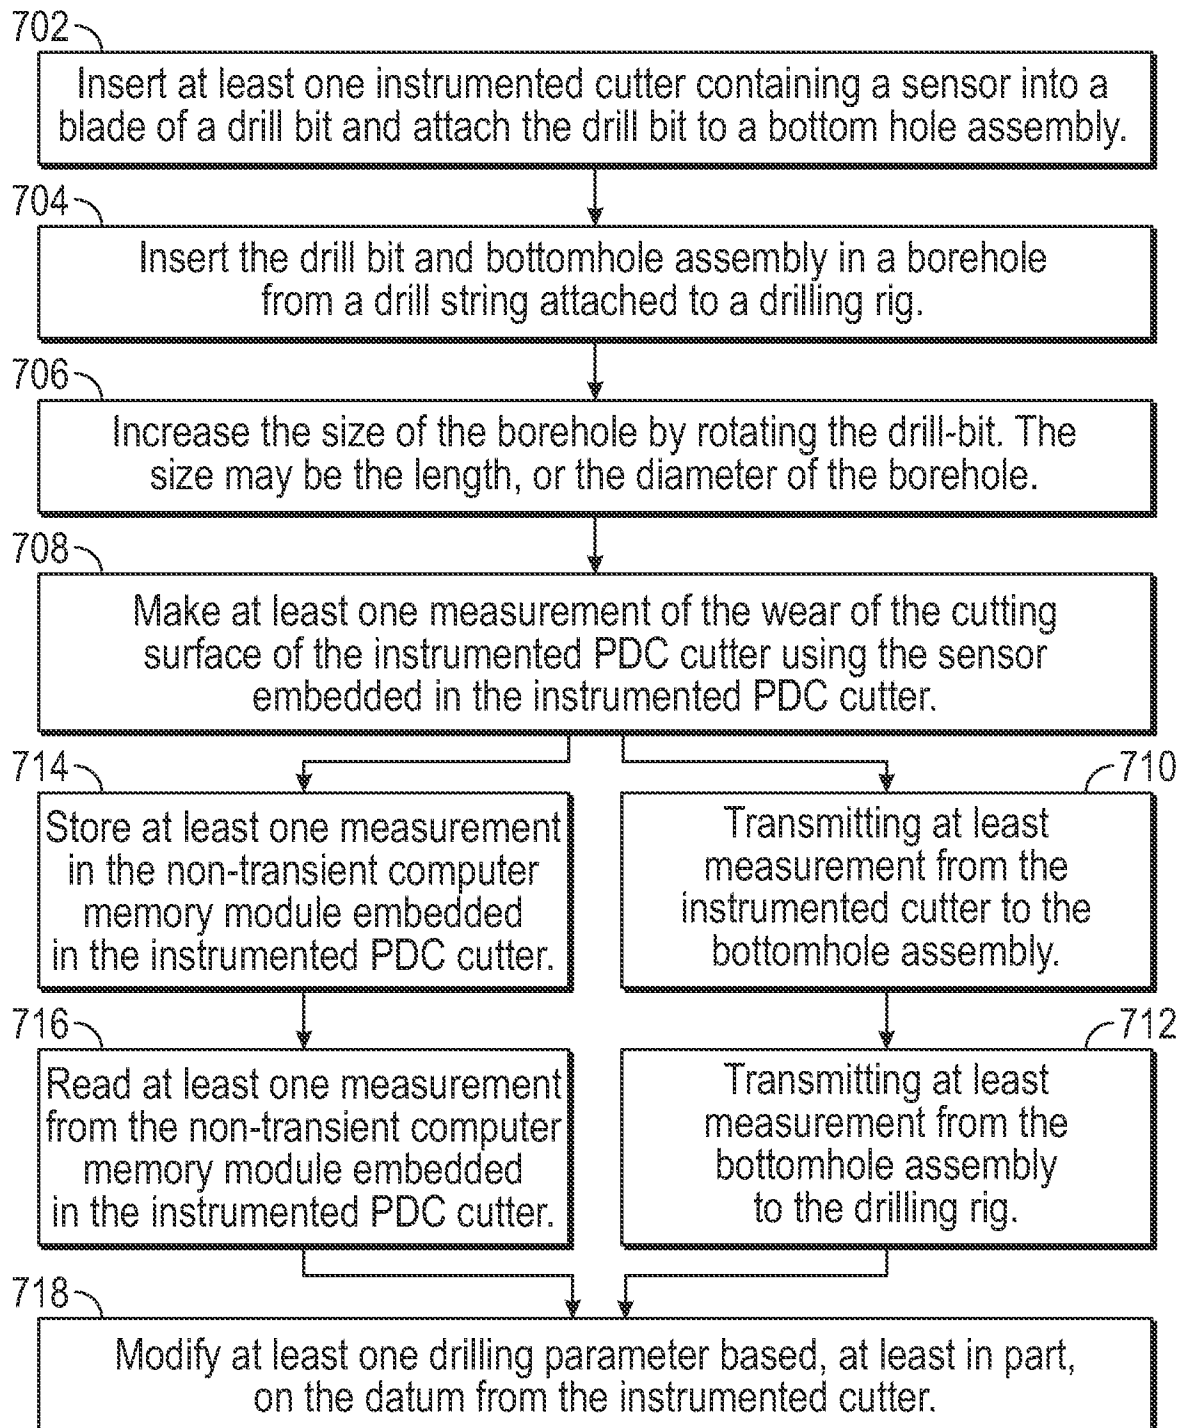


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2022/017035

A. CLASSIFICATION OF SUBJECT MATTER		
INV.	E21B10/42	E21B10/54
	E21B12/02	E21B47/26
	E21B47/013	E21B47/13
		E21B47/017
ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) E21B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 10 458 190 B2 (SMITH INTERNATIONAL [US]) 29 October 2019 (2019-10-29)	1-4, 7, 8
Y	column 12, line 33 - column 13, line 2; figure 21	5, 6, 9-11

X	US 8 746 367 B2 (DIGIOVANNI ANTHONY A [US]; SULLIVAN ERIC C [US]; BAKER HUGHES INC [US]) 10 June 2014 (2014-06-10)	12-15
Y	column 3, line 65 - column 4, line 56; figure 1 column 6, line 16 - column 8, line 3; figure 2 column 10, line 11 - line 27	5, 6

	-/--	
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance;; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance;; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 21 April 2022		Date of mailing of the international search report 04/05/2022
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Strømmen, Henrik

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2022/017035

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2020/386096 A1 (SUGIURA JUNICHI [GB] ET AL) 10 December 2020 (2020-12-10) paragraph [0071]; figure 8 paragraph [0056] - paragraph [0061]; figure 14 paragraph [0051] - paragraph [0054]; figure 2 -----	9-11
X	US 2020/011171 A1 (CAO WANJUN [US] ET AL) 9 January 2020 (2020-01-09)	12-15
A	paragraph [0070] - paragraph [0072]; figures 19,20 -----	1-11
A	US 8 967 295 B2 (HABERNAL JASON R [US]; GLASGOW JR R KEITH [US] ET AL.) 3 March 2015 (2015-03-03) column 8, line 12 - column 9, line 52; figures 1,5,6 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2022/017035

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 10458190	B2	29-10-2019	NONE
US 8746367	B2	10-06-2014	US 2011266055 A1 03-11-2011 US 2017292376 A1 12-10-2017
US 2020386096	A1	10-12-2020	CA 3083215 A1 10-12-2020 US 2020386096 A1 10-12-2020
US 2020011171	A1	09-01-2020	BR 112020026895 A2 30-03-2021 CN 112424439 A 26-02-2021 EP 3818244 A1 12-05-2021 US 2020011171 A1 09-01-2020 WO 2020010241 A1 09-01-2020
US 8967295	B2	03-03-2015	BR 112014004151 A2 14-03-2017 CA 2845878 A1 28-02-2013 CN 103827442 A 28-05-2014 EP 2748428 A1 02-07-2014 RU 2014110889 A 27-09-2015 SG 11201400087S A 28-03-2014 US 2013048381 A1 28-02-2013 WO 2013028744 A1 28-02-2013 ZA 201401312 B 29-06-2016