

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 July 2009 (23.07.2009)

PCT

(10) International Publication Number  
**WO 2009/090676 A1**

- (51) International Patent Classification:  
*B42D 15/00* (2006.01)      *D21H 21/42* (2006.01)
  - (21) International Application Number:  
PCT/IT2008/000037
  - (22) International Filing Date: 25 January 2008 (25.01.2008)
  - (25) Filing Language: Italian
  - (26) Publication Language: English
  - (30) Priority Data:  
MI2008A000053      15 January 2008 (15.01.2008)      IT
  - (71) Applicant (for all designated States except US): **FABRIANO SECURITIES S.R.L.** [IT/IT]; Via del Linfano, 16, I-38062 Arco (Trento) (IT).
  - (72) Inventor; and
  - (75) Inventor/Applicant (for US only): **LAZZERINI, Maurizio** [IT/IT]; Via Adamello, 7, I-20070 Cerro al Lambro (IT).
  - (74) Agent: **ALAGEM MODIANO, Lara S.**; Modiano & Associati, Via Meravigli, 16, I-20123 Milano (IT).
  - (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
  - (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report

(54) Title: SECURITY ELEMENT PARTICULARLY FOR BANKNOTES, SECURITY CARDS AND THE LIKE, HAVING ANTI-COUNTERFEITING FEATURES

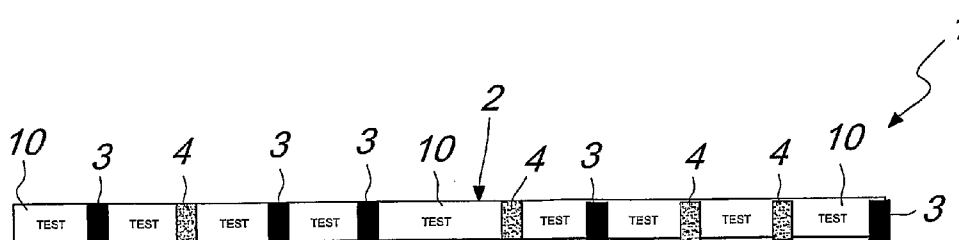


Fig. 1

(57) Abstract: A security element (1), particularly for banknotes, security cards and the like, comprising a first substrate (2) which is at least partially opaque when viewed in transmitted light, magnetic areas (3, 4) being deposited on the substrate (2), the magnetic areas (3, 4) comprising at least two types of magnetic areas which have different coercivity values and whose residual magnetism is identical or different, said different values being adapted to generate at least three mutually different codes.



WO 2009/090676 A1

SECURITY ELEMENT PARTICULARLY FOR BANKNOTES,  
SECURITY CARDS AND THE LIKE, HAVING ANTI-  
COUNTERFEITING FEATURES

**Technical field**

5           The present invention relates to a security element particularly for banknotes, security cards and the like, which has a high anti-counterfeiting capability.

**Background art**

As is known, as the technology evolves and devices for duplicating  
10 graphical elements which are printed or positioned on banknote paper become widespread, the need to have security elements which can be introduced at least partially in the banknote paper has been increasing and still is. One of the elements that is constantly being developed and researched is the security thread that is generally inserted at least partially in  
15 banknote paper.

Over the years, the security thread has undergone a constant but significant evolution, so much that it is still one of the least counterfeited elements, since its counterfeiting is difficult even for expert counterfeiters.

Among security threads, it is possible to identify for example metallic  
20 threads with negative text, i.e., threads provided by a plastic substrate onto which at least one layer of metal is deposited, characters, lettering and the like being formed in such layer of metal by total removal of the metal at the regions of the characters and/or lettering.

EP 319 157 discloses the method outlined above.

25           A thread is also known for example in which, in order to increase the security characteristics, at least one full-surface layer is added which therefore covers both the regions without metal and the metallic regions with ink having fluorescent properties.

There are other types of threads in which discontinuities of the metal  
30 are inserted between blocks of letters so that conductivity can be detected in

certain and known lengths.

However, the marketing of "transfer" metalized stripes has caused all these types of threads to undergo significant counterfeiting, which has led to the need to provide a partially demetallized thread, which thus leaves in the characters a small amount of metal, which can be detected by suitable laboratory equipment.

Therefore, in this last type of threads, the characters are demetallized only partially. Patent applications WO2004/014665 and WO2004/098900 relate to so-called partially demetallized threads of the type described above.

There are also types of threads which can be detected also by means of magnetic sensors. EP 516 790 discloses a thread in which detectable magnetic regions are inserted between the letters formed by performing total demetallization so that the thread can thus be detected both as conductive (due to the presence of metal deposited in continuous form) and by means of magnetic sensors (due to the magnetic elements arranged above or below the layer of metal but never inside the letters).

Therefore, EP 516 790 discloses a security device in which the characters or letters are totally demetallized.

Generally, coded magnetic threads are currently produced by depositing magnetic areas on a fully metallized polyester substrate; these areas are composed with a single type of magnetic ink and are separated by spaces in which regions without metallic material, meant for generating texts, are generated. It is evident that once the presence of magnetic areas has been discovered, their coercivity and residual magnetism can be identified easily and consequently so can the magnetic material to be used to create a counterfeit or forgery; a code thus provided generates the same signals, and therefore the same code, both when it is detected longitudinally (along the axis of the thread) and when it is detected transversely (reading at right angles to the thread).

Security threads with magnetic regions provided with a single type of

magnetic ink also have undergone counterfeiting, again with the transfer technique. It is in fact possible to provide a ribbon or stripe which has negative characters by using metallic transfers onto which magnetic elements are transferred at a later time, between the blocks of letters, both in  
5 continuous form and in discontinuous form in order to create magnetic codes. To provide industrially a thread of the type cited above it is sufficient to have a rotary press with a plurality of printing sections as described above also in EP 516 790, printing onto a transparent material (generally polyester) markings with removable inks, performing full-surface vacuum  
10 metalization so as to cover the removable inks, removing the inks and consequently also the metal that covers them, thus leaving markings which are identical to the ones printed with removable inks, and subsequently reprinting with magnetic inks continuous or discontinuous areas in the regions which have not been demetallized and are therefore adjacent to the  
15 demetallized regions.

In this manner, the presence of magnetic elements is not visible with normal viewing instruments (naked eye, optical magnifying devices, et cetera), since they are always covered by metal. The magnetic elements are visible only by means of suitable devices dedicated to the detection of  
20 magnetism, such as for example magnetic scanners or lenses with liquid magnetic ink inserted in vacuum.

### **Disclosure of the invention**

The aim of the present invention is to provide a security element particularly for banknotes, security cards and the like, having magnetic  
25 elements in which the magnetic difference of the regions cannot be detected by normal instruments for detecting current magnetic codes provided on security threads.

Within this aim, an object of the present invention is to provide a security element, particularly for banknotes, security cards and the like, in  
30 which said magnetic elements can be detected exclusively by means of

dedicated sensors.

Another object of the present invention is to provide a security element in which the magnetic elements have such differences as to generate different codes which can be detected even with devices whose  
5 feed rate is from one banknote per second up to at least 50 banknotes per second.

Another object of the present invention is to provide a security element in which its counterfeiting is made even more difficult with respect to known types of security elements since only someone who knows the  
10 basic principle and the location of the areas can detect their content.

Still another object of the present invention is to provide a security element which is highly reliable, relatively simple to provide and at competitive costs.

This aim and these and other objects, which will become better  
15 apparent hereinafter, are achieved by a security element, particularly for banknotes, security cards and the like, comprising a first substrate which is at least partially opaque when viewed in transmitted light, magnetic areas being deposited on said substrate, characterized in that said magnetic areas comprise at least two types of magnetic areas which have different  
20 coercivity values and whose residual magnetism is identical or different, said different values being adapted to generate at least three mutually different codes.

### **Brief Description of the Drawings**

Further characteristics and advantages of the present invention will  
25 become better apparent from the detailed description of preferred but not exclusive embodiments of the security element according to the present invention, illustrated by way of non-limiting example in the accompanying drawings, wherein:

Figure 1 is a plan view of a security element according to the present  
30 invention, with the optional second supporting layer removed, according to

a first embodiment of the invention;

Figure 2 is a sectional view of the security element of Figure 1, with the second supporting layer present;

Figures 3a, 3b and 3c are views of respective signals which can be obtained, and therefore of codes which can be obtained, by reading the security element according to Figures 1 and 2;

Figure 4 is a plan view of a security element according to the present invention, with the optional second supporting layer removed, in accordance with a second embodiment of the invention;

Figure 5 is a sectional view of the security element of Figure 4, with the second supporting layer present; and

Figures 6a, 6b and 6c are views of respective signals which can be obtained, and therefore of codes which can be obtained, by reading the security element according to Figures 4 and 5.

## 15 **Ways of carrying out the Invention**

With reference to the figures, the security element according to the present invention, generally designated by the reference numeral 1, comprises a first substrate or first supporting layer 2 which is at least partially opaque when viewed in transmitted light and on which magnetic areas 3, 4 are deposited. The substrate 2 is conveniently made of plastics, such as polyester, and the opacity is provided by the presence of deposits of metal or inks with colors and/or pigments, or color-shifting materials or materials obtained from mixtures of such materials.

The peculiarity of the invention consists in that the magnetic areas 3, 4 comprise at least two types of magnetic areas which have different coercivity values and whose residual magnetism is identical or different; the difference in coercivity and the identical or different residual magnetism are aimed at generating at least three different codes.

In particular, the magnetic areas are provided by means of magnetic inks whose coercivity is different (for example 200 oe for the lowest and

3000 oe for the highest) and whose residual magnetism can be identical or different depending on the type of coding, equally when they are deposited sequentially, adjacently or superimposed.

Suppose that a sequence of nine magnetic areas 3, 4 spaced by 4 (and  
5 more than 4) mm of gap is printed onto a thread which is 2 mm wide, with identical residual magnetism but in which the first, third, fourth, sixth and ninth areas have a coercivity of 4500 oe, while the second, fifth, seventh and eighth areas have a coercivity of 300 oe.

By orienting all the areas 3, 4 with a magnet with high coercive  
10 power (15000 G) and detecting them with a first reading head of a reading sensor, one obtains six areas in sequence; a second magnet, with reduced coercive power (2500 G) but sufficient to turn through 90° the magnetism of the areas 4 with low coercive power, allows a second reading head to detect only the remaining magnetic areas, which are the ones with high coercive  
15 power.

Figures 3a-3c plot respectively the signals which can be detected by a reading sensor, for a security element 1 according to the first embodiment of Figures 1 and 2, in which Figure 3a plots the signals that can be detected from all the magnetic areas 3, 4, Figure 3b plots the signals that can be  
20 detected from the magnetic areas with high coercivity, and Figure 3c plots the signals which can be detected from the magnetic areas with low coercivity.

Substantially, a security element, such as a security thread, has been provided which contains a first code generated by all the magnetic areas 3, 4  
25 that are present (read by the first reading head), a second code generated only by the areas 3 with high coercive power (read by the second reading head), and a third code generated only by the areas 4 with low coercive power (the result of all the areas 3, 4 minus those with high coercive power 3). This is achieved by using for example the same value of residual  
30 magnetism both for the areas 4 with low coercive power and for the areas 3

with high coercive power.

In order to further increase the degree of non-counterfeitability of the security element according to the invention, it is possible to provide areas 3 with high coercive power which are arranged so as to be at least partially superimposed on areas 4 with low coercive power (see Figure 5), in which the sum of the residual magnetisms is equal to the residual magnetism of the adjacent areas, both if they have high coercive power and if they have low coercive power.

Both inks with high coercive power and inks with low coercive power can be provided by means of mixtures of oxides or with a single type of oxide, all this being aimed at achieving the different significant coercivity.

This overlap can occur for example by overprinting or, better still, by coupling in register two supporting or substrate layers 2, 5 in which respectively the first one contains the areas 3 with high coercive power and with a residual magnetism for example equal to 100 nW/m, with other areas 3 with high coercive power with a residual magnetism for example equal to 50 nW/m and the second supporting layer 5 contains areas 4 with low coercive power with a residual magnetism equal for example to 100 nW/m and 50 nW/m. If the two layers 2, 5 are coupled in register, overlapping the 50 nW/m areas, one obtains a sequence of areas whose signals, oriented with a magnet with high coercive power and read by the first reading head, are a very similar sequence, the variation of which is caused only by the length of the areas and of the corresponding gap.

By then turning through 90° the magnetic flux of the areas with low coercive power 4, using a weaker magnet, therefore for example a 2500-G magnet, one obtains a number of signals in sequence which is equal to those of the first head, but with an electrical signal which is 50% lower in the areas provided by superimposing inks or by coupling.

By arranging the analog signal recognition threshold at different levels (as shown for example in broken lines in Figures 6b, 6c), it is

possible to obtain additional codes, since bits which are originally of high value, once reduced, can be detected further or ignored indeed by arranging the noise threshold differently.

By further using, for example, a base module of 4 mm on which the  
5 bars and/or corresponding gaps are to be deposited, it is much easier, in case of the presence of all the bits for the first code and of the partial presence in the second and third code, to recognize the codes, since they depend on the base 4-mm module.

Another way to make areas whose characteristic is that they are  
10 provided with inks with different coercivity and whose initially identical residual magnetism is then different when such areas are further magnetized with a magnet whose flux is rotated through 90°, is to provide them by means of a single ink which contains a mixture of oxides (such as 50% of 4000 oe + 50% of 300 oe); in this manner, depending on the percentage of  
15 mixture used, it is possible to have a number of possibilities to provide different codes.

Another example consists in using, for some areas, an ink with only 4000-oe pigment and, for the remaining areas, an ink with a mixture composed of 33% 4000-oe pigment and 66% pigment with a coercivity of  
20 300 oe. In this manner, one obtains areas composed with the mixture which are preset to generate magnetic signals as a function of the strength of the magnet that is used, of the orientation of the flux and of the method of use.

Systems of this type allow a number of customizations which greatly increase the degree of non-counterfeitability in addition to allowing  
25 verification of the banknote that incorporates the security thread both at low speed and at high speed.

Suppose that a security thread is provided which is 2 mm wide, has a first supporting layer 2 made of plastics such as polyester, onto which a full surface of aluminum 10 is deposited by vacuum metalization in which, by  
30 means of a demetallization process, text and/or graphic markings are

removed completely or partially, according to a preset graphic layout, considering the thickness of the aluminum.

Therefore, magnetic areas 3, 4, for example 2 mm long, spaced by spaces 10 without magnetic material for a length of for example 4 mm, are thus deposited between one text and the other. The magnetic areas 3 are provided by means of inks with high coercive power alternated with magnetic areas 4 with low coercive power; the residual magnetism of these areas is all identical with a tolerance given by the different production processes.

10 This first supporting layer 2 is then coupled to an additional supporting layer 5 of polyester which is always metalized and demetalized, at least partially, in regions in order to leave free the areas where the text has been positioned so that they can be read in transmitted light.

15 In the regions of the second supporting layer 5 that correspond to the regions where the magnetic areas 3, 4 have already been printed on the first supporting layer 2, new magnetic areas 3 are printed with a different surface: one difference might be for example a 66% coverage of the area, arranging the magnetic material on the edges of the thread.

20 Suppose that the width of the thread, which has been assumed to be for example 2 mm, is divided into three parts: one has a first area measuring 0.66 mm made of magnetic material, a space of 0.66 mm and a second area of 0.66 mm of magnetic material. By doing so, the codes that are present on the thread, like all the ones described earlier, can be detected with suitable sensors which are described hereinafter.

25 This last type of thread, therefore, has an additional characteristic, which consists in highlighting the presence of two additional areas only when the document is read transversely to the thread.

It is also evident that the second areas 4, printed on the second supporting layer made of polyester 5, can also be overmolded directly onto the first areas 3 which are already present on the first supporting layer 2

made of polyester.

It is also evident that the magnetic areas 3, 4 provided with different coercivities may have the same and/or a different residual magnetism determined by the different amount of magnetic material that is present for  
5 an equal area and thickness, or by the difference in thickness of the deposition for an equal area, or by oxides which have the same coercivity but different residual magnetism (oxides of different physical origin), or between mixtures of all of the above.

Figures 6a, 6b, 6c plot, in a manner similar to Figures 3a, 3b and 3c,  
10 the signals (codes) which can be detected by the security element provided according to the second embodiment of the invention.

All the previously described threads provide for non-orientation of the magnetic direction of the magnetic ink during the transition from wet ink to dry ink which is characteristic of printing.

15 Further customizations can be performed for example by orienting the iron oxide which is used for the areas 3 and therefore has a high coercive power during printing, when it is still wet, then overmolding or coupling in register the magnetic areas 4 with low coercive power. In this case, the magnetic areas 3 always have a north-south orientation, while the areas 4  
20 can have a north-south or south-north orientation (180° rotation of magnetism) or are canceled out (for reading which is parallel to the thread), rotating the magnetism of the areas 4 only through 90°.

In order to detect the codes thus provided, it is possible for example to use a reading method of the type disclosed in EP 0428779.

25 Such patent in fact discloses a method which is based on identifying areas separated by spaces, whose magnetic characteristics are of different coercivity, such as to generate two sequences of signals generated by a first orientation magnet, by a first reading head, by a second orientation magnet for rotating the magnetism and by a subsequent second reading head with an  
30 additional reorientation magnet. This reading method therefore entails a

plurality of elements arranged in succession.

The security elements thus provided, detected by the sensors as described and therefore the three codes that exist in a single banknote, can be used for example by different devices intended for different operators,  
5 such as ordinary shopkeepers with the first code, commercial banks with the first and second codes, and central banks with all three codes.

It is noted that the security element according to the present invention can be for example a security thread or a security ribbon or stripe.

Moreover, the security element according to the present invention can  
10 comprise, on at least one of its sides, holographic and/or color-shifting and/or mono- or multifluorescent images.

In practice it has been found that the security element according to the present invention fully achieves the intended aim and objects.

The security element thus conceived is susceptible of numerous  
15 modifications and variations, all of which are within the scope of the appended claims.

All the details may further be replaced with other technically equivalent elements.

In practice, the materials used, as well as the contingent shapes and  
20 dimensions, may be any according to requirements and to the state of the art.

The disclosures in Italian Patent Application no. MI2008A000053, from which this application claims priority, are incorporated herein by reference.

25 Where technical features mentioned in any claim are followed by reference signs, those reference signs have been included for the sole purpose of increasing the intelligibility of the claims and accordingly such reference signs do not have any limiting effect on the interpretation of each element identified by way of example by such reference signs.

CLAIMS

1. A security element, particularly for banknotes, security cards and the like, comprising a first substrate which is at least partially opaque when viewed in transmitted light, magnetic areas being deposited on said  
5 substrate, characterized in that said magnetic areas comprise at least two types of magnetic areas which have different coercivity values and whose residual magnetism is identical or different, said different values being adapted to generate at least three mutually different codes.

2. The security element according to claim 1, characterized in that  
10 said magnetic areas have different coercivity and a residual magnetism which depends on the different thickness of said areas.

3. The security element according to claim 1, characterized in that said magnetic areas have different coercivity and identical residual magnetism, said areas being adapted to generate different analog signals  
15 when they are subjected to a first reading by orienting said areas longitudinally and to a second reading, in which the magnetization/flux is rotated through 90°.

4. The security element according to one or more of the preceding claims, characterized in that said magnetic areas are deposited sequentially  
20 on said substrate.

5. The security element according to one or more of the preceding claims, characterized in that said magnetic areas are deposited so as to be adjacent one another on said first substrate.

6. The security element according to one or more of the preceding  
25 claims, characterized in that said magnetic areas are deposited so as to be superimposed on said first substrate.

7. The security element according to one or more of the preceding claims, characterized in that said first substrate is a support made of metalized polyester, text and/or graphic markings being defined by at least  
30 partial demetallization of the metallic layer on said first substrate in order to

create negative and/or positive texts and/or markings.

8. The security element according to one or more of the preceding claims, characterized in that said magnetic areas are provided by means of magnetic inks.

5           9. The security element according to one or more of the preceding claims, characterized in that said three codes are determined by all the magnetic areas that are present, by the magnetic areas with high coercivity value, and by the magnetic areas with low coercivity value, respectively.

10           10. The security element according to one or more of the preceding claims, characterized in that said three codes are determined by all the magnetic areas that are present, provided by means of inks having a high coercive value and by means of inks having a low coercivity value, by the magnetic areas provided with inks with high coercive value which have mutually identical or different residual magnetism, and by magnetic areas  
15 provided by means of inks with low coercivity value and whose residual magnetism is identical and/or different.

20           11. The security element according to one or more of the preceding claims, characterized in that said magnetic areas comprise magnetic areas with high coercivity value which are positioned so as to be at least partially superimposed on magnetic areas with a low coercivity value.

          12. The security element according to claim 10, characterized in that said areas with high coercivity value and said areas with low coercivity value, which generate an identical and/or different residual magnetism, are provided by overprinting.

25           13. The security element according to claim 11, characterized in that said magnetic areas with high coercivity value and said magnetic areas with low coercivity value, which generate identical and/or different residual magnetism, are provided by coupling in register two substrates, of which the first one contains the areas with high coercivity value and the second one  
30 contains the areas with low coercivity value.

14. The security element according to one or more of the preceding claims, characterized in that said areas with high coercivity value and said areas with low coercivity value, which generate identical and/or different residual magnetism, are printed with a single ink obtained from a mixture of  
5 oxides which have different coercivity values.

15. The security element according to one or more of the preceding claims, characterized in that it comprises a second substrate which is adapted to be coupled to said first substrate, said second substrate being metalized and demetalized at least partially at areas of the first substrate  
10 where the at least partially demetalized text or graphic markings are positioned, so that the text or the graphic markings are visible in transmitted light when said first substrate is coupled to said second substrate, while the magnetic areas are not visible.

16. The security element according to claim 15, characterized in that  
15 said second substrate is provided with magnetic areas which are adapted to be positioned, when said second substrate is coupled to said first substrate, at the magnetic areas defined on the first substrate, the magnetic areas of said second substrate having a different surface and/or thickness with respect to the magnetic areas of said first substrate.

20 17. The security element according to claim 15, characterized in that said magnetic areas of said second substrate have different thicknesses but identical surfaces with respect to said magnetic areas of said first substrate.

18. The security element according to one or more of claims 1 to 14, characterized in that it comprises second magnetic areas which are  
25 overprinted on said magnetic areas of said first substrate, said second magnetic areas having, with respect to said magnetic areas of said first substrate, a different coercivity, identical surfaces, so as to provide areas which are composed of said first magnetic areas printed on the substrate and of said second magnetic areas printed over the first ones, the sum of which  
30 makes the residual magnetism identical or very similar to the areas which

are not overprinted by second magnetic areas; the identical or different residual magnetism being reached according to one or more of the following configurations:

using different thicknesses of said first and second magnetic areas;

5 using identical thicknesses of said first and second areas but using inks whose specific residual magnetism is different between said first areas and said second areas;

providing a mixture of the inks used to print said first magnetic areas and said second magnetic areas.

10 19. The security element according to one or more of the preceding claims, characterized in that it comprises, on at least one of its sides, holographic and/or color-shift and/or changing color and/or mono- or multifuorescent images.

15 20. A method for reading a security element according to one or more of the preceding claims, characterized in that it comprises the steps that consist in:

orienting said magnetic areas with a magnet having a high coercive power and detecting them by means of a first reading head of a reading sensor, obtaining a first code;

20 by means of a second magnet, having a reduced coercive power but sufficient to turn through 90° the magnetism of said areas with low coercive power, detecting by means of a second reading head the remaining magnetic areas, i.e., the magnetic areas with high coercivity value, obtaining a second code;

25 detecting a third code generated only by the areas with low coercivity value.

30 21. The method according to claim 20, characterized in that said magnets and said heads are arranged at an angle ranging from 40 to 50° with respect to the longitudinal and/or transverse extension of said security element.

22. The method according to claim 21, characterized in that said magnets and said heads are arranged at an angle of 45° with respect to the longitudinal extension of said security element.

23. A security card, characterized in that it comprises at least one  
5 security element according to one or more of claims 1 to 19.

24. The security card according to claim 23, characterized in that said security element is a security thread.

25. The security card according to claim 23, characterized in that said security card is a security stripe.

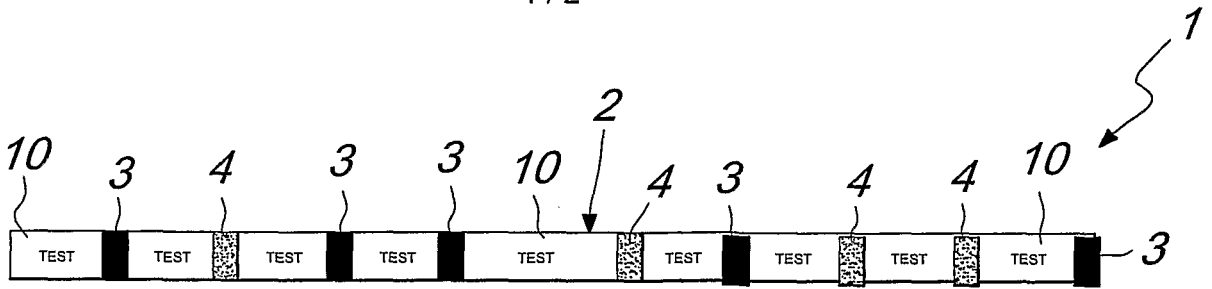


Fig. 1

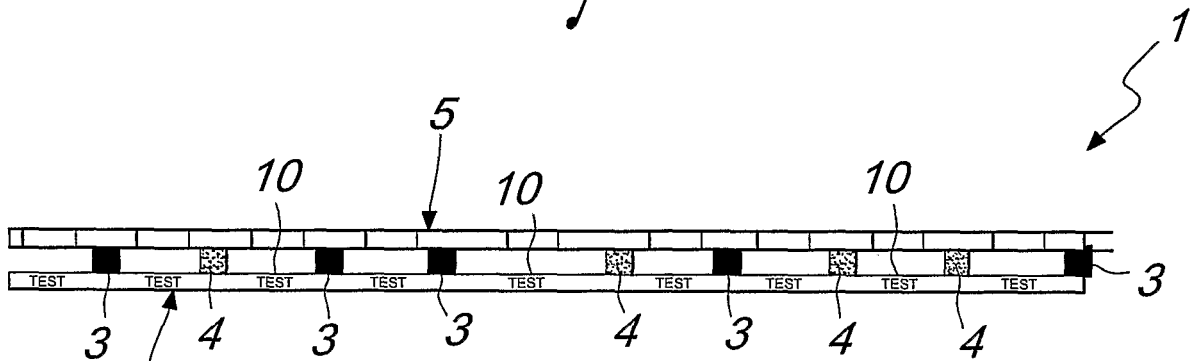


Fig. 2

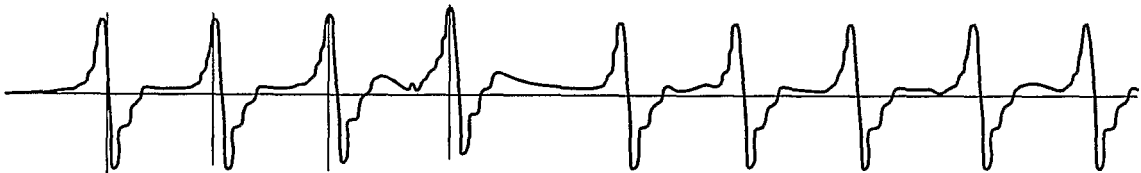


Fig. 3a



Fig. 3b

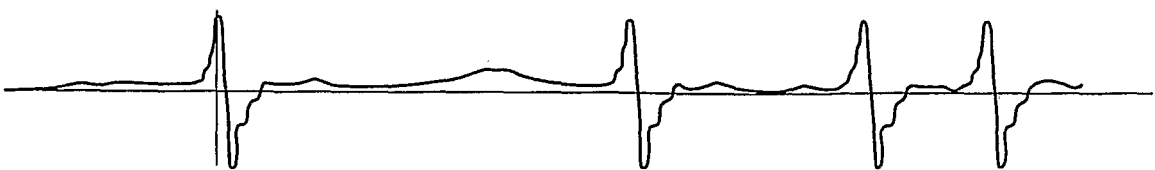


Fig. 3c



**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/IT2008/000037

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. B42D15/00 D21H21/42

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
B42D G06K G07D D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/042667 A (GIESECKE & DEVRIENT GMBH [DE]; SCHUETZMANN JUERGEN [DE]; SCHUETT LOTHAR) 27 April 2006 (2006-04-27) page 5, line 20 - page 6, line 13. pages 10-14	1-25
X	WO 03/001446 A (FORSCHUNGSZENTRUM JUELICH GMBH [DE]; MORENZIN JAN [DE]; SCHONDELMAIER) 3 January 2003 (2003-01-03) the whole document	1-25
X	EP 0 428 779 A (MANTEGAZZA A ARTI GRAFICI [IT]) 29 May 1991 (1991-05-29) the whole document	1-25
X	JP 2005 232618 A (DAINIPPON PRINTING CO LTD) 2 September 2005 (2005-09-02) the whole document	1-25

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

30 October 2008

Date of mailing of the international search report

10/11/2008

Name and mailing address of the ISA/  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Curt, Denis

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IT2008/000037

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2006042667	A	27-04-2006	AU 2005297599 A1	27-04-2006
			CN 101076454 A	21-11-2007
			DE 102004049999 A1	20-04-2006
			EP 1812243 A1	01-08-2007
			JP 2008517360 T	22-05-2008
WO 03001446	A	03-01-2003	DE 10130553 A1	09-01-2003
EP 0428779	A	29-05-1991	AT 139636 T	15-07-1996
			DE 68926714 D1	25-07-1996
			DE 68926714 T2	31-10-1996
			ES 2088884 T3	01-10-1996
			GR 3020650 T3	31-10-1996
			GR 3032152 T3	27-04-2000
			US 5196681 A	23-03-1993
JP 2005232618	A	02-09-2005	NONE	