



(22) Date de dépôt/Filing Date: 2016/02/19

(41) Mise à la disp. pub./Open to Public Insp.: 2016/08/20

(45) Date de délivrance/Issue Date: 2023/09/26

(30) Priorités/Priorities: 2015/02/20 (US62/118,575);
2016/02/19 (US15/048,491)

(51) Cl.Int./Int.Cl. *F04B 53/10* (2006.01),
E21B 34/06 (2006.01), *F04B 47/12* (2006.01),
E21B 43/12 (2006.01)


(72) Inventeurs/Inventors:
BOYD, GARRETT S., US;
BOYD, MITCHELL A., US

(73) Propriétaire/Owner:
FLOWCO PRODUCTION SOLUTIONS, LLC, US

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : VALVES PROJECTILES AMELIOREES DESTINEES A DES PISTONS DE DERIVATION

(54) Title: IMPROVED DART VALVES FOR BYPASS PLUNGERS

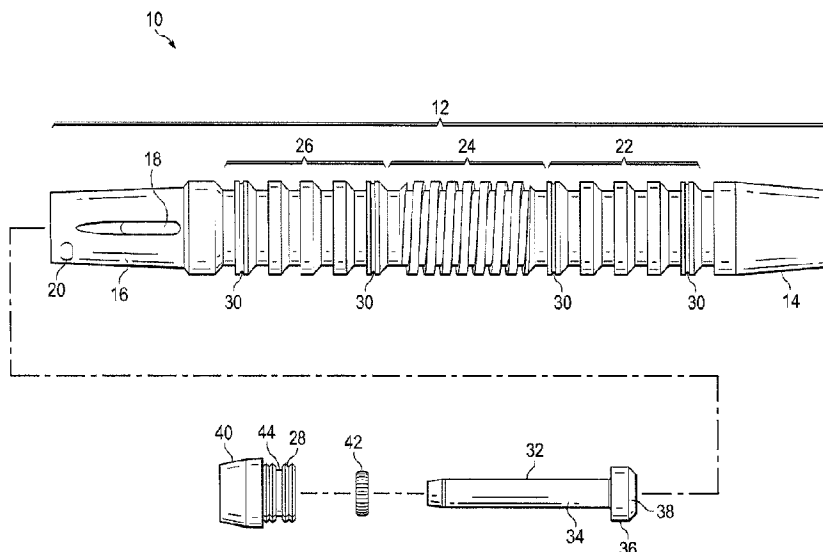

(57) **Abrégé/Abstract:**

A bypass plunger combines a unitary or one-piece hollow body-and-valve cage, retains a dart valve within the valve cage portion of the hollow body using a threaded retaining nut secured by crimple detents. A series of helical grooves surround the central portion of the outer surface of the hollow body of the plunger to control spin during descent. A canted-coil-spring disposed within the retaining nut functions as a clutch. The valve cage includes ports that may be configured to control flow through the plunger during ascent. Other embodiments include clutch assemblies using canted-coil springs with split bobbins, and valve stems surfaced to achieve specific functions. Combinations of these features provide enhanced performance, durability and reliability at reduced manufacturing cost, due primarily to the simplicity of its design.

ABSTRACT OF THE DISCLOSURE

A bypass plunger combines a unitary or one-piece hollow body-and-valve cage, retains a dart valve within the valve cage portion of the hollow body using a threaded retaining nut secured by crimple detents. A series of helical grooves surround the central portion of the outer surface of the hollow body of the plunger to control spin during descent. A canted-coil-spring disposed within the retaining nut functions as a clutch. The valve cage includes ports that may be configured to control flow through the plunger during ascent. Other embodiments include clutch assemblies using canted-coil springs with split bobbins, and valve stems surfaced to achieve specific functions. Combinations of these features provide enhanced performance, durability and reliability at reduced manufacturing cost, due primarily to the simplicity of its design.

SPECIFICATION

Docket No. 26172.012

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN that we, Garrett S. Boyd and Mitchell A. Boyd, citizens of the United States of America, residing in the State of Texas, have invented new and useful improvements in
a

IMPROVED DART VALVES FOR BYPASS PLUNGERS

of which the following is a Specification:

BACKGROUND OF THE INVENTION

1. Field of the Invention:

The present invention generally relates to gas lift devices for rejuvenating low-producing or non-productive oil or gas wells, and more particularly to improvements in the design and construction of bypass plungers.

2. Background of the Invention and Description of the Prior Art:

A conventional bypass plunger is a device that is configured to freely descend and ascend within a well tubing, typically to restore production to a well having insufficient pressure to lift the fluids to the surface. It may include a self-contained valve - also called a “dart” or a “dart valve” in some embodiments - to control the descent and ascent. Typically the valve is opened to permit fluids in the well to flow through the valve and passages in the plunger body as the plunger descends through the well. Upon reaching the bottom of the well, the valve is closed, converting the plunger into a piston by blocking the passages that allow fluids to flow through the plunger. With the plunger converted to a piston, blocking the upward flow of fluids or gas, the residual pressures in the well increase enough to lift the plunger and the volume of fluid above it toward the surface. Upon reaching the surface, the fluid is passed through a conduit for

1 recovery, the valve in the plunger is opened by a striker mechanism, and the plunger descends to
2 repeat the cycle.

3 In a typical bypass plunger the valve is similar to a poppet valve, with a valve head
4 attached to one end of a valve stem, such as an intake valve of an internal combustion engine.
5 The valve head, at the inward end of the stem, may be configured to contact a valve seat within
6 the hollow body of the plunger. The stem protrudes outward of the bottom end of the plunger
7 body. A clutch device may surround the stem of the valve to retard and control the motion of the
8 stem and thereby maintain the valve in an open or closed configuration during respectively the
9 descent or ascent of the plunger. The valve thus moves between these two positions to open the
10 flow passages at the surface when the plunger contacts the striker mechanism, and to close the
11 bypass passages at the bottom of the well when the stem strikes the bottom, usually at a bumper
12 device positioned at the bottom of the well. Descent of the plunger is controlled by gravity,
13 which pulls it toward the bottom of the well when the valve is open.

14
15 This valve or "dart" may be held open or closed by the clutch – typically a device that
16 exerts circumferential friction around the valve stem. The dart may be held within a hollow cage
17 attached to the plunger by a threaded retainer or end nut at the lower end of the plunger
18 assembly. Thus, the valve reciprocates between an internal valve seat (valve closed) in a hollow
19 space inside the cage and the inside surface of the lower end of the cage (valve open). A
20 conventional clutch is appropriate for some applications, especially when its assembly is well
21 controlled to produce uniform assemblies. Such a clutch may be formed of a bobbin split into
22 two hemispherical halves and surrounded by one or two ordinary coil springs that function as a
23 sort of garter to clamp the stem of the valve or dart between the two halves of the bobbin,
24 thereby resisting the sliding motion of the stem within the bobbin. The clutch assembly is
25 typically held in a fixed position within the cage. Each 'garter' spring is wrapped around its
26 groove and the ends crimped together, typically in a hand operation that is subject to some
27 variability in the tension around the bobbin halves and possible failure of the crimped joint,
28 which could affect the reliability of the clutch when in a downhole environment.

1 While generally effective in lifting accumulated fluids and gas of unproductive wells
2 such conventional bypass plungers tend to be complex and suffer from reliability problems in an
3 environment that subjects them to high impact forces, very caustic fluids, elevated temperatures
4 and the like. Various ways have been attempted to simplify construction of bypass plungers,
5 improve their reliability and performance, and to reduce the cost of manufacture. However,
6 failures remain common, and a substantial need exists to eliminate the causes of these failures.
7 What is needed is a bypass plunger design that solves the structural problems with existing
8 designs and provides a more reliable and efficient performance in the downhole environment.
9

SUMMARY OF THE INVENTION

Accordingly there is provided a bypass plunger comprising a unitary hollow plunger body and valve cage formed in one piece having first and second ends, the valve cage formed at the second end, and the valve cage having internal threads at its distal end for receiving a retaining nut having external threads at one end thereof; a poppet valve having a valve head connected to a valve stem, the poppet valve reciprocatingly disposed within the valve cage such that the valve head is oriented toward a valve seat formed within the hollow body; a retaining nut having external threads formed in the outer surface thereof and corresponding to internal threads formed in the distal end of the valve cage to retain the poppet valve within the valve cage; and at least one helical groove formed for at least one-half revolution around the outer surface of the hollow plunger body for a portion of the length of the hollow body approximately midway between the first and second ends.

In another embodiment, there is provided a bypass plunger comprising a unitary hollow plunger body and cage, the valve cage formed at a lower end thereof and configured with internal threads at its lower end for receiving a retaining nut having external threads at one end thereof; a poppet valve having a valve head connected to a valve stem and reciprocatingly disposed within the valve cage; and a retaining nut having external threads for closing the lower end of the valve cage to retain the poppet valve within the valve cage; and at least two crimples to lock the retaining nut to the valve cage.

In another embodiment there is provided a bypass plunger comprising a unitary hollow plunger body and valve cage, the valve cage formed at a lower end thereof and configured with internal threads at its lower end for receiving a retaining nut having external threads at one end thereof; a poppet valve having a valve head connected to a valve stem and reciprocatingly disposed within the valve cage; a retaining nut having external threads for closing the lower end of the valve cage to retain the poppet valve within the valve cage; a continuous helical groove machined into a central portion of the hollow body midway between upper and lower ends

1 thereof and having a predetermined pitch, depth, and profile according to required spin and rate
2 of descent of the bypass plunger through a well tubing; first and second crimple detents
3 extending inward from the surface of the valve cage at the second end of hollow body and along
4 first and second opposite radii of the valve cage into corresponding relieved spaces in the
5 proximate external threads formed in the outer surface of the retaining nut; and a canted coil
6 spring disposed within a circumferential groove formed into the inside wall of the retaining nut
7 such that the canted coil spring exerts a substantial radial clamping force on the stem of the
8 poppet valve, thereby forming a clutch to retard the motion of the poppet valve between open
9 and closed positions.

10
11 Accordingly there is provided a clutch assembly for a bypass plunger having a valve cage
12 and a reciprocating dart valve, the dart valve having a round stem and disposed within the valve
13 cage, the clutch assembly comprising: a partition nut, threadably installed within an internal
14 thread of an open end of the valve cage following installation of the dart valve in the valve cage;
15 a split bobbin assembly having first and second hemispherical halves, each half of the split
16 bobbin assembly having formed there around at least one circumferential groove, and the
17 assembly installed on the stem of the dart valve; a coil spring disposed in each circumferential
18 groove to secure the split bobbin assembly around a stem of the dart valve, thereby forming the
19 clutch assembly; a retaining nut threadably installed within the internal thread of the valve cage
20 following installation of the clutch assembly within the valve cage; and at least first and second
21 crimples formed into the outer surface of the valve cage and extending into relieved spaces
22 formed in an external thread formed on each one of the retaining nut and the partition nut.

23
24 In another embodiment there is provided a clutch for a bypass plunger having a
25 reciprocating valve, comprising a clutch body formed as a circular split bobbin assembly having
26 first and second halves, the assembly defined by a central axis, an inside radius, an outside
27 radius, and first and second opposite faces normal to the central axis; a circumferential groove
28 disposed in the surface defined by the outside radius of the split bobbin assembly; and a canted-

1 coil spring disposed in the circumferential groove to secure the split bobbin assembly around a
2 valve stem.

3
4 Accordingly there is provided a dart valve for a bypass plunger, the dart valve disposed to
5 move reciprocatingly within a valve cage of the bypass plunger between seated and unseated
6 positions and constrained by a clutch mechanism within the valve cage or its retaining nut,
7 comprising a poppet valve comprising a valve stem and a valve head; a valve head connected to
8 one end of the valve stem, the valve head including a sealing face to make sealing contact with a
9 valve seat within the bypass plunger; and the valve stem includes a predetermined surface
10 profile for moderating tension produced by the clutch mechanism during the reciprocating
11 motion of the poppet valve.

12
13 In another embodiment there is provided an improved valve dart assembly for a one-
14 piece hollow plunger body and valve cage of a bypass plunger, the valve cage formed at a lower
15 end of the hollow plunger body and configured with internal threads at its open lower end, the
16 improvement comprising a poppet valve having a valve head connected to a valve stem and
17 reciprocatingly disposed within the valve cage; a retaining nut having external threads at one end
18 thereof for engaging internal threads formed in the open lower end of the valve cage to retain the
19 poppet valve within the valve cage; and a canted coil spring disposed within a circumferential
20 groove formed into the inside wall of the retaining nut such that the canted coil spring exerts a
21 substantial radial clamping force on the stem of the poppet valve, thereby forming a clutch to
22 retard the motion of the poppet valve between open and closed positions.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a side exploded view of one embodiment of a bypass plunger according to the present invention;

Figure 2 illustrates a cross section view of the embodiment of Figure 1 as assembled;

Figure 3 illustrates a cross section detail view of the lower end of the embodiment of Figure 2 with the valve shown in an open position;

Figure 4 illustrates a cross section detail view of the lower end of the embodiment of Figure 2 with the valve shown in a closed position;

Figure 5 illustrates a side cross section detail of an end (retaining) nut and canted coil spring for use with the embodiment of Figures 1 - 4;

Figure 6 illustrates an end cross section detail of the end (retaining) nut and canted coil spring depicted in Figure 5, for use with the embodiment of Figures 1 - 4;

Figure 7 illustrates an enlarged version of Figure 3;

Figure 8 illustrates an end cross section view of the embodiment depicted in Figure 7;

Figure 9 illustrates a side view of a hollow body according to the present invention having a tight helix profile disposed in a central portion of the embodiment of Figure 1;

Figure 10 illustrates a side view of a hollow body according to the present invention having an open helix profile disposed in a central portion of the embodiment of Figure 1;

1 Figure 11 illustrates a first example of an alternative embodiment of a plunger valve
2 clutch according to the present invention;

3
4 Figure 12 illustrates a second example of an alternative embodiment of a plunger valve
5 clutch according to the present invention;

6
7 Figure 13 illustrates a third example of an alternative embodiment of a plunger valve
8 clutch according to the present invention;

9
10 Figure 14 illustrates an alternate embodiment of the bypass plunger of Figure 1 that uses
11 a split bobbin clutch;

12
13 Figure 15 illustrates a first example of an alternate embodiment of a plunger valve dart
14 according to the present invention;

15
16 Figure 16 illustrates a second example of an alternate embodiment of a plunger valve dart
17 according to the present invention;

18
19 Figure 17 illustrates a third example of an alternate embodiment of a plunger valve dart
20 according to the present invention;

21
22 Figure 18 illustrates a detail view of the profile of a feature of the embodiment of Figure
23 17;

24
25 Figure 19 illustrates a die for use in a press to form a crimple used in the embodiments of
26 Figures 3, 4, 7, and 8;

27
28 Figure 20 illustrates an alternate embodiment to Figure 4, showing a split bobbin clutch
29 assembly for a bypass plunger within a valve cage;

1 Figure 21 illustrates a cross section detail view of an alternate embodiment of the lower
2 end of the embodiment of Figure 3 with the valve shown in an open position; and

3
4 Figure 22 illustrates a cross section detail view of an alternate embodiment of the lower
5 end of the embodiment of Figure 4 with the valve shown in a closed position.
6

DETAILED DESCRIPTION OF THE INVENTION

In an advance in the state of the art, the novel bypass plunger described herein with the aid of the accompanying drawings yields improvements in a number of areas. The result is a novel combination of four essential features incorporated in a unibody bypass plunger (aka unibody gas lift plunger) as disclosed herein. The principle components of the unibody bypass plunger include the one-piece hollow plunger body and the integral valve cage formed at its lower end. The valve cage assembly includes a valve dart and a clutch mechanism enclosed within the cage. A retaining nut (or end nut) that retains the valve dart and clutch mechanism within the cage completes the valve dart cage assembly. The novel features of the present invention provide reduction of manufacturing costs, and enhanced performance, durability, and reliability, advantages that result through substantially greater simplicity of design and construction. The features of this novel combination are described as follows.

One feature is a one piece or unitary hollow body and cage with flow ports in the integral valve cage (disposed at the lower end of the plunger body) that can be altered to control the flow of fluid through the plunger on descent. During descent, the plunger falls through the well and any fluids therein. The fluids flow through the angled ports in the valve cage and the hollow body of the plunger. The ports in the cage may be oriented at different angles, varied in number, relieved, etc. to adjust the rate of descent. This unitary design minimizes the number of parts and the number of joints that must be formed and secured. One principle benefit of the one-piece or “unibody” construction is fewer parts to assemble and secure together, and the elimination of failures in the mechanisms used to secure the parts together.

The valve cage at the lower end and the end cap (if used) at the upper end are mated to the respective ends of the hollow plunger body with threaded joints and secured with a crimp (“crimple”) formed in at least two equally spaced locations around the hollow body. The crimple functions as an inward-formed dent that effectively indents the wall of the valve cage portion of the hollow body into a corresponding relief machined into the external threads of the (smaller)

1 outside diameter of the retaining nut. The retaining nut (alternately “end nut”), thus threadably
2 secured to the lower end of the valve cage, functions to close the open end of the valve cage and
3 retain the poppet valve within the valve cage. The crimple feature eliminates the need for
4 separate parts such as pins, screws, ball detents, lock nuts or washers, etc, to lock a threaded joint
5 from loosening. The advantage of the crimple technique and mechanism is to more reliably
6 prevent the inadvertent disassembly of the components secured to the bypass plunger with screw
7 threads, thereby ensuring a true unibody bypass plunger that remains a single unit throughout
8 many cycles of use. The term crimple is a contraction of the terms crimp and dimple, to
9 characterize the crimp as approximating a crimp at a defined point as compared with a
10 circumferential crimp.

11
12 The outer surface of the hollow plunger body of the present invention includes a series of
13 concentric rings or ridges machined into the outer surface of the hollow body for approximately
14 one third the overall length of the hollow body at each end. The rings or ridges thus provided act
15 as a seal to minimize the clearance between the plunger and the inside of the well tubing through
16 which it descends and ascends. In the present invention, between these two groups of concentric
17 rings, one group at each end of the hollow body, is a series of concentric *spiral* (or helical)
18 grooves (not unlike the “valleys” of screw threads) machined into the central portion of the outer
19 surface of the hollow body. The “central” portion may typically (but not exclusively) be
20 approximately the central one-third of the length of the hollow body. The pitch and profile of
21 these spiral grooves may be varied between a tight helix and an open helix to vary the rate of
22 spin of the plunger as it descends and ascends. The purpose of spinning the plunger is to prevent
23 flat spots from forming on the outside surface of the plunger, which reduce the effectiveness and
24 the useful life of the bypass plunger. The cross section profile of the grooves may also be varied
25 to facilitate the spin rate.

26
27 The “clutch” of one embodiment of the present invention consists of a canted-coil garter
28 spring disposed within a circumferential groove *inside* the end nut. In other words, no bobbin is
29 used, split or otherwise; just the canted coil spring that is disposed within its groove and wrapped

1 360 degrees around the stem of the valve dart. As used in the inventive plunger, the coils of the
2 spring as formed are *canted* in the direction of its torroidal centerline (i.e., a line passing through
3 the center of each coil of the spring) in a circumferential direction around the stem diameter.
4 The coils of the canted coil spring, unlike a conventional coil spring in which the coils are
5 disposed substantially at right angles to the centerline of the spring, are disposed at an acute
6 angle relative to the centerline of the spring. This configuration allows the spring to exert
7 tension at *right angles* to its centerline against the outside diameter surface of the valve dart
8 stem. This property is enhanced when the outer diameter of the canted-coil spring is constrained
9 by a cylindrical bore or in a groove surrounding the spring. The surface of the valve dart stem in
10 one embodiment is preferably machined to a surface roughness of approximately 8 to 50
11 microinches, a standard specification for a very smooth finish. The canted coil spring is supplied
12 in a 360 degree form with its ends welded together (thereby forming a torroidal shape), enabling
13 it to be dimensioned to fit within a machined groove in the end or retaining nut. Advantages of
14 this design include elimination of the bobbin components and greater durability.

15
16 In the appended drawings, reference numbers that appear in more than one figure refer to
17 the same structural feature. The drawings depict at least one example of each embodiment or
18 aspect to illustrate the features of the present invention and are not to be construed as limiting the
19 invention thereto. In addition, several alternative embodiments of a clutch mechanism for a
20 plunger valve that utilizes canted-coil springs, and several alternative embodiments of a plunger
21 valve dart having different valve stem profiles are included to suggest the scope of modifications
22 that may be made to these components without departing from the concepts employed in the
23 present invention. It should be understood that the term "plunger dart" or simply "dart" may also
24 be named a poppet valve or a valve dart herein, all of which refer to the same component.

25
26 Figure 1 illustrates a side exploded view of one embodiment of an integrated, unibody
27 bypass plunger according to the present invention. The unibody bypass plunger 10 is formed as
28 a single hollow plunger body 12 machined from a suitable material such as a stainless steel alloy.
29 Such materials are well known in the art. Forming the hollow plunger body as a single piece

1 simplifies construction by reducing the number of parts to be connected together with screw
2 threads, thereby reducing the opportunities for failure when a threaded joint fails. Further, the
3 profiles of the flow ports in the cage 16, the sealing rings 22, 24, and the centralized helix 24
4 may all be readily tailored during manufacture for a specific application. The plunger body
5 includes the following defined sections: an ID fishing neck 14, an upper section of sealing rings
6 22, an intermediate or central section of helical ridges or grooves 24, a lower section of sealing
7 rings 26, and a valve cage 16 for enclosing and retaining a poppet valve or valve dart 32. The
8 valve cage 16 includes a plurality of flow ports 18 disposed at typically two to four equally-
9 spaced radial locations around the valve cage 16. In the illustrated embodiment, two or more
10 crimples 20 to be described may be positioned as shown near the lower end of the hollow body
11 12 / cage 16 unit. The crimple 20 provides a mechanism to lock a retaining nut or end nut 40
12 threaded on the open, lower end of the valve cage 16. The hollow body 12 may further include
13 wear grooves 30 disposed at selected ones of the sealing rings 22, 26 as shown. Further,
14 disposed within the retaining or end nut 40 when the bypass plunger is assembled is a canted-coil
15 spring 42 that functions as a clutch. This novel clutch design, which does not require use of a
16 bobbin or similar structure, will be described herein below.

17
18 Continuing with Figure 1, the assembly of the bypass plunger 10 includes a valve dart 32
19 inserted head-end first through the valve cage 16 into the lower end of the hollow body 12. The
20 valve head 36 and its sealing face 38 form a poppet valve head at the end of stem 34. When
21 installed in the hollow body 12, the sealing face 38 of the poppet valve or dart 32 is shaped to
22 contact a valve seat 48 machined into the internal bore 52 of the hollow body 12 as shown in
23 Figure 4 that depicts the valve dart 32 in a closed position. The valve dart 32 may be retained
24 within the valve cage 16 by the end nut 40 that may be installed in the lower end of the valve
25 cage 16 and secured by screw threads 28 (See Figure 7). The end nut 40 includes in this
26 embodiment an external circular groove 44 around part of its threaded portion. This groove 44
27 provides a relieved space so that a crimple 20 to be described may extend into the groove 44 to
28 lock the external threads of the end nut 40 to corresponding internal threads in the lower end of
29 the valve cage 16. The end nut 40 also preferably includes a canted-coil spring 42 (to be

1 described) disposed into an internal circumferential groove 50 (See Figure 5). The canted-coil
2 spring 42 replaces a conventional clutch often used with dart-equipped plungers and provides a
3 simpler and more effective structure to retard or brake the motion of the valve stem as it moves
4 between open and closed positions.
5

6 Figure 2 illustrates a partial cross section view of the embodiment of Figure 1 as
7 assembled to depict the relationship of several internal features of the bypass plunger 10. The
8 valve dart 32, shown in its open position for descent, is confined within the valve cage 16 by the
9 retaining nut 40. The canted-coil spring 42 surrounds the stem 34 of the valve dart 32 to retard
10 its motion within the valve cage 16. The canted-coil spring 42 is retained within the
11 circumferential groove 50 machined into the inner bore of the retaining nut 40, as more clearly
12 shown in Figures 3 - 6. The inner bore 52 of the hollow body 12 includes valve seat 48 and flow
13 ports 18 cut through the wall of the valve cage 16. One example of the profiles of the sealing
14 rings 22, 26 and the helical grooves 24 are also depicted in Figure 2.
15

16 Figure 3 illustrates a cross section detail view of the lower (valve cage 16) end of the
17 embodiment of the bypass plunger 10 shown in Figure 2 with the valve dart 32 in an open
18 position. Figure 3 also depicts the use of a crimple 20 that deforms the wall of the valve cage 16
19 so that an extended portion of the crimple 20 - the crimp 21, formed as a dent in the outer surface
20 of the valve cage 16 - protrudes into a relieved portion 44 of the screw threads of the retaining or
21 end nut 40. Persons skilled in the art will appreciate that the relieved portion 44 may be
22 machined as a drilled hole of limited depth or a punched opening that may be round, oval, or
23 rectangular in shape. In some cases, the formation of the crimple on the outer surface of the
24 valve cage may extend into the threads of the retaining nut 40 sufficiently to prevent the
25 retaining nut from loosening.
26

27 The crimple 20 thus functions similar to a set screw or a pin to prevent the loosening of
28 the screw threads. This feature is shown and described in greater detail for Figures 7 and 8. In
29 the claims or in the description of the present invention, which includes a one-piece or "unitary"

1 hollow plunger body and valve cage, the crimple feature may be variously described and
2 understood as being disposed in the 'hollow body' or in the "valve cage" portion of the hollow
3 body. Moreover, persons skilled in the art will recognize that the crimple feature is a technique
4 that may be used in place of set screws, pins, etc., to secure threaded components from turning
5 relative to each other. For example, end nuts at either end of a plunger body or a bumper spring
6 or other similarly constructed device, may employ a crimple as described herein to useful
7 advantage.
8

9 Figure 4, which is similar to Figure 3, illustrates a cross section detail view of the lower
10 end of the embodiment of the valve cage (16) portion of the bypass plunger shown in Figure 2
11 with the valve dart 32 in a closed or seated position, with the sealing face 38 of the valve head 36
12 seated against the valve seat 48 inside the valve cage 16, and the opposite end of the valve dart
13 32 slightly retracted - e.g., no more than about 0.030 inch - within the end of the retaining nut 40.
14

15 Figure 5 illustrates a side cross section detail of the end (retaining) nut 40 and the canted-
16 coil spring 42 for use with the embodiment of Figures 1 - 4. In this illustrated embodiment the
17 canted-coil spring 42 is disposed within a circumferential groove 50 *inside* the end nut 40. The
18 canted-coil spring 42 provides a clutch action on the stem 34 of the valve dart 32 without using a
19 bobbin, split or otherwise. Only the canted-coil spring 42 that is disposed within its groove 50
20 and wrapped 360 degrees around the stem 34 of the valve dart 32 acts to restrain the motion of
21 the dart valve 32. As used in the illustrated bypass plunger 12, the coils of the spring 42 as
22 formed are *canted* in the direction of its centerline, that is, in a circumferential direction around
23 the stem 34 diameter.
24

25 The coils of the canted-coil spring, unlike a conventional coil spring in which the coils
26 are disposed substantially at right angles to the centerline of the spring, are disposed at an acute
27 angle relative to the centerline of the spring 42. This configuration allows the canted coils of
28 spring 42 to exert tension radially inward at *right angles* to its centerline against the outer surface
29 of the valve stem 34. The particular specifications of the canted-coil spring, such as the material

1 used for the spring wire, its overall diameter, the diameter of the coils, the acute angle the coils
2 form relative to the centerline of the spring, etc., may be selected to suit the particular
3 dimensions of the bypass plunger, its expected environment, and other conditions of use. The
4 performance of the canted-coil spring design is facilitated by the surface finish provided on the
5 surface of the stem 34. Optimum performance is provided when the surface finish, preferably
6 produced by machining, is held within the range of 8 to 50 microinches.

7
8 Advantages of this bobbinless, canted-coil spring design include at least the following:
9 (a) reduction in the number of components required to provide the clutch function; (b) the
10 canted-coil spring 42 is supported in a more confined space, reducing the likelihood of failure
11 during hard impacts; (c) the need to assemble a split bobbin-with-garter springs clutch is
12 eliminated - the canted-coil spring is simply inserted into its circumferential groove 44; and (d)
13 the use of a conventional clutch bobbin assembly is eliminated. These advantages arise from the
14 simplicity and the construction of the canted-coil spring.

15
16 Unlike a typical garter spring, which as supplied is simply a coil spring that must be
17 formed into a circle and the ends typically crimped together (a hand-assembly operation that is
18 prone to errors such as in cutting to length and crimping, etc.), the canted-coil spring 42 is
19 supplied to specification with the ends welded and the circular, torroidal-form coil properly
20 dimensioned and configured for the particular application. Also unlike the garter spring, the
21 canted-coil spring 42 need only be inserted into the circumferential groove 50 in the end nut 40,
22 while the garter spring must be assembled onto the split bobbin; again a more complex hand-
23 assembly operation. Thus the use of the canted-coil spring 42 ensures a leaner manufacturing
24 process of a bypass plunger 10 that is substantially more reliable because of the more durable
25 spring, and the more consistent tension it provides. These features markedly improve the impact
26 resistance of the shifting mechanism (the valve cage 16, end nut 40, and canted-coil spring 42) of
27 the unibody bypass plunger 10 disclosed herein.

1 Continuing with Figure 5, the surface of the stem 34 is preferably machined and finished
2 to a surface roughness of approximately 8 to 50 microinches. The combination of the radial
3 tension and the specified surface finish provides the appropriate amount of friction to control the
4 motion of the valve dart 32 between the open and closed positions of the stem 34 of the valve
5 dart 32. As noted above, the advantages of this design include elimination of the bobbin
6 components and greater durability.

7
8 There are several alternate surface finishes to be illustrated and described (See Figures 15
9 through 18) - combinations of recesses, grooves, undercuts, and surface roughness - that may be
10 applied to the stem 34 of the valve dart 32 to limit or control the shifting of the valve dart 32
11 during operation of the bypass plunger 10. These features can improve the operation of the
12 bypass plunger under a variety of conditions while descending or ascending in the well tubing.
13 For example, recesses such as snap ring grooves may be located at strategic locations along the
14 stem 34 to prevent the stem 34 from sliding too easily within the canted-coil spring 42 or restrain
15 the sliding when the bypass plunger encounters a condition that it might otherwise interpret as
16 contacting the striker at the surface or the bumper spring at the bottom of the well.

17
18 Figure 6 illustrates an end cross section detail of the end (retaining) nut 40 and canted-
19 coil spring 42 surrounding the stem 34 of the valve dart 32 for use with the embodiment of
20 Figures 1 - 4. As shown, the canted coil spring is supplied in a 360 degree form that is
21 dimensioned to fit within the machined groove 50 in the end nut 40.

22
23 Figure 7 illustrates an enlarged version of Figure 3 to depict the form of the crimple 20
24 used to lock the retaining or end nut 40 to the valve cage 16. The crimple embodiment is an
25 effective technique for locking the threaded joint between the retaining or end nut 40 and the
26 valve cage 16. This form of locking the joint also acts to prevent loosening, thereby extending
27 the life of the joint. As shown, the crimple 20 is formed as a detent 20, 21 into the outer surface
28 of the valve cage 16. The dent or crimple 20 extends radially inward through the threads 28 of
29 the retaining or end nut 40 and valve cage 16 and into the circumferential recess 44 (shown in

1 cross section in Figure 7). The detent 20, 21 may be approximately rectangular in cross section
2 to enable the narrower dimension to extend more readily into the recess 44.

3
4 Alternatively, the profile of the detent 20, 21 may be approximately conical in form, as
5 though formed by a center punch having a conical point. In practice, the crimple detent 20, 21
6 may be formed using a press as is well-known in the art. One preferred example of a die used in
7 a press to form the crimple is illustrated in Figure 19 to be described. The detent 20, 21 is
8 preferably placed in at least two locations, on opposite sides of the valve cage 16 - i.e.,
9 approximately 180 degrees apart around the body of the valve cage 16 as shown in Figure 8,
10 which illustrates an end cross section view of the embodiment depicted in Figure 7.

11
12 Figure 9 illustrates a side view of a hollow body bypass plunger 60 according to the
13 present invention. The plunger of Figure 1 is depicted in Figure 9 with a groove surrounding the
14 central portion of the body of the plunger and forming a tight helix profile 62. Figure 10
15 illustrates a side view of a hollow body bypass plunger 70 according to the present invention
16 having a more open helix profile 72 formed of several grooves, also disposed in a central portion
17 24 of the plunger 70. The helical feature disposed in the central portion 24 of the plungers 60, 70
18 may be called a centralized helix that is formed to cause the plunger to rotate as it ascends and
19 descends or travels up and down through the well bore. Since the seal provided by the sealing
20 rings 22, 26 is not total, fluids and gases escape past the sealing rings 22, 26. As the plunger 60,
21 70 passes through the well bore, the fluids and gases impart a torque to the plunger 60, 70 by the
22 mechanism of the helical grooves 62, 72 respectively. The result is a reduction in the occurrence
23 of flat spots along the outside diameter of the sealing rings 22, 26 of the body of the plunger 60,
24 70 and consequent longer life.

25
26 The continuous helical groove machined into the central portion of the hollow body
27 midway between the upper and lower ends thereof may have a predetermined pitch, depth, and
28 profile. The variation in the pitch of the helical grooves 62, 72 as shown in Figures 9 and 10
29 provides a means of varying the rate of spin imparted to the bypass plungers 60, 70. In the

1 example of Figure 9, a single helical groove 62 encircles the body of the plunger 60 from one up
2 to as many as eight times. Lengthening the fluid path around the plunger 60 tends to reduce the
3 spin rate of the plunger 60. In the example of Figure 10, a plurality of helical grooves, typically
4 three or four (but could be from one to as many as twelve) spaced at equal intervals around the
5 plunger body 60 provides a shorter fluid path around the plunger 70 to increase the spin rate of
6 the plunger 70. In applications where the number of helical grooves is greater than the typical
7 number of three to four, the width of the helical grooves may be proportionately narrowed as the
8 number of grooves is increased.

9 It is important to note that the central helix 62, 72 is positioned mid-way between the
10 sealing rings so as not to impair the sealing function of the sealing rings 22, 26 yet still provide a
11 mechanism to cause the plunger 60, 70 to rotate during its up-and-down travels. Moreover,
12 experience has shown that placing the helical grooves near the ends of the plunger body 60, 70
13 causes the outside diameter of the plunger to wear faster, reducing the profile depth and
14 effectiveness of the helical grooves and reducing the life of the bypass plunger 60, 70.

15
16 The concept of the centralized helix may also be used with good effect in sand plungers
17 used in sand-producing wells by improving the movement of the plunger through sand-bearing
18 fluid because of the rotation imparted to the sand plunger. The rotation may also tend to keep
19 the helical grooves - and the space between the plunger body and the well tubing free of sand
20 build-up through the effects of centrifugal force.

21
22 One of the usual components of a dart or poppet valve as used in a bypass or gas-lift
23 plunger is some form of clutch to restrain the motion of the dart, thereby ensuring the efficient
24 operation of the dart in controlling the operation of the plunger. A conventional split-bobbin
25 clutch may employ a circular bobbin split into two equal hemispherical halves to enable
26 convenient assembly around the stem of the dart or poppet valve. The two halves are generally
27 held against the stem by one or more (usually two) so-called "garter springs" disposed in grooves
28 surrounding the bobbin assembly. Each bobbin half encircles the stem for slightly less than a
29 full 180 degrees, so that the inside surface of each bobbin half may make direct contact with the

1 stem of the dart under the tension provided by the garter spring(s). The clutch assembly is
2 generally secured within the body of the plunger through which the dart reciprocates during its
3 use. The clutch, through the friction exerted against the stem, acts to damp the motion of the
4 stem within the bypass plunger so that it remains in the required closed or opened position during
5 ascent or descent respectively through the well tubing.
6

7 Figures 11, 12, and 13 illustrate several alternative embodiments of a split-bobbin clutch
8 assembly for use with darts (or dart valves or poppet valves) to restrain the motion of the dart
9 and to support the dart in its closed and open positions within a bypass plunger. These
10 embodiments differ from conventional clutches in the type of spring used in place of a garter
11 spring and the location of the canted-coil spring on the bobbin assembly. Conventional split
12 bobbin clutches typically use one or two ordinary coil springs that are wrapped around the
13 bobbin assembly and its ends crimped together to form a circular loop around the bobbin. The
14 spring tension of an ordinary coil spring, that acts like a rubber band around the bobbin, exerts an
15 inward force to clamp the bobbin halves around the dart stem. In contrast, the springs used in the
16 clutches illustrated in Figures 11, 12, and 13 have their coils canted at an acute angle with the
17 centerline of the spring. That is, the coils of the spring all slant in the same direction, and the
18 ends of the canted-coil spring are permanently secured together by welding during the
19 manufacture of the canted-coil spring. The tension against the stem results from the inherent
20 tension of the slanted (canted) coils, not from the tension in a coil spring stretched around the
21 bobbin and stem. Thus, the spring merely needs to be looped over the bobbin halves during
22 assembly. This results in uniform unit-to-unit clutch assemblies, which translates to greater
23 dependability of the clutch performance under downhole conditions.
24

25 The split bobbins of Figures 11, 12, and 13 differ from one another in the location of
26 grooves for supporting the canted-coil spring embodiment. Figure 11 has the grooves positioned
27 in each side face of the bobbin halves as shown. Figure 12 depicts the grooves formed in the
28 faces of the bobbin but intersecting the outer diameter of the bobbin so that the grooves are
29 formed along the outer edges of the bobbin. Figure 13 shows a single groove formed around the

1 perimeter of the bobbin, with a canted-coil spring installed in the groove. In this embodiment, a
2 bobbin could be constructed with more than one spring installed; thus Figure 13 is provided here
3 to illustrate the concept.
4

5 It is possible to use a conventional coil spring in the embodiments depicted in each
6 Figure 11, 12, and 13. However, several advantages are provided by the use of a canted-coil
7 spring to hold the bobbin halves together. (1) The manufacturing process of assembling the
8 bobbins is much simpler, involving substantially less hand work and opportunity for errors in
9 assembly. (2) This configuration provides a more consistent tension because the variation
10 between individual ones of the canted-coil springs can be held to a much closer tolerance than
11 ordinary coil springs that must be individually assembled on the bobbin. (3) The impact
12 resistance of the clutches assembled with canted-coil springs is greater because the springs can
13 be specified with stronger spring constants, the ends are more securely fastened, and the inward
14 tension exerted by the canted-coil configuration can be greater and more closely controlled.
15 These advantages provide superior service life and reliability, and lower operating costs,
16 especially important in downhole conditions characterized by high impacts and corrosive
17 substances.
18

19 Figure 11 illustrates a first example of an alternative embodiment of a plunger valve
20 clutch according to the present invention. The clutch 80 is assembled from first 82 and second
21 84 halves of a split bobbin assembly 86. A first canted-coil spring 88 installed in groove 90, and
22 a second canted-coil spring 92 is installed in a similar groove 94 that are visible in the cut-away
23 portion of the figure. When assembled on a valve stem the clutch 86 includes a gap 96 between
24 the first 82 and second 84 halves of the split bobbin assembly 86. The gap 96 ensures that the
25 tension exerted on the stem by the clutch 80 will be maintained.
26

27 Figure 12 illustrates a second example of an alternative embodiment of a plunger valve
28 clutch according to the present invention. The clutch 98 is assembled from first 92 and second
29 94 halves of a split bobbin assembly 104. A first canted-coil spring 106 is installed in groove

1 108, and a second canted-coil spring 110 is installed in a similar groove 112 that is not fully
2 visible in Figure 12 because it is installed on the opposite face of the split bobbin assembly 104.
3 When assembled on a valve stem the clutch 98 includes a gap 114 between the first 100 and
4 second 102 halves of the bobbin assembly 104. The gap 114 ensures that the tension exerted on
5 the stem by the clutch 98 will be maintained.
6

7 Figure 13 illustrates a third example of an alternative embodiment of a plunger valve
8 clutch according to the present invention. The clutch 116 is assembled from first 118 and second
9 120 halves of a split bobbin assembly 122. A first canted-coil spring 124 is installed in groove
10 126. If another canted-coil spring is desired, a second groove would be required. When
11 assembled on a valve stem the clutch 116 includes a gap 128 between the first 118 and second
12 120 halves of the split bobbin assembly 122. The gap 128 ensures that the tension exerted on the
13 stem by the clutch 116 will be maintained.
14

15 It should be appreciated by persons skilled in the art that a single canted-coil spring is
16 adequate for most applications because the spring can be manufactured within a given size
17 constraint and spring-constant as assembled to exert the required inward radial force and it is
18 thus not required to perform trial and error operations to select the proper springs.
19

20 Figure 14 illustrates an alternate embodiment of the present invention that is similar to
21 the embodiment of Figure 1 except Figure 14 is shown with a split bobbin clutch instead of the
22 canted coil spring 42 as shown in Figure 1. The clutch, an assembly of the split bobbin halves
23 140A, 140B is shown without a garter spring for clarity. The split bobbins may be encircled by
24 one garter (or canted coil) spring as shown or two garter springs in the manner of Figures 11, 12,
25 and 13. A partition nut 142, for retaining the bobbin assembly between the retaining or end nut
26 40 and the partition nut 142, is shown adjacent to the clutch bobbins. The partition nut 142 is
27 provided to ensure the clutch assembly 140A, 140B (and garter or canted coil spring) remains in
28 position between the end nut 40 and the partition nut 142.
29

1 Figures 15 through 18 illustrate several embodiments of the valve stem 34 portion of the
2 valve dart. These embodiments describe surface finishes or profiles including several examples
3 of alternative surface profiles for moderating the reciprocating motion of the valve stem within
4 the clutch structure of the unibody bypass plunger 10.

5
6 Figure 15 illustrates a first example of an alternate embodiment of a plunger valve dart
7 150 according to the present invention. The valve dart 150 includes first 152 and second 154
8 grooves that encircle the stem 34 near each end of the stem 34. The grooves in the illustrated
9 embodiment are formed as snap-ring grooves, a standard form for retaining snap rings that is
10 easily produced during manufacture of the valve dart 150. In the illustrated embodiment, the
11 snap-ring grooves, in cross section, may be formed as a 0.094 inch radius (R.094,"or,
12 approximately 0.10") into the stem 34, to a depth of approximately 0.01 inch. For other
13 embodiments requiring other bypass plunger body diameters, these dimensions may be varied or
14 scaled according to the dimensions of the bypass plunger and the canted-coil spring to be used
15 with the bypass plunger. The first groove 152 provides a retention feature to position the canted
16 coil spring 42 to retain the valve dart 150 closed as the plunger ascends. The first groove 152
17 acts to resist vibration effects that might tend to open the valve during ascent. Such intermittent
18 opening and closing of the valve dart reduces the efficiency of the plunger in lifting the fluids
19 and gas to the surface. Similarly, the second groove 154 acts to resist vibration effects that might
20 tend to close the valve during descent. Such intermittent closing of the dart valve 150 reduces
21 the speed of the plunger as it descends from the surface to the bottom of the well to begin a new
22 lift cycle. The stem 34 is preferably machined to a surface roughness of 8 to 50 microinches as
23 in the embodiment shown in Figure 5.

24
25 Figure 16 illustrates a second example of an alternate embodiment of a plunger dart valve
26 according to the present invention. The dart valve 160 includes first 162 and second 164 grooves
27 or recessed regions that encircle the stem 34 near each end of the stem 34. The first groove 162
28 in the illustrated embodiment is formed as a snap-ring groove, a standard form for retaining snap
29 rings that is easily produced during manufacture of the dart valve 160. The first groove 162 is

1 provided to enable the canted-coil spring to retain the dart valve 160 in a closed position for
2 ascent of the plunger. The second groove or recessed region 164 at the other end of the stem 34
3 near the valve head 36, is similar to the first groove or recessed region 162 except that it is
4 substantially wider along the length of the stem 34 to provide a predetermined amount of
5 freedom for the dart valve to open even if it contacts the striker at the surface with less than the
6 expected amount of upward-directed force. The longer intermediate length 166 of the stem 34 is
7 similarly recessed from the nominal stem diameter. This feature, by allowing the valve dart 160
8 to gain momentum as it moves within the valve cage 16, facilitates the movement of the stem 34
9 of the dart valve 160 through the restraining action of the canted-coil spring 42 as the dart valve
10 moves between open and closed positions. The surface is preferably machined to a surface
11 roughness of 8 to 50 microinches as in the embodiment shown in Figure 5.

12
13 Figure 17 illustrates a third example of an alternate embodiment of a plunger dart valve
14 according to the present invention. In this embodiment of the dart valve 170, substantially the
15 entire length of the stem 34 includes a surface profile 172 formed of closely-spaced alternating
16 ribs and grooves having a substantially uniform profile - for instance resembling a sinusoidal
17 wave in the illustrated example - as depicted in the detail view of Figure 18 to be described. This
18 dart valve 170 is designed for use with the split bobbin clutch designs illustrated in Figures 11,
19 12, and 13 described herein above.

20
21 Figure 18 illustrates a detail view of the profile of a feature of the embodiment of Figure
22 16, wherein the alternating rib-and-groove profile is more clearly shown. The surface profile
23 172 of the stem 34, shown in cross section in Figure 17 illustrates both the ribs 174 and the
24 grooves 176 formed according to a radius R and separated by a spacing S. The radius R may be
25 within the range of 0.020 inch to 0.150 inch and the spacing S between an adjacent crest and
26 trough may be within the range of 0.020 inch to 0.075 inch. The values of R on a particular
27 valve stem should be constant and the values of S on a particular valve stem should be constant.

Figure 19 illustrates one example of a die for use in a press to form a crimple used in the embodiments of Figures 3, 4, 7, and 8. The body 200 of the die includes a reduced diameter shank 202 that is shaped at its end to form the crimple 20 in the outer surface of the valve cage 16 portion of the unibody bypass plunger body 12. The crimple 20 is shown in detail in Figures 3, 4 and 7, 8. The crimple 20, an indentation into the outer surface of the valve cage 16, is produced by the shape of the crimple blade 204. The crimple blade 204 as shaped includes a major radius 206, a minor radius 208, and a fillet radius 210. The major radius 206 shapes the blade 204 to the radius of the plunger body 12 at the location of the crimple 20. The major radius is formed to a radial dimension slightly larger than the body of the plunger to be formed. Thus, when the blade 204 contacts the plunger body and begins to form the crimple 20, the stresses produced in the metal body of the plunger tend to flow outward, forming a smoother crimple 20. Different plunger body diameters will, of course require separate dies having the appropriate major radius for the work piece.

The minor radius 208 is provided for a similar reason - to allow the stresses of formation to flow outward along the work piece. A small fillet radius 210 is provided on the outside edges of the blade 204 to reduce stress riser occurrence, a phenomenon well-understood in the machine arts. The operation of the press with the die 200 installed proceeds in a slow, controlled manner, after the work piece - the body 12 of the plunger - is supported in a fixture or vise (the vise is not shown, as it is not part of the invention and is well known to persons skilled in the art) opposite the die 200. This procedure achieves the desired crimp 21 into the recess 44 of the retaining nut 40. The curvatures of the major 206, minor 208, and fillet 210 radii, besides reducing stresses in the metal also retard the formation of cracks, both during manufacturing and during use of the bypass plungers in the field, where the plunger is subject to hard impacts under some conditions.

Figure 20 illustrates an alternate embodiment to Figure 4, showing a split bobbin clutch assembly for a bypass plunger as disposed within a valve cage. The clutch assembly is held in place between the retaining or end nut 40 and a partition nut 142, both of which are locked in position by the use of a crimple 20. The crimple 20 deforms the wall of the end nut 40 and the

1 valve cage 16, so that an extended portion of the crimples 20 - (same as the crimp 21 shown in
2 Figures 3 and 4) - protrudes into a respective relieved portion 44 of the screw threads of both the
3 retaining or end nut 40 and the partition nut 142. The crimple 20 thus functions similar to a set
4 screw or a pin to prevent the loosening of the screw threads of the retaining or end nut 40 and the
5 partition nut 142.
6

7 The valve dart 170, shown in Figure 20 in the valve closed (valve seated as in Figure 4)
8 position within the valve cage 16, has the structure shown in Figure 17. The surface profile 172
9 of the valve stem 34 portion of the valve dart 170 is depicted in Figure 18. The clutch bobbin
10 halves 140A and 140B are held against the stem 34 of the valve dart 170 by springs 144 (which
11 could be canted-coil or conventional coil springs) that are installed in the grooves 146 formed
12 into the circumference of the bobbin halves 140A and 140B. Note that, when the valve dart 170
13 is seated inside the valve cage 16, the opposite end of the valve dart 170 slightly retracted - e.g.,
14 no more than about 0.030 inch - within the end of the retaining nut 40.
15

16 Returning to Figures 3 and 4, which depict the open and closed state of the dart valves
17 within the valve cage, an alternate embodiment of the valve dart assembly is depicted in Figures
18 21 and 22. The embodiments of Figures 3 and 4, and 21 and 22 illustrate dart valves equipped
19 with the canted coil spring that functions as the clutch mechanism. The alternate embodiment of
20 Figures 21 and 22 is preferred when the bypass plunger is used in downhole environments where
21 sand is frequently suspended in the fluids being lifted to the surface. It is preferred in this
22 alternate embodiment of the present invention to provide seals on either side of the canted coil
23 spring to minimize the possibility for particles of sand to become lodged in the coils of the
24 canted-coil spring, thereby reducing its effectiveness as a clutch mechanism. The valve dart 232
25 within the valve cage 216 is shown in open and closed positions or states, respectively Figures
26 21 and 22. Included in Figures 21 and 22 are first and second "slipper seals" 244, 246, each one
27 installed in respective circumferential grooves 252, 254 formed in the inside bore of the retaining
28 or end nut 240. The slipper seals 244, 246 are disposed on either side of the canted-coil spring
29 242 installed in its circumferential groove 250 formed in the end nut 240. Like the canted coil

1 spring 242, the slipper seals 244, 246 surround the stem 234 of the valve dart 232, thereby
2 forming a seal against sand or other types of particles becoming trapped within the canted coil
3 spring 242.
4

5 The slipper seals 244, 246 may be formed from various ones of the PTFE
6 (polytetrafluoroethylene) family of materials as O-rings having a square (or round) cross section.
7 Alternatives are filled Nylon such as oil-filled Nylon 6 and equivalents Moly-filled Nylon 6,
8 solid lubricant-filled Nylon 6. Other alternatives include semi-crystalline, high temperature
9 engineering plastics based on the PEEK (polyetheretherketone) or PAEK (polyaryletherketone)
10 polymers.
11

12 While the invention has been shown in only one of its forms, it is not thus limited but is
13 susceptible to various changes and modifications without departing from the spirit thereof. For
14 example, canted-coil springs may be used to advantage in split bobbin clutches as described
15 herein. Further, the profiles of the helical grooves and the flow ports in the cage, the surface
16 finishes, the relative placements of the canted coil spring within the retaining nut attached to the
17 cage, the form of the poppet valve - its stem, valve head, and the corresponding valve seat in the
18 plunger body, the number of canted coil springs used within the retaining nut or in a split bobbin
19 clutch assembly, the shape of the crimple and the die used to form it, are some illustrative
20 examples of variations that fall within the scope of the invention. Moreover, the crimple feature
21 is a technique that may be used in place of set screws, pins, etc., to secure threaded components
22 from turning relative to each other. For example, end nuts at either end of a plunger body or a
23 bumper spring or other similarly constructed device, may employ a crimple as described herein
24 to useful advantage. The canted-coil spring used as a clutch may also be used in other structures
25 for controlling sliding or reciprocating motion of a shaft within the bore of a corresponding
26 structure of a device.
27

28 In regard to the use of a canted-coil spring in a clutchless embodiment of a valve dart
29 assembly, several of the disclosed embodiments may use split bobbin clutch assemblies in the

1 claimed combinations, wherein canted -coil springs or conventional coil springs may be used to
2 hold the bobbin halves together around the stem of the valve dart, without departing from the
3 concepts of the invention as disclosed herein.
4

5 A final note about the drawings: detail features shown in the drawings may be enlarged to
6 more clearly depict the feature. Thus, several of the drawings are not precisely to scale.
7

What is Claimed is:

1. A dart valve for a bypass plunger, the dart valve disposed to move reciprocatingly within a valve cage of the bypass plunger between seated and unseated positions and constrained by a clutch mechanism within the valve cage or a retaining nut, comprising:

a poppet valve comprising a valve stem and a valve head;

the valve head connected to one end of the valve stem, the valve head including a sealing face to make sealing contact with a valve seat within the bypass plunger; and

the valve stem includes a predetermined surface profile for moderating tension produced by the clutch mechanism during the reciprocating motion of the poppet valve.

2. The dart valve of Claim 1, wherein the predetermined surface profile of the valve stem comprises:

at least one undercut region of lesser diameter disposed along the valve stem and between first and second defined ridges formed on the valve stem.

3. The dart valve of Claim 2, further comprising:

a second undercut region of lesser diameter disposed between the valve head and the nearest defined ridge for retaining the poppet valve in an open position during descent of the bypass plunger.

4. The dart valve of Claim 2, further comprising:

a circumferential recess formed around the valve stem near the end thereof opposite the valve head for retaining the poppet valve in a closed position during ascent of the bypass plunger.

5. The dart valve of Claim 4, wherein the circumferential recess comprises:

a snap-ring groove having a nominal width dimension of approximately 0.10 inch formed to a depth of approximately 0.010 inch.

6. The dart valve of Claim 1, wherein the predetermined surface profile of the valve stem comprises:

first and second circumferential recesses spaced along the valve stem for limiting the motion of the valve dart within the valve cage at the respective closed and open positions.

7. The dart valve of Claim 6, wherein the circumferential recesses comprise:

snap-ring grooves having a rounded cross section and a nominal radius thereof of approximately 0.10 inch to a depth of approximately 0.010 inch.

8. The dart valve of Claim 1, wherein the predetermined surface profile of the valve stem comprises:

a plurality of evenly-spaced circumferential grooves substantially along the length of the valve stem.


9. The dart valve of Claim 1, wherein the clutch mechanism comprises:

a canted coil spring disposed within the retaining nut of the valve cage.

10. The dart valve of Claim 1, wherein the predetermined surface profile of the valve stem comprises:


at least first and second grooves at the respective closed and valve open positions of the dart valve for cooperating with a canted-coil spring surrounding the valve stem to define the closed and open positions of the poppet valve.

26172.013

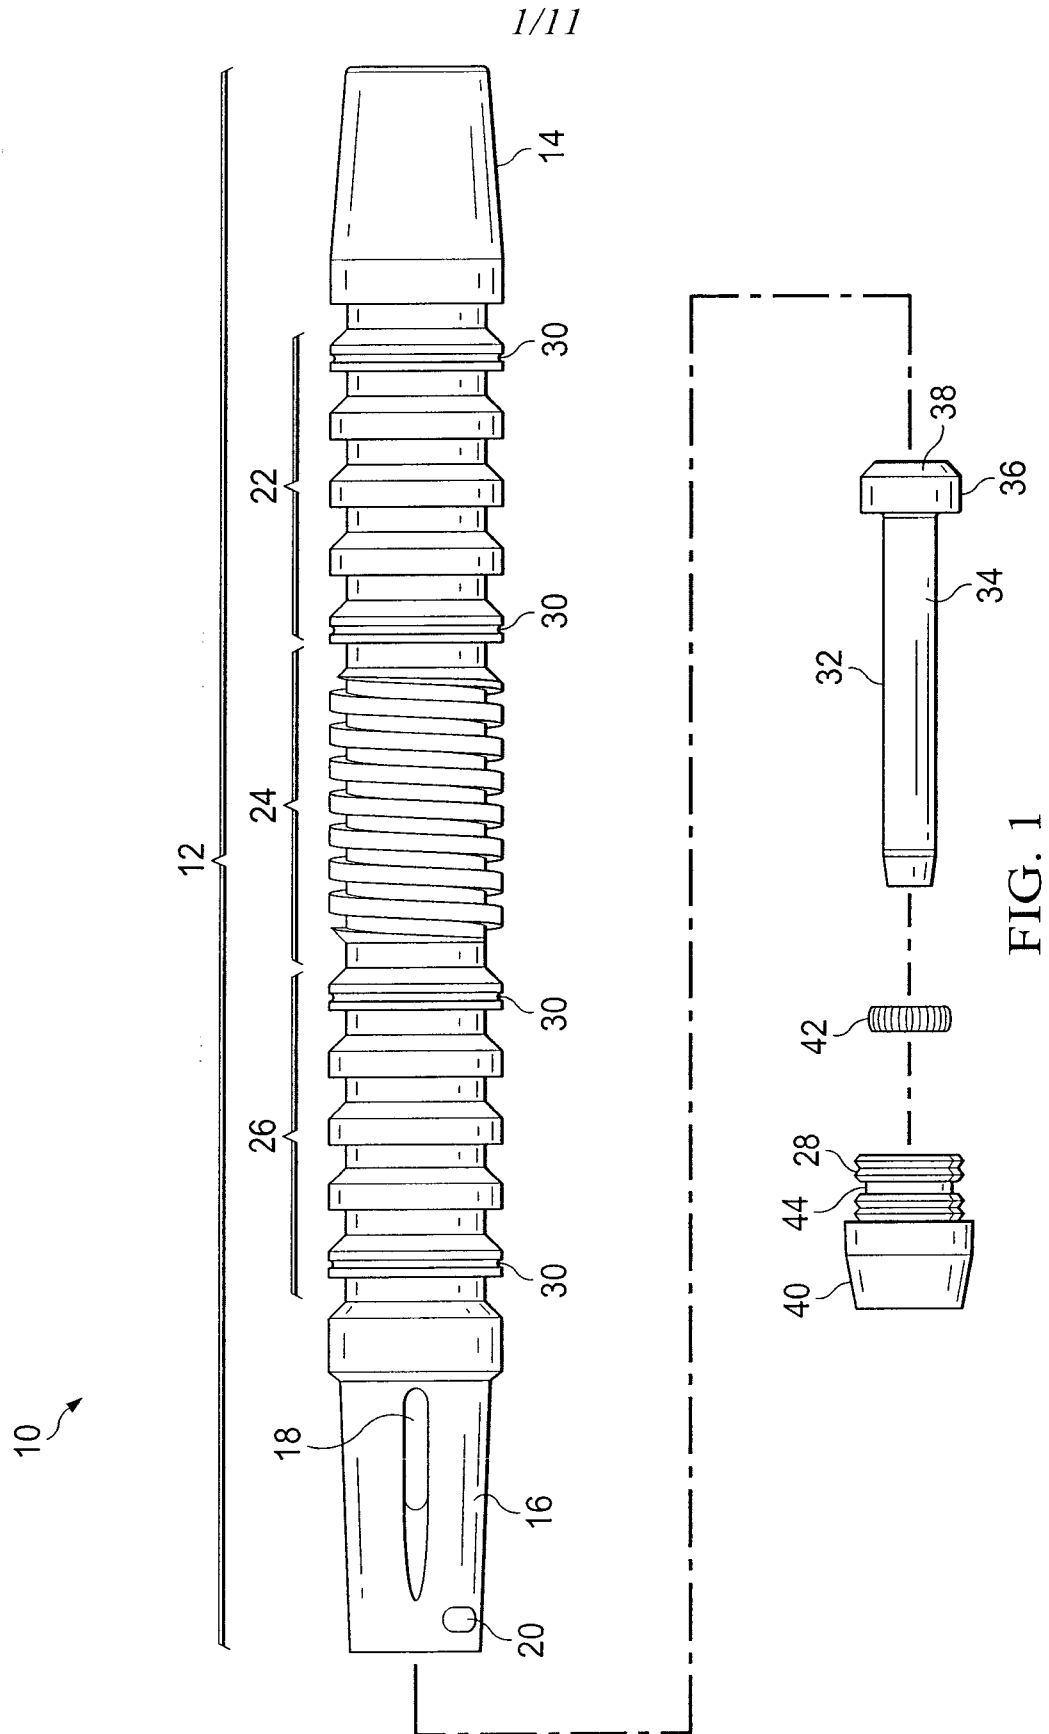

26172.013

2/11

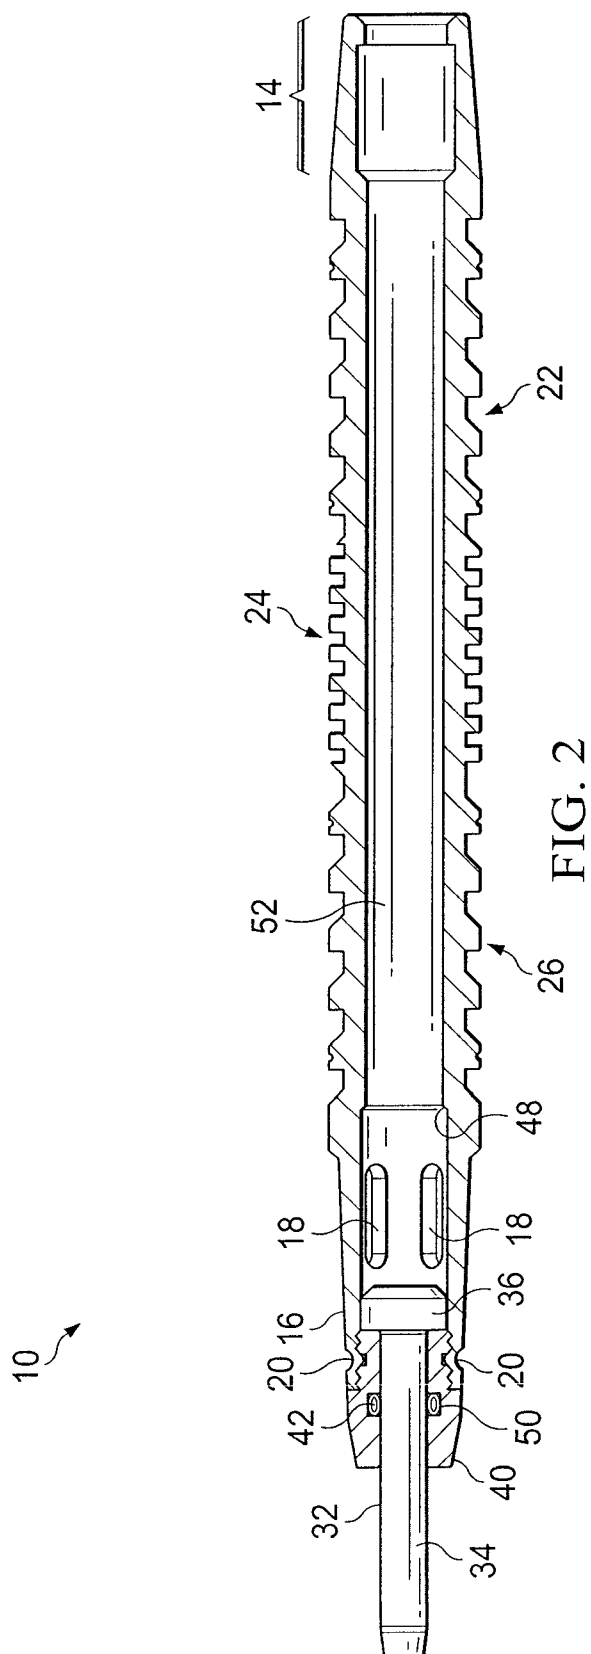

26172.013

3/11

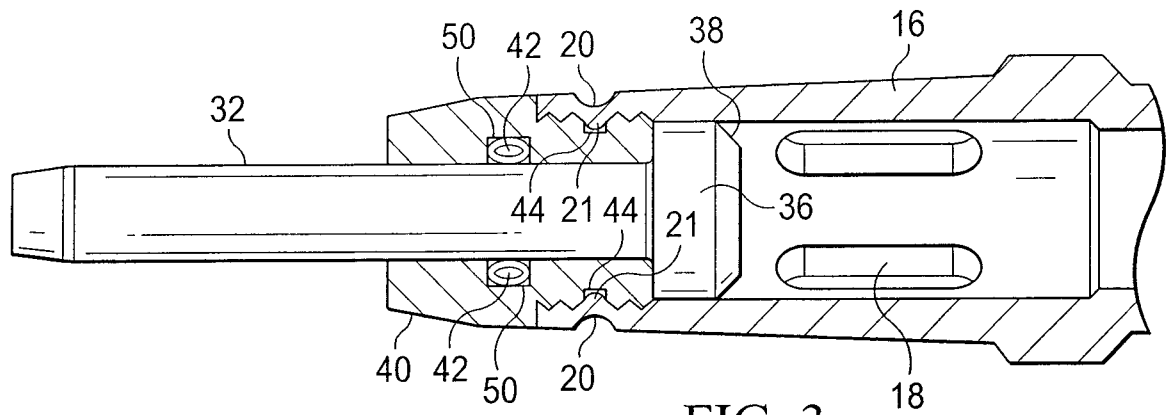


FIG. 3

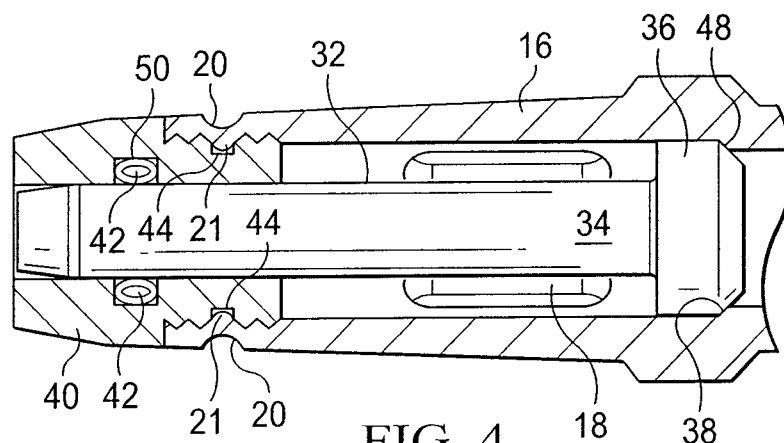


FIG. 4

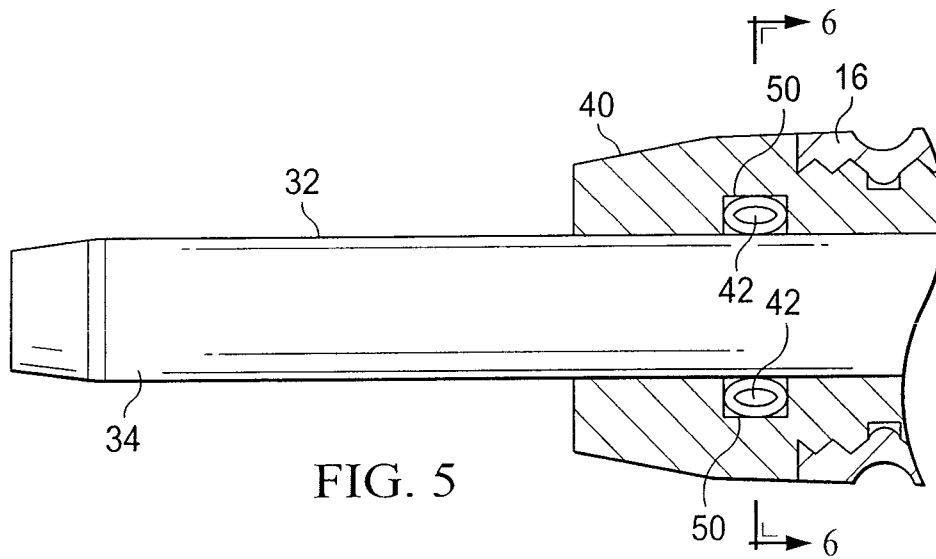


FIG. 5

26172.013

4/11

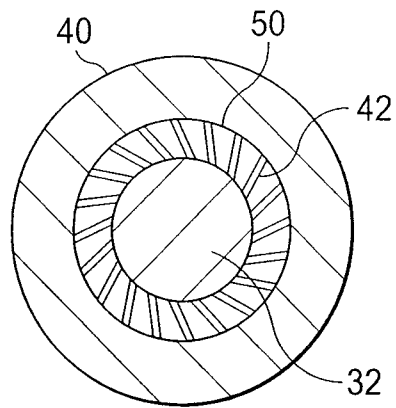


FIG. 6

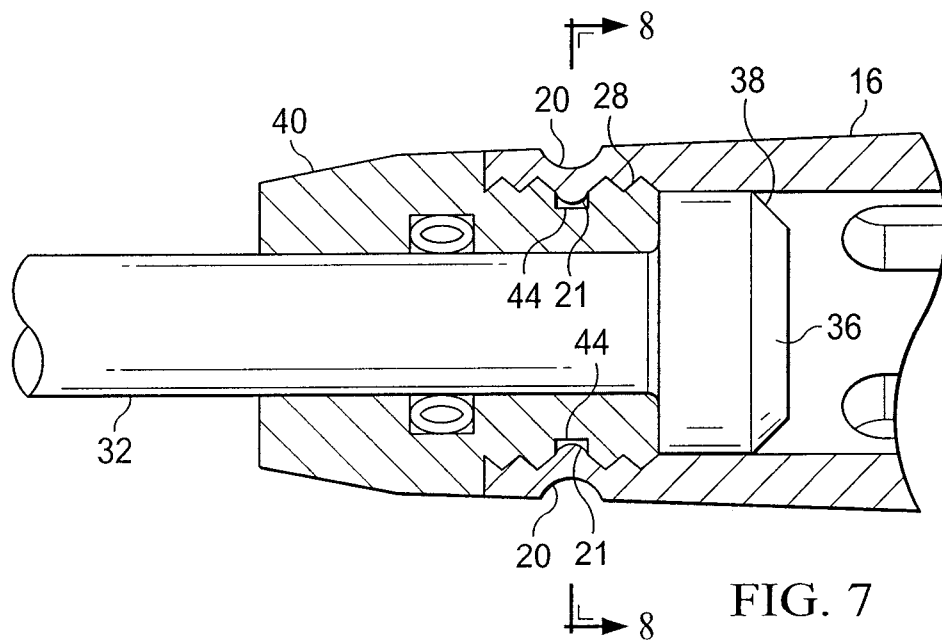


FIG. 7

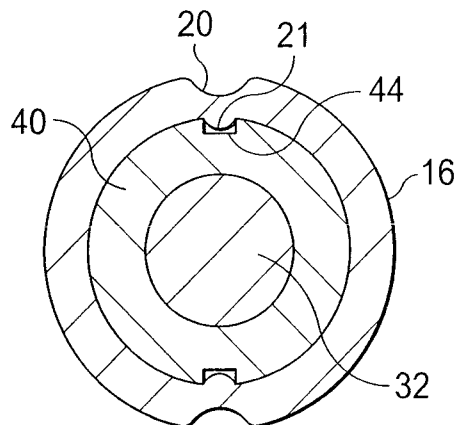


FIG. 8

26172.013

5/11

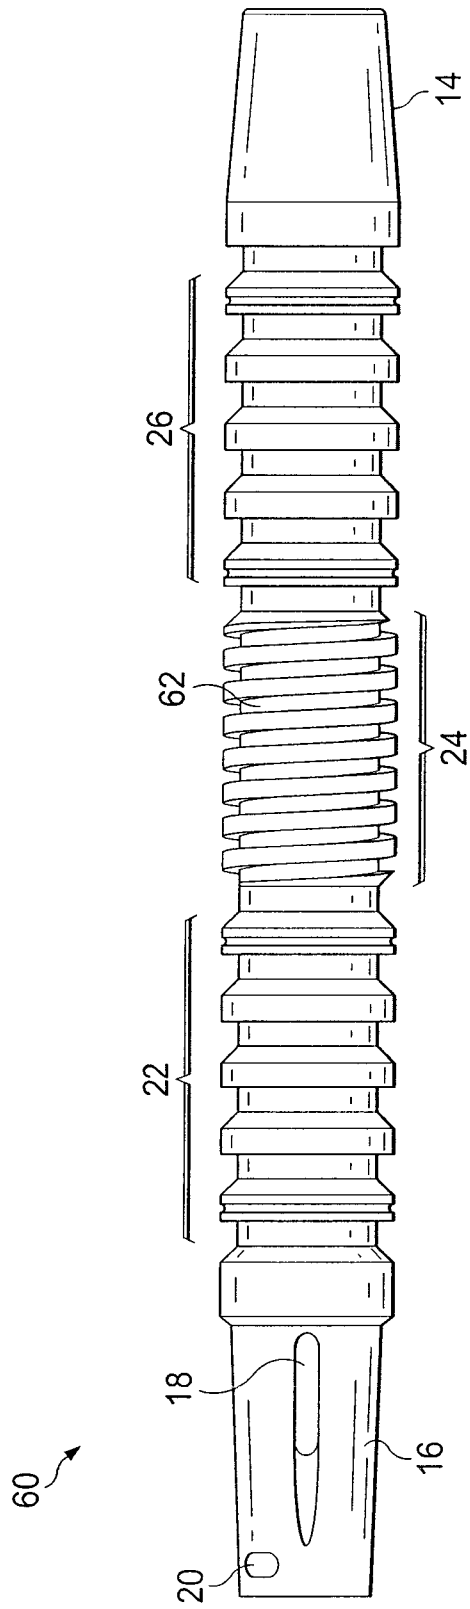


FIG. 9





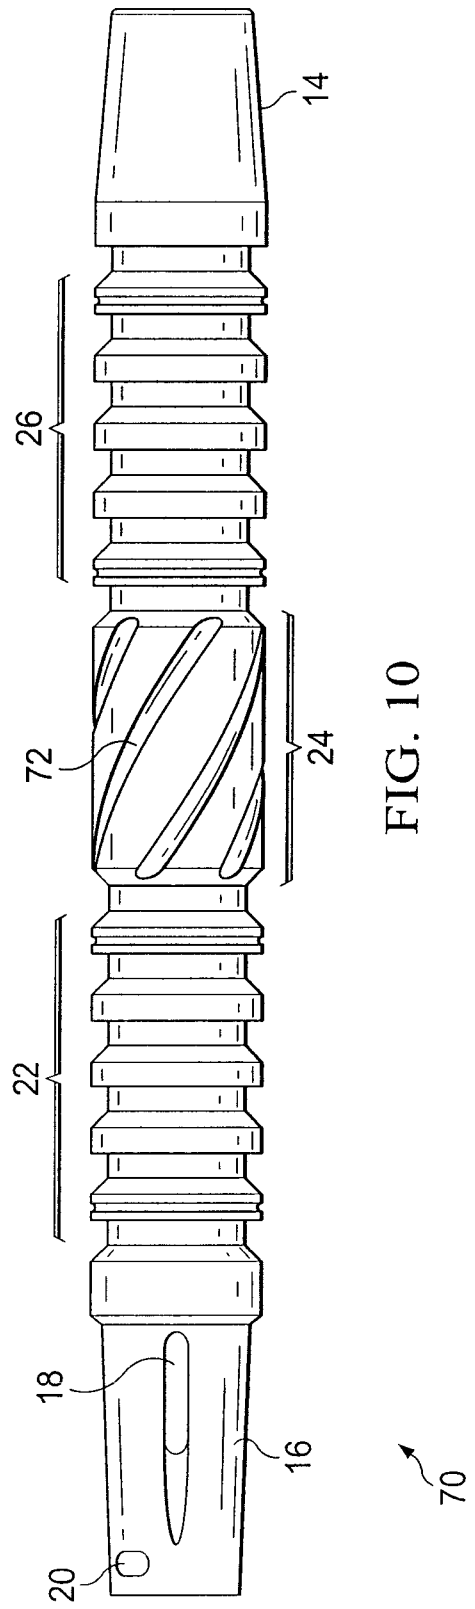


FIG. 10

26172.013

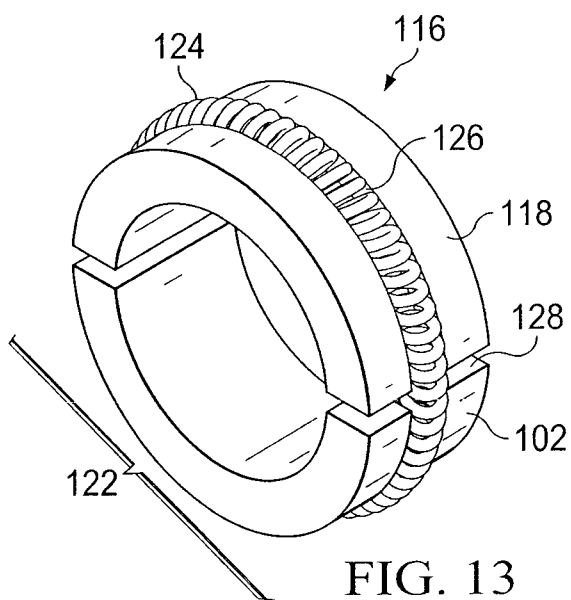
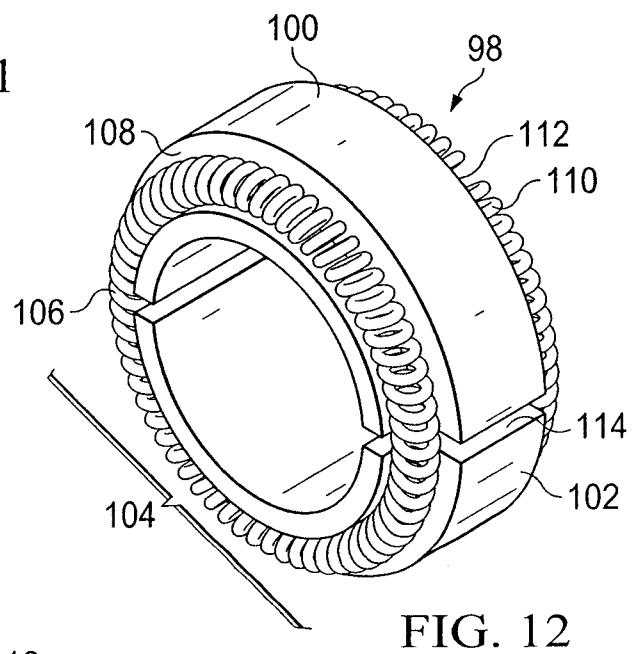
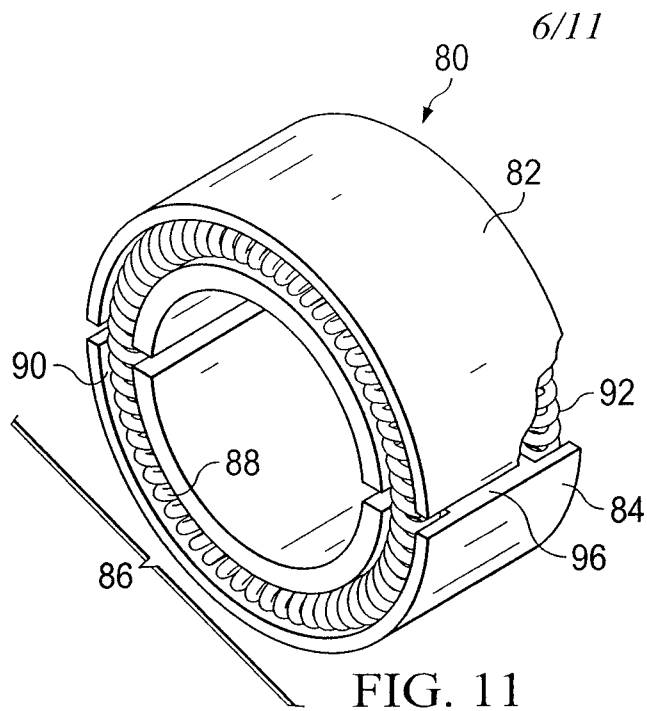


26172.013


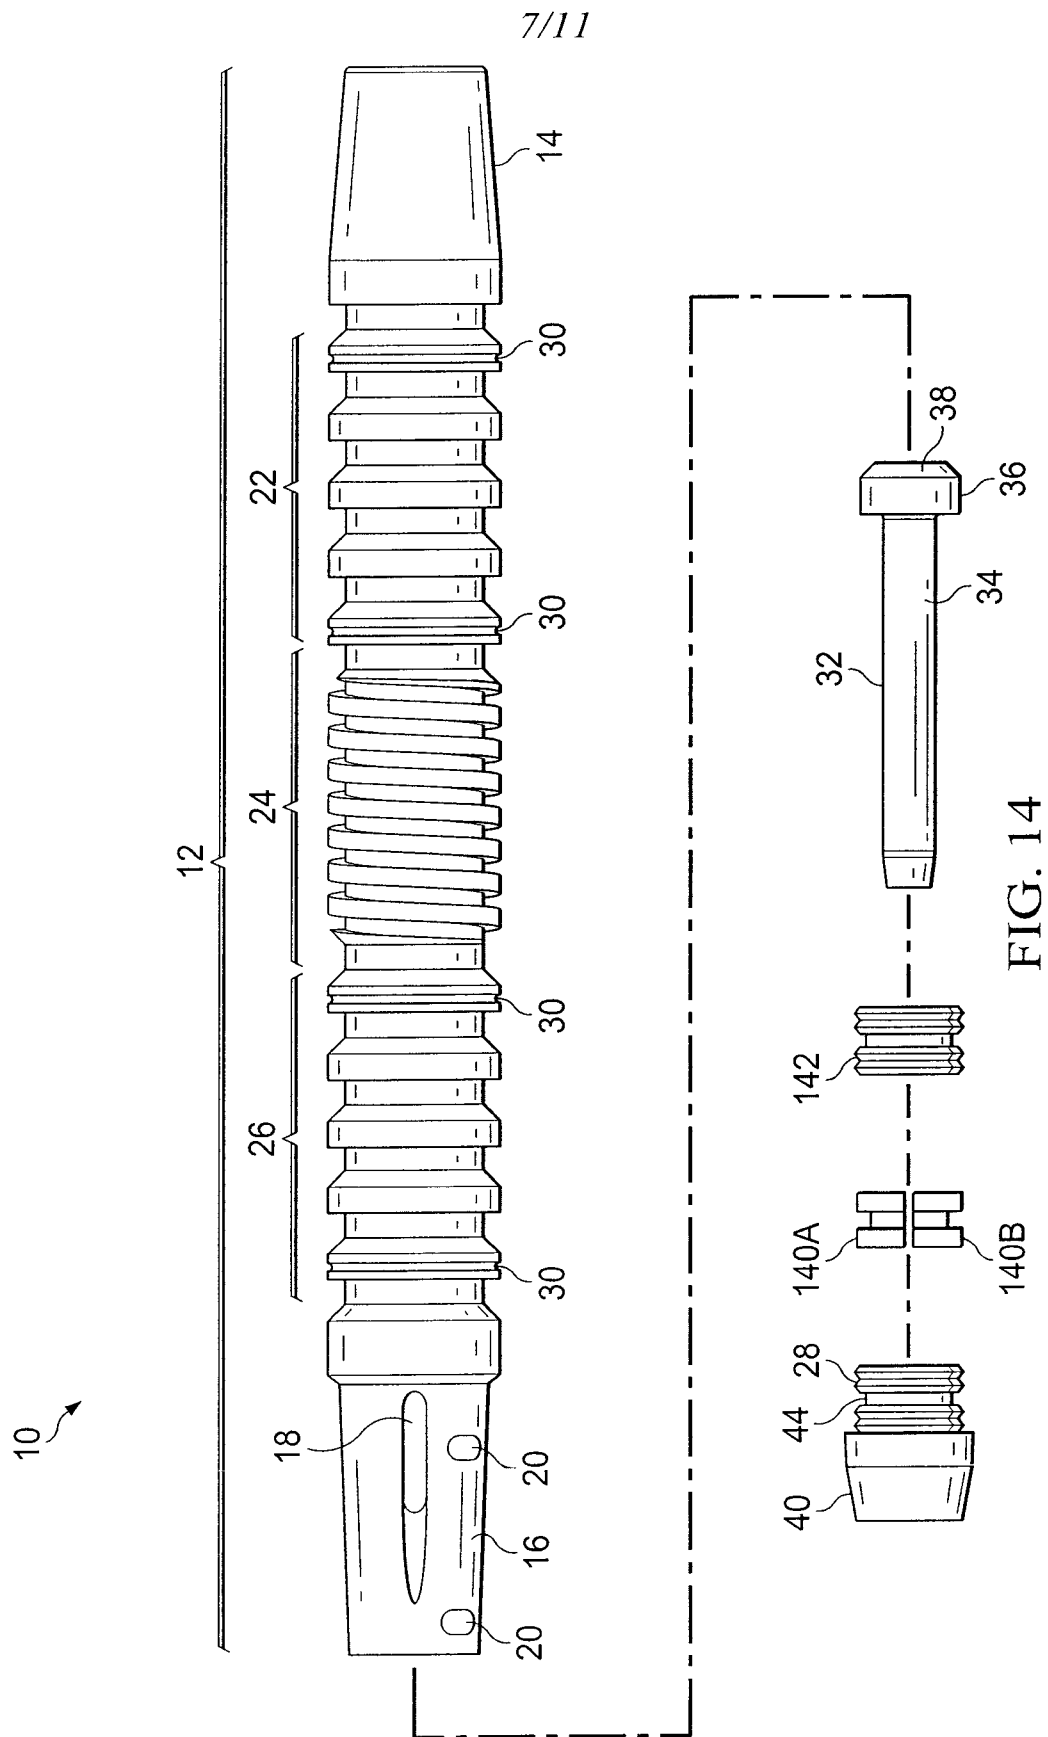


26172.013

8/11

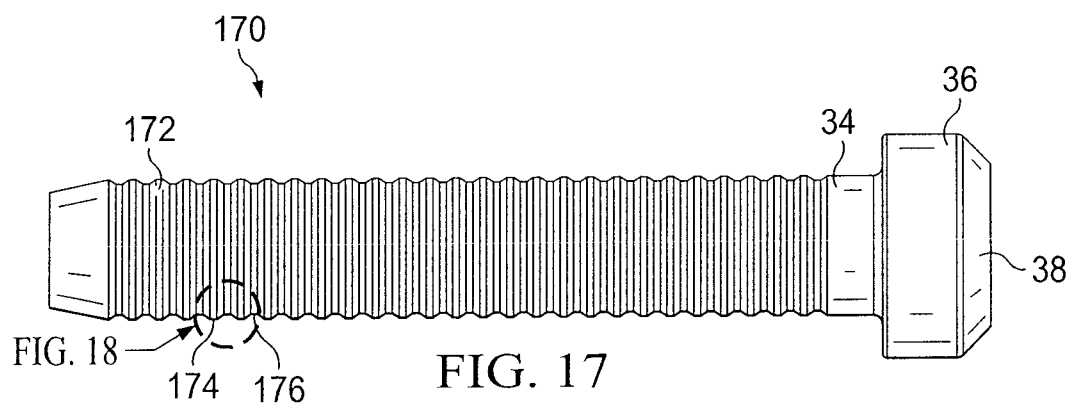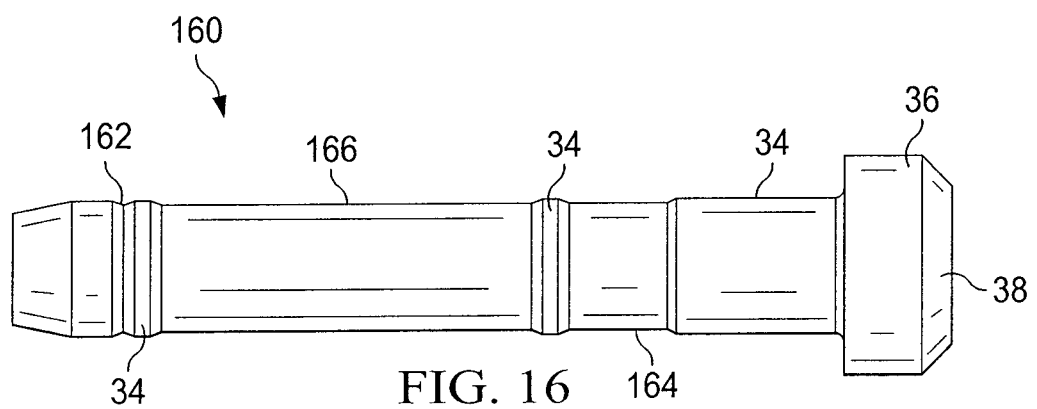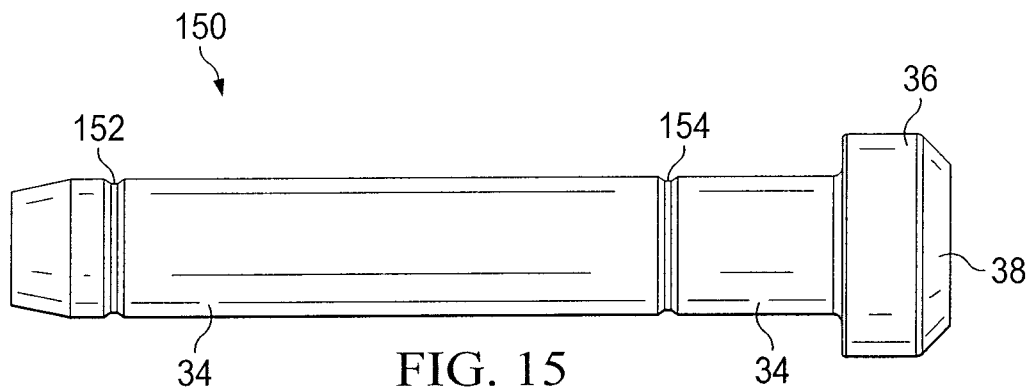


26172.013

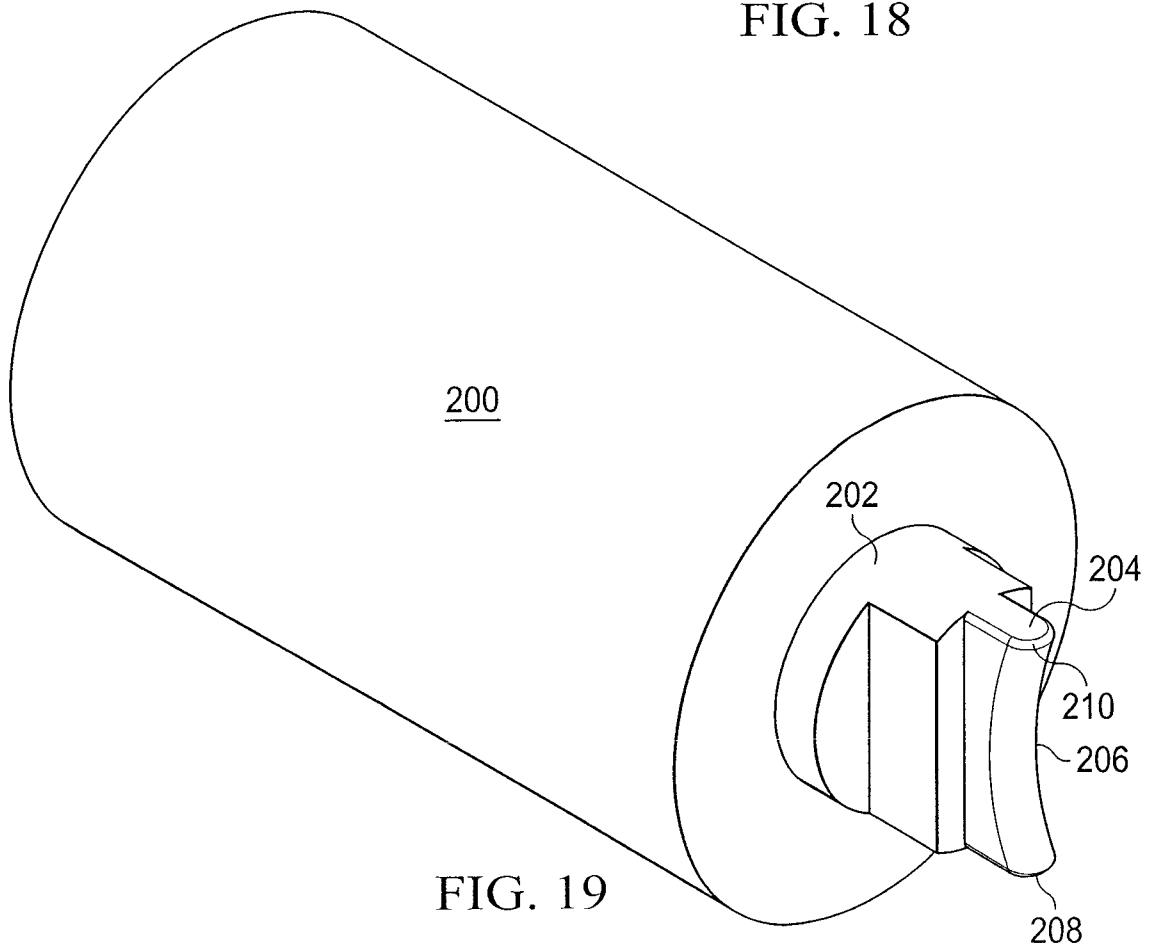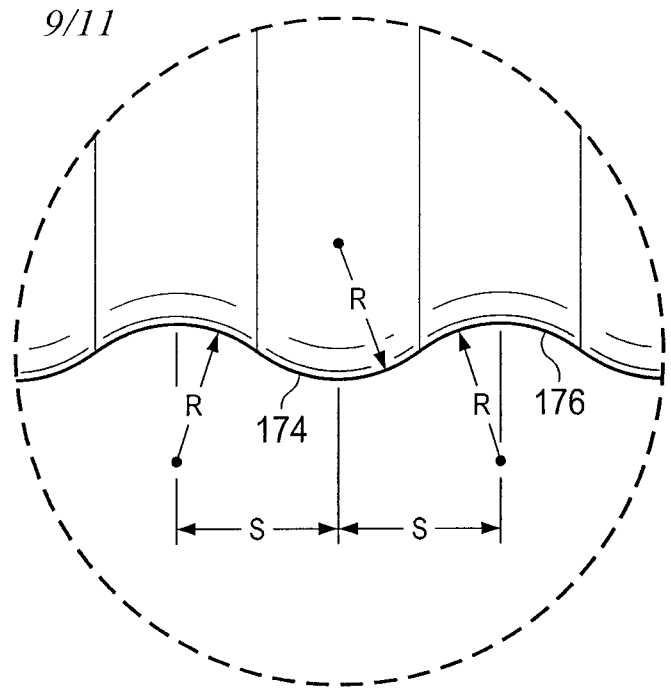



26172.013

10/11

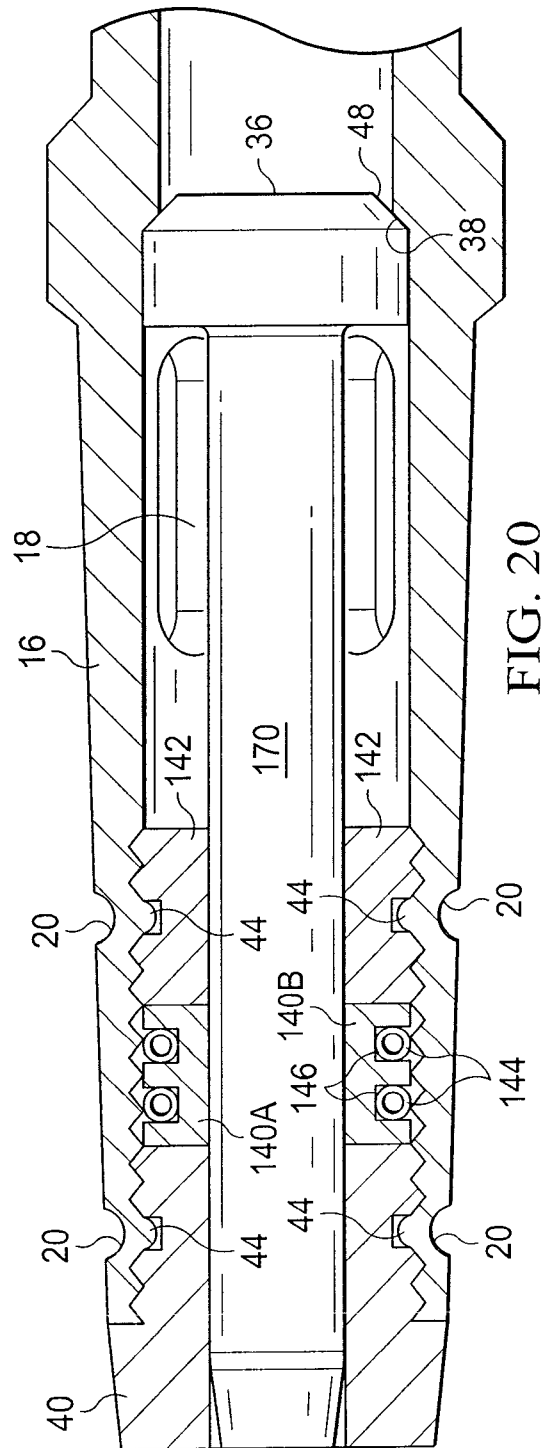

26172.013

11/11

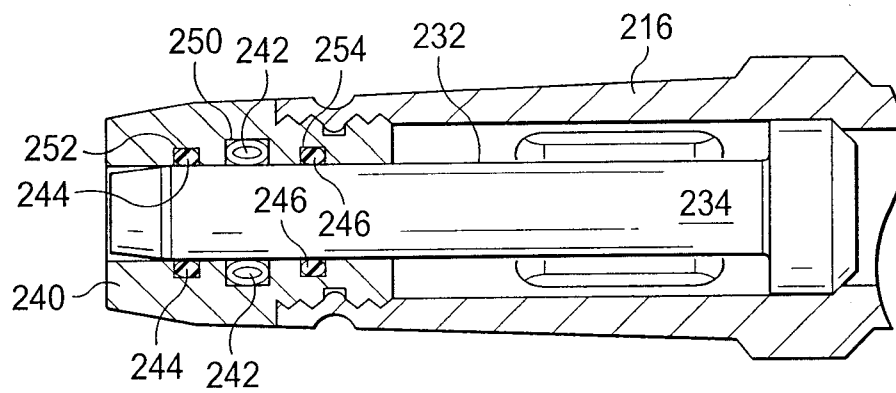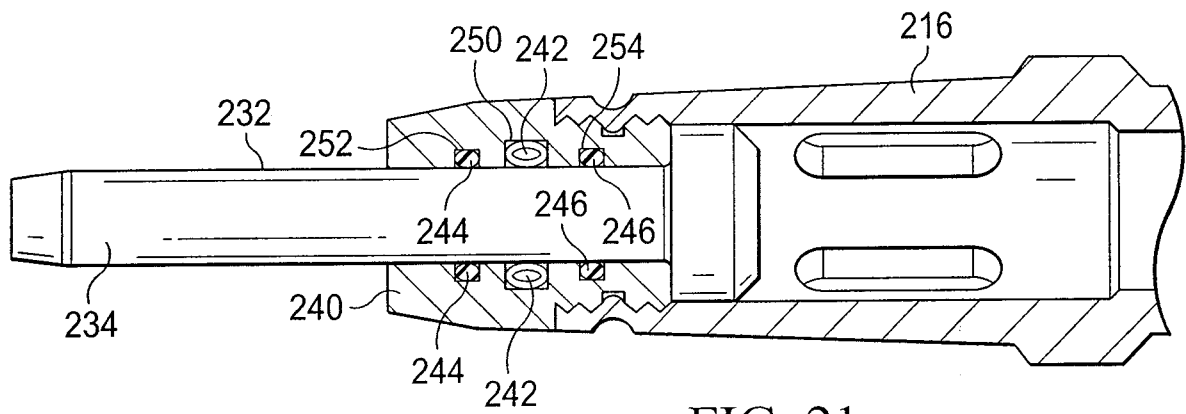

10

