



- (51) **International Patent Classification:**
B60C 7/00 (2006.01) *B60C 13/02* (2006.01)
B60C 13/00 (2006.01) *B60B 3/00* (2006.01)
- (21) **International Application Number:**
PCT/US2015/064507
- (22) **International Filing Date:**
8 December 2015 (08.12.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/095,460 22 December 2014 (22.12.2014) US
- (71) **Applicant:** BRIDGESTONE AMERICAS TIRE OPERATIONS, LLC [US/US]; 535 Marriott Drive, Nashville, Tennessee 37214 (US).
- (72) **Inventors:** HAIDET, Andrew V.; 1758 Graham Road, Stow, Ohio 44224 (US). COSTLOW, Douglas B.; 1379 Grant Street, Akron, Ohio 44301 (US).
- (74) **Agents:** FOX, Shaun J. et al.; 10 East Firestone Blvd., Akron, Ohio 44317 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) **Title:** TIRE AND WHEEL ASSEMBLY HAVING ANGLED INTERFACES

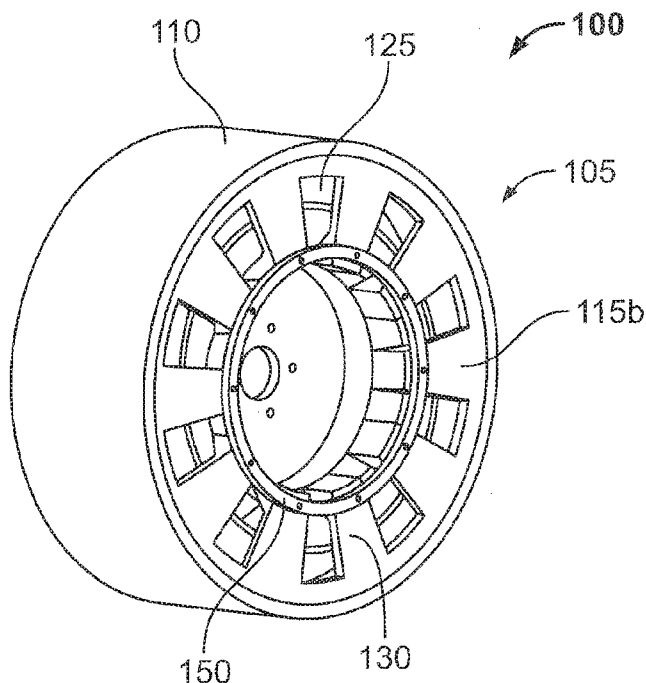


FIG. 1

(57) **Abstract:** A tire is configured to be received by a wheel having at least one angled surface. The tire includes a tread portion, a first sidewall, and a second sidewall. The first sidewall has a first outer surface, a first inner surface, and a first projection extending inwardly from the first inner surface. The first projection has a first angled surface configured to engage a first corresponding surface of a wheel. The second sidewall has a second outer surface, a second inner surface, and a second projection extending inwardly from the second inner surface. The second projection has a second angled surface configured to engage a second corresponding surface of the wheel.

WO 2016/105933 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

TIRE AND WHEEL ASSEMBLY HAVING ANGLED INTERFACES

FIELD OF INVENTION

[0001] The present disclosure relates to a tire and wheel assembly. More particularly, the present disclosure relates to a non-pneumatic tire having angled surfaces that interface with corresponding angled surfaces of a wheel.

BACKGROUND

[0002] Non-pneumatic tire constructions enable a tire to run in an uninflated condition. Some non-pneumatic tires employ a unitary tire and wheel construction. Other non-pneumatic tires are fastened to wheels using fasteners such as bolts. Non-pneumatic tires may include spokes that buckle or deflect upon contact with the ground. Such spokes may be constructed of a material that is relatively stronger in tension than in compression, so that when the lower spokes buckle, the load can be distributed through the remaining portion of the wheel.

SUMMARY OF THE INVENTION

[0003] In one embodiment, a non-pneumatic tire and wheel assembly includes a non-pneumatic tire having a circumferential tread and a pair of spaced apart sidewalls extending downwardly from the circumferential tread. Each of the sidewalls has an outer surface, an inner surface, and a projection extending inwardly from the inner surface. The projection has an angled surface. The assembly further includes a wheel having a pair of sides. Each side includes an angled surface abutting the angled surface of the projection of a corresponding sidewall. The assembly also includes a plurality of fasteners. Each fastener extends through at least one sidewall and at least a portion of the wheel.

[0004] In another embodiment, a tire is configured to be received by a wheel having at least one angled surface. The tire includes a tread portion, a first sidewall, and a second sidewall. The first sidewall has a first outer surface, a first inner surface, and a first projection extending inwardly from the first inner surface. The first projection has a first angled surface configured to engage a first corresponding surface of a wheel. The second sidewall has a second outer surface, a second inner surface, and a second projection extending inwardly from the second inner surface. The second projection has a second angled surface configured to engage a second corresponding surface of the wheel.

[0005] In yet another embodiment, a non-pneumatic tire has a circumferential tread and a pair of sidewalls, including a first sidewall and a second sidewall. The non-pneumatic tire also has a first projection extending inwardly from the first sidewall. The first projection has a first angled surface configured to engage a wheel and transfer a first force having a radial component and an axial component. The non-pneumatic tire further has a second projection extending inwardly from the second sidewall. The second projection has a second angled surface configured to engage a wheel and transfer a second force having a radial component and an axial component.

BRIEF DESCRIPTION OF DRAWINGS

[0006] In the accompanying drawings, structures are illustrated that, together with the detailed description provided below, describe exemplary embodiments of the claimed invention. Like elements are identified with the same reference numerals. It should be understood that elements shown as a single component may be replaced with multiple components, and elements shown as multiple components may be replaced with a single component. The drawings are not to scale and the proportion of certain elements may be exaggerated for the purpose of illustration.

[0007] **Figure 1** is a perspective view of one embodiment of a tire and wheel assembly **100**;

[0008] **Figure 2** is a cross-section of the tire and wheel assembly **100**;

[0009] **Figure 3** is a perspective view of an alternative embodiment of a tire and wheel assembly **200**;

[0010] **Figure 4** is a cross-section of the tire and wheel assembly **200**;

[0011] **Figure 5** is a perspective view of another alternative embodiment of a tire and wheel assembly **300**;

[0012] **Figure 6** is a cross-section of the tire and wheel assembly **300**;

[0013] **Figure 7** is a perspective view of yet another alternative embodiment of a tire and wheel assembly **400**; and

[0014] **Figure 8** is a cross-section of the tire and wheel assembly **400**.

DETAILED DESCRIPTION

[0015] The following includes definitions of selected terms employed herein. The definitions include various examples or forms of components that fall within the scope of a term and that may be used for implementation. The examples are not intended to be limiting. Both singular and plural forms of terms may be within the definitions.

[0016] “Axial” or “axially” refer to a direction that is parallel to the axis of rotation of a tire.

[0017] “Circumferential” and “circumferentially” refer to a direction extending along the perimeter of the surface of the tread perpendicular to the axial direction.

[0018] “Equatorial plane” refers to the plane that is perpendicular to the tire’s axis of rotation and passes through the center of the tire’s tread.

[0019] “Radial” and “radially” refer to a direction perpendicular to the axis of rotation of a tire.

[0020] “Sidewall” refers to that portion of the tire below the tread and defining a side of the tire.

[0021] “Tread” refers to that portion of the tire that comes into contact with a road or other rolling surface under normal load.

[0022] Directions are stated herein with reference to the axis of rotation of the tire. The terms “upward” and “upwardly” refer to a general direction towards the

tread of the tire, whereas “downward” and “downwardly” refer to the general direction towards the axis of rotation of the tire. Thus, when relative directional terms such as “upper” and “lower” or “top” and “bottom” are used in connection with an element, the “upper” or “top” element is spaced closer to the tread than the “lower” or “bottom” element. Additionally, when relative directional terms such as “above” or “below” are used in connection with an element, an element that is “above” another element is closer to the tread than the other element.

[0023] The terms “inward” and “inwardly” refer to a general direction towards the equatorial plane of the tire, whereas “outward” and “outwardly” refer to a general direction away from the equatorial plane of the tire and towards the sidewall of the tire. Thus, when relative directional terms such as “inner” and “outer” are used in connection with an element, the “inner” element is spaced closer to the equatorial plane of the tire than the “outer” element.

[0024] **Figures 1 and 2** provide a perspective view and cross-section, respectively, of one embodiment of a tire and wheel assembly **100**. The assembly **100** includes a tire **105** having a circumferential tread **110** and a pair of spaced apart sidewalls—including a first sidewall **115a** and a second sidewall **115b**—that extend downwardly from the circumferential tread **110**. In one embodiment, the tread **100** is constructed of a flexible material, such as rubber, thermoplastics, resins, or elastomeric or polymeric material, and the sidewalls **115a,b** are also constructed of a flexible material, such as polyurethane, thermoplastics, resins, or elastomeric or polymeric material. In an alternative embodiment (not shown), the tread and sidewalls are constructed of the same material.

[0025] In the illustrated embodiment, the sidewalls **115a,b** are in direct contact with the tread **110**. In an alternative embodiment (not shown), other components or layers of materials may be disposed between the tread and the sidewalls or embedded in the tread. For example, reinforcement structures may be disposed between the tread and the sidewalls. In one such embodiment, the reinforcement structures form a high annular strength band that acts as a structural compression member on the tire, and increases interlaminar shear strength across the axial length of the tire. The reinforcement structures may include inelastic

outer portions that sandwich an elastic center portion. Other examples of high annular strength bands are discussed in U.S. Patent No. 5,879,484, which is incorporated by reference herein in its entirety. The high annular strength band may also be referred to as a “shear band” or “band.”

[0026] Each of the sidewalls **115a,b** has an outer surface and an inner surface. A first projection **120a** extends inwardly from the inner surface of the first sidewall **115a**, and a second projection **120b** extends inwardly from the inner surface of the second sidewall **115b**. In the illustrated embodiment, the first projection **120a** is substantially symmetric to the second projection **120b**. In an alternative embodiment (not shown), the first projection and the second projection may have different shapes, sizes, or locations.

[0027] Both the first and second projections **120a,b** have angled surfaces. In the illustrated embodiment, a lower end of each projection is longer than an upper end, and the angled surface of each projection extends smoothly from the lower end to the upper end. In an alternative embodiment (not shown), multiple angled portions may extend from the lower end to the upper end. In another alternative embodiment (not shown), one or more rounded or curved surface may extend from the lower end to the upper end.

[0028] The sidewalls **115a,b** also include a plurality of openings **125**. In the illustrated embodiment, the openings **125** are elongated openings spaced about each sidewall **115a,b** and define a plurality of spokes **130** having free lower ends. Because the lower ends of the spokes **130** are not connected to each other, the spokes **130** are more flexible than if the lower ends were connected. In an alternative embodiment (not shown), the openings are cutouts, and the lower ends of the spokes are connected to each other. In another alternative embodiment (not shown), the openings are not spaced so as to define a plurality of spokes.

[0029] In the illustrated embodiment, each spoke **130** may be described as having a separate projection **120**. In other words, the first projection **120a** and the second projection **120b** may each be described as being a plurality of projections. Alternatively, the first and second projections **120a,b** in the illustrated embodiment may each be referred to as being a single, non-continuous projection.

[0030] The assembly **100** also includes a wheel **135**. The wheel **135** includes a first angled surface **140a** on a first side and a second angled surface **140b** on a second side. In the illustrated embodiment, the angled surfaces are tapers from a wide upper region to a narrow center region. A wheel with such a taper may be described as having a collet shape. In an alternative embodiment (not shown), the angled surface may define a groove in a wheel that otherwise has a substantially constant width.

[0031] The first angled surface **140a** of the wheel **135** interfaces with the angled surface of the first projection **120a** of the tire **105**. Likewise, the second angled surface **140b** interfaces with the angled surface of the second projection **120b** of the tire **105**. In the illustrated embodiment, the angled surfaces **140a,b** are smooth surfaces. In an alternative embodiment (not shown), each angled surface may include multiple surfaces at different angles. In another alternative embodiment (not shown), one or more rounded or curved surface may be employed instead of the angled surfaces. It should also be understood that the size and location of the angled surfaces may be varied.

[0032] In the illustrated embodiment, the shape of each angled surface **140a,b** of the wheel **135** corresponds to the shape of each projection **120a,b** of the tire **105**. In alternative embodiments, the surfaces may be different. For example, one of the surfaces may be curved, while the other is straight, or one of the surfaces may be smooth while the other includes multiple surfaces at multiple angles.

[0033] The assembly **100** also includes a plurality of fasteners **145**. In the illustrated embodiment, each fastener **145** is a rod having threaded ends. The rod extends through corresponding apertures in a pair of fastener rings **150**, in each of the sidewalls **115a,b**, and in the wheel **135**. Each end of the rod is secured by a threaded nut or cap. In an alternative embodiment (not shown), other fasteners such as screws or rivets may be employed. While the fasteners **145** are shown as passing entirely through both sidewalls **115a,b** and the wheel **135**, it should be understood that some or all of the fasteners may only pass through one sidewall and a portion of the wheel.

[0034] To assemble the tire **105** and the wheel **135** with the fasteners **145** and the fastener ring **150**, 10 to 200 pounds (40 to 800 Newtons) of force is applied by the fasteners **145** to secure the components together. However, it should be understood that any amount of force may be used. The fastener rings **150** aid in aligning the fasteners **145** and in equalizing the distribution of force exerted by the fasteners **145**.

[0035] When the fasteners **145** apply force to the fastener rings **150**, the fastener rings transfer the force to the sidewalls **115a,b**, which in turn transfer the force to the wheel **135** through the projections **120a,b**. The fasteners **145** apply a substantially axial force. However, because the projection **120a,b** engage the wheel **135** through angled interfaces, the force transferred by the projections **120a,b** includes both an axial and a radial component. In the illustrated embodiment, as the projections **120a,b** are moved inward, they push the angled surfaces **140a,b** of the wheel **135** upward. In other words, the projections **120a,b** apply a tensile force to the wheel **135**.

[0036] The assembly **100** further includes a tread profile shaper **155** disposed under the tread **100**. The tread profile shaper **155** includes a concave portion **160** extending from the first sidewall **115a** to the second sidewall **115b**. The tread profile shaper **155** also includes an upper portion **165** extending from the concave portion **160** and connected to the circumferential tread **110**. In the illustrated embodiment, the upper portion **165** of the tread profile shaper **155** directly contacts the tread **110**. In alternative embodiments (not shown) other components may be disposed between the tread and the tread profile shaper.

[0037] The sidewalls **115a,b** may provide a compressive force on the concave portion **160**, which in turn pushes the upper portion **165** upward against the tread **110**. The amount of force provided by the sidewalls **115a,b** and the size and shape of the tread profile shaper **155** may be selected to provide a desired footprint of the tread **110** as it engages the ground or other rolling surface. For example, it may be desirable to apply upward force at the center of the tread **110** to create a rounded footprint. In an alternative embodiment (not shown), the tread profile shaper may be omitted.

[0038] **Figures 3 and 4** provide a perspective view and cross-section, respectively, of an alternative embodiment of a tire and wheel assembly **200**. The assembly **200** is substantially similar to the assembly **100** shown in **Figures 1 and 2** and described above (including the alternative embodiments discussed), except for the difference described herein. Like reference numerals are used for like components.

[0039] The assembly **200** includes a tire **205** having a circumferential tread **110** and a pair of solid spaced apart sidewalls—including a first solid sidewall **210a** and a second solid sidewall **210b**—that extend downwardly from the circumferential tread **110**. The solid sidewalls **210a,b** may be constructed of the same materials described with respect to sidewalls **115a,b** of assembly **100**, but do not include openings or spokes.

[0040] Each of the solid sidewalls **210a,b** has an outer surface and an inner surface. A first projection **215a** extends inwardly from the inner surface of the first solid sidewall **210a**, and a second projection **215b** extends inwardly from the inner surface of the second solid sidewall **210b**. In the illustrated embodiment, the first projection **215a** is substantially symmetric to the second projection **215b**. In an alternative embodiment (not shown), the first projection and the second projection may have different shapes, sizes, or locations.

[0041] The first and second projections **215a,b** abut the angled surfaces **140a,b** of the wheel **135** and apply a tensile force to the wheel in the same manner as the projections **120a,b** of the tire **105** described above.

[0042] While the illustrated embodiments show tires having substantially symmetric sidewalls, it should be understood that each sidewall may have a different face. For example, one sidewall may be solid while the other has openings.

[0043] **Figures 5 and 6** provide a perspective view and cross-section, respectively, of another alternative embodiment of a tire and wheel assembly **300**. The assembly **300** includes a tire **305** having a circumferential tread **310** and a pair of spaced apart sidewalls—including a first sidewall **315a** and a second sidewall **315b**—that extend downwardly from the circumferential tread **110**. The

tread **310** and sidewalls **315a,b** may be constructed of the same materials as described above for the tread **110** and sidewalls **115a,b** of the tire **105** of **Figures 1 and 2**.

[0044] In the illustrated embodiment, the sidewalls **315a,b** are in direct contact with the tread **310**. In an alternative embodiment (not shown), other components or layers of materials may be disposed between the tread and the sidewalls or embedded in the tread. For example, reinforcement structures (such as those described above with respect to tire **105**) may be disposed between the tread and the sidewalls or embedded in the tread.

[0045] Each of the sidewalls **315a,b** has an outer surface and an inner surface. A first projection **320a** extends inwardly from the inner surface of the first sidewall **315a**, and a second projection **320b** extends inwardly from the inner surface of the second sidewall **315b**. In the illustrated embodiment, the first projection **320a** is substantially symmetric to the second projection **320b**. In an alternative embodiment (not shown), the first projection and the second projection may have different shapes, sizes, or locations.

[0046] Both the first and second projections **320a,b** have angled surfaces. In the illustrated embodiment, an upper end of each projection is longer than a lower end, and the angled surface of each projection extends smoothly from the upper end to the lower end. In an alternative embodiment (not shown), multiple angled portions may extend from the upper end to the lower end. In another alternative embodiment (not shown), one or more rounded or curved surface may extend from the upper end to the lower end.

[0047] The sidewalls **315a,b** also include a plurality of openings **325**. In the illustrated embodiment, the openings **325** are elongated openings spaced about each sidewall **315a,b** and define a plurality of spokes **330** having free lower ends. Because the lower ends of the spokes **330** are not connected to each other, the spokes **330** are more flexible than if the lower ends were connected. In an alternative embodiment (not shown), the openings are cutouts, and the lower ends of the spokes are connected to each other. In another alternative embodiment (not shown), the openings are not spaced so as to define a plurality of spokes.

[0048] In the illustrated embodiment, each spoke **330** may be described as having a separate projection **320**. In other words, the first projection **320a** and the second projection **320b** may each be described as being a plurality of projections. Alternatively, the first and second projections **120a,b** in the illustrated embodiment may each be referred to as being a single, non-continuous projection.

[0049] The assembly **300** also includes a wheel **335**. The wheel **335** includes a first angled surface **340a** on a first side and a second angled surface **340b** on a second side. In the illustrated embodiment, the angled surfaces are chamfers about the circumference on each side of the wheel **335**. In an alternative embodiment (not shown), the angled surface may define a groove in a wheel.

[0050] The first angled surface **340a** of the wheel **335** abuts the angled surface of the first projection **320a** of the tire **305**. Likewise, the second angled surface **340b** abuts the angled surface of the second projection **320b** of the tire **305**. In the illustrated embodiment, the angled surfaces **340a,b** are smooth surfaces. In an alternative embodiment (not shown), each angled surface may include multiple surfaces at different angles. In another alternative embodiment (not shown), one or more rounded or curved surface may be employed instead of the angled surfaces. It should also be understood that the size and location of the angled surfaces may be varied.

[0051] In the illustrated embodiment, the shape of each angled surface **340a,b** of the wheel **335** corresponds to the shape of each projection **320a,b** of the tire **305**. In alternative embodiments, the surfaces may be different. For example, one of the surfaces may be curved, while the other is straight, or one of the surfaces may be smooth while the other includes multiple surfaces at multiple angles.

[0052] The assembly **300** also includes a plurality of fasteners **345**. In the illustrated embodiment, each fastener **345** is a rod having threaded ends. The rod extends through corresponding apertures in a pair of fastener rings **350**, in each of the sidewalls **315a,b**, and in the wheel **335**. Each end of the rod is secured by a threaded nut or cap. In an alternative embodiment (not shown), other fasteners such as screws or rivets may be employed. While the fasteners **345** are shown as passing entirely through both sidewalls **315a,b** and the wheel **335**, it should be

understood that some or all of the fasteners may only pass through one sidewall and a portion of the wheel.

[0053] To assemble the tire **305** and the wheel **335** with the fasteners **345** and the fastener ring **350**, 10 to 20 pounds (40 to 80 Newtons) of force is applied by the fasteners **345** to secure the components together. However, it should be understood that any amount of force may be used. The fastener rings **350** aid in aligning the fasteners **345** and in equalizing the distribution of force exerted by the fasteners **345**.

[0054] When the fasteners **345** apply force to the fastener rings **350**, the fastener rings transfer the force to the sidewalls **315a,b**, which in turn transfer the force to the wheel **335** through the projections **320a,b**. The fasteners **345** apply a substantially axial force. However, because the projection **320a,b** engages the wheel **335** through angled interfaces, the force transferred by the projections **320a,b** includes both an axial and a radial component. In the illustrated embodiment, as the projections **320a,b** are moved inward, they push the angled surfaces **340a,b** of the wheel **335** downward. In other words, the projections **320a,b** apply a compression force to the wheel **335**.

[0055] The assembly **300** further includes a tread profile shaper **355** disposed under the tread **300**. The tread profile shaper **355** is substantially the same as the tread profile shaper **155** of assembly **100** shown in **Figures 1** and **2**, including the alternative embodiments discussed above.

[0056] **Figures 7** and **8** provide a perspective view and cross-section, respectively, of an alternative embodiment of a tire and wheel assembly **400**. The assembly **400** is substantially similar to the assembly **300** shown in **Figures 5** and **6** and described above (including the alternative embodiments discussed), except for the difference described herein. Like reference numerals are used for like components.

[0057] The assembly **400** includes a tire **405** having a circumferential tread **310** and a pair of solid spaced apart sidewalls—including a first solid sidewall **410a** and a second solid sidewall **410b**—that extend downwardly from the circumferential tread **310**. The solid sidewalls **410a,b** may be constructed of the

same materials described with respect to sidewalls **315a,b** of assembly **300**, but do not include openings or spokes.

[0058] Each of the solid sidewalls **410a,b** has an outer surface and an inner surface. A first projection **415a** extends inwardly from the inner surface of the first solid sidewall **410a**, and a second projection **415b** extends inwardly from the inner surface of the second solid sidewall **410b**. In the illustrated embodiment, the first projection **415a** is substantially symmetric to the second projection **415b**. In an alternative embodiment (not shown), the first projection and the second projection may have different shapes, sizes, or locations.

[0059] The first and second projections **415a,b** abut the angled surfaces **340a,b** of the wheel **335** and apply a tensile force to the wheel in the same manner as the projections **320a,b** of the tire **305** described above.

[0060] While the illustrated embodiments show tires having substantially symmetric sidewalls, it should be understood that each sidewall may have a different face. For example, one sidewall may be solid while the other has openings.

[0061] To the extent that the term “includes” or “including” is used in the specification or the claims, it is intended to be inclusive in a manner similar to the term “comprising” as that term is interpreted when employed as a transitional word in a claim. Furthermore, to the extent that the term “or” is employed (e.g., A or B) it is intended to mean “A or B or both.” When the applicants intend to indicate “only A or B but not both” then the term “only A or B but not both” will be employed. Thus, use of the term “or” herein is the inclusive, and not the exclusive use. See, Bryan A. Garner, A Dictionary of Modern Legal Usage 624 (2d. Ed. 1995). Also, to the extent that the terms “in” or “into” are used in the specification or the claims, it is intended to additionally mean “on” or “onto.” Furthermore, to the extent the term “connect” is used in the specification or claims, it is intended to mean not only “directly connected to,” but also “indirectly connected to” such as connected through another component or components.

[0062] While the present application has been illustrated by the description of embodiments thereof, and while the embodiments have been described in

considerable detail, it is not the intention of the applicants to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Therefore, the application, in its broader aspects, is not limited to the specific details, the representative apparatus and method, and illustrative examples shown and described. Accordingly, departures may be made from such details without departing from the spirit or scope of the applicant's general inventive concept.



CLAIMS


What is claimed is:

1. A non-pneumatic tire and wheel assembly comprising:
 - a non-pneumatic tire including:
 - a circumferential tread, and
 - a pair of spaced apart sidewalls extending downwardly from the circumferential tread, each of the sidewalls having an outer surface, an inner surface, and a projection extending inwardly from the inner surface, wherein the projection has an angled surface;
 - a wheel having a pair of sides, each side including an angled surface abutting the angled surface of the projection of a corresponding sidewall; and
 - a plurality of fasteners, each fastener extending through at least one sidewall and at least a portion of the wheel.
2. The non-pneumatic tire and wheel assembly of claim 1, wherein a lower end of each projection is longer than an upper end, and the angled surface of each projection extends smoothly from the lower end to the upper end.
3. The non-pneumatic tire and wheel assembly of claim 2, wherein each projection exerts an upward, tensile force on the wheel.
4. The non-pneumatic tire and wheel assembly of claim 1, wherein an upper end of each projection is longer than a lower end, and the angled surface of each projection extends smoothly from the upper end to the lower end.
5. The non-pneumatic tire and wheel assembly of claim 4, wherein each projection exerts a downward, compressive force on the wheel.


6. The non-pneumatic tire and wheel assembly of claim 1, wherein each of the plurality of fasteners extends through both of the spaced apart sidewalls.
7. The non-pneumatic tire and wheel assembly of claim 1, further comprising a pair of fastener rings, wherein each fastener ring is connected to an outer surface of a sidewall, and wherein each fastener ring receives at least some of the plurality of fasteners.
8. The non-pneumatic tire and wheel assembly of claim 1, further comprising a tread profile shaper disposed below the circumferential tread.
9. A method of mounting a tire on a wheel comprising:
 - providing a tire having:
 - a first sidewall with a first outer surface and a first inner surface,
 - a first projection extending inwardly from the first inner surface, the first projection having a first angled surface,
 - a second sidewall having a second outer surface and a second inner surface, and
 - a second projection extending inwardly from the second inner surface, the second projection having a second angled surface;
 - providing a wheel having a pair of sides, each side including an angled surface;
 - mounting the tire on the wheel such that the first and second projections of the tire abut the angled surfaces of the wheel; and
 - inserting a plurality of fasteners through at least one sidewall and at least a portion of the wheel.
10. The method of claim 9, wherein the first sidewall and the second sidewall are solid sidewalls.

11. The method of claim 9, wherein the first sidewall includes a first plurality of openings that define a first plurality of spokes.
12. The method of claim 11, wherein the first projection includes a first plurality of projections extending inwardly from inner surfaces of the first plurality of spokes.
13. The method of claim 12, wherein the second sidewall includes a second plurality of openings that define a second plurality of spokes, and wherein the second projection includes a second plurality of projections extending inwardly from inner surfaces of the second plurality of spokes.
14. The method of claim 9, wherein the mounting the tire on the wheel includes applying a compressive radial force on the tire.
15. The method of claim 9, wherein the mounting the tire on the wheel includes applying a tensile radial force on the tire.

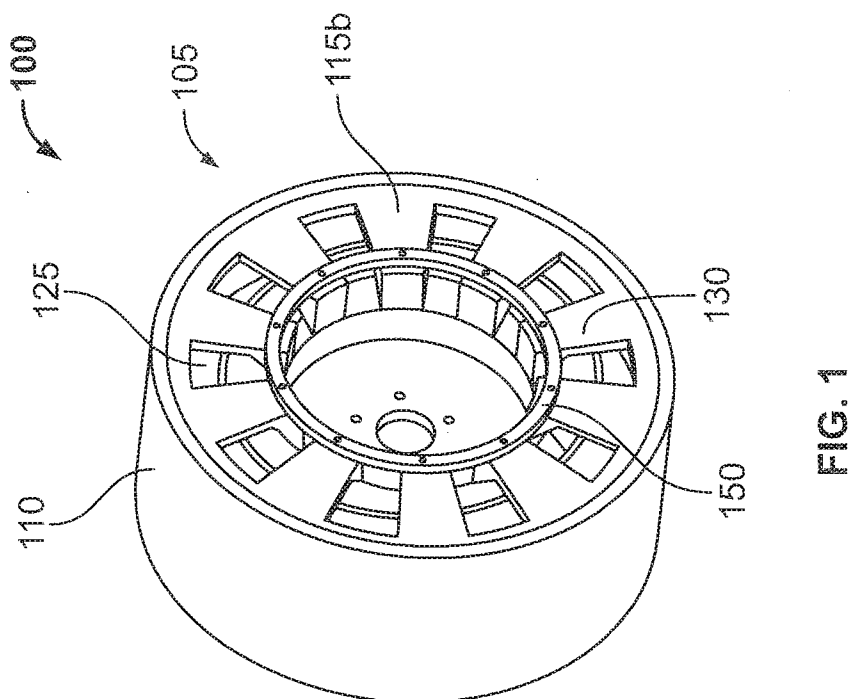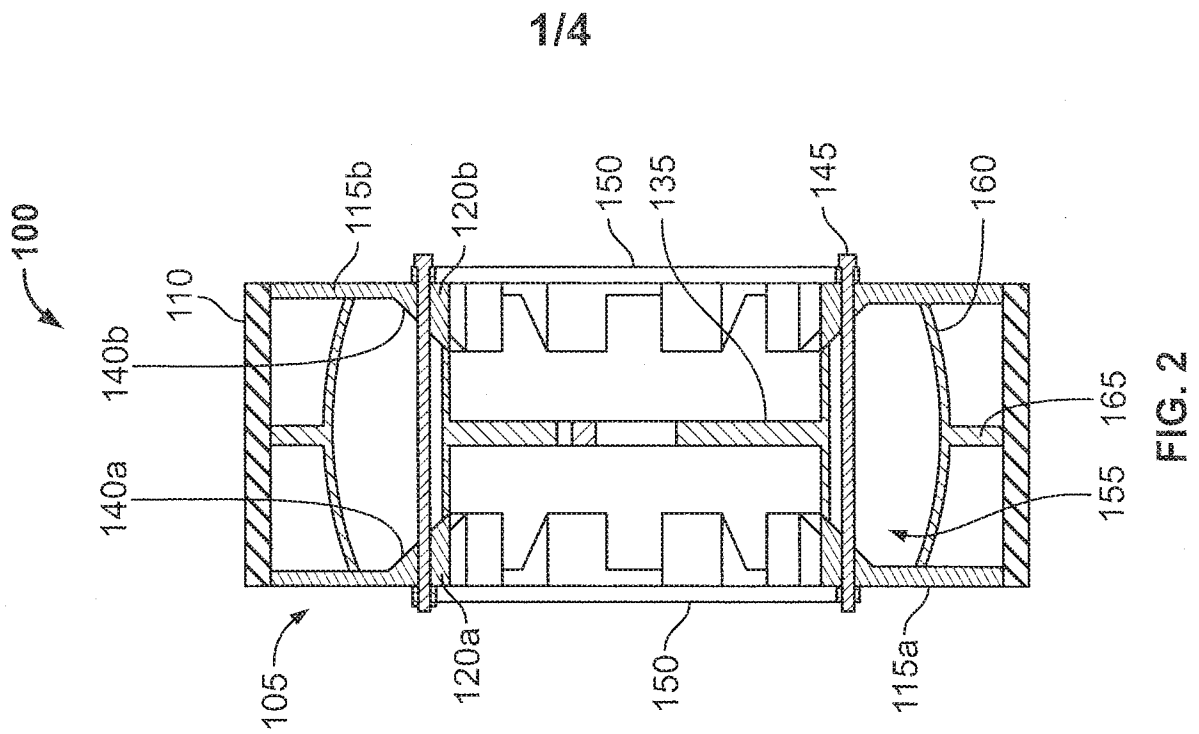

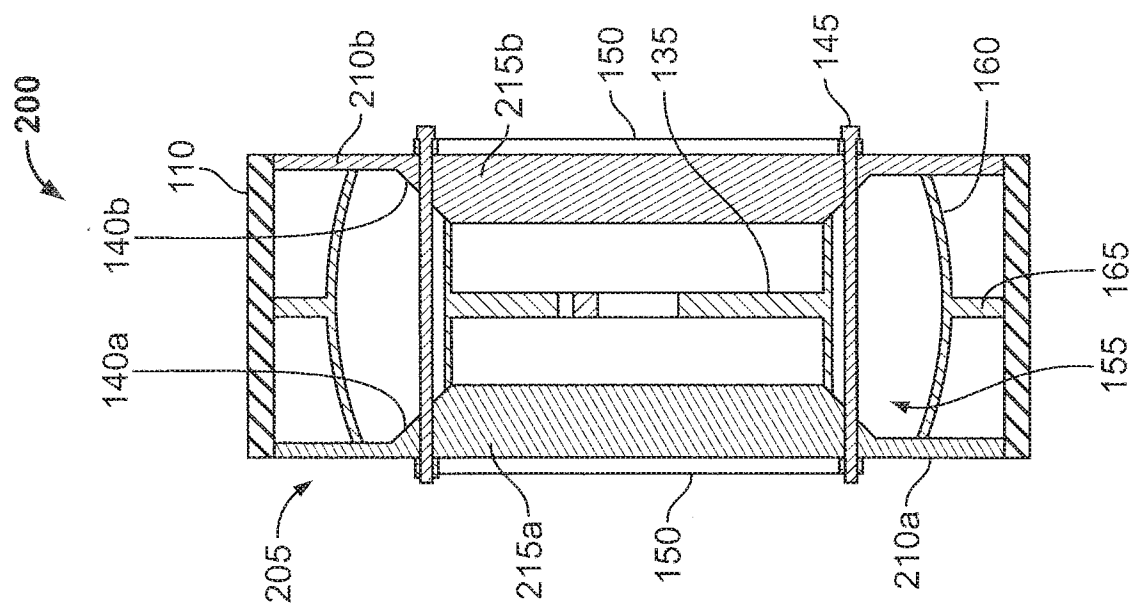

 NATIONAL SCIENCE FOUNDATION

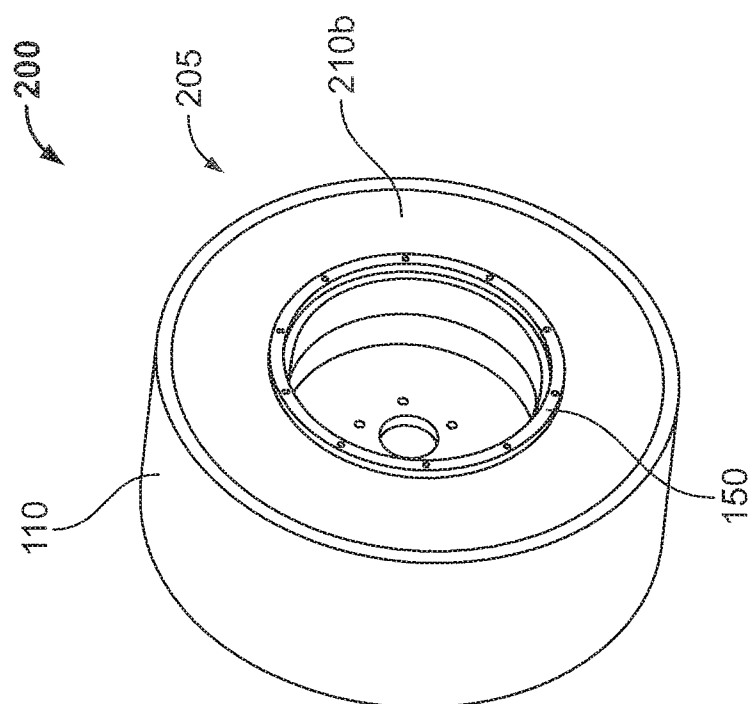

3
G
0000
LL



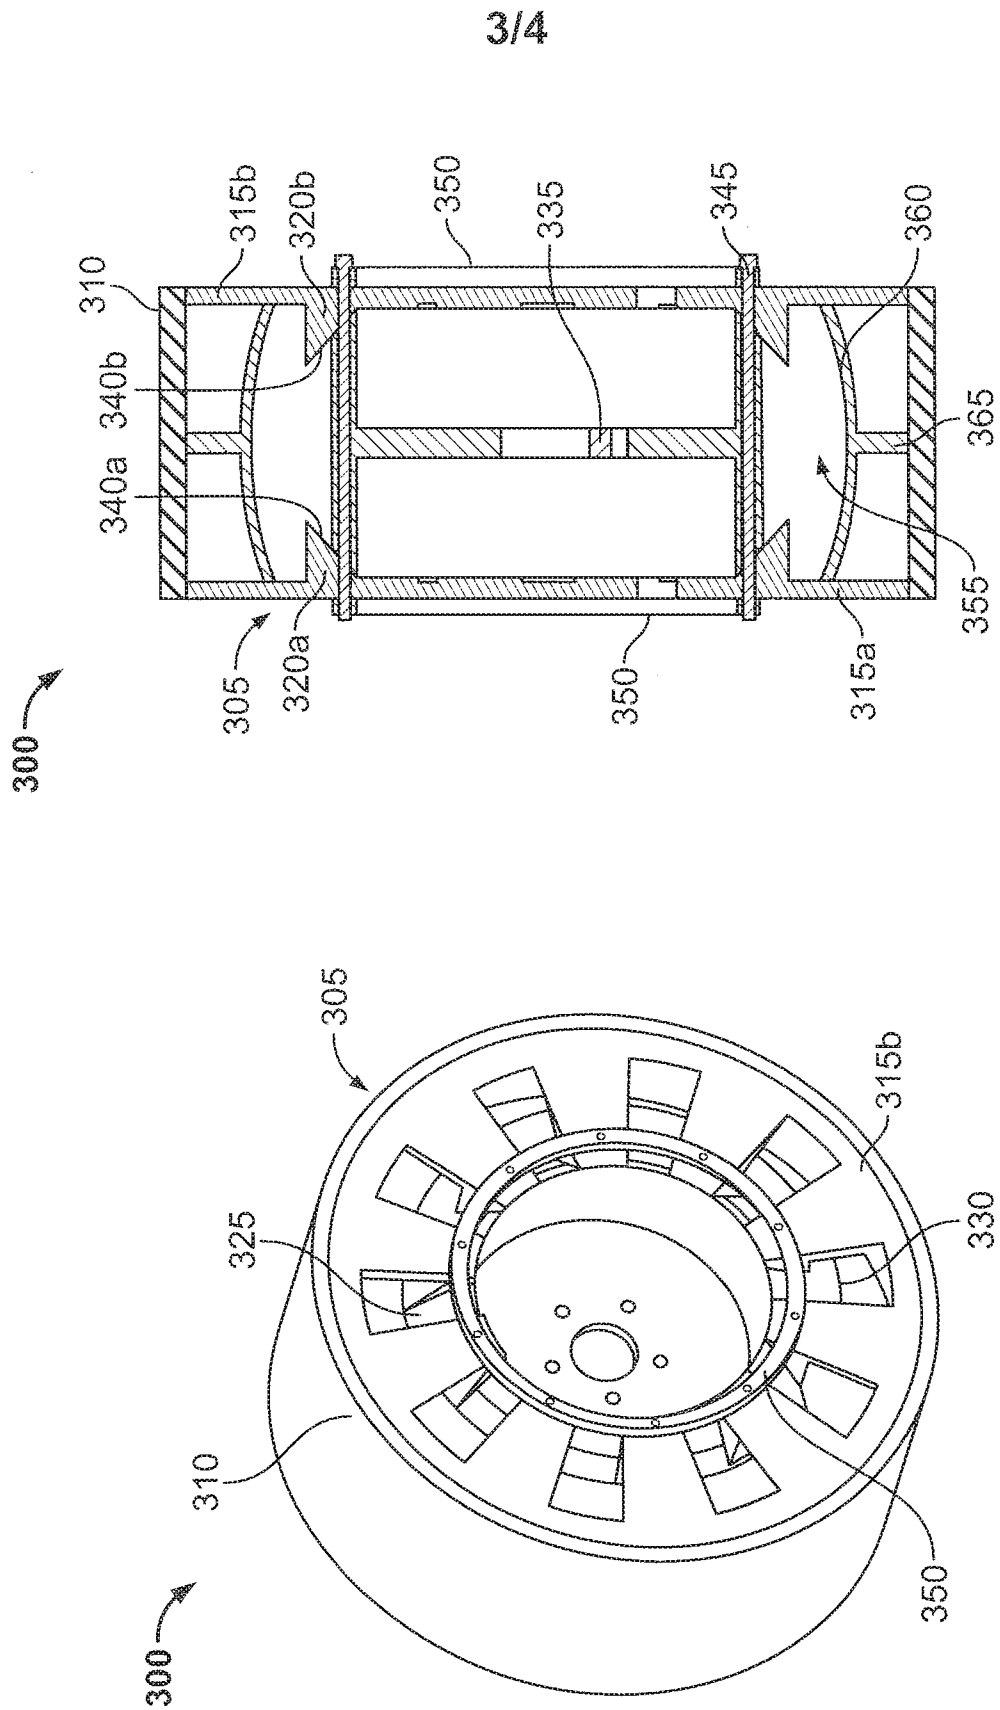


FIG. 6

FIG. 5

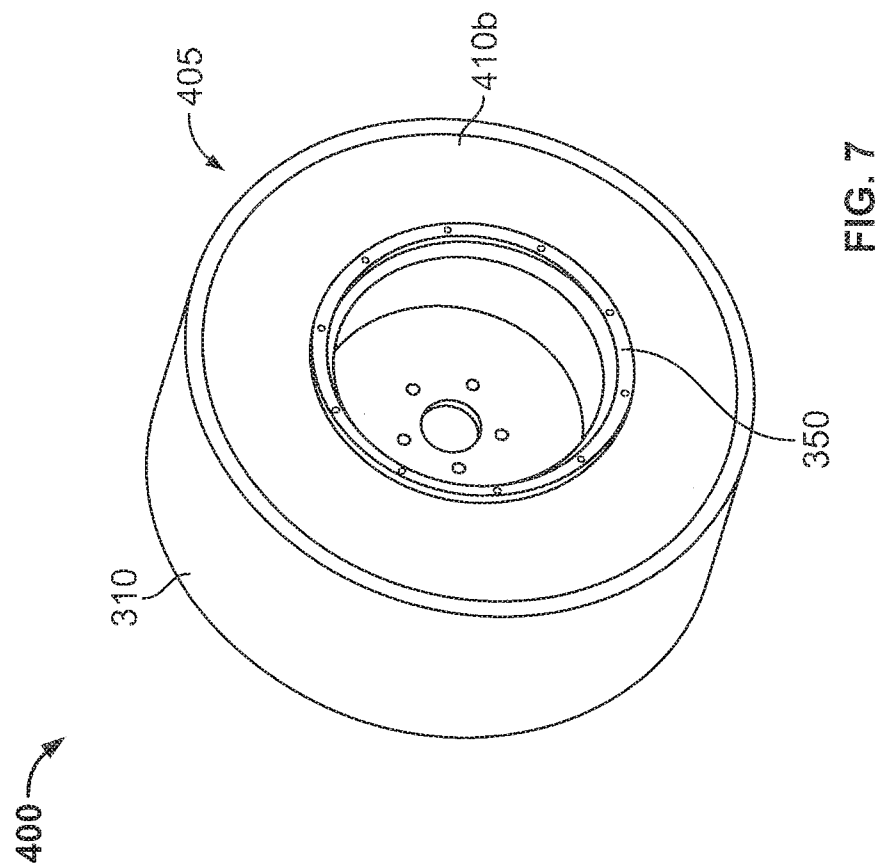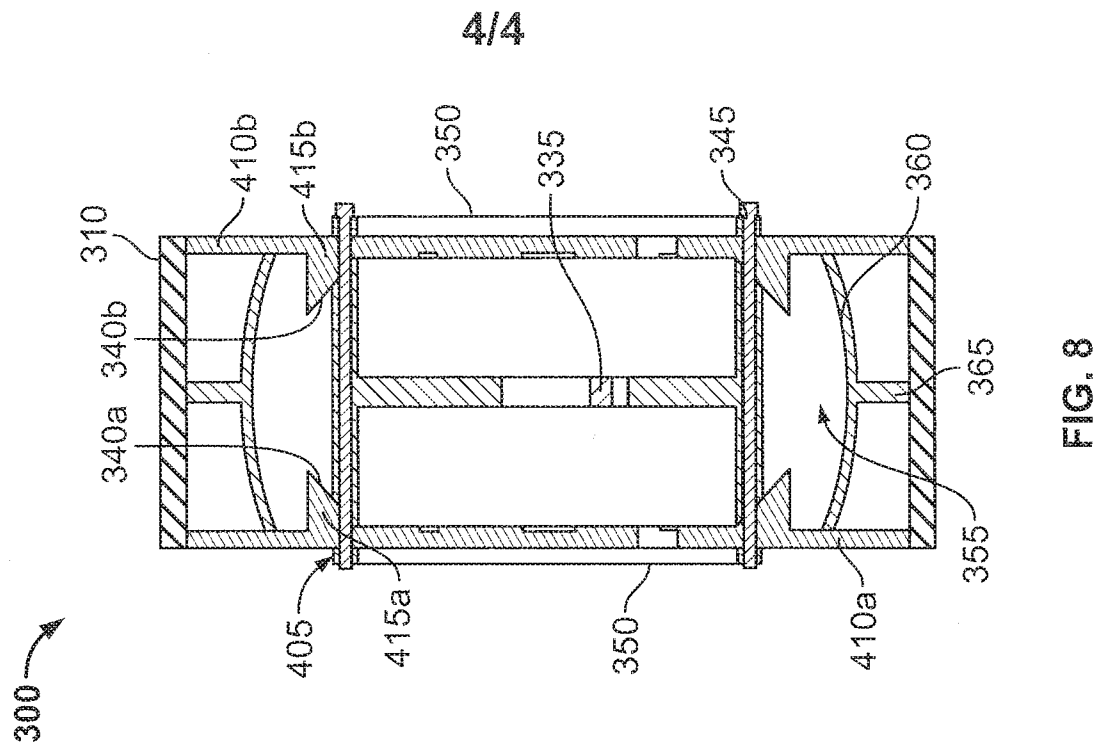

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/064507**A. CLASSIFICATION OF SUBJECT MATTER****B60C 7/00(2006.01)i, B60C 13/00(2006.01)i, B60C 13/02(2006.01)i, B60B 3/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B60C 7/00; B21D 53/26; B29D 30/02; B60C 17/04; B60B 33/02; B60B 21/02; B60C 19/00; B60C 13/00; B60C 13/02; B60B 3/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: non-pneumatic tire, sidewall, rim, angled surface, and bolt

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2012-0217790 A1 (GARDETTO, WILLIAM W.) 30 August 2012 See paragraphs [0029]-[0033], [0057], [0058] and figures 3-5, 10A, 10B.	1-15
Y	US 5494090 A (KEJHA, JOSEPH B.) 27 February 1996 See column 3, line 66 - column 4, line 21 and figure 9.	1-15
Y	US 2011-0240193 A1 (MATSUDA et al.) 06 October 2011 See abstract and figure 1A.	11-13
A	KR 10-2013-0128138 A (MYUNGKWANG INDUSTRY CO., LTD.) 26 November 2013 See paragraphs [0022]-[0024] and figure 2.	1-15
A	US 4170254 A (JACKSON, WILLIAM L.) 09 October 1979 See column 4, line 62 - column 5, line 5 and figure 9.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 March 2016 (15.03.2016)

Date of mailing of the international search report

28 March 2016 (28.03.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

BAE, Geun Tae

Telephone No. +82-42-481-3547



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/064507

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0217790 A1	30/08/2012	US 2010-0116397 A1 US 8196629 B2	13/05/2010 12/06/2012
US 5494090 A	27/02/1996	US 5685926 A	11/11/1997
US 2011-0240193 A1	06/10/2011	AT 546300 T CN 101657333 A CN 101657333 B EP 2141030 A1 EP 2141030 A4 EP 2141030 B1 WO 2008-136099 A1	15/03/2012 24/02/2010 30/11/2011 06/01/2010 29/12/2010 22/02/2012 13/11/2008
KR 10-2013-0128138 A	26/11/2013	None	
US 4170254 A	09/10/1979	JP 51-050107 A JP 57-039963 B2	01/05/1976 24/08/1982