



(51) International Patent Classification:

H04M 1/02 (2006.01) *G06F 1/16* (2006.01)

(21) International Application Number:

PCT/CN2017/097566

(22) International Filing Date:

15 August 2017 (15.08.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201621044640.3 08 September 2016 (08.09.2016) CN
201610812276.9 08 September 2016 (08.09.2016) CN

(71) Applicant: **GUANGDONG OPPO MOBILE
TELECOMMUNICATIONS CORP., LTD.** [CN/CN];

No. 18, Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523860 (CN).

(72) Inventors: **LI, Jing**; No. 18, Haibin Road, Wusha,
Chang'an, Dongguan, Guangdong 523860 (CN). **Ji, Bin**;

No. 18, Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523860 (CN). **YUAN, Yucui**; No. 18, Haibin Road,
Wusha, Chang'an, Dongguan, Guangdong 523860 (CN).

(74) Agent: **TSINGYIHUA INTELLECTUAL PROPERTY**

LLC; Room 301 Trade Building, Zhaolanyuan, Tsinghua
University, Qinghuayuan, 100084 (CN).

(81) Designated States (*unless otherwise indicated, for every*

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every*

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: SHELL, METHOD FOR MANUFACTURING THE SAME AND MOBILE TERMINAL HAVING THE SAME

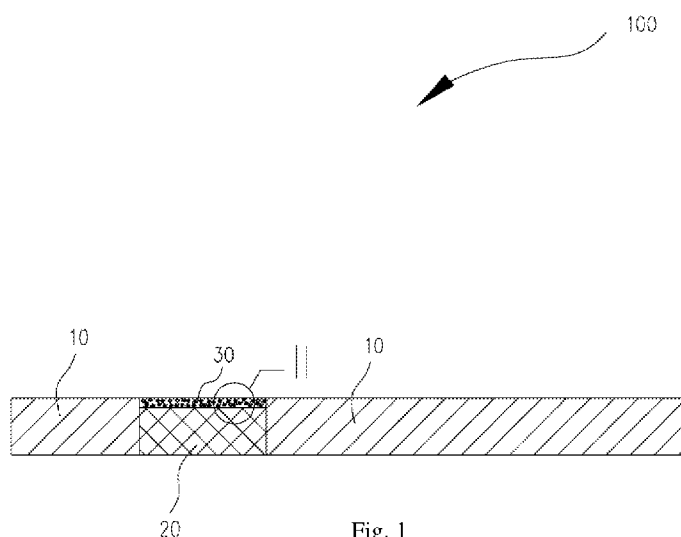


Fig. 1

(57) Abstract: A shell (100) is provided. The shell (100) includes a metallic body (10), a non-metallic layer (20) and a coating layer (30). The metallic body (10) has a first part and a second part separated from the first part. The non-metallic layer (20) is configured to connect the first part and the second part of the metallic body (10), and the coating layer (30) is on an outer surface of the non-metallic layer, and has a consistent appearance with the metallic body (10). A method for manufacturing the shell (100) and the mobile terminal (200) including the shell (100) are also provided.

Published:

— *with international search report (Art. 21(3))*

DESCRIPTION

SHELL, METHOD FOR MANUFACTURING THE SAME AND MOBILE TERMINAL HAVING THE SAME

5 FIELD

The present disclosure relates to the technology field of communication, and more particularly to a shell, a method for manufacturing the shell and a mobile terminal having the shell.

BACKGROUND

10 With the widespread application of a metallic shell of a mobile phone, the requirement on the appearance of the shell is improved increasingly, and integrity of the appearance of the shell is preferred by more people. However, most of the current mobile phones are limited by the communication function or limited by the processing technology, resulting in the existences of both a metallic portion and a non-metallic portion in the shell. The non-metallic portion is made of
15 a material different from that of the metallic portion, and thus has a different appearance from the metallic portion, resulting in a less preferred integral appearance of the shell of the mobile phone and an unsatisfied user experience.

SUMMARY

20 In embodiments of the present disclosure, a shell and a mobile terminal are provided which may improve the experience of the user.

In an embodiment of the present disclosure, a shell for a terminal is provided. The shell includes a metallic body, a non-metallic layer and a coating layer. The metallic body has a first part and a second part separated from the first part. The non-metallic layer is configured to connect
25 the first part and the second part of the metallic body. The coating layer is on an outer surface of the non-metallic layer, and has a consistent appearance with the metallic body.

In an embodiment of the present disclosure, the coating layer includes ink including metal particles and pigments.

In an embodiment of the present disclosure, the metal particle comprises at least one of
30 aluminum, silver, iron, titanium, and an alloy thereof.

In an embodiment of the present disclosure, the shell further includes a protective layer on the outer surface of the coating layer.

In an embodiment of the present disclosure, the protective layer includes resist sandblasting ink.

5 In an embodiment of the present disclosure, the ink in the coating layer is exposure ink and the protective layer includes exposure ink.

In an embodiment of the present disclosure, an outer surface of the protective layer is a matte finish.

10 In an embodiment of the present disclosure, a plurality of the coating layers or/and a plurality of the protective layers are laminated on the non-metallic layer.

In an embodiment of the present disclosure, the non-metallic layer is configured to form a clearance region for an antenna.

In an embodiment of the present disclosure, the non-metallic layer includes a non-signal-shielding material.

15 In an embodiment of the present disclosure, the non-metallic layer includes plastics, carbon fiber, an organic resin or glass fiber.

In an embodiment of the present disclosure, an anodic oxidation layer is on an outer surface of the metallic body, and has a consistent appearance with the coating layer.

20 In an embodiment of the present disclosure, an outer surface of the anodic oxidation layer is a sandblasted surface.

In an embodiment of the present disclosure, the anodic oxidation layer is formed integrally with the metallic body.

25 In an embodiment of the present disclosure, the metallic body includes a material selected from aluminum, silver, stainless steel, aluminium alloy, titanium alloy, magnesium alloy and magnalium alloy.

In an embodiment of the present disclosure, the non-metallic layer and the metallic body are formed integrally.

30 In an embodiment of the present disclosure, the non-metallic layer is formed as at least one ultra-fine strap of the shell, the at least one ultra-fine strap has a plurality of slots spaced apart from each other, the metallic body includes at least two metal plates and a plurality of metal straps separated by the plurality of slots.

In an embodiment of the present disclosure, a width of the slot is in a range of 0.2 mm to 3.0 mm.

In an embodiment of the present disclosure, the shell includes a back cover and a frame integrally formed with the back cover and formed at a bent peripheral edge of the back cover.

5 In an embodiment of the present disclosure, a method for manufacturing a shell for a terminal is provided. The method includes:

providing a workpiece including a metallic body and a non-metallic layer;

providing a coating layer on an outer surface of the non-metallic layer, the coating layer having a consistent appearance with the metallic body.

10 In an embodiment of the present disclosure, the non-metallic layer is formed integrally with the metallic body by a nano-injection process.

In an embodiment of the present disclosure, before providing the coating layer on the outer surface of the non-metallic layer, the workpiece is subjected to a surface treatment after formed by milling to smooth the workpiece.

15 In an embodiment of the present disclosure, the coating layer includes ink including metal particles and pigments.

In an embodiment of the present disclosure, the method further includes: providing a protective layer on an outer surface of the coating layer.

20 In an embodiment of the present disclosure, providing a coating layer on an outer surface of the non-metallic layer and providing a protective layer on an outer surface of the coating layer include:

applying colouring ink and protecting ink on an outer surface of the workpiece sequentially, corroding and removing the colouring ink and protecting ink on the metallic body by a process of exposure and development, and

25 forming the coating layer from the colouring ink on the non-metallic layer and the protective layer from the protecting ink on the non-metallic layer.

In an embodiment of the present disclosure, applying colouring ink and protecting ink on an outer surface of the workpiece sequentially includes:

30 heating the colouring ink at a predetermined temperature for a predetermined duration and applying the protecting ink on the colouring ink.

In an embodiment of the present disclosure, forming the coating layer from the colouring ink on the non-metallic layer and the protective layer from the protecting ink on the non-metallic layer includes solidifying the colouring ink and the protecting ink on the non-metallic layer.

In an embodiment of the present disclosure, the method further includes:

- 5 subjecting an outer surface of the metallic body to a surface treatment to form an anodic oxidation layer on the outer surface of the metallic body.

In an embodiment of the present disclosure, the method further includes:

subjecting the anodic oxidation layer to a sandblasting process.

- 10 In an embodiment of the present disclosure, a mobile terminal is provided. The mobile terminal includes a shell described above, a mainboard fixed in the shell, and a functional component disposed on the mainboard.

- 15 With the shell, the method for manufacturing the shell and the mobile terminal including the shell according to embodiments of the present disclosure, the coating layer is on the outer surface of the non-metallic layer and has a consistent appearance with the metallic body, and thus the overall shell has a consistent appearance and the user experience is improved.

BRIEF DESCRIPTION OF THE DRAWINGS

- 20 These and other aspects and advantages of the disclosure will become apparent and more readily appreciated from the following descriptions taken in conjunction with the drawings as described below.

Fig. 1 is a schematic view of a shell for a terminal according to an embodiment of the present disclosure.

Fig. 2 is a schematic enlarged view of part II of the shell in Fig. 1.

Fig. 3 is a schematic view of the shell in Fig. 1.

- 25 Fig. 4 is a schematic view showing the manufacture of a shell for a terminal according to an embodiment of the present disclosure.

Fig. 5 is a schematic view showing the manufacture of a shell for a terminal according to an embodiment of the present disclosure.

- 30 Fig. 6 is a schematic view showing the manufacture of a shell for a terminal according to an embodiment of the present disclosure.

Fig. 7 is a schematic view showing the manufacture of a shell for a terminal according to an embodiment of the present disclosure.

Fig. 8 is a schematic view of a shell for a terminal according to an embodiment of the present disclosure.

5 Fig. 9 is a top view of the shell in Fig. 8.

Fig. 10 is a schematic view of a shell for a terminal according to an embodiment of the present disclosure.

Fig. 11 is a block diagram of a method for manufacturing a shell for a terminal according to an embodiment of the present disclosure.

10 Fig. 12 is a schematic view showing the manufacture of a shell for a terminal according to an embodiment of the present disclosure.

Fig. 13 is a schematic view of a mobile terminal according to an embodiment of the present disclosure.

15 DETAILED DESCRIPTION

Embodiments of the present disclosure will be described in detail in the following descriptions, examples of which are shown in the accompanying drawings, in which the same or similar elements and elements having same or similar functions are denoted by like reference numerals throughout the descriptions. The embodiments described herein with reference to the accompanying drawings are explanatory and illustrative, which are used to generally understand
20 the present disclosure. The embodiments shall not be construed to limit the present disclosure. In addition, for ease of description, the accompanying drawings only show components related to the present disclosure, not all the structure.

As shown in Fig. 1 and Fig. 2, a shell 100 for a terminal is provided according to an
25 embodiment of the present disclosure. The shell 100 includes a metallic body 10 having a first part and a second part separated from the first part, a non-metallic layer 20 configured to connect the first part and the second part of the metallic body 10, and a coating layer 30 on an outer surface of the non-metallic layer 20 and having a consistent appearance with the metallic body 10. It will be appreciated that, the shell 100 may be a shell of a mobile terminal 200, such as a mobile phone, a
30 tablet computer, a notebook computer and the like.

As the coating layer 30 is on the outer surface of the non-metallic layer 20 and has a consistent appearance with the metallic body 10, the integral appearance of shell 100 is consistent and thus the user experience is improved.

In an embodiment of the present disclosure, the shell 100 is plate-like. The non-metallic layer 20 is fixed at an end of the metallic body 10. The non-metallic layer 20 may be distributed in the shell 100 in a predetermined shape. Specifically, as shown in Fig. 1, the non-metallic layer 20 may be formed in an integral slot of the shell 100, and the metallic body 10 is formed as two metallic parts spaced apart from each other by the non-metallic layer 20. The metallic body 10 may be formed by cutting an integral metallic plate into two metallic parts. The non-metallic layer 20 may be fixed between the two metallic parts by injecting or bonding process. In order to improve the integral metallic texture of the shell 100, an area of the non-metallic layer 20 is less than that of the metallic body 10. Alternatively, in other embodiments, the area of the non-metallic layer 20 may be the same as that of the metallic body 10, or bigger than that of the metallic body 10. The non-metallic layer 20 may also be distributed in the shell 100 in a shape of a circle, a triangle or a random curve.

In an embodiment of the present disclosure, the coating layer 30 includes a mixture. The coating layer 30 is uniformly laid on the outer surface, facing to a user, of the non-metallic layer 20. An orthographical projection of the coating layer 30 on the non-metallic layer 20 coincides with the outer surface of the non-metallic layer 20, and thus the coating layer 30 perfectly covers the non-metallic layer 20, i.e., the non-metallic layer 20 is concealed under the coating layer 30. By covering the non-metallic layer 20 perfectly with the coating layer 30, only the metallic body 10 and the coating layer 30 can be observed by the user. As the coating layer 30 has a consistent appearance with the metallic body 10, the overall shell 100 has a consistent appearance and thus the user experience is improved. It will be appreciated that, the expression that “the coating layer 30 has a consistent appearance with the metallic body 10” means that the colour appearance of the coating layer 30 directly observed by a user is substantially the same as or the same as the colour appearance of the metallic body 10 facing to the user, i.e., the coating layer 30 has substantially the same or the same visual colour as the metallic body 10. Alternatively, in another embodiment of the present disclosure, the area covered by the coating layer 30 may bigger than the area of the outer surface of the non-metallic layer 20.

In a further embodiment of the present disclosure, the coating layer 30 includes ink 33 containing metal particles 31 and pigments 32. In an embodiment of the present disclosure, metal particles 31 are mixed in the ink 33, and thus the coating layer 30 has substantially the same metallic appearance as the metallic body 10. Furthermore, the pigments 32 are mixed in the ink 33, and thus the integral colour of the coating layer 30 is improved. Therefore, the coating layer 30 has the consistent appearance colour with the metallic body 10. The ink 33 present in the coating layer 30 as a major component facilitates formation of the coating layer 30 on the non-metallic layer 20, that is, the area covered by the coating layer 30 may be controlled precisely, thus improving the appearance of the shell 100. It should be appreciated that the coating layer 30 may be formed on the non-metallic layer 20 by a spraying process, a screen printing process or an exposure and development process. The metal particles 31 and the pigments 32 may be mixed into the ink 33 with a predetermined ratio. The metal particle 31 may be at least one of aluminum, silver, iron, titanium, magnesium, and any alloy thereof. For example, the metal particles 31 may be aluminum powders, silver powders, titanium powders, aluminum alloy powders, titanium alloy powders, magnalium alloy powders, or titanium magnesium alloy powders. In an embodiment of the present disclosure, the metal particles 31 may be stainless steel particles.

In a further embodiment of the present disclosure, as shown in Fig. 3, a protective layer 40 is on the outer surface of the coating layer 30.

In such an embodiment, the protective layer 40 includes ink and is transparent, and thus the colour of the coating layer 30 is able to be observed through the protective layer 40, thereby preventing the protective layer 40 from affecting the appearance of the coating layer 30, i.e., guaranteeing the integral appearance of the shell 100. The protective layer 40 has a high surface tension, thus exhibiting good performances such as abrasion resistance, corrosion resistance and exfoliation resistance. In the shell 100, the coating layer 30 and the protective layer 40 are provided on the non-metallic layer 20. An orthographical projection of the protective layer 40 on the coating layer 30 coincides with the coating layer 30, and thus the protective layer 40 may be arranged on the coating layer 30 precisely, so as to guarantee the functions of the appearance of the shell 100, prevent the coating layer 30 from being scratched, peeled off or corroded, and reduce the cost. In other embodiments of the present disclosure, a plurality of the coating layers 30 or/and a plurality of the protective layers 40 are laminated on the non-metallic layer 20, and thus

the colour corresponding to the non-metallic layer 20 of the shell 100 is purer and a protection of the appearance is more improved.

In an embodiment of the present disclosure, the protective layer 40 includes resist sandblasting ink.

5 In this embodiment, in order to guarantee the integral flatness of the shell 100 and allow the surface of the shell 100 to obtain a certain degree of cleanliness and different roughness, an outer surface of the metallic body 10 is subjected to sandblasting, thus improving mechanical performances, including fatigue resistance, of the outer surface of the shell 100. If the protective layer 40 is on the coating layer 30 before subjecting the metallic body 10 to the sandblasting, the
10 ink of the protective layer 40 may be the resist sandblasting ink, thereby avoiding the protective layer 40 to be damaged when the metallic body 10 is subjected to sandblasting, and thus avoiding the appearance and structure of the shell 100 to be affected. Alternatively, in other embodiments of the present disclosure, the coating layer 30 may also include the ink with sandblasting resistance, thus further improving the appearance and structure of the shell 100.

15 In an embodiment of the present disclosure, the ink used both in the coating layer 30 and the protective layer 40 is exposure ink. In the present embodiment, the coating layer 30 and the protective layer 40 are formed on the non-metallic layer 20 by a process of exposure and development. Specifically, firstly, as shown in Fig. 4, a layer of colouring ink 30a is on outer surfaces of the metallic body 10 and the non-metallic layer 20, and the colouring ink 30a is heated
20 at 70 °C for 20 min. Secondly, protecting ink 40a is on the heated colouring ink 30a, as shown in Fig. 5. Thirdly, as shown in Fig. 6, a film 40b, including a preset exposure area 40c coinciding with the non-metallic layer 20, is attached to the protecting ink 40a, when the film 40b is irradiated by a light source 40d, parts of the protecting ink 40a and the colouring ink 30a corresponding to the exposure area 40c are photopolymerized, however, parts of the protecting ink 40a and the
25 colouring ink 30a corresponding to the metallic body 10 are not reacted. Fourthly, as shown in Fig. 7, unreacted protecting ink 40a and unreacted colouring ink 30a are corroded with an alkali liquor, remaining the protecting ink 40a and the colouring ink 30a corresponding to the exposure area 40c on the non-metallic layer 20. Lastly, the protecting ink 40a and the colouring ink 30a remaining on the non-metallic layer 20 are solidified by heating the same at 180 °C, and thus the protecting ink
30 40a remaining on the non-metallic layer 20 is formed as the protective layer 40 and the colouring ink 30a remaining on the non-metallic layer 20 is formed as the coating layer 30.

In an embodiment of the present disclosure, the outer surface of the protective layer 40 is a matte finish. In the present disclosure, since the outer surface of the metallic body 10 is subjected to sandblasting, a plurality of dimples are formed at the outer surface of the metallic body 10, that is, the outer surface of the metallic body 10 may exhibit diffuse reflection. In order to make the shell 100 have the consistent appearance at the non-metallic layer 20 with that at the metallic body 10, the outer surface of the protective layer 40 is subjected to a matte process, and thus a plurality of dimples may also be formed at the outer surface of the protective layer 40, that is, the outer surface of the protective layer 40 may also exhibit diffuse reflection.

In another embodiment of the present disclosure, the non-metallic layer 20 is configured to form a clearance region for an antenna of the shell 100.

In the present embodiment, the area of the metallic body 10 is bigger than that of the non-metallic layer 20. When the shell 100 is applied in a mobile terminal 200, the antenna inside the mobile terminal 200 is required to send electromagnetic signals through the shell 100. The metallic body 10 inevitably shields the electromagnetic signals of the antenna because of its metallic characters, and thus it is necessary to provide the non-metallic layer 20, the coating layer 30 and the protective layer 40 arranged on the non-metallic layer 20 to be used as the clearance region for the antenna, so as to improve the irradiation of the antenna. Specifically, the non-metallic layer 20 includes a non-signal-shielding material. In an embodiment of the present disclosure, the material of the non-metallic layer 20 is plastics, alternatively, it may also be carbon fibers, organic resins or glass fibers.

In an embodiment of the present disclosure, as shown in Fig. 8, an anodic oxidation layer 11 is on an outer surface of the metallic body 10, and has a consistent appearance with the coating layer 30.

In the present embodiment, in order to obtain the needed colour of the metallic body 10, the outer surface of the metallic body 10 is coloured by subjecting the outer surface of the metallic body 10 to an anodic oxidation treatment, thus obtaining the predetermined colour of the outer surface of the metallic body 10. Alternatively, in other embodiments, the predetermined colour of the outer surface of the metallic layer 10 may be realised by an electroplating or corroding process.

In an embodiment of the present disclosure, an outer surface of the anodic oxidation layer 11 is a sandblasted surface 12. In the present embodiment, after the anodic oxidation layer 11 is formed on the outer surface of the metallic layer 10, the anodic oxidation layer 11 is subjected to

sandblasting, and thus the outer surface of the anodic oxidation layer 11 is the sandblasted surface 12. Moreover, the anodic oxidation layer 11 is formed integrally with the metallic body 10, thus enhancing adhesive force between the anodic oxidation layer 11 and the metallic body 10 to avoid the negative effect of the exfoliation of the anodic oxidation layer 11 on the appearance of the shell 100. In other words, the anodic oxidation layer 11 is formed by oxidising the metal of the metallic body 10, and the metallic body 10 may include a material selected from aluminum, silver, stainless steel, aluminium alloy, titanium alloy, magnesium alloy and magnalium alloy. Specifically, the anodic oxidation layer 11 is subjected to sandblasting before or after the protective layer 40 is formed on the coating layer 30.

In an embodiment of the present disclosure, the non-metallic layer 20 and the metallic body 10 are formed integrally.

In the present embodiment, the non-metallic layer 20 is formed integrally with the metallic body 10 by a nano-injection process. Specifically, a side 13 of the metallic body 10 is nanocrystallized, subsequently, the raw material of non-metallic layer 20 is ejected and formed on the side 13 of the metallic body 10, and thus the metallic body 10 and the non-metallic layer 20 may be formed integrally and bonded effectively and solidly.

In an embodiment of the present disclosure, as shown in Figs. 9 and 10, the non-metallic layer 20 is formed as at least one ultra-fine strap 50 of the shell 100. The ultra-fine strap 50 has a plurality of slots 51 spaced apart from each other. The metallic body 10 includes at least two metal plates 14 and a plurality of metal straps 15 separated by the plurality of slots 51.

In the present disclosure, the ultra-fine strap 50 straightly extends in a width direction of the shell 100. In an embodiment of the present disclosure, one ultra-fine strap 50 is formed in the shell 100, such that the metallic body 10 includes two metal plates 14 and a plurality of the metal straps 15. As the ultra-fine strap 50 has a plurality of slots 51, the non-metallic layer 20 is filled in the slots 51 of the ultra-fine strap 50 and the coating layer 30 is applied on the non-metallic layer 20, and therefore there is little or even no visual difference between the colour of the coating layer 30 and the protective layer 40 applied at the slot 51 and the colour of the metallic body 10, thus improving the appearance of the shell 100. Specifically, a width L of the slot 51 is 0.2 mm to 3.0 mm. The non-metallic layer 20 formed as the ultra-fine strap 50 has a large area, thus improving the clearance region for an antenna of the shell 100, resulting in improved electromagnetic radiation of the shell 100. In other embodiments of the present disclosure, the ultra-fine strap 50

may also extend in a length direction of the shell 100, and two ultra-fine straps 50 may be provided on the shell 100.

In an embodiment of the present disclosure, as shown in Fig. 10, the shell 100 includes a back cover 60 and a frame 70 integrally formed with the back cover 60 and formed at a bent peripheral edge of the back cover 60.

In the present embodiment, the shell 100 is used as a rear cover of the mobile terminal 200. A battery, the mainboard and other functional components are supported inside the shell 100. Specifically, the back cover 60 is a rectangular plate, and the frame 70 is bent at the peripheral edge of the back cover 60. The frame 70 and the back cover 60 may be formed integrally by milling with a numerical control (CN) milling machine, and the first part and the second part of the metallic body 10 are separated by the non-metallic layer 20. In other embodiments of the present disclosure, the frame 70 and the back cover 60 may also be formed separately and assembled together.

In an embodiment of the present disclosure, as shown in Fig. 11, a method for manufacturing a shell for a terminal is further provided in embodiments of the present disclosure. The shell 100 may be prepared by the method. The method includes the following steps.

At block S01: a workpiece 100a (as shown in Fig. 12) including a metallic body 10 (as shown in Fig. 12) and a non-metallic layer 20 (as shown in Fig. 12) is provided.

In the present embodiment, the non-metallic layer 20 and the metallic body 10 are integrally formed by a nano-injection process into the workpiece 100a. Specifically, a metallic piece 101 (as shown in Fig. 12) and a non-metallic piece 201 (as shown in Fig. 12) are firstly provided and formed into a plate 100b (as shown in Fig. 12) by forming the non-metallic piece 201 on the metallic piece 101 with the nano-injection process. Secondly, an upper surface 100c (as shown in Fig. 12) and lower surface 100d (as shown in Fig. 12) of the plate 100b are milled, that is, the metallic piece 101 and the non-metallic piece 201 are subjected to numerical control milling together, and thus the metallic body 10 is formed from the metallic piece 101 and the non-metallic layer 20 is formed from the non-metallic piece 201, and the obtained workpiece 100a has an appearance surface in a specific size. Lastly, the metallic body 10 and the non-metallic layer 20 are subjected to a surface treatment to smooth the workpiece 100a and improve the adhesive force and fatigue resistance of the workpiece 100a. In a specific embodiment of the present disclosure, the surface treatment applied to the metallic body 10 and the non-metallic layer 20 may be first

polishing and then sandblasting. Alternatively, the metallic body 10 and the non-metallic layer 20 may be polished only.

At block S02: a coating layer 30 is on the non-metallic layer 20 of the workpiece 100a (as shown in Fig. 3), and the coating layer 30 has a consistent appearance with the metallic body 10.

5 In an embodiment of the present disclosure, after the metallic body 10 and the non-metallic layer 20 are polished and sandblasted, both outer surfaces of the metallic body 10 and the non-metallic layer 20 have good adhesive force to facilitate to apply ink on the outer surfaces of the metallic body 10 and the non-metallic layer 20. The ink is processed to form the coating layer 30. In order to protect the coating layer 30, an outer surface of the coating layer 30 is provided
10 with a protective layer 40. Specifically, firstly, as shown in Fig. 4, a layer of colouring ink 30a, including metal particles and pigments, is applied on outer surfaces of the metallic body 10 and the non-metallic layer 20, and the colouring ink 30a is solidified by heating the same at 70 °C for 20 min. Secondly, as shown in Fig. 5, protecting ink 40a is applied on the heated colouring ink 30a and heated to be solidified. Thirdly, as shown in Fig. 6, a film 40b, including a preset exposure
15 area 40c coinciding with the non-metallic layer 20, is attached to the protecting ink 40a, and parts of the protecting ink 40a and the colouring ink 30a corresponding to the exposure area 40c are photopolymerized by irradiating the film 40b with a light source 40d, however, parts of the protecting ink 40a and the colouring ink 30a corresponding to the metallic body 10 are not reacted. Fourthly, as shown in Fig. 7, unreacted protecting ink 40a and unreacted colouring ink 30a are
20 corroded by a sodium carbonate solution, leaving the protecting ink 40a and the colouring ink 30a corresponding to the exposure area 40c on the non-metallic layer 20. Lastly, the protecting ink 40a and the colouring ink 30a remaining on the non-metallic layer 20 is heated at 180 °C for solidification, and thus the protecting ink 40a remaining on the non-metallic layer 20 is formed as the protective layer 40 and the colouring ink 30a remaining on the non-metallic layer 20 is formed
25 as the coating layer 30.

At block S03: an outer surface of the metallic body 10 is subjected to a surface treatment to form an anodic oxidation layer 11 on the outer surface of the metallic body 10 (as shown in Fig. 8).

30 In an embodiment of the present disclosure, the outer surface of the metallic body 10 is subjected to the anodic oxidation treatment to form the anodic oxidation layer 11, thus colouring the outer surface of the metallic body 10 and allowing the outer surface of the metallic body 10 to

has a predetermined appearance. In another embodiment of the present disclosure, if the metallic body 10 is not sandblasted before providing the coating layer 30 on the non-metallic layer 20, the anodic oxidation layer 11 needs to be sandblasted to further improve the appearance of the metallic body 10, and at the same time, the coating layer 30 and the protective layer 40 provided on the non-metallic layer 20 are required to include the resist sandblasting ink.

As shown in Fig. 13, a mobile terminal 200 is provided in embodiments of the present disclosure. The mobile terminal 200 includes the shell 100, a mainboard 80 fixed in the shell 100, a functional component 81 disposed on the mainboard 80, and a front cover 90 fitted with the shell 100. It should be understood that, the functional component 81 may be an antenna, a battery or a central processing unit. The front cover 90 includes a transparent cover 91 and a display screen 92 fixed on the transparent cover 91. A peripheral edge of the front cover 90 is fixedly connected to a frame 70 of the shell 100, thus a housing of the mobile terminal 200 is formed by the front cover 90 and the shell 100 together.

With the shell, the method for manufacturing the shell and the mobile terminal including the shell according to embodiments of the present disclosure, the coating layer is on the outer surface of the non-metallic layer and has a consistent appearance with the metallic body, and thus the overall shell has a consistent appearance and the user experience is improved.

CLAIMS

1. A shell (100) for a terminal, comprising:

a metallic body (10) having a first part and a second part separated from the first part;

5 a non-metallic layer (20) configured to connect the first part and the second part of the metallic body (10); and

a coating layer (30) on an outer surface of the non-metallic layer (20), wherein the coating layer has a consistent appearance with the metallic body (10).

10 2. The shell (100) according to claim 1, wherein the coating layer (30) comprises ink (33) comprising metal particles (31) and pigments (32).

3. The shell (100) according to claim 2, wherein the metal particle (31) comprises at least one of aluminum, silver, iron, titanium, and an alloy thereof.

15

4. The shell (100) according to any one of claims 1 to 3, further comprising a protective layer (40) on the outer surface of the coating layer (30).

20 5. The shell (100) according to claim 4, wherein the protective layer (40) comprises resist sandblasting ink.

6. The shell (100) according to claim 4 or 5, wherein the ink in the coating layer (30) is exposure ink and the protective layer (40) comprises exposure ink.

25 7. The shell (100) according to any one of claims 4 to 6, wherein an outer surface of the protective layer (40) is a matte finish.

8. The shell (100) according to any one of claims 4 to 7, wherein a plurality of the coating layers (30) or/and a plurality of the protective layers (40) are laminated on the non-metallic layer
30 (20).

9. The shell (100) according to any one of claims 1 to 8, wherein the non-metallic layer (20) is configured to form a clearance region for an antenna.

5 10. The shell (100) according to claim 9, wherein the non-metallic layer (20) comprises a non-signal-shielding material.

11. The shell (100) according to claim 9 or 10, wherein the non-metallic layer (20) comprises plastics carbon fiber, an organic resin or glass fiber.

10 12. The shell (100) according to any one of claims 1 to 11, further comprising an anodic oxidation layer (11) on an outer surface of the metallic body (10), wherein the anodic oxidation layer has a consistent appearance with the coating layer (30).

15 13. The shell (100) according to claim 12, wherein an outer surface of the anodic oxidation layer (11) is a sandblasted surface (12).

14. The shell (100) according to claim 12 or 13, wherein the anodic oxidation layer (11) is formed integrally with the metallic body (10).

20 15. The shell (100) according to any one of claims 12 to 14, wherein the metallic body (10) comprises a material selected from aluminum, silver, stainless steel, aluminium alloy, titanium alloy, magnesium alloy and magnalium alloy.

25 16. The shell (100) according to any one of claims 1 to 15, wherein the non-metallic layer (20) and the metallic body (10) are formed integrally.

30 17. The shell (100) according to any one of claims 1 to 16, wherein the non-metallic layer (20) is formed as at least one ultra-fine strap (50) of the shell, the at least one ultra-fine strap (50) has a plurality of slots (51) spaced apart from each other, the metallic body (10) comprises at least two metal plates (14) and a plurality of metal straps (15) separated by the plurality of slots (51).

18. The shell (100) according to claim 17, wherein a width of the slot (51) is in a range of 0.2 mm to 3.0 mm.

19. The shell (100) according to any one of claims 1 to 18, wherein the shell comprises a back
5 cover (60) and a frame (70) integrally formed with the back cover (60) and formed at a bent peripheral edge of the back cover (60).

20. A method for manufacturing a shell for a terminal, comprising:
providing a workpiece comprising a metallic body and a non-metallic layer;
10 providing a coating layer on an outer surface of the non-metallic layer, the coating layer having a consistent appearance with the metallic body.

21. The method according to claim 20, wherein the non-metallic layer is formed integrally
15 with the metallic body by a nano-injection process.

22. The method according to claim 20 or 21, wherein before providing the coating layer on
the outer surface of the non-metallic layer, the workpiece is subjected to a surface treatment after
formed by milling to smooth the workpiece.

23. The method according to any one of claims 20 to 22, wherein the coating layer comprises
20 ink comprising metal particles and pigments.

24. The method according to any one of claims 20 to 23, further comprising:
providing a protective layer on an outer surface of the coating layer.

25. The method according to claim 24, wherein providing a coating layer on an outer surface
of the non-metallic layer and providing a protective layer on an outer surface of the coating layer
comprise:

applying colouring ink and protecting ink on an outer surface of the workpiece sequentially,
30 corroding and removing the colouring ink and protecting ink on the metallic body by a
process of exposure and development, and

forming the coating layer from the colouring ink on the non-metallic layer and the protective layer from the protecting ink on the non-metallic layer.

26. The method according to claim 25, wherein applying colouring ink and protecting ink on
5 an outer surface of the workpiece sequentially comprises: heating the colouring ink at a predetermined temperature for a predetermined duration and applying the protecting ink on the colouring ink.

27. The method according to claim 25 or 26, wherein forming the coating layer from the
10 colouring ink on the non-metallic layer and the protective layer from the protecting ink on the non-metallic layer comprises solidifying the colouring ink and the protecting ink on the non-metallic layer.

28. The method according to any one of claims 20 to 27, further comprising:
15 subjecting an outer surface of the metallic body to a surface treatment to form an anodic oxidation layer on the outer surface of the metallic body.

29. The method according to claim 28, further comprising:
subjecting the anodic oxidation layer to a sandblasting process.

20

30. A mobile terminal (200), comprising
a shell (100) according to any one of claims 1 to 19,
a mainboard fixed in the shell (100), and
a functional component disposed on the mainboard.

25

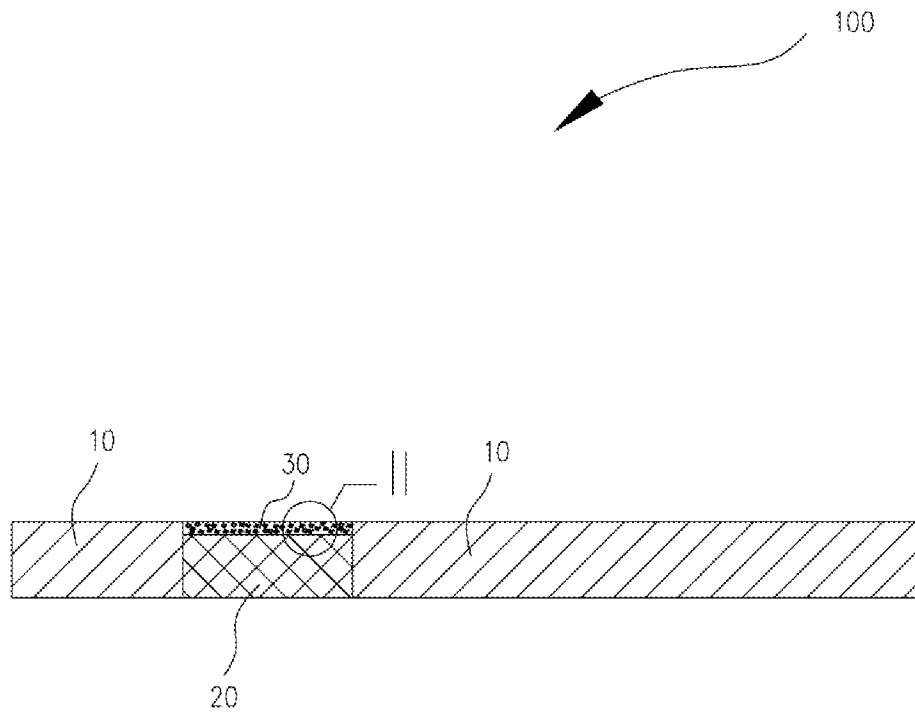


Fig. 1

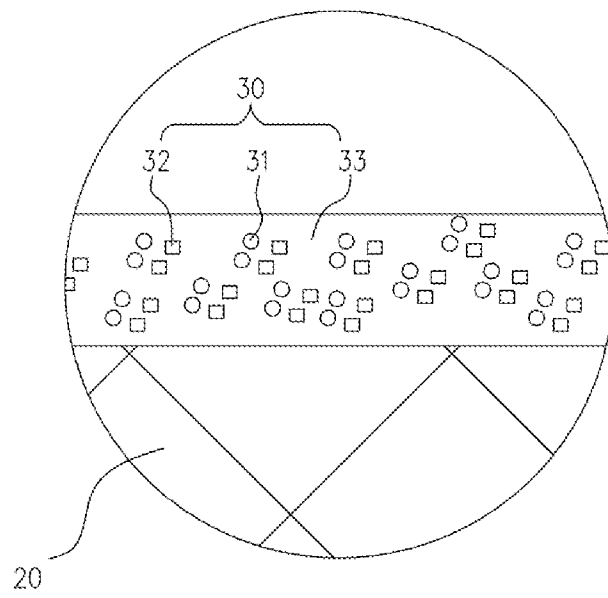


Fig. 2

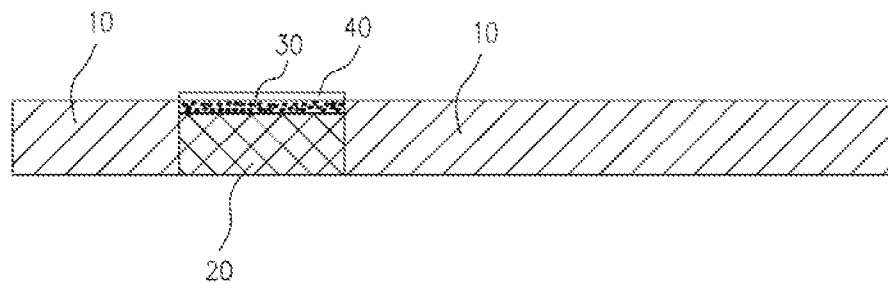


Fig. 3

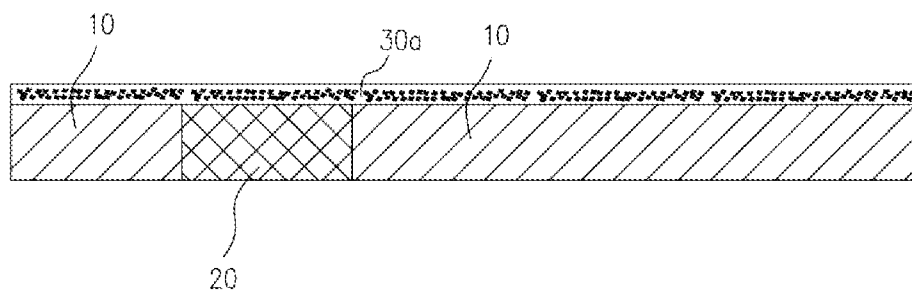


Fig. 4

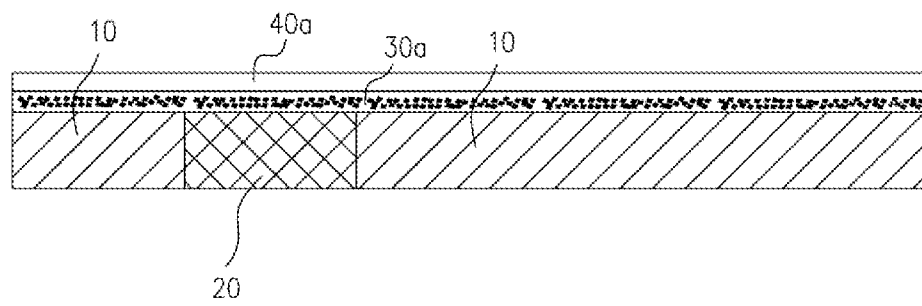


Fig. 5

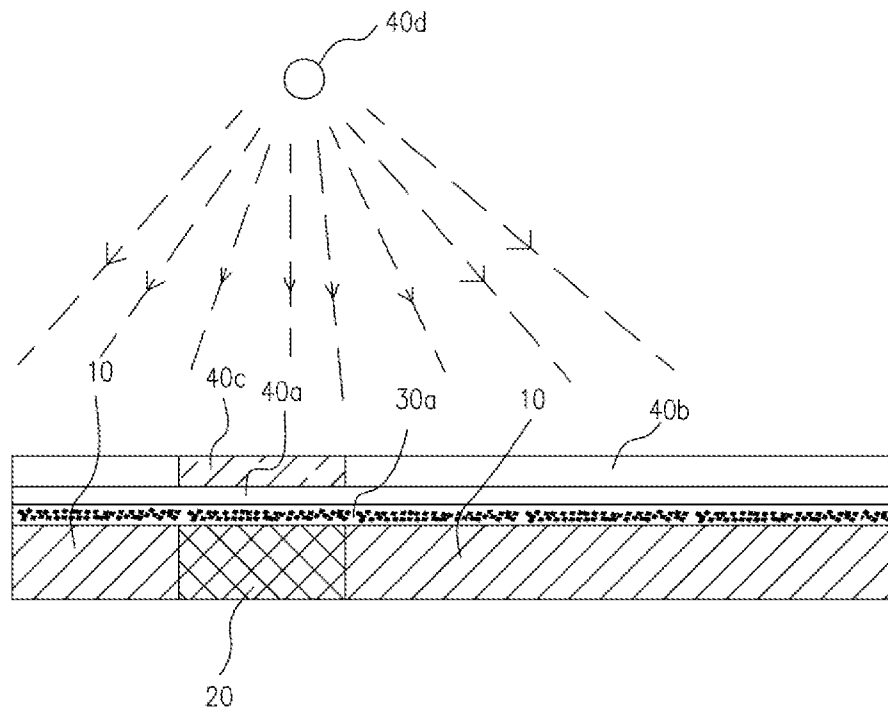


Fig. 6

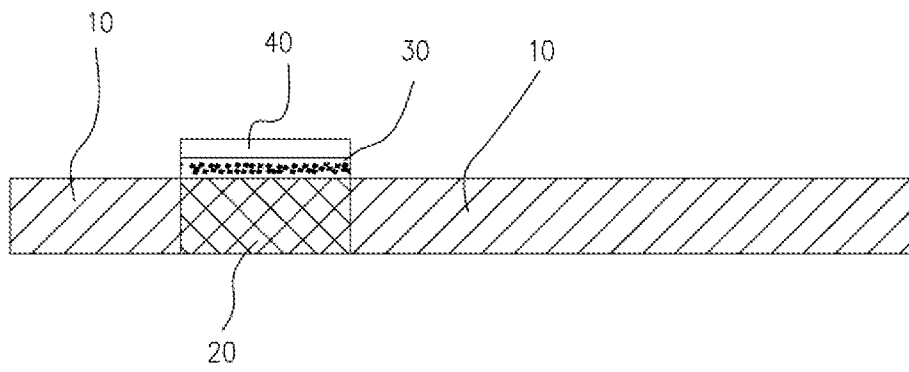


Fig. 7

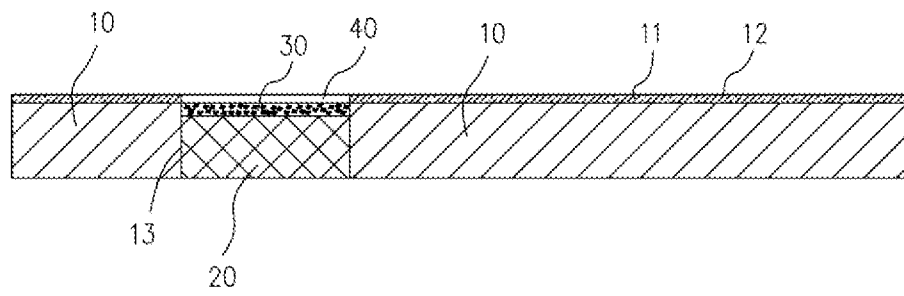


Fig. 8

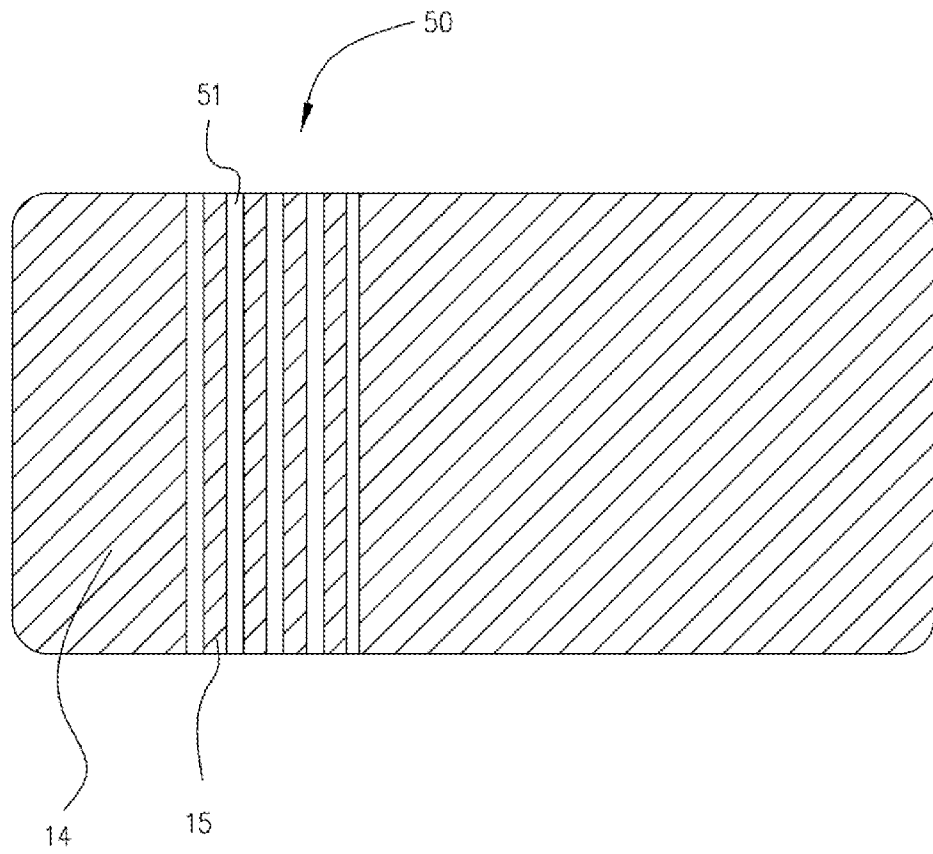


Fig. 9

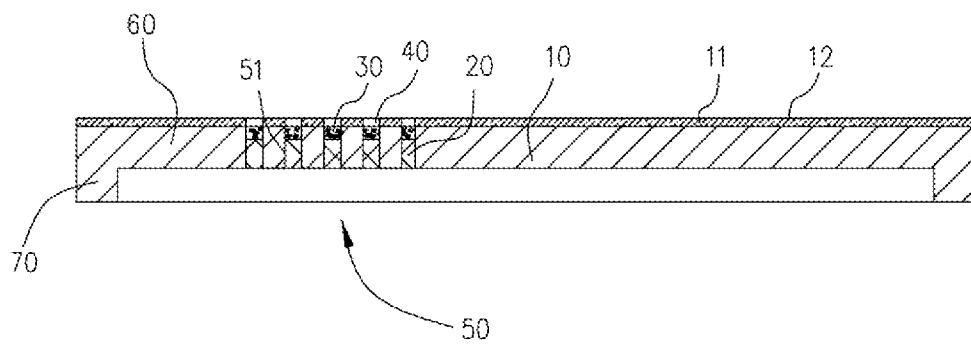


Fig. 10

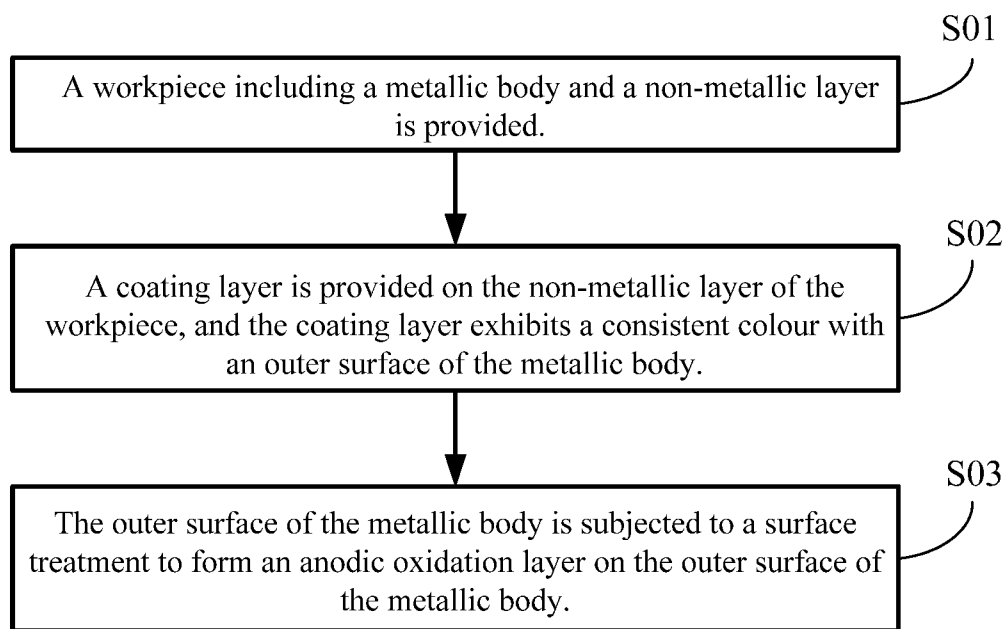


Fig. 11

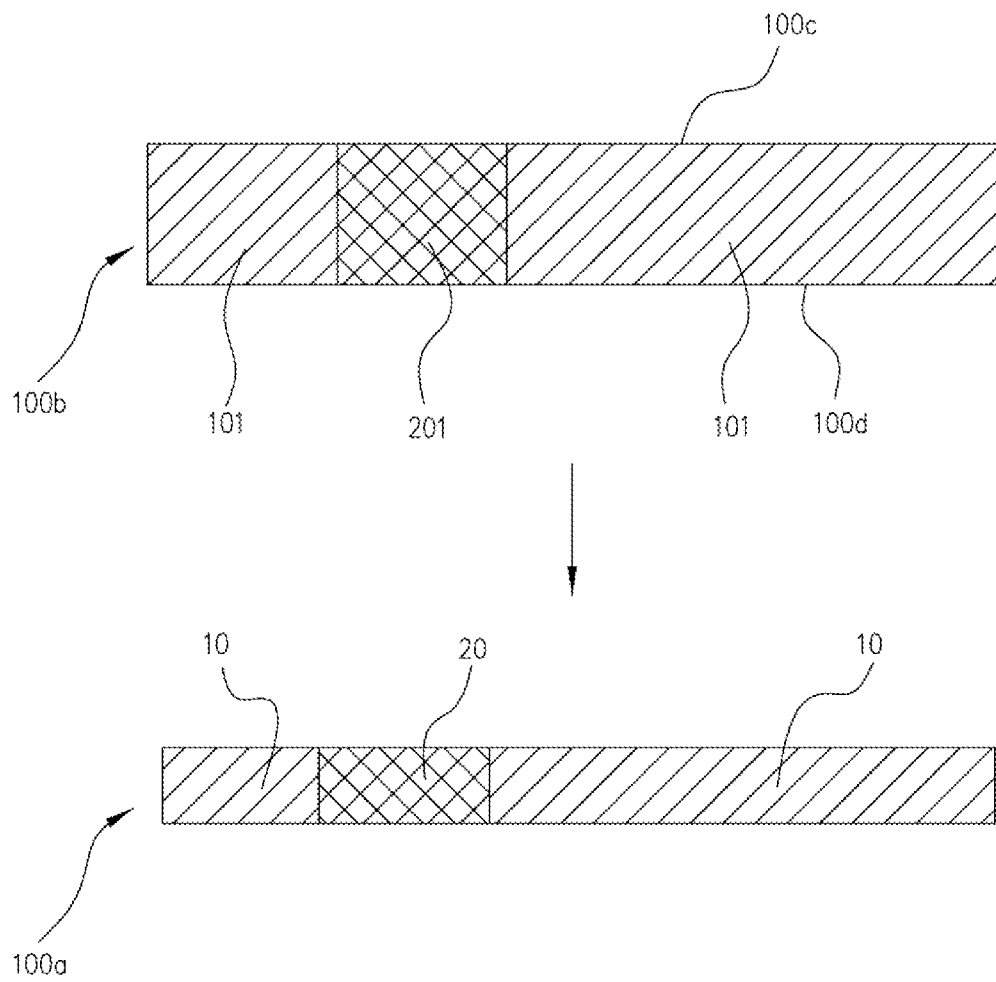


Fig. 12

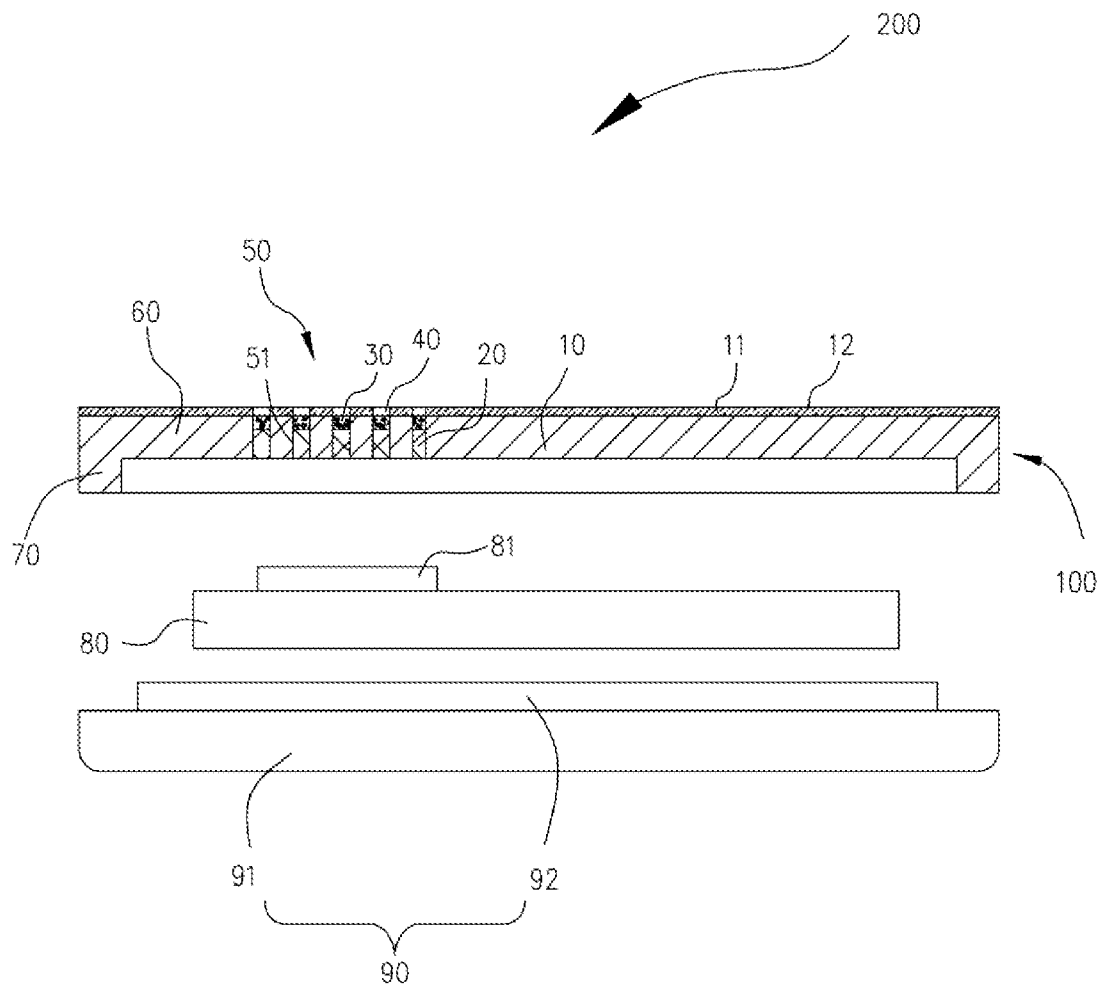


Fig. 13

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/097566

A. CLASSIFICATION OF SUBJECT MATTER

H04M 1/02(2006.01)i; G06F 1/16(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04M; G06F; H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI,EPODOC,CNPAT,CNKI:shell,housing,metal+,consistent,ink,particle,gap,layer,coating

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 106572212 A (GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.) 19 April 2017 (2017-04-19) claims 1-30 and description, paragraphs [0027]-[0057]	1-30
X	CN 105517389 A (GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.) 20 April 2016 (2016-04-20) claims 1-13 and description, paragraphs [0030]-[0064]	1-30
X	CN 105813422 A (GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.) 27 July 2016 (2016-07-27) claims 1-10 and description, paragraphs [0035]-[0091]	1-30
A	CN 105007342 A (MEIZU TECHNOLOGY CHINA CO., LTD.) 28 October 2015 (2015-10-28) the whole document	1-30
A	US 2010097276 A1 (SHENZHEN FUTAIHONG PRECISION INDUSTRY CO., LTD. ET AL.) 22 April 2010 (2010-04-22) the whole document	1-30

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

27 September 2017

Date of mailing of the international search report

03 November 2017

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

SUN,Zhifei

Facsimile No. (86-10)62019451

Telephone No. (86-10)62414376

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2017/097566

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	106572212	A	19 April 2017	CN	106572211	A	19 April 2017
				CN	106572208	A	19 April 2017
				CN	206353801	U	25 July 2017
CN	105517389	A	20 April 2016	None			
CN	105813422	A	27 July 2016	None			
CN	105007342	A	28 October 2015	None			
US	2010097276	A1	22 April 2010	CN	101730410	A	09 June 2010