

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
10 November 2011 (10.11.2011)

PCT

(10) International Publication Number  
**WO 2011/138431 A1**

(51) International Patent Classification:  
*C09D 167/06* (2006.01) *C08K 5/14* (2006.01)

(74) Agents: SCHMITT, Maja et al.; P.O. Box 4, NL-6100 AA Echt (NL).

(21) International Application Number:  
PCT/EP2011/057293

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:  
6 May 2011 (06.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10162167.0 6 May 2010 (06.05.2010) EP

(71) Applicant (for all designated States except US): DSM IP ASSETS B.V. [NL/NL]; Het Overloon 1, NL-6411 TE Heerlen (NL).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MISEV, Tosko Alexandar [NL/NL]; Ceintuurbaan 5, NL-8022 AW Zwolle (NL). MOLHOEK, Leendert Jan [NL/NL]; Ceintuurbaan 5, NL-8022 AW Zwolle (NL). JANSEN, Johan Franz Gradus Antonius [NL/NL]; P.O. Box 4, NL-6100 AA Echt (NL). BOS, Matthias Johannes Cornelis [NL/NL]; Ceintuurbaan 5, NL-8022 AW Zwolle (NL). LANGE, DE, Gerrit Johannes [NL/NL]; Ceintuurbaan 5, NL-8022 AW Zwolle (NL). DIJKSTRA, Gerbert [NL/NL]; Ceintuurbaan 5, NL-8022 AW Zwolle (NL).

Published:

— with international search report (Art. 21(3))

(54) Title: LOW TEMPERATURE HEAT-CURABLE POWDER COATING COMPOSITION COMPRISING A CRYSTALLINE POLYESTER RESIN, AN AMORPHOUS RESIN AND A PEROXIDE

(57) Abstract: The invention relates to heat-curable powder coating composition comprising: i) at least one crystalline polyester resin present in an amount of at least 7.5 wt%; and ii) at least one amorphous polyester resin present in an amount of at most 92.5 wt%; and iii) at least one peroxide present in an amount of at least 0.65 parts of peroxide in hundred parts of i)+ ii) (pph), wherein the at least one crystalline polyester resin has 2-butenedioic acid ethylenic unsaturations and/or the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations; wherein if the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations, then the theoretical weight per ethylenic unsaturation (WPU) of the at least one amorphous polyester resin is at most 850 g/mol; wherein the wt% is based on the total amount of i)+ ii); wherein the peroxide is chosen from the group of peresters and monopercarbonates according to formula  $R^1C(=O)OOR^2$  (I) and peranhydrides of formula  $R^3C(=O)OOC(=O)R^4$  (II) and any combination of peroxides according to formula (I) and formula (II) thereof. The compositions of the invention may be cured to an acceptable degree at low temperature of for example at most 130°C for at most 20 minutes, said compositions may be ground, sieved and extrudable and said compositions can upon heat cure form powder coatings that may also exhibit enhanced flexibility. The compositions of the invention upon heat curing may also provide powder coatings that exhibit good adhesion. In addition, the compositions of the invention can suitably be used on heat- and/or non heat-sensitive, even if the composition is highly pigmented.



WO 2011/138431 A1

LOW TEMPERATURE HEAT-CURABLE POWDER COATING COMPOSITION  
COMPRISING A CRYSTALLINE POLYESTER RESIN, AN AMORPHOUS RESIN  
AND A PEROXIDE

5                   The invention relates to a heat-curable powder coating composition, a process for the preparation thereof, a process for coating a substrate with said composition, a substrate coated with said composition and/or to use of the heat-curable powder coating composition.

                  Powder coating compositions (commonly referred to as "powders")  
10   which are dry, finely divided, free flowing, solid materials at room temperature and at atmospheric pressure, have gained considerable popularity in recent years over liquid coating compositions for a number of reasons. For one powder coatings are user and environmentally friendly materials since they are virtually free of harmful volatile organic solvents carriers that are normally present in liquid coating compositions.  
15   Therefore, powder coatings give off little, if any, volatile materials to the environment when cured. This eliminates the solvent emission problems associated with liquid coating compositions such as air pollution and dangers to the health of workers employed in coating operations. Powder coating compositions are also clean and convenient to use since they are applied in a clean manner over the substrate because  
20   they are in dry solid form. The powders are easily swept up in the event of a spill and do not require special cleaning and spill containment supplies, as do liquid coating compositions. Working hygiene is thus improved. Moreover, powder coating compositions are essentially 100 % recyclable since the sprayed powders can be fully reclaimed and recombined with fresh powder feed. Recycling of liquid coatings during  
25   application is often not done, which leads to increased waste and hazardous waste disposal costs. In addition, powder coating compositions are ready to use, i.e., no thinning or dilution is required.

                  Powder coating compositions are typically applied on a substrate via an electrostatic spray process; the powder coating composition is dispersed in an air  
30   stream and passed through a corona discharge field where the particles acquire an electrostatic charge. The charged particles are attracted to and deposited on the grounded article to be coated. The article usually at room temperature, is then placed in an oven where the powder melts and forms a powder coating. A hybrid process based on a combination of high voltage electrostatic charging and fluidized-bed  
35   application techniques (electrostatic fluidized bed) has evolved, as well as triboelectric

spray application methods. Powder coating compositions and their process of application are the preferred coating compositions and process for coating many familiar items such as lawn and garden equipment, patio and other metal furniture, electrical cabinets, lighting, shelving and store fixtures, and many automotive  
5 components. Today, powder coating compositions are widely accepted, with thousands of installations in the factories of original equipment manufacturers (OEMs) and custom coating job shops.

Powder coating compositions can be thermosetting or thermoplastic. The invention relates to the field of thermosetting powder coating compositions. By  
10 "thermosetting powder coating compositions" is meant herein, a mixture of components and which compositions have the ability to form an irreversible crosslinked network (the so-called 'cured form') upon curing, preferably heat curing. The preparation of thermosetting powder coating compositions is described by Misev in "Powder Coatings, Chemistry and Technology" (pp. 224-300; 1991, John Wiley & Sons Ltd.).

15 As shown by the article "Overview of the powder coatings market worldwide" by G. Maggiore in *Pitture e Vernice Europe* 1/92, pp. 15-22 and by the lecture by D. Richart "Powder Coating: Current Developments, Future Trends" (Waterborne, High-Solids and Powder Coatings Symposium, February 22-24, 1995), the search is still continuing for powder coating compositions which can be cured with  
20 little thermal stress of the substrate and which consequently are suitable for use on heat-sensitive substrates such as, for example, wood and plastic.

Heat-sensitive substrates may be coated using radiation curable powder coating compositions, such as described in EP 0636669. However, when using heavily pigmented powder coating compositions, there is a chance that the radiation  
25 does not penetrate through the powder coating composition resulting in an unevenly cured powder coating. Also, when using radiation to cure a powder coating composition on complex three-dimensional objects, the radiation may not reach all corners of the object, also resulting in an unevenly cured coating.

Besides the desire for a powder coating composition that can be  
30 cured at low temperature, it is also desired that such a powder coating composition can still be ground, sieved, extrudable and/or evenly cured. This is useful for commercially viable powders since said compositions can be prepared in existing powder paint job shops without major investments in new equipment or fundamentally different processes. Furthermore, it would be desirable to provide flexible powder coatings that  
35 may sustain substrate stresses without being delaminated and/or cracked. This is

especially useful when the article to be powder coated has a complex three-dimensional shape and/or when a coating is used on furniture, such as wooden/metal chairs and kitchen cabinets.


It is therefore an object of the invention is to address some or all of the problems identified herein.

Therefore, broadly in accordance with the invention there is provided a heat-curable powder coating composition comprising:

- i) at least one crystalline polyester resin present in an amount of at least 7.5 wt%; and
- ii) at least one amorphous polyester resin present in an amount of at most 92.5 wt%; and
- iii) at least one peroxide present in an amount of at least 0.65 parts of peroxide in hundred parts of i)+ ii) (pph),


wherein,

- the at least one crystalline polyester resin has 2-butenedioic acid ethylenic unsaturations and/or the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations;
- if the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations, then the theoretical weight per ethylenic unsaturation (WPU) of the at least one amorphous polyester resin is at most 850 g/mol;
- the wt% is based on the total amount of i)+ ii);
- the peroxide is chosen from the group of peresters and monopercarbonates according to formula (I)

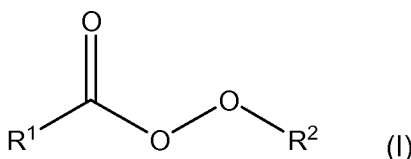

wherein  $\text{R}^1$  represents an optionally substituted  $\text{C}_{1-20}$ alkyl, a  $\text{C}_{6-20}$ aryl or for  $\text{OR}^5$ , wherein  $\text{R}^5$  represents an optionally substituted  $\text{C}_{1-20}$ alkyl or for an optionally substituted  $\text{C}_{6-20}$ aryl;  $\text{R}^2$  represents an optionally substituted  $\text{C}_{1-20}$ alkyl or for an optionally substituted  $\text{C}_{6-20}$ aryl; and

peranhydrides of formula (II)

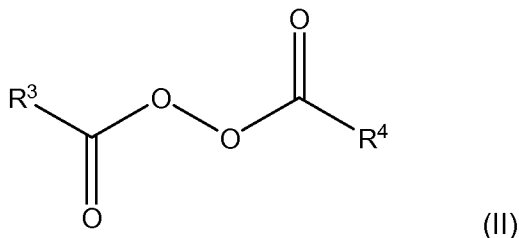

wherein R<sup>3</sup> and R<sup>4</sup> each independently stand for an optionally substituted C<sub>1-20</sub>alkyl, a C<sub>6-20</sub>aryl or for OR<sup>6</sup>, wherein R<sup>6</sup> represents an optionally substituted C<sub>1-10</sub>alkyl or a C<sub>6-20</sub>aryl; and any combination of peroxides according to formula (I) and formula (II) thereof.

The composition of the invention is heat-curable and it may be cured to an acceptable degree at low temperature of for example at most 130°C for at most 20 minutes. The composition of the invention may be ground, sieved and extrudable, whilst said composition upon heat cure can provide powder coatings that may also exhibit enhanced flexibility as the latter is defined herein.

The composition of the invention upon heat curing may also provide powder coatings that exhibit good adhesion as defined herein.

The composition of the invention can suitably be used on heat- and/or non heat-sensitive, even if the composition is highly pigmented or if the composition is used on a three dimensional complex article. Furthermore, since it is not necessary to use a lot of energy to cure the powder coating composition, the composition of the invention also has environmental benefits.

Unless otherwise stated, the total amount (wt%) of i)+ii) equals 100%.

Preferably, of the at least crystalline polyester resin and the at least one amorphous polyester resin of the composition of the invention have each di-acid ethylenic unsaturations; wherein the di-acid ethylenic unsaturation of the at least one crystalline polyester resin and/or the di-acid ethylenic unsaturation of the at least one amorphous polyester resin is a 2-butenedioic acid ethylenic unsaturation.

Preferably the at least one crystalline polyester resin of the composition of the invention is present in an amount of at most 85 wt% and the at least one amorphous polyester resin of the composition of the invention is present in an amount of at least 15 wt%.

Preferably, the at least one crystalline polyester resin and the at least one amorphous polyester resin of the composition of the invention have each a theoretical Mn of at least 2,200 Da and of at most 8,000 Da.

Preferably the at least one amorphous polyester resin of the composition of the invention has 2-butenedioic acid ethylenic unsaturations and a theoretical weight per ethylenic unsaturation (WPU) of at most 850 g/mol.

5 Preferably the at least one crystalline polyester resin and/or the at least one amorphous polyester resin of the composition of the invention has besides 2-butenedioic acid ethylenic unsaturations also other ethylenic unsaturations based on di-acid or anhydride monomers. Preferably the other ethylenic unsaturations based on di-acid or anhydride monomers are chosen from the group of itaconic acid, citraconic acid, mesaconic acid, anhydrides of itaconic acid and mixtures thereof.

10 Preferably both the at least one crystalline polyester resin and the at least one amorphous polyester resin, have each 2-butenedioic acid ethylenic unsaturations.

15 Preferably, both the at least one crystalline polyester resin and the at least one amorphous polyester resin, have each only 2-butenedioic acid ethylenic unsaturations.

Preferably, the peroxide is present in an amount of at least 0.8 pph.

Preferably the composition of the invention further comprises a transition metal compound.

20 Preferably the composition of the invention further comprises a transition metal compound chosen from the group of transition metal salts, transition metal complexes and mixtures thereof, of transition metals chosen from the group of Mn, Fe, Co and Cu.

Preferably, R<sup>2</sup> represents tert-butyl.

Preferably, R<sup>1</sup> represents phenyl and R<sup>2</sup> represents tert-butyl.

25 Preferably, R<sup>3</sup> and R<sup>4</sup> both represent phenyl or both represent undecane.

Preferably, the composition of the invention further comprises an inhibitor chosen from the group of phenolic compounds, stable radicals, catechols, phenothiazines, hydroquinones, benzoquinones or mixtures thereof.

30 In the composition of the invention, the amount of the at least one crystalline polyester resin is preferably at least 7.5, more preferably at least 10, even more preferably at least 15, most preferably at least 17.5, especially at least 20, more especially at least 25 wt% based on the total amount of i)+ ii). Preferably the amount of the at least one crystalline polyester resin is at most 90, more preferably at most 80,  
35 even more preferably at most 75, most preferably at most 70, especially at most 65,

more especially at most 60, most especially at most 55, for example at most 50, for example at most 40 wt% based on the total amount of i)+ ii). In the composition of the invention, the amount of the at least one crystalline polyester resin is preferably in the range of 10-40 wt% based on the total amount of i)+ ii).

5 In the composition of the invention, the amount of the at least one amorphous polyester resin is preferably at least 10, more preferably at least 20, even more preferably at least 25, most preferably at least 30, especially at least 35, more especially at least 40, most especially at least 45, for example at least 50, for example at least 60 wt% based on the total amount of i)+ ii). Preferably the amount of the at  
10 least one amorphous polyester resin is at most 92.5, more preferably at most 90, even more preferably at most 85, most preferably at most 82.5, especially at most 80, more especially at most 75 wt% based on the total amount of i)+ ii). In the composition of the invention, the amount of the at least one amorphous polyester resin is preferably in the range of 60-90 wt% based on the total amount of i)+ ii).

15 Preferably the composition of the invention is substantially free of a crosslinking agent.

#### Definitions

20 By "cure to an acceptable degree at low temperatures" is meant that the powder coating when cured at most 130°C for at most 20 minutes, is able to resist at least 100 acetone double rubs (ADR).

By "enhanced flexibility" is meant herein that a powder coating presented at least 1.0 mm of minimum depth of indentation to cause failure as measured using the cupping test according to ISO1520:2006. More preferred powder  
25 coatings have at least 1.2 mm of minimum depth of indentation to cause failure.

By "good adhesion" is meant herein that the adhesion of a powder coating is characterized as G0 to G3 on a scale from G0 (best adhesion) to G5 (worst adhesion) when measured according to a cross-cut test ('Gitterschnitt') in accordance with ISO 2409 (edition 3, dated 15 May 2007) as described herein. More preferred  
30 powder coatings have adhesion characterized as G0 to G2.

By "curing" is meant herein the process of becoming "set" that is to form an irreversibly crosslinked network (the so-called "cured form"), a material that can no longer flow, be melted or dissolved. Herein, the terms "curing" "cure" and crosslinking" are used interchangeably. Preferably, the curing of the heat-  
35 curable powder coating composition of the invention takes place using heat and in that

case the curing can be called "heat curing". For clarity, the term heat curing does not include ultraviolet (UV) or electron beam induced curing. Optionally, a combination of heat and pressure can be used to cure the heat-curable powder coating compositions of the invention. In the context of the invention, the term "heat curing" does not exclude  
5 the application of pressure along with heat in order to cure the heat-curable powder coating compositions of the invention.

By "room temperature" is meant herein a temperature of 23 °C.

A "resin" is herein understood to have the same meaning as it has to a skilled person in thermosetting polymer chemistry, namely as a low molecular weight  
10 polymer having reactive moieties such as for example ethylenic unsaturations, said polymer is able to crosslink. The term "low molecular weight" means a theoretical number average molecular weight (Mn) lying between a few hundred Da, e.g. 1,000, and a few thousand Da, e.g. 20,000. Preferably the Mn is at most 15,000 Da, even more preferably is at most 8,000, most preferably is at most 7,000, especially is at most  
15 6,000, more especially is at most 5,000 Da. Preferably the Mn is at least 1,500, more preferably is at least 1,800, even more preferably is at least 2,000, most preferably is at least 2,200 Da. Preferably the Mn is at least 2,250, more preferably is at least 2,300, even more preferably is at least 2,350, most preferably is at least 2,400 Da. A resin may for example be a low molecular weight polyester, especially a low molecular  
20 weight polyester having 2-butenedioic acid ethylenic unsaturations. Therefore, a polyester resin is a polyester with a theoretical Mn as described above in the same paragraph. In the case of a neat resin, these reactive moieties via a chemical reaction preferably induced by means of heat, ultimately connect the polymer chains together through the formation of permanent covalent (crosslink) bonds, resulting to the cured  
25 resin. A resin is classified as acid functional in case its hydroxyl value (OHV) is lower than its acid value (AV). A resin is classified as hydroxyfunctional in case its acid value is lower than its hydroxyl value. In the context of the invention the acid value of a resin (AV in mg KOH/g of resin) is measured titrimetrically according to ISO 2114-2000, whereas the hydroxyl value of a resin (OHV in mg KOH/g of resin) is measured using  
30 ISO 4629-1978. The acid value of a polyester resin is a measure for the amount of acid groups in the polyester resin whereas the hydroxyl value of a polyester resin is a measure for the amount of hydroxyl groups in the polyester resin.

By "crosslinking agent" or "co-crosslinker" is meant herein any organic monomer, oligomer or polymer having unsaturations that are reactable with the  
35 ethylenic unsaturations of an unsaturated resin to be crosslinked, said unsaturations of



the crosslinking agent are different from those of the unsaturated resin, the crosslinking agent having an Mn ranging from at least 100 to at most 20,000 Da. Preferred crosslinking agents have an Mn of less than 2,200 Da. The crosslinking agent, may be chosen from the group of components bearing acrylate, methacrylate, vinyl ester, vinyl ether, vinyl amide, alkyne ether, alkyne ester, alkyne amide, alkyne amine, propargyl ether, propargyl ester, itaconate, enamine, thiol, allyl (or combinations thereof) groups and/or mixtures of aforementioned components. The crosslinking agent can be a compound, an oligomer or a polymer. The crosslinking agent can be a combination of an amorphous with a crystalline and/or even with a liquid component. An example of liquid crosslinking agent is a vinyl acetate. An example of a crosslinking agent that is a polymer is a polyester resin having itaconic acid ethylenic unsaturations; said polyester resin may be obtainable from itaconic acid and/or derivatives thereof.

By "composition" is meant herein the combining and/or mixture of distinct chemical substances and/or components to form a whole.

By "powder" is meant herein, a substantially dry solid substance reduced to a state of fine, loose particles wherein the individual particles have a maximum particle size of at most 130  $\mu\text{m}$  at 23 °C and at atmospheric pressure, for example a particle size of at most 110  $\mu\text{m}$ , for example of at most 90  $\mu\text{m}$  at 23 °C. A particle is defined as a small object that: a) has mean linear dimensions as described herein after and b) behaves as a whole unit in terms of its transport and properties. The particle size distribution (PSD) of a powder is a list of values or a mathematical function that defines the relative amounts of particles present, sorted according to size. The terms "particle size" and "particle size distribution" will be used interchangeably in the context of the invention when used in relation to a powder. The method used to measure the particle size of the granular material according to the invention is sieve analysis. According to it, the powder is separated on sieves of different sizes. Thus, the PSD is defined in terms of discrete size ranges: e.g. "% of sample powder has particle size in the range of 80 microns to 90 microns", when sieves of these sizes are used.

By "substantially dry" is meant herein that the component does not contain any deliberately added water or moisture but the component may contain moisture absorbed from the atmosphere in an amount of up to 30, preferably up to 20 % w/w based on the total weight of the component.

By "heat-curable powder coating composition" is meant herein a composition in the form of a powder at 23 °C, said composition has the ability to cure upon heating. For clarity, the composition of the invention is heat-curable.

The term '(semi)crystalline' denotes both crystalline and semicrystalline.

The terms amorphous, semicrystalline, crystalline used to characterize a polymer are informal terms used in the art to indicate the predominant character of the relevant polymer in respect to its degree of crystallinity but these terms  
5 are defined more precisely herein by melting enthalpy ( $\Delta H_m$ ) values.

By "amorphous" is meant herein that a component has a melting enthalpy ( $\Delta H_m$ ) lower than 40 J/g. Preferably the amorphous component does not have a melting temperature ( $T_m$ ).

10 By "crystalline" is meant herein that a component has a melting enthalpy ( $\Delta H_m$ ) of at least 40J/g and it has a melting temperature. Preferably, the melting enthalpy ( $\Delta H_m$ ) of the crystalline component is at least 50, more preferably at least 60 J/g and/or at most 150, for example at most 140, for example at most 130 J/g. The melting enthalpy ( $\Delta H_m$ ) is measured using DSC as described herein.

15 The term "ethylenic unsaturation" as used herein means *cis-* or *trans-* configured reactive carbon-carbon double bond unsaturation and does not include aromatic unsaturation, carbon-carbon triple bond, carbon-heteroatom unsaturation.

By "unsaturated resin" is meant herein a resin having ethylenic unsaturations. For example a polyester resin having 2-butenedioic acid ethylenic  
20 unsaturations, is an unsaturated polyester resin.

By "thermal radical initiator" is meant herein any organic compound that upon heating is able to generate free radicals and initiate radical crosslinking in the composition of the invention.

By peroxide is meant herein any of a class of organic compounds  
25 whose molecules contain two oxygen atoms bound together and upon heating generates free radicals and initiates radical crosslinking in the composition of the invention. Peroxide is a thermal radical initiator.

By "powder coating" is meant herein the partially or fully cured form of the heat-curable powder coating composition of the invention.

30 By "the composition of the invention is substantially free of a crosslinking agent" is meant herein that the composition contains at most 10, preferably at most 8, more preferably at most 6, even more preferably at most 4, most preferably at most 2, especially at most 1 parts of a crosslinking agent in hundred parts of resin (pph), more especially the composition of the invention contains no crosslinking agent.

The calculation of pph is based on the weight of a crosslinking agent calculated on the total weight of resins normalized to 100 parts of resins.

By "article" is meant herein an individual object or item or element of a class designed to serve a purpose or perform a special function and can stand alone.

5           The term 'di-acid' as used herein means a dicarboxylic acid or dianhydride or diester or other derivatives of a dicarboxylic acid such as for examples dicarboxylic acid salts.

10           The term 'di-acid ethylenic unsaturations' as used herein means ethylenic unsaturations obtainable from any isomer of an unsaturated di-acid and/or derivatives thereof, such as for example ethylenic unsaturations obtainable from a di-acid chosen from the group of 2-butenedioic acid, 2-methyl-2-butenedioic acid, itaconic acid and mixtures thereof. Derivatives of any isomer of unsaturated di-acids include esters, anhydrides, acid salts. Fumaric acid and maleic acid are isomers of 2-butenedioic acid, whereas citraconic acid and mesaconic acid are isomers of 2-methyl-15 2-butenedioic acid. For example "di-acid ethylenic unsaturations" may be obtainable from fumaric, maleic, itaconic, citraconic and/or mesaconic acids, derivatives thereof and/or mixtures thereof.

20           Fumaric acid based unsaturation is an informal term used herein to denote unsaturation derived from fumaric acid, its isomers e.g. maleic acid and/or derivatives thereof.

25           By "polyester resin having 2-butenedioic acid ethylenic unsaturations" is meant herein, a polyester resin comprising ethylenic unsaturations obtainable from any isomer of 2-butenedioic acid and/or derivatives thereof. Fumaric acid and maleic acid are isomers of 2-butenedioic acid. Maleic acid is the *cis*-isomer of 2-butenedioic acid, whereas fumaric acid is the *trans*-isomer of 2-butenedioic acid. Derivatives of any isomer of 2-butenedioic acid include esters, anhydrides, acid salts. The "polyester resin having 2-butenedioic acid ethylenic unsaturations" may for example be prepared from fumaric, and/or maleic acids, derivatives thereof and/or mixtures thereof. Derivatives of fumaric acid and of maleic acid include esters, anhydrides, acid salts. Maleic acid and 30 maleic acid anhydride partly isomerize to fumaric acid when used in the synthesis of a polyester resin having 2-butenedioic acid ethylenic unsaturations.

35           The "polyester resin having 2-butenedioic acid ethylenic unsaturations" may for example be prepared from fumaric acid and/or fumaric acid derivatives and/or maleic acid and/or maleic acid derivatives and/or mixtures thereof. Derivatives of fumaric acid and of maleic acid include esters, anhydrides, acid salts.

Maleic acid and maleic acid anhydride partly isomerize to fumaric acid when used in the synthesis of a polyester resin having 2-butenedioic acid ethylenic unsaturations.

Certain moieties, species, groups, repeat units, compounds, oligomers, polymers, materials, mixtures, compositions and/or formulations which  
5 comprise and/or are used in some or all of the invention as described herein may exist as one or more different forms such as any of those in the following non exhaustive list: stereoisomers (such as enantiomers (e.g. E and/or Z forms), diastereoisomers and/or geometric isomers); tautomers (e.g. keto and/or enol forms). The invention comprises and/or uses all such forms which are effective as defined herein.

10 By "Mn" is meant herein the theoretical number average molecular weight and it is calculated as shown in the Examples unless stated otherwise.

By "WPU" is meant herein the theoretical weight per ethylenic unsaturation, unless otherwise stated. The WPU is calculated by dividing the Mn of a compound, for a example an unsaturated polyester resin as described herein, by the  
15 amount of ethylenic unsaturations as added during the synthesis of said compound. The WPU may also be measured ("measured WPU"), for example using <sup>1</sup>H-NMR, for example as described in Journal of Applied Polymer Science, Vol. 23, 1979, pp 25-38, the complete disclosure of which is hereby incorporated by reference, or via <sup>1</sup>H-NMR on a 300 MHz Varian NMR-spectrometer using pyrazine as internal standard. In the  
20 Examples, the WPU was also determined via <sup>1</sup>H-NMR on a 300 MHz Varian NMR-spectrometer using pyrazine as internal standard and in this case the WPU is referred to as the "measured WPU". If the WPU refers to a crosslinking agent, then by "WPU" is meant herein the theoretical weight per the type of unsaturation the crosslinking agent has and the WPU of the crosslinking agent is calculated by dividing the Mn of the  
25 crosslinking agent by the amount of the unsaturations as added during the synthesis of the crosslinking agent. The WPU of a crosslinking agent may also be measured experimentally for example using <sup>1</sup>H-NMR as described herein above.

By "pph" is meant herein parts of an ingredient in the composition of the invention per hundred parts of resins.

30 The glass transition temperature (Tg) (inflection temperature), melting temperature (Tm), crystallization temperature (Tc) and melting enthalpy (ΔHm) measurements were carried out via differential scanning calorimetry (DSC) on a Mettler Toledo, TA DSC821, in N<sub>2</sub> atmosphere as described herein.

By "viscosity" (η) is meant herein the melt viscosity (in Pa.s ) at  
35 160°C. Viscosity measurements were carried out at 160°C, on a Rheometric Scientific

CT 5 (Rm 265) apparatus (Mettler Toledo). The applied shear-rate is  $70 \text{ s}^{-1}$  and a 30 mm spindle was used.

By "(N)IR lamp" is meant herein denotes both a Near-IR lamp and an IR lamp.

5 For all upper and lower boundaries of any parameters given herein, the boundary value is included in each range for each parameter. All combinations of minimum and maximum values of the parameters described herein may be used to define the parameter ranges for various embodiments and preferences of the invention.

10 In the context of the invention unless stated to the contrary, the disclosure of alternative values for the upper or lower limit of the permitted range of a parameter, coupled with an indication that one of said values is more highly preferred than the other, is to be construed as an implied statement that each intermediate value of said parameter, lying in between the more preferred and the less preferred of said alternatives, is itself preferred to said less preferred value and also to each value lying  
15 between said less preferred value and said intermediate value.

The term "comprising" as used herein means that the list that immediately follows is non exhaustive and may or may not include any other additional suitable items, for example one or more further feature(s), component(s), ingredient(s) and/or substituent(s) as appropriate. "Substantially comprising" as used herein means  
20 a component or list of component(s) is present in a given material in an amount greater than or equal to about 90 % w/w, preferably greater than or equal to 95 % w/w, more preferably greater than or equal to 98 % w/w of the total amount of the given material. The term "consisting of" as used herein mean that the list that follows is exhaustive and does not include additional items.

25 It will be understood that the total sum of any quantities expressed herein as percentages cannot (allowing for rounding errors) exceed 100%. For example the sum of all components of which the composition of the invention (or part(s) thereof) comprises may, when expressed as a weight (or other) percentage of the composition (or the same part(s) thereof), total 100% allowing for rounding errors.  
30 However where a list of components is non exhaustive the sum of the percentage for each of such components may be less than 100% to allow a certain percentage for additional amount(s) of any additional component(s) that may not be explicitly described herein. Unless otherwise stated, the total amount (wt%) of i)+ii) equals 100%.

Unless the context clearly indicates otherwise, as used herein plural forms of the terms herein (for example composition, component, resin, polymer,) are to be construed as including the singular form and vice versa.

## 5 Resins & Blends thereof

The composition of the invention preferably comprises polyester resins, more preferably unsaturated polyester resins, even more preferably polyester resins having di-acid ethylenic unsaturations, most preferably polyester resins having 2-butenedioic acid ethylenic unsaturations. The polyester resins of the invention may  
10 be amorphous or crystalline.

Polyester resins are generally polycondensation products of polyalcohols and polycarboxylic acids. According to the invention a polyester resin is preferably the polycondensation product of polyalcohols and polycarboxylic acids, more preferably a polyester resin is the polycondensation product of dicarboxylic acids,  
15 dialcohols (diols) and trifunctional alcohols or carboxylic acids.

Examples of polycarboxylic acids, especially dicarboxylic acids which may be used in the preparation of a polyester resin include isophthalic acid, terephthalic acid, hexahydroterephthalic acid, 2,6-naphthalenedicarboxylic acid and 4,4'-oxybisbenzoic acid, 3,6-dichlorophthalic acid, tetrachlorophthalic acid,  
20 tetrahydrophthalic acid, hexahydroterephthalic acid, hexachloroendomethylenetetrahydrophthalic acid, endomethylenetetrahydrophthalic acid, phthalic acid, azelaic acid, sebacic acid, decanedicarboxylic acid, adipic acid, succinic acid and trimellitic acid. These illustrative polycarboxylic acids can be used in their acid form or where available, in the form of their anhydrides, acyl chlorides or  
25 lower alkyl esters. Mixtures of polycarboxylic acids can also be used. In addition hydroxycarboxylic acids and lactones can be used. Examples include hydroxypivalic acid and  $\epsilon$ -caprolactone.

Polyalcohols, in particular diols, can be reacted with the carboxylic acids or their analogues as described above to prepare the polyester resin. Examples  
30 of polyalcohols include aliphatic diols, for example, ethylene glycol, propane-1,2-diol, propane-1,3-diol, butane-1,2-diol, butane-1,4-diol, butane- 1,3-diol, 2,2-dimethylpropane-1,3-diol (neopentyl glycol), hexane-2,5-diol, hexane-1,6-diol, 2,2-bis-(4-hydroxycyclohexyl)-propane (hydrogenated bisphenol-A), 1,4-dimethylolcyclohexane, diethylene glycol, dipropylene glycol and 2,2-bis[4-(2-  
35 hydroxyethoxy)-phenyl]propane, the hydroxypivalic ester of neopentylglycol and 4,8-

bis-(hydroxymethyl)tricyclo[5,2,1,0]decane (= tricyclodecane dimethylol) and 2,3-butenediol.

Monofunctional carboxylic acids, for example para-tert-butyl benzoic acid, benzoic acid, methyl benzoic acid, cinnamic acid, crotonic acid may be used to  
5 block the polymer chain.

Trifunctional or more functional alcohols or carboxylic acids can be used to obtain branched polyesters. Examples of suitable trifunctional or more functional alcohols or carboxylic acids include but not limited to glycerol, hexanetriol, trimethylol ethane, trimethylol propane, pentaerythritol and sorbitol, trimellitic acid,  
10 trimellitic acid anhydride, pyromellitic acid dimethylolpropionic acid (DMPA).

The polyesters can be prepared via customary, generally known polymerization methods by conventional esterification and/or transesterification or by esterification and/or transesterification via the use of an enzyme. For example, if needed, customary esterification catalysts such as, for example,  
15 butylchlorotindihydroxide, dibutyltin oxide, tetrabutyl titanate or butyl stannic acid can be used. Examples of amounts of these esterification catalysts used are usually around 0.1 wt% based on the total weight of the polyester resin.

The conditions for preparing a polyester resin and the COOH/OH ratio can be chosen such that end products are obtained which have an acid value or  
20 hydroxyl value which is within the intended range of values.

The polyesters of the compositions of the invention may also have di-acid ethylenic unsaturations. Examples of how to introduce di-acid ethylenic unsaturations, such as 2-butenedioic acid ethylenic unsaturations, in the polyester resin are described herein. The 2-butenedioic acid ethylenic unsaturations may be  
25 present in the backbone of the polyester resin, pendant on the backbone of the polyester resin, at the terminus of the polyester resin or at a combination of these locations. The 2-butenedioic acid ethylenic unsaturation may be built into the polyester resin backbone, for instance by reacting a hydroxyl functional monomer (such as the polyalcohols mentioned herein) with an unsaturated di-acid monomer as mentioned  
30 above. It is also possible to connect the ethylenic unsaturation to the terminus (or termini) of the polyester resin, for example by reacting a hydroxyl functional terminal group of the polyester resin with an unsaturated di-acid as mentioned herein.

Preferably, the resin in the composition of the invention, is a polyester resin having 2-butenedioic acid ethylenic unsaturations said polyester resin is  
35 obtainable from at least the following monomers: 2-butenedioic acid, terephthalic acid,

neopentylglycol and/or propylene glycol. To obtain branched polyesters trifunctional monomers such as trimethylolpropane may be used. Besides 2-butenedioic acid ethylenic unsaturations, the polyester resin may of course also have other di-acid ethylenic unsaturations.

5 Preferably, the polyester resin having 2-butenedioic acid ethylenic unsaturations has an acid value in the range from 0 to 250, for example from 0 to 60 mg KOH/g of said polyester resin. The hydroxyl value of the polyester resin having 2-butenedioic acid ethylenic unsaturations is usually in the range of from 0 to 70 mg KOH per g polyester resin, for example in the range of from 10 to 70 mg KOH/g of said  
10 polyester resin.

In one embodiment of the invention, the polyester resin having 2-butenedioic acid ethylenic unsaturations has an acid value of at least 10 mg KOH/ g of said polyester resin, preferably the acid value is at most 50 mg KOH/g of said polyester resin. This is advantageous as this usually results in a better adhesion to a metal  
15 substrate of a powder coating formed by a composition of the invention comprising said polyester resin.

The polyester resin having 2-butenedioic acid ethylenic unsaturations may be crystalline or amorphous.

The crystallinity in a polymer, for example resin, especially for  
20 example for a polyester resin, may be introduced by using one or more of the following diacids: succinic acid, adipic acid, sebacic acid or dodecanedioic acid, and/or one or more of the following diols: ethyleneglycol, hexanediol, butanediol in the synthesis.

In case the polyester resin having 2-butenedioic acid ethylenic unsaturations is amorphous, the polyester resin preferably has a glass transition  
25 temperature (T<sub>g</sub>) of at least 20 °C, for example a T<sub>g</sub> of at least 25 °C, more preferably at least 40 °C, even more preferably at least 45 °C and/or a T<sub>g</sub> of at most 65 °C, preferably at most 60 °C, for example at most 55 °C, for example at most 50 °C.

In case the polyester resin having 2-butenedioic acid ethylenic unsaturations is amorphous, the Mn of the polyester resin may for example be in the  
30 range of 2,200 Da to 20,000 Da. Preferably, the Mn of the polyester resin is at most 15,000 Da, preferably at most 8,000 Da, more preferably at most 5,000 Da.

In case the polyester resin having 2-butenedioic acid ethylenic unsaturations is amorphous, the theoretical WPU of the polyester resin having 2-butenedioic acid ethylenic unsaturations is preferably at least 250, more preferably at  
35 least 350, for example at least 400 g/mol. Preferably, the theoretical WPU of the



amorphous polyester resin having 2-butenedioic acid ethylenic unsaturations is at most 850, more preferably at most 800, even more preferably at most 750, most preferably at most 725 g/mol.

In case the polyester resin having 2-butenedioic acid ethylenic  
5 unsaturations is crystalline, the polyester resin preferably has a melting temperature ( $T_m$ ) of at least 30 °C, for example a melting temperature of at least 40 °C. Preferably, the  $T_m$  of the crystalline component is not more than 200 °C, more preferably not more than 180 °C, even more preferably not more than 160 °C, even more preferably not more than 140 °C, most preferably not more than 120 °C.

10 In case the polyester resin having 2-butenedioic acid ethylenic unsaturations is crystalline, the theoretical WPU of the polyester resin having 2-butenedioic acid ethylenic unsaturations is preferably at least 250, more preferably at least 350, for example at least 400 g/mol. Preferably, the theoretical WPU of the crystalline polyester resin 2-butenedioic acid ethylenic unsaturations is at most 2000,  
15 more preferably at most 1600, even more preferably at most 1400, most preferably at most 1200, especially at most 1000, more especially at most 850, even more especially at most 800 g/mol, most especially at most 750 g/mol, for example at most 725 g/mol.

Preferably, the theoretical WPU of the amorphous and crystalline  
20 polyester resins having 2-butenedioic acid ethylenic unsaturations is less than 2,500 g/mol.

In case the composition of the invention comprises a polyester resin having di-acid ethylenic unsaturations, said polyester resin being amorphous or crystalline, then its  $M_n$ , WPU, are as exemplified for the crystalline polyester resin having 2-butenedioic acid ethylenic unsaturations. In case the composition of the  
25 invention comprises a polyester resin having di-acid ethylenic unsaturations, said polyester resin is amorphous then its  $T_g$  is as exemplified for the amorphous polyester resin having 2-butenedioic acid ethylenic unsaturations. In case the composition of the invention comprises a polyester resin having di-acid ethylenic unsaturations, said polyester resin is crystalline then its  $T_m$  and  $T_c$  are as exemplified for the crystalline  
30 polyester resin having 2-butenedioic acid ethylenic unsaturations.

In one embodiment of the invention, the composition of the invention may comprise a blend of crystalline and amorphous components. The crystalline component contains all crystalline resins and the amorphous component contains all amorphous resins. Preferably, each of the crystalline and the amorphous component

comprises polyester resins, more preferably each of the crystalline and the amorphous component comprises unsaturated polyester resins.

Preferably, each of the crystalline and the amorphous component substantially comprises polyester resins, more preferably each of the crystalline and  
5 the amorphous component substantially comprises unsaturated polyester resins.

The crystalline component of the invention may for example comprise the polyester resin having 2-butenedioic acid ethylenic unsaturations. The crystalline component of the invention may also comprise another polymer different than the polyester resin having 2-butenedioic acid ethylenic unsaturations, for example an  
10 unsaturated polyester resin having for example itaconic acid and/or itaconic acid anhydride ethylenic unsaturations or an unsaturated polyester resin having di-acid ethylenic unsaturations. The crystalline component of the invention may for example comprise a saturated polymer, for example a saturated polyester resin. Preferably the crystalline component is substantially free of saturated resins and/or saturated  
15 polymers.

The amorphous component of the invention may for example comprise the polyester resin having 2-butenedioic acid ethylenic unsaturations. The amorphous component of the invention may also comprise another polymer different than the polyester resin having 2-butenedioic acid ethylenic unsaturations, for example  
20 an unsaturated polyester resin having for example itaconic acid and/or itaconic acid anhydride ethylenic unsaturations or an unsaturated polyester resin having di-acid ethylenic unsaturations. The amorphous component of the invention may for example comprise a saturated polymer, for example a saturated polyester resin. Preferably the amorphous component is substantially free of saturated resins and/or saturated  
25 polymers.

In case a crosslinking agent is present in the composition of the invention, then depending whether the crosslinking agent is amorphous or crystalline, said crosslinking agent can form part of either the amorphous or the crystalline component of the composition. An example of a crosslinking agent that is crystalline, is  
30 a crystalline vinyl ether.

Preferably, in case the composition of the invention comprises a blend of crystalline and amorphous components, the amount of the crystalline component is preferably at least 7.5, more preferably at least 10, even more preferably at least 15, most preferably at least 17.5, especially at least 20, more especially at least  
35 25 wt% based on the total amount of resins. Preferably the amount of the crystalline

component is at most 90, more preferably at most 80, even more preferably at most 75, most preferably at most 70, especially at most 65, more especially at most 60, most especially at most 55, for example at most 50, for example at most 40 wt% based on the total amount of resins.

5                   Consequently, the amount of amorphous component in case the composition of the invention comprises a blend of crystalline and amorphous components, is preferably at least 10, more preferably at least 20, even more preferably at least 25, most preferably at least 30, especially at least 35, more especially at least 40, most especially at least 45, for example at least 50, for example  
10 at least 60 wt% based on the total amount of resins. Preferably the amount of the amorphous component is at most 92.5, more preferably at most 90, even more preferably at most 85, most preferably at most 82.5, especially at most 80, more especially at most 75 wt% based on the total amount of resins.

                  Preferably, the amorphous component comprises a polyester having  
15 di-acid ethylenic unsaturations. Preferably the amorphous component comprises a polyester resin having 2-butenedioic acid ethylenic unsaturations. Even more preferably, the amorphous component is the polyester resin having 2-butenedioic acid ethylenic unsaturations. Preferably, the crystalline component comprises a polyester having di-acid ethylenic unsaturations. Preferably the crystalline component comprises  
20 a polyester resin having 2-butenedioic acid ethylenic unsaturations. Even more preferably the crystalline component is the polyester resin having 2-butenedioic acid ethylenic unsaturations.

                  Preferably, the theoretical weight per ethylenic unsaturation of the blended amorphous and crystalline components in the composition of the invention is  
25 less than 2,500 g/mol.

                  The crystallization temperature ( $T_c$ ) of the crystalline component in a blend with other components is lower than its  $T_m$ . Preferably the  $T_c$  of the crystalline component is at least 20 °C, for example at least 25 °C, for example at least 40 °C. Preferably, the  $T_c$  of the crystalline component is at most 55 °C lower than its  $T_m$ .

30                   The amorphous component preferably has a glass transition temperature ( $T_g$ ) of at least 20 °C, for example a  $T_g$  of at least 25 °C, more preferably at least 40 °C, even more preferably at least 45 °C and/or a  $T_g$  of at most 65 °C, preferably at most 60 °C, for example at most 55 °C, for example at most 50 °C.

                  Preferably, in case the composition of the invention comprises a  
35 blend of crystalline and amorphous components, the  $T_g$  of said blend (without the

thermal initiation system) is at least 5 °C, for example at least 20 °C, for example at least 25 °C and/or preferably at most 130 °C, for example at most 100 °C.

In case the blended amorphous and crystalline components have more than one Tg, the difference between the highest and the lowest Tg is preferably  
5 not more than 20, for example not more than 10 °C.

In another aspect, the invention provides for a heat-curable powder coating composition as described herein wherein the

$$\frac{\Delta Hm_{\text{cryst.resin}} - \Delta Hm_{\text{blend}}}{\Delta Hm_{\text{cryst.resin}}} \cdot 0.01 * A * 100\% \quad (\text{III})$$

is preferably less than 50 %, for example less than 40 %, less than 30 %, less than 20  
10 %.

In the above formula (III),  $\Delta Hm_{\text{cryst.resin}}$  is the  $\Delta Hm$  of the crystalline component as determined using the method described herein;  $\Delta Hm_{\text{blend}}$  is the  $\Delta Hm$  of the blend of the amorphous and the crystalline component as determined using the method described herein; A is the amount of crystalline component in wt% relative to  
15 the total amount of resins.

#### Crosslinking Agent

EP 0636669 B1 teaches that besides a polymer having a degree of unsaturation between about 300 and 1800 gram per mole (g/mol) unsaturated group  
20 (WPU), also a crosslinking agent having at least two vinylether or vinylester functional groups per molecule needs to be present. However, it has surprisingly been found that when curing a composition of the invention using heat cure, the presence of such crosslinking agent is not required to obtain a cure to an acceptable degree.

The composition of the invention may be substantially free of a  
25 crosslinking agent. A crosslinking agent may be for example a crosslinking agent chosen from the group of allyls, acrylates, methacrylates, vinylesters, vinylethers, vinyl amides, alkyne ethers, alkyne esters, alkyne amides, alkyne amines, propargyl ethers, propargyl esters, itaconates, enamines, thiols and mixtures thereof.

In case a crosslinking agent is present in the composition, then the  
30 crosslinking agent may be amorphous or crystalline. An example of an amorphous crosslinking agent is given in the Examples. An example of a crystalline crosslinking agent is Uracross<sup>TM</sup> P3307. If present in the composition, then preferably the crosslinking agent is non-volatile at the temperatures and pressures used when

processing, applying and storing the powder coating composition. More preferably, the crosslinking agent is preferably solid at room temperature. Preferred crosslinking agents according to the invention have an Mn of less than 2,200 Da. More preferably the crosslinking agents according to the invention have an Mn of at least 200 and less than 2,200 Da, even more preferably of at least 400 and less than 2,200 Da. If present a crosslinking agent is present in the composition of the invention then the preferred crosslinking agent is vinylester or vinyl ether.

In case, the crosslinking agent is a vinylester or a vinyl ether, the acid value of the polyester having 2-butenedioic acid ethylenic unsaturations is preferably less than 5 mg KOH per g polyester, more preferably less than 2 mg KOH per g polyester. In case the crosslinking agent in the composition of the invention is different from a vinyl ether and a vinylester, then the polyester having 2-butenedioic acid ethylenic unsaturations may preferably have a higher acid value (for example of 10 mg KOH/g polyester). These preferred combinations of features may result in a powder coating having a better adhesion, especially to metal substrates.

If a crosslinking agent is present in the composition, the theoretical weight per unsaturation of the crosslinking agent is at most 1,100 g/mole, preferably at most 870 g/mole, for example at most 680 g/mole, for example at most 650 g/mole, for example at most 630 g/mole and/or preferably at least 70, more preferably at least 100, for example at least 150 g/mole.

#### Thermal initiation system of the composition

The thermal initiation system of the composition comprises at least a peroxide (a) which is chosen from the group of peresters and monopercarbonates according to formula (I) and peranhydrides of formula (II) and/or combinations thereof, optionally other thermal radical initiator such as for example perether, hydroperoxides, perketal and/or dipercarbonate in addition to said peroxide, optionally a catalyst (commonly known in the art as accelerator) (b) for the peroxide, optionally an inhibitor (c) for the peroxide.


The peroxides of formulae (I) and (II) and the perethers, hydroperoxides, perketals and dipercarbonates are thermal radical initiators.

Upon heating, the peroxide in the thermal initiation system, generates (free) radicals able to initiate radical crosslinking in the composition of the invention.

As "the peroxide" is understood herein the peroxide chosen from the group of peresters and monopercarbonates according to formula (I) and peranhydrides of formula (II) and/or combinations thereof.


5 a. Peroxide

The composition of the invention comprises at least a peroxide which is chosen from the from the group of peresters and monopercarbonates according to formula (I)

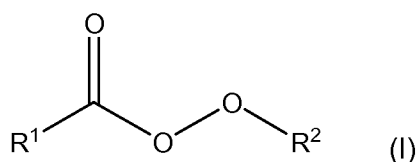

- 10 wherein R<sup>1</sup> represents an optionally substituted C<sub>1-20</sub>alkyl, a C<sub>6-20</sub>aryl or for OR<sup>5</sup>, wherein R<sup>5</sup> represents an optionally substituted C<sub>1-20</sub>alkyl or for an optionally substituted C<sub>6-20</sub>aryl; R<sup>2</sup> represents an optionally substituted C<sub>1-20</sub>alkyl or for an optionally substituted C<sub>6-20</sub>aryl;

and peranhydrides of formula (II)

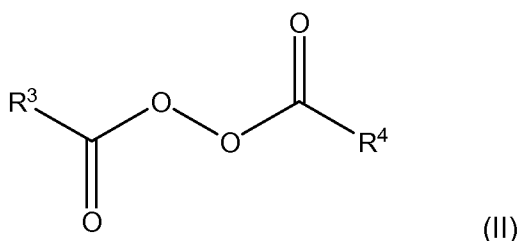

- 15 wherein R<sup>3</sup> and R<sup>4</sup> each independently stand for an optionally substituted C<sub>1-20</sub>alkyl, a C<sub>6-20</sub>aryl or for OR<sup>6</sup>, wherein R<sup>6</sup> represents an optionally substituted C<sub>1-10</sub>alkyl or a C<sub>6-20</sub>aryl; and any combination of peroxides according to formula (I) and formula (II).

Preferably R<sup>2</sup> in formula (I) represents tert-butyl.

- 20 Examples of peresters and monopercarbonates according to formula (I) include peresters, for example tert-butyl peroxybenzoate (Trigonox C), tert-butyl peroxyacetate (Trigonox F-C50), tert-amyl peroxybenzoate (Trigonox 127), tert-amyl peroxyacetate (Trigonox 133-CK60), tert-butyl-2-ethylhexanoate (Trigonox 21S), tert-butylperoxydiethylacetate (Trigonox 27), di-tert-butylperoxypivalate (Trigonox 25-C75),  
 25 tert-butyl peroxyneohexanoate (Trigonox 257-C75), cumylperoxyneodecanoate (Trigonox 99-C75), 2-ethylhexyl perlaurate or mixtures thereof; and monopercarbonates, for example tert-butyl peroxy-2-ethylhexylcarbonate (Trigonox

117), tert-butyl peroxyisopropylcarbonate (Trigonox BPIC75), tert-amylperoxy-2-ethylhexylcarbonate (Trigonox 131) and mixtures thereof.

Preferably, a perester is used, for example tert-butyl peresters, for example tert-butyl peroxybenzoate (Trigonox C) [ $R^1$  represents phenyl and  $R^2$  represents t-butyl in formula (I)].

Examples of peranhydrides of formula (II) include for example dibenzoylperoxide, dilauroylperoxide, didecanoylperoxide (Perkadox SE-10), di(3,5,5-trimethylhexanoyl)peroxide (Trigonox 36-C75) and mixtures thereof. It should be noted that Trigonox, and Perkadox are trademarks of Akzo Nobel.

Preferably, as a peranhydride dibenzoylperoxide ( $R^3$  and  $R^4$  in formula (II) both stand for phenyl) or dilauroylperoxide ( $R^3$  and  $R^4$  in formula (II) both stand for undecane) is present in the composition of the invention.

The terms 'optional substituent' and/or 'optionally substituted' as used herein (unless followed by a list of other substituents) signifies one or more of an 'organic group'. The term 'organic substituent' as used herein denotes any univalent or multivalent moiety (optionally attached to one or more other moieties) which comprises one or more carbon atoms and optionally one or more other heteroatoms. Organic groups may comprise organoheteryl groups (also known as organoelement groups) which comprise univalent groups containing carbon, which are thus organic, but which have their free valence at an atom other than carbon (for example organothio groups). Organic groups may alternatively or additionally comprise organyl groups which comprise any organic substituent group, regardless of functional type, having one free valence at a carbon atom. Organic groups may also comprise heterocyclyl groups which comprise univalent groups formed by removing a hydrogen atom from any ring atom of a heterocyclic compound: (a cyclic compound having as ring members atoms of at least two different elements, in this case one being carbon). Preferably the non carbon atoms in an organic group may be selected from: hydrogen, halo, phosphorus, nitrogen, oxygen, silicon and/or sulphur, more preferably from hydrogen, nitrogen, oxygen, phosphorus and/or sulphur. Most preferred organic groups comprise one or more of the following carbon containing moieties: alkyl, alkoxy, alkanoyl, carboxy, carbonyl, formyl and/or combinations thereof; optionally in combination with one or more of the following heteroatom containing moieties: oxy, thio, sulphinyl, sulphonyl, amino, imino, nitrilo and/or combinations thereof. Organic groups include all chemically possible combinations in the same moiety of a plurality (preferably two) of the

aforementioned carbon containing and/or heteroatom moieties (e.g. alkoxy and carbonyl if directly attached to each other represent an alkoxy carbonyl group).

The composition of the invention may comprise also other thermal radical initiators besides the peresters and/or monopercarbonates of formula (I) and/or peranhydrides of formula (II), such as for example perethers, hydroperoxides, perketals, dipercarbonates or azo compounds.

Preferably the peroxide is chosen from the group of peresters and monopercarbonates according to formula (I) and peranhydrides of formula (II) and/or any combination of peroxides according to formula (I) and formula (II) thereof.

More preferably the peroxide is chosen from the group of peresters and monocarbonates according to formula (I).

The amount of peroxide in the composition of the invention is at least 0.65, preferably at least 0.7, more preferably at least 0.75, even more preferably at least 0.8, most preferably at least 0.9, especially 1, more especially at least 1.2, even more especially at least 1.5, most especially at least 2 wt% on the total amount of resins. The amount of peroxide is preferably less than 10, more preferably less than 8, even more preferably less than 7, most preferably less than 6 wt% on total amount of resins.

An alternative method to calculate the amount of peroxide in the composition of the invention is based on the weight of peroxide calculated on the total weight of resins normalized to 100 parts of resins. According to this method, the amount of peroxide is at least 0.65, preferably at least 0.7, more preferably at least 0.75, even more preferably at least 0.8, most preferably at least 0.9, especially 1, more especially at least 1.2, even more especially at least 1.5, most especially at least 2 pph. The amount of peroxide is preferably less than 10, more preferably less than 8, even more preferably less than 7, most preferably less than 6 pph.

#### b. Catalyst (accelerator)

The composition of the invention may also comprise a catalyst also indicated herein as accelerator, for the thermal radical initiator for example the peroxide. An accelerator may for example be a transition metal compound.

Therefore, the invention also relates to a composition of the invention of the invention, wherein the initiation system comprises a peroxide according to formula (I) and a transition metal compound.



The accelerator may be chosen from the group of transition metal compounds of transition metals with atomic numbers from/equal to 21 and up to/equal to 79. In chemistry and physics, the atomic number (also known as the proton number) is the number of protons found in the nucleus of an atom. It is traditionally represented by the symbol Z. The atomic number uniquely identifies a chemical element. In an atom of neutral charge, the atomic number is equal to the number of electrons. Examples of suitable transition metal compounds are those of the following transition metals Sc, Ti, V, Cr, Mn, Fe, Co, Ni, Cu, Zn, Mo, W, etc., preferably Mn, Fe, Co or Cu.

The transition metal compounds are preferably chosen from the group of transition metal salts or complexes or mixtures thereof, preferably from the group of organic metal salts or complexes, most preferably organic acid metal salts or derivatives thereof, for example transition metal carboxylates or transition metal acetoacetates, for example transition metal ethylhexanoate. If a copper compound is used, it may for example be in the form of a  $\text{Cu}^+$  salt or a  $\text{Cu}^{2+}$  salt. If a manganese compound is used, it may for example be in the form of a  $\text{Mn}^{2+}$  salt or a  $\text{Mn}^{3+}$  salt. If a cobalt compound is used, it may for example be in the form of a  $\text{Co}^{2+}$  salt.

The optimal amount of transition metal catalyst is dependent on the choice of transition metal catalyst and of the peroxide, but can easily be determined by the person skilled in the art through routine experimentation. Generally, the amount of transition metal catalyst may be chosen in the range of from 0.00001 to 25 mmol transition metal catalyst/kg total amount of resins.

The amount of thermal radical initiator for example the amount of the peroxide and the catalyst for the thermal radical initiator used, is preferably chosen such that when the composition of the invention cures to an acceptable degree at low temperatures.

### c. Inhibitor

The composition of the invention may further comprise an inhibitor for the peroxide and any other thermal radical initiator optionally present in the composition of the invention.

Examples of inhibitors are preferably chosen from the group of phenolic compounds, stable radicals, catechols, phenothiazines, hydroquinones, benzoquinones or mixtures thereof.

Examples of phenolic compounds include 2-methoxyphenol, 4-methoxyphenol, 2,6-di-t-butyl-4-methylphenol, 2,6-di-t-butylphenol, 2,6-di-6-butyl-4-

ethyl phenol, 2,4,6-trimethyl-phenol, 2,4,6-tris-dimethylaminomethyl phenol, 4,4'-thio-bis(3-methyl-6-t-butylphenol), 4,4'-isopropylidene diphenol, 2,4-di-t-butylphenol and 6,6'-di-t-butyl-2,2'-methylene di-p-cresol.

Examples of stable radicals include

- 5 1-oxyl-2,2,6,6-tetramethylpiperidine, 1-oxyl-2,2,6,6-tetramethylpiperidine-4-ol (a compound also referred to as TEMPOL), 1-oxyl-2,2,6,6-tetramethylpiperidine-4-one (a compound also referred to as TEMPON), 1-oxyl-2,2,6,6-tetramethyl-4-carboxyl-piperidine (a compound also referred to as 4-carboxy-TEMPO), 1-oxyl-2,2,5,5-tetramethylpyrrolidine, 1-oxyl-2,2,5,5-tetramethyl-3-  
10 carboxylpyrrolidine (also called 3-carboxy-PROXYL and galvinoxyl (2,6-di-tert-butyl- $\alpha$ -(3,5-di-tert-butyl-4-oxo-2,5-cyclohexadien-1-ylidene)-p-tolyloxy).

Examples of catechols include catechol, 4-t-butylcatechol, and 3,5-di-t-butylcatechol.

Examples of hydroquinones include hydroquinone,

- 15 2-methylhydroquinone, 2-t-butylhydroquinone, 2,5-di-t-butylhydroquinone, 2,6-di-t-butylhydroquinone, 2,6-dimethylhydroquinone and 2,3,5-trimethylhydroquinone.

Examples of benzoquinones include benzoquinone, 2,3,5,6-tetrachloro-1,4-benzoquinone, methylbenzoquinone, 2,6-dimethylbenzoquinone, and naphthoquinone.

- 20 Other suitable inhibitors may for example be chosen from the group of an aluminium-N-nitrosophenyl hydroxylamine, a diethylhydroxylamine and a phenothiazine.

- It is also possible to use a mixture of (the above mentioned) inhibitors. Preferably as an inhibitor hydroquinones or catechols are used, depending  
25 on the choice of (type and amount of) transition metal compound, more preferably the inhibitor is a hydroquinone.

In another embodiment, the invention provides for a composition of the invention, wherein the inhibitor is a hydroquinone.

### 30 1k and/or 2k Compositions

The compositions of the invention may be a one component system, but may also be a two component system. Preferably, the composition of the invention is one component system.

- 35 With a 'one component system', also called a 1K system, is meant that all (reactive) components of the powder coating composition form part of one

powder. In a two component system, also called 2K system, a powder coating composition is composed of at least two different powders with different chemical compositions, which keeps the reactive components physically separated. The at least two different powders may be mixed in a physical blend before the composition of the invention is put in the storage container or may be mixed just before applying the 2K system to a substrate to let a curing reaction take place. The compositions of the at least two different powders in the 2K system are usually selected such that each powder contains an ingredient which is needed for curing but is absent from the other powder(s). This separation allows preparation of the individual powder composition in a heated state (such as by melt mixing) without the initiation of the cure reaction.

The composition of the invention may optionally comprise the usual additives, such as for example waxes, pigments, fillers degassing agents, flow (smoothness) agents, appearance enhancing agents or (light) stabilizers. It should be noted that none of these usual additives are considered to be transition metal compounds. The pigments may be inorganic or organic. Suitable inorganic pigments include for example, titanium dioxide, zinc sulphide, zinc phosphate, mica, iron oxide and /or chromium oxide. Suitable organic pigments include for example azo compounds. Suitable fillers include for example metal oxides, silicates, carbonates and sulphates. Suitable stabilizers include for example primary and/or secondary antioxidants and UV stabilizers for example quinones, (sterically hindered) phenolic compounds, phosphonites, phosphites, thioethers and HALS (hindered amine light stabilizers). Examples of suitable degassing agents include cyclohexane dimethanol bisbenzoate, benzoin and benzoin derivatives such as for example those described in WO02/50194. Examples of flow agents include Byk<sup>TM</sup> 361 N. Other additives, such as additives for improving tribo-chargeability may also be added.

Nucleating agents may also be present in the composition of the invention in order to facilitate the crystallization of the crystalline component in the blend.

Any feature or preferred combination of features or preferred combination of ranges disclosed in the invention and regard the composition of the invention for example resins, blends of resins, thermal initiation system, crosslinking agent, can be combined.

Methods of: a) preparation of the composition of the invention and b) coating a substrate with a composition of the invention

A common way to prepare a powder coating composition is to mix the separately weighed-out components in a premixer, heat the obtained premix, for  
5 example in a kneader, preferably in an extruder to obtain an extrudate, cool down the obtained extrudate until it solidifies and crush it into granules or flakes that are further ground to reduce the particle size followed by appropriate classification to obtain a powder coating composition of the right particle size.

Therefore the invention also relates to a process for the preparation  
10 of a heat-curable powder coating composition as defined herein comprising the steps of:

- a. mixing the components of the heat-curable powder coating composition to obtain a premix;
- b. heating the premix, preferably in an extruder, to obtain an extrudate;
- 15 c. cooling down the extrudate to obtain a solidified extrudate; and
- d. grinding the solidified extrudate into smaller particles to obtain the heat-curable powder coating composition.

Preferably, the premix is heated to a temperature at least 5 °C, more preferably at least 10 °C below the temperature at which it is intended to cure the  
20 powder coating composition. If the premix is heated in an extruder, it is preferred to use a temperature control in order to avoid too high temperatures that could lead to curing of the composition of the invention in the extruder.

In another aspect, the invention relates to a process for coating a substrate comprising the steps of:

- 25 a. applying a heat-curable powder coating composition as defined herein, to a substrate;
- b. heating the substrate.

The composition of the invention may be applied using the techniques known to the person skilled in the art, for example using electrostatic spray or  
30 electrostatic fluidized bed or flame spray.

Heating of the coated substrate may be done using conventional methods, such as with a convection oven and/or with an (N)IR lamp. Even microwave equipment may be used to heat the substrate.

The time during which the composition of the invention is at least  
35 partially cured is preferably below 60 minutes and usually above 1 minute in case a

convection oven is used to heat the coating. More preferably, the curing time is below 40 minutes, even more preferably is at most 30 minutes, most preferably is at most 20 minutes, especially is at most 10 minutes.

The temperature, at which the composition of the invention is cured,  
5 is preferably in the range of 60 to 225 °C, more preferably in the range 60 to 130 °C, even more preferably 80 to 120 °C. Preferably, the curing temperature is lower than 130 °C, more preferably lower than 120 °C, even more preferably lower than 110 °C, most preferably lower than 100 °C, most preferably lower than 95 °C. Preferably, the curing temperature is at least 65 °C, more preferably 70 °C, even more preferably at  
10 least 75 °C.

For example, the curing time and curing temperature of a composition of the invention may be 20 minutes at 130 °C, preferably 10 minutes at 130 °C.

#### Other embodiments and aspects of the invention

15 In another aspect, the invention relates to the use of a composition according to the invention to coat a substrate or an article.

In another aspect, the invention relates to the use of a composition according to the invention to fully or partially coat a substrate.

In another embodiment the invention relates to the use of a  
20 composition of the invention to coat a heat-sensitive substrate, preferably wood for example low density fibre board, medium density fibreboard and high density fibreboard, plastic, etc., or combinations thereof.

In another aspect, the invention relates to a substrate that is fully or partially coated with the composition of the invention.

25 In another aspect, the invention relates to a substrate that is fully or partially coated with a coating prepared from the composition of the invention.

In one embodiment of the invention the substrate is a non heat-sensitive substrate, for example glass, ceramic, fibre cement board, or metal, for example aluminum, copper or steel, preferably metal.

30 In another embodiment of the invention, the substrate is a heat-sensitive substrate.

In yet another embodiment, the invention provides for a use of the composition of the invention to coat a heat-sensitive substrate and/or a non heat-sensitive substrate.

In yet another embodiment, the invention provides for a use of the composition of the invention to coat a substrate wherein the substrate is a heat-sensitive substrate, for example wood or plastic or wherein the substrate is a non-heat sensitive substrate, for example metal.

5 Heat-sensitive substrates include plastic substrates, wood substrates, for example solid wood, such as for example: hard wood, soft wood, plywood; veneer, particle board, low density fibre board, medium density fibreboard and high density fibreboard, OSB (Oriented Strand Board) wood laminates, chipboard and other substrate in which wood is a important constituent, such as for example foil covered  
10 wooden substrates, engineered wood, plastic modified wood, plastic substrates or wood plastic compounds (WPC); substrates with cellulosic fibres, for example cardboard or paper substrates; textile and leather substrates. Examples of plastic substrates include unsaturated polyester resin based compositions, ABS (acrylonitril butadiene styrene), melamine-formaldehyde resins, polycarbonate, polyethylene,  
15 polypropylene, ethylene-propylene-diene monomer (EPDM), thermoplastic olefin (TPO), polyurethane (PU), polypropylene oxide (PPO), polyethylene oxide (PEO), polyethyleneterephthalate and nylon, for example polyamide 6,6 and combinations thereof, for example polycarbonate-ABS.

Other heat-sensitive substrates include objects that are a combination  
20 of a metal substrate with a heat-sensitive part, such as plastic hosing, heavy metal parts, strips, for example aluminium frames with heat strips etc.

Other substrates that are particularly suitable for coating with the powder coating of the invention are those where a low temperature cure is desired for efficient production, such as heavy metal parts.


25 Specific wood coating markets where the composition of the invention may be used include domestic furniture, such as tables, chairs, cabinets, etc., bedroom and bathroom furniture, office furniture, contract furniture such as school and child furniture, hospital furniture, restaurant and hotel furniture, kitchen cabinets and furniture, (flat) panels for interior design, interior and exterior windows and doors,  
30 interior and exterior window frames and door frames, exterior and interior sidings and wooden flooring.

Specific plastic coating markets where the composition of the invention may be used include automotive applications, such as interior car parts, wheel covers, bumpers, under the hood parts etc, flexible flooring, sporting goods,


cosmetics, audio-visual applications, such as TV sets, computer housing, phones, etc., household appliances and satellite dishes.

In yet another embodiment, the invention provides for a heat-curable powder coating composition, wherein the powder coating composition comprises a blend of (semi)crystalline and amorphous components.

In another embodiment the invention provides for a heat-curable powder coating composition comprising an unsaturated resin and an thermal initiation system, wherein the unsaturated resin is a polyester having fumaric acid based unsaturations wherein the theoretical weight per unsaturation of the unsaturated resin is at most 850 g/mol resin wherein the thermal initiation system comprises a peroxide which is chosen from the group of peresters and monopercarbonates according to formula (I)

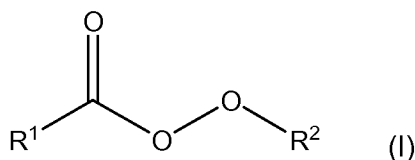

wherein  $\text{R}^1$  represents an optionally substituted  $\text{C}_{1-20}$ alkyl, a  $\text{C}_{6-20}$ aryl or for  $\text{OR}^5$ , wherein  $\text{R}^5$  represents an optionally substituted  $\text{C}_{1-20}$ alkyl or for an optionally substituted  $\text{C}_{6-20}$ aryl;  $\text{R}^2$  represents an optionally substituted  $\text{C}_{1-20}$ alkyl or for an optionally substituted  $\text{C}_{6-20}$ aryl; and peranhydrides of formula (II)

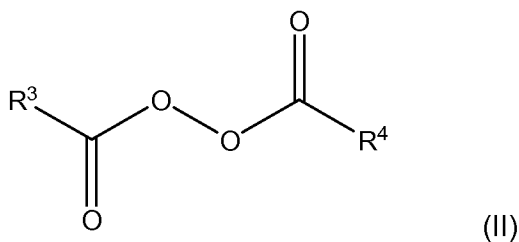

wherein  $\text{R}^3$  and  $\text{R}^4$  each independently stand for an optionally substituted  $\text{C}_{1-20}$ alkyl, a  $\text{C}_{6-20}$ aryl or for  $\text{OR}^6$ , wherein  $\text{R}^6$  represents an optionally substituted  $\text{C}_{1-10}$ alkyl or a  $\text{C}_{6-20}$ aryl and any combinations thereof; wherein the amount of peroxide is at least 0.8 wt% based on the total amount of resins.

In a another embodiment the invention provides for a heat-curable powder coating composition, wherein the polyester having fumaric acid based unsaturations has an acid value of at least 10 mg KOH/g polyester.

Many other variations embodiments of the invention will be apparent to those skilled in the art and such variations are contemplated within the broad scope of the present invention.

All embodiments disclosed herein may be combined with each other  
5 and/or with preferred elements of the present invention.

Further aspects of the invention and preferred features thereof are given in the claims herein.

The invention will now be described in detail with reference to the following non limiting examples which are by way of illustration only.

10

#### Examples

In the Examples section, the abbreviation PE represents polyester resin, the abbreviation PCC represents powder coating composition and the abbreviation PC represents powder coating.

15

In the Examples section the abbreviation "Comp" denotes a Comparative Example of either a powder coating composition e.g. CompPCC1, or a powder coating e.g. CompPC1.

In Tables 3-6, the abbreviation "n.m." denotes "not measured".

20

In Tables 6, the abbreviation "n.p.e" denotes "not possible to extrude".

#### Analytical Methods and Techniques for the measurement of the properties of the Polyesters Resins used in the Heat-Curable Powder Coating Compositions

The glass transition temperature ( $T_g$ ) (inflection point), of the  
25 crystallization temperature ( $T_c$ ), the melting temperature ( $T_m$ ) and the melting enthalpy ( $\Delta H_m$ ) were measured via Differential Scanning Calorimetry (DSC) on a Mettler Toledo, TA DSC821 apparatus, in  $N_2$  atmosphere as described herein after: A sample of 10 mg was placed in the DSC apparatus. The sample was brought to 25 °C. In the first heating curve, the sample was heated to 150 °C with a heating rate of 5 °C/min. The  
30 sample was kept at 150 °C for 1 min. The sample was subsequently cooled to -50 °C with a cooling rate of 5 °C /min, resulting in a cooling curve. After reaching -50 °C the sample was immediately heated to 150 °C with a heating rate of 5 °C/min, affording a second heating curve. The  $T_c$  was measured from the cooling curve (150 °C to -50 °C, cooling rate 5 °C/min) whereas the  $T_g$ ,  $T_m$  and  $\Delta H_m$  were determined from the second  
35 heating curve (-50 °C to 150 °C, heating rate of 5 °C/min).



Unless otherwise stated the theoretical number average molecular weight ( $M_n$ ) is defined as follows:

$$M_n = (\sum_i N_i M_i) / (\sum_i N_i)$$

where  $N_i$  is the number of molecules of molecular weight  $M_i$ .

- 5                    The  $M_n$  is calculated (theoretical value) by multiplying the targeted functionality (f) with 56110 and dividing the outcome thereof by the sum of the targeted acid value (AV) (mg KOH/g of the polyester) and the targeted hydroxyl value (OHV) (mg KOH/g of the polyester) according to the following equation:

$$M_n = (56110 \times f) / (AV + OHV)$$

- 10                   The  $M_n$  can also be measured (measured  $M_n$ ), for example by determining the molecular weight ( $M_n$ ) in tetrahydrofuran using GPC according to ISO 13885-1 employing polystyrene standards and appropriate columns designed for the determination of the molecular weights.

- 15                   Viscosity measurements were carried out at 160 °C, on a Rheometric Scientific CT 5 (Rm 265) apparatus (Mettler Toledo). A 30 mm spindle was used. The applied shear-rate was 70s<sup>-1</sup>.

The acid and hydroxyl values of the polyester resins were determined titrimetrically according to ISO 2114-2000 and ISO 4629-1978, respectively or were determined theoretically.

- 20                   The weight per ethylenic unsaturation was also determined via <sup>1</sup>H-NMR on a 300 MHz Varian NMR-spectrometer using pyrazine as internal standard (measured WPU). Recorded spectra were analyzed in full with ACD software and peak areas of all peaks were calculated.

- 25                   The weight resin per mole unsaturation was calculated with the following formula:

$$WPU = \left[ \frac{W_{pyr}}{W_{resin}} \frac{1}{MW_{pyr}} \frac{A_{C=C} / N_{C=C}}{A_{pyr} / N_{pyr}} \right]^{-1}$$

- 30                    $W_{pyr}$  and  $W_{resin}$  are weights pyrazine (is internal standard) and resin, respectively, expressed in the same units.  $MW_{pyr}$  is molecular weight pyrazine (= 80 gr/mole).  $A_{C=C}$  is the peak area for hydrogens attached to the carbon carbon double bonds of the reactive unsaturations (C=C component) in the resin;  $N_{C=C}$  is the number of hydrogens of that particular C=C component.  $A_{pyr}$  is the peak area for pyrazine and  $N_{pyr}$  is the number of hydrogens (= 4).

Methods for the measurement of properties of the powder coatings derived upon heat-curing of the heat-curable powder coating compositions prepared herein.

The properties of the powder coatings of the powder coatings corresponding to the heat-curable compositions presented in Table 3 were measured on panels cured for 20 minutes.

The properties of the powder coatings of the powder coatings corresponding to the heat-curable compositions presented in Tables 4-6 were measured on panels cured for 10 minutes.

The minimum depth (mm) of indentation to cause failure [commonly known also as Erichsen Slow Penetration (ESP)] was determined according to ISO 1520:2006 (Cupping Test, especially §7.3), 24 hours after curing the panels with the heat-curable powder coating compositions as described herein. The minimum depth of indentation to cause failure was determined for coated panels cured at 130°C. ISO 1520:2006 specifies an empirical test procedure for assessing the resistance of a coating to cracking and/or detachment from a metal substrate when subjected to gradual deformation by indentation under standard conditions. The method was carried out by gradually increasing the depth of indentation to determine the minimum depth (mm) at which the coating cracks and/or becomes detached from the substrate. The maximum of two valid measurements of the minimum depth of indentation to cause failure was reported.

The adhesion was determined using a cross-cut test ('Gitterschnitt') in accordance with ISO 2409 (edition 3, dated 15 May 2007) at 130 °C. The degree of adhesion of the coating onto the substrate was classified with a scale from G0 to G5; with G0: cross-cut area was not affected (excellent adhesion); G1 means that the affected cross-cut area is significantly greater than 5 %; G2 means that the affected cross-cut area is significantly greater than 5 % but not significantly greater than 15 %; G3 means that the affected cross-cut area is significantly greater than 15 % but not significantly greater than 35 %; G4 means that the affected cross-cut area is significantly greater than 35 % but not significantly greater than 65 %; G5 means any degree of flaking that cannot even be classified by classification G4 (very poor adhesion). For the heat-curable powder coating compositions of the invention, their corresponding powder coatings presenting adhesion ranging from G0 to G3. More preferred powder coatings have adhesion ranging from G0 to G2.

Acetone double rubs (ADR) were carried out as described herein to determine the curing. For the purpose of the invention with one acetone double rub

(ADR) is meant one back and forward movement over the surface of a coating having a thickness of approximately 60  $\mu\text{m}$  using a cotton cloth drenched in acetone, which cotton cloth covers a hammer head having a weight of 980 gram and a contact surface area with the coating of 2  $\text{cm}^2$ . Every 20 rubs the cloth is drenched in acetone. The measurement is continued until either the coating is removed (and the obtained ADR number and curing temperature are noted down) or until 100 ADR are reached. In the context of the invention, the measurement was carried out on panels cured at various curing temperatures for example at curing temperatures in the range of 80-180  $^{\circ}\text{C}$  with an increment of 10  $^{\circ}\text{C}$ . The lower curing temperature at which 100 ADR were reached was reported herein. In certain cases, the coating was completely removed at the tested curing temperatures; therefore no specific temperature was reported. In the context of the invention, by "cure to an acceptable degree at low temperatures" is meant that the powder coating when cured at most 130 $^{\circ}\text{C}$  for at most 20 minutes, is able to resist at least 100 acetone double rubs (ADR). The curing temperature (in  $^{\circ}\text{C}$ ) at which the powder coating composition can withstand at least 100 ADR was reported (temperature for 100 ADR).

The coating thickness was measured by a PosiTector 6000 coating thickness gage from DeFelsko Corporation.

## 20 Unsaturated Polyester Resins

The monomers used for the preparation of the unsaturated polyester resins are presented in Table 1. Table 1 presents also the properties of the prepared unsaturated polyester resins.

## 25 Synthesis of amorphous polyester resins having 2-butenedioic acid ethylenic unsaturations (PE1- PE12)

### Polyester resins PE1, PE2 and PE7

A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (all the (poly)alcohols and terephthalic acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 220  $^{\circ}\text{C}$ . Subsequently, for the second step fumaric acid together with a small amount of radical inhibitor was added at a temperature of 180  $^{\circ}\text{C}$  followed by esterification at 205  $^{\circ}\text{C}$ . When an acid value of less than approximately 15 mg KOH/g

resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 205 °C till an acid value of approximately 5 mg KOH/g resin was reached. The acid value of the resin was brought below 5 mg KOH/g resin via reaction of the remaining acid-groups of the resin with 2,3-epoxy propyl neodecanoate (PE 2 and PE7) or ethylene carbonate (PE1). The used amount was dependent on the acid value before addition. Subsequently, the polyester was discharged onto an aluminum foil kept at room temperature.

#### Polyester resins PE3, PE4, PE5, PE6 and PE10

10 A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (all the (poly)alcohols and terephthalic acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 240 °C. Subsequently, for the second step fumaric acid together with a small amount of radical inhibitor was added at a temperature of 170 °C followed by esterification at 205 °C. When an acid value of less than approximately 65 mg KOH/g resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 205 °C till an acid value of approximately 45 mg KOH/g resin was reached. Subsequently, the polyester was discharged onto an aluminum foil kept at room temperature.

#### Polyester resin PE8

25 A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (all the (poly)alcohols and terephthalic acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 230 °C. Subsequently, for the second step fumaric acid together with a small amount of radical inhibitor was added at a temperature of 180 °C followed by esterification at 205 °C. When an acid value of less than approximately 40 mg KOH/g resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 205 °C till an acid value of approximately 30 mg KOH/g resin was reached. Subsequently, the polyester was discharged onto an aluminum foil kept at room temperature.

#### 35 Polyester resin PE9

A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (all the (poly)alcohols and terephthalic acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 230 °C. Subsequently, for the second step fumaric acid together with a small amount of radical inhibitor was added at a temperature of 180 °C followed by esterification at 205 °C. When an acid value of less than approximately 55 mg KOH/g resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 205 °C till an acid value of approximately 45 mg KOH/g resin was reached. Subsequently, the polyester was discharged onto an aluminum foil kept at room temperature.

#### Polyester resin PE11

A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (all the (poly)alcohols and terephthalic acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 220 °C. Subsequently, for the second step benzoic acid and fumaric acid together with a small amount of radical inhibitor was added at a temperature of 160 °C followed by esterification at 220 °C. When an acid value of less than approximately 30 mg KOH/g resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 200 °C till an acid value of approximately 5 mg KOH/g resin was reached. The acid value of the resin was brought below 3.5 mg KOH/g resin via reaction of the remaining acid-groups of the resin with ethylene carbonate. The used amount was dependent on the acid value before addition. Subsequently, the polyester was discharged onto an aluminum foil kept at room temperature.

#### Polyester resin PE12

A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (all the (poly)alcohols and terephthalic acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 225 °C. Subsequently, for the second step fumaric acid together with a small amount of radical inhibitor was added at a temperature of 180 °C followed by esterification at 200 °C. When an acid value of less than approximately 35 mg KOH/g

resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 205 °C till an acid value of approximately 25 mg KOH/g resin was reached. Subsequently, the polyester was discharged onto an aluminum foil kept at room temperature.

5

Synthesis of crystalline polyester resins having 2-butenedioic acid ethylenic unsaturations (PE13- PE14 and PE17-PE20) or itaconic acid ethylenic unsaturations (PE16) or 2-butenedioic acid and itaconic acid ethylenic unsaturations (PE15)  
Polyester resin PE13, PE14, PE15, PE18, PE19 and PE20

10

A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (the alcohol and acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 200 °C.

15

Subsequently, for the second step the unsaturated acid(s) together with a small amount of radical inhibitor was added at a temperature of 160 °C followed by esterification at 205 °C. When an acid value of less than approximately 40 mg KOH/g resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 205 °C till an acid value of approximately 30 mg KOH/g resin was reached. Subsequently, the polyester was discharged onto an aluminum foil kept at

20

room temperature.

Polyester resin PE16 and PE17

25

A reaction vessel fitted with a thermometer, a stirrer and a distillation device, was filled with a tin catalyst and the monomers for the first step (the alcohol and acid) as listed in Table 1. Stirring was then applied and a light nitrogen flow was passed over the reaction mixture while the temperature was raised to 200 °C.

30

Subsequently, for the second step the unsaturated acid(s) together with a small amount of radical inhibitor was added at a temperature of 160 °C followed by esterification at 200 °C. When an acid value of less than approximately 10 mg KOH/g resin was reached, the third stage of the polyester preparation was carried out under reduced pressure at 205 °C till an acid value of approximately 5 mg KOH/g resin was reached. Subsequently, the polyester was discharged onto an aluminum foil kept at room temperature.

35

All the polyester resins PE1-PE20 were solid at room temperature and at atmospheric pressure.

Preparation of heat-curable powder coating compositions: General procedure

The compositions of the heat-curable powder coating compositions are presented in Tables 3-6. The thermal radical initiators for example peroxides, the accelerators, the inhibitors and the pigments used for the preparation of the heat-curable powder coating compositions are presented in Table 2. Kronos® 2160 is titanium dioxide from Kronos Titan GmbH, Resiflow® PV-5 is a flow control agent from Worlée-Chemie GmbH.

The heat-curable compositions were prepared by mixing the components presented in Tables 3-6 in a blender. Subsequently, the components were extruded in a PRISM TSE16 PC twin screw extruder at 60 °C with a screw speed of 200 rpm and a torque higher than 90 %. The extrudate was allowed to cool to room temperature and broken into chips. These chips were then ground in an ultra-centrifugal mill at 18,000 rpm and sieved in a Retsch ZM100 sieve. The sieve fraction with particle size below 90 µm was collected and used for further experiments.

All heat-curable powder coating compositions prepared herein were solid at 23 °C and at atmospheric pressure.

Preparation of the powder coatings: General procedure

The heat-curable powder coating compositions prepared herein were electrostatically sprayed (corona spray gun, 60 kV) onto ALQ test panels to a coating thickness upon curing of approximately 60 µm and cured at various temperatures ranging from 80 to 180 °C for either 10 or 20 minutes in an air-circulation oven (Heraeus Instruments UT6120) affording white colored powder coatings.

25

Table 1: Composition and characterization of polyester resins

Polyester resin	Polyester resin composition [monomer in mol%]										Polyester resin characterization										
	Propylene glycol	Neopentylglycol	1,4-Butanediol	Trimethylol propane	Terephthalic acid	Benzoic acid	Succinic anhydride	Fumaric acid	Itaconic acid	Theoretical WPU	Theoretical Mn	Theoretical functionality (f)	Targeted hydroxyl value (mg KOH/g)	Targeted acid value (mg KOH/g)	Measured hydroxyl value (mg KOH/g)	Measured acid value (mg KOH/g)	Tg (°C)	Tm (°C)	Tc (°C)	ΔHm (J/g)	
PE1		47.9		3.7	37.5			10.9		1028	2723	2.9	56.0	3.5	42.7	3.1	46.5				
PE2	48.2			3.4	38.5		9.9		1000	2521	2.9	60.1	3.5	53.2	1.5	51.9					
PE3		47.2		0.5	40.1		12.3		920	2357	2.1	5.0	45.0	5.2	47.6	58.0					
PE4		47.4		0.5	39.2		13.0		875	2402	2.1	4.0	44.9	6.6	46.2	57.0					
PE5		47.2		0.5	38.0		14.4		775	2357	2.1	5.0	45.0	6.0	47.4	56.0					
PE6		47.2		0.5	37.1		15.2		725	2357	2.1	5.0	45.0	6.2	44.7	55.0					
PE7	50.7			0.4	35.4		13.6		725	3157	2.1	37.5	0.0	36.0	0.5	58.5					
PE8		47.8		0.5	36.7		14.9		655	3527	2.2	5.0	30.0	4.2	31.2	58.0					
PE9		47.2		0.5	37.3		15.0		652	2357	2.1	5.0	45.0	3.4	47.7	56.0					
PE10		47.5		0.4	30.6		21.6		500	2374	2.1	4.0	45.4	7.3	50.0	50.0					
PE11	46.9			1.4	25.6	6.9	19.1		500	2385	0.7	13.5	3.5	13.5	3.5	40.0					
PE12	47.5			1.9	27.5		23.1		500	2744	2.6	25.0	25.0	25.1	24.3	53.0					
PE13			48.9				32.6	18.5	500	3741	2.0	0.0	30.0				122.0	85.0	80.0		
PE14			49.0				33.7	17.4	500	3366	2.0	3.2	30.0				121.5	78.4	84.6		
PE15			48.9				40.4	5.4	653	3741	2.0	0.0	30.0				108.0	66.0	71.0		
PE16			51.1				38.9	10.0	711	3741	2.0	30.0	0.0				94.0	43.0	63.0		
PE17			50.2				39.8	10.0	711	3741	2.0	30.0	0.0				114.0	91.0	90.0		
PE18			49.0				40.2	10.9	800	3366	2.0	3.2	30.0				118.8	79.7	86.0		
PE19			49.0				41.4	9.7	900	3366	2.0	3.2	30.0				118.7	80.7	91.0		
PE20			49.0				42.3	8.7	1000	3366	2.0	3.2	30.0				118.4	81.4	88.7		



- 40 -

27765-WO-PCT

Table 2: Thermal radical initiators, accelerators, inhibitor and pigment used for the preparation of the heat-curable powder coating compositions









Chemical name	Structure	Commercial name	Description or use
Tert-butyl peroxybenzoate		Trigonox™ C from Akzo Nobel	Thermal radical initiator (peroxide according to formula I)
Tert-amyl peroxy (2-ethyl) hexanoate		Trigonox™ 121 from AkzoNobel	Thermal radical initiator (peroxide according to formula I)
Dilauroyl peroxide		Laurox™ S from Akzo Nobel	Thermal radical initiator (peroxide according to formula II)
Dibenzoyl peroxide (BPO)		Luperox™ A75 from Arkema	Thermal radical initiator (peroxide according to formula II)
2,2-Azodi(isobutyronitrile) (AIBN)		Perkadox™ AIBN from Akzo Nobel	Thermal radical initiator (azo compound, not a peroxide according to formula I or formula II)
1,1-Azodi (hexahydrobenzotriple)			Thermal radical initiator (azo compound, not a peroxide according to formula I or formula II)
Dicumyl peroxide		Perkadox™ BC-FF from AkzoNobel	Thermal radical initiator (peroxide but not a peroxide according to formula I or formula II)
Tert-butyl hydroperoxide		Trigonox™ A-W70 from AkzoNobel	Thermal radical initiator (peroxide but not a peroxide according to formula I or formula II)
Cobalt bis(2-ethylhexanoate)		COMMET™ Cobalt Octoate from De Monchy International B.V.	Accelerator
Cobalt stearate			Accelerator
Tert-butyl hydroquinone			Inhibitor
Kronos 2160			Pigment

Table 3: Composition of heat-curable powder coating compositions and properties of their corresponding powder coatings

Heat-curable powder coating composition	Composition of heat-curable powder coating composition											Property of powder coating					
	Amorphous polyester	Amount of amorphous resin (g)	Crystalline polyester	Amount of crystalline resin (g)	wt% crystalline polyester on total amount of amorphous polyester and crystalline polyester	Tert-butyl perbenzoate (pph)	Dilauryl peroxide (pph)	2,2-Azodi(isobutyronitrile) (pph)	1,1-Azodi(hexahydrobenzozonitrile) (pph)	Dicumylperoxide (pph)	t-Butylhydroperoxide (pph)	Cobalt bis(2-ethyl hexanoate) (g)	Tert-butyl hydroquinone (g)	Kronos 2160 (g)	Temperature (°C) for 100 ADR	Minimum depth of indentation to cause failure (mm)	Adhesion (Gitterschnitt)
Comp PCC1	PE11	100.0			0.0	2.0						0.20	0.05		100	< 1	n.m.
Comp PCC2	PE7	100.0			0.0	0.8						0.18	0.05		100	< 1	n.m.
Comp PCC3	PE7	100.0			0.0	0.8						0.18	0.05	50.0	100	< 1	n.m.
Comp PCC4	PE7	100.0			0.0		2.4						0.05		120	< 1	n.m.
Comp PCC5	PE12	100.0			0.0	1.6						0.30	0.05	50.0	120	< 1	n.m.
Comp PCC6	PE2	100.0			0.0	0.6						0.15	0.05	50.0	> 180	< 1	n.m.
Comp PCC7	PE2	100.0			0.0		2.4						0.05		> 180	< 1	n.m.
Comp PCC8	PE2	100.0			0.0		4.8						0.05		> 180	< 1	n.m.
Comp PCC9	PE2	100.0			0.0	1.6						0.30	0.05		> 150	< 1	n.m.
Comp PCC10	PE7	100.0			0.0			1.0					0.05		160	< 1	n.m.
Comp PCC11	PE7	100.0			0.0				1.0				0.05		160	< 1	n.m.
Comp PCC12	PE7	100.0			0.0					1.0			0.05		> 180	< 1	n.m.
Comp PCC13	PE7	100.0			0.0						1.0		0.05		> 180	< 1	n.m.
Comp PCC14	PE7	100.0			0.0	0.1						0.005	0.05		160	< 1	n.m.
Comp PCC15	PE8	100.0			0.0	1.0						0.15	0.05	50.0	< 1	G0	

Heat-curable powder coating composition	Composition of heat-curable powder coating composition											Property of powder coating					
	Amorphous polyester	Amount of amorphous resin (g)	Crystalline polyester	Amount of crystalline resin (g)	wt% crystalline polyester on total amount of amorphous polyester and crystalline polyester	Tert-butyl perbenzoate (pph)	Dilauryl peroxide (pph)	2,2-Azodi(isobutyronitrile) (pph)	1,1-Azodi(hexahydrobenzotriole) (pph)	Dicumylperoxide (pph)	t-Butylhydroperoxide (pph)	Cobalt bis(2-ethyl hexanoate) (g)	Tert-butyl hydroquinone (g)	Kronos 2160 (g)	Temperature (°C) for 100 ADR	Minimum depth of indentation to cause failure (mm)	Adhesion (Gitterschnitt)
Comp PCC16	PE8	100.0			0.0	1.0						0.29	0.05	50.0	100	<1	G0
Comp PCC17	PE9	100.0			0.0	1.0						0.29	0.05	50.0	120	<1	G0
Comp PCC18	PE1	100.0			0.0	0.6						0.15	0.05	50.0	>180	<1	n.m.
Comp PCC19			PE13	100.0	100.0	1.8						0.22	0.05	50.0	120	<1	G5
PCC1	PE8	75.0	PE17	25.0	25.0	1.0						0.38	0.05	50.0	100	7.0	G0
PCC2	PE8	60.0	PE17	40.0	40.0	1.0						0.38	0.05	50.0	120	7.0	G0
PCC3	PE8	75.0	PE16	25.0	25.0	1.0						0.38	0.05	50.0	120	6.2	G0
PCC4	PE8	60.0	PE16	40.0	40.0	1.0						0.38	0.05	50.0	120	6.3	G0
PCC5	PE8	75.0	PE15	25.0	25.0	1.0						0.38	0.05	50.0	120	7.0	G0

Table 4: Composition of heat-curable powder coating compositions and properties of their corresponding powder coatings

Heat-curable powder coating composition	Composition of heat-curable powder coating composition							Property of powder coating				
	Amorphous polyester	Amount (g)	Crystalline polyester	Amount (g)	wt% crystalline polyester on total amount of amorphous polyester and crystalline polyester	Tert-butyl perbenzoate (pph)	Cobalt stearate (g)	Tert-butyl hydroquinone (g)	Kronos 2160 (g)	Temperature (°C) for 100 ADR	Minimum depth of indentation to cause failure (mm)	Adhesion (Gitterschnitt)
Comp PCC20	PE10	100.0			0.0	1.6	0.29	0.05	50.0	110	<1	G1
Comp PCC21	PE10	95.0	PE14	5.0	5.0	1.6	0.29	0.05	50.0	100	<1	G0
PCC6	PE10	90.0	PE14	10.0	10.0	1.6	0.29	0.05	50.0	110	1.4	G0
PCC7	PE10	80.0	PE14	20.0	20.0	1.6	0.29	0.05	50.0	110	2.6	G1
PCC8	PE10	70.0	PE14	30.0	30.0	1.6	0.29	0.05	50.0	110	2.7	G0
PCC9	PE10	60.0	PE14	40.0	40.0	1.6	0.29	0.05	50.0	120	4.7	G1
PCC10	PE10	50.0	PE14	50.0	50.0	1.6	0.29	0.05	50.0	120	4.5	G1
Comp PCC22	PE10	0.0	PE14	100.0	100.0	1.6	0.29	0.05	50.0	120	<1	G0

Table 5: Composition of heat-curable powder coating compositions and properties of their corresponding powder coatings


Heat-curable powder coating composition	Composition of heat-curable powder coating composition										Property of powder coating			
	Amorphous polyester	Amount of amorphous polyester (g)	WPU Amorphous polyester	Crystalline polyester	Amount of crystalline polyester (g)	WP Ustalline polyester	amount of amorphous polyester and crystalline polyester	Tert-butyl perbenzoate (pph)	Cobalt stearate (g)	Tert-butyl hydroquinone (g)	Kronos 2160 (g)	Temperature (°C) for 100 ADR	Minimum depth of indentation to cause failure (mm)	Adhesion (Gitterschnitt)
Comp PCC23	PE3	80.0	920	PE14	20.0	500	20.0	1.6	0.29	0.05	50.0	120	<1	G0
Comp PCC24	PE4	80.0	875	PE14	20.0	500	20.0	1.6	0.29	0.05	50.0	120	<1	G0
PCC11	PE5	80.0	775	PE14	20.0	500	20.0	1.6	0.29	0.05	50.0	120	1.2	G0
PCC12	PE6	80.0	725	PE14	20.0	500	20.0	1.6	0.29	0.05	50.0	120	3.5	G0
PCC7	PE10	80.0	500	PE14	20.0	500	20.0	1.6	0.29	0.05	50.0	110	2.6	G0
PCC13	PE10	80.0	500	PE20	20.0	1000	20.0	1.6	0.29	0.05	50.0	120	3.4	G3
PCC14	PE10	80.0	500	PE18	20.0	800	20.0	1.6	0.29	0.05	50.0	120	2.0	G0
PCC15	PE10	80.0	500	PE19	20.0	900	20.0	1.6	0.29	0.05	50.0	120	3.0	G3

Table 6: Composition of heat-curable powder coating compositions and properties of their corresponding powder coatings

Heat-curable powder coating composition	Composition of heat-curable powder coating composition										Property of powder coating					
	Amorphous polyester	Amount (g)	Crystalline polyester	Amount (g)	wt% crystalline polyester on total amount of amorphous polyester and crystalline polyester	Tert-amyl peroxy (2-ethyl) hexanoate (pph)	Dibenzoyl peroxide (pph)	Tert-butyl perbenzoate (pph)	Dicumylperoxide (pph)	t-Butylhydroperoxide (pph)	Cobalt stearate (g)	Tert-butyl hydroquinone (g)	Kronos 2160 (g)	Temperature (°C) for 100 ADR	Minimum depth of indentation to cause failure (mm)	Adhesion (Gitterschnitt)
Comp PCC25	PE10	80.0	PE14	20.0	20.0				2.2			0.05	50.0	>180	n.m.	n.m
Comp PCC26	PE10	80.0	PE14	20.0	20.0				2.2		0.29	0.05	50.0	>180	n.m.	n.m
Comp PCC27	PE10	80.0	PE14	20.0	20.0					1.0		0.05	50.0	>180	n.m.	n.m
Comp PCC28	PE10	80.0	PE14	20.0	20.0					1.0	0.29	0.05	50.0	n.p.e	n.p.e	n.p.e
PCC16	PE10	80.0	PE14	20.0	20.0	1.8					0.29	0.05	50.0	100	1.6	G0
PCC17	PE10	80.0	PE14	20.0	20.0		4.1				0.29	0.05	50.0	130	6.3	G0
PCC18	PE10	80.0	PE14	20.0	20.0			0.4			0.29	0.05	50.0	>130	n.m.	n.m
PCC19	PE10	80.0	PE14	20.0	20.0			0.6			0.29	0.05	50.0	120	0.7	G0
PCC20	PE10	80.0	PE14	20.0	20.0			0.7			0.29	0.05	50.0	120	1.2	G0
PCC21	PE10	80.0	PE14	20.0	20.0			0.8			0.29	0.05	50.0	120	2.6	G0
PCC7	PE10	80.0	PE14	20.0	20.0			1.6			0.29	0.05	50.0	110	2.6	G0


As can be seen from the Examples in Tables 3-6 in combination with the Examples in Table 1, only when a heat-curable powder coating compositions comprising:

- i) at least one crystalline polyester resin present in an amount of at least 7.5 wt%; and
- 5 ii) at least one amorphous polyester resin present in an amount of at most 92.5 wt%; and
- iii) at least one peroxide present in an amount of at least 0.65 parts of peroxide in hundred parts of i)+ ii) (pph),
- wherein,
- 10 - the at least one crystalline polyester resin has 2-butenedioic acid ethylenic unsaturations and/or the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations;
- if the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations, then the theoretical weight per ethylenic
- 15 unsaturation (WPU) of the at least one amorphous polyester resin is at most 850 g/mol;
- the wt% is based on the total amount of i)+ ii);
- the peroxide is chosen from the group of peresters and monopercarbonates according to formula (I)

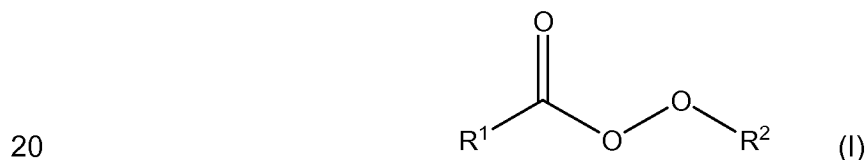

wherein R<sup>1</sup> represents an optionally substituted C<sub>1-20</sub>alkyl, a C<sub>6-20</sub>aryl or for OR<sup>5</sup>, wherein R<sup>5</sup> represents an optionally substituted C<sub>1-20</sub>alkyl or for an optionally substituted C<sub>6-20</sub>aryl; R<sup>2</sup> represents an optionally substituted C<sub>1-20</sub>alkyl or for an optionally substituted C<sub>6-20</sub>aryl; and

25 peranhydrides of formula (II)

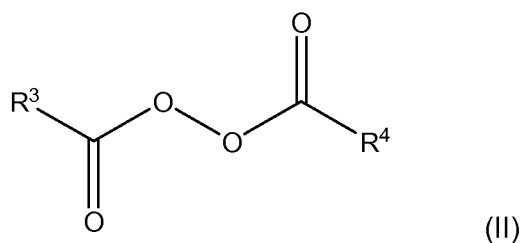

wherein R<sup>3</sup> and R<sup>4</sup> each independently stand for an optionally substituted C<sub>1-20</sub>alkyl, a C<sub>6-20</sub>aryl or for OR<sup>6</sup>, wherein R<sup>6</sup> represents an optionally substituted

C<sub>1-10</sub>alkyl or aC<sub>6-20</sub>aryl; and any combination of peroxides according to formula (I) and formula (II) thereof,

were used to prepare powder coatings, said compositions were cured to an acceptable degree at low temperature for example at 130°C for at most 20  
5 minutes, said compositions were ground, sieved and extruded and said compositions upon heat cure formed powder coatings that exhibited enhanced flexibility. The compositions of the invention upon heat curing formed powder coatings that exhibited good adhesion. In addition, the compositions of the invention can suitably be used on heat- and/or non heat-sensitive, even if the composition is highly pigmented. This can  
10 be seen by comparing the comparative examples of Tables 3-6 with the Examples according to the invention.

More particularly, as can be seen from the Examples in Table 3, the combination of a crystalline polyester resin, an amorphous polyester resin and a peroxide according to the invention, in particular the introduction of the former, has  
15 surprisingly afforded powder coatings compositions that were cured to an acceptable degree at low temperature for example at 130°C for at most 20 minutes, said compositions were ground, sieved and extruded and said compositions upon heat cure formed powder coatings that exhibited enhanced flexibility. The compositions of the invention upon heat curing formed powder coatings that exhibited good adhesion. In  
20 addition, the compositions of the invention can suitably be used on heat- and/or non heat-sensitive, even if the composition is highly pigmented. This can be seen by comparing the comparative examples of Table 3 with the Examples according to the invention.

As can be seen from the Examples in Table 4, the combination of a  
25 crystalline polyester resin, an amorphous polyester resin and a peroxide according to the invention, in particular the introduction of the former in an amount of at least 7.5 wt%, has surprisingly afforded powder coatings compositions that were cured to an acceptable degree at low temperature for example at 130°C for at most 20 minutes, said compositions were ground, sieved and extruded and said compositions upon heat  
30 cure formed powder coatings that exhibited enhanced flexibility. The compositions of the invention upon heat curing formed powder coatings that exhibited good adhesion. In addition, the compositions of the invention can suitably be used on heat- and/or non heat-sensitive, even if the composition is highly pigmented. This can be seen by comparing the comparative examples of Table 4 with the Examples according to the  
35 invention.



As can be seen from the Examples in Table 5, the combination of a crystalline polyester resin, an amorphous polyester resin and a peroxide according to the invention, in particular when the amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations and a theoretical WPU of at most 850 g/mol and/or the

5 theoretical WPU of the amorphous and crystalline polyester resins is less than 2,500 g/mol, has surprisingly afforded powder coatings compositions that were cured to an acceptable degree at low temperature for example at 130°C for at most 20 minutes, said compositions were ground, sieved and extruded and said compositions upon heat

10 cure formed powder coatings that exhibited enhanced flexibility. The compositions of the invention upon heat curing formed powder coatings that exhibited good adhesion. In addition, the compositions of the invention can suitably be used on heat- and/or non heat-sensitive, even if the composition is highly pigmented. This can be seen by comparing the comparative examples of Table 5 with the Examples according to the invention.


15 As can be seen from the Examples in Table 6, the combination of a crystalline polyester resin, an amorphous polyester resin and a peroxide according to the invention, in particular when the peroxide reads on formula (I) or formula (II) and is present in an amount of at least 0.65 pph, has surprisingly afforded powder coatings

20 compositions that were cured to an acceptable degree at low temperature for example at 130°C for at most 20 minutes, said compositions were ground, sieved and extruded and said compositions upon heat cure formed powder coatings that exhibited enhanced flexibility. The compositions of the invention upon heat curing formed powder


25 coatings that exhibited good adhesion. In addition, the compositions of the invention can suitably be used on heat- and/or non heat-sensitive, even if the composition is highly pigmented. More preferred heat-curable powder coating compositions have a peroxide that reads on formula (I) or formula (II) and is present in an amount of at least 0.80 pph since they afforded powder coatings with further enhanced flexibility. This can be seen by comparing the comparative examples of Table 6 with the Examples according to the invention.

CLAIMS

1. Heat-curable powder coating composition comprising:
- 5 i) at least one crystalline polyester resin present in an amount of at least 7.5 wt%; and
- ii) at least one amorphous polyester resin present in an amount of at most 92.5 wt%; and
- 10 iii) at least one peroxide present in an amount of at least 0.65 parts of peroxide in hundred parts of i)+ ii) (pph),  
wherein,
- the at least one crystalline polyester resin has 2-butenedioic acid ethylenic unsaturations and/or the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations;
  - if the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations, then the theoretical weight per ethylenic unsaturation (WPU) of the at least one amorphous polyester resin is at most 850 g/mol;
  - the wt% is based on the total amount of i)+ ii);
  - the peroxide is chosen from the group of
- 20 peresters and monopercarbonates according to formula (I)

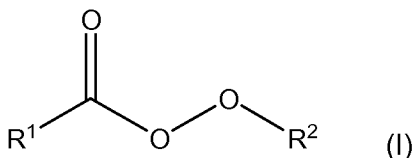

- wherein R<sup>1</sup> represents an optionally substituted C<sub>1-20</sub>alkyl, a C<sub>6-20</sub>aryl or for OR<sup>5</sup>, wherein R<sup>5</sup> represents an optionally substituted C<sub>1-20</sub>alkyl or for an optionally substituted C<sub>6-20</sub>aryl; R<sup>2</sup> represents an optionally substituted C<sub>1-20</sub>alkyl or for an optionally substituted C<sub>6-20</sub>aryl; and
- 25 peranhydrides of formula (II)

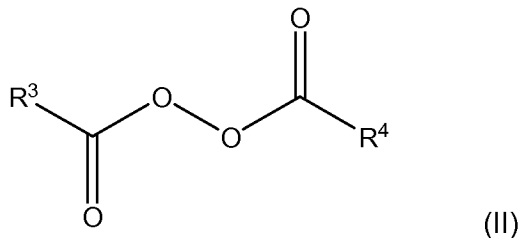

wherein R<sup>3</sup> and R<sup>4</sup> each independently stand for an optionally substituted C<sub>1-20</sub>alkyl, a C<sub>6-20</sub>aryl or for OR<sup>6</sup>, wherein R<sup>6</sup> represents an optionally substituted C<sub>1-10</sub>alkyl or aC<sub>6-20</sub>aryl; and

any combination of peroxides according to formula (I) and formula (II) thereof.

- 5 2. Composition according to claim 1, wherein the at least one crystalline polyester resin is present in an amount of at most 85 wt% and wherein the at least one amorphous polyester resin is present in an amount of at least 15 wt%.
3. Composition according to claim 1 or claim 2, wherein the at least one  
10 crystalline polyester resin and the at least amorphous polyester resin, have each a theoretical Mn of at least 2,200 Da and of at most 8,000 Da.
4. Composition according to any one of claims 1 to 3, wherein the at least one amorphous polyester resin has 2-butenedioic acid ethylenic unsaturations and a theoretical weight per ethylenic unsaturation (WPU) of at most 850 g/mol.
- 15 5. Composition according to any one of claims 1 to 4, wherein the at least one crystalline polyester resin and/or the at least one amorphous polyester resin has besides 2-butenedioic acid ethylenic unsaturations also other ethylenic unsaturations based on di-acid or anhydride monomers.
6. Composition according to claim 5, wherein the other ethylenic unsaturations  
20 based on di-acid or anhydride monomers are chosen from the group of itaconic acid, citraconic acid, mesaconic acid, anhydrides of itaconic acid and mixtures thereof.
7. Composition according to any one of claims 1 to 6, wherein both the at least one crystalline polyester resin and the at least one amorphous polyester  
25 resin, have each 2-butenedioic acid ethylenic unsaturations.
8. Composition according to claim 7, wherein both the at least one crystalline polyester resin and the at least one amorphous polyester resin, have each only 2-butenedioic acid ethylenic unsaturations.
9. Composition according to any one of claims 1 to 8, wherein the peroxide is  
30 present in an amount of at least 0.8 pph.
10. Composition according to any one of claims 1 to 9, wherein the composition further comprises a transition metal compound chosen from the group of transition metal salts, transition metal complexes and mixtures thereof, of transition metals chosen from the group of Mn, Fe, Co and Cu.

11. Composition according to any one of claims 1 to 10, wherein R<sup>2</sup> represents tert-butyl.
12. Composition according to any one of claims 1 to 11, wherein R<sup>1</sup> represents phenyl and R<sup>2</sup> represents tert-butyl.
- 5 13. Composition according to any one of claims 1 to 12, wherein R<sup>3</sup> and R<sup>4</sup> both stand for phenyl or both stand for undecane.
14. Composition according to any one of claims 1 to 13, wherein the composition further comprises an inhibitor chosen from the group of phenolic compounds, stable radicals, catechols, phenothiazines, hydroquinones, benzoquinones or mixtures thereof.
- 10 15. Composition according to any one of claims 1 to 14, wherein the composition is substantially free of a crosslinking agent.
16. Process for the preparation of a heat-curable powder coating composition as defined in any one of claims 1 to 15 comprising the steps of:
  - 15 a. mixing the components of the heat-curable powder coating composition to obtain a premix;
  - b. heating the premix, preferably in an extruder, to obtain an extrudate;
  - c. cooling down the extrudate to obtain a solidified extrudate; and
  - d. grinding the solidified extrudate into smaller particles to obtain the heat-
- 20 17. Process for coating a substrate comprising the steps of:
  - a. applying a heat-curable powder coating composition as defined in any one of claims 1 to 15 to a substrate;
  - b. heating the substrate.
- 25 18. Substrate that is fully or partially coated with a heat-curable powder coating composition as defined in any one of claims 1 to 15.
19. Use of a heat-curable powder coating composition as defined in any one of claims 1 to 15 to coat a substrate or an article.

INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2011/057293

A. CLASSIFICATION OF SUBJECT MATTER  
INV. C09D167/06 C08K5/14  
ADD.  
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
Minimum documentation searched (classification system followed by classification symbols)  
C09D C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	WO 2010/052291 A1 (DSM IP ASSETS BV [NL]; JANSEN JOHAN FRANZ GRADUS ANTO [NL]; DRIJFHOUT) 14 May 2010 (2010-05-14) tables 3,7	1-19
A,P	WO 2010/052290 A1 (DSM IP ASSETS BV [NL]; JANSEN JOHAN FRANZ GRADUS ANTO [NL]; MOLHOEK LE) 14 May 2010 (2010-05-14) tables 4,6	1-19
A	EP 0 957 142 A2 (MORTON INT INC [US]) 17 November 1999 (1999-11-17) claims 1-3 examples 1,2 paragraphs [0009], [0010], [0027], [0029]	1-19
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p>
--	--

Date of the actual completion of the international search  15 August 2011	Date of mailing of the international search report  24/08/2011
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Schlicke, Benedikt
--	--

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2011/057293

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97/38034 A1 (HERBERTS & CO GMBH [DE]; DILOY BARRIO JOSE LUIS [ES]) 16 October 1997 (1997-10-16) claims 1,7  -----	1-19

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/057293

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2010052291	A1	14-05-2010	AU 2009312765 A1	14-05-2010
			AU 2009312766 A1	14-05-2010
			AU 2009312768 A1	14-05-2010
			CA 2741358 A1	14-05-2010
			CA 2741749 A1	14-05-2010
			CA 2741774 A1	14-05-2010
			EP 2344594 A1	20-07-2011
			EP 2342288 A1	13-07-2011
			EP 2342287 A1	13-07-2011
			WO 2010052290 A1	14-05-2010
			WO 2010052293 A1	14-05-2010
WO 2010052290	A1	14-05-2010	AU 2009312765 A1	14-05-2010
			AU 2009312766 A1	14-05-2010
			AU 2009312768 A1	14-05-2010
			CA 2741358 A1	14-05-2010
			CA 2741749 A1	14-05-2010
			CA 2741774 A1	14-05-2010
			EP 2344594 A1	20-07-2011
			EP 2342288 A1	13-07-2011
			EP 2342287 A1	13-07-2011
			WO 2010052291 A1	14-05-2010
			WO 2010052293 A1	14-05-2010
EP 0957142	A2	17-11-1999	AT 274035 T	15-09-2004
			CA 2271398 A1	11-11-1999
			DE 69919441 D1	23-09-2004
			DE 69919441 T2	08-09-2005
			NO 992254 A	12-11-1999
			US 6048949 A	11-04-2000
WO 9738034	A1	16-10-1997	AT 195749 T	15-09-2000
			BR 9708485 A	03-08-1999
			CA 2250901 A1	16-10-1997
			CN 1215414 A	28-04-1999
			DE 69702897 D1	28-09-2000
			DE 69702897 T2	15-02-2001
			DK 891383 T3	20-11-2000
			EP 0891383 A1	20-01-1999
			ES 2151726 T3	01-01-2001
			GR 3034875 T3	28-02-2001
			JP 2000508358 A	04-07-2000
			PT 891383 E	29-12-2000
			US 6214898 B1	10-04-2001