PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶:

G06F 9/24, 12/22, 13/10

A1

(11) International Publication Number: WO 98/38570

(43) International Publication Date: 3 September 1998 (03.09.98)

(21) International Application Number: PCT/US98/03026 (81) Designated States: BR, CA, CN, JP, KR, MX, RU, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB,

(22) International Filing Date: 18 February 1998 (18.02.98) GR, IE, IT, LU, MC, NL, PT, SE

(30) Priority Data: 08/805,817 26 February 1997 (26.02.97) US

(71) Applicant: MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(72) Inventor: BATISTA, Carlos, Enrique; 4712 Mount Hood, Fort Worth, TX 76137 (US).

(74) Agents: BETHARDS, Charles, W. et al.; Motorola Inc., Intellectual Property Dept., 5401 North Beach Street, MS/E230, Fort Worth, TX 76137 (US).

European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND APPARATUS FOR PROGRAMMING A DEVICE WITH A SOFTWARE PACKAGE OBTAINED OVER A DISTRIBUTED DATA COMMUNICATION NETWORK

(57) Abstract

A database (108) is created (202) including a software package (110) on a server (104) accessible from a distributed data communication network (112), and a programming plug-in (118) is created and installed (204) for use with a browser (116) on a computer (114). The programming plug-in is for providing compatible communications between the browser and a communication port (128) of the computer. The database is accessed (206) through the distributed data communication network by utilizing the browser to obtain (208) the software package, and a device (134) is coupled (210) to the communication port of the computer. The programming plug-in then programs (214) the device with the software package through the communication port in cooperation with the device.

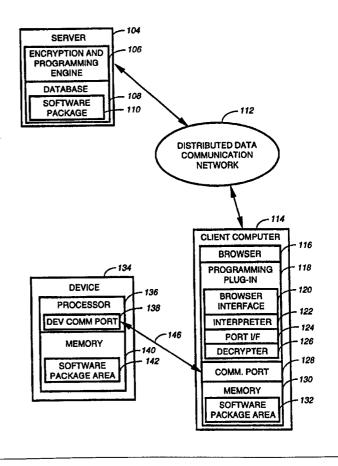

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
B.J	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	$\mathbf{U}\mathbf{Z}$	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	\mathbf{PL}	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
~~ ~~			~ · · ·	66	C!		

 \mathbf{SG}

Singapore

LR

Liberia

EE

Estonia

METHOD AND APPARATUS FOR PROGRAMMING A DEVICE WITH A SOFTWARE PACKAGE OBTAINED OVER A DISTRIBUTED DATA COMMUNICATION NETWORK

Field of the Invention

5

10

15

20

25

This invention relates in general to remote programming of software controlled devices, and more specifically to a method and apparatus for programming a device with a software package obtained over a distributed data communication network.

Background of the Invention

Electronic devices are becoming increasingly dependent upon software to control features and functionality. As new features and functionality are added, new versions of the software are needed for making the new features and functionality operational. Until now, software upgrades for most devices have been left to the factory, warranty depot, or repair center, due to complexity and security issues associated with remote programming of the devices.

Aggravating the problem, software flexibility has created an explosion of new options with each new revision. When major new revisions are released, warranty and repair centers can get flooded with devices needing an upgrade. In addition, with so many options and features, the process of communicating which features and options the user desires can become tedious and error-prone.

What is needed is a method and apparatus that allows a user of an electronic device to obtain a software upgrade without having to send the device to the factory, warranty depot, or repair center. Preferably, the method and apparatus will be simple and easy to use, and will allow the user to quickly select the desired features and options. In addition, the method an apparatus must be secure, so that the upgrades cannot be stolen by unauthorized persons.

Summary of the Invention

An aspect of the present invention is a method for programming a device with a software package obtained over a distributed data communication network, the device itself incapable of accessing the distributed data communication network. The method comprises the steps of creating a database comprising the software package on a server accessible from the distributed data communication network, and creating and installing a programming plug-in for use with a browser on a computer, the programming plug-in for providing compatible communications between the browser and a communication port of the computer. The method further comprises the steps of accessing the database through the distributed data communication network by utilizing the browser to obtain the software package, and coupling the device to the communication port. The method further comprises the step of programming the device with the software package obtained by the browser, the programming performed by the programming plug-in through the communication port in cooperation with the device.

10

20

35

Another aspect of the present invention is a programming plug-in for programming a device with a software package obtained over a distributed data communication network, the device itself incapable of accessing the distributed data communication network, wherein a database exists comprising the software package on a server accessible from the distributed data communication network, and wherein the database is accessed through the distributed data communication network by utilizing a browser to obtain the software package. The programming plug-in comprises a browser interface for providing communications between the programming plug-in and the browser on a computer, and an interpreter coupled to the browser interface for providing compatible communications between the browser and the device. The programming plug-in further comprises a port interface coupled to the interpreter and coupled to a communication port for programming the device with the software package through the communication port in cooperation with the device.

Another aspect of the present invention is a computer for programming a device with a software package obtained over a distributed data communication network, the device itself incapable of

accessing the distributed data communication network, wherein a database exists comprising the software package on a server accessible from the distributed data communication network. The computer comprises a browser for accessing the database through the distributed data communication network to obtain the software package, and a programming plug-in coupled to the browser and coupled to a communication port for providing compatible communications between the browser and the communication port. The computer further comprises the communication port coupled to the device for communicating with the device. The programming plug-in comprises a interface for providing communications between programming plug-in and the browser, and an interpreter coupled to the browser interface for providing compatible communications between the browser and the device. The programming plug-in further comprises a port interface coupled to the interpreter and coupled to the communication port for programming the device with the software package through the communication port in cooperation with the device.

Brief Description of the Drawings

20

25

30

10

FIG. 1 is an electrical block diagram of a system for programming a device in accordance with the present invention.

FIG. 2 is a flow diagram depicting a method for programming a device in accordance with the present invention.

FIG. 3 is an exemplary diagram of an on-screen form for selecting options and features in accordance with the present invention.

Detailed Description of the Drawings

Referring to FIG. 1, an electrical block diagram depicts a system for programming a device 134 in accordance with the present invention. The system comprises a server 104, constructed of conventional computer system hardware, coupled, e.g., by a telephone line, to a distributed data communication network 112, e.g., the Internet, for communicating with the distributed data communication network 112. The server 104 preferably is programmed, using well-known techniques, with at least one functional access page, e.g., a World Wide Web page, which can be

accessed via the network 112. The server 104 further comprises an encryption and programming engine 106 for programming the server 104 in accordance with the present invention and for encrypting data comprising a software package 110 before transmitting the data over the network 112. The encryption and programming engine 106 preferably utilizes a well-known encryption technique, such as the Data Encryption Standard (DES). The software package 110 resides in a database 108 that has been created on the server 104. It will be appreciated that the database 108 can comprise more than one software package 110, depending upon the number of different types of devices, features, and options supported.

The system of FIG. 1 further comprises at least one client computer 114, constructed of conventional computer system hardware, coupled, e.g., by a telephone line, to the distributed data communication network 112 for programming the device 134 with the software package 110 by obtaining the software package over the network 112. The computer 114 comprises a browser 116, e.g., a conventional Web browser, for accessing the database 108 through the distributed data communication network 112 to obtain the software package 110.

10

20

Usually Internet based applications are shielded from the client computer's local resources for security purposes, but recently developed plug-in Application Programming Interfaces (APIs) now allow programmers to access the local resources through native code. A specially coded browser plug-in can detect the transmission of a file with special extensions that identify the file type. The software package 110, for example, can be sent using special encoding identified through a predetermined Multipurpose Internet Mail Extension (MIME) type. This determines the type of transmission used to download the information and categorizes the information so that the browser 116 can identify the data being sent and trigger the programming plug-in 118 to process the data. A plug-in of this type can, for example, display a dialog box alerting the user to connect the device 134 to the computer 114. Upon acknowledgment, the plug-in 118 can take control of the device 134 through the device's communication port 138.

The computer 114 further comprises the programming plug-in 118 coupled to the browser 116 and coupled to a communication port 128 for providing compatible communications between the browser 116 and the communication port 128 in accordance with the present invention. The

programming plug-in 118 includes a browser interface 120 for providing communications between the programming plug-in 118 and the browser 116. The programming plug-in 118 also includes an interpreter 122 coupled to the browser interface 120 for providing compatible communications between the browser 116 and the device 134. In addition, the programming plug-in 118 includes a port interface 124 coupled to the interpreter 122 and coupled to the communication port 128 for programming the device 134 with the software package 110 through the communication port 128. The programming plug-in 118 further comprises a decryptor 126 coupled to the interpreter 122 for decrypting the software package 110 when communicating the software package 110 to the device 134. The software of the programming plug-in 118 can be readily written by one of ordinary skill in the art, given the teachings of the instant disclosure.

15

25

30

The computer 114 further comprises the communication port 128 coupled to the device 134 for communicating with the device 134. The computer 114 also includes a memory 130 having a software package area 132 for storing the software package 110 after downloading the software package 110 from the server 104. The communication port 128 of the computer 114 is coupled to the device communication port 138 by a programming link 146. The device 134 preferably comprises a processor 136 for utilizing the software package 110 and for downloading the same from the client computer 114, utilizing well-known techniques. processor 136 comprises the device communication port 138 and is coupled to a memory 140, e.g., a conventional electrically erasable programmable read only memory (EEPROM) having a software package area 142 for storing the software package 110. Examples of devices 134 that can benefit from the present invention include pagers, cellular telephones, portable digital assistants, portable two-way radios, and television setup devices, to name a few.

Referring to FIG. 2, a flow diagram 200 depicting a method for programming a device in accordance with the present invention begins with creating 202 the database 108 comprising at least one software package 110 on the server 104. In addition, the programming plug-in 118 is created and installed 204 on the client computer 114 for use with the browser 116, the programming plug-in 118 for providing compatible communications between the browser 116 and the communication port

128. Once the system is operational, a user of the device 134 can access 206 the database 108 through the distributed data communication network 112 by utilizing the browser 116 to obtain the software package 110. The user then selects 208 the options and features to be included in the software package 110, preferably utilizing an on-screen form, and the server 104 then downloads the customized software package 110 to the software package area 132 of the client computer 114. The user then couples 210 the device 134 to the communication port 128 in preparation for programming the device 134. Next, through a command sequence, e.g., entered through a keyboard of the computer 114 using well-known techniques, the user indicates to the browser 116 and to the programming plug-in 118 that the device 134 is to be programmed with the software package 110. In response the browser 116 retrieves the software package 110 from the software package area 132 of the memory 130, and passes the software package 110 to the programming plug-in 118, which decrypts 212 the software package 110 and passes the decrypted software package 110 to The communication port the communication port 128. communicates the software package 110 to the device 134 through the device communication port 138, so that the processor 136 can program 214 the device with the software package 110, using well-known techniques.

Referring to FIG. 3, an exemplary diagram 300 of a Web page comprising an on-screen form to aid the user in selecting options and features in accordance with the present invention depicts spaces 302, 304 to enter a model number and a serial number. The diagram further depicts conventional hyperlinks 306, 308 for viewing additional similar Web pages to obtain further information about features and options and for selecting pre-programmed feature/option packages and starting a download utilizing well-known techniques. It will be appreciated that there can be many variations of the on-screen form that will work as well for selecting the options and features to download.

20

25

It should now be apparent that the present invention advantageously provides a method and apparatus that allows a user of an electronic device to obtain a software upgrade without having to send the device to the factory, warranty depot, or repair center. The method and apparatus is simple and easy to use, and will allow the user to quickly select the desired features and options. In addition, the method an apparatus is secure, so that the upgrades cannot be stolen by unauthorized

persons. The method and apparatus advantageously provides a centralized point at which new features and options can be provided as they become available, thereby preventing inventory from becoming obsolete due to software revision.

While the foregoing has disclosed by way of example an embodiment in accordance with the present invention, it will be appreciated that many alternative embodiments in accordance with the present invention may occur to one of ordinary skill in the art, given the teachings of this disclosure. Consequently, the scope of the invention is delimited only according to the following claims.

What is claimed is:

5

10

CLAIMS

1. A method for programming a device with a software package obtained over a distributed data communication network, the device itself incapable of accessing the distributed data communication network, the method comprising the steps of:

creating a database comprising the software package on a server accessible from the distributed data communication network;

creating and installing a programming plug-in for use with a browser on a computer, the programming plug-in for providing compatible communications between the browser and a communication port of the computer;

accessing the database through the distributed data communication network by utilizing the browser to obtain the software package;

coupling the device to the communication port; and programming the device with the software package obtained by the browser, the programming performed by the programming plug-in through the communication port in cooperation with the device.

20

30

35

10

15

2. The method of claim 1,

wherein the database is protected by a data encryption engine, and

wherein the programming step comprises the step of decrypting the software package.

3. The method of claim 1,

wherein the distributed data communication network is an Internet-like network, and

wherein the accessing step comprises the step of utilizing a Web browser.

4. The method of claim 1, wherein the accessing step comprises the step of selecting options and features to be included in the software package.

5. The method of claim 1, wherein the accessing step comprises the step of making selections from an on-screen form.

6. A programming plug-in for programming a device with a software package obtained over a distributed data communication network, the device itself incapable of accessing the distributed data communication network, wherein a database exists comprising the software package on a server accessible from the distributed data communication network, and wherein the database is accessed through the distributed data communication network by utilizing a browser to obtain the software package, and wherein the programming plug-in comprises:

a browser interface for providing communications between the programming plug-in and the browser on a computer;

an interpreter coupled to the browser interface for providing compatible communications between the browser and the device; and

a port interface coupled to the interpreter and coupled to a communication port for programming the device with the software package through the communication port in cooperation with the device.

7. The programming plug-in of claim 6,

15

20

30

wherein the database is protected by a data encryption engine for encrypting the software package, and

wherein the programming plug-in further comprises a decryptor coupled to the interpreter for decrypting the software package.

8. The programming plug-in of claim 6,

wherein the distributed data communication network is an Internet-like network, and

wherein the browser interface is a Web browser interface.

9. A computer for programming a device with a software package obtained over a distributed data communication network, the device itself incapable of accessing the distributed data communication network, wherein a database exists comprising the software package on a server accessible from the distributed data communication network, the computer comprising:

a browser for accessing the database through the distributed data communication network to obtain the software package;

a programming plug-in coupled to the browser and coupled to a communication port for providing compatible communications between the browser and the communication port; and

the communication port coupled to the device for communicating with the device,

wherein the programming plug-in comprises:

a browser interface for providing communications between the programming plug-in and the browser;

an interpreter coupled to the browser interface for providing compatible communications between the browser and the device; and

a port interface coupled to the interpreter and coupled to the communication port for programming the device with the software package through the communication port in cooperation with the device.

10. The computer of claim 9,

10

15

20

25

30

wherein the database is protected by a data encryption engine for encrypting the software package, and

wherein the programming plug-in further comprises a decryptor for decrypting the software package.

11. The computer of claim 9,

wherein the distributed data communication network is an Internet-like network, and

wherein the browser interface is a Web browser interface.

12. The computer of claim 9, wherein the browser is arranged to cooperate with the server to provide for selecting options and features to be included in the software package.

13. The computer of claim 9, wherein the browser is arranged to cooperate with the server to provide for making selections from an onscreen form.


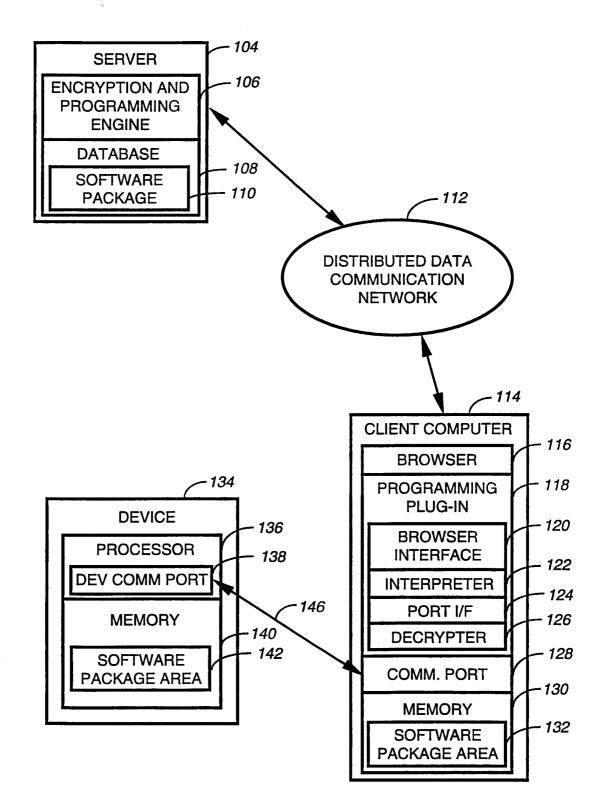


FIG. 1

PCT/US98/03026

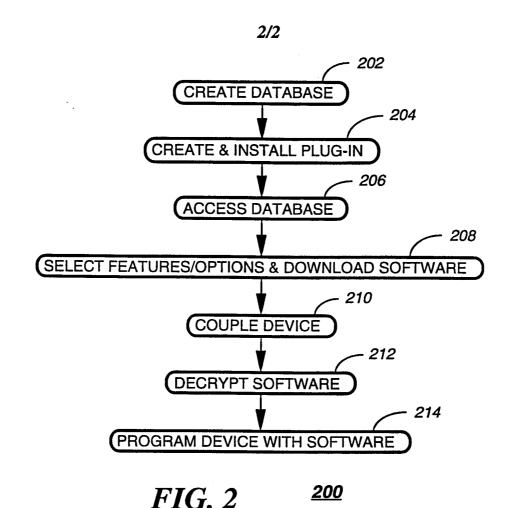

WELCOME TO XYZ REPROGRAMMING CENTER

PLEASE ENTER MODEL NO.

PLEASE ENTER SERIAL NO.

PLEASE SELECT FEATURES/OPTIONS DESIRED

PACKAGE 1 PACKAGE 2 PACKAGE 3

PACKAGE 4 PACKAGE 5 PACKAGE 6

PACKAGE 7 PACKAGE 8 PACKAGE 9

PACKAGE 10 PACKAGE 11 PACKAGE 12

FIG. 3 $\frac{300}{}$

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/03026

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :G06F 9/24, 12/22, 13/10 US CL :380/4, 49; 395/680 A subject to both notional place of the partial place of th								
According to International Patent Classification (IPC) or to both national classification and IPC								
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols)								
U.S.: 380/4, 49; 395/680								
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched								
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS: browser, programming device, plug "in", communication port								
C. DOCUMENTS CONSIDERED TO BE RELEVANT								
Category*	Citation of document, with indication, where ap	propriate, of the relevant passages Relevant to claim No.						
A	US 5,410,598 A (SHEAR) 25 APRIL 1995, see col. 10, lines 10-22. 1, 2, 9, 10.							
A	US 5,060,295 A (BORRAS et al) 22 OCTOBER 1991, see col. 2, lines 13-33.							
A	US 5,379,404 A (RASOR) 03 JANUARY 1995, see col. 2, lines 13- 1, 6, 9. 33.							
A,P	US 5,694,399 A (JACOBSON et al) 02 2, lines 11-37.	DECEMBER 1997, see col. 1, 6, 9.						
Further documents are listed in the continuation of Box C. See patent family annex.								
"A" do	pecial categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention						
"E" ea	be of particular relevance rlier document published on or after the international filing date ocument which may throw doubts on priority claim(s) or which is	X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone						
O do	ted to establish the publication date of another citation or other secial reason (as specified) becoment referring to an oral disclosure, use, exhibition or other same	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art						
P do	ocument published prior to the international filing date but later than e priority date claimed	*&* document member of the same patent family						
Date of the actual completion of the international search Date of mailing of the international search report								
20 MAY 1998 06 JUL 1998								
Commission Box PCT	mailing address of the ISA/US oner of Patents and Trademarks on, D.C. 20231	Authorized officer Classification Strain GILBERTO BARRÓN JR.						
1	No. (703) 305-3230	Telephone No. (703) 305-1830						