



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61F 5/447 // A61F 5/44	A1	(11) International Publication Number: WO 93/17643 (43) International Publication Date: 16 September 1993 (16.09.93)
(21) International Application Number: PCT/DK93/00077 (22) International Filing Date: 3 March 1993 (03.03.93) (30) Priority data: 0289/92 4 March 1992 (04.03.92) DK (71) Applicant (for all designated States except US): COLO-PLAST A/S [DK/DK]; Bronzevej 2-8, DK-3060 Espergærde (DK). (72) Inventors; and (75) Inventors/Applicants (for US only) : ENEVOLDSEN, John [DK/DK]; Rødovrevej 357, st. th., DK-2610 Rødovre (DK). TANGHØJ, Allan [DK/DK]; Stockflethsvej 17, DK-2000 Frederiksberg (DK). (74) Agent: HOFMAN-BANG & BOUTARD A/S; Adelgade 15, DK-1304 Copenhagen K (DK).		(81) Designated States: AU, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>In English translation (filed in Danish).</i>
(54) Title: COLLECTION BAGS AND METHOD FOR PRODUCING SUCH BAGS <div style="text-align: center;"> </div>		
(57) Abstract <p>Collection bags for use by urine-incontinent or ostomy-operated individuals, comprising two outer sheet walls, an inlet opening and optionally one or more discharge openings, wherein the two outer sheet walls have interposed between them one or more inner sheet members which are joined with the outer sheet walls and wherein at least one of the inner sheet members has at least one fold between a joint to the inner side of the one and the other outer sheet wall, respectively, when the bag is empty. Processes for producing the collection bags by welding in one or two steps and using temporary or permanent welding-preventing elements. The collection bags have a substantially flat shape and a substantially plane surface, so that the area extent of the bag is utilized optimally in terms of volume.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

Collection bags and methods for producing such bags

5 The present invention concerns collection bags for use by urine-incontinent or ostomy-operated individuals, said collection bags having at least one inlet opening and optionally one or more discharge openings.

10 Collection bags of the above-mentioned type may be formed from a sheet tube or a sheet member which is folded centrally in longitudinal or transverse directions to form two outer sheet walls, the open ends or edges of the sheet tube or the sheet member being closed by joining, preferably by glueing or welding.

15 The collection bag which has been used most extensively for many years is a bag consisting of two weldable sheets which, apart from openings for inlet and discharge, are welded together along their peripheries to form a cavity for the collection of urine and/or faeces.

20 Collection bags of this simple design operate excellently in reality. However, such a bag is not particularly discrete, because when used it bulges very much and is very difficult to conceal for the user particularly in a filled or almost filled state. Furthermore, the collected human wastes, if just a little liquid, will have a great tendency to lap when the user moves about, thereby giving unpleasant sounds that may have a considerable inhibitory effect on the user.

30 In spite of these problems collection bags of the above-mentioned design are still used.

35 It has previously been attempted to solve the above-mentioned problems by manufacturing collection bags of a

- 2 -

flatter shape. Generally, two types of collection bags are known today which essentially have properties reducing the tendency of the bag contents to lap, and which do not bulge so much as the first-mentioned simple bag.

5

The first type of these "flatter" collection bags has two sheet walls optionally consisting of two weldable sheets which are welded together along the periphery in the same manner as collection bags of the simple design. The two
10 sheet walls are additionally welded together at one or more spots or in one or more lines, e.g. a longitudinal central weld. This type of collection bag has a relatively flat shape which makes it easier for the user to conceal it under the clothes, and the flat shape of the bag as
15 well as the division into chambers entail that the tendency of the bag contents to lap is reduced considerably. A collection bag of this type is known e.g. from DK published application 113 595.

20 Thus, such a collection bag of the last-mentioned type does not bulge in one big bulge when the bag is filled or almost filled, but bulges instead in several small, but nevertheless considerable bulges, which imparts a very curved surface to the bag. This entails that the space
25 occupied by the bag under the user's clothes is utilized very poorly, because the effective volume of the bag, i.e. the volume which the bag can contain, is considerably smaller than the volume or the space occupied by the bag under the user's clothes. Such bags therefore rarely have
30 an effective volume which is particularly great, since, otherwise, the bag would take up unacceptably much space under the user's clothes. Additionally, when the bag is filled, the spot or line welds are loaded by oppositely directed forces which will tend to tear the welds apart.
35 If the bag is additionally subjected to an impact or a blow, this causes a pull in the spot or line welds, which

- 3 -

additionally increases the risk of the weld being torn apart. It is a very unpleasant feeling for the user when a weld suddenly fails, and at worst tearing of a weld may cause the bag to leak.

5

The second type of the "flatter" collection bags consists of four or more sheet layers, all of which have the same peripheral circumference, and which are welded together along their peripheries so that all the sheet layers, both the outer and the inner ones, have the same extent in area. The two central sheets moreover have a plurality of longitudinal welds arranged at intervals side by side. In the space each of the two intermediate sheets is welded together with the contacted outer sheet in longitudinal lines. The collection bag is thus divided into a plurality of longitudinal bag sections which are interconnected via openings in the intermediate sheets. Collection bags of this type are described in e.g. DK published application 135 928 as well as in the applicants' own DK patent specification 149 402.

The last-mentioned collection bag substantially has the same properties as the collection bags with walls welded together in one or more spots or lines, but the bag surface is somewhat less curved. The intermediate sheets thus form some intermediate walls which, when the bag is full, cause the outer sheet walls in the lines where the intermediate sheets are welded to these to be kept apart at a distance which is considerably smaller than the distance of the outer sheet walls between the weld lines, the inner sheets causing a transverse pull in the bag owing to their zigzag configuration, which necessarily causes the outer sheet walls to bulge between the longitudinal welds. The effective volume of this collection bag is therefore likewise unacceptably small with respect to the space occupied by the bag under the user's clothes, and the bag is more-

- 4 -

over very expensive to manufacture, because not only is considerably more sheet material to be used, but also a complicated welding tool as well as a manufacturing process which is time-consuming and difficult in terms of handling.

The object of the present invention is to provide collection bags which have an essentially flat or plane shape, and which satisfactorily prevent liquid contents from lapping, and which have "safe" welds, and which also have satisfactorily effective volumes with respect to the shape occupied by the bags under the user's clothes.

This object is achieved by the collection bags of the invention which are of the type defined in the introductory portion of claim 1, and which are characterized by the features defined in the characterizing portion of claim 1.

Thus, a collection bag according to the invention comprises one or more inner sheet members which are folded in a suitable configuration, e.g. in a longitudinal fold, a longitudinal double fold or a fold about themselves to form a tube.

Thus, a collection bag according to the invention has one or more intermediate walls which are formed by the inner sheet member or members, and which determine the maximum distance between the two outer sheet walls in the spots or lines where the inner sheet member or members are attached to these, said inner sheet member or members causing no transverse tension in the bag. A collection bag according to the invention thus has a relatively flat shape and a surface which is substantially plane. Thus, the invention provides a collection bag which has an optimum volume with respect to the space occupied by the bag under the user's clothes.

- 5 -

5 The fold or folds of an inner sheet member between the joints of the sheet member to the one and the other, respectively, of the two sheet walls are to be free. A free fold means that no other tension may occur in the fold than the tension caused by the sheet walls at the attachment points or lines to the inner sheet member. Two sheet members welded together along a side edge to form a free intermediate wall is thus considered as being one sheet member.

10

The inner sheet member or members are preferably joined with the inner sides of the outer sheet walls by welding, but they may also be attached in another manner, e.g. by glueing, in particular hot melt glueing.

15

The inner sheet member or members may additionally be attached to each other or to itself.

20

The joints may be provided in spots or lines, preferably longitudinal lines.

25

The inner sheet members may have perforations or holes through which the bag contents can pass. Such holes or perforations are advantageous in particular if the inner sheet members are attached to the outer walls at or in the lower edge of the bag.

30

The outer sheet walls may have one or more inward folds in or at their side edges, as known from US patent specification 2 741 247. These inward folds may e.g. be provided as one or more pleats in one sheet wall.

35

A collection bag according to the invention having such pleats or inward folds in or at the side edges thus have "high" edges, which entails that when filled the bag has substantially the same thickness along its entire surface

- 6 -

extent.

5 The collection bags according to the invention can moreover be manufactured in a relatively simple and inexpensive manner, and only such an amount of sheets as is functionally necessary is used.

10 The invention moreover concerns methods for producing the collection bags of the invention, which methods are relatively uncomplicated and rapid and moreover do not present any serious difficulties in terms of handling.

15 The methods of the invention, which are of the type defined in the introductory portion of claim 11, are characterized by the features defined in the characterizing portion of claim 11.

20 A first preferred embodiment of a collection bag according to the invention comprises an inner tubular sheet member folded longitudinally. The inner sheet member is welded to the one and the other, respectively, outer sheet in longitudinal rows of spots or lines. The inner sheet member may be tubular already before being welded to the outer sheets, or the sheet member may be folded so as to form the tube, while being welded to the outer sheets.

30 A second embodiment of a collection bag according to the invention comprises an inner sheet member which, alternately with lateral gaps, is welded to the inner sides of the one and other, respectively, of the outer sheet walls in longitudinal rows of spots or lines, the inner sheet member having a free double fold between each weld line when the bag is empty and thus flat.

35 These and other preferred embodiments are described more fully below with reference to the drawing, in which

- 7 -

fig. 1 is a perspective view of a first preferred embodiment of a collection bag according to the invention, where the upper portion of the bag has been cut away, and where the bag has the shape it assumes when filled,

5

fig. 2 is a cross-section of the embodiment shown in fig. 1,

10

fig. 3 is a cross-section of a variant of the first preferred embodiment of a collection bag according to the invention,

15

fig. 4 shows the collection bag of fig. 3 after welding, where the bag has the shape it assumes when filled,

20

fig. 5 is a cross-section of a second variant of the first preferred embodiment of a collection bag according to the invention, seen at the welding situation,

25

fig. 6 is a cross-section of a third variant of the first preferred embodiment of a collection bag according to the invention, seen immediately before the welding situation,

fig. 7 is a cross-section of a second embodiment of a collection bag according to the invention in a half-filled, horizontal state, and

30

fig. 8 is a cross-section of a third preferred embodiment of a collection bag according to the invention in a half-filled, horizontal state.

35

The collection bag shown in figs. 1 and 2 consists of two outer sheet walls (1, 2), which have two welded side edges (3, 4) a lower welded edge (5) and an upper welded edge (not shown). In the upper edge or in one of the two outer sheet walls the upper portion (not shown) of the bag has

- 8 -

an inlet opening in which a tube member or the like is attached if it is a urine-incontinens bag, and if it is an ostomy bag, an adhesive layer, a coupling ring as described e.g. in the applicants' own patent publications WO 91/01118 and WO 91/01119, or the like is arranged on the outer side of the sheet wall along the periphery of the opening. A reflux valve is optionally arranged after the inlet opening in a generally known manner. Likewise, the lower portion of the bag may include one or more discharge openings that can be opened and closed, e.g. by means of a valve system. Particularly useful is the valve system mentioned in the applicants' own Danish patent application having the same filing date as the present application. The above-mentioned discharge openings have been omitted for clarity. The collection bag has an inner sheet member which has the shape of a tube (6). The tube is welded to the inner side of the outer sheet wall (1) in two longitudinal weld lines (7, 8) and to the inner side of the outer sheet wall (2) likewise in two longitudinal weld lines (9, 10).

Figs. 3 and 4 show in outline how a first variant of the collection bag shown in figs. 1 and 2 is produced, and thus illustrate the appearance of the characteristic inner sheet members when the bag is filled and empty, respectively. The inner sheet tube (16) consists of a sheet laminate of two different plastics materials (13, 14). The inner layer (14) is not weldable to itself at the given welding parameters, the outer layer (13) being welded to the inner sides (1a, 2a) of the two outer sheet walls (1, 2). If the outer sheet walls (1, 2) of the bag consist of polyethylene, the sheet laminate may e.g. be a laminate of polyethylene and polyester, the polyester constituting the non-weldable layer (14), and the sheet tube (16) being welded to the inner sides (1a, 2a) of the outer sheet walls by hot welding. Another example is a bag having

- 9 -

outer sheet walls (1, 2) of PVC, the sheet laminate being a laminate of PVC and polyethylene, the non-weldable layer (14) being constituted by the polyethylene layer, and the tube (16) being attached to the inner sides (1a, 2a) of the outer sheet walls by high frequency welding. It appears from fig. 3 how the welding tool (11) presses against the outer sides (1b, 2b) of the outer sheet walls, thereby causing the outer layer (13) of the tube to be welded to the inner sides (1a, 1b) of the outer sheet walls in the weld lines (17, 18, 19 and 20). The welding tool may optionally be designed such that the two outer sheet walls are simultaneously welded together along their peripheries. In the welding situation shown in fig. 3 the collection bag is empty, and the tube (16) has two free longitudinal folds (15a, 15b) between the weld lines (17, 18) of the tube to the inner side (1a) of one outer sheet wall and the opposed weld lines (19, 20) to the inner side (2a) of the other outer sheet wall. Fig. 4 shows the section of the collection bag after welding in a filled state, and it will be seen that the folds (15a, 15b) shown in fig. 3 are extended between their weld lines (17, 19) and (18, 20), respectively.

Fig. 5 shows in outline how a second variant of the collection bag shown in figs. 1 and 2 is produced. The inner sheet tube (26) has inner and outer surfaces (26a, 26b). The outer surface (26b) is welded to the inner surfaces (1a, 2a) of the outer sheet walls in longitudinal weld lines (27, 28, 29, 30) by means of the welding tool (21), which presses against the outer surfaces (1b, 2b) of the outer sheet walls, a welding preventing element (22) being arranged loosely, optionally temporarily, inside the tube (26), said element (22) preventing the inner side (26a) of the sheet tube from being welded to itself in the process. Like in fig. 3, it will be seen that the sheet tube (26) has two free longitudinal folds (25a, 25b) which will be

- 10 -

stretched when the finished bag is filled. The bag outlined in fig. 5 is frequently produced in two steps, the outer sheet walls (1, 2) being welded together along their peripheries in a second welding step after the loosely arranged, welding preventing element (22), which in that case is just arranged temporarily, has been removed. Where the loosely arranged, welding preventing element (22) is just mounted temporarily, the welding preventing element (22) may suitably be part of the welding tool.

10

Fig. 6 shows in outline how a third variant of the collection bag shown in figs. 1 and 2 is produced. The bag section is seen immediately before the welding process. The two outer sheet walls (1, 2) have interposed between them an inner sheet member (36) which is folded about itself in two longitudinal folds (35a, 35b). The sheet member (36) is retained in this position by means of a self-adhesive tape (32) which is partly in adhesive contact with the inner side (36a) of the sheet member along the longitudinal edges (36') of the sheet member and partly in adhesive contact with the inner side (1a) of one outer sheet wall, so that the sheet member (36) and the tape (32) together form a tube. The tape (32) consists of an adhesive layer (33) and a layer of a non-adhesive material (34) which is non-weldable to the inner side (36a) of the sheet member at the welding parameters used. In the welding process the welding tool (31) is pressed against the outer sides (1b, 2b) of the outer sheet walls and simultaneously releases heat, thereby attaching the inner side (1a) of one outer sheet wall in two respective weld lines to the outer side (36b) of the inner sheet member along the edges (36') of the sheet member, and attaching the inner side (2a) of the other outer sheet wall in two other weld lines to the outer side (36b) of the sheet member. Like in the variant of the collection bag shown in fig. 3 the two sheet walls (1, 2) may be attached to each other along their peri-

35

- 11 -

pheries optionally in the same welding process.

Fig. 7 shows an outline of a second embodiment of a collection bag according to the invention. The collection bag has two outer sheet walls (101, 102) which are attached to each other along their peripheries (103, 104) by e.g. glueing or welding. The two sheet walls (101, 102) have interposed between them one or more sheet members (106), and if more than one such sheet member is provided, the sheet members are attached to each other along their longitudinal edges in attachment lines (107, 108, 109; 110, 111) and thus constitute a sheet member which is attached alternately with lateral gaps to the inner sides of the one and the other, respectively, of the two outer sheet walls in the longitudinal attachment lines (107, 108, 109, 110, 111) e.g. by welding or glueing. When the bag is empty, the sheet member (106) has a free longitudinal double fold (112, 113) between each attachment line (107, 108, 109, 110, 111).

Fig. 8 shows in outline a third embodiment of a collection bag according to the invention. The collection bag has two outer sheet walls (201, 202) which are attached to each other along their peripheries (203, 204) e.g. by welding or glueing. The two sheet walls may also be provided in another manner, e.g. by a sheet tube which is joined upwardly and downwardly. At its two longitudinal edges one sheet wall has a double fold (212, 213) which folds into the bag when the bag is not filled. The two sheet walls (201, 202) have interposed between them a sheet member (206) which is attached along its side edges to the one and the other, respectively, of the two outer sheet walls (201, 202) in longitudinal attachment lines (207, 209), and which, when the bag is not filled, has a longitudinal fold (206). The bag is here shown in a half-filled, horizontal state, and it will be seen that the folds (206,

- 12 -

212, 213) are semi-stretched. When the bag is filled, the folds (206, 212, 213) are stretched completely and the bag maintains a plane surface.

5 The bags shown in figs. 7 and 8 can be produced in several different ways, as mentioned before, e.g. by glueing or welding. If the bags are welded, one of the methods described in connection with figs. 3-6 may suitably be used, and the arrangement of the various sheets, welding pre-
10 venting elements and the welding tool is of course to be adapted to the bag to be produced.

15

20

25

30

35

- 13 -

P a t e n t C l a i m s :

1. Collection bags for use by urine-incontinent or
5 ostomy-operated individuals, each of which comprises two
outer sheet walls (1, 2, 101, 102, 201, 202), and which
are optionally formed by joining two sheet members along
their peripheries (3, 4, 5, 103, 104, 203, 204) and have
10 an upper end with an upper edge and a lower end with a
lower edge as well as two side edges (3, 4, 103, 104, 203,
204), an inlet opening being provided in the upper end in
the edge or in one of the two sheet walls (1, 2), one or
more discharge openings being optionally provided in the
15 lower end, each of said bags having an inner sheet member
or several inner sheet members (6, 16, 26, 36, 106, 206),
which are joined to the inner side of the one or the
other, respectively, outer sheet wall, c h a r a c t e r -
i z e d in that the inner sheet member or at least one of
the inner sheet members (6, 16, 26, 36, 106, 206) has at
20 least one fold (15a, 15b, 25a, 25b, 35a, 35b, 112, 113,
215) between a joint (7, 8, 9, 10, 17, 18, 19, 20, 27, 28,
29, 30, 107, 108, 109, 110, 111, 206, 209) to the inner
side (1a, 2a) of the one and the other, respectively,
outer sheet wall when the bags are empty.
- 25
2. Collection bags according to claim 1, c h a r a c -
t e r i z e d in that the inner sheet member or at least
one of the inner sheet members (6, 16, 26, 36, 106, 206)
is exclusively connected with the inner sides (1a, 2a) of
30 the outer sheet walls at respective joints spaced from the
side edges (3, 4, 103, 104, 203, 204) of the outer sheet
walls.
3. Collection bags according to claim 2, c h a r a c -
35 t e r i z e d in that the respective joints between the
inner sheet member or the inner sheet members (6, 16, 26,

- 14 -

36, 106, 206) and the inner sides (1a, 2a) of the outer sheet walls terminate at a distance from the upper edge and lower edge (5) of the outer sheet walls.

5 4. Collection bags according to claims 1-3, c h a r a c -
t e r i z e d in that each bag has one or more longitu-
dinal inward folds at its side edges (203, 204), prefer-
ably in the form of one or more pleats in one of the two
outer sheet walls (201).

10

5. Collection bags according to claims 1-4, c h a r a c -
t e r i z e d in that the inner sheet member or the inner
sheet members (6, 16, 26, 36, 106, 206) are connected with
the inner sides (1a, 2a) of the outer sheet walls by
15 joints to one side (13, 26b, 36b) of each individual inner
sheet member.

20 6. Collection bags according to claims 1-5, c h a r a c -
t e r i z e d in that the inner sheet member or the inner
sheet members (6, 16, 26, 36) together have the shape of a
tube.

25 7. Collection bags according to claims 1-5, c h a r a c -
t e r i z e d in that the inner sheet member or the inner
sheet members have one or more longitudinal folds or
pleats (15a, 15b, 25a, 25b, 35a, 35b, 112, 113, 215).

30 8. Collection bags according to claims 1-7, wherein the
inner sheet member or the inner sheet members (6, 16, 26,
36, 106, 206) are attached to the inner sides of the outer
sheet walls and optionally to itself or each other, and
wherein at least one of the attachments is made by weld-
ing, c h a r a c t e r i z e d in that the inner sheet
member or at least one of the inner sheet members (6, 16,
35 26, 36, 106, 206) has one or more areas, preferably one
side (14, 34) which is not weldable either to itself, to

- 15 -

5 another inner sheet member or to the inner sides of the outer sheet walls at the used welding parameters, other inner sheet member areas being welded to the inner sides of the outer sheet walls and optionally to itself or each other.

10 9. Collection bags according to claim 8, c h a r a c - t e r i z e d in that the non-weldable area or areas are made non-weldable by coating with a self-adhesive tape (32), and that the tape is additionally in adhesive contact with the inner sides (1a, 2a) of one of the two outer sheet walls.

15 10. Collection bags according to claim 8, c h a r a c - t e r i z e d in that at least one of the inner sheet members (6, 16, 26, 36, 106, 206) is a laminate (16) of at least two different materials (13, 14) having mutually different welding properties.

20 11. Methods for producing the collection bags according to claims 1-10, wherein the inner sheet member or the inner sheet members (6, 16, 26, 36, 106, 206) are attached to the inner sides (1a, 2a) of the outer sheet walls by welding, and wherein the bag is formed by two sheet members
25 which are welded along their peripheries (3, 4, 5, 103, 104, 203, 204) to form the outer sheet walls (1, 2, 101, 102, 201, 202), c h a r a c t e r i z e d in that all the welds are made in one and the same step or in two steps, the first step of the last-mentioned case comprising weld-
30 ing the inner sheet member or sheet members (6, 16, 26, 36, 106, 206) to the inner sides (1a, 2a) of the outer walls, one or more welding-preventing elements (22) being temporarily arranged, the second step comprising removing these welding-preventing elements, and then welding the
35 outer sheet walls along their peripheries, said one or more welding-preventing elements (22) being preferably

- 16 -

part of the welding tool (11, 21, 31).

5

10

15

20

25

30

35

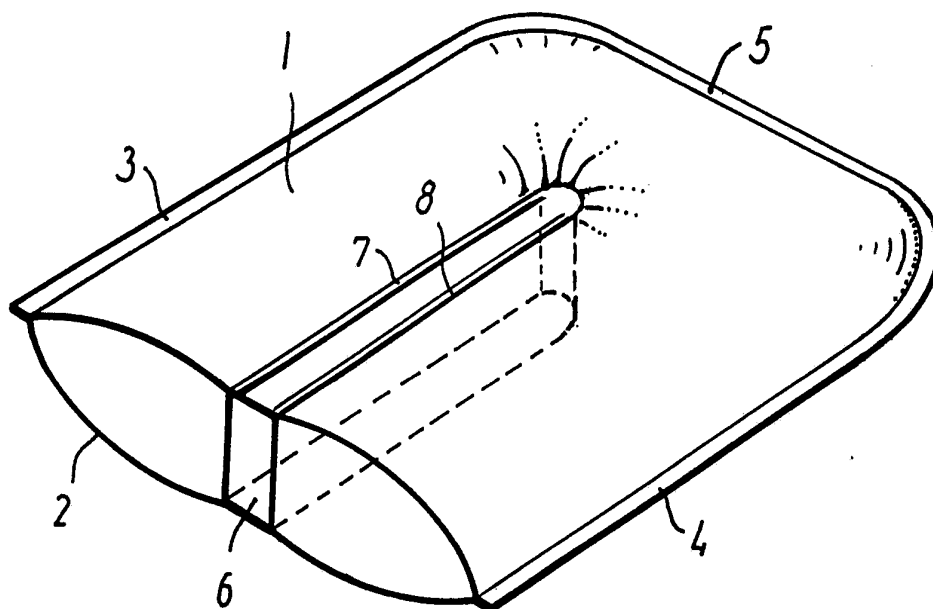


FIG. 1

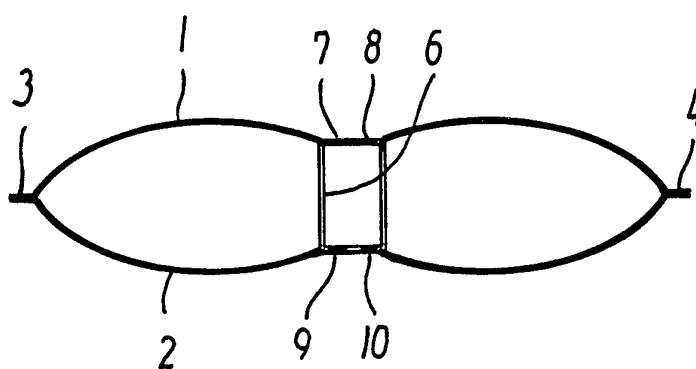


FIG. 2

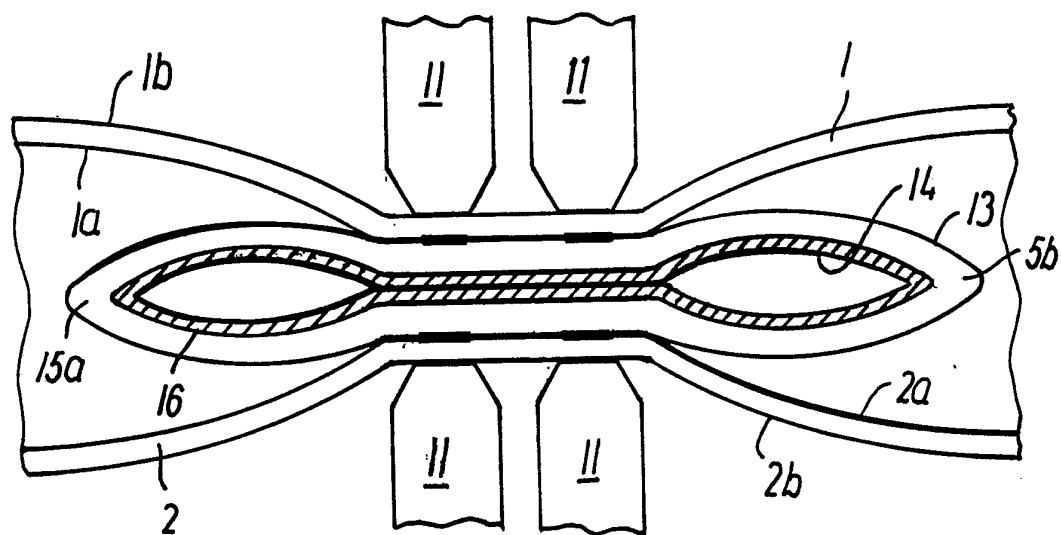


FIG. 3

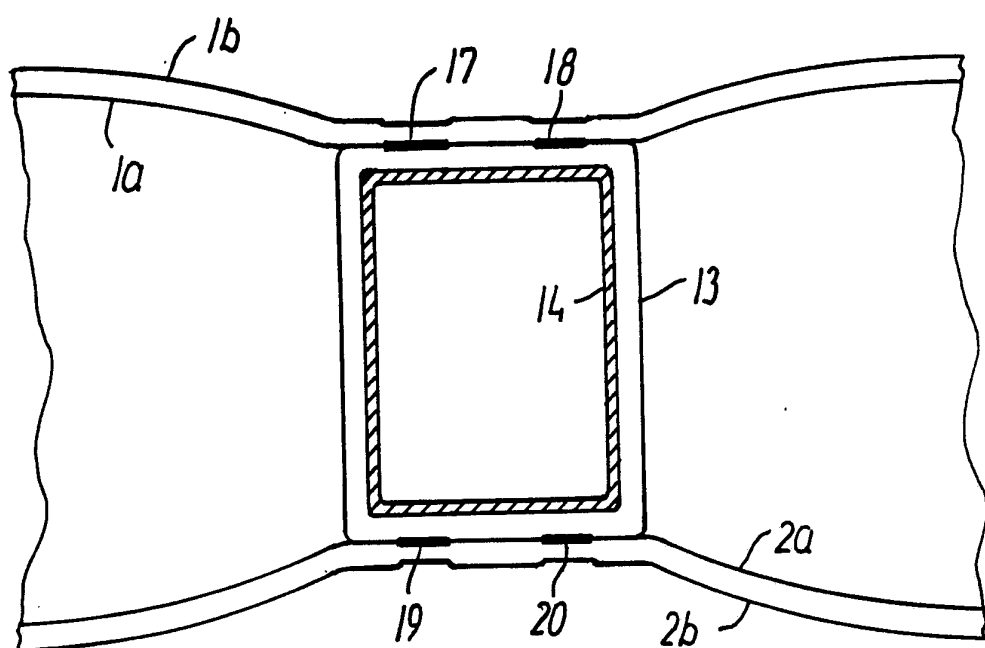


FIG. 4

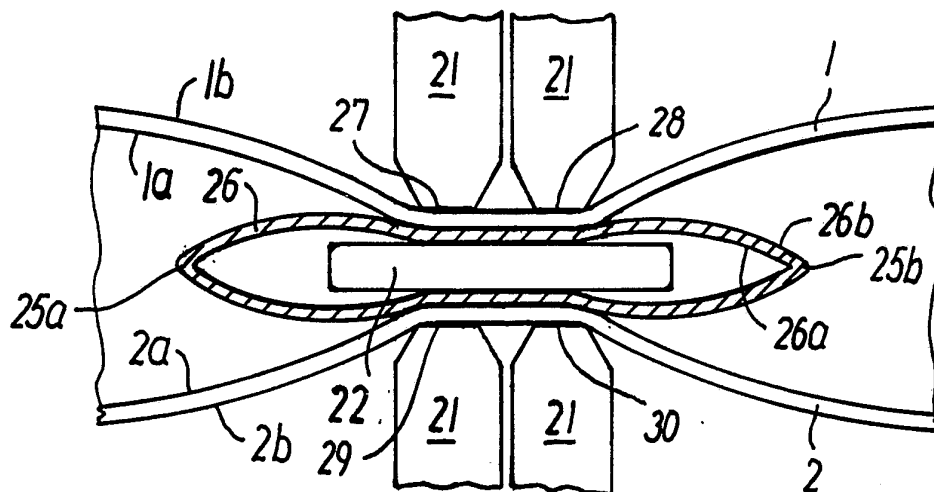


FIG. 5

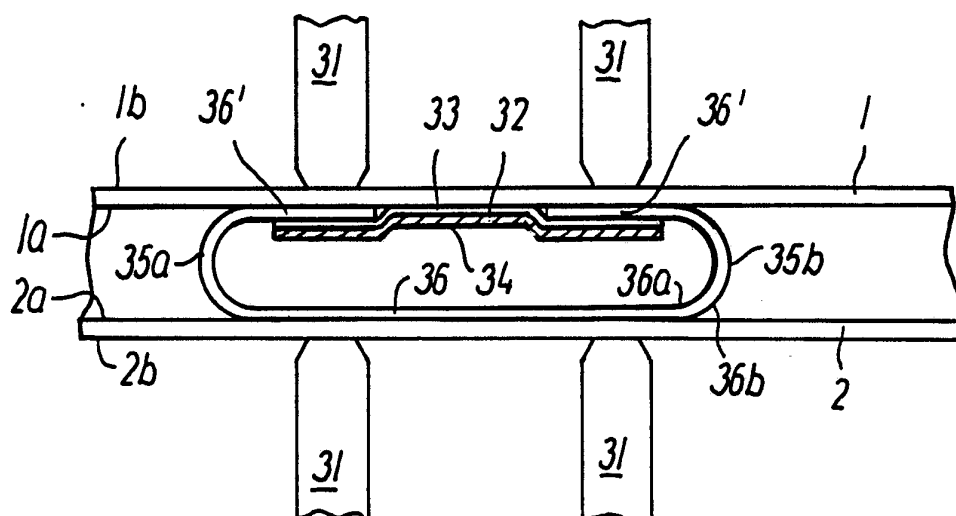


FIG. 6

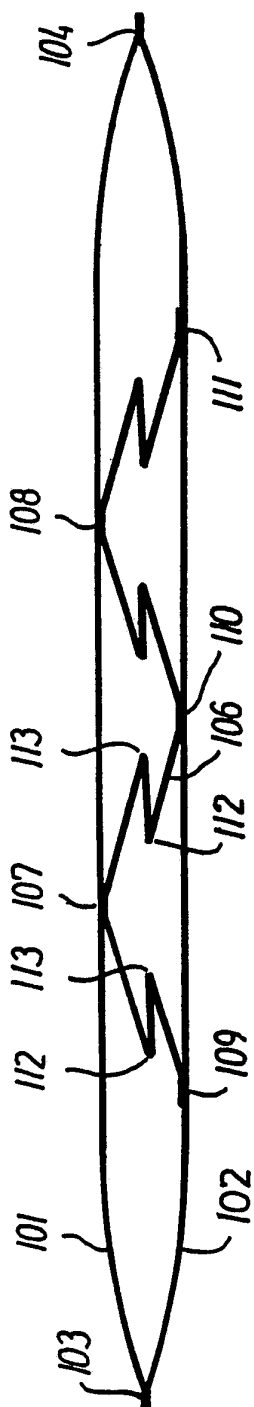


FIG. 7

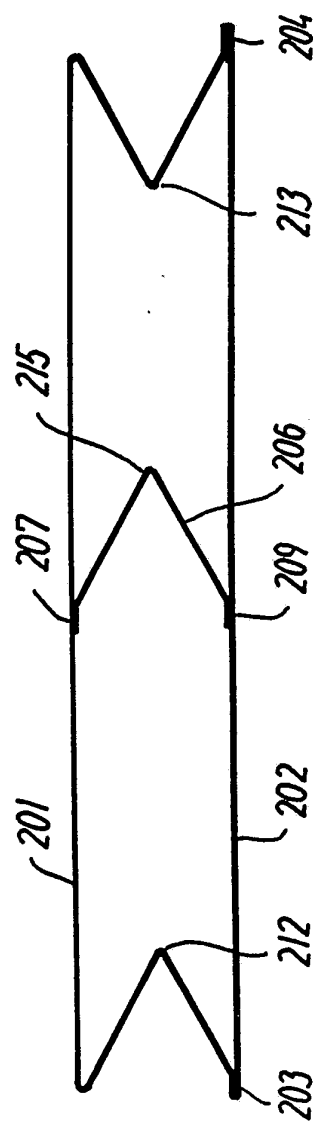


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/DK 93/00077

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: A61F 5/447 // A61F 5/44
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DK, B, 113595 (PLAFINCO V/ FINN HJERL-HANSEN), 8 April 1969 (08.04.69) --	1
A	DK, B, 135928 (LENNART BRENDLING), 18 July 1977 (18.07.77) --	1
A	DK, B, 149402 (COLOPLAST A/S), 2 June 1986 (02.06.86) --	1
A	US, A, 2741247 (E.P. MARSAN), 10 April 1956 (10.04.56) -- -----	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 June 1993

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

16 -06- 1993

Authorized officer

Sune Söderling
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

28/05/93

International application No.

PCT/DK 93/00077

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DK-B-	113595	08/04/69	NONE	
DK-B-	135928	18/07/77	NONE	
DK-B-	149402	02/06/86	NONE	
US-A-	2741247	10/04/56	NONE	