

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 November 2005 (10.11.2005)


PCT

(10) International Publication Number
WO 2005/105599 A1

- (51) International Patent Classification⁷: **B65D 71/00**, (74) Agent: STRÖM & GULLIKSSON AB; P.O. Box 4188, S-203 13 Malmö (SE).
- (21) International Application Number: PCT/SE2005/000609 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 27 April 2005 (27.04.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0401137-5 30 April 2004 (30.04.2004) SE
- (71) Applicant (for all designated States except US): **INTER IKEA SYSTEMS B.V.** [NL/NL]; Olof Palmestraat 1, NL-2616 LN Delft (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DICKNER, Allan** [SE/SE]; Storkstigen 16, S-343 35 Älmhult (SE). **LÖRGÅRD, Bo** [SE/SE]; Mossvägen 5, S-302 56 Halmstad (SE).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PLATFORM

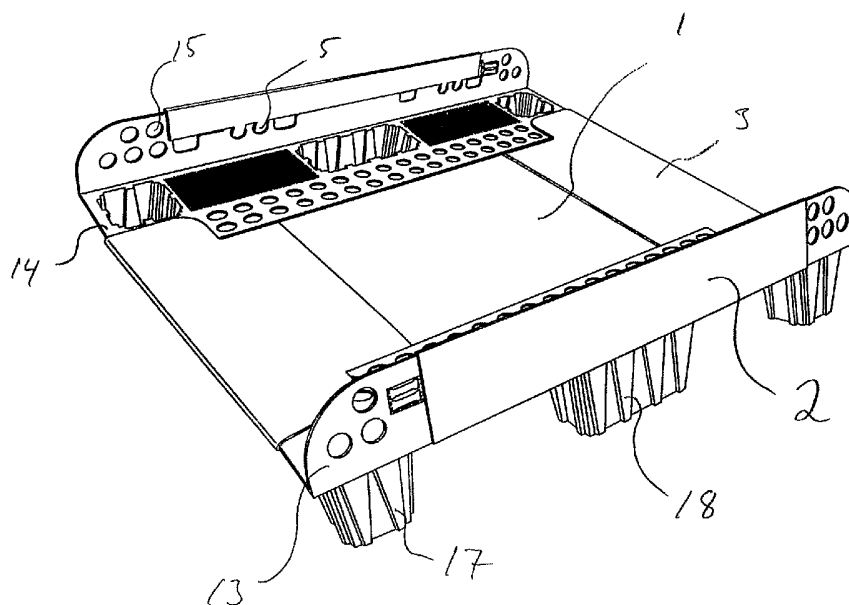

(57) Abstract: The present invention concerns a load carrying platform formed by a blank (1, 23, 29) of cardboard or plastic and two or more loading ledges (12). The platform is formed in that the blank (1, 23, 29) is folded around a horizontal and a vertical leg (13, 14) of each loading ledge (12). At least a middle foot (18) of each loading ledge (12) is received in an opening (4) of the blank (1). In some embodiments the blank has two transversal flaps (3, 19, 20), two longitudinal flaps (2) and creases (6-8, 11) to facilitate folding.

WO 2005/105599 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PLATFORM

5

Technical Field

The present invention concerns a platform to be used as a support for displaying goods in a store, showroom, for transportation and storing of a number of relatively small packages etc.

10

Prior Art

Traditional pallets used for the transport of goods are often also used when the goods are to be displayed. Some special means as a trough may be placed on the pallet or the pallet may be introduced with the goods as transported or stored. In recent years loading ledges have been introduced as a replacement for the traditional pallet. The loading ledges may be of the type described in our Swedish Patent Application No. 0202779-5.

15

20

Summary of the Invention

One aim of the present invention is to be able to use the same loading ledges that are used for transportation and storing when displaying goods in a store, showroom etc. According to the present invention this is achieved, by combining the loading ledges with a blank of paperboard or cardboard to form a platform. Even if the blank is described as being made of cardboard, a person skilled in the art realises that any material having similarly characteristics may be used, e.g. different foldable plastic material such as corrugated or flat plastic sheeting. The blank is designed and cut to co-operate with two or more loading ledges. The same loading ledges used for transportation or storing of the goods may then be used in forming the platform for displaying the goods. Just folding the blank

25

30

35

around the loading ledges in a suitable way forms the platform. Thus, no adhesives or other means are needed to hold the loading ledges and the blank together as one unit.

Depending on the intended use and strength needed the blank may be given different designs. By using existing loading ledges together with a blank of cardboard the costs for manufacture and storing may be kept relatively low. Furthermore, the platform may be assembled quickly and easily.

According to one aspect of the present invention the platform is load-bearing or load carrying, having both transversal and longitudinal flaps folded around the loading ledges. By folding the blank onto itself there will be two layers of cardboard, at least in parts of a support surface. The support surface is formed between the vertical legs of the loading ledges. Adjusting the length of the parts where the cardboard is double may be used to control the bearing strength. A person skilled in the art realises that the platform according to the invention may be used to support anything, as long as the bearing strength of the platform is sufficient. The platform has a low weight and yet relatively good bearing capacity and strength.

According to another aspect of the present invention the platform is not load carrying in itself. One main function of the blank in this case is to be a distance element or spacer. The length of the blank is adapted to the dimensions of the package or the like holding the goods to be displayed. These kinds of platforms are normally fixed to the bottom of the packages or the like by a tape or other adhesive.

In many instances the platforms, irrespective of type, are used also during transportation from the manufacturer and in storing. In this way there is no need for any reloading. The platform of the present invention may also be used as a basis for a number of small packages, having a

size not making them suitable to use with loading ledges on their own. Thus, in such a case the platform could replace a possible plate otherwise placed between two loading ledges.

5 The exact form of the loading ledges is of no importance for the present invention, as long as the blank is adapted to the actual form of the loading ledges.

 Further objects and advantages of the present invention will be obvious to a person skilled in the art when
10 reading the detailed description below of preferred embodiments.

Brief Description of the Drawings

 The invention will be described further below with
15 reference to the enclosed drawings. In the drawings:

 Fig. 1 is a plan view of a blank for a platform according to the present invention;

 Fig. 2 is a perspective view of the blank of Fig. 1 folded in the way it will be folded to form the platform,
20 but shown without the loading ledges for clarity;

 Fig. 3 is a perspective view of one example of a loading ledge possible to use with the blank of Figs. 1 and 2;

 Fig. 4 is a perspective view of a platform according
25 to the present invention formed of the blank of Figs. 1 and 2 and two loading ledges according to Fig. 3;

 Fig. 5 is a perspective corresponding to Fig. 2 of a further embodiment of a blank according to the present invention;

30 Fig. 6 is a perspective view of a further embodiment of a blank according to the present invention;

 Fig. 7 is a plan view corresponding to Fig. 1 of a blank according to yet a further embodiment of the present invention;

Fig. 8 is a perspective view of a platform formed by the blank of Fig. 7 and two loading ledges according to Fig. 3;

Fig. 9 is a plan view of a blank according to a further embodiment of the present invention; and

Fig. 10 is a perspective of a platform formed by the blank of Fig. 9 and without the loading ledges for clarity.

Detailed Description of Preferred Embodiments

As used in this description the term "longitudinal" is the direction of the main extension of the loading ledges when the platform is formed. The term "transversal" is used correspondingly for the perpendicular direction to "longitudinal". As used in this description the terms "horizontal", "vertical" and corresponding expressions are in view of direction as shown in the enclosed drawings, which coincide with the directions in normal use.

The same reference numbers are used in the drawings for parts that are identical in the various embodiments shown.

An example of a blank 1 for a platform according to the present invention and a platform formed from the blank are shown in Figs. 1 and 2, respectively. However, it should be noted that the platform is not intended for use on its own, but to be used with two loading ledges or the like as explained further below. The blank 1 is often made of cardboard or paperboard, i.e. corrugated paper. As indicated above, in other embodiments the blank is made of other materials, such as a corrugated or flat plastic sheet having some degree of stiffness. The shown blank 1 has two longitudinal flaps 2 and two transversal flaps 3. Inside the flaps 2, 3 a rectangular centre of the platform is formed. The longitudinal flaps 2 are arranged at the longer sides of the blank 1 and opposite each other. The transver-

sal flaps 3 are arranged at the shorter sides of the blank 1 and opposite each other.

In the middle of each longitudinal flap 2 and adjacent the centre of the platform a rectangular opening 4 is formed. At the outer ends of the longitudinal flaps 2 a number of fingers 5 are formed. In the shown embodiment four fingers 5 are arranged at each flap 2 but the number and form of the fingers 5 may vary, depending on the design of the loading ledges or the like to be used with the platform.

Each longitudinal flap 2 has two longitudinal creases 6, 7, extending along the total length of the flaps 2. One crease 6 is arranged adjacent the rectangular opening 4 of each longitudinal flap 2. The crease 6 is arranged in such a position that the opening 4 is placed between said crease 6 and the centre of the platform. The other of the longitudinal creases 7 is a double crease placed closer to the outer end of the flap 2. The crease 7 is double in that sense that the outer end of the flap 2 is to be folded onto itself, with a part of a loading ledge 12 in-between.

The transversal flaps 3 have a crease 8 each extending parallel with the short ends of the centre of the platform and along the whole of the transversal flap 3. The crease 8 is arranged about the middle of each transversal flap 3 as shown. The length of the loading ledges 12 dictates the position of the crease 8. The short end of the horizontal leg 14 of each loading ledge 12 is to be received at the crease 8 when the transversal flap 3 is folded over. The crease 8 is double in that sense that each transversal flap 3 is to be folded onto itself, with a part of a loading ledge 12 in-between. The extension of the transversal flaps 3 may be varied, depending on the desired stability of the platform formed. This is discussed further below in connection with the embodiments of Figs. 5 and 6.

The outer end 9 of each transversal flap 3 is less extended in the transversal direction than the rest of the flap 3. Two opposite slits 10 are arranged between the outer end 9 of each transversal flap 3 and the rest of the flap 3. The length of each slit 10 depends on the dimensions of the loading ledges to be used. A crease 11 is arranged between the inner ends of each slit 10 and the free end of the outer end 9. The parts of the outer ends 9 outside each crease 11 are to be bent down under a loading ledge, when the platform is formed.

In Fig. 3 one example of a loading ledge 12 is shown, which loading ledge 12 may be used with the blank of Figs. 1 and 2 to form a platform. As indicated in fig. 4 one blank 1 and two loading ledges 12 normally form the platform.

The loading ledges 12 have one vertical leg 13 and one horizontal leg 14. In the vertical leg 13 a number of holes 15 are arranged, originally to reduce the weight of the loading ledge 12. Furthermore, locking elements 16 for straps or the like are arranged on the vertical leg 13. On the lower side of the horizontal leg three feet 17, 18 are arranged. The feet 17, 18 are furnished to enable handling by normal handling equipment, such as different types of lift trucks. Two of the feet 17 are placed at the ends of the horizontal leg 14 and have a smaller longitudinal extent than the third foot 18 placed in the middle of the horizontal leg 14.

In use the central foot 18 of a loading ledge 12 is placed in each of the rectangular openings 4 of the longitudinal flaps 2. The feet 17 at the ends of the loading ledges 12 are normally placed adjacent the edges of the longitudinal flaps 2. In other embodiments also the feet 17 at the ends are received in openings in the blank. The outer part of the longitudinal flaps 2 is folded over the outer end of the vertical leg 13 of the loading ledge 12 at

the crease 7. The fingers 5 at the outer end of the flap 2 are placed in suitable holes 15 of the loading ledge 12. In other embodiments the fingers 5 of the flaps 2 are received in holes formed at the locking elements 16. Thus, each flap 2 is held at a loading ledge 12 by co-operation between the fingers and the holes 15 of the horizontal leg 13 or the holes at the locking elements 16. With one loading ledge 12 on each side the transversal flaps 3 are folded at the crease 8 and the parts of the outer part 9 of the transversal flaps 3 outside the creases 11 are pushed down under the horizontal leg 14 of each loading ledge 12. Thus, a platform is formed comprising one blank 1 and two loading ledges 12. A support surface is formed between the vertical legs 13 of the two loading ledges 12. The dimensions of the blank 2 may be adapted to the intended use, i.e. the size of the package, container etc. to be used when displaying the goods.

As indicated in the Figs. 5 and 6 the length of the transversal flaps 19, 20 may vary. In the embodiments of Figs. 5 and 6 the length of each transversal flaps 19, 20 is such that the ends of the flaps 19, 20 will be placed adjacent each other when folded to form the platform. In the embodiment of Fig. 5 a tab 21 is formed at one end of one of the transversal flaps 20. Said tab 21 is to be received in a groove 22 formed in the other transversal flap 20, when the platform is formed. In the embodiment of Fig. 5 the end of the flap 20 has the same width as the rest of the flap. Thus, no part of the transversal flap 20 is to be placed under the horizontal legs 14 of the loading ledges 12. In another embodiment (not shown), the embodiments of Figs. 5 and 6 are combined. Thus, a tab 21 and a groove 22 are formed as in Fig. 5 while the rest of the flaps correspond to the form as shown in Fig. 6. In this latter embodiment the flaps are held down both by the co-operation

between the tab 21 and the groove 22 as well as by parts of the flaps being placed under the loading ledges 12.

By means of the flaps 19, 20 having ends placed adjacent each other in the finished platform there will be two layers of cardboard over the total support surface. Double
5 cardboard means that the bearing strength is increased compared to the other embodiments having shorter transversal flaps 3. Thus, the length of the transversal flaps 19, 20 influence the bearing strength of the platform to some extent.
10

The main difference between the blank 23 of Fig. 7 and the previously discussed blanks is that the blank 23 of Fig. 7 has no transversal flaps. It does have two longitudinal flaps 24 and two openings 25, for receiving a middle
15 foot 18 of a loading ledge 12 each. Furthermore, it has fingers 26 at the outer, free ends of the transversal flaps 24. The fingers 26 are to be received in holes at the locking elements 16 of the vertical legs 13 of the loading ledges 12. A person skilled in the art realises that the
20 fingers 26 as an alternative may be received in the holes 15 of the vertical leg 13 of a loading ledge 12. The position of the fingers 26 is adjusted depending on in which openings or holes 15 they are to be received. Furthermore, the blank 23 has creases 27, 28 to enable the blank to be
25 folded around two loading ledges 12. One crease 27 is placed adjacent each opening 25, for receiving a foot 18 of the loading ledge 12, at each end of the blank 23. Said crease 27 is to be positioned adjacent the outer corner between the vertical and horizontal legs 13, 14 of respective
30 loading ledge 12. The other crease 28 is double and the upper end of the vertical leg 13 of respective loading ledge is received at said crease 28 when the platform is formed. Each longitudinal flap 24 is to be folded onto itself with the vertical leg 13 of a loading ledge 12 in-between at
35 said other crease 28.

By using the blank 23 of Fig. 7 with two loading ledges 12 a platform as shown in Fig. 8 may be formed. The platform is formed in that one loading ledge 12 is placed with the middle foot 18 in each opening 25 of the blank 23. Each long side of the blank 23 is placed adjacent outer feet 17 of the loading ledges 12. Each longitudinal flap 24 is folded around the outside of each loading ledge 12 and the fingers 26 at the outer ends of the blank 23 are inserted from the inside in suitable holes 15 or at the locking elements 16. Thus, the blank 23 is held at the loading ledges 12 by means of the folding, by co-operation between the openings 25 of the blank 23 and the middle feet 18 of the loading ledges 12, and by co-operation between the fingers 26 of the blank 23 and holes 15 or openings of the vertical leg 13 of each loading ledge 12.

In use the platform of Fig. 8 is often fixed to the bottom of a package or the like holding the goods to be stored. The fixation may be in form of a tape or other adhesive. Hereby the package is used in stabilising the platform.

As an alternative the blank of Figs. 7 and 8 may be furnished with transversal flaps to be folded into two sides of a trough. The folding of the transversal flaps would then correspond to the folding of the transversal flaps as discussed in connection with Figs. 9 and 10 below.

In an alternative embodiment (not shown) two or more loading ledges are placed side by side on each side of the package or the like to be received. In such a case the blank is made broader and openings are provided in the blank for all feet of the loading ledges, except possibly the outer feet at each end. The principles regarding folding etc. are the same as described above with one loading ledge at each side.

In the embodiment of Figs. 9 and 10 the platform has the form of a trough, which may be useful if several smaller packages are received.

The blank 29 has two longitudinal flaps 30 and two
5 transversal flaps 31. In addition to an opening 32 for each foot 18 in the middle of each loading ledge 12 it also has openings 33 for the feet 17 at the ends of each loading ledge 12. The longitudinal flaps 30 are furnished with end flaps 34 at each end having a length corresponding to the
10 length of the transversal flaps 31. A crease 35 is arranged between each longitudinal flap 30 and the centre part of the blank 29. A crease 36 is placed between each longitudinal flap 30 and the end flaps 34.

Each transversal flap 31 has three creases, a first
15 crease 37, between the flap 31 and the centre part of the blank 29, a second crease 38, being a double crease somewhere in the middle between the first crease 37 and a third crease 39, which third crease is placed at the same distance from the second crease 38 as the second crease 38 is
20 placed from the first crease 37. At the first crease two notches 40 are formed for co-operation with two tabs 41 placed at the third crease 39.

The platform is formed in that the blank 29 is folded around two loading ledges 12. Each loading ledge 12 is
25 placed with its feet 17, 18 in the appropriate openings 32, 33 of the blank 29. Then each longitudinal flap 30 is folded up against the horizontal leg 14 of the respective loading ledge 12. The end flap 34 of each longitudinal flap 30 is folded in such a way that it is placed along the
30 first crease 37 between the respective transversal flap 31 and the centre part of the blank 29. With the end flaps 34 placed along the first crease line 37 the transversal flap 31 is folded around the end flaps 34. The part between the second and third creases 38, 39 is folded onto the part be-
35 tween the first and second creases 37, 38 and these parts

are placed in a vertical position. The tabs 41 at the third crease 39 are at the same time placed in the notches 40 at the first crease 36 with the outer, free end of each transversal flap 31 directed inwardly at the bottom of the
5 trough formed. By altering the length of the outer part of the transversal flaps 31 the area having double layers at the centre of the platform may be adjusted, depending on demands and requirements.

10 In yet a further embodiment (not shown) the platform is furnished with loading ledges on all four sides of the platform formed. The design of the blank has to be adapted to the intended use but the same principles apply. Thus, the blank is to be folded around the loading ledges in some way or other.

15 A person skilled in the art realises that the separate parts of the embodiments described may be combined in many different ways. From the above it is further obvious that by using a blank and folding it around two or more loading ledges a number of different designs may be
20 achieved.

CLAIMS

1. A platform **characterized** in that it is formed of a blank (1, 23, 29) and loading ledges (12), comprising a vertical leg (13) and a horizontal leg (14), which blank is
5 folded around the legs (13, 14) of the loading ledges (12).

2. The platform of claim 1, **characterized** in that the blank (1, 23, 29) has two longitudinal flaps (2, 24, 30), a central rectangular part, creases (6-8, 11, 27, 28, 35-39) for folding of the blank in a suitable way depending on the
10 form of the loading ledges (12) used, two openings (4, 25, 32) for receiving a central foot (18) of a loading ledge (12) in each opening (4, 25, 32), and that two loading ledges (12) are used.

3. The platform of claim 2, **characterized** in that a
15 crease (7, 28) is arranged in a position coinciding with the upper edge of the vertical legs (13) of each loading ledge (12), that the longitudinal flaps (2, 24) are to be folded around the vertical leg (13) and that the longitudinal flaps (2, 24) have means to attach the flaps (2, 24) to
20 respective loading ledge (12).

4. The platform of claim 3, **characterized** in that the attaching means are four fingers (5, 26) projecting from the longitudinal side of each flap (2, 24) and which fingers (5, 26) are to co-operate with holes (15) on a vertical
25 leg (13) of each loading ledge (12).

5. The platform of claim 2, **characterized** in that two feet (17) at the ends of the horizontal leg (14) of each loading ledge (12) is to be placed just outside the transversal side of each longitudinal flap (2, 24).

30 6. The platform of claim 2, **characterized** in that the blank further has two transversal flaps (3, 19, 20, 31), that a support surface is formed between the vertical legs (13) of the loading ledges (12), that the blank (1, 29) is placed in double layers of at least parts of the support
35 surface and that the platform is load carrying.

7. The platform of claim 6, **characterized** in that the transversal flaps (3, 19, 20, 31) have creases (8, 37) placed to be positioned at the short ends of the horizontal leg (14) of each loading ledge (12), whereby the part of
5 the transversal flaps (3, 15, 20) outside the creases (8) are to be folded over.

8. The platform of claim 6 or 7, **characterized** in that the transversal extent of an outer end (9) of the transversal flap (3, 19) is smaller than the rest of the
10 flap (3, 19), that a crease (11) is formed at each side of the outer end (9) of each transversal flap (3, 19), which crease is arranged between the inner end of a slit (10) and the free end of the outer end (9) and that the parts of the
15 outer ends (9) of the transversal flaps (3, 19) placed outside the creases (11) are to be placed under the horizontal leg (14) of each loading ledge (12) when the platform is formed.

9. The platform of claim 8, **characterized** in that the outer ends of the transversal flaps (19, 20) are placed adjacent each other when the platform has been formed.
20

10. The platform of claim 9, **characterized** in that a tab (21) is formed at the end of one of the transversal flaps (20), which tab (21) is to be received in a groove (22) in the other flap (20).

25 11. The platform of claim 6, **characterized** in that it has the form of a trough.

12. The platform of claim 11, **characterized** in that each longitudinal flap (30) has an end flap (34), to be received inside the folded transversal flap (31) at each side
30 and that the longitudinal flap (30) is folded against the backside of a vertical leg (13) of respective loading ledge (12).

13. The platform of claim 12, **characterized** in that the outer part of each transversal flap (31) is received at
35 the bottom of the centre of the platform formed.

14. The platform of claim 13, **characterized** in that tabs (41) are formed on the transversal flaps (31) to be received in notches (40) placed at a crease (37) between the transversal flap (31) and the centre of the platform.

5 15. The platform of claim 2, **characterized** in that the blank (29) has openings (32, 33) for receiving all the feet (17, 18) of the loading ledges (12).

10 16. The platform of claim 2, 3 or 4, **characterized** in that the blank (23) forms a single layer in the area between the loading ledges (12) when the platform is formed and that the blank (23) is fixed by means of tape or other adhesive to the package or the like received on the platform.

15 17. The platform of claim 2, **characterized** in that the blank (1, 23, 29) is made of cardboard.

18. The platform of claim 2, **characterized** in that the blank (1, 23, 29) is made of a corrugated or flat plastic sheet.

20

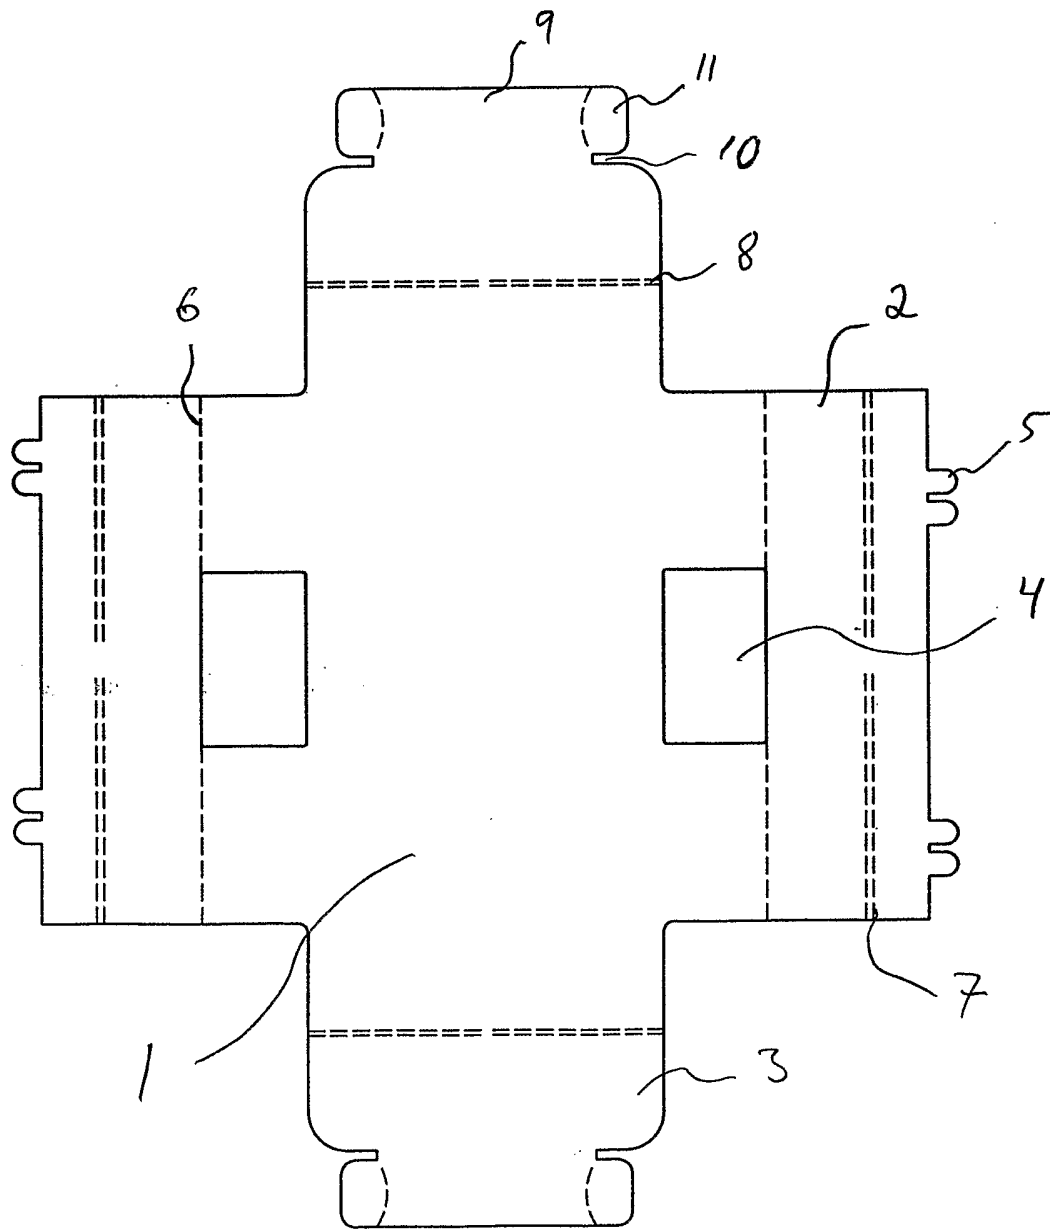


Fig. 1

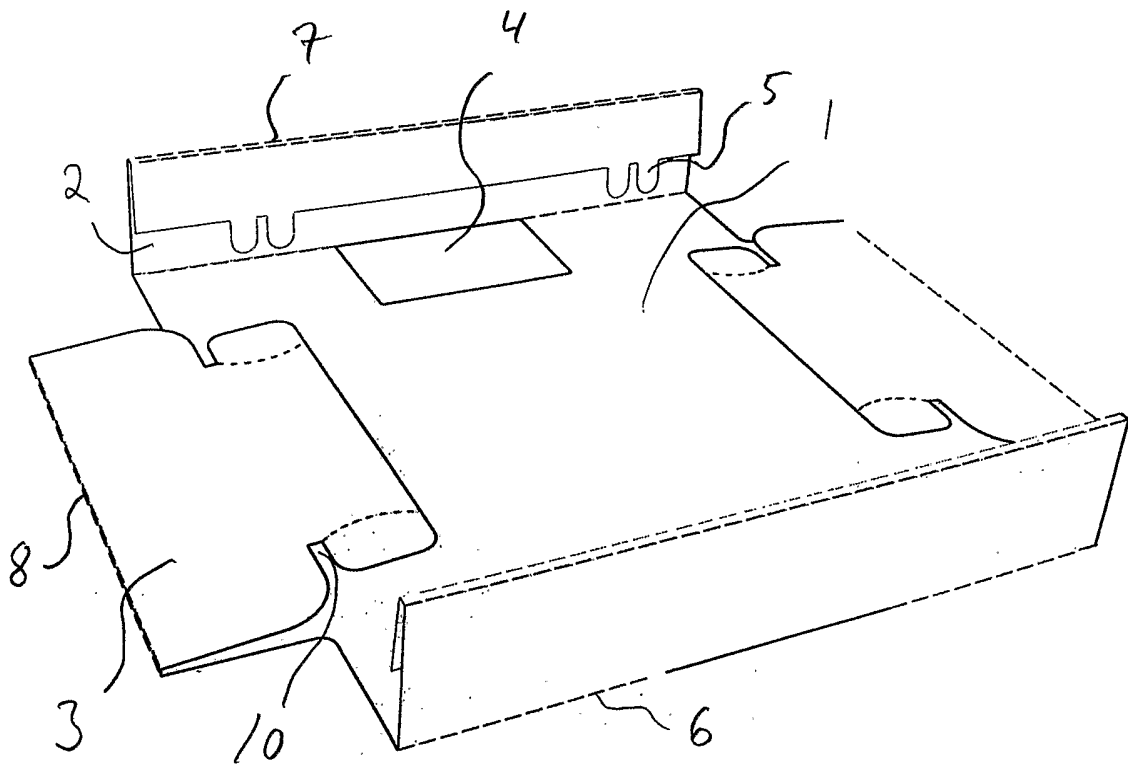


Fig. 2

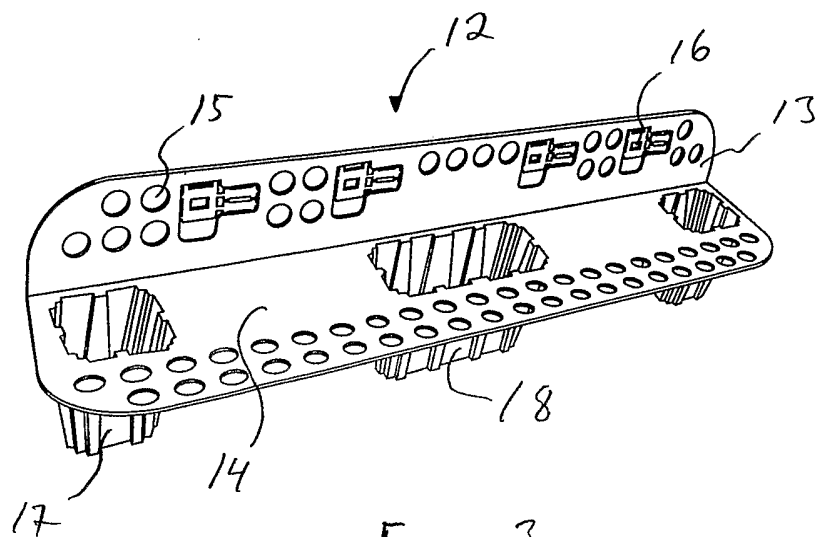


Fig. 3

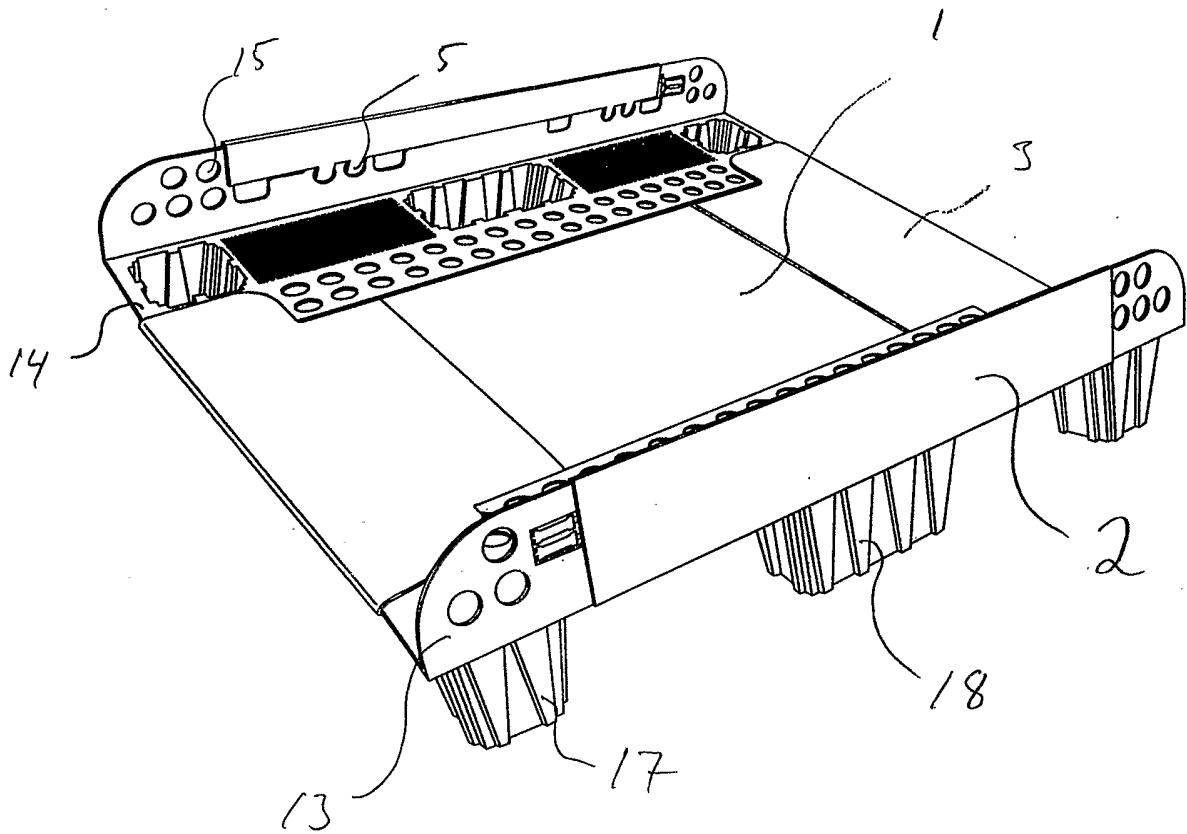


Fig. 4

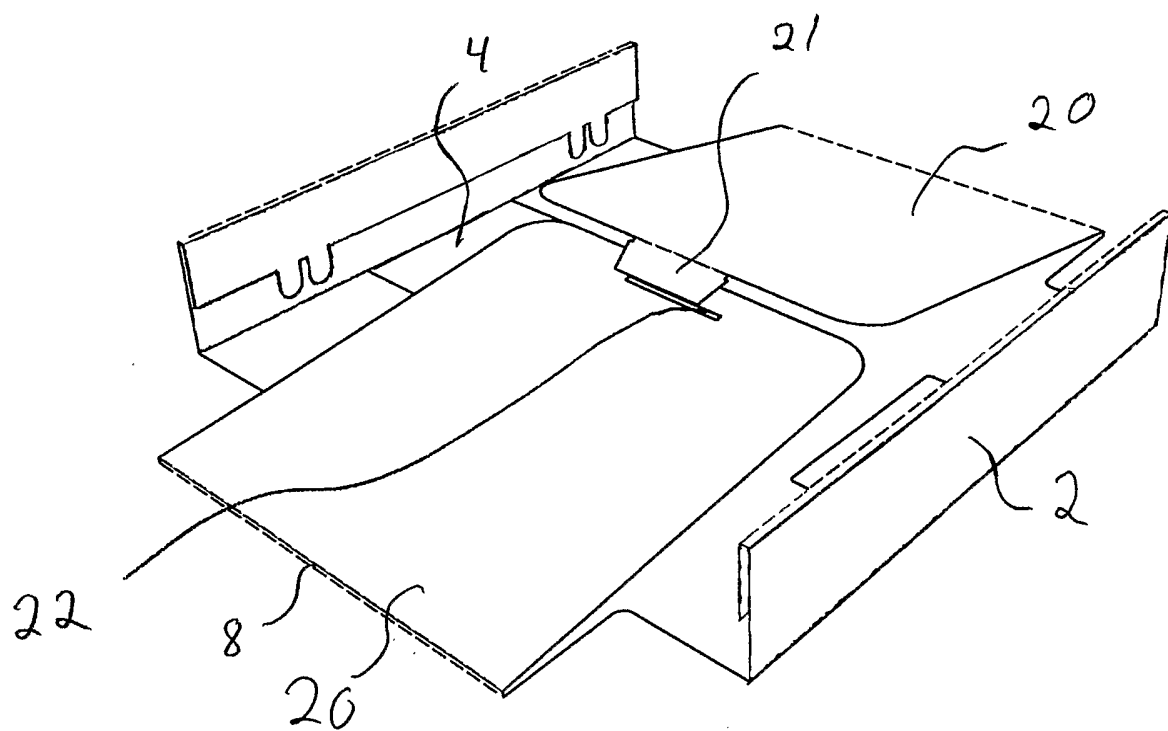


Fig. 5

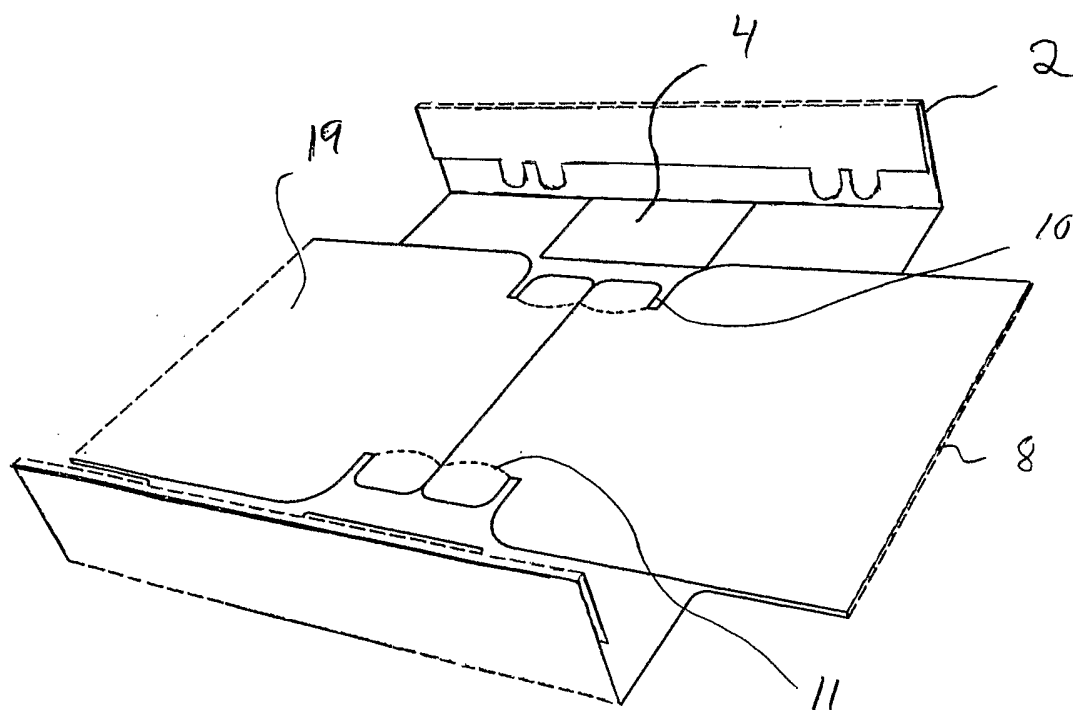


Fig. 6

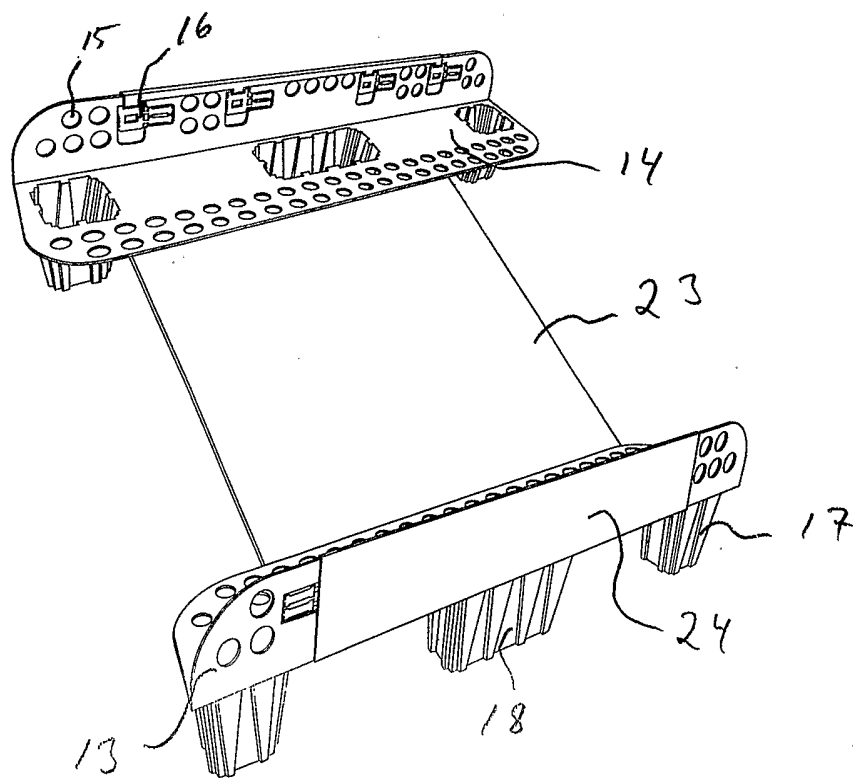
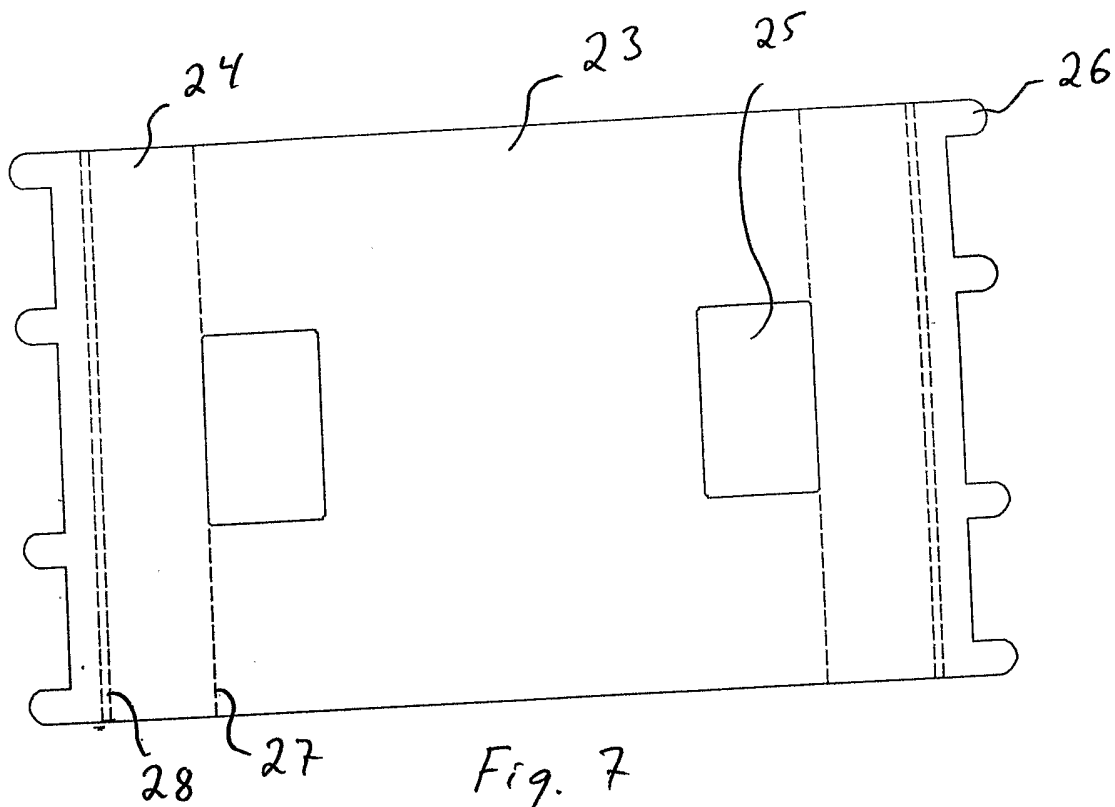


Fig. 8

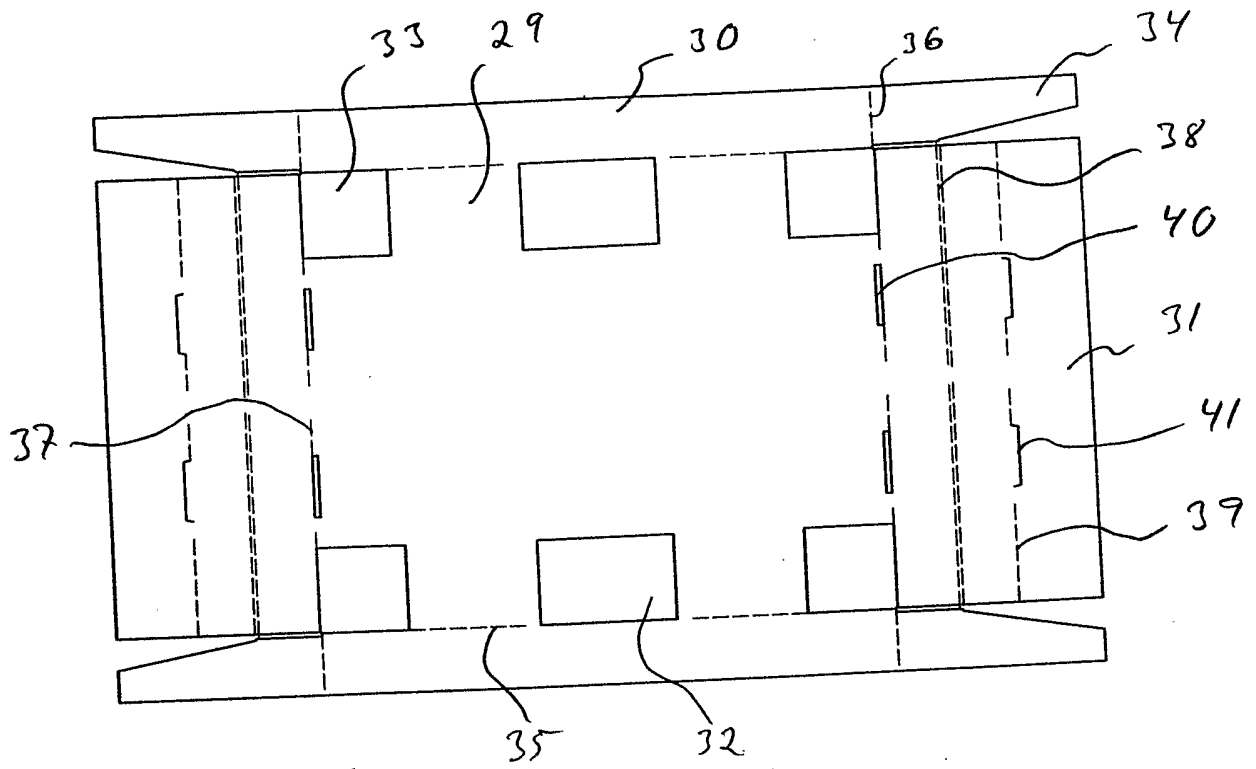


Fig. 9

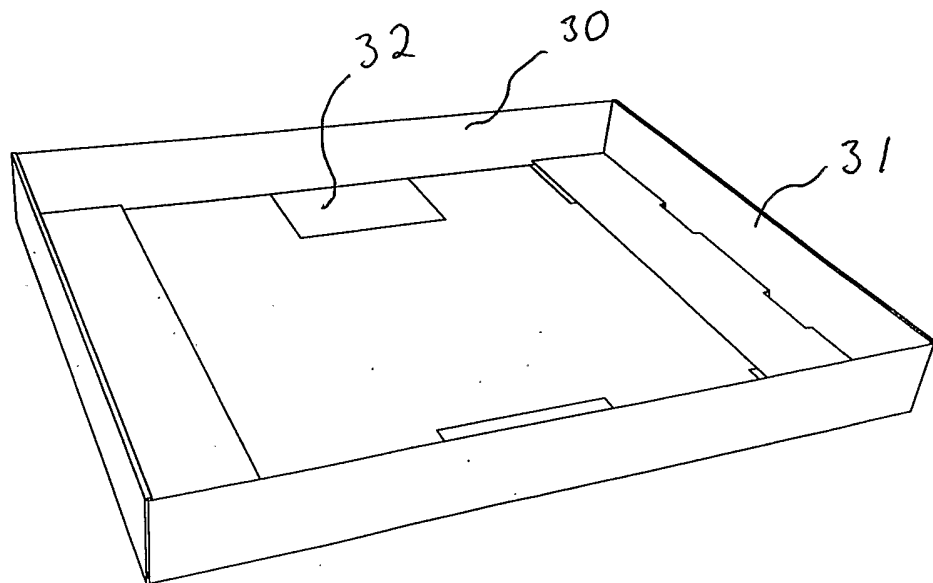


Fig. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2005/000609

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B65D 71/00, B65D 19/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4303020 A (RENE C. HOULE), 1 December 1981 (01.12.1981), column 3, line 43 - column 4, line 44	1
A	--	2-18
A	WO 03099668 A1 (INTER IKEA SYSTEMS B.V.), 4 December 2003 (04.12.2003), page 4, line 28 - page 7, line 7	1-18
A	WO 03099676 A1 (INTER IKEA SYSTEMS B.V.), 4 December 2003 (04.12.2003), page 5, line 12 - line 23	1-18

 Further documents are listed in the continuation of Box C.
 See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 July 2005

Date of mailing of the international search report

21-07-2005

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Anette Hall/MP

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 2005/000609

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2004026713 A1 (INTER IKEA SYSTEMS B.V.), 1 April 2004 (01.04.2004), page 4, line 32 - page 6, line 22 --	1-18
A	DE 9103307 U1 (WELLPAPPE FORCHHEIM GMBH & CO.), 17 October 1991 (17.10.1991), page 1, paragraph 5 - page 2 --	1-18
A	WO 03099660 A1 (INTER IKEA SYSTEMS B.V.), 4 December 2003 (04.12.2003), page 3, line 3 - line 33 -- -----	1-18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2005/000609

US	4303020	A	01/12/1981	NONE		
WO	03099668	A1	04/12/2003	AU	2003238986	A 00/00/0000
				BR	0311341	A 22/03/2005
				CA	2486575	A 04/12/2003
				EP	1435884	A 14/07/2004
				EP	1509458	A 02/03/2005
				LT	2004112	A 25/03/2005
				SE	0201591	A 29/11/2003
WO	03099676	A1	04/12/2003	AU	2003224557	A 00/00/0000
				BR	0311305	A 15/02/2005
				CA	2487449	A 04/12/2003
				EP	1509462	A 02/03/2005
				SE	522005	C 07/01/2004
				SE	0201590	A 29/11/2003
				US	20050108989	A 26/05/2005
WO	2004026713	A1	01/04/2004	AU	2003261049	A 00/00/0000
				CA	2499057	A 01/04/2004
				EP	1539597	A 15/06/2005
				SE	524498	C 17/08/2004
				SE	0202779	D 00/00/0000
DE	9103307	U1	17/10/1991	NONE		
WO	03099660	A1	04/12/2003	AU	2003224569	A 00/00/0000
				BR	0212527	A 19/10/2004
				BR	0311319	A 15/03/2005
				CA	2459773	A 27/03/2003
				CA	2487448	A 04/12/2003
				EP	1432435	A 30/06/2004
				EP	1509452	A 02/03/2005
				IL	160639	D 00/00/0000
				JP	2005502726	T 27/01/2005
				LT	2004111	A 25/03/2005
				SE	0201593	A 29/11/2003
				US	20050108988	A 26/05/2005