

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199941932 B2**
(10) Patent No. **746431**

(54) Title
Method to agglomerate metal particles and metal particles having improved properties

(51)⁷ International Patent Classification(s)
B22F 001/00 C22C 001/04

(21) Application No: **199941932** (22) Application Date: **1999.05.20**

(87) WIPO No: **WO99/61184**

(30) Priority Data

(31) Number (32) Date (33) Country
60/086601 1998.05.22 US

(43) Publication Date : **1999.12.13**
(43) Publication Journal Date : **2000.02.24**
(44) Accepted Journal Date : **2002.05.02**

(71) Applicant(s)
Cabot Corporation

(72) Inventor(s)
Prasad Rao

(74) Agent/Attorney
WATERMARK PATENT and TRADEMARK ATTORNEYS,Locked Bag 5,HAWTHORN VIC 3122

(56) Related Art
JP 04-362101
US 3397057
GB 930003



41932/99

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B22F 1/00, C22C 1/04	A1	(11) International Publication Number: WO 99/61184 (43) International Publication Date: 2 December 1999 (02.12.99)
(21) International Application Number: PCT/US99/11149 (22) International Filing Date: 20 May 1999 (20.05.99) (30) Priority Data: 60/086,601 22 May 1998 (22.05.98) US (71) Applicant: CABOT CORPORATION [US/US]; 75 State Street, Boston, MA 02109-1806 (US). Two Seaport Lane Suite 300, Boston, MA 02210-2019 (US) (72) Inventor: RAO, Prasad; 1513 Singer Road, Wyomissing, PA 19610 (US). (74) Agent: LANDO, Michelle, B.; Cabot Corporation, 157 Concord Road, P.O. Box 7001, Billerica, MA 01821-7001 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> IP AUSTRALIA 27 APR 2000
(54) Title: METHOD TO AGGLOMERATE METAL PARTICLES AND METAL PARTICLES HAVING IMPROVED PROPERTIES (57) Abstract A method to agglomerate metal particles such as tantalum and niobium powders is described which includes combining a volatilizable or vaporizable liquid with the particles to form wet particles; compacting the wet particles; drying the compacted wet particles to form a cake; and heat treating the cake to form the agglomerated particles. Also described are agglomerated particles obtained by this method and further, particles, preferably tantalum or niobium powder, having a flow rate of at least about 65 mg/sec and/or an improved pore size distribution, and/or a higher Scott Density. Capacitors made from tantalum powder and niobium powder are also described.		

- 1 -

METHOD TO AGGLOMERATE METAL PARTICLES AND METAL PARTICLES HAVING IMPROVED PROPERTIES

BACKGROUND OF THE INVENTION

5

The present invention relates to metal particles and methods of agglomerating the same.

Efforts are always being made to improve the handling of metal powder, such as tantalum powders. In particular, fine powders, for instance, having particle sizes of 0.1 - 200 microns, can be quite difficult to work with and thus, methods to agglomerate fine metal powder have been developed, such as the method described in Japanese Kokai [1992]4-362101 for tantalum powder.

10

However, besides developing methods to agglomerate fine metal powders, efforts have also been made to agglomerate such powders in such a manner that flow properties and/or other desirable properties are maintained or improved.

15

Accordingly, there is a demand to develop methods of agglomerating fine metal particles such as tantalum powder, not only to address the problems of fine powders but also to lead to agglomerated metal particles that have desirable properties such as good flow properties and improved pore size distribution.

20

SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention, there is provided a method to agglomerate metal particles, preferably tantalum and/or niobium particles, which includes the steps of combining a volatilizable or vaporizable liquid with the metal particles to form wet metal particles. These wet metal particles are compacted and then dried to form a cake. The cake is then thermally agglomerated or heat treated to result in the agglomerated metal particles.

25

- 2 -

In accordance with another aspect of the present invention, there is provided metal particles, and especially tantalum and/or niobium particles having a flow rate of at least about 65 mg/sec. and an improved pore size distribution.

Further, the present invention relates to capacitor anodes containing the tantalum and/or
5 niobium powder of the present invention.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are intended to provide further explanation of the present invention as claimed.

10 DETAILED DESCRIPTION OF THE PRESENT INVENTION

An embodiment of the present invention relates to a method to agglomerate metal particles. The method includes the steps of combining a volatilizable or vaporizable liquid with the metal particles to form wet metal particles. The wet metal particles are compacted, and then subsequently dried to form a cake. The cake is then heat treated to result in the
15 agglomerated metal particles.

For purposes of the present invention, the metal particles can be any type of metal particles. Examples of metal particles include, but are not limited to, metals, alloys, mixtures, and the like. Specific examples include tantalum, niobium, iron, zinc, alloys containing any of the foregoing, and mixtures thereof. Preferably, the metal particles comprise powders of
20 niobium or tantalum, or alloys comprising tantalum and niobium.

The metal particles which are agglomerated by the methods of the present invention can be any particle shape or size, preferably, the particles are in the form of a powder, and this powder generally has particle size ranges from about .1 micron to about 200 microns. The shape of the metal particles can be any shape, such as angular, nodular, flaked, or any

- 3 -

combination thereof. Preferably, the shape is nodular, especially when the metal particle is tantalum and/or niobium.

With respect to the method of agglomerating metal particles, the step of combining a volatilizable or vaporizable liquid with the metal particles to form wet metal particles can be done in any conventional manner which includes methods of simply mixing a solid with a liquid. For instance, simple stirring can be used as well as more sophisticated methods of blending and milling, such as with a mixer-muller. Alternatively, the liquid can simply be poured on top of a container containing the metal particles with or without mixing or stirring.

The volatilizable or vaporizable liquid can be any liquid which is capable of these properties. Examples include, but are not limited to, water, water-containing liquids, alcohols, aromatic-containing liquids, alkane-containing liquids, and the like. Preferably, the volatilizable or the vaporizable liquid is aqueous in nature and more preferably is water, and more preferably is deionized water. Any element/chemical helpful in controlling the sintering kinetics of the powders at high temperatures can be added to the water at the desired proportions.

Preferably, the amount of liquid combined with the metal particles to form wet metal particles is an amount which is sufficient to wet the particles without forming a slurry. Preferably, the amount of liquid contained with the metal particles is an amount which will result in the formation of a paste. For instance, the amount of liquid present with metal particles having pores should be such that the liquid enters the pores of the metal particles and most preferably, enters substantially all the pores of the metal particles. When the liquid is added in an amount which forms a slurry, the liquid may exit the pores of the metal particles due to effects of gravity and the like. Thus, one preferred way of combining a liquid with the metal particles is to add liquid in stages, such that when the initial addition of liquid has been

- 4 -

absorbed into any pores of the metal particles that may exist. a determination can then be made to add an additional amount of liquid. This staging of liquid introduction can occur up to a point where a small amount of a liquid layer is formed on top of the metal particles which indicates that substantially all of the pores (if any exist) have liquid in them and that any further
5 addition of liquid could lead to the formation of a slurry. This liquid layer on top is preferably not more than about 0.125 ml/cm^2 of container's square area. When the metal powder comprises tantalum powder, for example, preferably not more than about 50 ml excess water is on top of the powder, when the powder completely fills a 20 cm x 20 cm x 5 cm pan.

When pores are present in the metal particles, in order to ensure that the liquid has
10 entered the pores of the metal particles, it is preferred to let the liquid soak with the metal particles for a time sufficient to permit such absorption of the liquid into the pores of the metal particles. For instance, with respect to tantalum powder, it is preferred to let the liquid soak into the powder for at least about five hours, and more preferably, for at least about eight hours, even more preferably from about five hours to about 16 hours. If, during this soaking
15 time additional liquid needs to be added, the liquid can be added at any time in order to ensure full saturation or substantially full saturation of any pores that may exist in the metal particles. Preferably, in the case of tantalum, the amount of liquid present by weight is from about 30% to about 40% by weight of the metal particles present, and more preferably, about 35% by weight based on the weight of the tantalum particles present. Similar amounts of liquid are
20 expected with niobium powder. For other particles, the amount of liquid will be a function of the particle size distribution of metal particles, and therefore the amount of liquid present can be varying amounts.

Preferably an inorganic acid solution is part of the liquid which is added or combined with the metal particles. Preferred inorganic acid comprises phosphoric acid especially when

- 5 -

the liquid is deionized water and the metal particles are tantalum, niobium, or alloys thereof. Preferably, from about 10 ppm to about 200 ppm phosphorous by weight of metal particles is present, and to obtain this amount, a sufficient amount of phosphoric acid is present in the liquid and combined with the wet metal particles to obtain the amount of phosphorous in the liquid. The phosphorous can act as a sintering retardant. Other sintering retardants can be used, and can depend on the metal particle sintered.

After the liquid has been combined with the metal particles to form wet metal particles, the wet metal particles are then compacted in order to reduce or eliminate any air pockets between the particles and/or liquid and to reduce the area between the particles. Preferably, the wet particles are compacted in such a manner that the metal particles are closer to one another without forcing any liquid out of the pores that may be present in the pores of the metal particles. Compacting the wet metal particles may also increase the amount of liquid in the pores of the metal particles. The most preferred means of compacting the wet metal particles involves vibrating a container containing the wet metal particles. Any means of vibrating the container can be used, such as manually, or with any device capable of moving a container to create vibrating motions. Preferably, the compacting stage occurs in a non-stick container, such as a "calphalon" tray or other similar type container which has the ability to prevent the "sticking" of material on the sides of the container. During the vibrating stage, additional liquid can be added and should preferably be added if the liquid layer that is preferably present on top begins to disappear. After vibrating, the wet metal particles should have the consistency that is similar to wet cement which has just been applied to a sidewalk and smoothed and compacted. A most preferred consistency is the consistency of a paste that is dispersed from a squeeze tube (e.g., toothpaste). Preferably, the wet metal particles are compacted for at least two minutes and more preferably, from about four minutes to about 20 minutes.

- 6 -

After the compacting stage, it is preferred that the container with the wet metal particles stand still for a sufficient time to permit any water to separate from the wet metal particles. Preferably, the container should sit for at least one hour, and any excess liquid separating can be removed by any means, such as decanting.

- 5 After the compacting step, the compacted wet metal particles are formed into a cake by drying. Any means of drying the wet metal particles formed into the cake can be used. For instance, the cake can be dried with the use of a vacuum drying having a sufficient temperature and/or pressure which will dry substantially all of the powder by removing most, if not all of the liquid present. Preferably, the vacuum drying occurs at a temperature of about 195°F and
10 about 40 torr vacuum for about 10 hours or more, and preferably, for about 14 hours or more.

- Once the metal powder cake is dried, the material is preferably heat treated or thermally agglomerated. Preferably, this heat treatment occurs like any other heat treatment of metal powders. For example, the cake can be transferred onto a heat tray and subjected to heat treatment, which can be the heat treatment normally used with the particular type of metal
15 particles involved. In some situations, the temperature of the heat treatment can be lowered because of the properties obtained by using the method of the present invention. For instance, with respect to tantalum powder, the heat treatment is preferably at a temperature of about 1300°C for about 30 minutes. Other heat treatment temperatures and times can be used.

- After heat treatment, the heat treated cake can be deagglomerated (for instance, by
20 grinding or crushing or milling) to produce fine powder for any use. For instance, with respect to tantalum and niobium powders, the powders can be formed into capacitor anodes or for other uses associated with tantalum and niobium powder.

With respect to the flaked metal powders, especially tantalum and niobium flaked powder, the processes of the present invention are preferably conducted by first heat treating

- 7 -

the flaked metal powder and then crushing or grinding the heat treated flaked powder to result in agglomerates. Preferably, these agglomerates have the size of from about 50 to about 100 microns in size. These agglomerates are then subjected to the agglomeration process described above with the addition of a volatilizable or vaporizable liquid and so on. After the heat
5 treating of the agglomerated cake comprising the flaked metal powder, the cake is then crushed again to form agglomerates and these agglomerates preferably have the improved properties described herein, including improved green strength.

A combination of properties can be achieved by the present invention. In particular, the flow properties of the metal powder as well as the DF value of the capacitor anodes, in
10 particular, the tantalum powder, can be improved. In particular, with respect to tantalum, a flow of at least about 65 mg/sec and more preferably, from about 65 to about 400 mg/sec can be obtained, and more preferably, from about 159 mg/sec to about 250 mg/sec. In combination with these flow properties, a lower DF value can be obtained. Also, metal powders agglomerated by the present process can have excellent Scott Densities. For instance,
15 the Scott Densities can increase at least 10% and preferably increase at least 25% and more preferably increase at least 35% or more compared to metal powder not agglomerated. Preferably, the Scott Densities are at least about 20 g/inch³, and more preferably, at least 22 g/inch³, and even more preferably, from about 20 to about 40 g/inch³.


Another benefit of the present invention is the ability to increase the pore size
20 distribution of the metal particles (preferably the metal particles like tantalum and/or niobium), after being pressed and sintered into an anode. Increasing the pore size distribution of the pressed and sintered anode can be very beneficial with respect to capacitor anode for tantalum and/or niobium where typically Mn (NO₂)₃ is coated onto the anode and then the material is pyrolyzed. This increased or improved coverage leads to beneficial properties such as improved

flow and/or the DF values. As shown in the Figures, the pore size distribution of the anodes made from the powders of the present invention have large pores (greater in size) that do not exist in anodes made with unagglomerated powder or powders agglomerated by other methods. Also, the number of overall large pores is greater for the anodes of the present invention. The means of making the powder, particularly metal powder, into capacitor anodes is known to those skilled in the art and such methods such as those set forth in U.S. Patent Nos. 4,805,074, 5,412,533, 5,211,741, and 5,245,514 and European Patent Application Nos. 0 634 762 A1 and 0 634 761 A1 can be used and are incorporated in their entirety herein by reference.

The present invention will be further clarified by the following examples which are intended to be purely exemplary of the present invention.

Examples

15 Samples 1 and 2 were processed using tantalum powder basic lots, properties of which are described in Table A. Each sample was prepared using 12 lbs. of basic lot tantalum. Each basic lot was blended with 2.9 gms. of Ammonium Hexa Fluoro Phosphate (NH_4PF_6). NH_4PF_6 provided the source of phosphorous and the amount provides 100 ppm of phosphorous by weight in the powder. Each blended sample was heat treated at 1325°C for 30 minutes at a vacuum level of less than 5 microns of mercury. Samples 1 and 2 represent two separate heat treated batches. Heat treated material which was in the form of cakes was crushed and screened using 70 mesh (US Sieve) screen. The -70 mesh powder was blended with magnesium to have a magnesium content of 2% by weight. Magnesium blended tantalum powder was deoxidized by heating at 950°C . This deoxidation step was conducted to lower the oxygen content of the tantalum powder to reasonable level. The deoxidized tantalum powder was then treated with nitric acid, hydrogen peroxide and deionized water to remove the residual



- 9 -

magnesium and the magnesium oxide generated during the deoxidation process. The tantalum powder was further rinsed with deionized water until a conductivity of less than 10 microohms/cm was attained in the DI water. The rinsed tantalum powder was dried using a vacuum dryer. A representative sample of the dried tantalum powder was taken and analyzed
5 for physical, chemical electrical properties of the powder, and pore size distribution using mercury porosimetry equipment. The results are shown in Table 1. The electrical properties were evaluated using the following procedure:

[1] Anode Fabrication:

(a) Haberer Press

- 10 (1) non-lubed powder
- (2) size - 0.1235" dia x. 1928" length
- (3) Dp = 5.5 g/cc
- (4) powder wt = 207.5 mg

[2] Anode Sintering:

- 15 (a) NRC Furnace;
1335 Deg C*10("A" ramp)
- (b) N = 32 anodes of each powder

[3] 30V Ef Evaluation:

(a) Anodization:

- 25 (1) Two Formations (form each singer separately)
N = 8 anodes (one tree) per sample
(1)tree/sample*(1)sinter*(8) sample = 8 trees
+ C606 stds
- (2) Electrolyte; (0.6% H3P04 @ 83 Deg. 1.86 mmho)
- (3) Constant current density: 337.5 ma/g
- 30 (4) Terminal Voltage = 30.0 VDC +/- 0.03
- (5) Terminal Voltage Time = 300 min -0/+5 min

(b) DC Leakage:

- (1) Charge E = 21.0 +/- .02
- (2) Charge Time = 30 sec & 120 sec
- 35 (3) DCL Test Electrolyte = 10% H3P04 @ 21 Deg C

- 10 -

(c) Capacitance/DF:

- (1) Capacitance Test Electrolyte = 18% H₂SO₄ @ 21 Deg C
- (2) Bias = 2.5 VDC
- (3) Frequency = 120 Hz
- (4) Series Capacitance
- (5) GenRad# 1658

[4] Mercury Porosimetry Evaluation:

Retained sintered anodes were sent to Micromeritics Instrument Corporation, One Micromeritics Drive, Norcross, Ga 30093. The pore size distribution was determined at The Materials Analysis Laboratory of Micromeritics using the AutoPore III 9420 and the following settings:

15	Penetrometer:	33 - (14)	3 Bulb, 0.412 Stem, Powder
	Pen. Constant:	10.970 μ L/pF	Adv. Contact Angle: 130.000 degrees Fixed
	Pen. Weight:	63,6614 g	Rec. Contact Angle: 130.000 degrees Fixed
	Stem Volume	0.4120 mL	Hg Surface Tension: 485,000 dynes/cm Fixed
20	Max. Heat Pressure	4.6800 psia	Hg Density: 13.5335 g/mL
	Pen. Volume	3.1251 mL	Sample Weight 1.6879
			Assembly Weight 103.8746 g
	Low Pressure:		
25	Evacuation Pressure:	50.000 μ mHg	
	Evacuation Time:	5 mins	
	Mercury Filling Pressure:	20.05 psia	
	Equilibration Time:	10 secs	
30	High Pressure:		
	Equilibration Time:	10 secs	
	Blank Correction by Formula		
	Fixed by Micromeritics		

Sample 3 was prepared using the basic lot described in Table A. Two 27.5 lbs. of the basic lot powder were placed in two 5 gallon stainless steel buckets. Phosphorous dopant solution was prepared by adding 10 ml. of 85% reagent grade phosphoric acid (85% solution) into 2000 ml DI water. 4443 ml of DI water was mixed with 551 ml of phosphorous dopant solution. This solution represents 40% by weight of water for 27.5 lbs. of tantalum powder. This solution containing 100 ppm by weight of phosphorous. The 4994 ml of the mixed DI water was added to the tantalum powder by transferring the solution to the stainless steel bucket

- 11 -

containing the tantalum powder. Similarly, another 4994 ml DI water+phosphoric acid solution was prepared and transferred to the second stainless steel bucket containing the tantalum powder. The powder was soaked for 20 hrs. The soaked tantalum powder was transferred to tantalum heat treat trays by scooping the wet powder using a stainless steel scoop.

5 Tantalum trays containing the wet tantalum powder were transferred to a vacuum dryer for drying. Powder was dried in a vacuum dryer at 185°F and about 50 torr vacuum for 48 hrs. After drying, the tantalum trays containing the dried powder was transferred into a heat treat furnace. The powder was heat treated at 1345°C for 30 minutes at a vacuum level of less than 5 microns of mercury. Heat treated cakes were crushed and screened using a 50 mesh (US
10 Sieve). The -50 mesh powder was blended with 2% magnesium and deoxidized and further processed as described for samples 1 and 2.

Samples 4 and 5 of agglomerated tantalum powder were prepared as follows. The basic lot tantalum powder used for the two samples is shown in Table A. In each case, fifty pound increments of tantalum powder were placed in stainless steel buckets. Total tantalum
15 powder used was 250 lbs. for both samples 4 and 5. 6944 ml of deionized water was mixed with 1002 ml. of phosphorous dopant solution described above in Example 1. 7966 ml of the solution was added to each bucket. This solution represent 35% by weight of tantalum powder and it also contains 100 ppm by weight of phosphorous. The water was allowed to soak into the tantalum powder for approximately 12 to 16 hours. Afterwards, approximately 8.1 pounds
20 of the wet tantalum powder was transferred to a drying tray. Drying trays consisted of square cake pans (8x8x2 inches) from "Calphalon." Calphalon supplies the bakeware with an advanced nonstick coating system. The calphalon tray containing the wet tantalum powder was transferred to a vibrating unit. The vibrating unit consisted of a vibrating table fitted with an air operated motor working at a pressure of 60 psi. Additional deionized water in an amount of
25 150 ml was added to each tray and was vibrating for approximately four minutes. After vibrating, the trays were allowed to sit for at least sixty minutes for any water to separate. Any water which separated was decanted. Afterwards the drying trays were transferred to a vacuum dryer. The commercial vacuum drying was purchased from STOKES VACUUM Inc., model number 338J. The material in the Calphalon trays was dried for approximately 14 hours at
30 about 195°F and 50 torr pressure. The dried tantalum powder was then transferred to a tantalum tray for heat treatment. The heat treatment was conducted at approximately 1320-1330°C for about 30 minutes. The cakes were then transferred to a batch can for milling and

- 12 -

were milled and screened using 70 mesh (US Sieve) screen. -70 mesh portion of the material was deoxidized and acid leached as described in Example 1. Samples of the final product were analyzed and the data is shown in Table 1.

5 Samples 7-10 were processed using tantalum basic lots of higher surface area. Typical analysis of the basic lot used is described in Table A.

Samples 9 and 10 were processed using the conventional process. Typically 12 lbs. of tantalum powder was blended with ammonium hexafluorophosphate to add 100 ppm by weight phosphorous. The blended powder was heat treated in the range of 1200 - 1265°C for 30 minutes under vacuum. The heat treated cakes were processed to final powder as described for 10 sample 1. The deoxidation for these powders were conducted at 850°C with 2.5% magnesium added. The electrical evaluation procedure for these samples is described below.

[1] Anode Fabrication:

(a) Haberer Press

- 15 (1) non-lubed powder
(2) size - 0.1545" dia x .1363" length
(3) Dp = 4.5 g/cc
(4) powder wt = 188 mg

[2] Anode Sintering:

- 20 (a) NRC Furnace; 1265 Deg C*10("A" ramp)
(b) N = 34 anodes of each powder sample

[3] 30V Ef Evaluation:

(a) Anodization:

- 25 (1) One Formation
N = 8 anodes (one tree) per sample
(2) Electrolyte; (0.6% H3P04 @ 83 Deg. 2.86 mmho)
(3) Constant current density: E251 Test Current (337.5 ma/g)
(4) Terminal Voltage = 30.0 VDC +/- 0.03
30 (5) Terminal Voltage Time = 300 min -0/+5 min
(6) Soak 25C for 30 minutes
(7) 100°C over for 30 minutes

(b) DC Leakage:

- 35 (1) Charge E = 21.0 +/- .02
(2) Charge Time = 30 sec & 120 sec
(3) DCL Test Electrolyte = 10% H3P04 @ 21 Deg C

(c) Capacitance/DF:

- 40 (1) Capacitance Test Electrolyte = 18% H2S04 @ 21 Deg C
(2) Bias = 2.5 VDC
(3) Frequency = 120 Hz
(4) Series Capacitance

- 13 -

Microporosimetry evaluation using the sintered anodes was conducted at Micromeritics using the AutoPore III 9420.

Samples 7 and 8 were prepared using the basic lot described in Table A. Sample 7 was prepared by soaking 24 pounds of tantalum with 25% by weight of deionized water containing phosphorous dopant solution to provide 100 ppm by weight of phosphorous. The powder was soaked for 16 hours. Soaked powder was transferred to four Calphalon trays and additional 300 to 450 ml of deionized water was added. The wet powder was vibrated for four minutes using the vibrating table. After vibrating, the trays were allowed to sit for at least sixty minutes for any water to separate. Any water which separated was decanted. Afterwards, the drying trays were transferred to a vacuum dryer. The commercial vacuum dryer was purchased from STOKES VACUUM Inc., model number 338J. The material in the Calphalon trays was dried for approximately 14 hours at about 196°F and 50 torr pressure. The dried tantalum powder was then transferred to a tantalum tray for heat treatment. The heat treatment was conducted at approximately 1265°C for about 30 minutes. The cakes were then transferred to a batch can for milling and were milled and screened using 70 mesh (US Sieve) screen. -70 mesh portion of the material was deoxidized using 2.5% magnesium at 850°C and acid leached as described in Example 1. Samples of the final product were analyzed and the data is shown in Table 1.

Sample 8 was prepared by soaking 24 pounds of tantalum with 35 % by weight of deionized water containing phosphorous dopant solution to provide 100 ppm by weight of phosphorous. The powder was soaked for 16 hours. Soaked powder was transferred to four Calphalon trays and additionally 150 to 235 ml of deionized water was added. The wet powder was vibrated for four minutes using the vibrating table. After vibrating, the trays were allowed to sit for at least sixty minutes for any water to separate. Any water which separated was decanted. Afterwards, the drying trays were transferred to a vacuum drying. The commercial vacuum dryer was purchased from STOKES VACUUM Inc., model number 338J. The material in the Calphalon trays was dried for approximately 14 hours at about 195°F and 50 torr pressure. The dried tantalum powder was then transferred to a tantalum tray for heat treatment. The heat treatment was conducted at approximately 1200°C for about 30 minutes. The cakes were then transferred to a batch can for milling and were milled and screened using 70 mesh (US Sieve) screen. -70 mesh portion of the material was deoxidized using 2.5% magnesium at 850° and acid leached as described in Example 1. Samples of the final product were analyzed and the data is shown in Table 1.

- 14 -

Table A

Starting material for various samples (basic lots)					
	Samples 1 and 2	Sample 3	Sample 4	Sample 5	Samples 7-10
Weights	26 lbs.	51.5 lbs.	250 lbs.	250 lbs.	80 lbs.
FSS Modified (microns)	0.41	0.39	0.4	0.42	0.32
Scott Density (grams/inch ³)	13.5	21.9	14	13.9	12.6
C (ppm)	22	4	16	17	18
O (ppm)	6253	7144	6343	6048	7026
N (ppm)	25	151	25	23	26
Hydrogen (ppm)	1585	1078	1488	1360	1520
BET (meter ² /gm)	2.25	1.9	1.81	2.22	2.80

5 The material was then pressed to form a capacitor anode in the following manner:

The powder was pressed into 0.1235 "dia X.1928" length anodes at a press density of 5.5 gm/cc. The pressed anodes were sintered at 1335°C for 10 minutes followed by anodization at 30v. using H₃PO₄ electrolyte. The anodized anodes were tested for capacitance and DC leakage, press density, and shrinkage.

10 Tantalum powder was also processed to make 300 mf 10V solid capacitor and the DF values of the solid capacitor were measured.

The flow rate was determined by a die fill test which involved a stand having 10 holes, 1/8 inch diameter evenly spaced along the center line of the bar length. The die fill procedure was done in a room with a relative humidity of less than 70% and a temperature at normal room temperature. 40 grams of metal powder, in this case, tantalum powder, were placed in a

15

- 15 -

hopper which passed over the 10 holes of the stand wherein powder flows into the holes as the hopper passes over them. A slide bar is located underneath the stand so as to cover each of the ten holes to prevent the powder from falling out of the stand. There are 4 tests involved in determining flow rate wherein a hopper is passed over the ten holes with an even 2 sec. pass, 4
5 sec. pass, 6 sec. pass, and an 8 sec. pass, wherein during each pass the hopper is opened so that the powder flows over the 10 holes. After each of the passes, the amount of powder in the holes is weighed and eventually calculations are made determining the flow based on mg/sec.

The Table below sets forth the various parameters of each of the samples made and tested. As can be seen from the Table and Figures, the flow rate and the pore size distribution
10 of the powders of the present invention were unexpectedly superior to unagglomerated tantalum powder and to agglomerated tantalum powder formed by a different process.

- 16 -

Data for the 52.000 cv/gm powder samples					
Sample ID	774-9.4M	7774-16.4M	7549.70-M	110395	110396
Process	No Preagglom	No Preagglom	Non-Vibrated	Present Inv.	Present Inv.
	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5
Weights	9.4 lbs.	9.5	43.6 lbs.	233.8 lbs.	228.3 lbs.
FSS Modified (microns)	1.00	1.05	3.29	2.94	2.63
Scott Density (grams/inchs)	19.0	20.2	25.1	27.8	26.3
C (ppm)	195	40	32	20	18
O (ppm)	4,070	3,123	3,109	3,310	3,514
N (ppm)	214	121	166	66	57
H (ppm)	87	83	58	53	53
P (ppm)	101	122	109	167	177
Screens					
+60 mesh	0	0	1.9	0	0
-60+100 mesh	2.6	2.8	37.9	10.4	9.6
-100+200 mesh	19.5	18.7	31.1	38.2	35.7
-200+325 mesh	17.7	16.3	13.8	16.6	16.9
-325 mesh	60.2	62.2	15.1	34.8	37.8
Flow mg/s	37	37	235	182	175
1335C/30V					
Cap cv/g	60,246	55,355	54,926	52,734	55,329
Shrinkage (%)	2.9	2.8	2.5	1.2	1.6
Sint. Den. (grams/cc)	5.8	5.8	5.9	5.7	5.7
DCL na/cf	0.34	0.62	0.18	0.21	0.25

- 17 -

Data for higher capacitance powders				
Process	Present Inv.	Present Inv.	No Agglom	No Agglom.
	Sample 7	Sample 8	Sample 9	Sample 10
Weights	7.5 lbs.	8.3 lbs.	11 lbs.	10 lbs.
FSS	1.61	1.4	0.58	0.67
Scott Density (g/in)	26.7	23.6	16.3	17.4
C (ppm)	22	32	26	36
O (ppm)	5,762	5,335	6,368	5,057
N (ppm)	27	26	67	58
H (ppm)	200	227	207	200
P (ppm)	36	57	101	43
Screens				
+ 60	0	0	0.5	0
-60+100	12.8	9.8	4.4	5.9
-100+200	36.5	36.6	28.4	28.3
-200+325	19.2	19.9	31.8	26.7
-325	31.5	33.7	34.9	39.1
Flow mg/s	78	56	4.7	5.9
Press density 4.5 gms/cc				
1265C/30V				
Cap cv/g	80,135	83,282	85,372	81,752
Shrinkage	2	2.4	3.7	2.5
Sint. Den.	4.7	4.7	4.9	4.8
DCL na/cv	0.27	0.26	0.34	0.31




As shown in Figures 1-4, anode samples 4 and 5 and 7 and 8 made from powders agglomerated by the method of the present invention had larger sizes that didn't exist in the remaining samples and also had a higher number of large pores than the remaining samples.

Accordingly, the pore distribution was considerably better for the samples of the present invention in view of these two improved parameters. These improved parameters are predictive indicators with regards to a lower Dissipation Factor for the anode and other beneficial properties.

5 Other embodiments of the present invention will be apparent to those skilled in the art from consideration of the specification and practice of the present invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the present invention being indicated by the following claims.

10 "Comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

15



- 19 -

WHAT IS CLAIMED IS:

1. A method to agglomerate tantalum or niobium particles or both comprising:
 - a) combining a volatilizable or vaporizable liquid with particles comprising tantalum, niobium, or both to form wet particles;
 - 5 b) compacting the wet particles;
 - c) drying the wet compacted particles to form a cake; and
 - d) heat treating the cake.
2. The method of claim 1, wherein said compacting is accomplished by vibrating said wet particles in a container.
- 10 3. The method of claim 1, wherein said compacting is accomplished by applying pressure to said wet particles.
4. The method of claim 1, wherein said liquid is water.
5. The method of claim 1, wherein said water is deionized water.
6. The method of claim 1, wherein before said compacting, said particles soak in the
15 liquid for at least five hours.
7. The method of claim 1, wherein before said compacting, said particles soak in the liquid for at least eight hours.
8. The method of claim 1, wherein said drying occurs for at least 10 hours.
9. The method of claim 1, wherein said drying occurs for at least 14 hours.
- 20 10. The method of claim 1, wherein said liquid is present in an amount of from about 30% to about 50% by weight of particles.
11. The method of claim 1, wherein said liquid is added in an amount of about 40% by weight of particles.

- 20 -

12. The method of claim 1, wherein the cake is deagglomerated after heat treating.
13. The method of claim 1, said particles have pores, and wherein before said vibrating, the particles soak in the liquid for a time sufficient to allow the liquid to substantially fill the pores of the particles.
- 5 14. The method of claim 1, wherein the particles are tantalum particles.
15. The method of claim 1, wherein the particles are niobium particles.
16. The method of claim 1, wherein the particles comprise tantalum particles.
17. The method of claim 1, wherein the metal particles comprise niobium particles.
18. The method of claim 1, wherein the liquid comprises water.
- 10 19. The method of claim 1, wherein the liquid comprises water and phosphoric acid.
20. The method of claim 1, wherein the liquid comprises water and from about 10 ppm to about 100 ppm of phosphorous.
21. The method of claim 1, wherein the liquid comprises water and an inorganic acid.
22. The method of claim 1, wherein the liquid is present in an amount of from about 10%
15 to about 50% by weight of particles.
23. The method of claim 1, wherein the liquid is present in an amount to form a paste consistency with the particles.
24. The method of claim 1, further comprising the step of adding additional volatilizable or vaporizing liquid to the container while the container is being vibrated.
- 20 25. The method of claim 1, wherein said drying is accomplished in a vacuum dryer.
26. The method of claim 1, wherein said drying occurs at a temperature of from about 180°F to about 225°F.
27. The method of claim 1, wherein said drying occurs at a temperature of from about 180°F to about 225°F and a vacuum pressure of from about 20 torr to about 50 torr.

28. The method of claim 1, wherein a liquid drying forms on top of the wet particles, before or after compacting.

29. The method of claim 28, wherein about 0.125 ml/cm² of water forms on top of the wet particles based on the square area of a container containing the particles.

30. Agglomerated particles obtained by the method of claim 1.

31. Agglomerated particles obtained by the method of claim 2.

32. Agglomerated particles obtained by the method of claim 3.

33. A method to agglomerate metal particles comprising:

- a) combining a volatilizable or vaporizable liquid with metal particles to form wet particles;
- b) compacting the wet metal particles;
- c) drying the wet compacted metal particles to form a cake; and
- d) heat treating the cake.

34. A method to agglomerate metal particles comprising:

- a) combining a volatilizable or vaporizable liquid with particles comprising wet metal particles;
- b) vibrating the wet particles;
- c) drying the wet metal particles to form a cake; and
- d) heat treating the cake.

35. Particles obtained by the method as described in claim 33 or 34 comprising tantalum, niobium, or both, having a flow rate of at least about 65 mg/sec and a pore size distribution greater than unagglomerated particles.

36. The particles of claim 35, wherein said particles have a flow rate of at least about 100 mg/sec.



37. The particles of claim 35, wherein said particles have a flow rate of at least about 150 mg/sec.

38. The particles of claim 35, wherein said particles have a flow rate of at least about 175 mg/sec.

39. The particles of claim 35, wherein said particles have a flow rate of at least 200 mg/sec.

40. The particles of claim 35, wherein said particles comprise niobium.

41. The particles of claim 35, wherein said particles comprise tantalum.

42. The particles of claim 35, wherein said pore size distribution is greater than unagglomerated particles by at least 10% with respect to greater diameter pores.

43. The particles of claim 35, wherein said particles are nodular tantalum powder.

44. The particles of claim 35, wherein said particles are nodular niobium powder.

45. The particles of claim 43, wherein said particles have a Scott Density of at least 20 g/inch³.

46. The particles of claim 43, wherein said particles have a Scott Density of about 20 g/inch³ to about 40 g/inch³.

47. A capacitor component comprising the tantalum powder of claim 41.

48. A capacitor component comprising the niobium powder of claim 40.

49. The capacitor component of claim 47, wherein said component is a capacitor anode.



50. The capacitor component of claim 48, wherein said component is a capacitor anode.

51. The agglomerated particles of claim 30, wherein said particles are said nodular tantalum powder.

52. The agglomerated particles of claim 30, wherein said particles are said nodular niobium powder.

53. The agglomerated particles of claim 31, wherein said particles are said nodular tantalum powder.

54. The agglomerated particles of claim 31, wherein said particles are said nodular niobium powder.

55. The agglomerated particles of claim 32, wherein said particles are said nodular tantalum powder.


56. The agglomerated particles of claim 32, wherein said particles are said nodular niobium powder.

57. A capacitor component comprising the tantalum agglomerated particles of claim 30.

58. A capacitor component comprising the niobium agglomerated particles of claim 30.

59. The capacitor component of claim 57, wherein said component is a capacitor anode.

60. The capacitor component of claim 58, wherein said component is a capacitor anode.



61.A capacitor component comprising the tantalum agglomerated particles of claim 31.

62.A capacitor component comprising the niobium agglomerated particles of claim 31.

63.The capacitor component of claim 61, wherein said component is a capacitor anode.

64.The capacitor component of claim 62, wherein said component is a capacitor anode.

65.A capacitor component comprising the tantalum agglomerated particles of claim 32.

66.A capacitor component comprising the niobium agglomerated particles of claim 32.

67.The capacitor component of claim 65, wherein said component is a capacitor anode.


68.The capacitor component of claim 66, wherein said component is a capacitor anode.

DATED this 22nd day of February 2002

CABOT CORPORATION

WATERMARK PATENT & TRADE MARK ATTORNEYS
290 BURWOOD ROAD
HAWTHORN VICTORIA 3122
AUSTRALIA

KJS:TAP:VRH P18638AU00



1/4

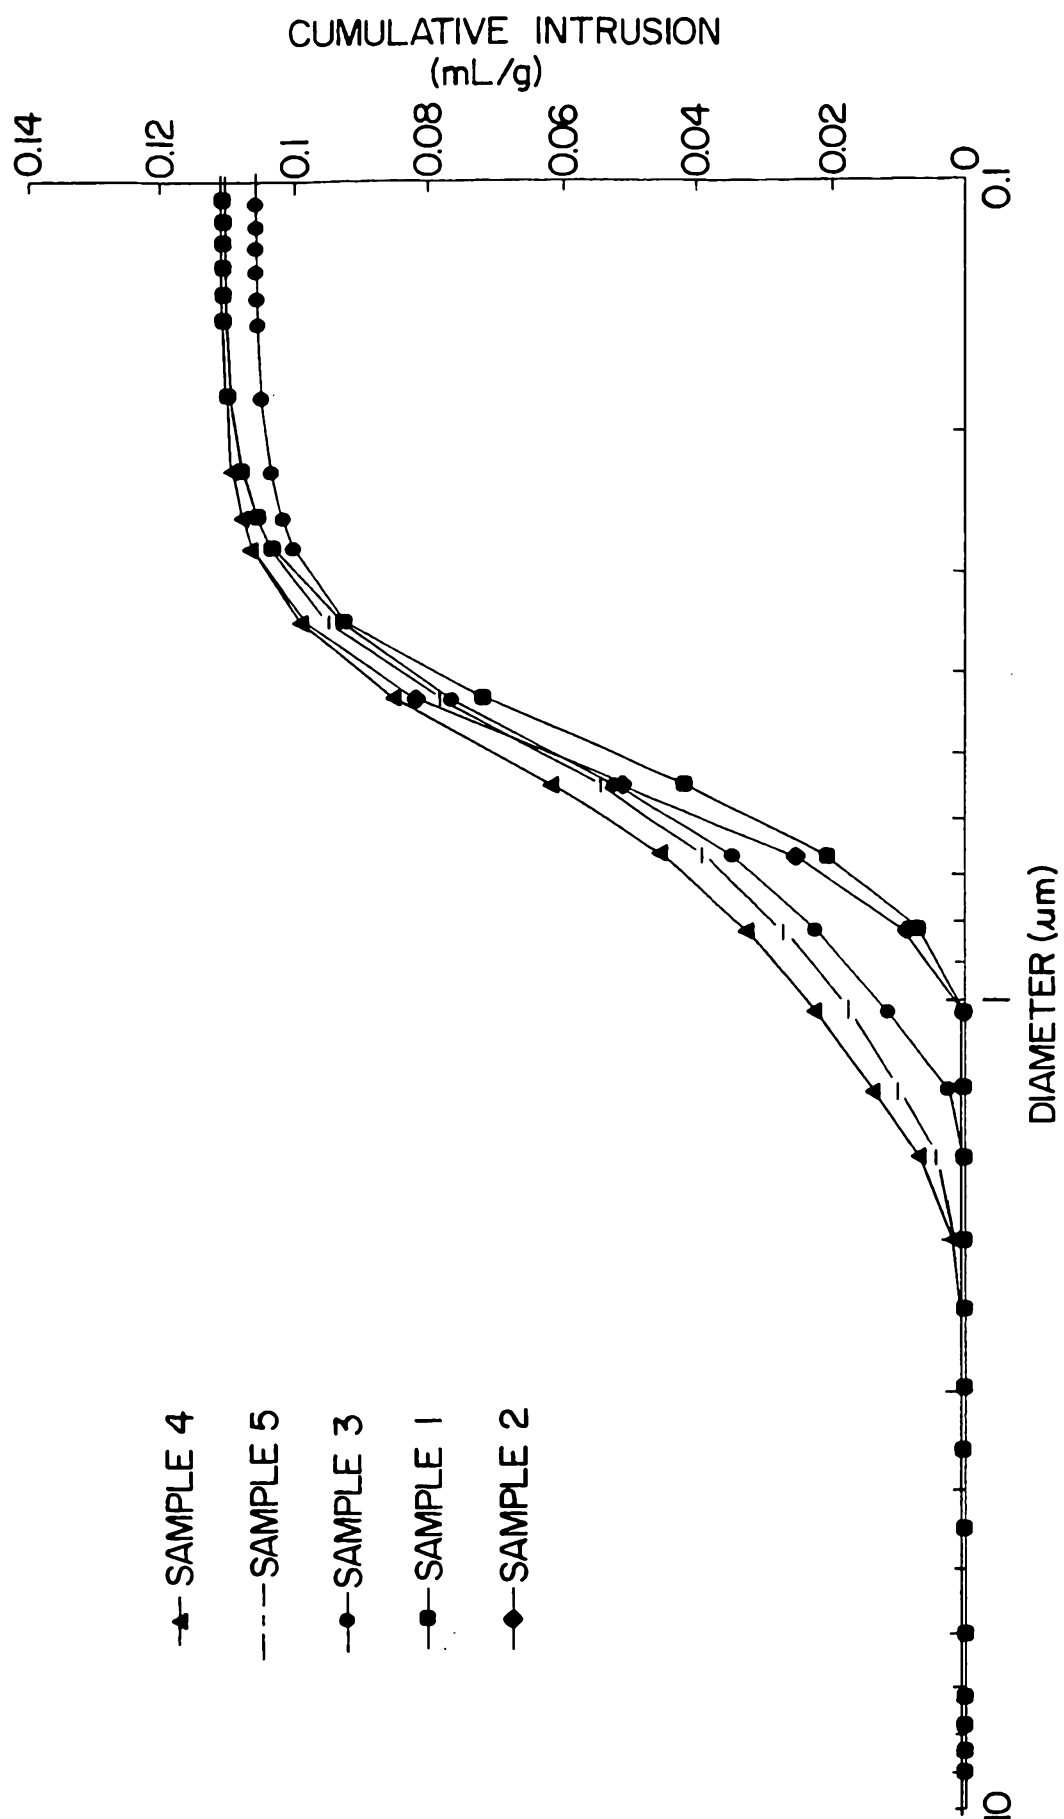


FIG. 1

2/4

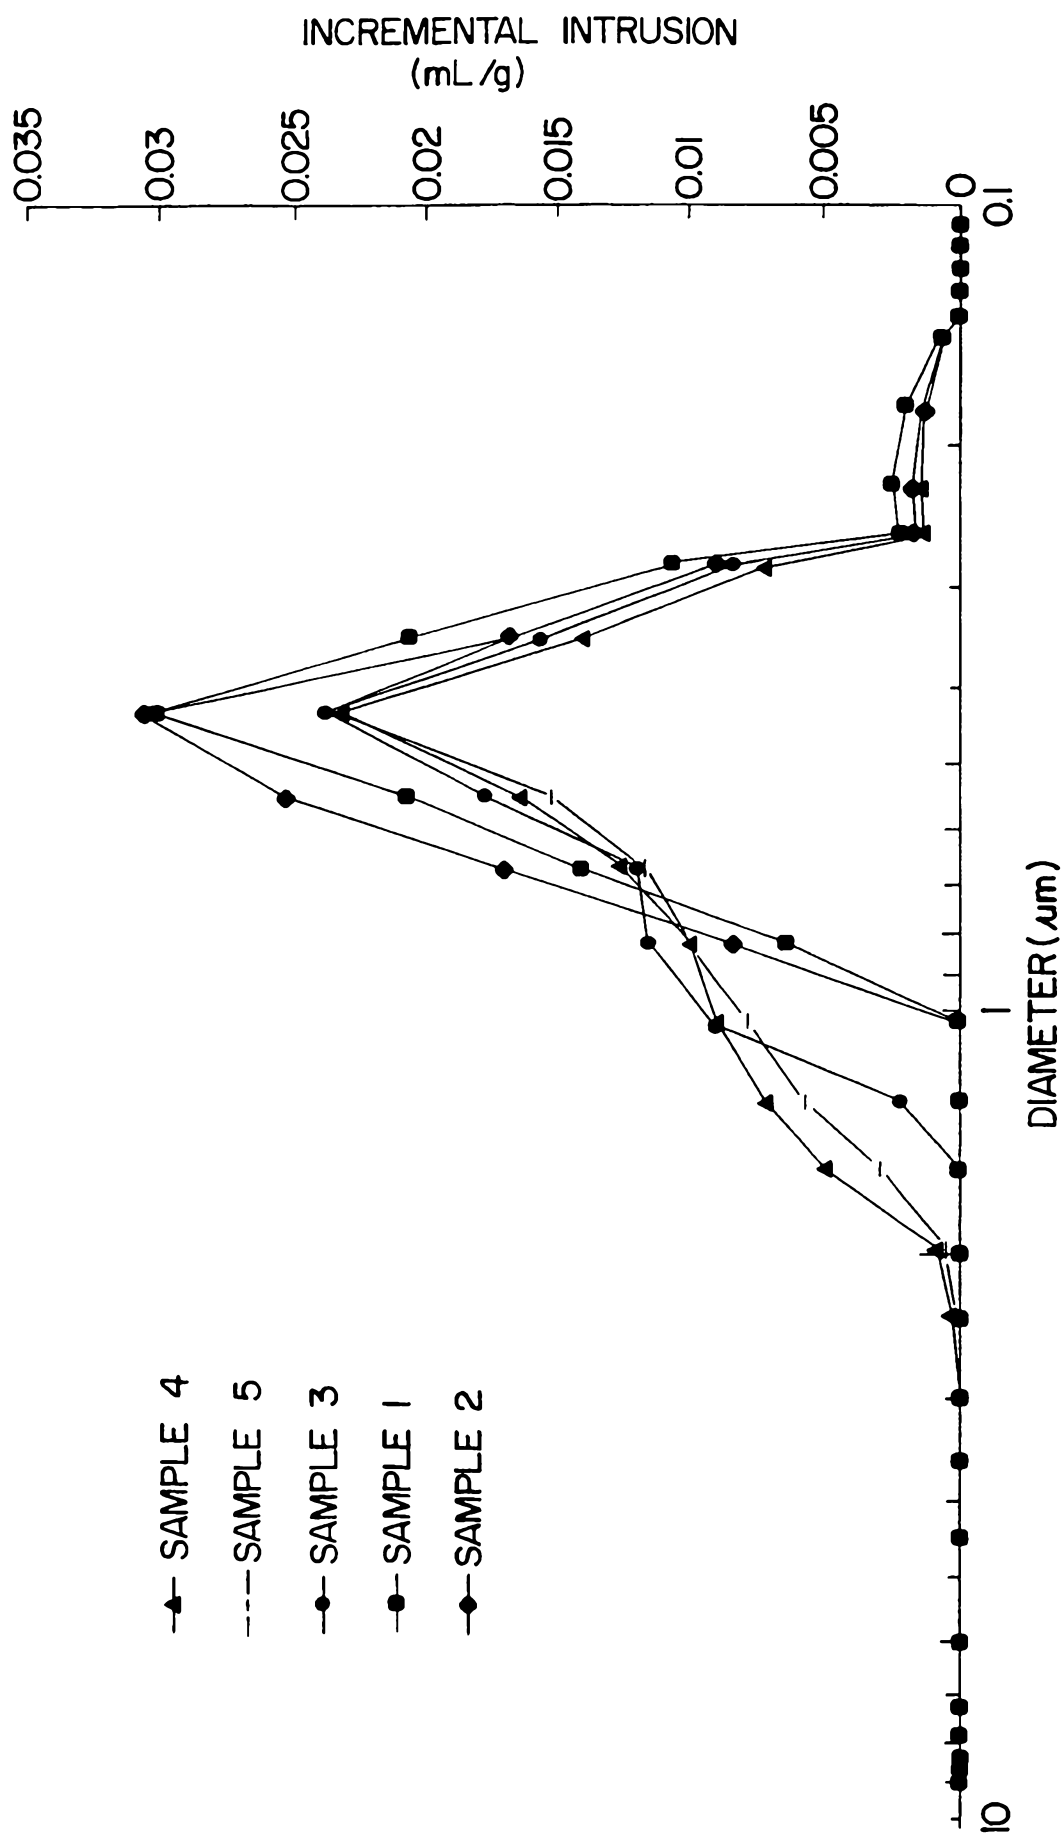


FIG. 2

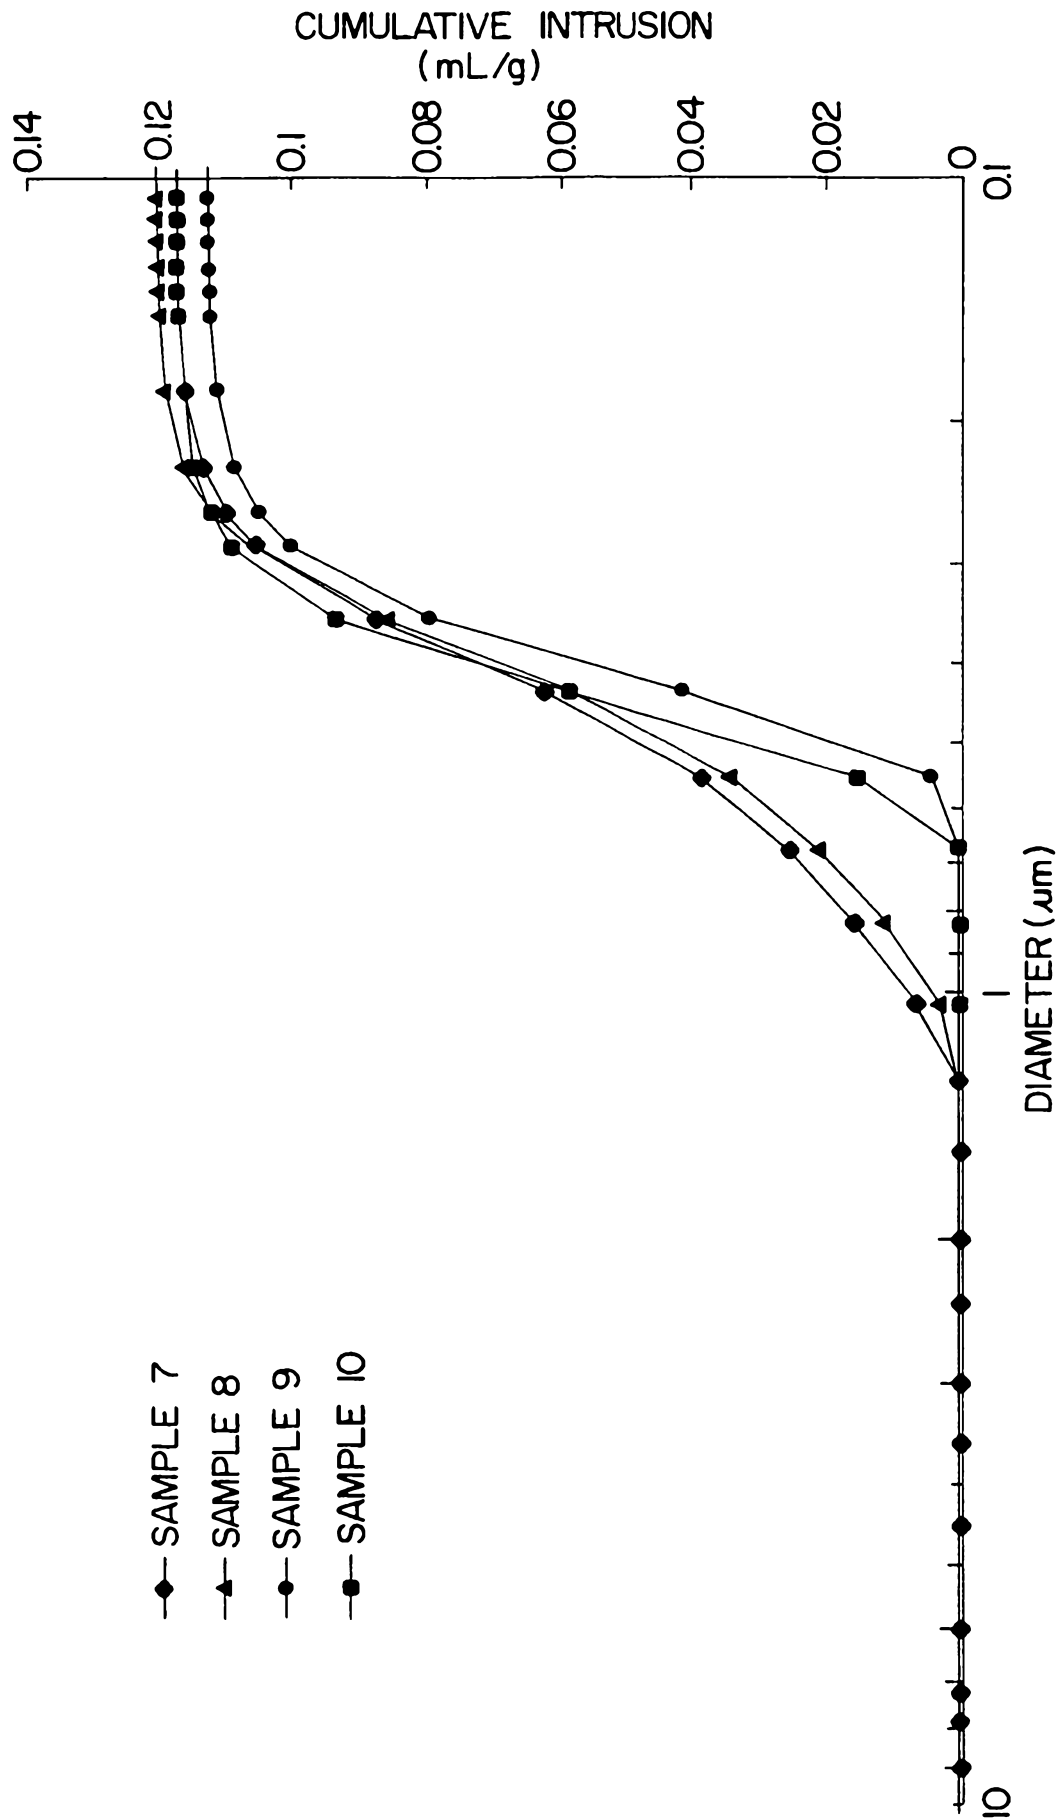


FIG. 3

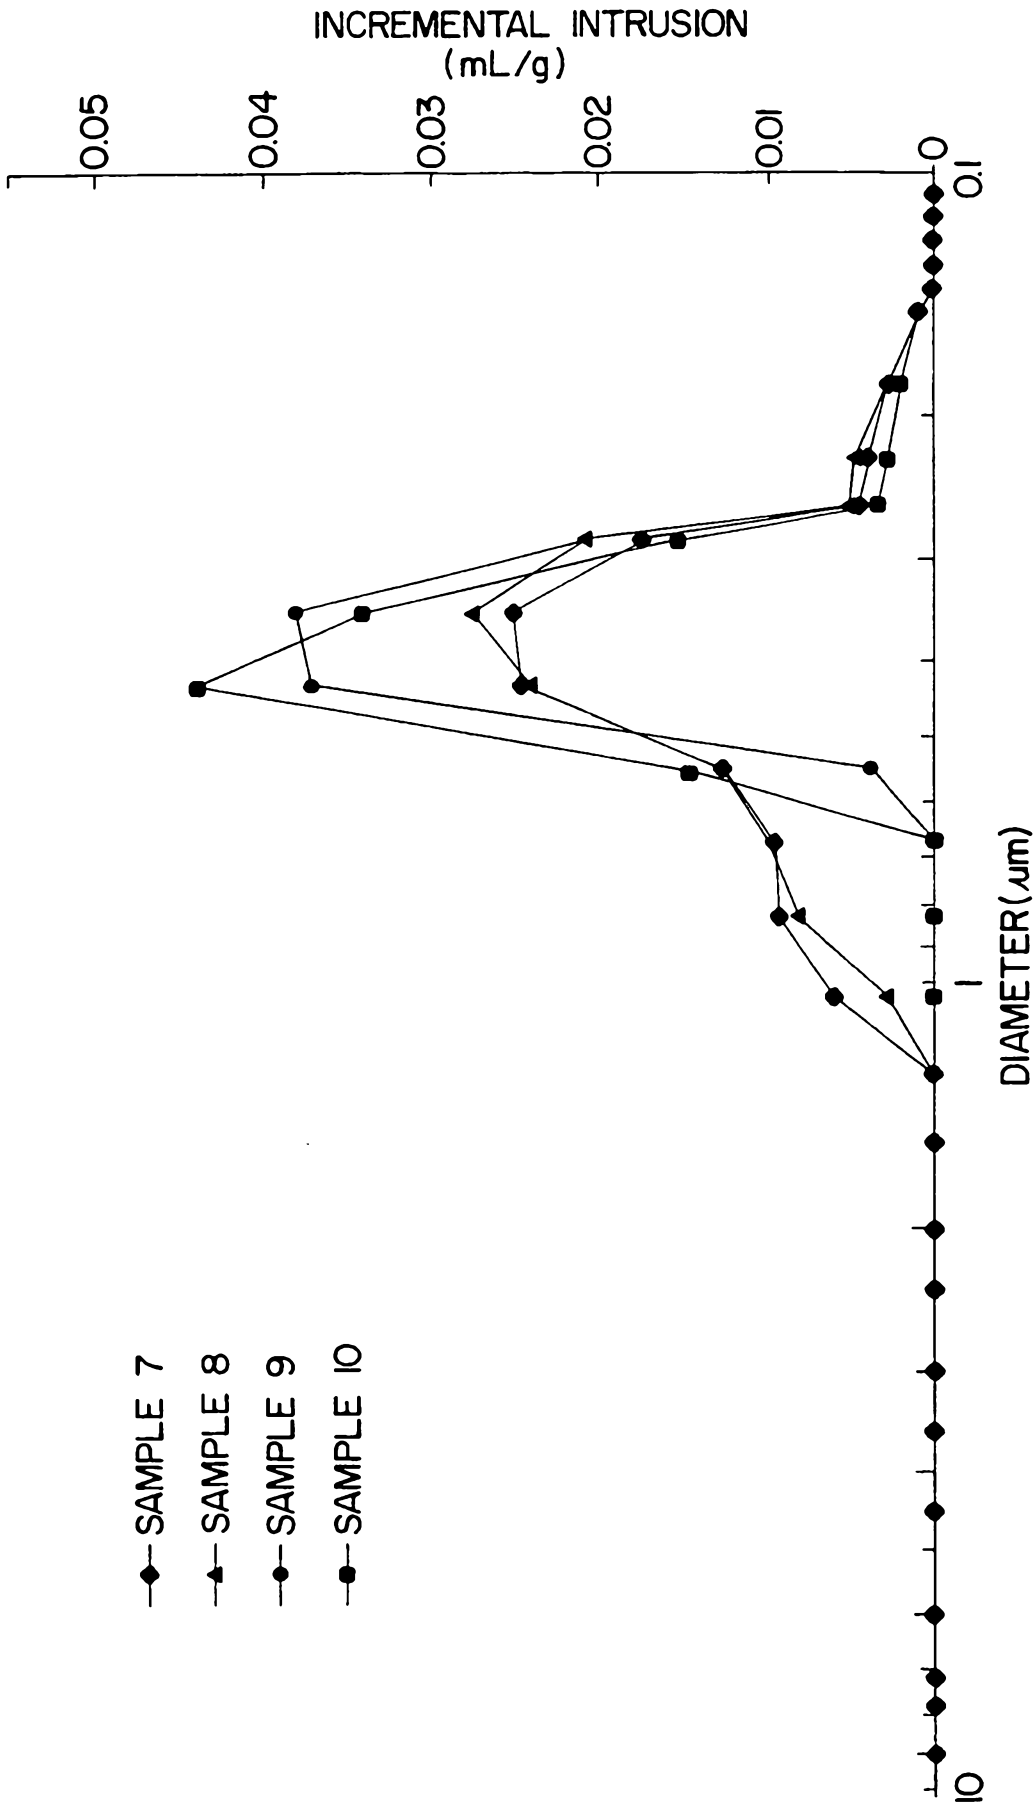


FIG. 4