



(51) International Patent Classification:
B60B 19/12 (2006.01) **F16H 48/08** (2006.01)

(74) Agent: **VAKIL, Ketan S.**; Snell & Wilmer L.L.p., 600 Anton Boulevard, Suite 1400, Costa Mesa, California 92626 (US).

(21) International Application Number:
PCT/US2011/043564

(22) International Filing Date:
11 July 2011 (11.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/842,926 23 July 2010 (23.07.2010) US

(71) Applicant (for all designated States except US): **TOYOTA MOTOR ENGINEERING & MANUFACTURING NORTH AMERICA, INC.** [US/US]; 25 Atlantic Avenue, Erlanger, Kentucky 41018 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **UEHARA, Yasuo** [JP/US]; 201 Fieldcrest St., Ann Arbor, Michigan 48103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: OMNI TRACTION WHEEL SYSTEM AND METHODS OF OPERATING THE SAME

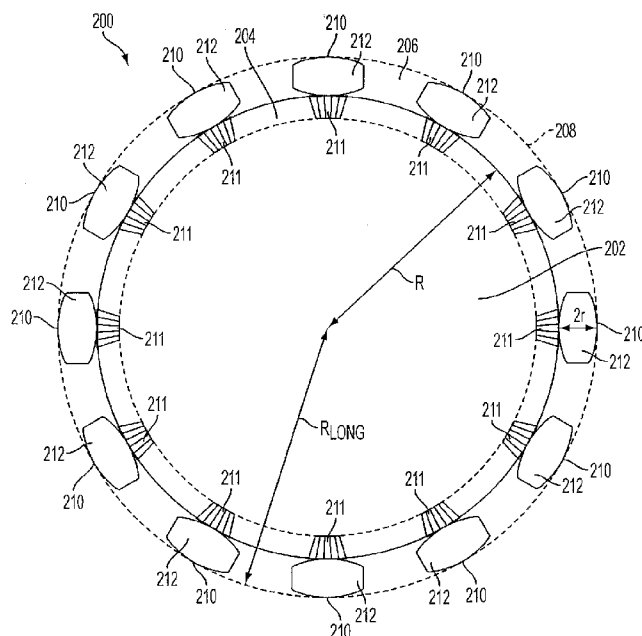


FIG. 2

(57) Abstract: The present invention is an omni traction wheel system, which adopts an integrated differential mechanism to generate longitudinal and lateral traction forces. The omni traction wheel system may include a rotary device that delivers two individually controllable rotational forces, the differential output of which may drive a plurality of peripheral wheels to rotate laterally, and the common output of which may drive a pair of longitudinal plates to rotate longitudinally. Accordingly, the omni traction wheel system may travel in all directions.



Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

OMNI TRACTION WHEEL SYSTEM AND METHODS OF OPERATING THE SAME

BACKGROUND

Field

[0001] The invention relates to an omni traction wheel system. More particularly, the invention relates to an omni traction wheel system deploying an integrated differential mechanism.

Description of the Related Art

[0002] An omni traction wheel, also known as the omni directional wheel, is a rolling device comprises a main wheel and a set of peripheral wheels distributed along the edge of the main wheel. The main wheel may rotate forward and backward while the set of peripheral wheels may rotate left and right. As such, a transportation system deploying the omni traction wheel may travel laterally or diagonally without actually steering the main wheel. Unlike other wheel systems, the omni traction wheel system provides superb maneuverability because it can change the direction of travelling in a relatively short period of time and in a relatively small amount of space.

[0003] Because of their high maneuverability, the omni traction wheel systems are widely used in the fields of low speed transportation systems, such as electronic wheel chair system and robotic systems. Attempts have been made in the past to implement the omni traction wheel system by powering and controlling each peripheral wheel individually. However, such implementation requires a large number of electronic components, transmission gears, and rotary devices. As a result, the traditional omni traction wheel systems suffer from many drawbacks, such as bulky size, heavy weight, and large power consumption.

[0004] Therefore, a need exists in the art for a smaller size, lighter weight, and less power consuming omni traction wheel system.

SUMMARY

[0005] One aspect of the present invention is to improve the traditional omni traction wheel system by deploying an integrated differential mechanism that drives the omni traction wheel in both the longitudinal direction and the lateral direction. The advantages of the integrated differential mechanism include, but are not limited to, reducing the amount of electronic components, rotary devices, and transmission gears and creating an integrated thrust by direct tractions for the longitudinal and lateral directions. An omni traction wheel system may include a pair of longitudinal gears, a rotary device for separately and individually rotating each of the longitudinal gears, a plurality of peripheral wheel assemblies, each having a wheel member and a connecting gear for transferring the differential thrust between the pair of longitudinal gears to the wheel member.

[0006] In one embodiment, the present invention is an omni traction wheel, which may include first and second gears centrally aligned along a first axis, a plurality of peripheral wheel assemblies, each having a wheel member centrally aligned along a second axis, the second axis substantially orthogonal to the first axis, and a connecting gear having a distal end for engaging the first and second gears and a proximal end for engaging the pair of wheels, the distal end and the proximal end defining a radial axis, the radial axis substantially parallel to a common radius of the left and right gears and substantially orthogonal to the first axis and the second axis, and a rotary device for rotating the first gear about the first axis at a first angular velocity and for rotating the second gear about the first axis at a second angular velocity, whereby the connecting gear of each peripheral wheel assembly is configured to rotate its respective wheel

member about the respective second axis when the first angular velocity is different from the second angular velocity.

[0007] In another embodiment, the present invention is a transportation system adopting an omni traction wheel, which may include left and right gears centrally aligned along a first axis, the left and right gears defining a cylindrical space therebetween, the cylindrical space having a circumferential region, a plurality of peripheral wheel assemblies distributed along the circumferential region of the cylindrical space, each having a pair of wheels centrally aligned along a second axis, the second axis substantially orthogonal to the first axis, and a connecting gear having a distal end for engaging the left and right gears and a proximal end for engaging the pair of wheels, the distal end and the proximal end defining a radial axis, the radial axis substantially parallel to a common radius of the left and right gears and substantially orthogonal to the first axis and the second axis and a rotary device for rotating the left gear about the first axis at a left angular velocity and for rotating the right gear about the first axis at a right angular velocity, whereby the connecting gear of each peripheral wheel assembly is configured to rotate its respective pair of wheels about the respective second axis at a lateral angular velocity defined by a difference between the left angular velocity and the right angular velocity, and whereby the connecting gear of each peripheral wheel assembly is configured to revolve along the circumferential region at a common angular velocity defined by a combination of the left angular velocity and the right angular velocity.

[0008] In yet another embodiment, the present invention is a method for operating an omni traction wheel, which may include the steps of engaging a plurality of peripheral wheels to first and second gears via a plurality of connection gears, rotating the first gear at a first angular velocity, and rotating the second gear at a second angular velocity,

wherein the omni traction wheel travels laterally when the first angular velocity is different from the second angular velocity such that a connecting gear is configured to rotate a peripheral wheel.

[0009] In still yet another embodiment, the present invention is an omni traction wheel, which may include first and second plates centrally aligned along a first axis, a plurality of peripheral wheel assemblies, each having a wheel member centrally aligned along a second axis, the second axis substantially orthogonal to the first axis, and a connecting member having a distal end for engaging the first and second plates and a proximal end for engaging the wheel member, the distal end and the proximal end defining a radial axis, the radial axis substantially parallel to a common radius of the left and right plates and substantially orthogonal to the first axis and the second axis, and a rotary device for rotating the first plate about the first axis at a first angular velocity and for rotating the second plate about the first axis at a second angular velocity, whereby the connecting member of each peripheral wheel assembly is configured to rotate its respective wheel member about the respective second axis when the first angular velocity is different from the second angular velocity.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Other systems, methods, features and advantages of the present invention will be or will become apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the present invention, and be protected by the accompanying claims. Component parts shown in the drawings are not necessarily to scale, and may be exaggerated to better illustrate the important features of the present invention. In the

drawings, like reference numerals designate like parts throughout the different views, wherein:

[0011] FIG. 1A shows a perspective view of the omni traction wheel system (OTWS) according to an embodiment of the present invention;

[0012] FIG. 1B shows an exploded view of the OTWS according to an embodiment of the present invention;

[0013] FIG. 2 shows a side view of the OTWS according to an embodiment of the present invention;

[0014] FIGS. 3A, 3B, and 3C show the side views of the OTWSs having three peripheral wheel assemblies (PWAs), four PWAs, and eight PWAs respectively according to various embodiments of the present invention;

[0015] FIG. 4A shows a cross-sectional side view of the OTWS according to an embodiment of the present invention;

[0016] FIG. 4B shows a cross-sectional view of the PWA according to an embodiment of the present invention;

[0017] FIG. 5 shows the cross-sectional front views of the OTWS having several gear configurations according to various embodiments of the present invention;

[0018] FIG. 6 shows the exemplary models of an external gear and a bevel gear according to various embodiments of the present invention;

[0019] FIG. 7 shows the exemplary models of a spear gear, a helical gear, and a double helical gear according to various embodiments of the present invention;

[0020] FIG. 8A shows a high level conceptual view of the OTWS differential mechanism according to an embodiment of the present invention;

[0021] FIGS. 8A and 8B show the angular velocities of several components of the OTWS according to various embodiments of the present invention;

[0022] FIG. 9 shows a common mode operation of the OTWS according to an embodiment of the present invention;

[0023] FIG. 10 shows a differential mode operation of the OTWS according to an embodiment of the present invention;

[0024] FIG. 11 shows a forward differential mode operation of the OTWS according to an embodiment of the present invention;

[0025] FIG. 12 shows a backward differential mode operation of the OTWS according to an embodiment of the present invention;

[0026] FIG. 13 shows all the traveling directions of the OTWS with respect to various combinations of the differential angular velocity and common angular velocity according to various embodiments of the present invention;

[0027] FIG. 14 shows a cross-sectional side view of the OTWS with frictional control according to an embodiment of the present invention; and

[0028] FIG. 15 shows a flow diagram showing the method steps for operating the omni traction wheel system according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0029] Apparatus, systems and methods that implement the embodiments of the various features of the present invention will now be described with reference to the drawings. The drawings and the associated descriptions are provided to illustrate some embodiments of the present invention and not to limit the scope of the present invention. Throughout the drawings, reference numbers are re-used to indicate correspondence between referenced elements. In addition, the first digit of each reference number indicates the figure in which the element first appears.

[0030] FIG. 1A shows a perspective view of an exemplary omni traction wheel system (OTWS) 100 according to an embodiment of the present invention. In general, the

OTWS 100 may include a pair of main wheels formed by a pair of protective plates 102 and a plurality of peripheral wheel assemblies (PWAs) 106 located between the rims of the protective plates 102. Moreover, the OTWS 100 may be coupled to a leg 120, which integrates the OTWS 100 to a transportation system that may deploy one or more OTWSs 100. For example, the transportation system may be a wheel chair deploying four OTWSs 100, a mobile robot deploying three OTWSs 100, or a unicycle deploying one OTWS 100.

[0031] FIG. 1B shows an exploded view of the OTWS 100 according to an embodiment of the present invention. More specifically, the OTWS 100 may also have a pair of longitudinal gears 108 protected by the protecting plates 102, a pair of rotary devices 104 for rotating the longitudinal gears 108, a spacing member 110 that gives structural support to the OTWS 100.

[0032] FIG. 2 shows a side view of an omni traction wheel system 200 according to an embodiment of the present invention. The OTWS 200, which is similar to the OTWS 100 of FIG. 1A, may include two longitudinal gears 202, each of which has a set of teeth along a circumference region 204. The two longitudinal gears 202 normally have a common longitudinal radius R , such that their surface areas are substantially the same. Moreover, because the two longitudinal gears 202 have a common longitudinal radius R , the circumferential regions 204 of the two longitudinal gears 202 may be identical in shape and thus hold the same number of teeth.

[0033] As shown in FIG. 2, the OTWS 200 may also include a plurality of peripheral wheel assemblies 210. According to an embodiment of the present invention, each PWA 210 may have a connecting gear 211 and a wheel member 212. The PWAs 210 may be distributed around the two longitudinal gears 202. More specifically, the connecting gear 211 of each PWA 210 may be disposed between the circumferential

regions **204** of the two longitudinal gears **202** whereas the wheel member **212** of each PWA **210** may be disposed along an outer region **206**. The width of the outer region **206** is defined by a lateral radius r of the wheel member **212**. Accordingly, the main wheel **208** has a longitudinal radius R_{LONG} .

[0034] According to an embodiment of the present invention, the longitudinal radius R_{LONG} may be ranged from about 10 cm to about 40 cm. More specifically, the longitudinal radius R_{LONG} can be 15 cm. According to an embodiment of the present invention, the lateral radius r may be ranged from about 2 cm to about 8 cm. More specifically, the lateral radius r can be 3 cm. As such, the circumferential ratio between the longitudinal radius R_{LONG} and the lateral radius r may be ranged from 1 to 20. More specifically, the circumferential ratio between the longitudinal radius R_{LONG} and the lateral radius r may about 5.

[0035] Although FIG. 2 shows that the OTWS **200** has twelve PWAs **210**, the OTWS **200** may also have different numbers of PWAs according to various embodiments of the present invention. For example, FIG. 3A shows that the OTWS **200** may have three PWAs **302**; FIG. 3B shows that the OTWS **200** may have four PWAs **303**; and FIG. 3C shows that the OTWS **200** may have eight PWAs **304**. To facilitate smoother rotation of the main wheel, an extra set of peripheral assemblies may be added. For example, as shown in the diagram **312**, an extra set of three extra PWAs **302** is added to the OTWS **200** according to an embodiment of the present invention. For another example, as shown in the diagram **313**, an extra set of four extra PWAs **303** is added to the OTWS **200** according to another embodiment of the present invention.

[0036] The discussion now turns to the internal structure of the OTWS **200**. In FIG. 4A, which shows a cross-sectional side view of the OTWS **200**, only one longitudinal gear **402** is displayed for the sake of clarity. According to an embodiment of the present

invention, the OTWS 200 may have a spacing member 401 disposed between the two longitudinal gears 402. In general, the spacing member 401 may have a central axle 405 and two parallel discs 403, such that the central axle 405 is perpendicular to the two parallel discs 403.

[0037] The spacing member 401 may be operatively coupled to the two longitudinal gears 402 to help provide structural support for the OTWS 200. On one hand, the two parallel discs 403, along with the central axle 405, hold the two longitudinal gears 402 in place by preventing any substantial displacement between the two longitudinal gears 402. On the other hand, the parallel discs 403 allow the longitudinal gears 402 to freely rotate about the central axle 405. More specifically, the two longitudinal gears 402 may be rotated independently without interfering each other even though they are both operatively coupled to the spacing member 401. As such, the angular velocity of one longitudinal gear 402 should not affect the angular velocity of the other longitudinal gear 402 according to an embodiment of the present invention.

[0038] Although the spacing member 401 provides structural support to the longitudinal gears 402, it may or may not rotate along with the longitudinal gears 402. For example, if the spacing member 401 is coupled a rotary device (not shown) that rotates the longitudinal gears 402, it is likely that the spacing member 401 will remain angularly stationary in relative to the two longitudinal gears 402; otherwise, the spacing member 401 may rotate along with the longitudinal gears 402.

[0039] Referring to FIG. 4A, the OTWS 200 may have several PWAs distributed around the longitudinal gear 402. For the sake of simplicity, FIG. 4A only displays the PWAs 410 and 460. However, it is understood that the OTWS 200 may include more than two PWAs according to various embodiments of the present invention. In general, each PWA may have a connecting gear 420 and a wheel member, which may include a

first wheel 430 and an optional second wheel 440. For example, the PWA 410 and the PWA 460 are structurally similar to each other except that the wheel member of the PWA 410 has the first wheel 430 and the optional second wheel 440, whereas the wheel member of the PWA 460 only has the first wheel 430. In practice, the OTWS 200 may adopt either the PWA 410 or the PWA 460, or the OTWS 200 may adopt both the PWAs 410 and 460.

[0040] Referring to FIG. 4B, which shows a cross-sectional view of the PWAs 410 and 460, the first wheel 430 may have a circumference 432 defined by a radius r . The first wheel 430 may engage the connecting gear 420 via a receiving gear 434 such that the first wheel 430 may be rotated about the peripheral axle 436 when the connecting gear 420 is rotating.

[0041] The connecting gear 420 of each PWA 410 or 460 may have a distal end 422 and a proximal end 424. The distal end 422 should be engaged by and sandwiched between the two longitudinal gears 402 along their circumferential regions 404, and the proximal end 424 should engage the first wheel 430 via the receiving gear 434 of the first wheel 430. As such, the connecting gear 420 may serve two functions from a high level inventive standpoint. First, the connecting gear 420 may transmit the differential angular velocity between the two longitudinal gears 402 to the respective first wheel 430, thereby causing the respective first wheel 430 to rotate orthogonally in relative to the rotations of the longitudinal gears 402. Second, the connecting gear 420 may revolve around the central axle 405 by receiving the common angular velocity of the two longitudinal gears 402, such that the entire PWA 410 and 460 may also revolve around the central axle 405.

[0042] According to embodiment of the present invention, the distal end 422 may be coupled to the proximal end 424 via a radial axle 426, which is substantially parallel to

the common radius **R** of the two longitudinal gears **402**. The radial axle **426** may have an extended section **451** for coupling the entire PWA **410** or **460** to the central axle **405** of the spacing member **401**. Alternatively, the PWA **410** or **460** may be coupled to the spacing member **401** or a pair of protective plates **408** via a brace member **450**. The brace member **450** may have a stabilizer **455** for stabilizing the position of the radial axle **426** to ensure that the receiving gear **434** is properly engaged to the proximal end **424** of the connecting gear **420**.

[0043] Referring again to FIG. 4A, the OTWS **200** may have protecting plates **406** for protecting the rotary device, the longitudinal gears **402**, and the PWAs **410** and **460**. Particularly, the protecting plates **406** may have an outer region **408** for protecting the PWAs **410** and **460**. According to an embodiment of the present invention, the protecting plates **406** may be coupled to the spacing member **401** via the central axle **405**, which penetrates the centers of the two longitudinal gears **402**. Alternatively, the protecting plates **406** may be coupled to the two longitudinal gears **402** according to another embodiment of the present invention.

[0044] Although FIG. 4A shows only one gear configuration of the OTWS **200**, the OTWS **200** may have other gear configurations according to various embodiment of the present inventions. For example, FIG. 5 shows the cross-sectional front views of the OTWS **200** having several gear configurations **510**, **520**, and **530**. For the sake of simplicity, only a top and a bottom PWAs **550** are displayed in each gear configuration. However, it is understood that several more PWAs may be included in each gear configuration and that the PWAs **550** are similar to the PWAs **410** and **460** discussed with respect to FIGS. 4A and 4B. More specifically, the PWA **550** may include the first wheel with the receiving gear **553** and the peripheral axle **551** as well as the connecting gear with the distal end **554** and the proximal end **552**.

[0045] According to an embodiment of the present invention, the gear configuration 510 may adopt a pair of external gears 513 as the longitudinal gears 402. The external gears 513 may have a set of straight-cut teeth, helical teeth, or double helical teeth. The distal end 554 of the connecting gear may be a bevel gear with a set of teeth matching the external gears 513. Similarly, the proximal end 552 of the connecting gear may be a bevel gear with a set of teeth matching the receiving gear 553, which can be a spur gear, a helical gear, or a double helical gear.

[0046] The gear configuration 510 may also include the spacing member 511 and two rotary devices 514 and 515. The spacing member 511 may have a pair of discs 512 that secure the external gears 513 from the outside and a central axle 516 that penetrates the external gears 513 through their centers. The rotary devices 514 and 515 may be coupled to the central axle 516, such that the rotary devices 514 and 515 can separately and individually rotate each external gear 513 about the central axle 516. Although the gear configuration 510 adopts two rotary devices, one rotary device may be sufficient if it can separately and individually rotate each external gear 513.

[0047] According to another embodiment of the present invention, the gear configuration 520 may adopt a pair of external gears 523 as the longitudinal gears 402. The external gears 523 may have a set of straight-cut teeth, helical teeth, or double helical teeth. The distal end 554 of the connecting gear may be a bevel gear with a set of teeth matching the external gears 523. Similarly, the proximal end 552 of the connecting gear may be a bevel gear with a set of teeth matching the receiving gear 553, which can be a spur gear, a helical gear, or a double helical gear.

[0048] The gear configuration 520 may also include the spacing member 521 and two rotary devices 524 and 525. The spacing member 521 may have a pair of discs 522 that secure the external gears 523 from the inside and a central axle 526 that penetrates the

external gears **523** through their centers. The rotary devices **524** and **525** may be coupled to both ends of the central axle **526**, such that the rotary devices **524** and **525** can separately and individually rotate each external gear **523** about the central axle **526**. Although the gear configuration **520** adopts two rotary devices, one rotary device may be sufficient if it can separately and individually rotate each external gear **523**.

[0049] According to yet another embodiment of the present invention, the gear configuration **530** may adopt a pair of modified external gears **533** as the longitudinal gears **402**. The modified external gears **533** may have a set of straight-cut teeth, helical teeth, or double helical teeth. The distal end **554** of the connecting gear may be a bevel gear with a set of teeth matching the modified external gears **533**. Similarly, the proximal end **552** of the connecting gear may be a bevel gear with a set of teeth matching the receiving gear **553**, which can be a spur gear, a helical gear, or a double helical gear.

[0050] The gear configuration **530** may also include the spacing member **531** and two rotary devices **534** and **535**. The spacing member **531** may have a pair of internal discs **532** embedded in the middle of the modified external gears **533** and a central axle **536** coupled between the internal discs **532**. The rotary devices **534** and **535** may be disposed within the central axle **536** for separately and individually rotating the pair of internal discs **532**. Accordingly, the pair of modified external gears **533** may be rotated separately and individually because they are coupled to the internal discs **532**. Although the gear configuration **530** adopts two rotary devices, one rotary device may be sufficient if it can separately and individually rotate each modified external gear **533**.

[0051] It is understood that the components of each gear configurations may be interchangeable. In an embodiment of the present invention, the spacing member **511** may be used in the gear configuration **520**. In another embodiment of the present

invention, the central axle 536 with the embedded rotary devices 534 and 535 may be used in the gear configuration 510. In yet another embodiment of the present invention, the external gears 523 may be used in the gear configuration 530.

[0052] For illustrative purposes, FIGS. 6 and 7 are provided to show the exemplary models of the several gears discussed herein. For example, FIG. 6 shows the exemplary models of the external gear and the bevel gear. For another example, FIG. 7 shows the exemplary models of the spur gear, the helical gear, and the double helical gear. It is understood that the longitudinal gears, the connecting gears, and the receiving gears may take other alternative forms, as long as their combinations are consistent with the general principles of mechanics.

[0053] The discussion now turns to the physics of the OTWS. In FIG. 8A, which shows the high level conceptual view of the OTWS according to an embodiment of the present invention, the pair of longitudinal gears may be represented by a left gear (or interchangeably a first gear) 802 and a right gear (interchangeably a second gear) 804. Although the terms “left” and “right” are used consistently throughout the rest of the specification, it is to be emphasized that they are interchangeable and are relatively defined such that they should not be construed in the absolute sense.

[0054] The left gear 802 and the right gear 804 are parallel to a first plane S_x and orthogonal to a first axis (interchangeably a longitudinal axis) A_x . The left and right angular velocities V_{XL} and V_{XR} represent the angular velocities of the left and right gears 802 and 804 respectively. Both the left and right angular velocities V_{XL} and V_{XR} are measured in the clockwise direction about the first axis A_x in radian per second. When the left and right angular velocities V_{XL} and V_{XR} are positive, meaning that the left and right gears 802 and 804 are rotating in the clockwise direction, the OTWS 800 travels forward with a positive longitudinal velocity V_{LONG} . When the left and right

angular velocities V_{XL} and V_{XR} are negative, meaning that the left and right gears **802** and **804** are rotating in the counterclockwise direction, the OTWS **800** travels backward with a negative longitudinal velocity V_{LONG} .

[0055] As defined herein, the term “longitudinal” is associated with the forward and backward directions, whereas the term “lateral” is associated with the left and right directions. Although the terms “forward” and “backward” are used consistently throughout the rest of the specification, it is to be emphasized that they are interchangeable and are relatively defined such that they should not be construed in the absolute sense.

[0056] The left and right gears **802** and **804** define a cylindrical space **806** in between them and the cylindrical space **806** has a circumferential region **808**. According to an embodiment of the present invention, the distal end **822** of the connecting gear **820** of each PWA **810** may be distributed along the circumferential region **808**, such that the connecting gear **820** may be rotated about a radial axis A_y , which is substantially parallel to a radius of the cylindrical space **806**. As such, the radial axis A_y of each PWA **810** should be substantially orthogonal to the first axis A_x and the radial plane S_y of each PWA **810** should be substantially parallel to the side surface of the cylindrical space **806**.

[0057] In an embodiment of the present invention, the distal end **822** of the connecting gear **820** is engaged between both left and right gears **802** and **804**. As such, the angular velocity V_y of the connecting gear **820** is a function of a differential angular velocity V_{diff} between the left and right gears **802** and **804**. More specifically, the differential angular velocity V_{diff} is defined as $V_{XL} - V_{XR}$. For example, if K_{xy} represents the gear ratio between the longitudinal gear **802** and the connecting gear **820**, the angular velocity V_y equals $K_{xy} * (V_{diff})$.

[0058] Under this differential mechanism, the connecting gear 820 may (1) rotate clockwise about the radial axis A_y at a positive angular velocity V_y when the left angular velocity V_{XL} is greater than right angular velocity V_{XR} (i.e., the differential angular velocity V_{diff} is greater than 0); (2) rotate counterclockwise about the radial axis A_y at a negative angular velocity V_y when the left angular velocity V_{XL} is less than the right angular velocity V_{XR} (i.e., the differential angular velocity V_{diff} is less than 0); and (3) remain angularly stationary (i.e., no rotation) when the left angular velocity V_{XL} is substantially the same as the right angular velocity V_{XR} (i.e., the left and right angular velocities V_{XL} and V_{XR} are in the same direction and of the same magnitude).

[0059] Referring to FIG. 8A, the PWA 810 is symmetrical along a plane that is parallel to the first plane S_x and positioned in the middle of the cylindrical space 806. The receiving gear 830 of the first wheel is engaged by the proximal end 824 of the connecting gear 820, such that the first wheel may be rotated about a second axis (interchangeably a peripheral axis) A_z when the connecting gear 820 rotates. Because the proximal end 824 has the same angular velocity as the distal end 822, the angular velocity V_z of the first wheel is a function of the angular velocity V_y of the distal end 822, which ultimately depends on the differential angular velocity V_{diff} between the left and right angular velocities V_{XL} and V_{XR} . More specifically, if K_{yz} represents the gear ratio between the connecting gear 820 and the receiving gear 830, the angular velocity V_z equals $K_{yz} \cdot V_y$, which ultimately equals $K_{yz} \cdot K_{xy} \cdot (V_{diff})$.

[0060] According to an embodiment of the present invention, the left and right angular velocities V_{XL} and V_{XR} may be ranged from about 0 radian per second to about plus or minus 20 radians per second. More specifically, the left and right angular velocities V_{XL} and V_{XR} may be about plus or minus 8 radians per second. According to an embodiment of the present invention, the radius of the longitudinal gears 802 and 804

may be about 8 cm, the radius of the connecting gear 420 may be about 0.5cm, and the radius of the receiving gear 830 may be about 2.5 cm. As such, the gear ratio gear ratio K_{xy} may be about 16 and the gear ratio K_{yz} may be about 0.2.

[0061] For example, the first wheel may (1) rotate clockwise about the second axis Az at a positive angular velocity V_z when the left angular velocity V_{xL} is greater than the right angular velocity V_{xR} (i.e., the differential angular velocity V_{diff} is greater than 0); (2) rotate counterclockwise about the radial axis Az at a negative angular velocity V_z when the left angular velocity V_{xL} is less than the right angular velocity V_{xR} (i.e., the differential angular velocity V_{diff} is less than 0); and (3) remain angularly stationary when the left angular velocity V_{xL} is substantially the same as the right angular velocity V_{xR} . For the sake of clarity, FIG. 8B summarizes the rotating directions of the angular velocities V_y and V_z when the left angular velocity V_{xL} is less than the right angular velocity V_{xR} (i.e., the differential angular velocity $V_{diff} < 0$); and FIG. 8C summarizes the rotating directions of the angular velocities V_y and V_z when the left angular velocity V_{xL} is greater than the right angular velocity V_{xR} (i.e., the differential angular velocity $V_{diff} > 0$).

[0062] When the first wheel rotates at a positive angular velocity V_z , the OTWS 800 may travel laterally to the left at a positive lateral velocity V_{LAT} , which equals $V_z * r$. Conversely, when the first wheel, rotates at a negative angular velocity V_z , the OTWS 800 may travel laterally to the right at a negative lateral velocity V_{LAT} , which equals $V_z * r$. Moreover, if the left angular velocity V_{xL} does not substantially cancel out the right angular velocity V_{xR} , the entire PWA 810 may revolve around the first axis Ax by travelling along the circumferential region 808 at a common angular velocity V_{com} .

[0063] The discussion now turns to several operation modes of the OTWS. FIG. 9 demonstrates a common mode operation of the OTWS 800 according to an embodiment

of the present invention. Under the common mode operation, the left and right gears 802 and 804 always rotate at a common angular velocity V_{com} , meaning that the left gear 802 has the same angular speed and the same rotating direction as the right gear 804. As shown in the diagrams 901 and 903, both the left and right gears 802 and 804 may rotate clockwise or counterclockwise at the same time with the same angular speed.

[0064] Consequentially, the PWA 810 may revolve around the first axis Ax at the common angular velocity V_{com} . For example, the PWA 810 in the diagram 901 may revolve around the first axis Ax at a negative common angular velocity V_{com} , which is less than 0. Accordingly, the OTWS 800 may travel backward at a negative longitudinal velocity V_{LONG} . For another example, the PWA 810 in the diagram 901 may revolve around the first axis Ax at a positive common angular velocity V_{com} , which is greater than 0. Accordingly, the OTWS 800 may travel forward at a positive longitudinal velocity V_{LONG} .

[0065] Referring to the diagram 902, which shows the cross-sectional back view of the diagram 901, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate counterclockwise about the radial axis Ay , whereas the right angular velocity V_{XR} produces a right thrust T_{XR} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis Ay . However, because the left angular velocity V_{XL} substantially equals the right angular velocity V_{XR} , the left thrust T_{XL} substantially cancels out the right thrust T_{XR} such that the distal end 822 of the connecting gear 820 remains angularly stationary.

[0066] Similarly, in diagram 904, which shows the cross-sectional back view of the diagram 903, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis Ay , whereas the right angular velocity V_{XR} produces a right thrust T_{XR} directing the distal

end 822 of the connecting gear 820 to rotate counterclockwise about the radial axis A_y . Again, because the left angular velocity V_{XL} substantially equals the right angular velocity V_{XR} , the left thrust T_{XL} substantially cancels out the right thrust T_{XR} such that the distal end 822 of the connecting gear 820 remains angularly stationary.

[0067] FIG. 10 demonstrates a differential mode operation of the OTWS 800 according to another embodiment of the present invention. Under the differential mode operation, the left and right gears 802 and 804 always rotate at a pair of opposite angular velocities, meaning that the left gear 802 has the same angular speed but the opposite rotating direction as the right gear 802. As shown in the diagrams 1001 and 1003, the left and right gears 802 and 804 may rotate at a pair of opposite directions at the same time with the same angular speed. Because the left angular velocity V_{XL} substantially cancels out the right angular velocity V_{XR} , the PWA 810 will not revolve around the first axis A_x , such that the OTWS 800 will not travel longitudinally.

[0068] Referring to the diagram 1002, which shows the cross-sectional back view of the diagram 1001, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis A_y , and the right angular velocity V_{XR} also produces a right thrust T_{XR} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis A_y . Consequentially, the connecting gear 820 directs the receiving gear 830 of the first wheel to rotate about the second axis A_z at the angular velocity V_z . Because the first wheel rotates clockwise, the OTWS 800 may travel laterally to the left at a positive lateral velocity V_{LAT} .

[0069] Similarly, in diagram 1004, which shows the cross-sectional front view of the diagram 1003, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate counterclockwise about the radial

axis A_y , and the right angular velocity V_{XR} produces a right thrust T_{XR} also directing the distal end 822 of the connecting gear 820 to rotate counterclockwise about the radial axis A_y . Consequentially, the connecting gear 820 directs the receiving gear 830 of the first wheel to rotate about the second axis A_z at the angular velocity V_z . Because the first wheel rotates counterclockwise, the OTWS 800 may travel laterally to the right at a negative lateral velocity V_{LAT} .

[0070] FIG. 11 demonstrates a backward differential mode operation of the OTWS 800 according to yet another embodiment of the present invention. In one embodiment, under the backward differential mode operation, the angular velocity V_{XL} should be substantially different from the right angular velocity V_{XR} and the common angular velocity V_{com} of the left and right gears 802 and 804 will always be negative and in the counterclockwise direction about the first axis A_x . For example, as shown in the diagram 1101, both the left and right gears 802 and 804 are rotating counterclockwise about the first axis A_x , but the magnitude of the left angular velocity V_{XL} is substantially greater than the magnitude of the right angular velocity V_{XR} . Accordingly, the common angular velocity V_{com} is substantially the same as V_{XR} . For another example, as shown in the diagram 1103, both the left and right gears 802 and 804 are rotating counterclockwise about the first axis A_x , but the magnitude of the left angular velocity V_{XL} is substantially smaller than the magnitude of the right angular velocity V_{XR} . Accordingly, the common angular velocity V_{com} is substantially the same as V_{XL} .

[0071] In any event, the longitudinal gear with the dominant angular velocity (i.e., the left angular velocity V_{XL} in the diagram 1101 and the right angular velocity V_{XR} in the diagram 1103) should be rotating counterclockwise, such that the PWA 810 may revolve counterclockwise around the first axis A_x regardless of the rotating direction of the other longitudinal gear. That is, the right gear 804 in the diagram 1101 may rotate

clockwise as long as the magnitude of the right angular velocity V_{XR} is less than the magnitude of the left angular velocity V_{XL} ; and similarly, the left gear 802 in the diagram 1103 may rotate counterclockwise as long as the magnitude of the left angular velocity V_{XL} is less than the magnitude of the right angular velocity V_{XR} .

[0072] Referring to the diagram 1102, which shows the cross-sectional back view of the diagram 1101, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate counterclockwise about the radial axis Ay whereas the right angular velocity V_{XR} produces a right thrust T_{XR} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis Ay . Because the left thrust T_{XL} is stronger than the right thrust T_{XR} , the left thrust T_{XL} overcomes the right thrust T_{XR} and thereby causing the distal end 822 of the connecting gear 820 to rotate counterclockwise. Consequentially, the connecting gear 820 directs the receiving gear 830 of the first wheel to rotate counterclockwise about the second axis Az at the angular velocity V_z , such that the OTWS 800 may travel laterally to the right at a negative lateral velocity V_{LAT} . Driven simultaneously by the longitudinal velocity V_{LONG} and the lateral velocity V_{LAT} , the OTWS 800 may travel diagonally in the back-right direction.

[0073] Similarly, in the diagram 1104, which shows the cross-sectional back view of the diagram 1103, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate counterclockwise about the radial axis Ay , whereas the right angular velocity V_{XR} produces a right thrust T_{XR} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis Ay . Because the left thrust T_{XL} is weaker than the right thrust T_{XR} , the left thrust T_{XL} gives way to the right thrust T_{XR} and thereby causing the distal end 822 of the connecting gear 820 to rotate clockwise. Consequentially, the connecting gear 820

directs the receiving gear 830 of the first wheel to rotate clockwise about the second axis A_z at the angular velocity V_z , such that the OTWS 800 may travel laterally to the left at a positive lateral velocity V_{LAT} . Driven simultaneously by the longitudinal velocity V_{LONG} and the lateral velocity V_{LAT} , the OTWS 800 may travel diagonally in the back-left direction.

[0074] FIG. 12 demonstrates a forward differential mode operation of the OTWS 800 according to yet another embodiment of the present invention. Under the forward differential mode operation, the left angular velocity V_{XL} should be substantially different from the right angular velocity V_{XR} and the common angular velocity V_{com} of the left and right gears 802 and 804 will always be positive and in the clockwise direction about the first axis A_x . For example, as shown in the diagram 1201, both the left and right gears 802 and 804 are rotating clockwise about the first axis A_x , but the magnitude of the left angular velocity V_{XL} is substantially greater than the magnitude of the right angular velocity V_{XR} . Accordingly, the common angular velocity V_{com} is substantially the same as V_{XR} . For another example, as shown in the diagram 1203, both the left and right gears 802 and 804 are rotating clockwise about the first axis A_x , but the magnitude of the left angular velocity V_{XL} is substantially smaller than the magnitude of the right angular velocity V_{XR} . Accordingly, the common angular velocity V_{com} is substantially the same as V_{XL} .

[0075] In any event, the longitudinal gear with the dominant angular velocity (i.e. the left angular velocity V_{XL} in the diagram 1201 and the right angular velocity V_{XR} in the diagram 1203) should be rotating clockwise, such that the PWA 810 may revolve clockwise around the first axis A_x regardless of the rotating direction of the other longitudinal gear. That is, the right gear 804 in the diagram 1201 may rotate counterclockwise as long as the magnitude of the right angular velocity V_{XR} is less than

the magnitude of the left angular velocity V_{XL} ; and similarly, the left gear 802 in the diagram 1203 may rotate counterclockwise as long as the magnitude of the left angular velocity V_{XL} is less than the magnitude of the right angular velocity V_{XR} .

[0076] Referring to the diagram 1202, which shows the cross-sectional back view of the diagram 1201, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis A_y , whereas the right angular velocity V_{XR} produces a right thrust T_{XR} directing the distal end 822 of the connecting gear 820 to rotate counterclockwise about the radial axis A_y . Because the left thrust T_{XL} is stronger than the right thrust T_{XR} , the left thrust T_{XL} overcomes the right thrust T_{XR} and thereby causing the distal end 822 of the connecting gear 820 to rotate clockwise. Consequentially, the connecting gear 820 directs the receiving gear 830 of the first wheel to rotate clockwise about the second axis A_z at the angular velocity V_z , such that the OTWS 800 may travel laterally to the left at a positive lateral velocity V_{LAT} . Driven simultaneously by the longitudinal velocity V_{LONG} and the lateral velocity V_{LAT} , the OTWS 800 may travel diagonally in the front-left direction.

[0077] Similarly, in the diagram 1204, which shows the cross-sectional back view of the diagram 1203, the left angular velocity V_{XL} produces a left thrust T_{XL} directing the distal end 822 of the connecting gear 820 to rotate clockwise about the radial axis A_y , whereas the right angular velocity V_{XR} produces a right thrust T_{XR} directing the distal end 822 of the connecting gear 820 to rotate counterclockwise about the radial axis A_y . Because the left thrust T_{XL} is weaker than the right thrust T_{XR} , the left thrust T_{XL} gives way to the right thrust T_{XR} and thereby causing the distal end 822 of the connecting gear 820 to rotate counterclockwise. Consequentially, the connecting gear 820 directs the receiving gear 830 of the first wheel to rotate counterclockwise about the second axis

A_z at the angular velocity V_z , such that the OTWS 800 may travel laterally to the right at a negative lateral velocity V_{LAT} . Driven simultaneously by the longitudinal velocity V_{LONG} and the lateral velocity V_{LAT} , the OTWS 800 may travel diagonally in the front-right direction.

[0078] FIG. 13 provides a summary for all traveling directions of the OTWS 800 with respect to various combinations of the differential angular velocity V_{diff} and the common angular velocity V_{com} . For example, the charts 1301 to 1303 represent the traveling directions of the OTWS 800 when V_{com} is less than 0 (i.e. the backward mode). For another example, the charts 1304 to 1306 represent the traveling directions of the OTWS 800 when V_{com} equals 0 (i.e. the pure differential mode). For yet another example, the charts 1307 to 1309 represent the traveling directions of the OTWS 800 when V_{com} is greater than 0 (i.e. the forward mode).

[0079] Under the differential mechanism, the magnitude of the longitudinal velocity V_{LONG} and the lateral velocity V_{LAT} can be adjusted by varying the difference between the left and right angular velocities V_{XL} and V_{XR} . In general, the magnitude of the lateral velocity V_{LAT} increases proportionally with the differential angular velocity V_{diff} , whereas the longitudinal velocity V_{LONG} increases proportionally with the common angular velocity V_{com} . According to an embodiment of the present invention, the magnitudes of the longitudinal velocity V_{LONG} and the lateral velocity V_{LAT} may be ranged from about 0 m/s to about plus or minus 10 m/s. More specifically, the magnitudes of the longitudinal velocity V_{LONG} and the lateral velocity V_{LAT} may be about plus or minus 2 m/s.

[0080] Various embodiments of the present invention adopt a gear system in actuating the differential mechanism. However, the differential mechanism of the OTSW may be actuated by adopting a frictional system according to an alternative embodiment. For

example, referring again to FIG. 8A, the pair of longitudinal gears 802 and 804 may be replaced by a pair of plates, each of which has a frictional surface facing against each other. As shown in FIG. 14, the pair of plates 1402 and 1404 may have the frictional surfaces 1406 and 1408 facing against each other. The frictional surfaces 1406 and 1408 may engage the PWAs 1410 via a connecting member 1420.

[0081] Similar to the connecting gear 820, the connecting member 1420 may be rotated about the radial axis A_y when the differential angular velocity V_{diff} between the pair of plates is greater or less than zero. However, unlike the connecting gear 820, the connecting member 1420 does not have a toothed surface. Instead, the connecting member 1420 may have a frictional surface similar to the pair of plates 1402 and 1404.

[0082] The connecting member 1420 may have a distal end for engaging the frictional surfaces 1406 and 1408 of the pair of plates 1402 and 1404, and a proximal end for engaging the first wheel 1430, which also has a frictional surface similar to the pair of plates 1402 and 1404. As such, the PWA 1410 may rotate about the second axis A_z when the differential angular velocity V_{diff} between the pair of plates 1402 and 1404 is greater or less than zero.

[0083] FIG. 15 is a flow chart that illustrates the method steps of operating the omnitraction wheel according to an embodiment of the present invention. These method steps are related to the discussion with respect to FIGS. 2 to 12. Although these steps might introduce terminologies different from those in the previous discussion, these steps are consistent with the spirit and concept of the previous discussion and should not be construed otherwise.

[0084] In step 1502, a plurality of peripheral wheels is engaged to first and second gears via a plurality of connection gears. In step 1504, the first gear is rotated at a first angular velocity. In step 1506, the second gear is rotated at a second angular velocity,

wherein the omni traction wheel: (1) travels laterally when the first angular velocity is different from the second angular velocity such that each connecting gear is configured to rotate the respective peripheral wheel, (2) travels longitudinally when the first and second angular velocities are in a same direction such that each connecting gear, along with the respective peripheral wheel, is configured to revolve around a circular plate positioned between the first and second gears and substantially parallel to the first and second gears, (3) travels diagonally when the first angular velocity is different from the second angular velocity and when the first and second angular velocities are in a same direction, (4) remains laterally stationary when the first angular velocity substantially equals the second angular velocity, and (5) remains longitudinally stationary when the sum of the first and second angular velocities is substantially zero.

[0085] The previous description of the disclosed examples is provided to enable any person of ordinary skill in the art to make or use the disclosed methods or apparatus. Various modifications to these examples will be readily apparent to those skilled in the art, and the principles defined herein may be applied to other examples without departing from the spirit or scope of the disclosed method and apparatus. The described embodiments are to be considered in all respects only as illustrative and not restrictive and the scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

CLAIMS

WHAT IS CLAIMED IS:

1. An omni traction wheel, comprising:
first and second gears centrally aligned along a first axis;
a plurality of peripheral wheel assemblies, each having:
a wheel member centrally aligned along a second axis, the second axis substantially orthogonal to the first axis, and
a connecting gear having a distal end for engaging the first and second gears and a proximal end for engaging the wheel member, the distal end and the proximal end defining a radial axis, the radial axis substantially parallel to a common radius of the left and right gears and substantially orthogonal to the first axis and the second axis; and
a rotary device for rotating the first gear about the first axis at a first angular velocity and for rotating the second gear about the first axis at a second angular velocity,
whereby the connecting gear of each peripheral wheel assembly is configured to rotate its respective wheel member about the respective second axis when the first angular velocity is different from the second angular velocity.
2. The omni traction wheel of claim 1, wherein the first and second gears defines a cylindrical space therebetween, the cylindrical space having a circumferential region, and wherein the connecting gear of each peripheral wheel assembly is configured to revolve along the circumferential region at a common angular velocity of the first angular velocity and the second angular velocity.

3. The omni traction wheel of claim 1, wherein the rotary device comprises a first motor coupled to the first gear for rotating the first gear and a second motor coupled to the second gear for rotating the second gear, such that the left and right gears are independently rotated.

4. The omni traction wheel of claim 1, wherein the first and second gears are substantially parallel to a plane positioned in the middle of the first and second gears, and wherein the wheel member of each peripheral wheel assembly is substantially symmetrical along the plane.

5. The omni traction wheel of claim 1, further comprising a spacing member coupled between the first and second gears, the spacing member configured to maintain a substantially constant distance between the first and second gears.

6. The omni traction wheel of claim 5, wherein the spacing member has
a first disc operatively coupled to the first gear,
a second disc operatively coupled to the second gear, and
an axle coupled between the first and second discs, such that the first disc, the second disc, and the axle are configured to remain angularly stationary while the first and second gears are rotated by the rotary device.

7. The omni traction wheel of claim 6, wherein each peripheral assembly has a brace member for operatively connecting the respective wheel member to the first or second disc of the spacing member.

8. The omni traction wheel of claim 6, wherein the connecting gear of each peripheral assembly has a radial axle for connecting the proximal and distal ends of the connecting gear, such that the radial axle is substantially orthogonal to the central axle of the spacing member.

9. The omni traction wheel of claim 1, wherein the connecting gear of each peripheral wheel assembly is configured to rotate clockwise about its radial axis when the first angular velocity is substantially greater than the second angular velocity and to rotate counterclockwise about its radial axis when the first angular velocity is substantially lesser than the second angular velocity.

10. The omni traction wheel of claim 1, wherein the wheel member of each peripheral wheel assembly has a first wheel, a second wheel, and a wheel axle centrally coupled between the first and second wheels, the first wheel having a receiving gear for engaging the proximal end of its connecting gear.

11. A transportation system adopting an omni traction wheel, comprising:

left and right gears centrally aligned along a first axis, the left and right gears defining a cylindrical space therebetween, the cylindrical space having a circumferential region;

a plurality of peripheral wheel assemblies distributed along the circumferential region of the cylindrical space, each having:

a pair of wheels centrally aligned along a second axis, the second axis substantially orthogonal to the first axis, and

a connecting gear having a distal end for engaging the left and right gears and a proximal end for engaging the pair of wheels, the distal end and the proximal end defining a radial axis, the radial axis substantially parallel to a common radius of the left and right gears and substantially orthogonal to the first axis and the second axis; and

a rotary device for rotating the left gear about the first axis at a left angular velocity and for rotating the right gear about the first axis at a right angular velocity,

whereby the connecting gear of each peripheral wheel assembly is configured to rotate its respective pair of wheels about the respective second axis at a lateral angular velocity defined by a differential angular velocity between the left angular velocity and the right angular velocity, and

whereby the connecting gear of each peripheral wheel assembly is configured to revolve along the circumferential region at a common angular velocity of the left angular velocity and the right angular velocity.

12. The omni traction wheel system of claim 11, wherein the rotary device comprises a left motor coupled to the left gear for rotating the left gear and a right motor coupled to the right gear for rotating the right gear, such that the left and right gears are independently driven.

13. The transportation system of claim 11, further comprising a spacing member coupled between the left and right gears, the spacing member configured to maintain a substantially constant distance between the left and right gears, the spacing member having:

a left disc operatively coupled to the left gear,

a right disc operatively coupled to the right gear, and
an axle coupled between the left and right discs, such that the left disc, the right disc, and the axle are configured to remain angularly stationary while the left and right gears are rotated by the rotary device.

14. The omni traction wheel system of claim 13, wherein each peripheral assembly has a brace member for operatively connecting the respective wheel member to the left or right disc of the spacing member.

15. The transportation system of claim 11, wherein the pair of wheels of each peripheral wheel assembly has a first wheel, a second wheel, and a wheel axle centrally coupled between the first and second wheels, the first wheel having a receiving gear for engaging the proximal end of the respective connecting gear.

16. A method for operating an omni traction wheel, comprising the steps of:
engaging a plurality of peripheral wheels to first and second gears via a plurality of connection gears;
rotating the first gear at a first angular velocity; and
rotating the second gear at a second angular velocity,
wherein the omni traction wheel travels laterally when the first angular velocity is different from the second angular velocity such that each connecting gear is configured to rotate the respective peripheral wheel.

17. The method of claim 16, wherein the omni traction wheel travels longitudinally when the first and second angular velocities are in a same direction such that each

connecting gear, along with the respective peripheral wheel, is configured to revolve around a circular plate positioned between the first and second gears and substantially parallel to the first and second gears.

18. The method of claim 16, wherein the omni traction wheel travels diagonally when the first angular velocity is different from the second angular velocity and when the first and second angular velocities are in a same direction.

19. The method of claim 16, wherein the omni traction wheel remains laterally stationary when the first angular velocity substantially equals the second angular velocity.

20. The method of claim 16, wherein the omni traction wheel remains longitudinally stationary when the sum of the first and second angular velocities is substantially zero.

21. An omni traction wheel, comprising:

first and second plates centrally aligned along a first axis;

a plurality of peripheral wheel assemblies, each having:

a wheel member centrally aligned along a second axis, the second axis substantially orthogonal to the first axis, and

a connecting member having a distal end for engaging the first and second plates and a proximal end for engaging the wheel member, the distal end and the proximal end defining a radial axis, the radial axis substantially parallel to a common radius of the left and right plates and substantially orthogonal to the first axis and the second axis; and

a rotary device for rotating the first plate about the first axis at a first angular velocity and for rotating the second plate about the first axis at a second angular velocity,

whereby the connecting member of each peripheral wheel assembly is configured to rotate its respective wheel member about the respective second axis when the first angular velocity is different from the second angular velocity.

22. The omni traction wheel of claim 21, wherein the first and second plate each has a frictional surface for engaging the distal end of the connecting member of each peripheral wheel assembly.

23. The omni traction wheel of claim 21, wherein the wheel member of each peripheral wheel assembly has a frictional surface for engaging the proximal end of the respective connecting member.

1/17

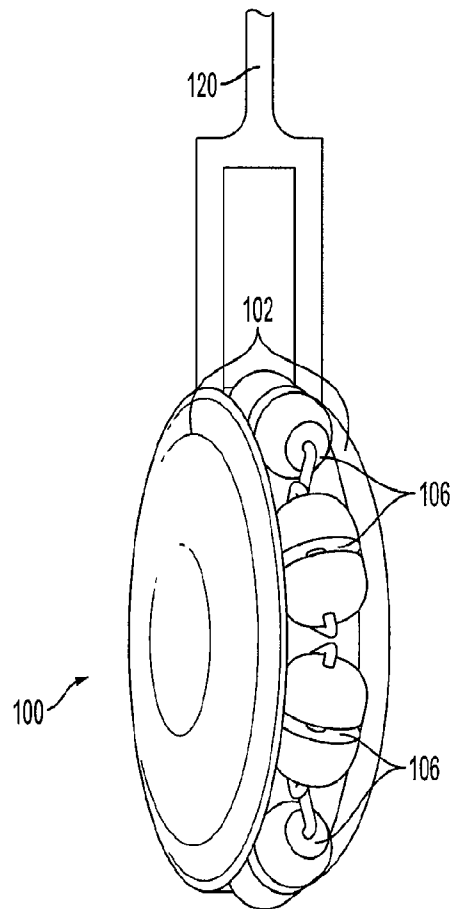
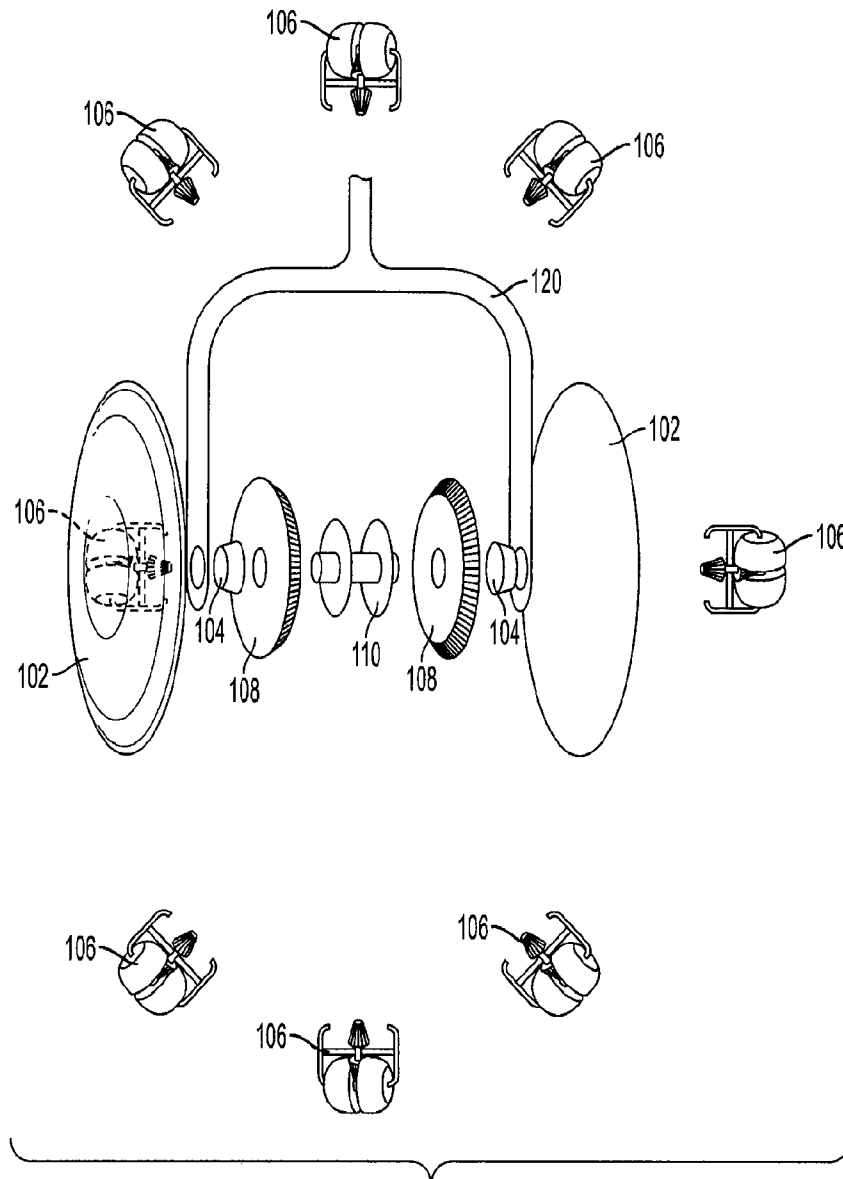


FIG. 1A



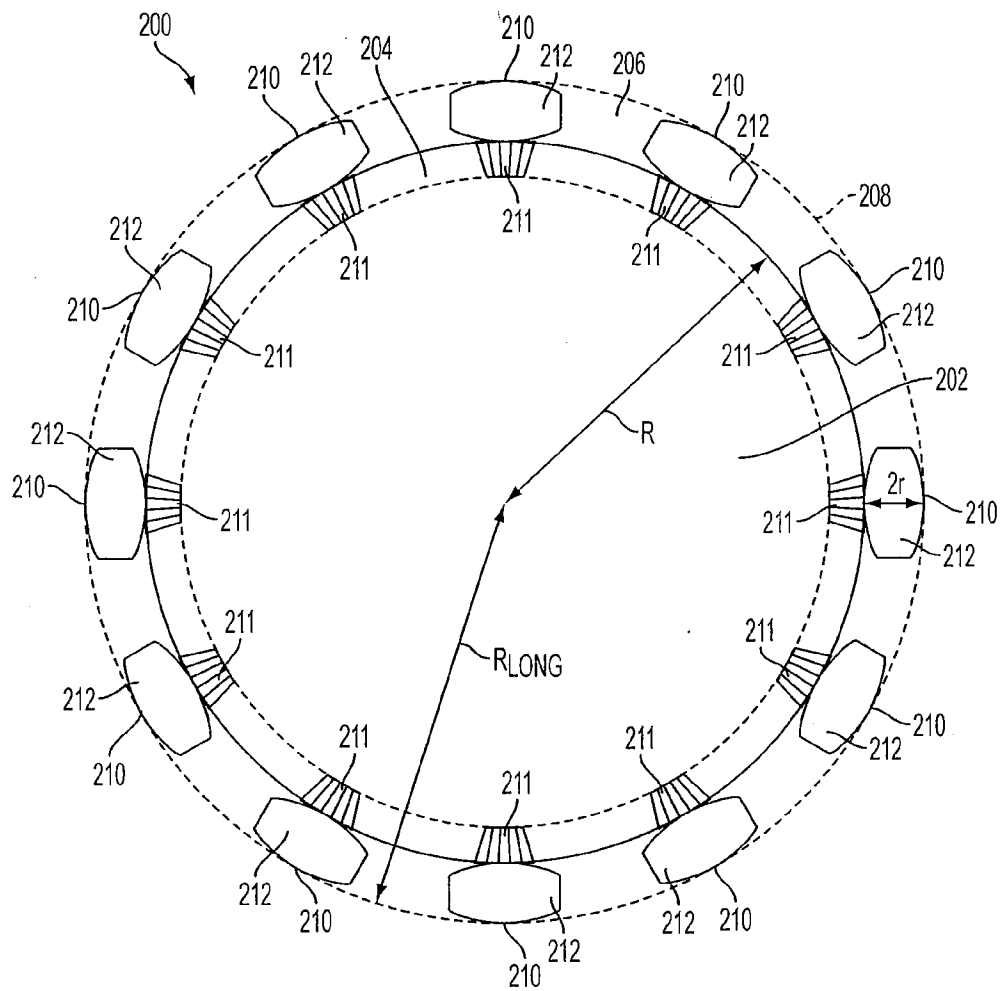


FIG. 2

4/17

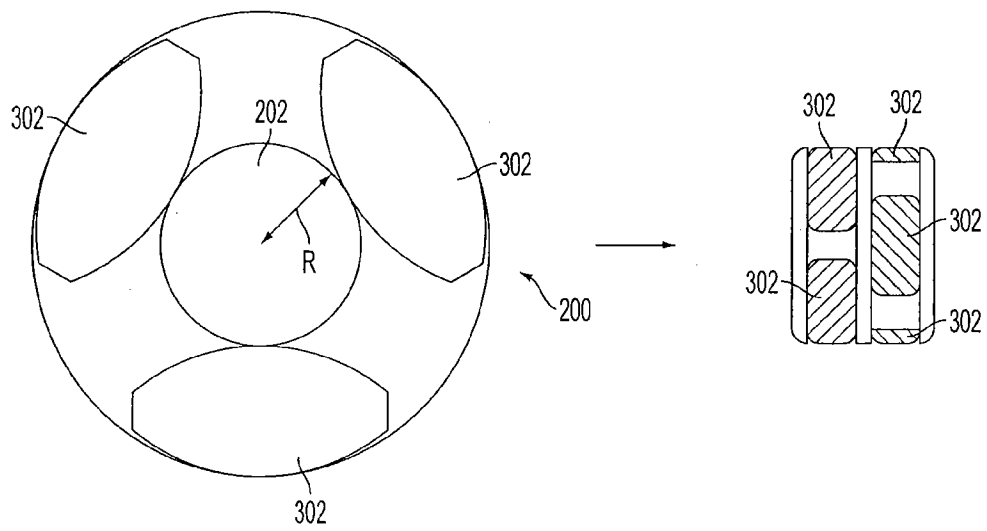


FIG. 3A

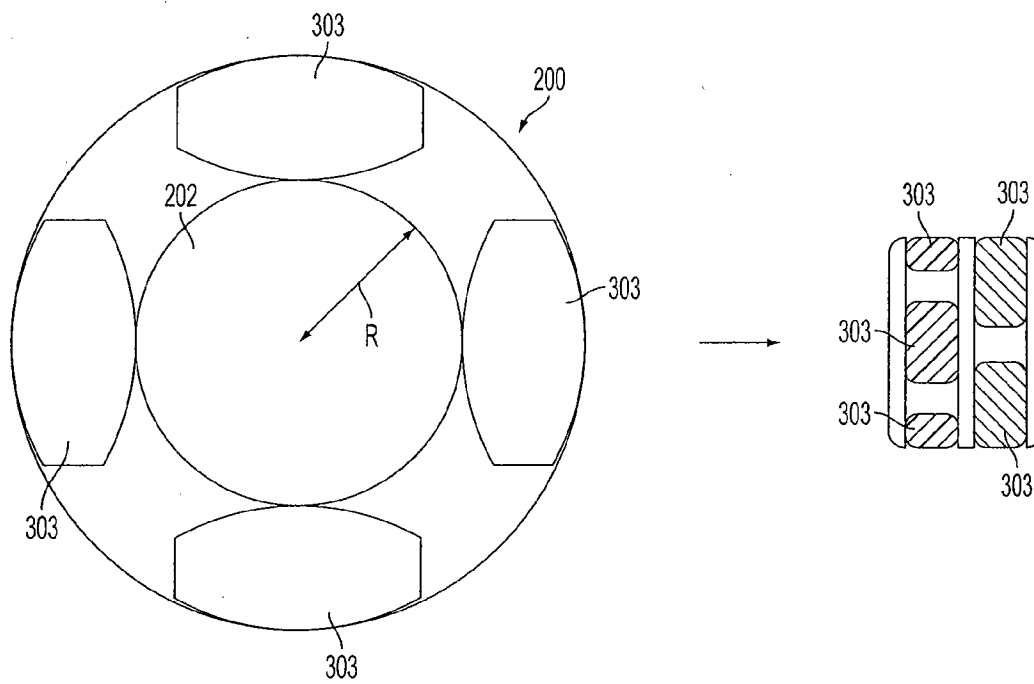


FIG. 3B

5/17

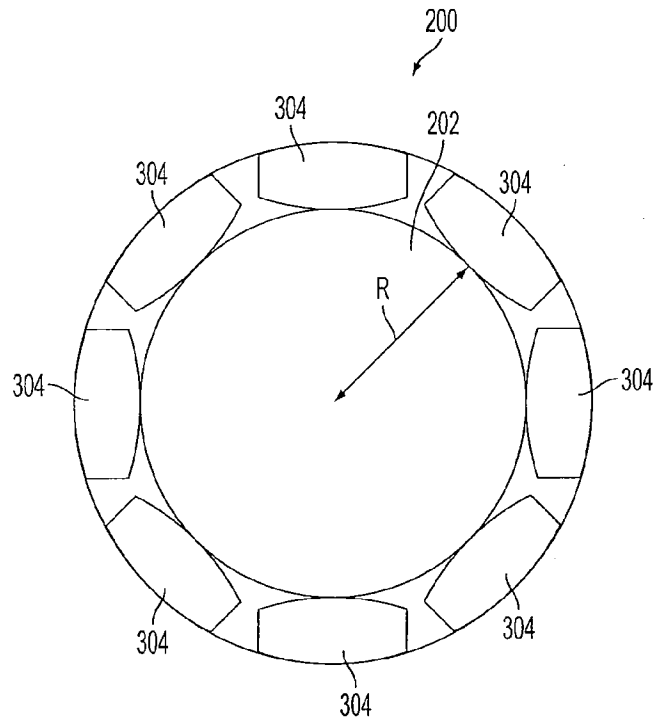


FIG. 3C

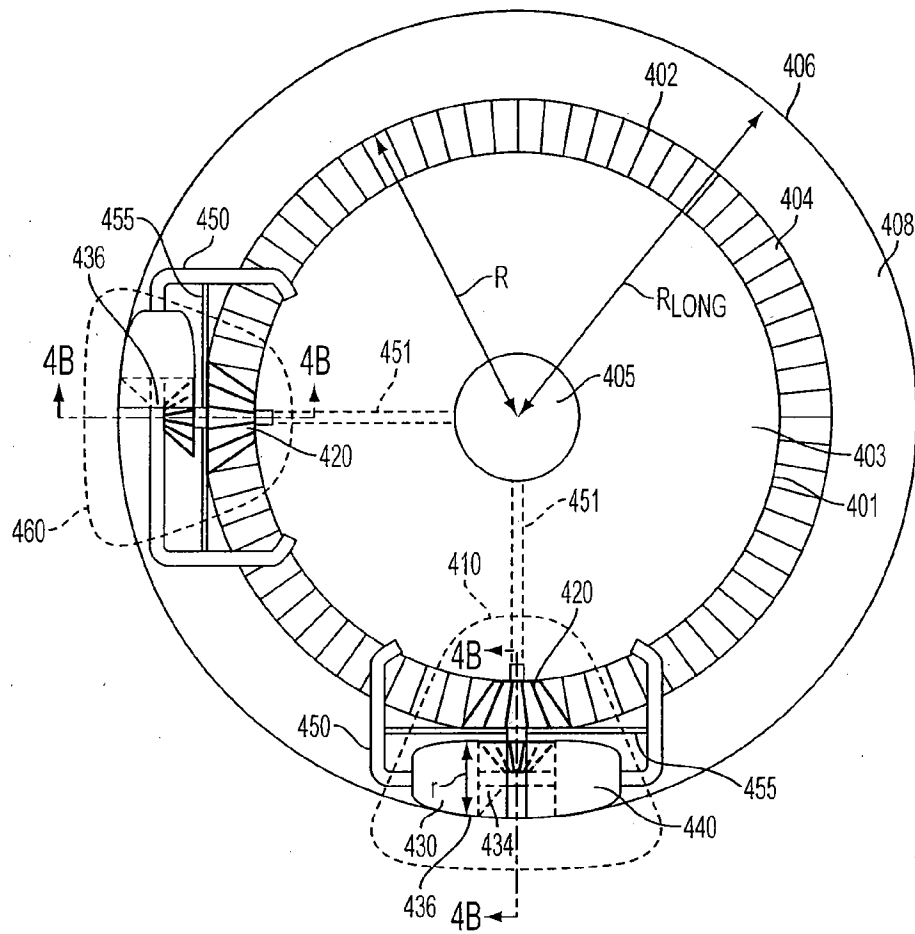


FIG. 4A

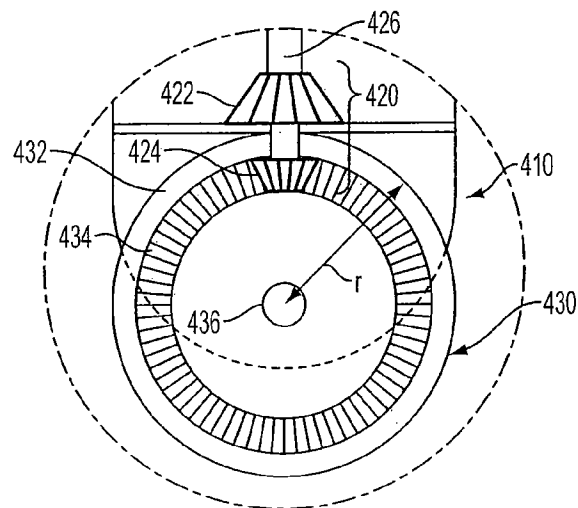


FIG. 4B



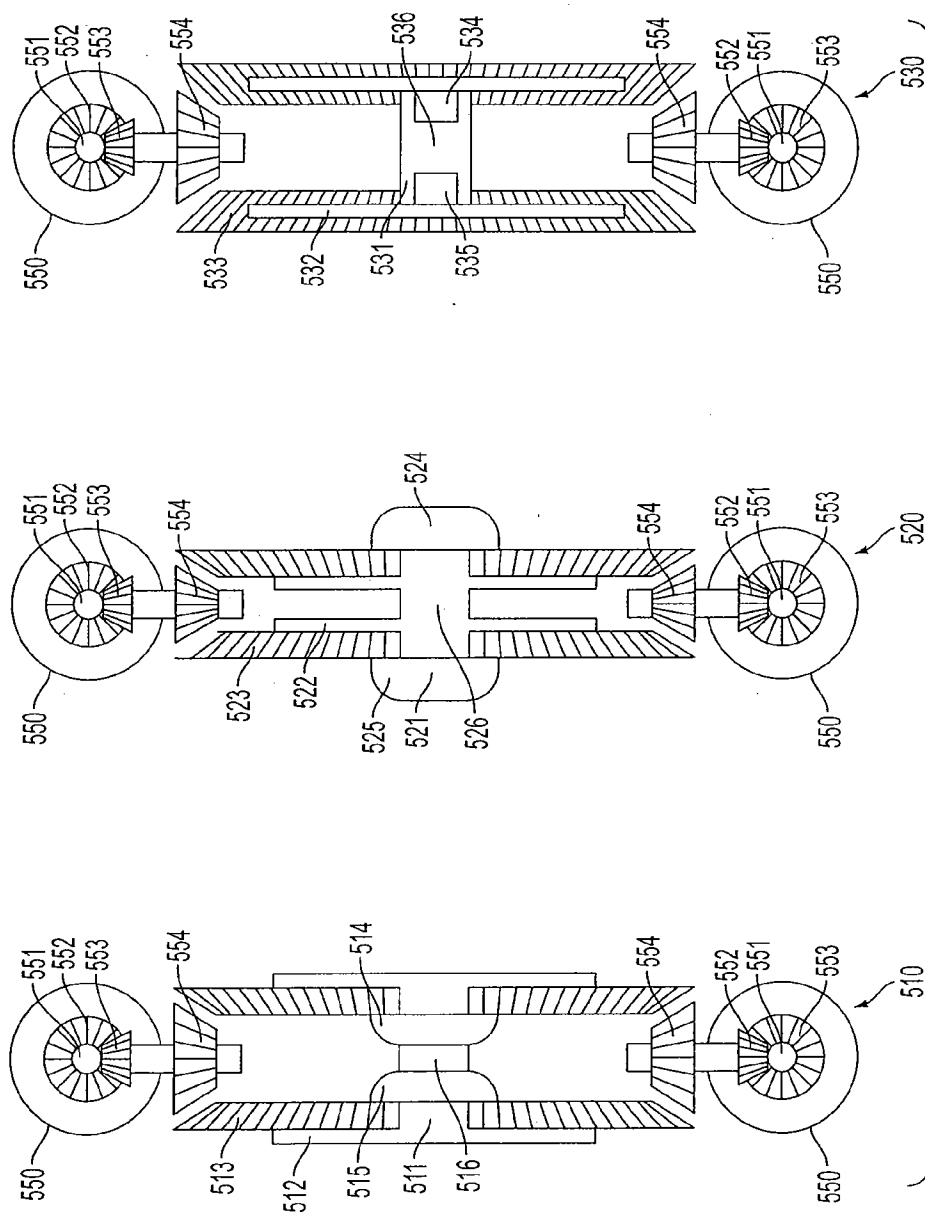


FIG. 5

8/17

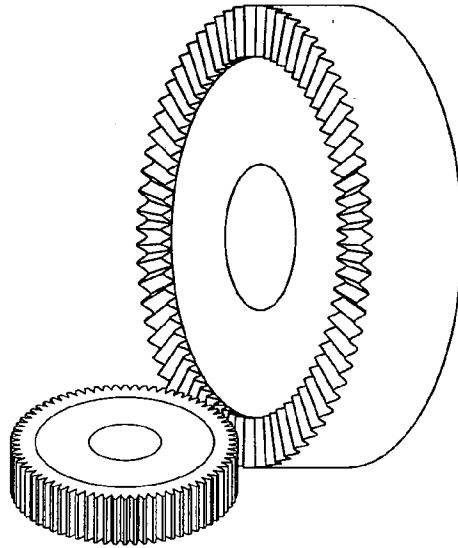

EXTERNAL GEARS

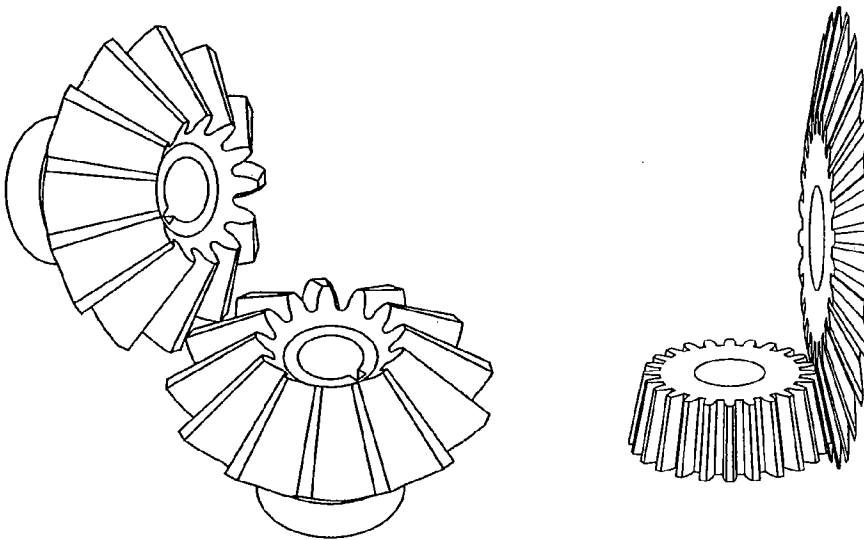

BEVEL GEARS






FIG. 6


9/17

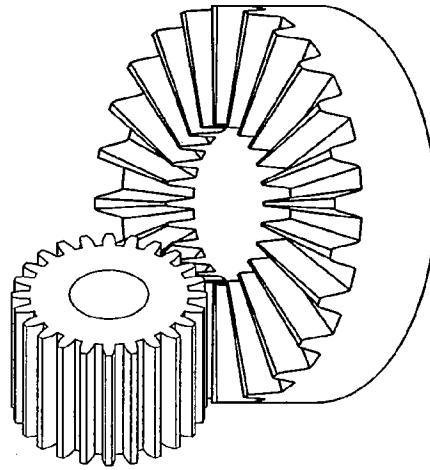

SPUR GEARS

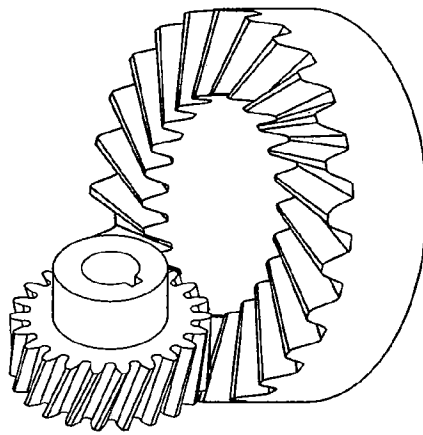

HELICAL GEARS

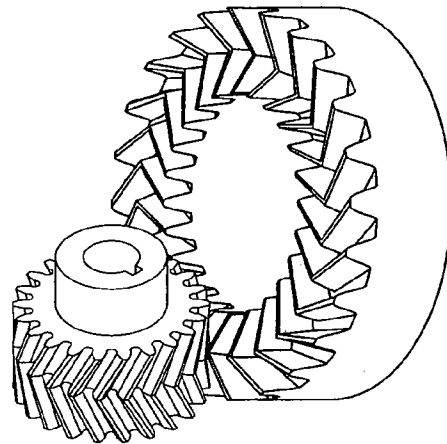

DOUBLE HELICAL GEARS

FIG. 7

10/17

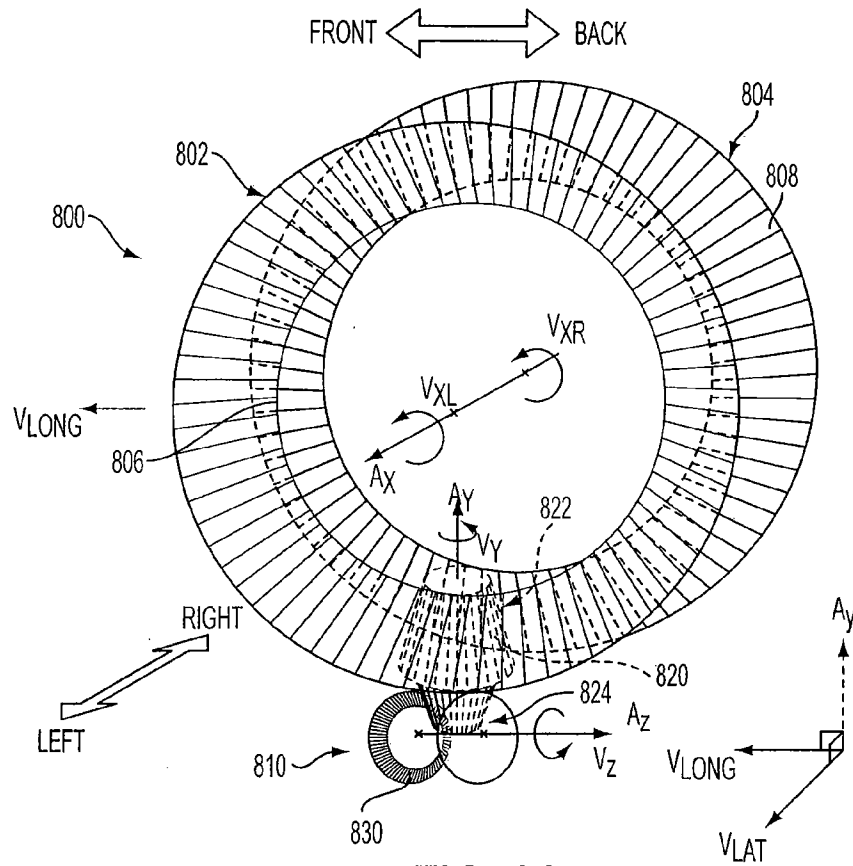


FIG. 8A

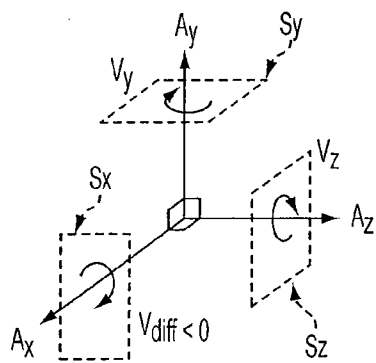


FIG. 8B

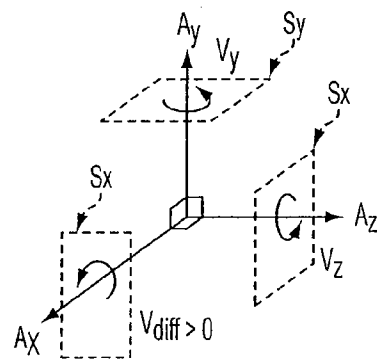


FIG. 8C

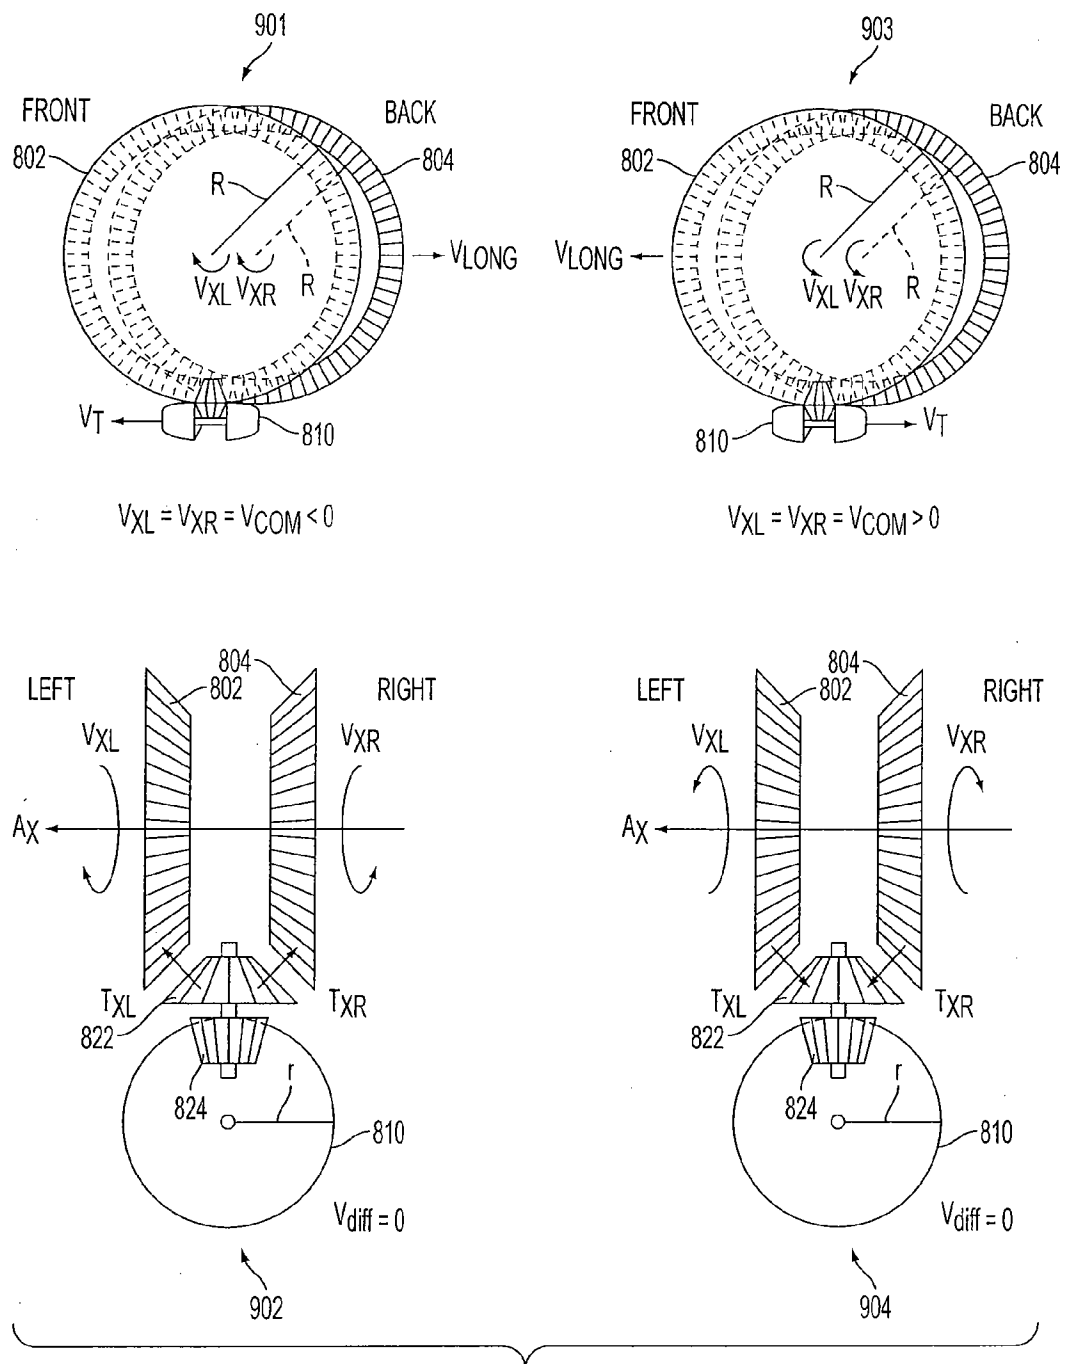


FIG. 9

12/17

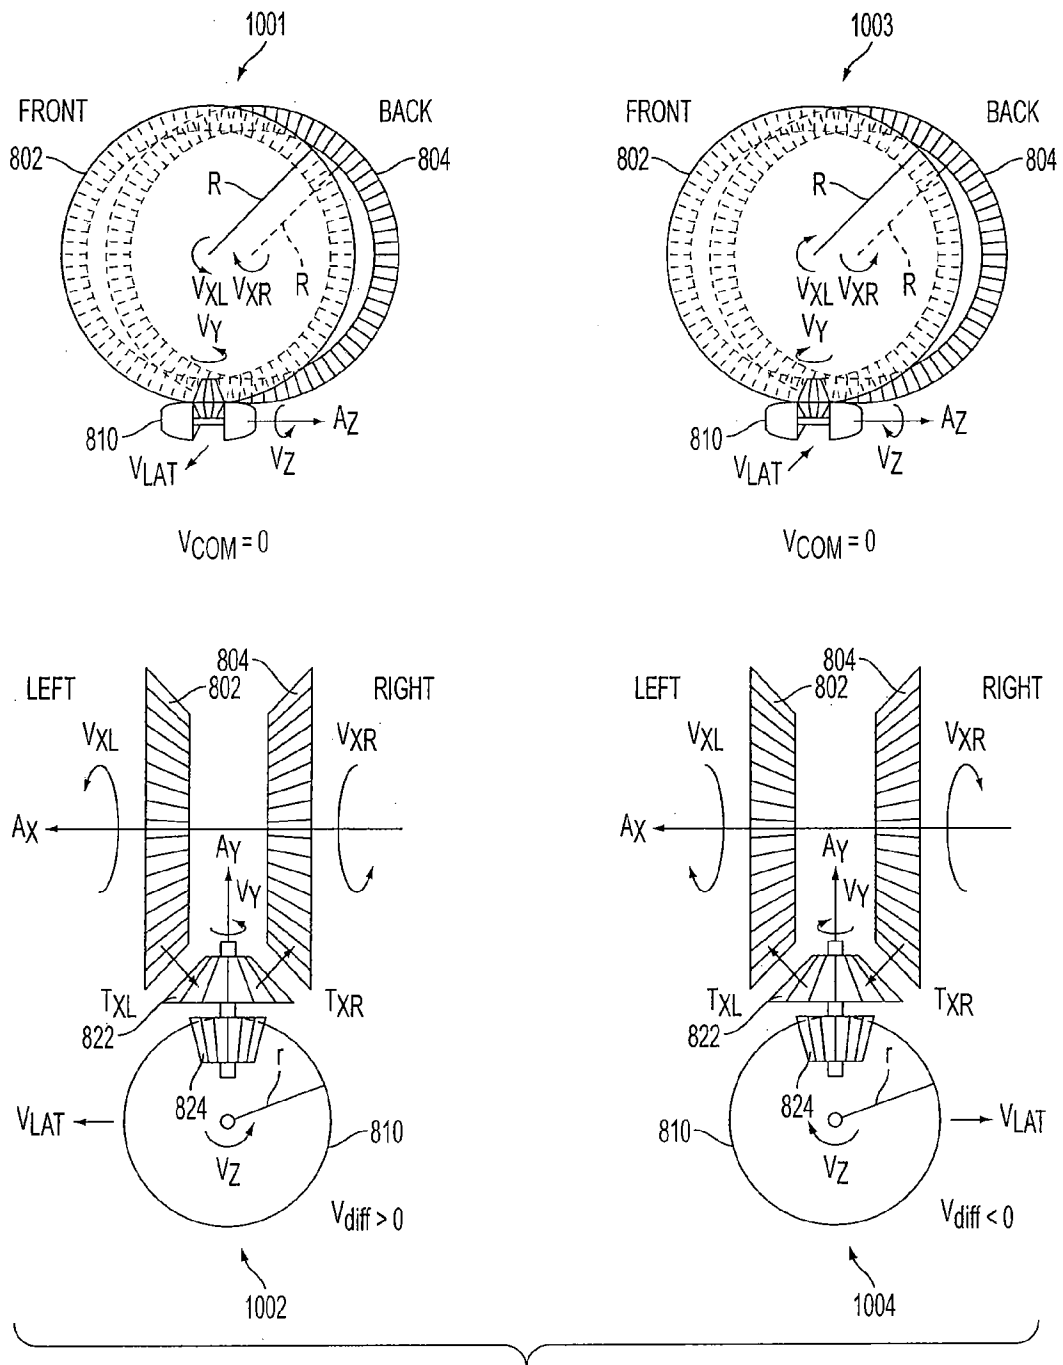


FIG. 10

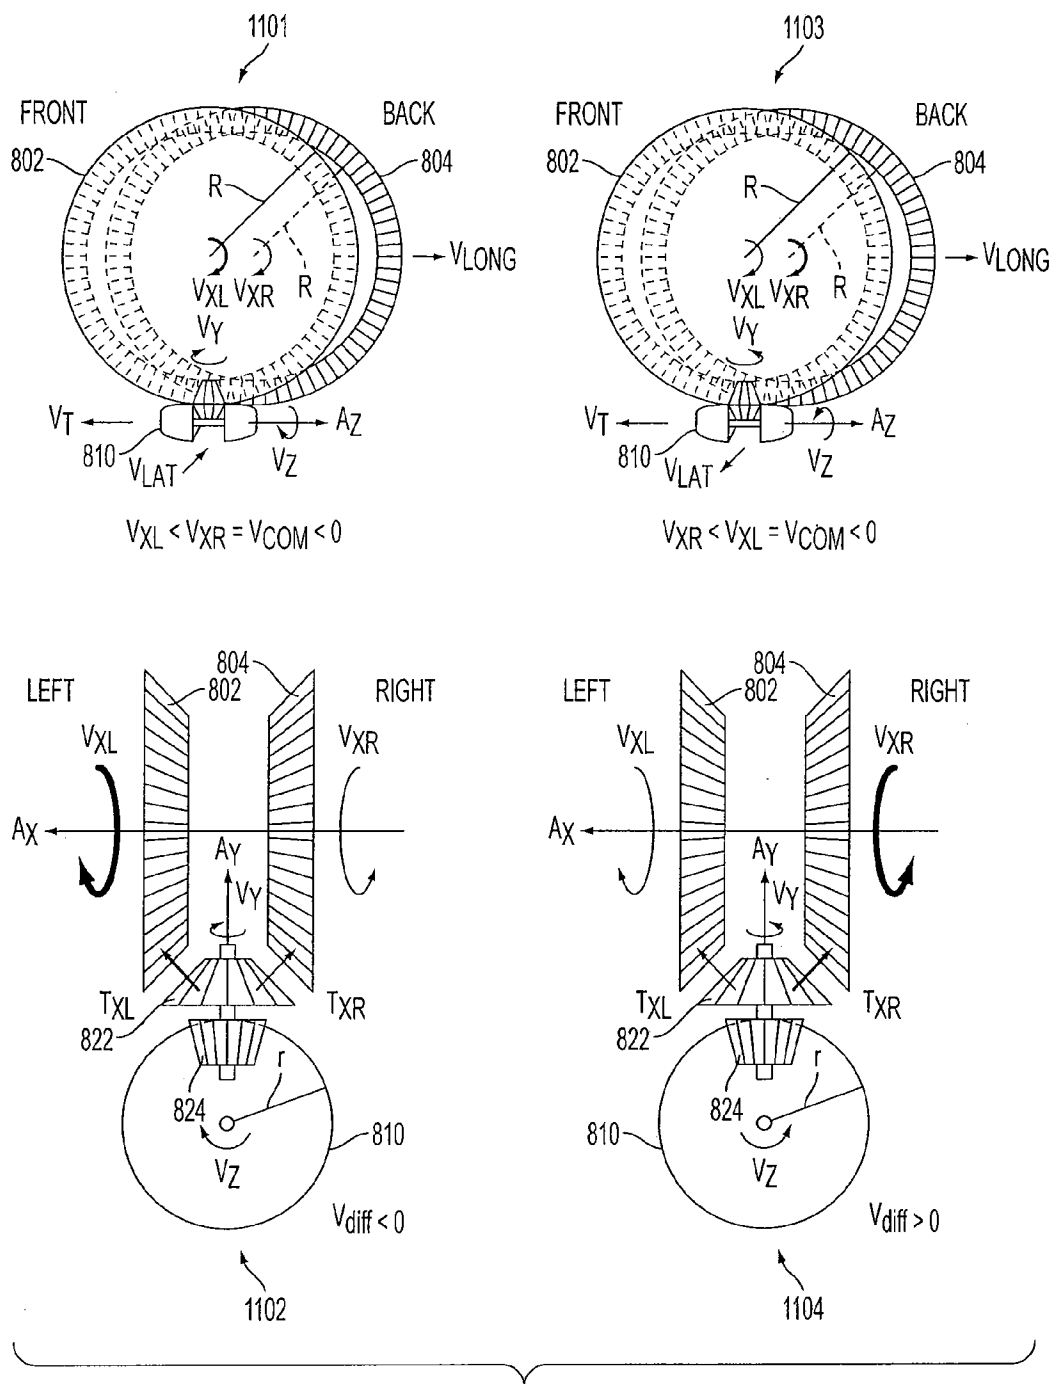


FIG. 11

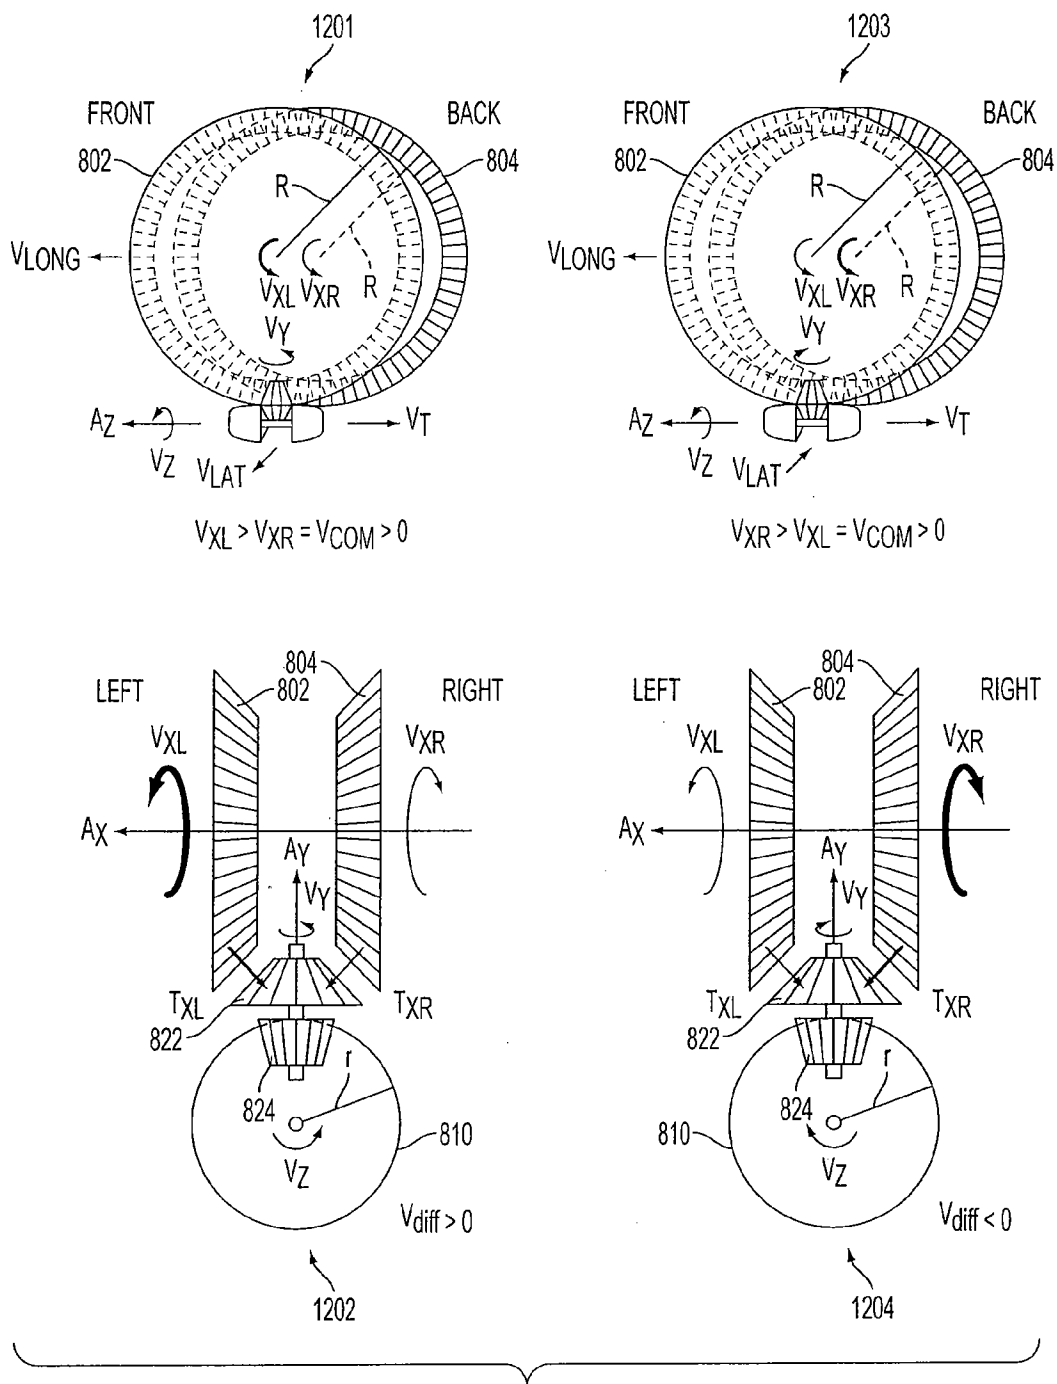


FIG. 12

15/17

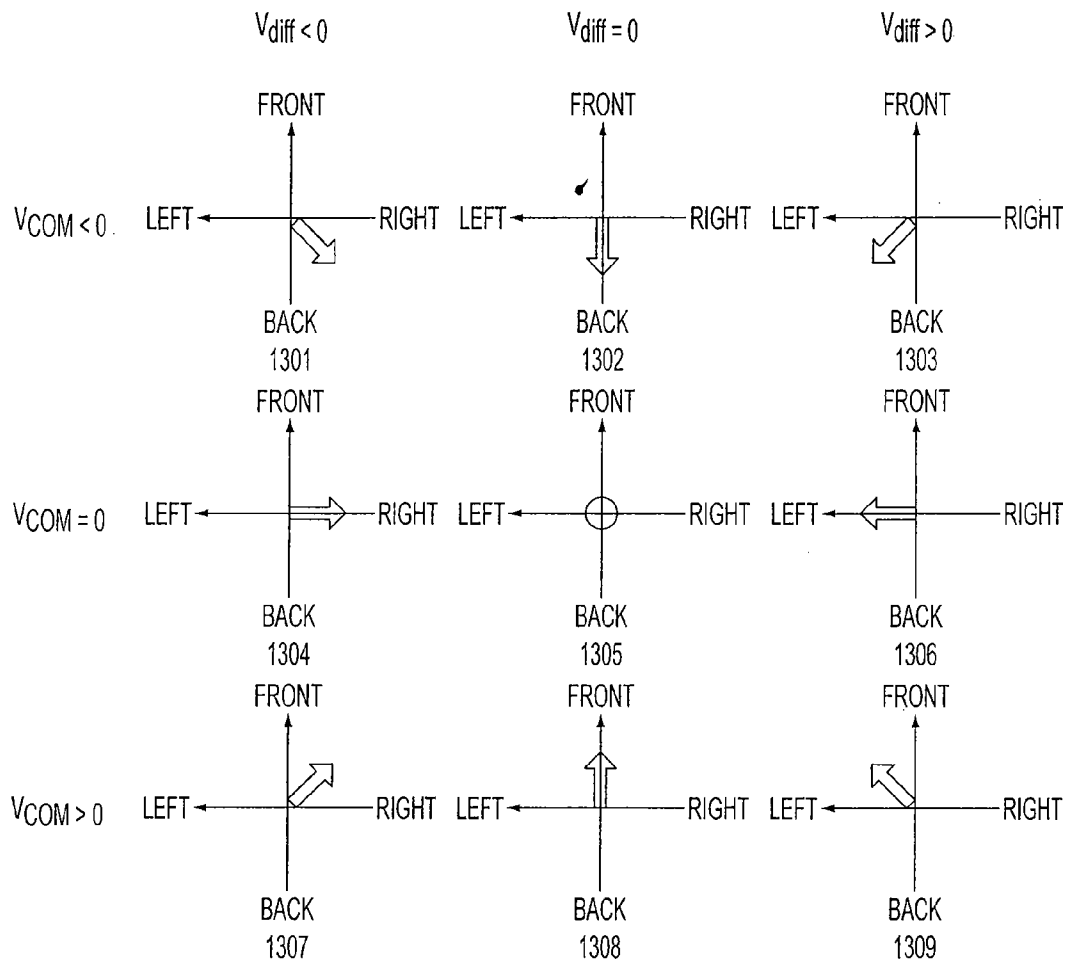


FIG. 13

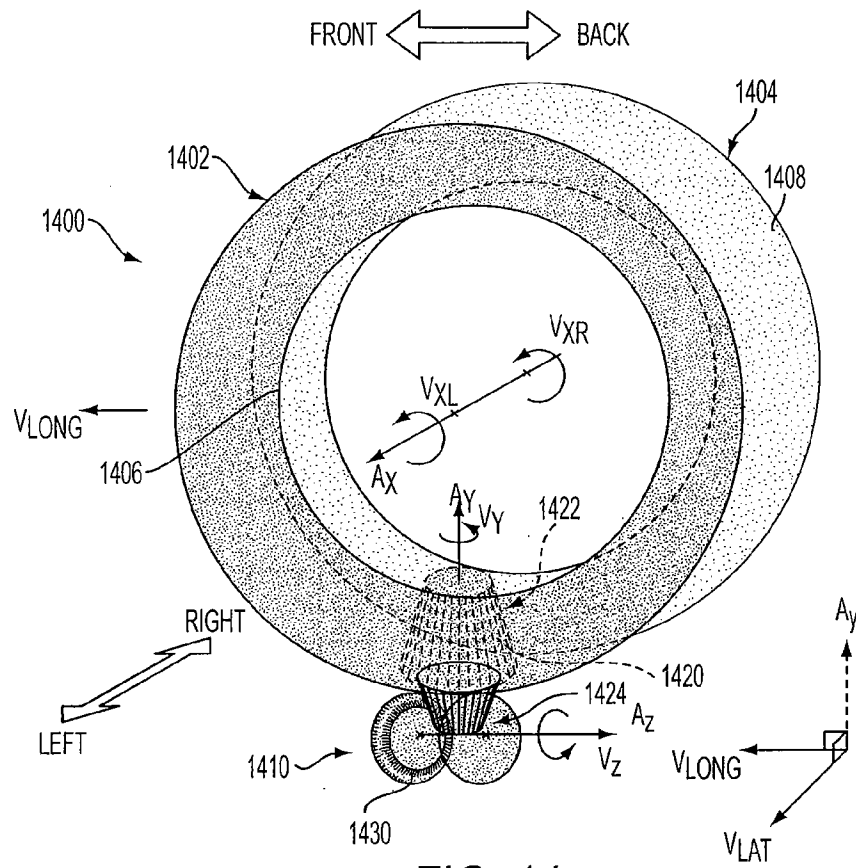


FIG. 14

17/17

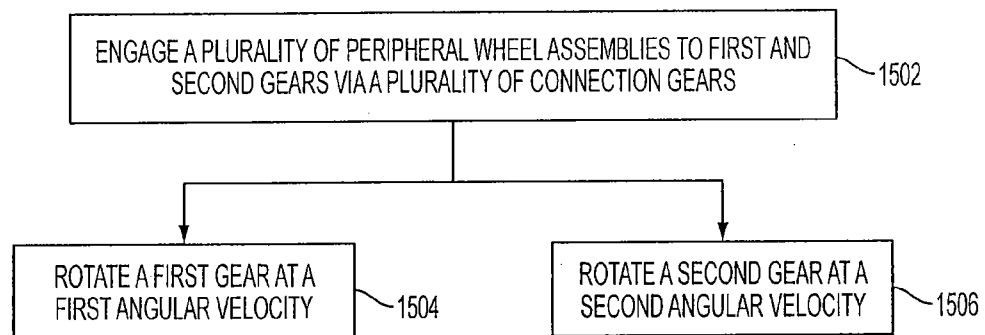


FIG. 15