



(51) International Patent Classification:

H04B 7/0408 (2017.01) *H04B 7/06* (2006.01)

(21) International Application Number:

PCT/US2017/049528

(22) International Filing Date:

31 August 2017 (31.08.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/260,890 09 September 2016 (09.09.2016) US


(71) Applicant: **ALCATEL-LUCENT USA INC.** [US/US];
600-700 Mountain Avenue, Murray Hill, NJ 07974-0636
(US).(72) Inventors: **MCLELLAN, Hubert**; 600-700 Mountain Avenue,
Murray Hill, NJ 07974-0636 (US). **CHIZHIK, Dmitry**;
791 Holmdel-Keyport Road, Holmdel, NJ 07733-1661
(US). **SAMARDZIJA, Dragan**; 791 Holmdel-Keyport
Road, Holmdel, NJ 07733-1661 (US).(74) Agent: **DESAI, Niraj, A.**; Alcatel-Lucent USA Inc.,
Attention: Docket Administrator - Room 3B-212F, 600-700
Mountain Avenue, Murray Hill, New Jersey 07974-0636
(US).(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHODS AND SYSTEMS FOR BEAM SEARCHING

FIG. 3A

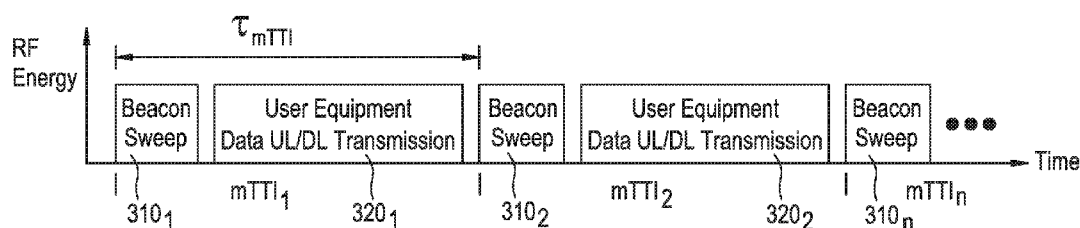

(57) Abstract: In one example embodiment, a method includes obtaining a duration of a first network element scanning period of a first network element for a plurality of first beacons, the plurality of first beacons associated with the different direct energy beams, scanning for the plurality of first beacons over a second network element scanning period of a second network element, the second network element scanning period including a number of first network element scanning periods, the first network element scanning period being part of the number of the first network element scanning periods, receiving at least one of the plurality of first beacons during the number of the first network element scanning periods, determining a preferred first beacon based on the received at least one of the plurality of first beacons and transmitting an indication of the preferred first beacon to a base station.



METHODS AND SYSTEMS FOR BEAM SEARCHING

BACKGROUND

5 Wireless systems are moving to higher frequencies in search of more useable bandwidth. There is 2 GHz of spectrum available for communication use at 60 GHz. This is 100 times the carrier bandwidth offered in LTE systems. Due to the fall-off of received power with increasing frequency of a single antenna element (Friis's Law), millimeter (mm)-Wave communication links
10 use directional antenna gain at both a transmitter and a receiver to achieve a sufficient operational signal-to-noise ratio (SNR). Antenna gain is achieved by arrays of antenna elements that operate in symphony to create beams of radio-frequency (RF) energy radiating in a particular direction or beam. These beams are formed by coordinating the
15 relative phases of each individual antenna element so that the RF energy constructively interferes in the desired beam direction and destructively interferes elsewhere. The result is a narrow beam of RF energy in a known direction depending on the antenna elements' geometry and phase relationships. The array of antenna elements forms a phased array antenna.
20

SUMMARY

Example embodiments are directed to methods and systems for beam searching.

25 At least one example embodiment provides a method searching for different direct energy beams, the method including obtaining a duration of a first network element scanning period of a first network element for a plurality of first beacons, the plurality of first beacons associated with the different direct energy beams, scanning for the plurality of first beacons over a second
30 network element scanning period of a second network element, the second network element scanning period including a number of first network element scanning periods, the first network element scanning period being part of the number of the first network element scanning periods, receiving at least one of the plurality of first beacons during the number of the first

network element scanning periods, determining a preferred first beacon based on the received at least one of the plurality of first beacons, transmitting an indication of the preferred first beacon to the first network element and communicating with the first network element during a
5 scheduled portion of a first data communication period using the beam associated with the preferred first beacon, a length of the first network element scanning period and a length of the first data communication period forming a length of a transmission time interval.

In an example embodiment, the first network element is a base station and
10 the second network element is a user equipment (UE).

In an example embodiment, the scanning scans for the plurality of first beacons over a plurality of receive beam directions.

In an example embodiment, the scanning includes allocating the plurality of receive beam directions to the number of base station scanning periods,
15 respectively, the allocated receive beam direction performing the scanning for the respective base station scanning period.

In an example embodiment, the transmitting transmits the indication on a first frequency band channel, the first frequency band channel associated with a first frequency band, the direct energy beams associated with a
20 second frequency band, and the first frequency band includes frequencies different than frequencies of the second frequency band.

In an example embodiment, the method further includes monitoring the plurality of first beacons after the communicating.

In an example embodiment, the method further includes receiving the
25 preferred beacon with scheduling information for the UE, the receiving the first beacon with the scheduling information for the UE occurring in a second base station scanning period, the second base station scanning period occurring after the number of base station scanning periods, the communicating being based on the scheduling information.

30 In an example embodiment, each of the first beacons includes an identification of the associated beam.

At least one example embodiment provides a first network element including a processor configured to obtain a duration of a second network element scanning period of a second network element for a plurality of first beacons,

the plurality of first beacons associated with different direct energy beams and a transceiver configured to scan for the plurality of first beacons over a first network element scanning period of the first network element, the first network element scanning period including a number of second network element scanning periods, the second network element scanning period being part of the number of the scanning network element scanning periods, receive at least one of the plurality of first beacons during the number of the second network element scanning periods, wherein the processor is configured to determine a preferred first beacon based on the received at least one of the plurality of first beacons, the transceiver is configured to transmit an indication of the preferred first beacon to the second network element, and the processor is configured to communicate with the second network element during a scheduled portion of a first data communication period using the beam associated with the preferred first beacon, a length of the second network element scanning period and a length of the first data communication period forming a length of a transmission time interval.

In an example embodiment, the first network element is a user equipment (UE) and the second network element is a base station.

In an example embodiment, the transceiver is configured to scan for the plurality of first beacons over a plurality of receive beam directions.

In an example embodiment, the processor is configured to allocate the plurality of receive beam directions to the number of base station scanning periods, respectively, the allocated receive beam direction performing the scanning for the respective base station scanning period.

In an example embodiment, the transceiver is configured to transmit the indication on a first frequency band channel, the first frequency band channel associated with a first frequency band, the direct energy beams associated with a second frequency band, and the first frequency band includes frequencies different than frequencies of the second frequency band.

In an example embodiment, the processor is configured to monitor the plurality of first beacons after the communicating.

In an example embodiment, the transceiver is configured to receive the preferred beacon with scheduling information for the UE, the receiving the

first beacon with the scheduling information for the UE occurring in a second base station scanning period, the second base station scanning period occurring after the number of base station scanning periods, the communicating being based on the scheduling information.

- 5 In an example embodiment, each of the first beacons includes an identification of the associated beam.

BRIEF DESCRIPTION OF THE DRAWINGS

- 10 Example embodiments will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings. FIGS. 1-9 represent non-limiting, example embodiments as described herein.

FIG. 1 illustrates a communication system, according to an example
15 embodiment;

FIG. 2A illustrates an example embodiment of a plurality of beams generated by a base station;

FIG. 2B illustrates an example embodiment of a plurality of beams generated by a user equipment (UE);

- 20 FIG. 3A illustrates a mmWave Transmission Time Interval (mTTI) used by a base station according to an example embodiment;

FIG. 3B illustrates an example embodiment of a scanning period according to an example embodiment;

FIG. 3C illustrates an example embodiment of a data communication period;

- 25 FIGS. 4A-4B illustrate an alternative example embodiment of a beam sweep;

FIG. 5 illustrates a major cycle of a beam sweep according to an example embodiment;

FIG. 6 illustrates a method of beam searching according to an example embodiment;

- 30 FIG. 7 illustrates a method of beam searching according to an example embodiment;

FIG. 8 illustrates a base station according to an example embodiment; and

FIG. 9 illustrates a UE according to an example embodiment.

DETAILED DESCRIPTION

Various example embodiments will now be described more fully with reference to the accompanying drawings in which some example
5 embodiments are illustrated.

Accordingly, while example embodiments are capable of various modifications and alternative forms, embodiments thereof are shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that there is no intent to limit example
10 embodiments to the particular forms disclosed, but on the contrary, example embodiments are to cover all modifications, equivalents, and alternatives falling within the scope of the claims. Like numbers refer to like elements throughout the description of the figures.

It will be understood that, although the terms first, second, etc. may be used
15 herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another. For example, a first element could be termed a second element, and, similarly, a second element could be termed a first element, without departing from the scope of example embodiments. As used herein, the term
20 “and/or” includes any and all combinations of one or more of the associated listed items.

It will be understood that when an element is referred to as being “connected” or “coupled” to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In
25 contrast, when an element is referred to as being “directly connected” or “directly coupled” to another element, there are no intervening elements present. Other words used to describe the relationship between elements should be interpreted in a like fashion (*e.g.*, “between” versus “directly between,” “adjacent” versus “directly adjacent,” etc.).

30 The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of example embodiments. As used herein, the singular forms “a,” “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms

“comprises,” “comprising,” “includes” and/or “including,” when used herein, specify the presence of stated features, integers, steps, operations, elements and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components and/or groups thereof.

It should also be noted that in some alternative implementations, the functions/acts noted may occur out of the order noted in the figures. For example, two figures shown in succession may in fact be executed substantially concurrently or may sometimes be executed in the reverse order, depending upon the functionality/acts involved.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which example embodiments belong. It will be further understood that terms, e.g., those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

Portions of example embodiments and corresponding detailed description are presented in terms of software, or algorithms and symbolic representations of operation on data bits within a computer memory. These descriptions and representations are the ones by which those of ordinary skill in the art effectively convey the substance of their work to others of ordinary skill in the art. An algorithm, as the term is used here, and as it is used generally, is conceived to be a self-consistent sequence of steps leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of optical, electrical, or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

In the following description, illustrative embodiments will be described with reference to acts and symbolic representations of operations (e.g., in the form of flowcharts) that may be implemented as program modules or

functional processes including routines, programs, objects, components, data structures, etc., that perform particular tasks or implement particular abstract data types and may be implemented using existing hardware at existing network elements or control nodes. Such existing hardware may
5 include one or more Central Processing Units (CPUs), digital signal processors (DSPs), application-specific-integrated-circuits, field programmable gate arrays (FPGAs) computers or the like.

Unless specifically stated otherwise, or as is apparent from the discussion, terms such as “processing” or “computing” or “calculating” or “determining”
10 or “displaying” or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical, electronic quantities within the computer system’s registers and memories into other data similarly represented as physical quantities within the computer system memories or
15 registers or other such information storage, transmission or display devices. Note also that the software implemented aspects of example embodiments are typically encoded on some form of tangible (or recording) storage medium. The tangible storage medium may be magnetic (e.g., a floppy disk or a hard drive) or optical (e.g., a compact disk read only memory, or “CD
20 ROM”), and may be read only or random access. Example embodiments are not limited by these aspects of any given implementation.

FIG. 1 illustrates a communication system, according to an example embodiment.

FIG. 1 illustrates a communication system 100 where an access terminal
25 (e.g., a UE) 105 communicates with a first base station 120 that includes circuitry for a first radio access network (RAT) 110 (e.g., the base station 120 uses LTE technology or some other RAT to communicate) and a second base station 140 that includes circuitry for a second RAT 130 (e.g., the base station 140 uses mmWave technology or some other direct energy beam
30 network to communicate). A direct energy beam is a direct electromagnetic energy beam that is focused (i.e., a focused beam and is not broadcast) may encompass a broad range of frequencies such as mmWave, centimeter wave, microwave and infrared. The UE 105 includes circuitry to communicate with the first base station 120 over a communication link 150 and circuitry to

communicate with the second base station 140 over a communication link 160. For the sake of simplicity, it should be understood that the communication links 150 and 160 are used to illustrate signaling and data communications for their respective RAT technologies.

5 The first base station 120 communicates with other components of a first RAT network 110 via a link 170 and the second base station 140 communicates with other components of the second RAT network 130 via a communication link 180. The first base station 120 and the second base station 140 may communicate with each other over a link 190 (e.g., X2
10 interface) or through a link 195 (e.g., S2 interface).

Because the UE 105 can access both the first RAT network 110 and the second RAT network 130, the capability of one network may be used to supplement the operation of the other network to improve performance. In an example implementation, an LTE network and a mmWave network may
15 be connected by an X2 interface.

FIG. 2A illustrates an example embodiment of a plurality of beams generated by the second base station 140. The second base station 140 uses a phased array antenna for each beam sweep. In the example shown in FIG. 2A, the second base station 140 includes two phased array antennas to generate two
20 90 degree beam sweeps. It should be understood that example embodiments are not limited to the example shown in FIG. 2A. For example, the second base station may generate three 60 degree beam sweeps across 180 degrees. In other example embodiments, the second base station 140 may generate beam sweeps across 360 degrees. While a phased array antenna is
25 described with reference to FIGS. 2A-2B, it should be understood that any antenna that generates a directed radio-frequency (RF) signal may be used. In the example shown in FIG. 2A, the second base station 140 is configured to generate direct energy beams (e.g., mmWave beams) B_{BS1} - B_{BSM} across a 90 degree beam sweep.

30 FIG. 2B illustrates an example embodiment of a plurality of beams generated by the UE 105. The UE 105 uses a phased array antenna for a beam sweep. In the example shown in FIG. 2B, the UE 105 generates a beam sweep having beams B_{UE1} - B_{UEN} .

When RF communication systems operate in a power limited realm, the systems use antenna gain at both transmitter and receiver to achieve a desired signal to noise ratio. Antenna gain is achieved by directing the RF energy in a specific direction, forming a beam. Of all possible transmitter
 5 beam directions and receiver beam directions, one particular combination will provide a better communication channel and signal to noise ratio than the other combinations.

Example embodiments are directed to methods and systems for finding a set of a transmitter beam (e.g., one of B_{BS1} - B_{BSM}) and a receiver beam (e.g., one
 10 of B_{UE1} - B_{UEM}). In the example embodiments described below, a base station may perform time division multiplexing (TDM) of millimeter wave (mmWave) resources.

FIG. 3A illustrates a mmWave Transmission Time Interval (mTTI) used by the second base station 140 to search for a transmitter beam to use for
 15 communicating with the UE 105. As shown in FIG. 3A, each mTTI has a time period of T_{mTTI} and includes a beacon sweep period (scanning period) 310 and a data communication period 320. For example, intervals $mTTI_1$ - $mTTI_n$ include a scanning period 310₁-310_n and a data communication period 320₁-320_n, respectively. Each of the scanning periods 310₁-310_n may
 20 be the same.

As described below, a beam search function and control information of the base station 140 is performed on a beam by beam basis. Combining these two system functions reduces overhead and allows bandwidth to carry user traffic.

25 FIG. 3B illustrates an example embodiment of the scanning period 310. During the scanning period 310, the base station 140 transmits the beacons using the direct energy beams B_{BS1} - B_{BSM} , respectively. In other words, the base station 140 performs periodic sweeps over its number of addressable beams, B_{BS1} - B_{BSM} , by transmitting a defined beacon in each beam direction.
 30 In an example embodiment, a beacon is a regularly occurring signal at a repeating time signal that identifies an available mmWave communication resource. In other embodiments, that beacon may occur at a non-periodic time intervals.

As shown in FIG. 3B, each beacon is of T_B duration and separated by T_{BF} transmission gaps as the RF energy is switched to a different direction to form a new beam. As an example, the transmission gap T_{BF} is zero (e.g., when each antenna element is driven by a separate digital stream). In
5 another example, the transmission gap T_{BF} is the amount of time to switch to transmit another beam.

Each beacon may be one symbol and include at least two components, (1) a waveform that assists detection and user equipment synchronization (acquisition waveform) and (2) information bits. The beacon is in a
10 decodable format known by the UE 105. The information on each beacon identifies the base station 140, base station characteristics (e.g., beacon sweep period, GPS coordinates, hours of operation, etc.), the particular beam (e.g., one of the direct energy beams B_{BS1} - B_{BSM}) the beacon is transmitted on and scheduling information for subsequent transmissions. For example, the
15 beacons may include direct sequence spread spectrum (DSSS) codes that convey the identification of the beam. In other example embodiments, the scheduling information and identification may be transmitted in separate beacons.

After M beacons in the scanning period 310, the base station 140 uses the
20 rest of the interval $mTTI_1$ to send and receive data to various UEs using directional beams particular to those UEs. Referring back to FIG. 3A, the data communication occurs in the data communication periods 320₁-320_n.

In order for a transmitter and receiver beam pair to be formed, a network element performs a beam sweep over all beams while another network
25 element listens on one of its receiving beams. Then in a next beam sweep over all beams of the network element, the another network element listens on another of its receiving beams. Thus, the transmitter of beams operates in a minor cycle, while the receiver operates in a major cycle.

Since both the base station 140 and the UE 105 use beam forming, then the
30 cross product of all beams B_{BS1} - B_{BSM} and B_{UE1} - B_{UEN} is searched. In one example embodiment, the base station 140 sequences through its possible transmit beams B_{BS1} - B_{BSM} and the UE 105 listens. Also the number of

potential beams may be fixed for the base station 140, but may vary depending on capabilities of the UE 105. In an example embodiment, the base station 140 supports more addressable beams than the UE 105 and listening windows may be specified by a different frequency system (e.g.,
5 from the base station 120). The UE 105 listens on one of its beams B_{UE1} - B_{UEN} while the base station 140 cycles through all of its possible transmit beams B_{BS1} - B_{BSM} .

In this example, a minor cycle is the base station 140 looping over all of its addressable beams B_{BS1} - B_{BSM} , while a major cycle is the UE 105 looping over
10 its addressable beams B_{UE1} - B_{UEN} . Combining beacon function with dissemination of scheduling information reduces the overall system overhead required to support user communication.

In FIG. 3B, sweeping through the base station's beams in every mTTI forms the minor cycle of the beam search algorithm.

15 FIG. 3C illustrates an example embodiment of a data communication period. Following the scanning period 310 in the mTTI, the base station 140 schedules data communications in the data communication period 320 of the mTTI. In the example shown in FIG. 3C, the base station schedules uplink and downlink transmissions to/from user equipments UE_1 - UE_3 using
20 the beams corresponding to the preferred beacons, respectively. In the example of FIG. 3, the beams of the preferred beacons for UE_1 - UE_3 are B_{BS3} , B_{BS1} and B_{BSM} , respectively. Each scheduled data communication slot in the data communication period 320 is separated by the time gap T_{BF} .

FIG. 3D illustrates a major cycle of the beam search according to an example
25 embodiment. The major cycle may be performed by the UE 105 when the base station 140 performs the minor cycle.

The major cycle is performed by the UE 105 as it cycles through the beams B_{UE1} - B_{UEN} listening for potential beacons once each UE sweep period, as shown in FIG. 3D. For example, during a first beacon sweep period, the UE
30 listens for beacons on beams B_{BS1} - B_{BSM} from the base station 140 using the beam B_{UE1} . After listening for N UE beacon sweep periods, the UE 105 identifies the preferred beacon of the corresponding beam from the base

station 105 and the receiver beam (one of B_{UE1} - B_{UEN}) combination that generates a best (and/or desired) signal to noise ratio (SNR).

Each UE sweep period is a length of T_{BSP} . The length of time T_{BSP} may be a total of the beacon sweep period from the base station (e.g., length of time of 5 350 μ s) and the data portion (e.g., 350 μ s). Thus, in one example embodiment, T_{BSP} is the same length of time as $mTTI$.

The base station 140 and the UE 105 may only know about the number of beams in their respective antenna configurations. If the UE beacon sweep period T_{BSP} is longer than the amount of time required to sweep through all 10 the base station beams B_{BS1} - B_{BSM} , then the UE 105 does not need to know the number of beams for the base station 105.

The base station 120 may assist the base station 140 in establishing communications with the UE 105. For example, existing different frequency communication channels could be used as an assist to inform the UE 105 of 15 the approximate duration of the base station's beam sweep periods. While example embodiments discussed herein focus on initialization, it should be understood that the base station 120 may also be used to assist in configuration, data control and acknowledgements. As a result, the link 160 between the base station 140 and the UE 105 would be used for just data.

20 The first base station 120 may transmit a scanning window signal to the UE 105 on an existing band (e.g., LTE using the communication link 150, out of band assist) that is different than mmWave. The first base station 120 and the second base station 140 may be a co-located base station or separate base stations.

25 The transmission scanning window signal indicates the duration of the base station beacon sweep period 310. Since there is some uncertainty due to potentially different propagation paths of the communication paths 150 and 160, the UE 105 is directed to begin the UE beacon sweep period slightly before the base station's beacon sweep period and to listen for a window 30 length of time such that each beam of the UE 105 scans during at least a part of the scanning period 310 of the base station 140.

Once the UE 105 identifies a preferred beacon from the base station 140, the UE 105 may use an out of band method such as the existing lower frequency LTE connection with the base station 120 or low-latency 5G to indicate the preferred beam. The base station 120 then informs the base station 140 of
5 the preferred beacon of the corresponding beam to use prior to synchronization.

Once the base station 140 receives the indication of the preferred beam, the base station 140 then performs ranging to take into account propagation delays between sending and receiving using a physical random access
10 channel (PRACH). The base station 140 transmits a subsequent beacon with scheduling information for a PRACH message on the preferred beam. The subsequent beacon on the preferred beam identifies a scheduled uplink slot for the UE 105 to respond to the PRACH message in a fixed part of the data communication period (e.g., 320₂). The UE 105 uses the scheduled uplink
15 slot to transmit a PRACH message to the base station 140. When the base station 140 receives the PRACH message from the UE 105, the base station 140 transmits another beacon on the preferred beam with a range time adjustment for the UE 105. The UE 105 uses the range time adjustment to adjust its transmissions. The base station 140 and the UE 105 are then
20 synchronized.

In another example embodiment, the base station 120 may use the different communication channel (e.g., LTE) to inform the UE 105 of the timing information of the PRACH.

In an out of band assist example embodiment, the base station 140 can be
25 powered down until the base station 120 determines mmWave capability in the UE 105 and a request from the UE 105 for higher bandwidth. The base station 140 may then wake up the base station 120 when the base station 140 detects mmWave capability in the UE 105 and the request from the UE 105 for higher bandwidth.

30 It should also be understood that a back channel such as LTE is not required to establish communications between the UE 105 and the base station 140. The base station 140 and the UE 105 may operate in a standalone system.

- In the standalone system (i.e., without out of band assist), the base station 140 may explicitly schedule the PRACH message in every beacon or every desired number of beacons such as periodically. The scheduling information for the PRACH message identifies a uplink slot for the UE 105 to respond.
- 5 In the standalone system, the preferred beam is implied by the base station 140 to be the received beam used to receive the PRACH message from the UE 105. Once the base station 140 receives the response from the UE 105, the synchronization process is the same as described above with respect to the out of band assist.
- 10 As mentioned above, each beacon may include scheduling information. For example, the scheduling information is used for PRACH and once synchronized is used for data communications.
- The scheduling information includes a UE id and identifies an UL/DL direction, modulation/coding scheme and type (e.g., data or PRACH),
- 15 starting symbol (relative to beacon) and a number of symbols duration (e.g., at least one of assigned uplink and downlink slots in the following data communication period 320). For example, the base station 140 may transmit scheduling information to the UE 105 in the scanning period 310₂ using the beam corresponding to the preferred beacon and may
- 20 receive/transmit data during a subsequent data communication period (e.g., 320₂-320_M) in accordance with the scheduling information for the UE 105. A beacon defines an entire schedule for a subsequent data communication period 320 by identifying the UEs assigned to the uplink and downlink slots in the subsequent data communication period 320.
- 25 The UE 105 can monitor the various beacons while communicating with the base station on its currently preferred beam. If a better beam combination is discovered, the UE 105 informs the base station 140 to switch to a better beam. This process is performed as a negotiation with the base station 140 to avoid wasting resources such that the UE 105 does not listen on another
- 30 beam while the base station 140 is transmitting to the UE 105 on the preferred beam. For example, the base station 140 and the UE 105 agree ahead of time which mTTI are to be used to schedule data transfers and which mTTI are dedicated to measuring alternative beam combinations.

Beam search could be an ongoing activity during time-outs from data transfer, or it could be performed when the current beam fails.

In an example embodiment, the beam searching procedure permits a UE to only have to decode the control symbol(s) of their beacon at known times of a
 5 recurring mTTI period. Then, the UE can skip all symbol times not intended for it and only decode (or encode and transmit) its symbols at a specified time.

FIGS. 4A-4B illustrate an alternative example embodiment of a beam sweep. FIG. 4A illustrates a minor cycle of the beam sweep and FIG. 4B illustrates a
 10 major cycle of the beam sweep. The beam sweep of FIG. 4A may be performed by the base station 140, for example. In the beam sweep of FIG. 4A, the base station 140 transmits a beacon on a particular beam direction followed immediately by any data transmission to user equipment on that same beam. For example, the base station transmits a beacon on the beam
 15 B_{BS1} during a scanning sub-period 410_1 and then transmits data on the beam B_{BS1} during a data communication sub-period 420_1 . After transmitting the data on the beam B_{BS1} , the base station 140 transmits a beacon on the beam B_{BS2} during the scanning sub-period 410_2 . A beam forming delay T_{BF} (which could be zero) is implemented between each data communication
 20 sub-period 420_i and scanning sub-period 410_{i+1} .

A beacon sweep period (410_1 - 420_M) is variable as the transmission time allocated on each beam direction is dependent on a user's bandwidth needs. Referring to FIG. 4B, the UE 105 listens on beams B_{UE1} - B_{UEM} during the UE scanning and data periods of time T_{BSPI} - T_{BSPN} , respectively.

25 FIG. 5 illustrates a major cycle of a beam sweep according to an example embodiment. The major cycle of FIG. 5 may be performed by the UE 105. Using the same beacon sweep defined by FIG. 3A, the major cycle of FIG. 5 groups all UE beam B_{UE1} - B_{UEM} sweeps together and places user data transmissions after the entire search of transmitter and receiver beam
 30 directions is performed. As the UE 105 does not have complete timing knowledge prior to synchronizing with the base station 140, there is uncertainty at the UE 105 about when the base station's beacon sweep begins. Thus, the UE 105 can switch to new listening beam directions

without missing any beacons, as long as the UE 105 listens on the same received UE beam for as long as or greater than T_{BSP} .

FIG. 6 illustrates a method of beam searching according to an example embodiment. The method of FIG. 6 may be performed by a network element
5 such as the second base station 140. However, it should be understood that example embodiments are not limited thereto and the UE 105 may perform the method of FIG. 6.

At S600, the base station 140 transmits a plurality of first beacons over a first scanning period. The plurality of beacons is associated with the
10 different direct energy beams B_{BS1} - B_{BSM} . In other words, the base station 140 performs a beam sweep, by transmitting beacons across the beams B_{BS1} - B_{BSM} , respectively.

At S610, the base station 140 receives an indication of a preferred beacon. As described above, the base station may explicitly receive the indication
15 from the base station 120 or it may be implied in the standalone system.

At S620, the base station 140 communicates with the UE 105 during a data communication period using the beam associated with the preferred beacon. As discussed above, each beacon includes scheduling information for a
20 subsequent data communication period. The UE 105 communicates during the subsequent data communication period in accordance with the received scheduling information.

FIG. 7 illustrates a method of beam searching according to an example embodiment. The method of FIG. 7 may be performed by a network element
25 such as the UE 105. However, it should be understood that example embodiments are not limited thereto and the base station 140 may perform the method of FIG. 7.

At S700, the UE 105 receives a window signal which indicates a duration of a base station scanning period. At S710, the UE 105 scans for the beacons over a scanning period for the UE 105. As described above, the UE 105
30 scans for the beams B_{BS1} - B_{BSM} over the UE's beams B_{UE1} - B_{UEN} . Upon receiving at least one beacon at S720, the UE 105 determines a preferred beam correspond to the received beacon at S730. The UE 105 transmits an indication of the preferred beam to the base station 120 or is implied by the

base station 140 based on the PRACH message transmitted by the UE 105. Once synchronized, the UE 105 and the base station 140 exchange full messages during the data communication periods at S750.

FIG. 8 illustrates the base station 140 according to an example embodiment.

- 5 It should be also understood that the base station 140 may include features not shown in FIG. 8 and should not be limited to those features that are shown.

Referring to FIG. 8, the base station 140 may include, for example, a data bus 859, a transmitting unit 852, a receiving unit 854, a memory unit 856, and a processing unit 858. While illustrated separately, the transmitting unit 852 and the receiving unit 854 may be a single transceiver.

10 The transmitting unit 852, receiving unit 854, memory unit 856, and processing unit 858 may send data to and/or receive data from one another using the data bus 859. The transmitting unit 852 is a device that includes hardware and any necessary software for transmitting wireless signals including, for example, data signals, control signals, and signal strength/quality information via one or more wireless connections to other network elements in the wireless communications network 100.

15 The receiving unit 854 is a device that includes hardware and any necessary software for receiving wireless signals including, for example, data signals, control signals, and signal strength/quality information via one or more wireless connections to other network elements in the network 100.

20 The memory unit 856 may be any device capable of storing data including magnetic storage, flash storage, etc. The memory unit 256 is used for data and controlling signal buffering and storing for supporting pre-scheduling and the scheduled data transmissions and re-transmissions.

25 The processing unit 858 may be any device capable of processing data including, for example, a microprocessor configured to carry out specific operations based on input data, or capable of executing instructions included in computer readable code. The data bus 859, the transmitting unit 852, the receiving unit 854, the memory unit 856, and the processing unit 858 are cooperatively configured to perform the functions of the base station 140 described in FIGS. 1-6.

FIG. 9 illustrates the UE 105 according to an example embodiment. It should be also understood that the UE 105 may include features not shown in FIG. 9 and should not be limited to those features that are shown.

Referring to FIG. 9, the UE 105 may include, for example, a data bus 959, a transmitting unit 952, a receiving unit 954, a memory unit 956, and a processing unit 958. While illustrated separately, the transmitting unit 952 and the receiving unit 954 may be a single transceiver.

The transmitting unit 952, receiving unit 954, memory unit 956, and processing unit 958 may send data to and/or receive data from one another using the data bus 859. The transmitting unit 952 is a device that includes hardware and any necessary software for transmitting wireless signals including, for example, data signals, control signals, and signal strength/quality information via one or more wireless connections to other network elements in the wireless communications network 100.

The receiving unit 954 is a device that includes hardware and any necessary software for receiving wireless signals including, for example, data signals, control signals, and signal strength/quality information via one or more wireless connections to other network elements in the network 100.

The memory unit 956 may be any device capable of storing data including magnetic storage, flash storage, etc. The memory unit 256 is used for data and controlling signal buffering and storing for supporting pre-scheduling and the scheduled data transmissions and re-transmissions.

The processing unit 958 may be any device capable of processing data including, for example, a microprocessor configured to carry out specific operations based on input data, or capable of executing instructions included in computer readable code. The data bus 959, the transmitting unit 952, the receiving unit 954, the memory unit 956, and the processing unit 958 are cooperatively configured to perform the functions of the UE 105 described in FIGS. 1-5 and 7.

Example embodiments being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of example embodiments, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the claims.

CLAIMS

1. A method searching for different direct energy beams, the method comprising:
 - 5 obtaining (S700) a duration of a first network element scanning period of a first network element for a plurality of first beacons, the plurality of first beacons associated with the different direct energy beams;
scanning (S710) for the plurality of first beacons over a second network element scanning period of a second network element, the second
10 network element scanning period including a number of first network element scanning periods, the first network element scanning period being part of the number of the first network element scanning periods;
receiving (S720) at least one of the plurality of first beacons during the number of the first network element scanning periods;
 - 15 determining (S730) a preferred first beacon based on the received at least one of the plurality of first beacons;
transmitting (S740) an indication of the preferred first beacon to the first network element; and
communicating (S750) with the first network element during a
20 scheduled portion of a first data communication period using the beam associated with the preferred first beacon, a length of the first network element scanning period and a length of the first data communication period forming a length of a transmission time interval.
- 25 2. The method of claim 1, wherein the first network element is a base station (140) and the second network element is a user equipment (UE) (105).
3. The method of claim 2, wherein the scanning (S710) scans for the
30 plurality of first beacons over a plurality of receive beam directions.
4. The method of claim 3, wherein the scanning (S710) includes,
allocating the plurality of receive beam directions to the number of base station scanning periods, respectively, the allocated receive beam

direction performing the scanning for the respective base station (140) scanning period.

5 5. The method of claim 2, wherein the transmitting (S740) transmits the indication on a first frequency band channel, the first frequency band channel associated with a first frequency band, the direct energy beams associated with a second frequency band, and the first frequency band includes frequencies different than frequencies of the second frequency band.

10

6. The method of claim 2, further comprising:
 monitoring the plurality of first beacons after the communicating.

15 7. The method of claim 2, further comprising:
 receiving the preferred beacon with scheduling information for the UE, the receiving the first beacon with the scheduling information for the UE occurring in a second base station scanning period, the second base station scanning period occurring after the number of base station scanning periods, the communicating being based on the scheduling information.

20

8. The method of claim 2, wherein each of the first beacons includes an identification of the associated beam.

25 9. A first network element (105) comprising:
 a processor (958) configured to obtain a duration of a second network element scanning period of a second network element for a plurality of first beacons, the plurality of first beacons associated with different direct energy beams; and

30 a transceiver (952/954) configured to,
 scan for the plurality of first beacons over a first network element scanning period of the first network element, the first network element scanning period including a number of second network element scanning periods, the second network element

scanning period being part of the number of the scanning network element scanning periods,

receive at least one of the plurality of first beacons during the number of the second network element scanning periods,

5 wherein the processor (958) is configured to determine a preferred first beacon based on the received at least one of the plurality of first beacons,

the transceiver (952/954) is configured to transmit an indication of the preferred first beacon to the second network element, and

10 the processor (958) is configured to communicate with the second network element during a scheduled portion of a first data communication period using the beam associated with the preferred first beacon, a length of the second network element scanning period and a length of the first data communication period forming a length of a transmission time interval.


15

10. The first network element of claim 9, wherein the first network element is a user equipment (UE) (105) and the second network element is a base station (140).

20

1/12

FIG. 1

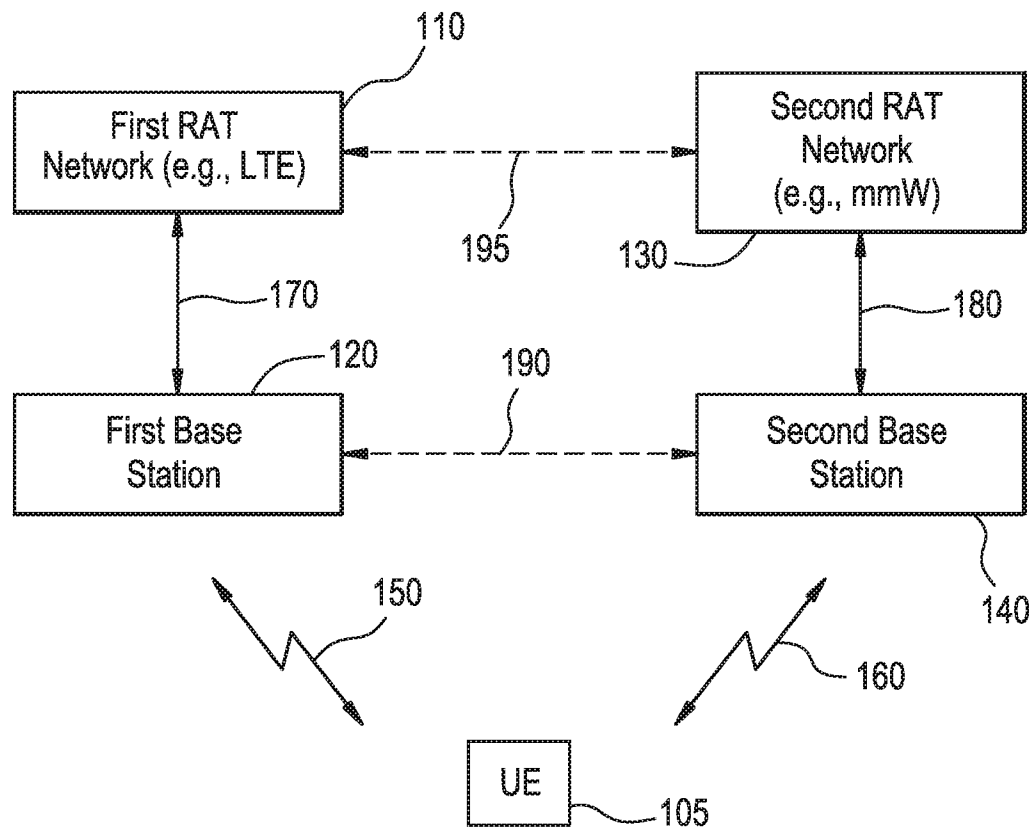

2/12

FIG. 2A

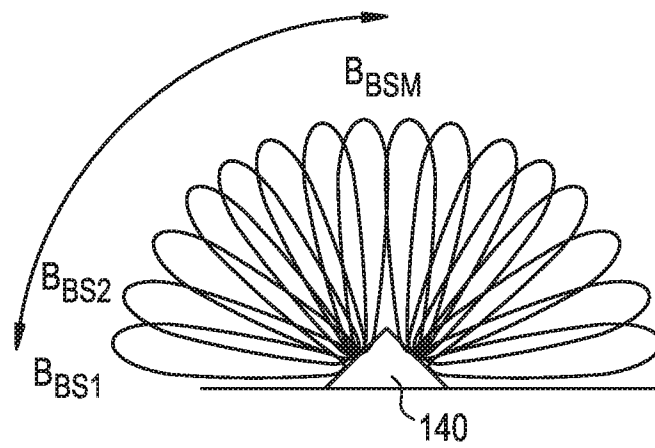


FIG. 2B

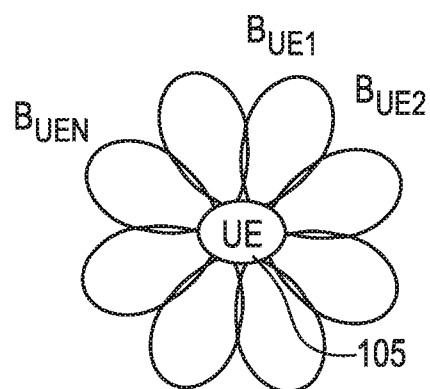


FIG. 3A

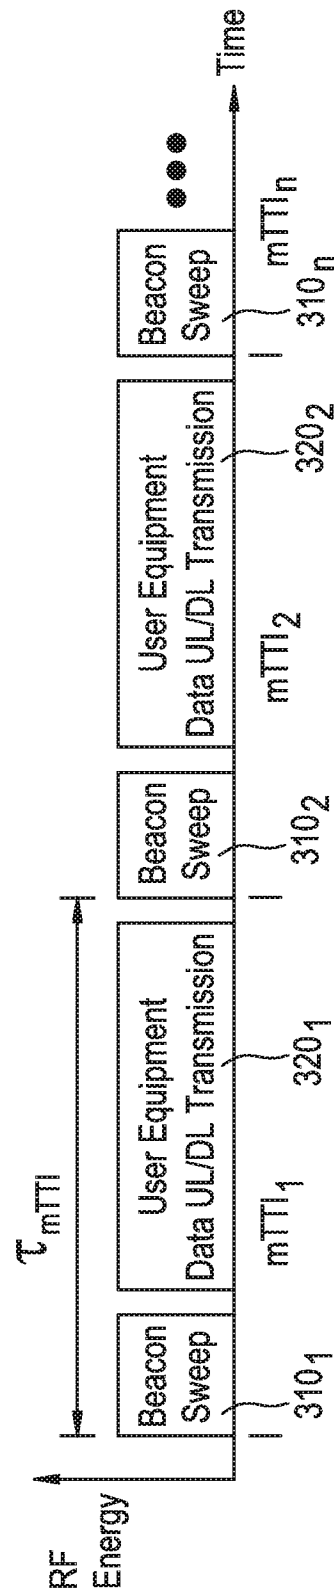


FIG. 3B

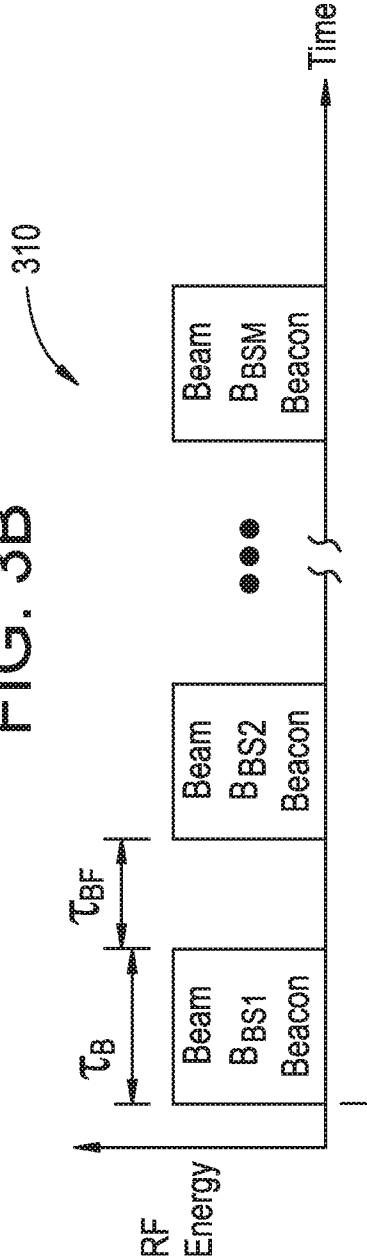


FIG. 3C

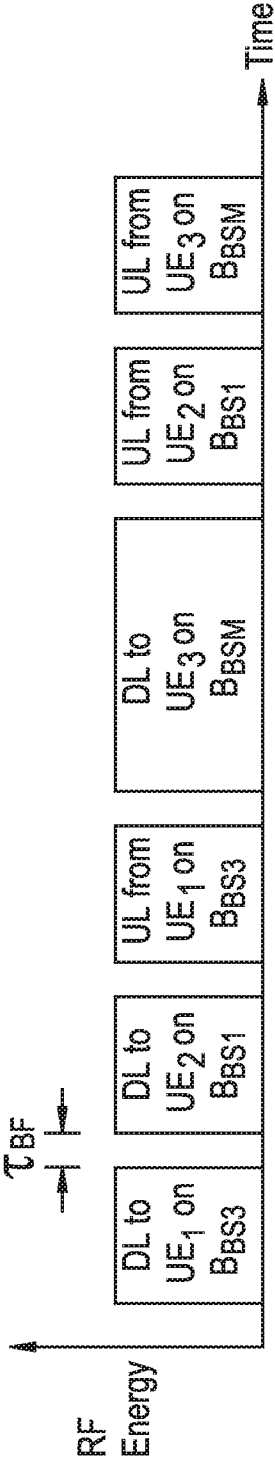


FIG. 3D

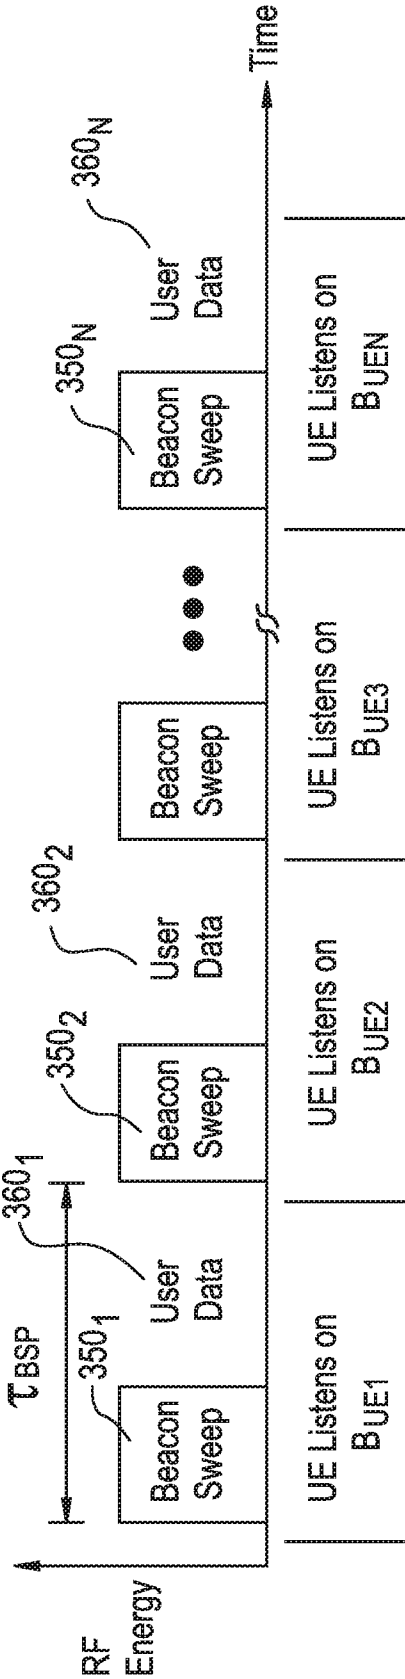


FIG. 4A

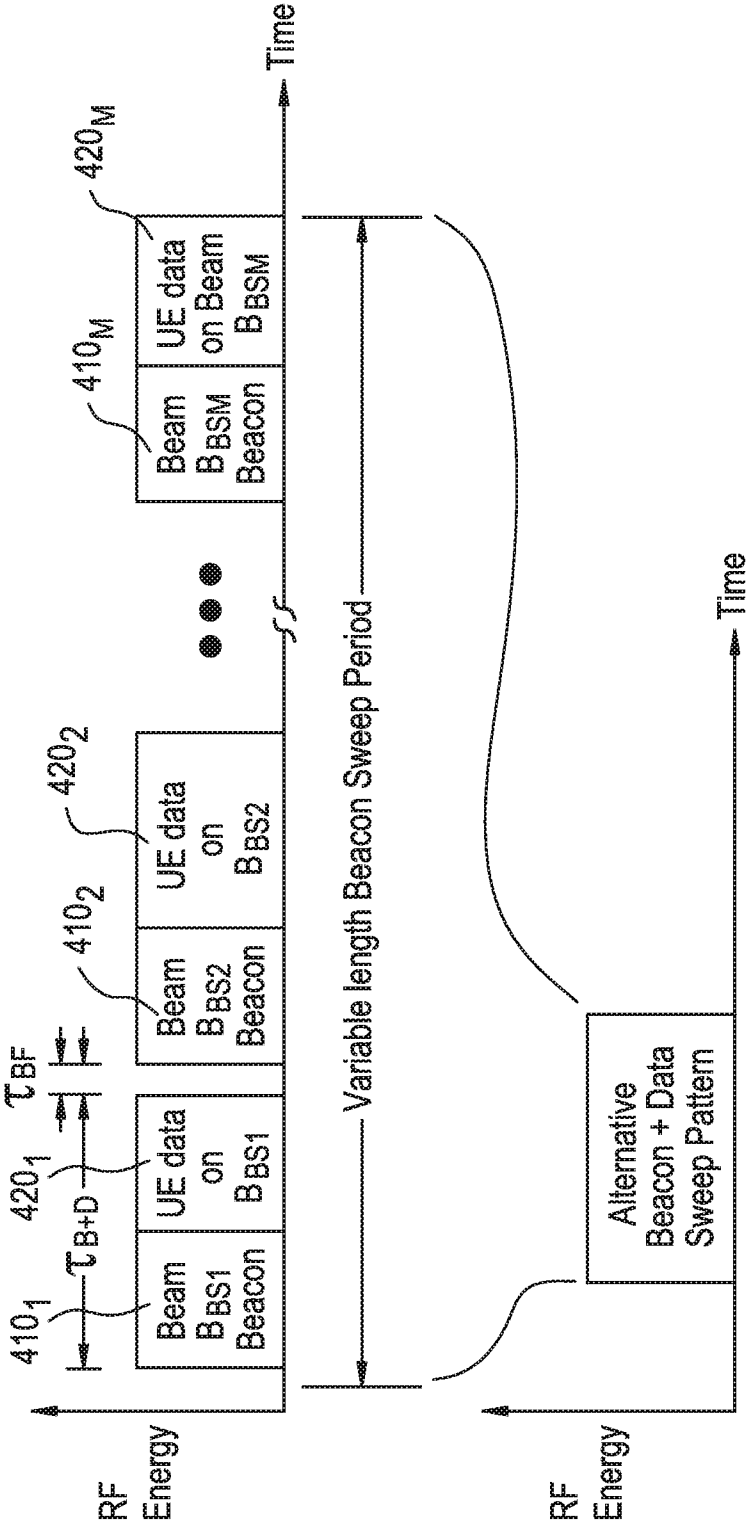


FIG. 4B



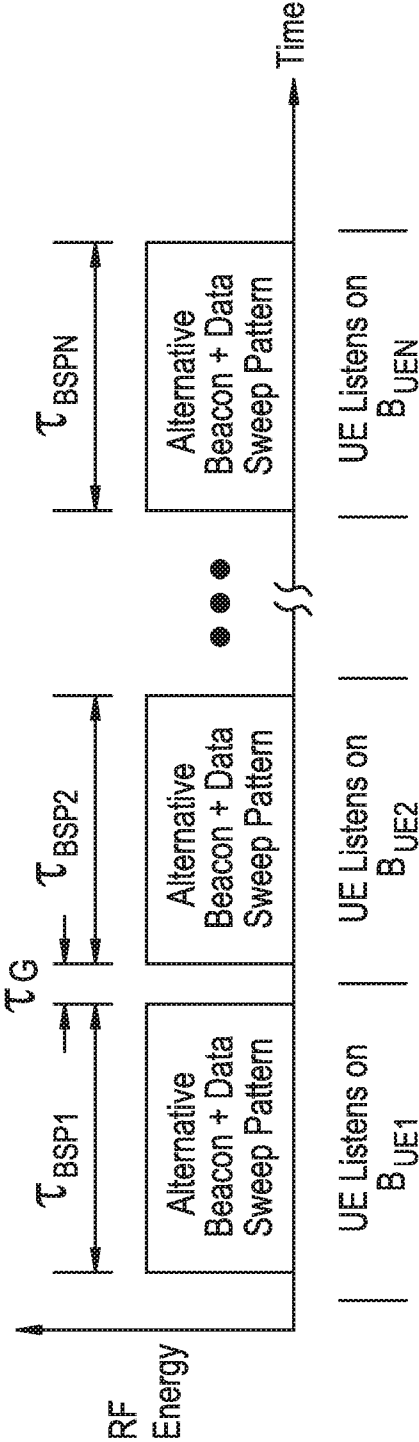


FIG. 5

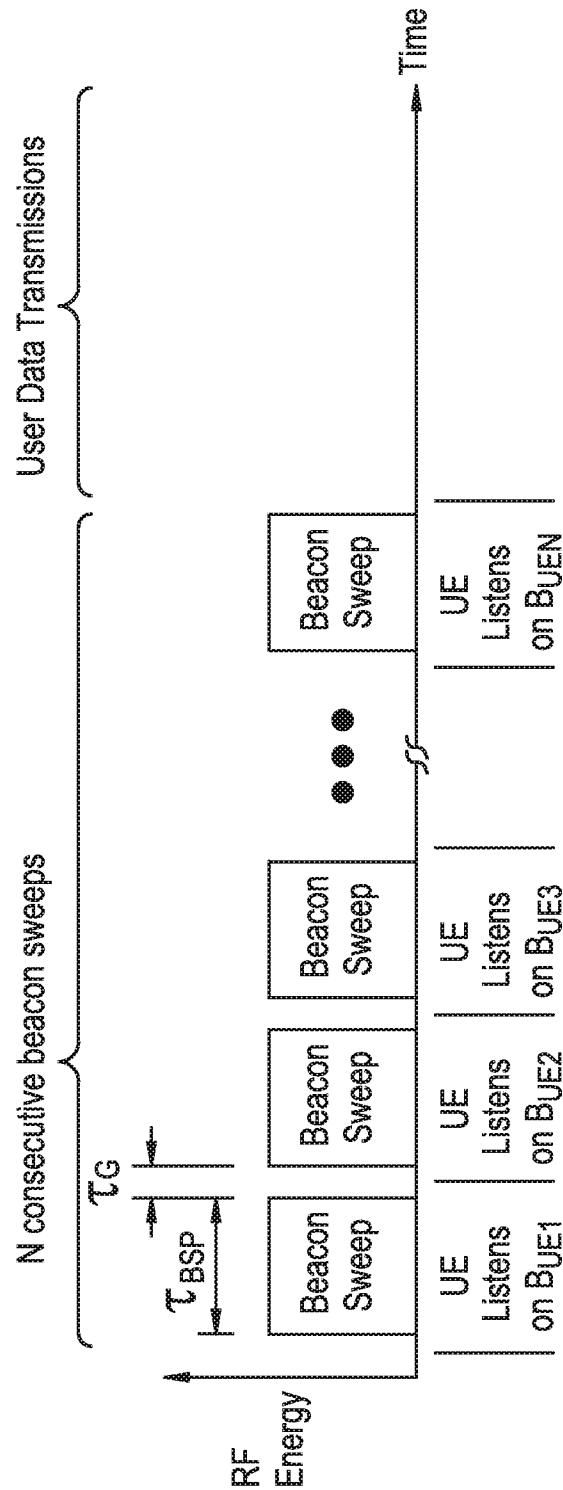


9/12

FIG. 6

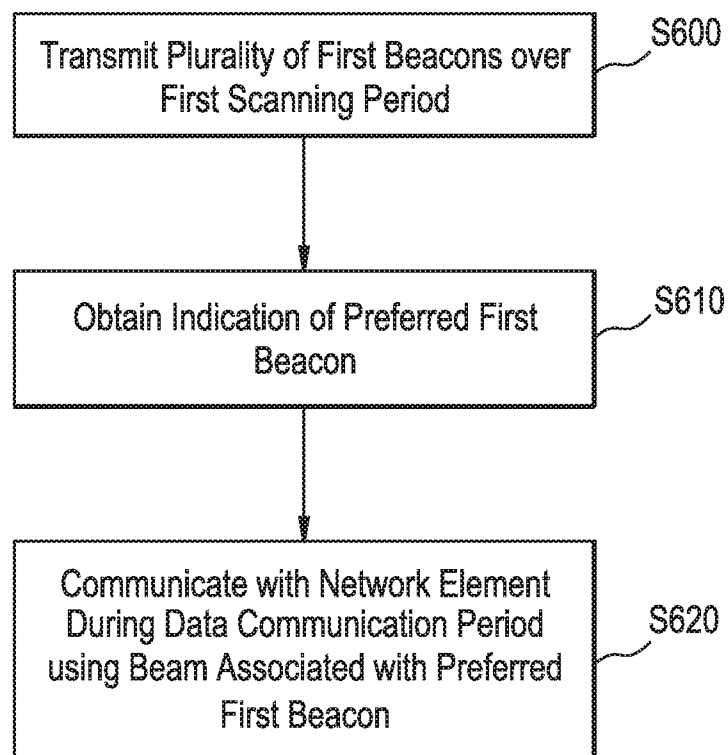


10/12

FIG. 7

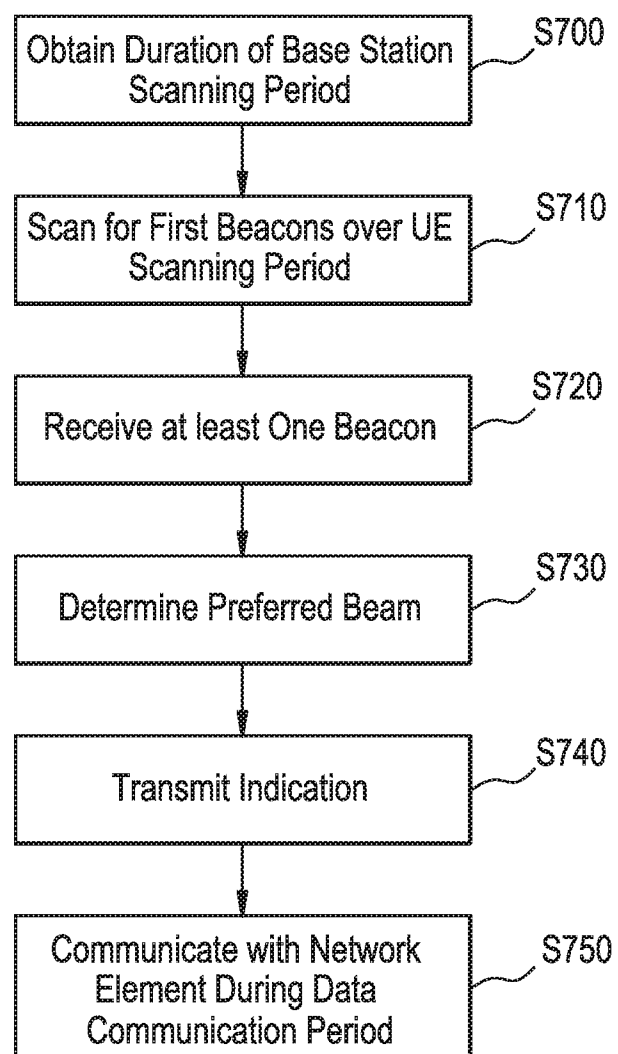


11/12

FIG. 8

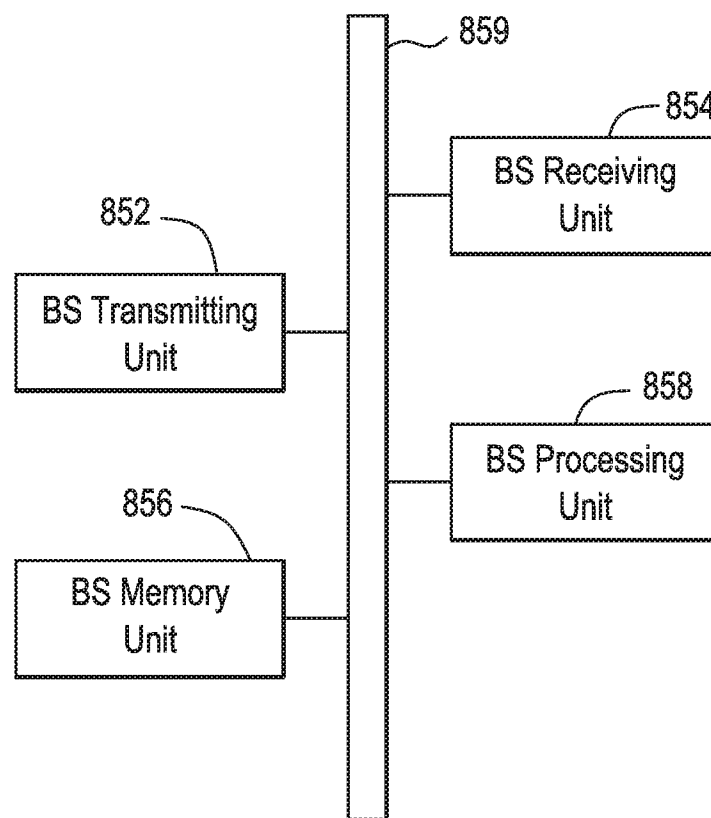

12/12

FIG. 9

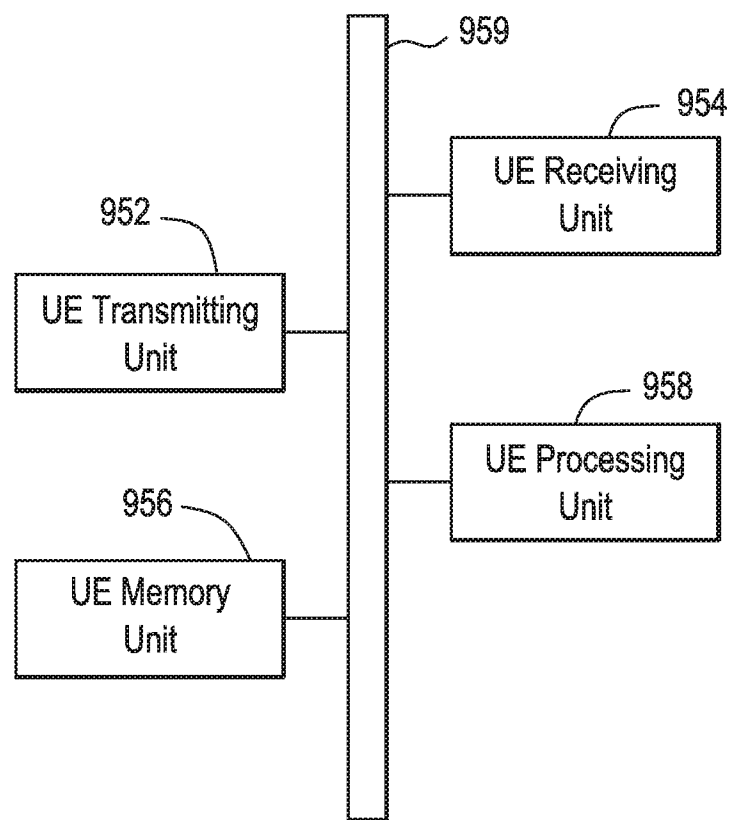

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/049528

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04B7/0408 H04B7/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04B H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016/242159 A1 (HO CHUNG-LIEN [TW] ET AL) 18 August 2016 (2016-08-18) paragraphs [0002], [0006], [0010], [0011], [0037] - [0046]; figures 4,5 -----	1-10
A	US 2015/382171 A1 (ROY ARNAB [US] ET AL) 31 December 2015 (2015-12-31) paragraphs [0068], [0070], [0083], [0086], [0091], [0095], [0185], [0188], [0190]; figures 1A,3,9A -----	1-10
A	US 2016/165583 A1 (HO CHUNG-LIEN [TW] ET AL) 9 June 2016 (2016-06-09) paragraphs [0007] - [0009], [0047], [0052], [0058], [0060]; figure 6 -----	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 November 2017

Date of mailing of the international search report

17/11/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Muntean, T

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/049528

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016242159 A1	18-08-2016	EP 3059877 A1 TW 201631915 A US 2016242159 A1	24-08-2016 01-09-2016 18-08-2016
US 2015382171 A1	31-12-2015	CN 104969588 A EP 2954711 A1 JP 2016509818 A KR 20150115931 A TW 201446037 A US 2015382171 A1 WO 2014124237 A1	07-10-2015 16-12-2015 31-03-2016 14-10-2015 01-12-2014 31-12-2015 14-08-2014
US 2016165583 A1	09-06-2016	EP 3029849 A1 US 2016165583 A1	08-06-2016 09-06-2016