



- (51) **International Patent Classification:**
C07C 29/94 (2006.01) *B01J 23/44* (2006.01)
C07C 31/20 (2006.01)
- (21) **International Application Number:** PCT/US20 12/07 1893
- (22) **International Filing Date:** 28 December 2012 (28.12.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
- | | | |
|------------|-------------------------------|----|
| 61/582,067 | 30 December 2011 (30.12.2011) | US |
| 61/639,404 | 27 April 2012 (27.04.2012) | US |
| 61/639,436 | 27 April 2012 (27.04.2012) | US |
| 61/639,449 | 27 April 2012 (27.04.2012) | US |
- (71) **Applicant: E. I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).
- (72) **Inventors: ALLGEIER, Alan, Martin;** 1407 N. Grant Avenue, Wilmington, Delaware 19806-2437 (US). **DESILVA, Namal;** 4417 Lancaster Avenue, Wilmington, Delaware 19805 (US). **KOROVESSI, Ekaterini;** 1306 North Clayton Street, Wilmington, Delaware 19806 (US). **MENNING, Carl;** 6 Blue Ridge Place, Newark, Delaware 19702 (US). **RITTER, Joachim, C ;** 121 Broadbent Road, Wilmington, Delaware 19810 (US). **SENGUPTA, Sourav, Kumar;** 122 Westgate Drive, Wilmington, Delaware 19808 (US). **STAUFFER, Christina, S.;** 1437 Kynlyn Drive, Wilmington, Delaware 19809 (US).
- (74) **Agent: TANZER, Gail, D.;** E. I. du Pont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, Delaware 19805 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report (Art. 21(3))
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))



(54) **Title:** PROCESS FOR PREPARING 1, 6-HEXANEDIOL

(57) **Abstract:** Disclosed are processes for preparing 1, 6-hexanediol and synthetic intermediates useful in the production of 1, 6-hexanediol from renewable biosources. In one embodiment, a process comprises contacting levoglucosenone with hydrogen in the presence of a first hydrogenation catalyst at a first temperature to form product mixture (I); and heating product mixture (I) in the presence of hydrogen and a second hydrogenation catalyst at a second temperature to form product mixture (II) which comprises 1, 6-hexanediol.

TITLE

PROCESS FOR PREPARING 1, 6-HEXANEDIOL

This application claims priority under 35 U.S.C. § 119(e) from, and
5 claims the benefit of, U.S. Provisional Application No. 61/582,067, filed
December 30, 2011; U.S. Provisional Application No. 61/639,404 filed
April 27, 2012; U.S. Provisional Application No. 61/639,436 filed April 27,
2012; and U.S. Provisional Application No. 61/639,449 filed April 27,
2012; all of which are by this reference incorporated in their entirety as a
10 part hereof for all purposes.

FIELD OF DISCLOSURE

The present invention relates to processes for preparing 1, 6-
hexanediol.

15

BACKGROUND

Industrial chemicals obtained from inexpensive sources are
desirable for use in industrial processes, for example as raw materials,
solvents, or starting materials. It has become increasingly desirable to
obtain industrial chemicals or their precursors from materials that are not
20 only inexpensive but also benign in the environment. Of particular interest
are materials which can be obtained from renewable sources, that is,
materials that are produced by a biological activity such as planting,
farming, or harvesting. As used herein, the terms "renewable" and
"biosourced" can be used interchangeably.

25

Biomass sources for such materials are becoming more
attractive economically versus petroleum-based ones. Although the
convergent and selective synthesis of C₅ and C₆ carbocyclic intermediates
from biomass is difficult because of the high degree of oxygenation of
many components of biomass, use of such biomass-derived intermediates
30 as feedstocks would offer new routes to industrially useful chemicals.

1, 6-Hexanediol is a useful intermediate in the industrial preparation of nylon. For example, 1, 6-hexandiol can be converted by known methods to 1, 6-hexamethylene diamine, a useful monomer in nylon production.

5 There is an existing need for processes to produce 1, 6-hexanediol, and synthetic intermediates useful in the production of 1, 6-hexanediol, from renewable biosources. There is an existing need for processes to produce 1, 6-hexanediol, as well as synthetic intermediates useful in the production of 1, 6-hexanediol, from biomass-derived starting
10 materials, including C₆ oxygenated hydrocarbons such as levoglucosenone.

SUMMARY

In one embodiment, a process is disclosed, the process comprising the steps of

- 15 a) contacting levoglucosenone with hydrogen in the presence of a first hydrogenation catalyst at a first temperature between about 25°C and about 150 °C to form product mixture (I); and
- b) heating product mixture (I) in the presence of hydrogen and a second hydrogenation catalyst at a second temperature between about
20 120 °C and about 260 °C to form product mixture (II).

In one embodiment, product mixture (I) comprises one or more of levoglucosenol, levoglucosanol, tetrahydrofuran 2,5-dimethanol, 2-hydroxymethyltetrahydropyran, 1,2,5,6-tetrahydroxyhexane, 1,2,6-hexanetriol, and 2-hydroxymethyl-5-hydroxytetrahydropyran.

25 In one embodiment, product mixture (II) comprises one or more of 1,2,6-hexanetriol, tetrahydrofuran 2,5-dimethanol, 2-hydroxymethyl-5-hydroxytetrahydropyran, 1, 6-hexanediol, 1,2-hexanediol, 1-hexanol, and 2-hydroxymethyltetrahydropyran.

DETAILED DESCRIPTION

30 As used herein, where the indefinite article "a" or "an" is used with respect to a statement or description of the presence of a step in a

process disclosed herein, unless the statement or description explicitly provides to the contrary, the use of such indefinite article does not limit the presence of the step in the process to one in number.

As used herein, when an amount, concentration, or other value or
5 parameter is given as either a range, preferred range, or a list of upper
preferable values and lower preferable values, this is to be understood as
specifically disclosing all ranges formed from any pair of any upper range
limit or preferred value and any lower range limit or preferred value,
regardless of whether ranges are separately disclosed. Where a range of
10 numerical values is recited herein, unless otherwise stated, the range is
intended to include the endpoints thereof, and all integers and fractions
within the range. It is not intended that the scope of the invention be
limited to the specific values recited when defining a range.

As used herein, the terms "comprises," "comprising," "includes,"
15 "including," "has," "having," "contains" or "containing," or any other
variation thereof, are intended to cover a non-exclusive inclusion. For
example, a composition, a mixture, process, method, article, or apparatus
that comprises a list of elements is not necessarily limited to only those
elements but may include other elements not expressly listed or inherent
20 to such composition, mixture, process, method, article, or apparatus.
Further, unless expressly stated to the contrary, "or" refers to an inclusive
or and not to an exclusive or. For example, a condition A or B is satisfied
by any one of the following: A is true (or present) and B is false (or not
present), A is false (or not present) and B is true (or present), and both A
25 and B are true (or present).

As used herein, the term "about" modifying the quantity of an
ingredient or reactant employed refers to variation in the numerical
quantity that can occur, for example, through typical measuring and liquid
handling procedures used for making concentrates or use solutions in the
30 real world; through inadvertent error in these procedures; through
differences in the manufacture, source, or purity of the ingredients

employed to make the compositions or carry out the methods; and the like. The term "about" also encompasses amounts that differ due to different equilibrium conditions for a composition resulting from a particular initial mixture. Whether or not modified by the term "about", the claims include
5 equivalents to the quantities. The term "about" may mean within 10% of the reported numerical value, preferably within 5% of the reported numerical value.


As used herein, the term "biomass" refers to any hemicellulosic or lignocellulosic material and includes materials comprising hemicellulose,
10 and optionally further comprising cellulose, lignin, starch, oligosaccharides and/or monosaccharides.

As used herein, the term "lignocellulosic" means comprising both lignin and cellulose. Lignocellulosic material may also comprise hemicellulose. In some embodiments, lignocellulosic material contains
15 glucan and xylan.

Hemicellulose is a non-cellulosic polysaccharide found in lignocellulosic biomass. Hemicellulose is a branched heteropolymer consisting of different sugar monomers. It typically comprises from 500 to 3000 sugar monomeric units.

20 Lignin is a complex high molecular weight polymer and can comprise guaiacyl units as in softwood lignin, or a mixture of guaiacyl and syringyl units as in hardwood lignin.


As used herein, the abbreviations "Lgone" and "LGone" refer to levoglucosenone, also known as 1,6-anhydro-3,4-dideoxy- β -D-pyranosen-2-one. The chemical structure of levoglucosenone is
25 represented by Formula (I).



I


4

As used herein, the abbreviations "Lgol" and "LGol" refer to levoglucosan, also known as 1, 6-anhydro- 3,4-dideoxyhexopyranose, and include a mixture of the threo and erythro stereoisomers. The chemical structure of 1, 6-anhydro- 3,4-dideoxyhexopyranose is represented by Formula (II).




II

As used herein, the abbreviation "K1 28" refers to 1, 6-anhydro- 3,4-dideoxy- p-D-pyranose-2-one. The chemical structure of 1, 6-anhydro- 3,4-dideoxy- p-D-pyranose-2-one is represented by Formula (III).



III


As used herein, the abbreviation "Tetraol" refers to 1,2,5,6-tetrahydroxyhexane, also known as 3,4-dideoxyhexitol, and includes a mixture of stereoisomers. The chemical structure of 1,2,5,6-tetrahydroxyhexane is represented by Formula (IV).



IV

As used herein, the abbreviation "THFDM" refers to tetrahydro-2,5-furandimethanol, also known as 2,5-bis[hydroxymethyl]tetrahydrofuran, and includes a mixture of stereoisomers (cis- and racemic trans- isomers).


The chemical structure of tetrahydro-2,5-furandimethanol is represented by Formula (V).



5

v


As used herein, the abbreviation "1,2,6-HT" refers to 1,2,6-hexanetriol and includes a racemic mixture of isomers. The chemical structure of 1,2,6-hexanetriol is represented by Formula (VI).



10

VI

As used herein, the abbreviation "THPM" refers to tetrahydro-2H-pyran-2-methanol, also known as 2-hydroxymethyltetrahydropyran, and includes a racemic mixture of isomers. The chemical structure of tetrahydro-2H-pyran-2-methanol is represented by Formula (VII).




15

VII


As used herein, the abbreviation "HOTHPM" refers to 2-hydroxymethyl-5-hydroxytetrahydro-2H-pyran, also known as 1,5-anhydro-3,4-dideoxyhexitol, and includes a mixture of stereoisomers. The chemical structure of 2-hydroxymethyl-5-hydroxytetrahydro-2H-pyran is represented by Formula (VIII).

20



VIII


As used herein, the abbreviation "1,6-HD" refers to 1,6-hexanediol. The chemical structure of 1,6-hexanediol is represented by Formula (IX).



5

IX


As used herein, the abbreviation "1,2-HD" refers to 1,2-hexanediol and includes a racemic mixture of isomers. The chemical structure of 1,2-hexanediol is represented by Formula (X).



10

X


As used herein, the abbreviation "1,2-CHD" refers to 1,2-cyclohexanediol and includes a mixture of stereoisomers (cis and racemic trans isomers). The chemical structure of 1,2-cyclohexanediol is represented by Formula (XI).



15

XI


As used herein, the abbreviation "1,5-HD" refers to 1,5-hexanediol and includes a racemic mixture of isomers. The chemical structure of 1,5-hexanediol is represented by Formula (XII).



20


XII

As used herein, the abbreviation "HexOH" refers to 1-hexanol. The chemical structure 1-hexanol is represented by Formula (XIII).



XIII


As used herein, the abbreviation "PentOH" refers to 1-pentanol. The chemical structure 1-pentanol is represented by Formula (XIV).



5

XIV

As used herein, the abbreviation "A1 28" refers to 1, 6-anhydro-3,4-dideoxy- p-erythro-hex-3-enopyranose, also known as levoglucosenol. The chemical structure of A128 is represented by Formula (XV).




10

XV

As used herein, the abbreviation "1,5-PD" refers to 1,5-pentanediol. The chemical structure of 1,5-PD is represented by Formula (XVI).

15



XVI

Disclosed herein are processes for obtaining 1, 6-hexanediol, and synthetic intermediates useful in the production of 1, 6-hexanediol, from levoglucosenone, which in turn can be derived from a renewable biosource. As used herein, the term "renewable biosource" includes biomass and animal or vegetable fats or oils.

A renewable biosource can be pyrolyzed under high temperature conditions in the presence of an acid catalyst to provide useful chemical intermediates. For example, pyrolysis of wood, starch, glucose or cellulose can produce levoglucosenone by known and conventional methods (see, for example, Ponder (*Applied Biochemistry and*

25

Biotechnology, Vol 24/25, 41-41 (1990)) or Shafizadeh (*Carbohydrate Research*, 71, 169-191 (1979)). In some embodiments, levoglucosenone as obtained by pyrolysis of biomass contains small amounts of acidic components, for example levulinic acid.

5 In the processes disclosed herein, levoglucosenone is contacted with hydrogen in the presence of a first hydrogenation catalyst at a first temperature between about 25°C and about 150°C to form product mixture (I), which is then heated in the presence of hydrogen and a second hydrogenation catalyst at a second temperature between about 120°C and
10 about 260°C to form product mixture (II). Product mixture (I) comprises one or more of 1,6-anhydro-3,4-dideoxy- β -D-pyranose-2-one, levoglucosenol, levoglucosanol, tetrahydrofuran-2,5-dimethanol, 2-hydroxymethyltetrahydropyran, 1,2,5,6-tetrahydroxyhexane, 1,2,6-hexanetriol, and 2-hydroxymethyl-5-hydroxytetrahydropyran, each of
15 which can be a useful chemical intermediate in the synthesis of 1,6-hexanediol. Product mixture (II) comprises one or more of 1,2,6-hexanetriol, tetrahydrofuran-2,5-dimethanol, 2-hydroxymethyl-5-hydroxytetrahydropyran, 1,6-hexanediol, 1,2-hexanediol, 1-hexanol, and 2-hydroxymethyltetrahydropyran.

20 In the processes disclosed herein, levoglucosanol may be produced and converted as a mixture of stereoisomers (threo- and erythro isomer); tetrahydrofuran-2,5-dimethanol may be produced and converted as a mixture of stereoisomers (cis- and trans isomer with respect to the hydroxymethyl groups attached to the tetrahydrofuran ring: one cis meso
25 compound a trans racemate); 2-hydroxymethyltetrahydropyran may be produced and converted as a racemate; 1,2,5,6-tetrahydroxyhexane may be produced and converted as a mixture of stereoisomers differing only in the configuration of the C2 and C5 carbon atom (one meso compound and a racemate); 1,2,6-hexanetriol may be produced and converted as
30 racemate; 2-hydroxymethyl-5-hydroxytetrahydropyran may be produced

and converted as a mixture of stereoisomers (two racemic stereoisomers); and 1,2-hexanediol may be produced and converted as a racemate.

For contacting with hydrogen in the presence of a first hydrogenation catalyst, the levoglucosenone is typically dissolved or suspended in a liquid medium, referred to herein as a "solvent". Suitable solvents include water, a C₁-C₂₀ alcohol, a C₂-C₂₀ ether, a C₂-C₂₀ ester, or mixtures thereof. Examples of suitable alcohols which are commercially available include methanol, ethanol, propanol, butanol, and hexanol. Examples of suitable ethers which are commercially available include dibutylether, dihexylether, methyl-t-butyl-ether, tetrahydrofuran, and dioxane. Examples of suitable esters which are commercially available include ethyl acetate, butyl acetate, methyl butyrate, ethyl butyrate, butyl butyrate and hexyl acetate.

The concentration of levoglucosenone in the solvent, whether dissolved or as a suspension, is between about 1 wt% and about 50 wt%; in some embodiments it is between and optionally includes any two of the following values: 1 wt%, 5 wt%, 10 wt%, 15 wt%, 20 wt%, 25 wt%, 30 wt%, 35 wt%, 40 wt%, 45 wt%, and 50 wt%. It is anticipated that higher concentrations of levoglucosenone in water, or even neat levoglucosenone, could be used. The optimal concentration will depend on the intended reaction conditions.

The first hydrogenation catalyst can be homogeneous or heterogeneous. The first hydrogenation catalyst comprises one or more of supported platinum catalysts, supported palladium catalysts, supported ruthenium catalysts, supported nickel catalysts, catalysts derived from nickel-aluminum alloys, catalysts derived from cobalt-aluminum alloys, and organophosphorous or organometallic complexes of Rh, Ir, Ru, or Ti. Examples of commercially available catalysts suitable for use as the first hydrogenation catalyst include RANEY® nickel, RANEY® cobalt, palladium on carbon, palladium on alumina, platinum on carbon, ruthenium on carbon, and organophosphorous or organometallic

complexes of Rh, Ir, Ru, or Ti, for example chlorotris(triphenylphosphine)rhodium(I) [CAS# 14694-95-2], (tricyclohexylphosphine)(1,5-cyclooctadiene)(pyridine)iridium(I)hexafluorophosphate [CAS# 64536-78-3], bis(pentamethylcyclopentadienyl)titanium(IV) dichloride [CAS# 11136-36-0], chloro[*rac*-2,2'-bis(diphenylphosphino)-1,1'-binaphthyl](*p*-cymene) ruthenium(II) chloride [RuCl(*p*-cymene)(binap)]Cl [CAS# 145926-28-9], and a combination of bis(diphenylphosphino)ethane [CAS# 1663-45-2] and bis(1,5-cyclooctadiene)rhodium(I) tetrafluoroborate [CAS# 35138-22-8].

Hydrogen, optionally in combination with an inert gas such as nitrogen or argon, is contacted with the levoglucosenone and the first hydrogenation catalyst at a total applied pressure which can range from ambient pressure (i.e., 0 applied pressure) to about 1000 psi. In some embodiments, the applied pressure is between and optionally includes any two of the following values: 0, 50, 100, 200, 300, 400, 500, 600, 700, 800, 900, and 1000 psi. If an inert gas is used in combination with the hydrogen, the amount of the inert gas should be such that it does not negatively impact the formation of product mixture (I).

The levoglucosenone, first hydrogenation catalyst, and hydrogen are contacted at a first temperature between about 25°C and about 150°C, for example between about 50°C and about 100 °C. In some embodiments, the temperature is between and optionally includes any two of the following values: 25°C, 30°C, 40°C, 50°C, 60°C, 70°C, 80°C, 90°C, 100°C, 110°C, 120°C, 130°C, 140°C, and 150°C. The contacting is performed for a period of time sufficient to react at least about 90%, for example at least about 95%, of the sum of levoglucosenone and any 1,6-anhydro-3,4-dideoxy-*p*-D-pyranose-2-one isomers and/or 1,6-anhydro-3,4-dideoxy-*p*-erythro-hex-3-enopyranose isomers to one or more chemical species, including levoglucosanol.

At the end of the designated contacting time, if desired, the first hydrogenation catalyst can be separated from product mixture (I) by methods known in the art, for example by filtration. After separation from the catalyst, if desired the product mixture components, including one or
5 more of levoglucosan, tetrahydrofuran-2,5-dimethanol, 2-hydroxymethyltetrahydropyran, 1,2,5,6-tetrahydroxyhexane, 1,2,6-hexanetriol, and 2-hydroxymethyl-5-hydroxytetrahydropyran, can be separated from one another using any appropriate method known in the art, for example distillation. In one embodiment, product mixture (I)
10 comprises levoglucosan. In one embodiment, product mixture (I) comprises tetrahydrofuran-2,5-dimethanol. In one embodiment, product mixture (I) comprises 2-hydroxymethyltetrahydropyran. In one embodiment, product mixture (I) comprises 1,2,5,6-tetrahydroxyhexane. In one embodiment, product mixture (I) comprises 1,2,6-hexanetriol. In
15 one embodiment, product mixture (I) comprises 2-hydroxymethyl-5-hydroxytetrahydropyran.

Product mixture (I) is then heated in the presence of hydrogen and a second hydrogenation catalyst at a temperature between about 120°C and about 260°C to form product mixture (II). In one embodiment, product
20 mixture (I) is dissolved or suspended in a solvent, which can be the same or different from any solvent used with the levoglucosanone in the first step of the process. In one embodiment, product mixture (I) is used without any added solvent.

In some embodiments, the second hydrogenation catalyst
25 comprises a metal M1 and a metal M2 or an oxide of M2, and optionally a solid support, wherein:

M1 is Pd, Pt, or Ir; and M2 is Mo, W, V, Mn, Re, Zr, Ni, Cu, Zn, Cr, Ge, Sn, Ti, Au, or Co; or

M1 is Rh and M2 is Re, Mo, W, V, Mn, Ni, Cu, Zn, Cr, Ge,
30 Sn, Ti, Au, or Zr; or

M1 is Ag, Au or Co; and M2 is Re, Mo, or W;

M 1 is Cu, Pd, Fe, or Ni; and M2 is Re, Mo, Cu, Zn, Cr, Ge, Sn, or W; or

M 1 is Ag, Pt, Cu, or Au, and M2 is Ni, Fe, Sn, Ge, or Ir; or

M 1 is Co and M2 is Fe; or

5 M 1 is Ni and M2 is Co or Fe; or

M 1 is Mn and M2 is Cr.

The M 1 and M2 components of the catalysts may be derived from any appropriate metal compound. Examples include but are not limited to: rhodium (III) chloride hydrate, copper (II) nitrate hydrate, nickel (II) chloride hexahydrate, iridium (IV) chloride hydrate, iron (III) nitrate nonahydrate, tetraammineplatinum (II) nitrate, platinum chloride, hexachloroplatinic acid, tetrachloroplatinic acid, palladium chloride, palladium nitrate, palladium acetate, iridium trichloride, ammonium perrhenate, ammonium tungsten oxide hydrate, ammonium molybdate hydrate, manganese (II) nitrate hydrate, and ammonium vanadium oxide.

The loading of M 1 may be 0.1 - 50% but preferably 0.5 - 5% by weight, based on the weight of the prepared catalyst (i.e., including the solid catalyst support where present). The loading of M2 may be 0.1 - 99.9%, preferably 2-10%. Preferably the atomic ratio of M 1 to M2 in catalysts containing both M 1 and M2 is 1:0.5 to 1:5. Optionally, M2 may be incorporated into the catalyst support or serve as the catalyst support, e.g. Pt supported on tungsten oxide or molybdenum oxide. Regarding the catalyst, all percentages are interpreted as weight percent relative to the weight of the prepared catalyst.

25 In some embodiments, the second hydrogenation catalyst comprises metals M 1, M2, and M3 and optionally a support, wherein M 1 is Mn, Cr, V, or Ti; M2 is Ni, Co, or Fe; and M3 is Cu, Ag, Pt, Pd or Au; or M 1 is Pt or Rh; M2 is Cu, Ni or Pd; and M3 is Mo, Re or W.

In some embodiments, the second hydrogenation catalyst comprises a Cu component; optionally a heteropoly acid component;

optionally a second metal or metal oxide; optionally one or more promoters; and optionally a support, wherein:

the Cu component comprises Cu or a Cu oxide;

the heteropoly acid component is $H_3[P(W_3O_{10})_4]$,

5 $H_4[Si(W_3O_{10})_4]$, $Cs_{2.5}Ho_{0.5}[P(W_3O_{10})_4]$; phosphomolybdic acid, or silicomolybdic acid;

the second metal or metal oxide is Cr, a Cr oxide, Ni, a Ni oxide, Mn, a Mn oxide, Zn, or a Zn oxide; and

the one or more promoters are selected from the group

10 consisting of Ba, Ce, Mg, Na, K.

In some embodiments, the catalyst comprises CuO. In some embodiments, the catalyst comprises from 2 wt% to 98 wt% CuO and further comprises from 98 wt% to 2 wt% of at least one oxide selected from the group consisting of zinc oxide (ZnO), magnesium oxide (MgO),
 15 barium oxide (BaO), chromium oxide (Cr_2O_3), silica (SiO_2), alumina (Al_2O_3), nickel oxide (NiO), manganese oxide (MnO_2), sodium oxide (Na_2O), potassium oxide (K_2O), cerium oxide (CeO_2), lanthanum oxide (La_2O_3), iron oxide (Fe_2O_3), silver oxide (Ag_2O) and cobalt oxide (Co_2O_3), based on the total weight of the catalyst. In one embodiment, the catalyst
 20 further comprises ZnO. In one embodiment, the catalyst further comprises MgO. In some embodiments, the catalyst further comprises carbon.

Examples of suitable commercially available catalysts include but are not limited to the following: CuO/ZnO, BaO/CuO/ Cr_2O_3/SiO_2 , BaO/CuO/ Cr_2O_3 , BaO/CuO/ MnO_2/Cr_2O_3 , CuO/ SiO_2 , CuO/ Al_2O_3 , CuO/NiO/ Al_2O_3 ,
 25 CuO/ Cr_2O_3/MnO_2 , CuO/ Cr_2O_3 , CuO/ MnO_2/Al_2O_3 , CuO/ Cr_2O_3 , CuO/ZnO/ Al_2O_3 , CuO/ $SiO_2/Cr_2O_3/MgO$, CuO/ZnO/ $CeO_2/Al_2O_3/Na_2O/C$, CuO/NiO, and NiO/CuO/ $K_2O/Cr_2O_3/CaF_2$. In one embodiment, the catalyst comprises CuO/ZnO, CuO/ZnO/ Al_2O_3 , or CuO/ZnO/ $CeO_2/Al_2O_3/Na_2O/C$.

30 Hydrogenation catalysts suitable for use in the second step of the processes disclosed herein can be synthesized by, for example, mixing

the Cu component with a solution of the heteropolyacid component, evaporating the solvent (e.g., water) to dryness and calcining the resulting powder. The heteropolyacid component may itself be provided as a solution of heteropolyacid and a basic salt, for example, a solution
5 containing a mixture of $H_3[P(W_3O_{10})_4]$ and cesium carbonate in suitable proportions to form $Cs_{2.5}Ho_{0.5}[P(W_3O_{10})_4]$

In some embodiments, it is useful to utilize a solid catalyst support to enhance the stability and economic feasibility of the process. Examples of supports include, without limitation: WO_3 , SiO_2 , Al_2O_3 , carbon, TiO_2 ,
10 ZrO_2 , CeO_2 , $SiO_2-Al_2O_3$, clays (e.g., montmorillonite), SiO_2-TiO_2 , tungstated ZrO_2 , zeolites (such as H-Y zeolite), V_2O_5 , and MOO_3 . In other embodiments, it may be desirable to not have a solid support.

The prepared hydrogenation catalyst can be in any physical form typical for heterogeneous catalysts, including but not limited to: powdered
15 (also known as "fluidized") forms with 0.01 - 150 μm particle size, formed tablets, extrudates, spheres, engineered particles having uniform 0.5 - 10 mm size, monolithic structures on which surfaces the catalyst is applied, or combinations of two or more of the above. When a solid support is utilized a catalyst containing both M1 and M2, it is desirable that M1 be intimately
20 associated with the M2 component, the M3 component, or both, as measured by transmission electron microscopy with energy dispersive spectroscopy. It is further preferable that the particle size of the M1 component be less than 10 nm and most preferably less than 3 nm as measured by the same techniques. In this case, particle size of the M1
25 component may be interpreted as particle size of a mixture of the M1 and M2 components, an alloy of the M1 and M2 components, a particle of the M1 component adjacent to a particle of the M2 component, or a particle of the M1 component on the support which contains the M2 component.

The second hydrogenation catalysts can be synthesized by any
30 conventional method for preparing catalysts, for example, deposition of metal salts from aqueous or organic solvent solutions via impregnation or

incipient wetness, precipitation of an M1 component and / or an M2 component and/or an M3 component, or solid state synthesis. Preparation may comprise drying catalyst materials under elevated temperatures from 30-250 °C, preferably 50-150 °C; calcination by heating in the presence of
5 air at temperatures from 250-800°C, preferably 300-450°C ; and reduction in the presence of hydrogen at 100-400°C, preferably 200-300 °C, or reduction with alternative reducing agents such as hydrazine, formic acid or ammonium formate. The above techniques may be utilized with powdered or formed particulate catalyst materials prepared by tableting,
10 extrusion or other techniques common for catalyst synthesis. Where powdered catalyst materials are utilized, it will be appreciated that the catalyst support or the resulting catalyst material may be sieved to a desired particle size and that the particle size may be optimized to enhance catalyst performance.

15 Hydrogen, optionally in combination with an inert gas such as nitrogen or argon, is present during the heating of product mixture (I) in the presence of the second hydrogenation catalyst. The total applied pressure can range from 100 psi to about 2000 psi. In some embodiments, the applied pressure is between and optionally includes any
20 two of the following values: 100, 200, 300, 400, 500, 600, 700, 800, 900, and 2000 psi. If an inert gas is used in combination with the hydrogen, the amount of the inert gas should be such that it does not negatively impact the formation of product mixture (II).

25 The second temperature is between about 120°C and about 260°C, for example between about 140°C and about 200°C. In some embodiments, the temperature is between and optionally includes any two of the following values: 120°C, 130°C, 140°C, 150°C, 160°C, 170°C, 180°C, 190°C, 200°C, 210°C, 220°C, 230°C, 240°C, 250°C, and 260°C.

30 At the end of the designated heating time, if desired, the second hydrogenation catalyst can be separated from product mixture (II) by methods known in the art, for example by filtration. After separation from

the catalyst, if desired the product mixture components, including one or more of tetrahydrofuran-2,5-dimethanol, 2-hydroxymethyltetrahydropyran, 1,2,6-hexanetriol, 2-hydroxymethyl-5-hydroxytetrahydropyran, 1,2-hexanediol, 1-hexanol, and 1,6-hexanediol can be separated from one
5 another using any appropriate method known in the art, for example distillation. In one embodiment, product mixture (II) comprises 1,6-hexanediol. In one embodiment, product mixture (II) comprises tetrahydrofuran-2,5-dimethanol. In one embodiment, product mixture (II) comprises 2-hydroxymethyltetrahydropyran. In one embodiment, product
10 mixture (II) comprises 1,2,6-hexanetriol. In one embodiment, product mixture (II) comprises 2-hydroxymethyl-5-hydroxytetrahydropyran. In one embodiment, product mixture (II) comprises 1,2-hexanediol. In one embodiment, product mixture (II) comprises 1-hexanol.

The first and second steps of the processes can be run in batch or
15 continuous modes, in liquid phase, gas phase, or biphasic conditions. In a batch or continuous mode of operation, the amount of each catalyst used will depend on the specific equipment configuration and reaction conditions.

EXAMPLES

20 The methods disclosed herein are illustrated in the following examples. From the above discussion and these examples, one skilled in the art can ascertain the essential characteristics of this invention, and without departing from the spirit and scope thereof, can make various changes and modifications of the invention to adapt it to various uses and
25 conditions.

All commercial materials were used as received unless stated otherwise and were obtained from Sigma-Aldrich (St. Louis, MO) unless stated otherwise. Levoglucosenone (90% purity) was obtained from TimTec LLC (Newark, DE). 2,5-Tetrahydrofurandimethanol was obtained
30 from the PenAKem corporation (Memphis, TN). 5% Platinum on carbon (Pt/C) and 5% palladium on carbon (Pd/C) were received from the Aldrich

Chemical Company (Aldrich catalogue numbers 20,5931 and 33,01 2-4, respectively). 1, 6-anhydro- 3,4-dideoxy- p-D-pyranose-2-one ("K128") and 1, 6-anhydro-3,4-dideoxy- p-erythro-hex-3-enopyranose ("A128") were prepared as described in Journal of Organic Chemistry, 63 (1998) 8 133-8144.

Copper catalysts of various compositions were received from different commercial sources as described below. All copper catalysts were ground with a mortar and pestle and passed through a 0.01 65" mesh sieve prior to use.

Table 1. Copper Catalysts Used in Some of the Examples

Catalyst Name	Vendor	Vendor Catalog Number	Composition
BaO/CuO/Cr ₂ O ₃	SuedChemie	G-22	CuO 41%, Cr ₂ O ₃ 43%, BaO 12%
BaO/CuO/MnO ₂ /Cr ₂ O ₃	SuedChemie	G-99B-0	CuO 47%, Cr ₂ O ₃ 46%, MnO ₂ 4%, BaO 2%
CuO/MnO ₂ /Al ₂ O ₃	SuedChemie	T-4489	CuO 56%, MnO ₂ 10%, Al ₂ O ₃ 34%
CuO/ZnO/Al ₂ O ₃	SuedChemie	ActiSorb®301	CuO 53%, ZnO 27%, Al ₂ O ₃ 20%
CuO/ZnO	SuedChemie	T-2130	CuO 33%, ZnO 66%
CuO/SiO ₂ (BASF Cu-0860)	BASF	Cu-0860	Decan-1-ol 30.0-50.0%, Copper 25.0-40.0%, Silicon dioxide 10.0-20.0%, Calcium oxide 0.0-10.0%, Copper oxide 0.0-10.0%, Palygorskite 7 0.0-7.0%, Crystalline silica 0.0-1.0 %
CuO/ZnO/CeO ₂ /Al ₂ O ₃ / Na ₂ O/C	Johnson Matthey	PRICAT CZ 30/18 T 6*5 mm	CuO 39 wt.%, ZnO 45 wt.%, Ce ₂ O ₃ 2 wt.%,

			Al ₂ O ₃ 8 wt.%, Na ₂ O 0.3 wt.%, Graphite 2.5wt.%, H ₂ O, CO ₂ Balance
--	--	--	--


The Pt/W/TiO₂ catalyst was synthesized using the following procedure. 0.92 Grams of Aerolyst 7708 TiO₂ (Evonik) that had been ground with a mortar and pestle and passed through a 0.0165" mesh
5 sieve, then wetted with 1.0 ml of deionized water, was impregnated with 0.08 g of tetraammineplatinum (II) nitrate (Strem, Cat # 78-201 0) dissolved in 1.0 ml of deionized water. The resulting wet suspension was vortexed for 15 minutes and then vacuum-dried at 110 °C overnight. The resulting precipitate was wetted with 1.0 ml of deionized water, and then 0.0535 g
10 of ammonium tungsten oxide hydrate (para analogue) (Alfa, stock # 22640) which had been thoroughly dissolved in 2.0 ml of deionized water was added on to the wetted precipitate. The resulting wet suspension was vortexed for 15 minutes and then vacuum-dried at 110 °C overnight. After reaching room temperature, the material was transferred to a ceramic boat
15 and calcined in air at 400 °C for three hours. The calcined Pt/W/TiO₂ catalyst had a Pt loading of 4 wt% based on the total weight of the catalyst, and a 1:1 molar ratio of Pt:W .

Reactor feeds and reaction products were analyzed by gas chromatography using standard GC and GC/MS equipment: Agilent
20 5975C, HP5890, Stabilwax Column Restek Company Bellefonte, PA (30m X 0.25 mm 0.5 micron film thickness). Chemical components of reaction product mixtures were identified by matching their retention times and mass spectra to those of authentic samples.


The following abbreviations are used in the examples: "°C" means
25 degrees Celsius; "wt%" means weight percent; "g" means gram; "min" means minute(s); "μL" means microliter; "wt%" means weight percent; "RV(s)" means reaction vessel(s); "PSI" means pounds per square inch; "mg/g" means milligram per gram; "μm" means micrometer; "mL" means milliliter; "mm" means millimeter and "mL/min" means milliliter per minute;
30 "MPa" means megapascal; "GC" means gas chromatography; "MS" means "mass spectrometry", "Ex" means Example.

Examples 1-4

Examples 1 through 4 demonstrate the conversion of LGone to a first product mixture at 60°C (Examples 1A, 2A, 3A, and 4A) and the subsequent conversion of the first product mixture to a second product mixture at 180°C (Examples 1B, 2B, 3B, and 4B), as shown in Reaction Schemes A and B, respectively. In these Examples, the same catalyst was used for the first (A) and second (B) process steps.

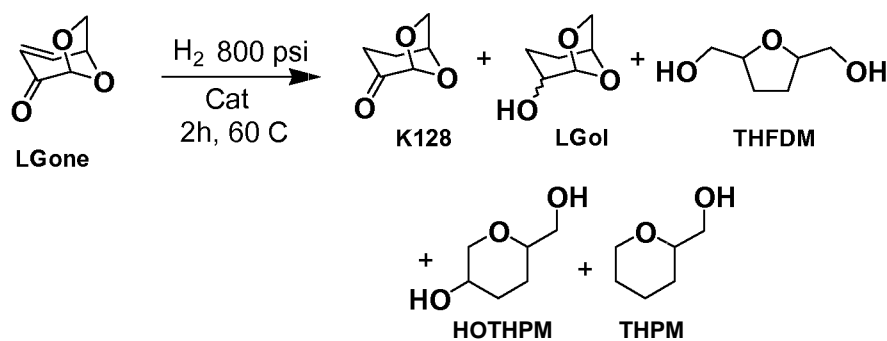

Reaction Scheme A

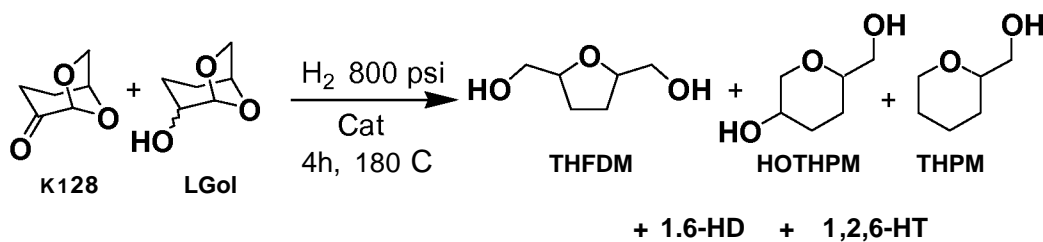

Reaction Scheme B

10

In a glass vial equipped with a magnetic stir bar (1.5 mL glass vials, ROBO Autosampler Vial, VWR International, Radnor, PA), 0.75 mL of solvent (water, ethanol or ethyl acetate [abbreviated as EtOAc]) were added to 37.5 mg of levoglucosenone and about 20 mg of Pt/C or of Pd/C as catalyst as indicated in Table 2 below. The vials were capped with a perforated septum to limit vapor transfer rates. The vials were placed in a stainless steel (SS316) parallel pressure reactor having 8 individual wells. The reactor was connected to a high pressure gas manifold and the contents were purged with nitrogen gas (1000 psi) 3 times. About 800 psi of H₂ was then added and the reactor was heated to 60°C. After 2 h the reactor was allowed to cool to room temperature and the pressure was released. Under inert gas atmosphere a 100 μ L sample of the first reaction

20

product was taken from each vial, diluted with n-propanol and analyzed by GC and GC/MS. Results for the first reaction products are given in Table 3.

The vials containing the undiluted Step 1 reaction products and catalyst were returned to the reactor, which was then repressurized with 800 psi H₂ and allowed to heat to 180°C. After 4 h the reactor was allowed to cool to room temperature within 2 h and depressurized. The second reaction solutions were diluted with n-propanol, filtered through a standard 5 micron disposable filter, and analyzed by GC and GC/MS. Results for the second reactor products are given in Table 3.

Table 2. Catalysts and Solvents Used in Examples 1 through 4.

Example	Process Step	Catalyst	Solvent
1A	First	Pt/C	H ₂ O
1B	Second	Pt/C	H ₂ O
2A	First	Pd/C	EtOAc
2B	Second	Pd/C	EtOAc
3A	First	Pd/C	H ₂ O
3B	Second	Pd/C	H ₂ O
4A	First	Pd/C	EtOH
4B	Second	Pd/C	EtOH

Table 3. Product Distributions (% mol, based on GC area% corrected using relative response factors) for Examples 1 through 4.

Ex	LGone	K128	LGol	THFDM	HOTHPM	THPM	1, 6-HD	1,2,6-HT
1A	<1	2	94	3	1	0	-	-
1B	<1	-	<1	84	7	2	5	1
2A	<1	0	95	2	2	1	-	-
2B	7	-	93	2	2	0	3	0
3A	<1	0	87	2	3	7	-	-
3B	-	-	5	70	20	5	0	0

4A	<1	56	42	1	1	0	-	-
4B	n/a *	n/a	n/a	n/a	n/a	n/a	n/a	n/a

* "n/a" means not available. The vial containing Example 4B reaction solution broke before the contents could be analyzed.

Example 5

5 Conversion of THFDM to a product mixture comprising 1, 6-HD and 1,2,6-HT using a Pt/W/TiO₂ catalyst at 160°C and a 6 hour reaction time

To a stainless steel (SS316) pressure reactor equipped with a magnetic stir bar and 5 ml of water were added 250 mg of 2,5-tetrahydrofurandimethanol (-95% pure) and about 250 mg of 4% Pt/W/TiO₂ catalyst. The reactor was sealed, connected to a high pressure gas manifold, and purged with nitrogen gas (1000 psi) three times. About 800 psi of hydrogen was then added and the reactor was heated to 160°C. After 6 h, the reactor was allowed to cool to room temperature within 2 h and depressurized. The reaction product solution was diluted with n-propanol and a known amount of diethyleneglycoldiethyl ether as an internal standard and filtered through a standard 5 micron disposable filter. A sample was taken and analyzed by GC and GC/MS; results are given in Table 4.

Table 4. Results for Example 5

	THPM	1,2-HD	1,5-HD	1,5-PD	1, 6-HD	THFDM	1,2,6-HT	others
m [mg]	2	2	10	0	132	7	53	6
n [mmol]	0.01	0.02	0.09	0	1.11	0.05	0.40	0.05
Yield	1%	1%	5%	0%	62%	-	22%	3%

Example 6

Conversion of THFDM to a product mixture comprising 1, 6-HD and 1,2,6-HT using a Pt/W/TiO₂ catalyst at 160°C and a 24 hour reaction time

25 Example 6 was conducted the same way as Example 5 but the reaction time was 24 h instead of 6 h. Results are given in Table 5.

Table 5. Results for Example 6

	THPM	1,2-HD	1,5-HD	1,5-PD	1, 6-HD	THFDM	1,2,6-HT	others
m [mg]	0.8	14.0	17.0	3.2	177.0	0.0	0.0	~8.4
n [mmol]	0.0	0.1	0.1	0.0	1.5	0.0	0.0	n.d.
Yield	0%	7%	4%	2%	83%	-	0%	4%

Example 7

Conversion of LGone to a first product mixture comprising LGol at 60 °C

5 To a stainless steel (SS316) pressure reactor equipped with a magnetic stir bar and 5 ml of water were added 250 mg of levoglucosenone (-90% pure, 10% water) and about 50 mg of 5% Pt/C catalyst. The reactor was sealed, connected to a high pressure gas manifold, and purged with nitrogen gas (1000 psi) three times. About 800
10 psi of hydrogen was then added and the reactor was heated to 60°C. After 2 h, the temperature was increased to 100°C over the course of 30 min. After 2 h at 100 °C the reactor was allowed to cool to room temperature within 2 h and depressurized. The reactor was rinsed with water and the reaction product mixture was filtered through a standard 5
15 micron disposable filter. GC analysis of the filtered product mixture showed quantitative conversion of the levoglucosenone to the corresponding the alcohol levoglucosanol (LGol).

The filtered product mixture of Example 7 was used as the feed solution for Examples 8 through 15, where it is referred to as the "first
20 product mixture".

Example 8 through Example 15

Conversion of a first product mixture comprising LGol to a second product mixture comprising THFDM and HOTHM

25 In these Examples, 0.75 ml portions of the filtered product mixture from Example 7, referred to here as the "first product mixture", were placed in each of eight glass vials (1.5 mL glass vials, ROBO Autosampler Vial, VWR International, Radnor, PA) together with the amount of catalyst indicated in Table 6. Each portion of the first product mixture contained
30 about 27 mg of LGol. Each vial was equipped with a magnetic stir bar

(magnetic stirbar 7 x 2 mm, VWR International, Radnor, PA) and capped with a perforated septum to limit vapor transfer rates. The vials were placed in a stainless steel (SS316) parallel pressure reactor having 8 individual wells. The reactor was connected to a high pressure gas manifold and the contents were purged with nitrogen gas (1000 psi) 3 times. About 1200 psi of hydrogen was added while the reaction solutions were stirred. The reactor was then heated to 200°C and the pressure was adjusted to 2000 psi. After 4 h the reactor was allowed to cool to room temperature within 2 h and depressurized. The second product mixture was diluted with n-propanol and a known amount of diethylene glycol diethyl ether as an internal standard and filtered through a standard 5 micron disposable filter for GC and GC/MS analysis. Results are given in Table 6.

Table 6. Results for Examples 8-15

Ex	Catalyst	Catalyst amount [mg]	Yield mol %		
			THFDM	HOTHPM	Other alcohols and unidentified by-products
8	CuO/ZnO	60	38	7	54
9	BaO/CuO/Cr ₂ O ₃	60	50	7	44
10	BaO/CuO/MnO ₂ /Cr ₂ O ₃	60	51	7	42
11	CuO/SiO ₂	60	54	8	38
12	CuO/ZnO/Al ₂ O ₃	60	62	8	30
13	CuO/ZnO/CeO ₂ /Al ₂ O ₃ /Na ₂ O/C	60	52	5	43
14	CuO/MnO ₂ /Al ₂ O ₃	60	54	6	40
15	5% Pt/C	5	66	10	24

15

CLAIMS

What is claimed is:

- 5 1. A process comprising:
- a) contacting levoglucosenone with hydrogen in the presence of a first hydrogenation catalyst at a first temperature between about 25°C and about 150 °C to form product mixture (I); and
 - b) heating product mixture (I) in the presence of hydrogen and a
10 second hydrogenation catalyst at a second temperature between about 120 °C and about 260 °C to form product mixture (II).
2. The process of claim 1, wherein product mixture (I) comprises one or more of levoglucosenol, levoglucosanol, tetrahydrofuran 2,5-dimethanol,
15 2-hydroxymethyltetrahydropyran, 1,2,5,6-tetrahydroxyhexane, 1,2,6-hexanetriol, and 2-hydroxymethyl-5-hydroxytetrahydropyran.
3. The process of claim 1, wherein product mixture (II) comprises one or more of 1,2,6-hexanetriol, tetrahydrofuran 2,5-dimethanol, 2-
20 hydroxymethyl-5-hydroxytetrahydropyran, 1,6-hexanediol, 1,2-hexanediol, 1-hexanol, and 2-hydroxymethyltetrahydropyran.
4. The process of claim 3, wherein product mixture (II) comprises 1,6-
25 hexanediol.
5. The process of claim 1, wherein the first hydrogenation catalyst comprises one or more of supported platinum catalysts, supported palladium catalysts, supported ruthenium catalysts, supported nickel catalysts, catalysts derived from nickel-aluminum alloys, catalysts derived
30 from cobalt-aluminum alloys, and organophosphorous or organometallic complexes of Rh, Ir, Ru, or Ti.

6. The process of claim 1, wherein the second hydrogenation catalyst comprises a metal M1 and optionally a metal M2 or an oxide of M2, and optionally a support, wherein:

M1 is Pd, Pt, or Ir; and M2 is Mo, W, V, Mn, Re, Zr, Ni, Cu,
5 Zn, Cr, Ge, Sn, Ti, Au, or Co; or

M1 is Rh and M2 is Re, Mo, W, V, Mn, Ni, Cu, Zn, Cr, Ge,
Sn, Ti, Au, or Zr; or

M1 is Ag, Au or Co; and M2 is Re, Mo, or W;

M1 is Cu, Pd, Fe, or Ni; and M2 is Re, Mo, Cu, Zn, Cr, Ge,
10 Sn, or W; or

M1 is Ag, Pt, Cu, or Au, and M2 is Ni, Fe, Sn, Ge, or Ir; or

M1 is Co and M2 is Fe; or

M1 is Ni and M2 is Co or Fe; or

M1 is Mn and M2 is Cr.

15

7. The process of claim 1, wherein the second hydrogenation catalyst comprises a catalyst comprising Pt, Cu, Ni, Pd, Rh, Ir, Ru, or Fe on a WO_3 or WO_x support.

20 8. The process of claim 1, wherein the second hydrogenation catalyst comprises a catalyst comprising metals M1, M2, and M3 and optionally a support, wherein:

M1 is Mn, Cr, V, or Ti; M2 is Ni, Co, or Fe; and M3 is M1 is;
and M3 is Cu, Ag, Pt, Pd or Au; or

25 M1 is Pt or Rh; M2 is Cu, Ni or Pd; and M3 is Mo, Re or W.

9. The process of claim 1, wherein the second hydrogenation catalyst comprises a Cu component, optionally a heteropoly acid component;

optionally a second metal or metal oxide; optionally one or more promoters; and optionally a support, wherein:

the Cu component comprises Cu or a Cu oxide;

the heteropoly acid component is $H_3[P(W_3O_{10})_4]$,
 5 $H_4[Si(W_3O_{10})_4]$, $Cs_{2.5}Ho_{0.5}[P(W_3O_{10})_4]$; phosphomolybdic acid, or silicomolybdic acid;

the second metal or metal oxide is Cr, a Cr oxide, Ni, a Ni oxide, Mn, a Mn oxide, Zn, or a Zn oxide; and

the one or more promoters are selected from the group
 10 consisting of Ba, Ce, Mg, Na, K.

10. The process of claim 1, wherein the catalyst comprises from 2 weight percent to 98 weight percent CuO, and further comprises from 98 weight percent to 2 weight percent of at least one oxide selected from the group
 15 consisting of zinc oxide, magnesium oxide, barium oxide, chromium oxide, silica, alumina, nickel oxide, manganese oxide, sodium oxide, potassium oxide, cerium oxide, lanthanum oxide, iron oxide, silver oxide, and cobalt oxide, based on the total weight of the catalyst.

20 11. The process of claim 1, wherein the second hydrogenation catalyst comprises $BaO/CuO/Cr_2O_3/SiO_2$, $BaO/CuO/Cr_2O_3$, $BaO/CuO/MnO_2/Cr_2O_3$, CuO/SiO_2 , CuO/Al_2O_3 , $CuO/NiO/Al_2O_3$, $CuO/Cr_2O_3/MnO_2$, CuO/Cr_2O_3 , $CuO/MnO_2/Al_2O_3$, CuO/Cr_2O_3 , $CuO/SiO_2/Cr_2O_3/MgO$, CuO/NiO , or $NiO/CuO/K_2O/Cr_2O_3/CaF_2$.

25 12. The process of claim 1, wherein steps a) and b) further comprise a solvent, and the solvent comprises water, a C₁-C₂₀ alcohol, a C₂-C₂₀ ether, a C₂-C₂₀ ester, or mixtures thereof.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2012/071893**A. CLASSIFICATION OF SUBJECT MATTER***C07C 29/94(2006.01)i, C07C 31/20(2006.01)1, B01J 23/44(2006.01)1*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C07C 29/94; C07C 31/20; C07C 27/00; C07B 61/00; C07C 31/13; /; C07C 35/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: process, 1,6-hexanediol, levoglucosenone, hydrogenation catalyst, 1,2,6-hexanetriol

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6407294 B1 (BREITSCHIEDEL, BORIS et al.) 18 June 2002 See abstract and claims 1-12 .	1-12
A	w0 2010-115759 A2 (BASF SE et al.) 14 October 2010 See abstract and claims 1-14 .	1-12
A	EP 1243573 A1 (ASAHI KASEI KABUSHIKI KAISHA) 25 September 2002 See abstract and claims 1-22 .	1-12
A	US 06008418 A (BAUR, KARL GERHARD et al.) 28 December 1999 See abstract and claims 1-10 .	1-12
A	US 2006-0014988 A1 (FISCHER, ROLF-HARTMUTH) 19 January 2006 See abstract and claims 1-16 .	1-12

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 April 2013 (29.04.2013)

Date of mailing of the international search report

29 April 2013 (29.04.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan
City, 302-70 1 Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

JUNG, Da Won

Telephone No. 82-42-481-8491



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/071893

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6407294 B1	18.06.2002	CA 2305590 A1	08.07.1999
		CN 1097038 C	25.12.2002
		CN 1272835 A	08.11.2000
		DE 19757554 A1	24.06.1999
		EP 1042259 A1	11.10.2000
		EP 1042259 B1	13.03.2002
		ES 2174528 T3	01.11.2002
		JP 2001-527056 A	25.12.2001
		KR 10-0510000 B1	26.08.2005
		WO 99-33773 A1	08.07.1999
		WO 2010-1 15759 A2	14.10.2010
CN 102388008 A	21.03.2012		
EP 2417087 A2	15.02.2012		
JP 2012-523386 A	04.10.2012		
KR 201 10137824 A	23.12.2011		
SG 174379 A1	28.10.2011		
US 2012-0035399 A1	09.02.2012		
WO 2010-1 15759 A3	14.10.2010		
EP 1243573 A1	25.09.2002	AU 1055701 A	06.06.2001
		CN 1224597 CO	26.10.2005
		CN 1391549 AO	15.01.2003
		EP 1243573 A4	30.03.2005
		JP 2001-278822 A	10.10.2001
		JP 4683807 B2	18.05.2011
		KR 10-0546986 B1	26.01.2006
		TW 538029 A	21.06.2003
		TW 538029 B	21.06.2003
		US 6706932 B1	16.03.2004
		WO 01-34543 A1	17.05.2001
US 06008418 A	28.12.1999	CA 2247991 C	27.06.2006
		CN 1092174 C	09.10.2002
		CN 1212681 A	31.03.1999
		EP 0883590 A1	03.11.1999
		EP 0883590 B1	02.05.2001
		JP 05-124366 B2	02.11.2012
		JP 2000-505468 A	09.05.2000
		JP 2009-00 1579 A	08.01.2009
		JP 2012-255023 A	27.12.2012
		KR 10-0465468 B1	28.02.2005
		WO 97-31882 A1	04.09.1997
US 2006-0014988 A1	19.01.2006	AT 334956 T	15.08.2006
		AU 2003-299298 A1	09.07.2004
		AU 2003-299298 A8	09.07.2004
		CA 2508727 A1	01.07.2004
		CN 1313425 C	02.05.2007

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/071893

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 1723180 A	18.01.2006
		DE 10258316 A1	24.06.2004
		DE 50304518 D1	14.09.2006
		EP 1572610 A1	14.09.2005
		EP 1572610 B1	02.08.2006
		ES 2270165 T3	01.04.2007
		JP 2006-509806 A	23.03.2006
		JP 4504201 B2	14.07.2010
		KR 200500883 13 A	05.09.2005
		MY 136163 A	29.08.2008
		US 7064239 B2	20.06.2006
		W0 2004-054948 A1	01.07.2004